

bambooBSC install

author: Bill chen
contact: chen.xin.nien@gmail.com

Quick view:

Linux: <https://github.com/billchen198318/bamboobsc#install-on-linux>

Windows: <https://www.youtube.com/watch?v=pM3q9udreDo>

System required

A. **JDK8** (jdk8 is required)

B. MySQL 5.6 or later

1. DataBase setup

- a. first install **MySQL Server**
- b. config **max_allowed_packet=16M**
- c. config **lower_case_table_names = 1**

example for my.ini (my.cnf)

```
[mysqld]  
max_allowed_packet=16M  
lower_case_table_names = 1
```

- d. import bbcore.sql to DataBase
- ```
mysql -u root -p
MYSQL> create database bbcore;
MYSQL> exit;
mysql bbcore -u root -p < bbcore.sql
```

In **Linux** or **FreeBSD** must be set **lower\_case\_table\_names = 1**

## 2. Config settings file

- a. modify apache-tomcat-8.0.36\webapps\core-web\WEB-INF\classes\applicationContext\conf\applicationContext-datasource.properties
- b. modify apache-tomcat-8.0.36\webapps\gsbsc-web\WEB-INF\classes\applicationContext\conf\applicationContext-datasource.properties
- c. modify apache-tomcat-8.0.36\webapps\qcharts-web\WEB-INF\classes\applicationContext\conf\applicationContext-datasource.properties
- d. modify apache-tomcat-8.0.36\webapps\gsbsc-mobile-web\WEB-INF\classes\applicationContext\conf\applicationContext-datasource.properties

dataSource.jdbcUrl= this options modify success database server address

dataSource.user= this options modify mysql account

dataSource.password= this options modify mysql password

## 3. Start

Windows:

apache-tomcat-8.0.36\bin\catalina.bat run

or

apache-tomcat-8.0.36\bin\startup.bat

Linux / \*BSD:

apache-tomcat-8.0.36/bin/startup.sh

## 4. Open the Web ( If the server IP-Address is 127.0.0.1 and PORT is 8080 )

input url

**http://127.0.0.1:8080/core-web/pages/way.jsp**

if way.jsp cannot redirect to login page. change 127.0.0.1:8080/core-web/index.action

http://127.0.0.1:8080/core-web/index.action

\*\*\* please use **Firefox** or **Google chrome** . **Not use IE** some functions not support \*\*\*

## 5. Login account

administrator user  
account: **admin**  
password: **admin99**

hr manger ( same power user, but can delete account )  
account: **tiffany**  
password: **tiffany**

default user(power user)  
account: **tester**  
password: **tester**

sales ( only view , can input measure-data and enter 360 project score )  
account: **steven**  
password: **steven**

## 6. modify Application site settings ( If you do not operate this step may page will like figure 6-3, error for page request )

1. click Application site item for menu
2. Query ( figure 6-1 )
3. click modify icons ( figure 6-1 )


In edit mode, modify Host to correct server **hostname with server-port** , or **IP address with server-port** and click **Save**. ( figure 6-2 )

**After modification, please refresh( click F5 ) the WEB to take effect**


**Need to change the settings, including**

- A. CORE**
- B. BSC**
- C. QCHARTS**


**\*\*\* If the results page ( figure 6-3 ), Step 6 Host ( figure 6-2 ) are usually not set correctly. \*\*\***

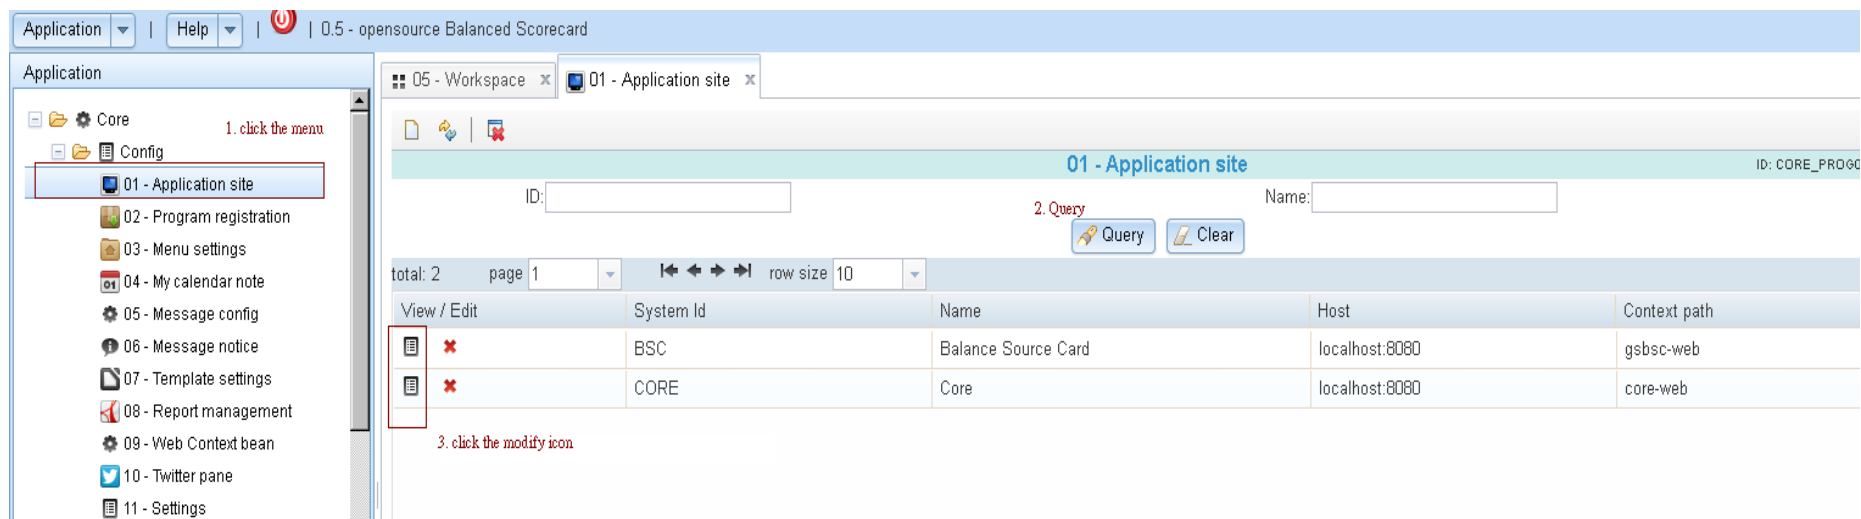

( figure 6-1 ) : management Application site page

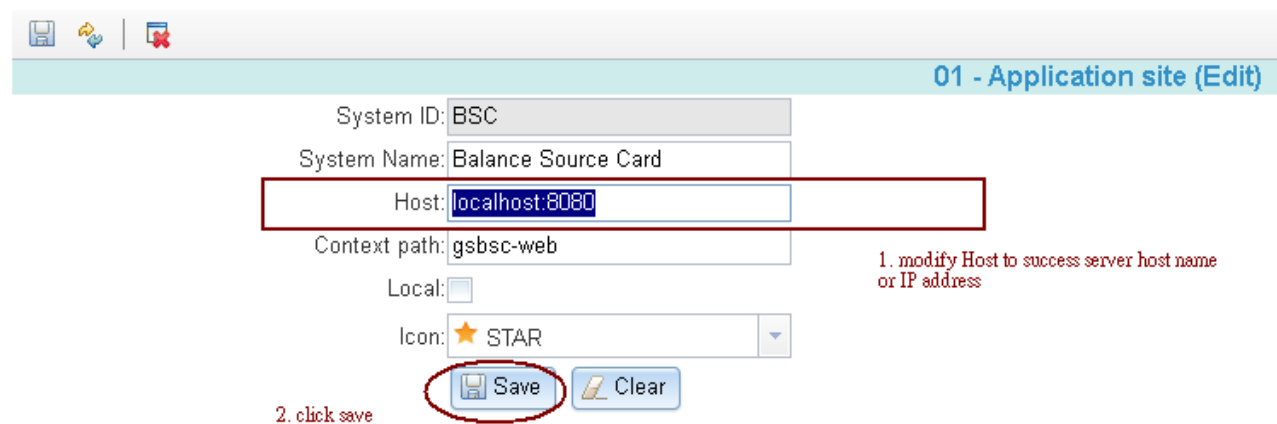

( figure 6-2 ) : modify Application site page

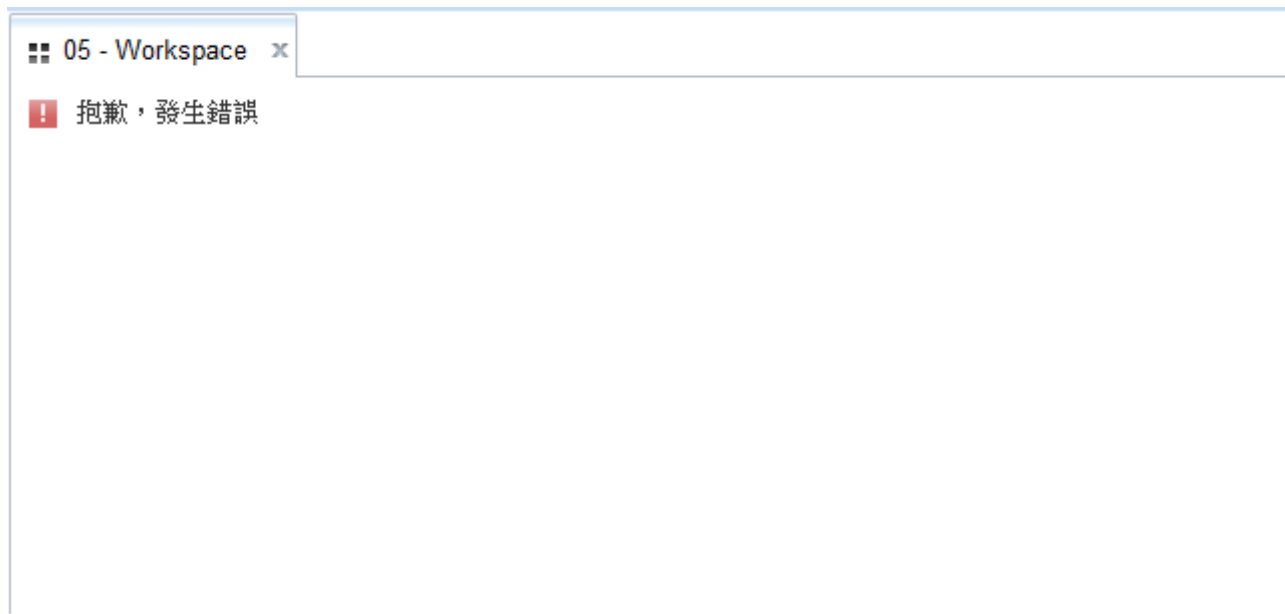

( figure 6-3 ) : request page fail !

## 7. User lost account password

command script file in WEB-INF\classes\

**command:**

lost\_password 1 **account-id**


**Linux:**

lost\_password.sh

**Windows:**

lost\_password.bat

**example generate new password for account tester:** lost\_password 1 tester

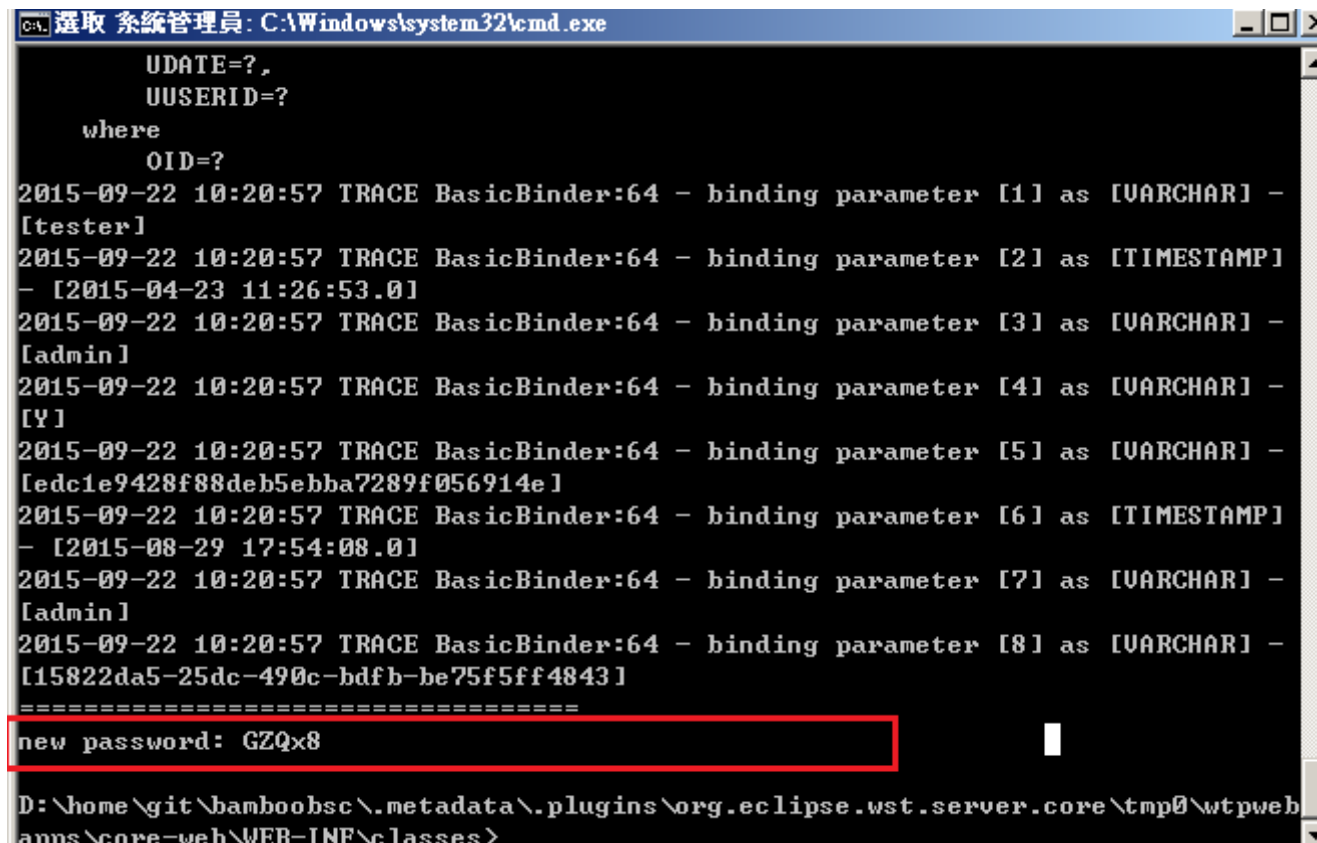

```
C:\Windows\system32\cmd.exe
UPDATE=?
UUSERID=?
where
OID=?
2015-09-22 10:20:57 TRACE BasicBinder:64 - binding parameter [1] as [VARCHAR] -
[tester]
2015-09-22 10:20:57 TRACE BasicBinder:64 - binding parameter [2] as [TIMESTAMP]
- [2015-04-23 11:26:53.0]
2015-09-22 10:20:57 TRACE BasicBinder:64 - binding parameter [3] as [VARCHAR] -
[admin]
2015-09-22 10:20:57 TRACE BasicBinder:64 - binding parameter [4] as [VARCHAR] -
[Y]
2015-09-22 10:20:57 TRACE BasicBinder:64 - binding parameter [5] as [VARCHAR] -
[edc1e9428f88deb5ebba7289f056914e]
2015-09-22 10:20:57 TRACE BasicBinder:64 - binding parameter [6] as [TIMESTAMP]
- [2015-08-29 17:54:08.0]
2015-09-22 10:20:57 TRACE BasicBinder:64 - binding parameter [7] as [VARCHAR] -
[admin]
2015-09-22 10:20:57 TRACE BasicBinder:64 - binding parameter [8] as [VARCHAR] -
[15822da5-25dc-490c-bdfb-be75f5ff4843]
=====
new password: GZQx8
D:\home\git\bamboobsc\.metadata\.plugins\org.eclipse.wst.server.core\tmp0\wtpweb
apps\core-web\WEB-INF\classes>
```

## 7. Server ( apache-tomcat server & bambooBSC webapps ) run with DHCP net environment

when reboot server the IP-address will reset on my server environment, but not want every config bambooBSC config

reference :

<https://github.com/billchen198318/bamboobsc/issues/24>

### Config settings file

- modify apache-tomcat-8.0.36\webapps\core-web\WEB-INF\classes\applicationContext\conf\applicationContext-appSettings.properties
- modify apache-tomcat-8.0.36\webapps\gsbsc-web\WEB-INF\classes\applicationContext\conf\applicationContext-appSettings.properties
- modify apache-tomcat-8.0.36\webapps\qcharts-web\WEB-INF\classes\applicationContext\conf\applicationContext-appSettings.properties

config base.applicationSiteHostUpdateMode value to 2

**base.applicationSiteHostUpdateMode=2**