

Data Analysis for ‘Punishment is Slower than Cooperation or Defection’

Table of contents

1. Setup	2
Load required packages	2
Load required data	2
Create helper functions	3
2. Analysis	3
Number of observations per experiment	3
Per-game characteristics	3
Distribution of decision-making	5
Network characteristics	7
Decision times	8
3. Regression Modeling	9
Punishment vs. time pressure	9
Cooperation vs. time pressure	10
Defection vs. time pressure	12
Decision times vs. time pressure (not useful)	13
Punishment mechanisms vs. time pressure	16
Decision time as the outcome	20
Supplementary Analyses for Verification	29
Testing the reciprocal effect of defection for defection decisions (Table S12) . .	41
Evaluating the effect of choosing punishment on rewiring (Supplemental Table S13)	45
4. Figures	46
Figure 1 - Example of Player’s Screen	46

Figure 2 - Behavior Distribution, Decision Times, and Punishment Mechanisms, Experiment 1	47
Main	55
Figure 3 - Behavior Distribution, Decision Times, and Punishment Mechanisms, Experiment 2	55
Main	56
Figure 4 - Punishment Mechanism Decision Times, Experiment 2	60
Main	65
Figure S2 - Distribution of Decision Times, Experiment 1	67
Figure S3 - Sensitivity Analysis for Invisible Wealth Games Only (Exp. 1)	68

1. Setup

Load required packages

```
library(tidyverse)
library(igraph)
library(lme4)
library(lmerTest)
library(DescTools)
library(data.table)
library(patchwork)
library(stringr)
library(ggpattern)
library(magick)
library(broom.mixed)
library(simr)
```

Load required data

```
## Experiment 1
exp1data = read_csv("~/Documents/Projects/harming_esn/data/final/exp1data_rev3.csv",
                    show_col_types = FALSE)

## Experiment 2
exp2data = read_csv("~/Documents/Projects/harming_esn/data/final/exp2data_rev3.csv",
                    show_col_types = FALSE)
```

Create helper functions

```
mean1 = function(x) {mean(x,na.rm=TRUE)}  
median1 = function(x) {median(x, na.rm = TRUE)}  
sd1 = function(x) {sd(x, na.rm = TRUE)}  
se_mean = function(x) sd1(x)/sqrt(sum(is.na(x) == 0))
```

2. Analysis

Number of observations per experiment

Experiment 1

```
# Experiment 1  
exp1data %>%  
  filter(round > 0, is.na(behavior) == F) %>%  
  nrow()
```

```
[1] 9776
```

Experiment 2

```
# Experiment 2  
exp2data %>%  
  filter(round > 0, is.na(behavior) == F) %>%  
  nrow()
```

```
[1] 10654
```

Per-game characteristics

Experiment 1

```
exp1data %>%  
  filter(round >= 1) %>%  
  group_by(game) %>%  
  select(superid) %>%  
  unique() %>%  
  nrow()
```

[1] 719

```
exp1data %>%
  filter(round >= 1) %>%
  group_by(game) %>%
  select(superid) %>%
  unique() %>%
  summarize(n = n()) %>%
  summarize(`Mean Players` = mean(n),
            `Min Players` = min(n),
            `Max Players` = max(n))
```

```
# A tibble: 1 x 3
  `Mean Players` `Min Players` `Max Players`
      <dbl>         <int>         <int>
1      14.4           8           25
```

Experiment 2

```
# Players per game, min, max - Experiment 2
exp2data %>%
  filter(round >= 0) %>%
  group_by(game) %>%
  select(superid) %>%
  unique() %>%
  summarize(n = n()) %>%
  summarize(`Mean Players` = mean(n),
            `Min Players` = min(n),
            `Max Players` = max(n))
```

```
# A tibble: 1 x 3
  `Mean Players` `Min Players` `Max Players`
      <dbl>         <int>         <int>
1      14.8           8           20
```

Number of observations in Exp. 2, TP+/TP- settings

```
exp2data %>%
  filter(time_pressure == "Plus", round >= 1, behavior %in% c("C", "D", "P")) %>%
  nrow()
```

[1] 5407

```
exp2data %>%  
  filter(time_pressure == "Minus", round >= 1, behavior %in% c("C", "D", "P")) %>%  
  nrow()
```

[1] 5247

```
# Number of players per condition in Experiment 2  
exp2data %>%  
  filter(round >= 1, behavior %in% c("C", "D", "P")) %>%  
  group_by(time_pressure) %>%  
  select(superid) %>%  
  unique() %>%  
  count()
```

Adding missing grouping variables: `time_pressure`

```
# A tibble: 2 x 2  
# Groups:   time_pressure [2]  
  time_pressure      n  
  <chr>          <int>  
1 Minus          366  
2 Plus           372
```

Distribution of decision-making

Experiment 1

```
# Decision distribution - Experiment 1  
data1_behavior_count = exp1data %>%  
  filter(round >= 1) %>%  
  group_by(behavior) %>%  
  filter(behavior %in% c("C", "D", "P")) %>%  
  summarize(count = n()) %>%  
  ungroup() %>%  
  mutate(proportion = count/sum(count))  
  
# Confidence Intervals  
data1_behavior_CI = MultinomCI(x = c(4878, 4336, 562), sides = "two.sided") %>%  
  as_tibble()
```

Experiment 2

```
# Decision distribution - Experiment 2
exp2data_count = exp2data %>% filter(round >= 1) %>%
  group_by(behavior) %>%
  filter(behavior %in% c("C", "D", "P")) %>%
  summarize(count = n()) %>%
  ungroup() %>%
  mutate(proportion = count/sum(count))

exp2data_all_CI = MultinomCI(c(4185, 5790, 679), sides = "two.sided")

exp2data_tp_plus_count = exp2data %>%
  group_by(behavior) %>%
  filter(time_pressure == "Plus", behavior %in% c("C", "D", "P")) %>%
  summarize(count = n()) %>%
  ungroup() %>%
  mutate(proportion = count/sum(count))

exp2data_tp_plus_CI = MultinomCI(c(2172, 2897, 338), sides = "two.sided")

exp2data_tp_plus_times = exp2data %>%
  group_by(behavior) %>%
  filter(time_pressure == "Plus", behavior %in% c("C", "D", "P")) %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec),
            LL_mean = mean_dt - 1.96*se_mean_dt,
            UL_mean = mean_dt + 1.96*se_mean_dt)

exp2data_tp_minus_count = exp2data %>%
  group_by(behavior) %>%
  filter(time_pressure == "Minus", behavior %in% c("C", "D", "P")) %>%
  summarize(count = n()) %>%
  ungroup() %>%
  mutate(proportion = count/sum(count))

exp2data_tp_minus_times = exp2data %>%
  group_by(behavior) %>%
  filter(time_pressure == "Minus", behavior %in% c("C", "D", "P")) %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec),
            LL_mean = mean_dt - 1.96*se_mean_dt,
            UL_mean = mean_dt + 1.96*se_mean_dt)
```

```
exp2data_tp_minus_CI = MultinomCI(c(2013, 2893, 341), sides = "two.sided")
```

```
# Behavior breakdown - Experiment B, TP-
exp2data_tp_minus_count = exp2data %>%
  group_by(behavior) %>%
  filter(time_pressure == "Minus", behavior %in% c("C", "D", "P")) %>%
  summarize(count = n()) %>%
  ungroup() %>%
  mutate(proportion = count/sum(count))

exp2data_tp_minus_CI = MultinomCI(c(2013, 2893, 341), sides = "two.sided")
```

```
# Behavior breakdown - Experiment B, TP+
exp2data_tp_plus_count = exp2data %>%
  group_by(behavior) %>%
  filter(time_pressure == "Plus", behavior %in% c("C", "D", "P")) %>%
  summarize(count = n()) %>%
  ungroup() %>%
  mutate(proportion = count/sum(count))

exp2data_tp_plus_CI = MultinomCI(c(2172, 2897, 338), sides = "two.sided")
```

Network characteristics

Experiment 1

```
mean1(exp1data$degree)
```

```
[1] 5.911319
```

```
min(exp1data$degree, na.rm = T)
```

```
[1] 1
```

```
max(exp1data$degree, na.rm = T)
```

```
[1] 17
```

Experiment 2

```
mean1(exp2data$degree)
```

```
[1] 5.721265
```

```
min(exp2data$degree, na.rm = T)
```

```
[1] 1
```

```
max(exp2data$degree, na.rm = T)
```

```
[1] 16
```

Decision times

Experiment 1

```
data1_times = exp1data %>%  
  group_by(behavior) %>%  
  filter(behavior %in% c("C", "D", "P")) %>%  
  summarize(mean_dt = mean1(behaviorTime_sec),  
            se_mean_dt = se_mean(behaviorTime_sec),  
            LL_mean = mean_dt - 1.96*se_mean_dt,  
            UL_mean = mean_dt + 1.96*se_mean_dt)
```

```
exp1data %>%  
  filter(local_rate_punish_lag > 0.25, behavior %in% c("C", "D", "P")) %>%  
  group_by(behavior) %>%  
  summarize(mean_dt = mean1(behaviorTime_sec),  
            se_mean_dt = se_mean(behaviorTime_sec),  
            LL_mean = mean_dt - 1.96*se_mean_dt,  
            UL_mean = mean_dt + 1.96*se_mean_dt)
```

```
# A tibble: 3 x 5  
  behavior mean_dt se_mean_dt LL_mean UL_mean  
  <chr>      <dbl>      <dbl>   <dbl>   <dbl>  
1 C          7.19        1.05    5.14    9.24  
2 D          4.57        0.298   3.99    5.16  
3 P          5.45        1.19    3.12    7.77
```


Experiment 2

```
exp2data %>%
  group_by(behavior, time_pressure) %>%
  filter(behavior %in% c("C", "D", "P")) %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec),
            UL_mean = mean_dt + 1.96*se_mean_dt,
            LL_mean = mean_dt - 1.96*se_mean_dt)
```

`summarise()` has grouped output by 'behavior'. You can override using the `.groups` argument.

```
# A tibble: 6 x 6
# Groups:   behavior [3]
  behavior time_pressure mean_dt se_mean_dt UL_mean LL_mean
  <chr>      <chr>          <dbl>    <dbl>    <dbl>    <dbl>
1 C        Minus          3.13     0.0537     3.24     3.03
2 C        Plus           2.02     0.00987    2.04     2.00
3 D        Minus          2.85     0.0419     2.93     2.77
4 D        Plus           1.92     0.00826    1.94     1.91
5 P        Minus          3.82     0.203      4.22     3.42
6 P        Plus           2.11     0.0301     2.17     2.05
```

3. Regression Modeling

Punishment vs. time pressure

```
m1 = glmer(behavior_punish ~ time_pressure + round + (1|game) + (1|superid),
  data = exp2data %>% filter(round > 0), family = binomial, nAGQ=0,
  control = glmerControl(optimizer = c("bobyqa"),
    optCtrl=list(maxfun=2e5),
    calc.derivs=FALSE))
summary(m1)
```

Generalized linear mixed model fit by maximum likelihood (Adaptive Gauss-Hermite Quadrature, nAGQ = 0) [glmerMod]
Family: binomial (logit)
Formula: behavior_punish ~ time_pressure + round + (1 | game) + (1 | superid)

```
Data: exp2data %>% filter(round > 0)
Control: glmerControl(optimizer = c("bobyqa"), optCtrl = list(maxfun = 2e+05),
  calc.derivs = FALSE)
```

AIC	BIC	logLik	deviance	df.resid
3639.8	3676.2	-1814.9	3629.8	10742

Scaled residuals:

Min	1Q	Median	3Q	Max
-2.9801	-0.1020	-0.0884	-0.0793	4.6005

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	6.908	2.6283
game	(Intercept)	0.641	0.8006

Number of obs: 10747, groups: superid, 739; game, 50

Fixed effects:

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	-3.69099	0.25747	-14.335	<2e-16 ***
time_pressurePlus	-0.24888	0.34838	-0.714	0.4750
round	-0.02644	0.01120	-2.362	0.0182 *

 Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	tm_prP
tm_prssrPls	-0.661	
round	-0.324	-0.001

```
# p = 0.475
```

Cooperation vs. time pressure

```
m1.1 = glmer(behavior_coop ~ time_pressure + round + (1|game) + (1|superid),
  data = exp2data %>% filter(round > 0), family = binomial, nAGQ=0,
  control = glmerControl(optimizer = c("bobyqa"),
    optCtrl=list(maxfun=2e5),
    calc.derivs=FALSE))
summary(m1.1)
```

```

Generalized linear mixed model fit by maximum likelihood (Adaptive
Gauss-Hermite Quadrature, nAGQ = 0) [glmerMod]
Family: binomial ( logit )
Formula: behavior_coop ~ time_pressure + round + (1 | game) + (1 | superid)
Data: exp2data %>% filter(round > 0)
Control: glmerControl(optimizer = c("bobyqa"), optCtrl = list(maxfun = 2e+05),
calc.derivs = FALSE)

```

AIC	BIC	logLik	deviance	df.resid
6102.1	6138.5	-3046.0	6092.1	10742

Scaled residuals:

Min	1Q	Median	3Q	Max
-4.2875	-0.1092	-0.0839	0.1164	4.4511

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	27.00	5.196
game	(Intercept)	2.42	1.556

Number of obs: 10747, groups: superid, 739; game, 50

Fixed effects:

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	-0.815089	0.434020	-1.878	0.0604 .
time_pressurePlus	0.265534	0.605401	0.439	0.6609
round	-0.048143	0.008987	-5.357	8.46e-08 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	tm_prP
tm_prssrPls	-0.699	
round	-0.157	-0.002

```
# p = 0.661
```

Power calculation for Experiment 2

We are interested here in the power of Experiment 2 to detect differences in the rate of cooperation. A simulation-based approach for determining power is used due to the hierarchical structure of the experimental data.

```
# Use model 1.1 as the baseline
m1.1_pwr = m1.1
round(summary(m1.1_pwr)$coef, 4)
```

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	-0.8151	0.4340	-1.8780	0.0604
time_pressurePlus	0.2655	0.6054	0.4386	0.6609
round	-0.0481	0.0090	-5.3571	0.0000

We want to estimate the ability of Exp. 2 to determine an 11.7% increase in cooperation relative to the deliberative condition. In this case, the deliberative condition is the TP- setting (the reference group for the time pressure variable in model 1.1).

```
fixef(m1.1_pwr)['time_pressurePlus'] = 0.608
# powerSim(m1.1_pwr, nsim = 1000) #not run
```

Defection vs. time pressure

```
m1.2 = glmer(behavior_defect ~ time_pressure + round + (1|game) + (1|superid),
             data = exp2data %>% filter(round > 0), family = binomial, nAGQ=0,
             control = glmerControl(optimizer = c("bobyqa"),
                                     optCtrl=list(maxfun=2e5),
                                     calc.derivs=FALSE))

summary(m1.2)
```

```
Generalized linear mixed model fit by maximum likelihood (Adaptive
Gauss-Hermite Quadrature, nAGQ = 0) [glmerMod]
Family: binomial ( logit )
Formula: behavior_defect ~ time_pressure + round + (1 | game) + (1 | superid)
Data: exp2data %>% filter(round > 0)
Control: glmerControl(optimizer = c("bobyqa"), optCtrl = list(maxfun = 2e+05),
calc.derivs = FALSE)
```

AIC	BIC	logLik	deviance	df.resid
5658.6	5695.0	-2824.3	5648.6	10742

Scaled residuals:

Min	1Q	Median	3Q	Max
-----	----	--------	----	-----

-4.5487 -0.1017 0.0728 0.1006 4.4163

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	35.060	5.921
game	(Intercept)	3.392	1.842

Number of obs: 10747, groups: superid, 739; game, 50

Fixed effects:

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	0.034318	0.502767	0.068	0.946
time_pressurePlus	-0.216417	0.703294	-0.308	0.758
round	0.055394	0.009602	5.769	7.97e-09 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	tm_prP
tm_prssrPls	-0.699	
round	-0.147	-0.002

p = 0.758

Decision times vs. time pressure (not useful)

```
model_dt_coop = lmer(behaviorTime_sec ~ time_pressure + round + (1|game) + (1|superid),  
                      data = exp2data %>% filter(round > 0, behavior_coop == 1))  
summary(model_dt_coop)
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [lmerModLmerTest]

Formula: behaviorTime_sec ~ time_pressure + round + (1 | game) + (1 | superid)

Data: exp2data %>% filter(round > 0, behavior_coop == 1)

REML criterion at convergence: 13885.1

Scaled residuals:

Min	1Q	Median	3Q	Max
-3.8000	-0.2551	-0.0807	0.1074	21.7822

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	1.15374	1.0741
game	(Intercept)	0.06439	0.2538
Residual		2.33938	1.5295

Number of obs: 3588, groups: superid, 432; game, 50

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	3.404e+00	1.107e-01	5.194e+01	30.744	< 2e-16 ***
time_pressurePlus	-1.275e+00	1.435e-01	3.649e+01	-8.887	1.17e-10 ***
round	-8.243e-03	6.150e-03	3.285e+03	-1.340	0.18

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	tm_prP
tm_prssrPls	-0.627	
round	-0.423	-0.014

```
model_dt_def = lmer(behaviorTime_sec ~ time_pressure + round + (1|game) + (1|superid),
                     data = exp2data %>% filter(round > 0, behavior_defect == 1))
summary(model_dt_def)
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [lmerModLmerTest]

Formula: behaviorTime_sec ~ time_pressure + round + (1 | game) + (1 | superid)

Data: exp2data %>% filter(round > 0, behavior_defect == 1)

REML criterion at convergence: 19604.6

Scaled residuals:

Min	1Q	Median	3Q	Max
-5.6180	-0.2482	-0.0776	0.1050	27.1570

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	0.945248	0.97224
game	(Intercept)	0.001146	0.03385
Residual		2.171540	1.47361

Number of obs: 5200, groups: superid, 509; game, 50

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	3.162e+00	7.875e-02	7.030e+01	40.155	< 2e-16 ***
time_pressurePlus	-1.055e+00	9.991e-02	4.290e+01	-10.564	1.64e-13 ***
round	-1.729e-02	4.853e-03	4.794e+03	-3.563	0.000371 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	tm_prP
tm_prssrPls	-0.593	
round	-0.489	-0.014

```
model_dt_pun = lmer(behaviorTime_sec ~ time_pressure + round + (1|game) + (1|superid),  
  data = exp2data %>% filter(round > 0, behavior_punish == 1))
```

boundary (singular) fit: see help('isSingular')

```
summary(model_dt_pun)
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [lmerModLmerTest]

Formula: behaviorTime_sec ~ time_pressure + round + (1 | game) + (1 | superid)

Data: exp2data %>% filter(round > 0, behavior_punish == 1)

REML criterion at convergence: 2607.7

Scaled residuals:

Min	1Q	Median	3Q	Max
-2.9474	-0.2663	-0.0885	0.0699	9.1708

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	3.673	1.917
game	(Intercept)	0.000	0.000
Residual		6.146	2.479

Number of obs: 525, groups: superid, 176; game, 49

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	4.17743	0.32280	283.53251	12.941	< 2e-16 ***
time_pressurePlus	-1.87849	0.39484	127.32898	-4.758	5.23e-06 ***
round	-0.01823	0.02866	450.29088	-0.636	0.525

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

```
(Intr) tm_prP
tm_prssrPls -0.437
round       -0.637 -0.077
optimizer (nloptwrap) convergence code: 0 (OK)
boundary (singular) fit: see help('isSingular')
```

Punishment mechanisms vs. time pressure

Punishment for copying/retaliation

```
m2.1 = glmer(punish_type_CR ~ time_pressure + round + (1|game) + (1|superid),
             data = exp2data %>% filter(round > 0), family = binomial, nAGQ=0,
             control = glmerControl(optimizer = c("bobyqa"),
                                     optCtrl=list(maxfun=2e5),
                                     calc.derivs=FALSE))

summary(m2.1)
```

Generalized linear mixed model fit by maximum likelihood (Adaptive

Gauss-Hermite Quadrature, nAGQ = 0) [glmerMod]

Family: binomial (logit)

Formula: punish_type_CR ~ time_pressure + round + (1 | game) + (1 | superid)

Data: exp2data %>% filter(round > 0)

Control: glmerControl(optimizer = c("bobyqa"), optCtrl = list(maxfun = 2e+05),
calc.derivs = FALSE)

AIC	BIC	logLik	deviance	df.resid
1559.8	1596.2	-774.9	1549.8	10742

Scaled residuals:

Min	1Q	Median	3Q	Max
-1.1200	-0.1048	-0.0669	-0.0467	6.6001

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	2.722	1.650
game	(Intercept)	2.117	1.455

Number of obs: 10747, groups: superid, 739; game, 50

Fixed effects:

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	-5.15894	0.38747	-13.315	<2e-16 ***
time_pressurePlus	-0.07021	0.50659	-0.139	0.89
round	0.02031	0.01840	1.104	0.27

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	tm_prP
tm_prssrPls	-0.647	
round	-0.392	0.000

```
# p = 0.89
```

Punishment for negative reinforcement

```
m2.2 = glmer(punish_type_NR ~ time_pressure + round + (1|game) + (1|superid),
             data = exp2data %>% filter(round > 0), family = binomial, nAGQ=0,
             control = glmerControl(optimizer = c("bobyqa"),
                                     optCtrl=list(maxfun=2e5),
                                     calc.derivs=FALSE))

summary(m2.2)
```

Generalized linear mixed model fit by maximum likelihood (Adaptive

Gauss-Hermite Quadrature, nAGQ = 0) [glmerMod]

Family: binomial (logit)

Formula: punish_type_NR ~ time_pressure + round + (1 | game) + (1 | superid)

Data: exp2data %>% filter(round > 0)

Control: glmerControl(optimizer = c("bobyqa"), optCtrl = list(maxfun = 2e+05),
calc.derivs = FALSE)

AIC	BIC	logLik	deviance	df.resid
-----	-----	--------	----------	----------

```

2747.8  2784.2  -1368.9  2737.8  10742

Scaled residuals:
    Min       1Q   Median       3Q      Max
-1.5280 -0.1039 -0.0845 -0.0722  5.0321

Random effects:
 Groups   Name      Variance Std.Dev.
superid (Intercept)  4.903     2.214
game     (Intercept)  1.007     1.004
Number of obs: 10747, groups:  superid, 739; game, 50

Fixed effects:
              Estimate Std. Error z value Pr(>|z|)
(Intercept)   -4.55764    0.29037 -15.696  <2e-16 ***
time_pressurePlus -0.18463    0.38230  -0.483   0.6291
round           0.03579    0.01325   2.702   0.0069 **
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:
              (Intr) tm_prP
tm_prssrPls -0.647
round        -0.384  0.000

# p = 0.629

```

Punishment for inequality aversion

```

m2.3 = glmer(punish_type_IA ~ time_pressure + round + (1|game) + (1|superid),
             data = exp2data %>% filter(round > 0), family = binomial, nAGQ=0,
             control = glmerControl(optimizer = c("bobyqa"),
                                     optCtrl=list(maxfun=2e5),
                                     calc.derivs=FALSE))
summary(m2.3)

```

```

Generalized linear mixed model fit by maximum likelihood (Adaptive
Gauss-Hermite Quadrature, nAGQ = 0) [glmerMod]
Family: binomial ( logit )
Formula: punish_type_IA ~ time_pressure + round + (1 | game) + (1 | superid)
Data: exp2data %>% filter(round > 0)

```

```
Control: glmerControl(optimizer = c("bobyqa"), optCtrl = list(maxfun = 2e+05),
  calc.derivs = FALSE)
```

AIC	BIC	logLik	deviance	df.resid
2697.2	2733.6	-1343.6	2687.2	10742

Scaled residuals:

Min	1Q	Median	3Q	Max
-1.3832	-0.0838	-0.0767	-0.0709	4.6221

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	6.9558	2.6374
game	(Intercept)	0.4017	0.6338

Number of obs: 10747, groups: superid, 739; game, 50

Fixed effects:

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	-4.56425	0.25976	-17.571	<2e-16 ***
time_pressurePlus	-0.26515	0.33947	-0.781	0.4348
round	0.02203	0.01332	1.654	0.0981 .

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	tm_prP
tm_prssrPls	-0.630	
round	-0.420	-0.001

```
# p = 0.435
```

Unclassified punishment

```
m2.4 = glmer(punish_type_U ~ time_pressure + round + (1|game) + (1|superid),
  data = exp2data %>% filter(round > 0), family = binomial, nAGQ=0,
  control = glmerControl(optimizer = c("bobyqa"),
    optCtrl=list(maxfun=2e5),
    calc.derivs=FALSE))
summary(m2.4)
```

Generalized linear mixed model fit by maximum likelihood (Adaptive

```

Gauss-Hermite Quadrature, nAGQ = 0) [glmerMod]
Family: binomial ( logit )
Formula: punish_type_U ~ time_pressure + round + (1 | game) + (1 | superid)
Data: exp2data %>% filter(round > 0)
Control: glmerControl(optimizer = c("bobyqa"), optCtrl = list(maxfun = 2e+05),
  calc.derivs = FALSE)

```

AIC	BIC	logLik	deviance	df.resid
1220.2	1256.6	-605.1	1210.2	10742

Scaled residuals:

Min	1Q	Median	3Q	Max
-1.4674	-0.0904	-0.0623	-0.0419	11.0773

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	3.919	1.9798
game	(Intercept)	0.358	0.5984

Number of obs: 10747, groups: superid, 739; game, 50

Fixed effects:

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	-3.86428	0.26454	-14.607	< 2e-16 ***
time_pressurePlus	-0.15285	0.33542	-0.456	0.649
round	-0.18400	0.02469	-7.452	9.2e-14 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	tm_prP
tm_prssrPls	-0.614	
round	-0.471	0.000

```
# p = 0.649
```

Decision time as the outcome

Exp 1 - Cooperation as reference

```

m4 = lmer(behaviorTime_sec ~ behavior + round + (1|game) + (1|superid),
  data = expldata %>%

```

```

filter(round > 0))

summary(m4)

```

```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [
lmerModLmerTest]
Formula: behaviorTime_sec ~ behavior + round + (1 | game) + (1 | superid)
Data: exp1data %>% filter(round > 0)

```

REML criterion at convergence: 69452.7

Scaled residuals:

Min	1Q	Median	3Q	Max
-2.9109	-0.3656	-0.1566	0.0373	10.4105

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	11.789	3.434
game	(Intercept)	1.824	1.350
Residual		64.809	8.050

Number of obs: 9776, groups: superid, 719; game, 50

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	6.79184	0.30462	110.40898	22.296	< 2e-16 ***
behaviorD	0.30411	0.23036	5471.24286	1.320	0.18684
behaviorP	1.21569	0.42149	9059.09346	2.884	0.00393 **
round	-0.16708	0.01916	9287.78481	-8.719	< 2e-16 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	behrD	behrP
behaviorD	-0.322		
behaviorP	-0.180	0.263	
round	-0.460	-0.058	0.023

Exp 1 - Defection as reference

```
m4_1 = lmer(behaviorTime_sec ~ factor(behavior, levels = c("D", "C", "P")) +
            round + (1|game) + (1|superid), data = exp1data)
summary(m4_1)
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [
lmerModLmerTest]

Formula: behaviorTime_sec ~ factor(behavior, levels = c("D", "C", "P")) +
round + (1 | game) + (1 | superid)
Data: exp1data

REML criterion at convergence: 69452.7

Scaled residuals:

Min	1Q	Median	3Q	Max
-2.9109	-0.3656	-0.1566	0.0373	10.4105

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	11.789	3.434
game	(Intercept)	1.824	1.350
Residual		64.809	8.050

Number of obs: 9776, groups: superid, 719; game, 50

Fixed effects:

	Estimate	Std. Error	df
(Intercept)	7.09595	0.31735	125.30780
factor(behavior, levels = c("D", "C", "P"))C	-0.30411	0.23036	5471.24286
factor(behavior, levels = c("D", "C", "P"))P	0.91157	0.42392	8963.54750
round	-0.16708	0.01916	9287.78482

	t value	Pr(> t)
(Intercept)	22.360	<2e-16 ***
factor(behavior, levels = c("D", "C", "P"))C	-1.320	0.1868
factor(behavior, levels = c("D", "C", "P"))P	2.150	0.0316 *
round	-8.719	<2e-16 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	f(,l=c("D","C","P"))C	f(,l=c("D","C","P"))P
f(,l=c("D","C","P"))C	-0.417		
f(,l=c("D","C","P"))P	-0.209	0.282	
round	-0.484	0.058	0.054

Exp 1 - Comparing the punishment mechanisms - CR punishment is the reference

```
m4_2 = lmer(behaviorTime_sec ~ punish_type_NR + punish_type_IA + punish_type_U +  
            round + (1|game) + (1|superid),  
            data = expdata %>% filter(behavior_punish == 1))  
summary(m4_2)
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [
lmerModLmerTest]

Formula: behaviorTime_sec ~ punish_type_NR + punish_type_IA + punish_type_U +
round + (1 | game) + (1 | superid)
Data: expdata %>% filter(behavior_punish == 1)

REML criterion at convergence: 3686.3

Scaled residuals:

Min	1Q	Median	3Q	Max
-1.7665	-0.4121	-0.1780	0.0855	6.0832

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	23.47	4.845
game	(Intercept)	11.29	3.360
Residual		64.44	8.028

Number of obs: 508, groups: superid, 174; game, 48

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	6.2481	1.5349	329.3702	4.071	5.88e-05 ***
punish_type_NR	0.5307	1.1866	487.8494	0.447	0.6549
punish_type_IA	1.5698	1.1200	424.9994	1.402	0.1618
punish_type_U	3.7815	1.6083	494.5013	2.351	0.0191 *
round	-0.1209	0.1023	479.7367	-1.182	0.2377

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	pn__NR	pn__IA	pns__U
pnsh_typ_NR	-0.485			
pnsh_typ_IA	-0.531	0.084		
punsh_typ_U	-0.608	0.501	0.464	
round	-0.364	-0.197	-0.061	-0.070

Exp 1 - Comparing copying/retaliation punishment vs. all others

```
m4_2_1 = lmer(behaviorTime_sec ~ punish_type_CR + round + (1|game) + (1|superid),
              data = exp1data %>%
                filter(behavior_punish == 1))
summary(m4_2_1)
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [lmerModLmerTest]

Formula: behaviorTime_sec ~ punish_type_CR + round + (1 | game) + (1 | superid)

Data: exp1data %>% filter(behavior_punish == 1)

REML criterion at convergence: 3690.5

Scaled residuals:

Min	1Q	Median	3Q	Max
-1.7020	-0.4204	-0.1869	0.0978	6.1235

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	23.89	4.887
game	(Intercept)	10.43	3.229
Residual		64.10	8.006

Number of obs: 508, groups: superid, 174; game, 48

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	9.1691	1.1074	169.5893	8.280	3.54e-14 ***
punish_type_CR	-2.4355	0.9306	483.1002	-2.617	0.00914 **
round	-0.1489	0.1003	479.6408	-1.484	0.13842

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	pn__CR
pnsh_typ_CR	-0.308	
round	-0.693	0.113

Exp 1 - Comparing unclassified punishment vs. all others


```
m4_2_2 = lmer(behaviorTime_sec ~ punish_type_U + round + (1|game) + (1|superid),
              data = exp1data %>%
              filter(behavior_punish == 1))
summary(m4_2_2)
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [
lmerModLmerTest]

Formula: behaviorTime_sec ~ punish_type_U + round + (1 | game) + (1 |
superid)

Data: exp1data %>% filter(behavior_punish == 1)

REML criterion at convergence: 4089.8

Scaled residuals:

Min	1Q	Median	3Q	Max
-1.9010	-0.4359	-0.1943	0.0883	6.0749

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	24.642	4.964
game	(Intercept)	8.374	2.894
	Residual	67.666	8.226

Number of obs: 560, groups: superid, 184; game, 49

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	7.80336	1.06843	157.29632	7.304	1.32e-11 ***
punish_type_U	2.10507	1.02123	549.35836	2.061	0.0397 *
round	-0.09103	0.09612	538.05539	-0.947	0.3440

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	pns__U
punsh_typ_U	-0.464	
round	-0.695	0.304

Exp 1 - Regression model with and without punishment in round t-1

```
m13 = lmer(behaviorTime_sec ~ round + last_punished + (1|game) + (1|superid),
            data = exp1data %>% filter(behavior_punish == 1))
```

```
summary(m13)
```

```
Linear mixed model fit by REML. t-tests use Satterthwaite's method [
lmerModLmerTest]
```

```
Formula: behaviorTime_sec ~ round + last_punished + (1 | game) + (1 |
superid)
```

```
Data: exp1data %>% filter(behavior_punish == 1)
```

```
REML criterion at convergence: 3690.5
```

```
Scaled residuals:
```

Min	1Q	Median	3Q	Max
-1.7020	-0.4204	-0.1869	0.0978	6.1235

```
Random effects:
```

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	23.89	4.887
game	(Intercept)	10.43	3.229
Residual		64.10	8.006

```
Number of obs: 508, groups: superid, 174; game, 48
```

```
Fixed effects:
```

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	9.1691	1.1074	169.5893	8.280	3.54e-14 ***
round	-0.1489	0.1003	479.6408	-1.484	0.13842
last_punished	-2.4355	0.9306	483.1002	-2.617	0.00914 **

```
---
```

```
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
Correlation of Fixed Effects:
```

	(Intr) round
round	-0.693
last_punshd	-0.308 0.113

Exp 2 - Controlling for time pressure

Time pressure +

```
exp2_tp_plus = exp2data %>% filter(time_pressure == "Plus")
exp2_tp_minus = exp2data %>% filter(time_pressure == "Minus")

m5a = lmer(behaviorTime_sec ~ behavior + round + (1|game) + (1|superid),
          data = exp2_tp_plus %>% filter(round > 0))
summary(m5a)
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [lmerModLmerTest]
 Formula: behaviorTime_sec ~ behavior + round + (1 | game) + (1 | superid)
 Data: exp2_tp_plus %>% filter(round > 0)

REML criterion at convergence: 2356.9

Scaled residuals:

Min	1Q	Median	3Q	Max
-3.2207	-0.6608	-0.0951	0.5662	4.8321

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	0.07370	0.27147
game	(Intercept)	0.00315	0.05613
Residual		0.08420	0.29018

Number of obs: 4066, groups: superid, 367; game, 25

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	2.090e+00	2.348e-02	6.115e+01	88.999	< 2e-16 ***
behaviorD	-5.140e-02	1.966e-02	2.483e+03	-2.614	0.00899 **
behaviorP	1.155e-01	2.799e-02	4.043e+03	4.128	3.73e-05 ***
round	-6.124e-03	1.091e-03	3.751e+03	-5.611	2.15e-08 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	behvrD	behvrP
behaviorD	-0.456		
behaviorP	-0.206	0.315	
round	-0.358	-0.043	-0.001

Time pressure -

```
m5b = lmer(behaviorTime_sec ~ behavior + round + (1|game) + (1|superid),
           data = exp2_tp_minus %>% filter(round > 0))

summary(m5b)
```

```
Linear mixed model fit by REML. t-tests use Satterthwaite's method [
lmerModLmerTest]
Formula: behaviorTime_sec ~ behavior + round + (1 | game) + (1 | superid)
Data: exp2_tp_minus %>% filter(round > 0)
```

REML criterion at convergence: 23330.5

Scaled residuals:

Min	1Q	Median	3Q	Max
-3.7670	-0.2960	-0.1224	0.0783	19.2939

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	1.58559	1.2592
game	(Intercept)	0.08172	0.2859
Residual		4.38568	2.0942

Number of obs: 5247, groups: superid, 366; game, 25

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	3.330e+00	1.228e-01	6.772e+01	27.117	< 2e-16 ***
behaviorD	-2.740e-01	1.069e-01	2.005e+03	-2.562	0.01048 *
behaviorP	4.700e-01	1.475e-01	5.177e+03	3.185	0.00145 **
round	-2.073e-02	6.745e-03	4.913e+03	-3.074	0.00213 **

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	behrD	behrP
behaviorD	-0.491		
behaviorP	-0.253	0.357	
round	-0.412	-0.037	0.009

Supplementary Analyses for Verification

Testing interaction between punishing environment and punishment decision making (Table S6)

```
exp1data = exp1data %>%
  mutate(local_rate_punish_lag_binary =
    case_when(local_rate_punish_lag == 0 ~ 'Low',
              local_rate_punish_lag != 0 ~ 'High'))

m4_no_int = lmer(behaviorTime_sec ~ behavior_punish + local_rate_punish_lag +
  round + (1|game) + (1|superid),
  data = exp1data %>% filter(round > 1))

m4_int = lmer(behaviorTime_sec ~ behavior_punish*local_rate_punish_lag +
  round + (1|game) + (1|superid),
  data = exp1data %>% filter(round > 1))

summary(m4_int)
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [

lmerModLmerTest]

Formula: behaviorTime_sec ~ behavior_punish * local_rate_punish_lag +
round + (1 | game) + (1 | superid)

Data: exp1data %>% filter(round > 1)

REML criterion at convergence: 63408.5

Scaled residuals:

	Min	1Q	Median	3Q	Max
	-3.0493	-0.3578	-0.1520	0.0321	10.7635

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	11.076	3.328
game	(Intercept)	1.554	1.247
Residual		59.983	7.745

Number of obs: 9020, groups: superid, 713; game, 50

Fixed effects:

	Estimate	Std. Error	df	t value
(Intercept)	6.5745	0.2951	116.7952	22.276

behavior_punish	1.2756	0.4545	8494.5666	2.806
local_rate_punish_lag	-0.6620	0.8331	8724.9751	-0.795
round	-0.1310	0.0206	8489.2586	-6.360
behavior_punish:local_rate_punish_lag	-4.0876	2.4373	8772.9935	-1.677

Pr(>|t|)

(Intercept)	< 2e-16 ***
behavior_punish	0.00502 **
local_rate_punish_lag	0.42684
round	2.12e-10 ***
behavior_punish:local_rate_punish_lag	0.09356 .

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	bhvr_p	lcl_	round
behavr_pnsh	-0.114			
lcl_rt_pns_	-0.196	0.102		
round	-0.584	0.041	0.086	
bhvr_pn:___	0.059	-0.418	-0.309	-0.019

Regression analysis for the effect of low initial wealth allocation on decision time (Tables S7, S8)

```
summary(lmer(behaviorTime_sec ~ initial_score_low + behavior + round + (1|game)
+ (1|superid), data = exp1data))
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [lmerModLmerTest]
Formula: behaviorTime_sec ~ initial_score_low + behavior + round + (1 | game) + (1 | superid)
Data: exp1data

REML criterion at convergence: 69452.7

Scaled residuals:

	Min	1Q	Median	3Q	Max
	-2.9146	-0.3656	-0.1562	0.0382	10.4141

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	11.806	3.436

```

game      (Intercept)  1.826   1.351
Residual                64.809   8.050
Number of obs: 9776, groups:  superid, 719; game, 50

```

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	6.66573	0.38930	253.32765	17.122	< 2e-16 ***
initial_score_low	0.17879	0.34334	603.94338	0.521	0.60275
behaviorD	0.30663	0.23045	5479.92156	1.331	0.18339
behaviorP	1.21876	0.42156	9060.96987	2.891	0.00385 **
round	-0.16710	0.01916	9287.58879	-8.719	< 2e-16 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	intl__	behvrD	behvrP
intl_scr_lw	-0.622			
behaviorD	-0.265	0.022		
behaviorP	-0.150	0.015	0.263	
round	-0.358	-0.003	-0.058	0.023

```

summary(lmer(behaviorTime_sec ~ initial_score_low + behavior + round +
             (1|game) + (1|superid),
             data = exp2data %>% filter(time_pressure == 'Minus')))

```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [lmerModLmerTest]

Formula: behaviorTime_sec ~ initial_score_low + behavior + round + (1 | game) + (1 | superid)

Data: exp2data %>% filter(time_pressure == "Minus")

REML criterion at convergence: 23332

Scaled residuals:

Min	1Q	Median	3Q	Max
-3.7773	-0.2968	-0.1225	0.0778	19.2842

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	1.58849	1.2604
game	(Intercept)	0.08541	0.2922
Residual		4.38547	2.0942

Number of obs: 5247, groups: superid, 366; game, 25

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	3.272e+00	1.640e-01	1.616e+02	19.952	< 2e-16 ***
initial_score_low	8.524e-02	1.583e-01	3.379e+02	0.538	0.59060
behaviorD	-2.749e-01	1.070e-01	2.007e+03	-2.570	0.01025 *
behaviorP	4.687e-01	1.476e-01	5.176e+03	3.176	0.00150 **
round	-2.072e-02	6.745e-03	4.913e+03	-3.072	0.00214 **

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	intl__	behvrD	behvrP
intl_scr_lw	-0.658			
behaviorD	-0.363	-0.008		
behaviorP	-0.182	-0.011	0.357	
round	-0.310	0.003	-0.037	0.009

```
summary(lmer(behaviorTime_sec ~ behavior + initial_score_low + round + (1|game)
+ (1|superid), data = exp2data %>% filter(time_pressure == 'Plus'))
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [lmerModLmerTest]

Formula: behaviorTime_sec ~ behavior + initial_score_low + round + (1 | game) + (1 | superid)

Data: exp2data %>% filter(time_pressure == "Plus")

REML criterion at convergence: 2361.6

Scaled residuals:

Min	1Q	Median	3Q	Max
-3.2220	-0.6618	-0.0931	0.5661	4.8309

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	0.073843	0.27174
game	(Intercept)	0.003195	0.05653
Residual		0.084201	0.29017

Number of obs: 4066, groups: superid, 367; game, 25

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	2.076e+00	3.285e-02	1.733e+02	63.197	< 2e-16 ***
behaviorD	-5.128e-02	1.967e-02	2.484e+03	-2.607	0.00918 **
behaviorP	1.158e-01	2.799e-02	4.041e+03	4.138	3.58e-05 ***
initial_score_low	2.027e-02	3.296e-02	3.489e+02	0.615	0.53909
round	-6.126e-03	1.091e-03	3.751e+03	-5.613	2.13e-08 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	behvrD	behvrP	intl__
behaviorD	-0.330			
behaviorP	-0.158	0.315		
intl_scr_lw	-0.698	0.005	0.016	
round	-0.255	-0.043	-0.001	-0.001

```
summary(lmer(behaviorTime_sec ~ punish_type_NR + punish_type_IA + punish_type_U
+ initial_score_low +
round + (1|game) + (1|superid),
data = exp1data %>% filter(behavior_punish == 1)))
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [

lmerModLmerTest]

Formula: behaviorTime_sec ~ punish_type_NR + punish_type_IA + punish_type_U +
initial_score_low + round + (1 | game) + (1 | superid)

Data: exp1data %>% filter(behavior_punish == 1)

REML criterion at convergence: 3683.3

Scaled residuals:

Min	1Q	Median	3Q	Max
-1.8090	-0.4179	-0.1820	0.0792	6.0808

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	24.29	4.928
game	(Intercept)	11.12	3.335
Residual		64.20	8.013

Number of obs: 508, groups: superid, 174; game, 48

Fixed effects:

Estimate	Std. Error	df	t value	Pr(> t)
----------	------------	----	---------	----------

(Intercept)	5.7683	1.6748	290.7348	3.444	0.000657	***
punish_type_NR	0.5899	1.1890	484.0219	0.496	0.620008	
punish_type_IA	1.2323	1.2123	469.3862	1.017	0.309910	
punish_type_U	3.7892	1.6085	493.0342	2.356	0.018876	*
initial_score_low	1.0097	1.3814	120.4577	0.731	0.466256	
round	-0.1250	0.1024	478.1856	-1.221	0.222565	

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	pn__NR	pn__IA	pns__U	intl__
pnsh_typ_NR	-0.469				
pnsh_typ_IA	-0.299	0.053			
punsh_typ_U	-0.555	0.499	0.431		
intl_scr_lw	-0.399	0.064	-0.379	-0.006	
round	-0.315	-0.200	-0.039	-0.070	-0.046

```
summary(lmer(behaviorTime_sec ~ punish_type_NR + punish_type_IA + punish_type_U
+ initial_score_low +
round + (1|game) + (1|superid),
data = exp2data %>%
filter(behavior_punish == 1, time_pressure == 'Minus')))
```

boundary (singular) fit: see help('isSingular')

Linear mixed model fit by REML. t-tests use Satterthwaite's method [
lmerModLmerTest]

Formula: behaviorTime_sec ~ punish_type_NR + punish_type_IA + punish_type_U +
initial_score_low + round + (1 | game) + (1 | superid)
Data: exp2data %>% filter(behavior_punish == 1, time_pressure == "Minus")

REML criterion at convergence: 1826.1

Scaled residuals:

Min	1Q	Median	3Q	Max
-2.5741	-0.2987	-0.1420	0.0779	7.4304

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	6.570	2.563
game	(Intercept)	0.000	0.000
Residual		9.037	3.006

Number of obs: 341, groups: superid, 100; game, 25

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	4.10574	0.88082	190.10165	4.661	5.9e-06 ***
punish_type_NR	1.03461	0.50453	307.49181	2.051	0.0411 *
punish_type_IA	-0.14245	0.59177	334.70019	-0.241	0.8099
punish_type_U	0.37886	0.71566	278.32617	0.529	0.5970
initial_score_low	-0.57891	0.73529	59.19624	-0.787	0.4342
round	-0.03548	0.04477	297.16389	-0.792	0.4287

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

```
(Intr) pn__NR pn__IA pns__U intl__
pnsh_typ_NR -0.422
pnsh_typ_IA -0.398 0.049
punsh_typ_U -0.593 0.467 0.574
intl_scr_lw -0.568 0.018 -0.140 0.011
round -0.299 -0.107 -0.127 0.046 0.032
optimizer (nloptwrap) convergence code: 0 (OK)
boundary (singular) fit: see help('isSingular')
```

```
summary(lmer(behaviorTime_sec ~ punish_type_NR + punish_type_IA + punish_type_U
+ initial_score_low +
round + (1|game) + (1|superid),
data = exp2data %>%
filter(behavior_punish == 1, time_pressure == 'Plus')))
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [
lmerModLmerTest]

Formula: behaviorTime_sec ~ punish_type_NR + punish_type_IA + punish_type_U +
initial_score_low + round + (1 | game) + (1 | superid)

Data: exp2data %>% filter(behavior_punish == 1, time_pressure == "Plus")

REML criterion at convergence: 174.3

Scaled residuals:

Min	1Q	Median	3Q	Max
-1.83298	-0.55507	0.02874	0.60241	2.32159

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	0.11062	0.33260
game	(Intercept)	0.00683	0.08265
Residual		0.07639	0.27638

Number of obs: 184, groups: superid, 76; game, 24

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	2.185287	0.116628	124.848840	18.737	<2e-16 ***
punish_type_NR	0.024358	0.068415	146.332603	0.356	0.722
punish_type_IA	-0.025223	0.074085	155.102352	-0.340	0.734
punish_type_U	-0.001092	0.097554	137.910560	-0.011	0.991
initial_score_low	0.019143	0.102787	74.808561	0.186	0.853
round	-0.004240	0.006033	126.423327	-0.703	0.483

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	pn__NR	pn__IA	pns__U	intl__
pnsh_typ_NR	-0.442				
pnsh_typ_IA	-0.303	0.103			
pnsh_typ_U	-0.532	0.558	0.451		
intl_scr_lw	-0.464	-0.072	-0.296	-0.088	
round	-0.457	-0.035	-0.053	0.156	0.087

Evaluating effect of past round defection rate on inequality aversion punishment (Table S9)

```
IA_data_e1 = exp1data %>% filter(punish_type_IA == T) %>% mutate(high_defect_rate_lag = ifelse(
summary(lmer(behaviorTime_sec ~ high_defect_rate_lag + round + (1|game) + (1|superid), data =
```

boundary (singular) fit: see help('isSingular')

Linear mixed model fit by REML. t-tests use Satterthwaite's method [lmerModLmerTest]
Formula: behaviorTime_sec ~ high_defect_rate_lag + round + (1 | game) + (1 | superid)
Data: IA_data_e1

REML criterion at convergence: 2039

Scaled residuals:

Min	1Q	Median	3Q	Max
-2.1463	-0.4384	-0.2147	0.0979	5.9454

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	0.00	0.000
game	(Intercept)	29.43	5.425
Residual		66.96	8.183

Number of obs: 283, groups: superid, 119; game, 43

Fixed effects:

	Estimate	Std. Error	df	t value
(Intercept)	7.00558	1.52616	128.04269	4.590
high_defect_rate_lagDefect rate > 0.5	1.76945	1.28524	276.37411	1.377
round	-0.07426	0.14125	278.96536	-0.526

	Pr(> t)
(Intercept)	1.04e-05 ***
high_defect_rate_lagDefect rate > 0.5	0.170
round	0.599

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr) h__r>0
hg___Dr>0.5	-0.272
round	-0.577 -0.291

optimizer (nloptwrap) convergence code: 0 (OK)
boundary (singular) fit: see help('isSingular')

```
IA_data_e2 = exp2data %>%  
  filter(punish_type_IA == T) %>%  
  mutate(high_defect_rate_lag = ifelse(local_rate_defect_lag > 0.5,  
                                       'Defect rate > 0.5',  
                                       "Defect rate <= 0.5"))  
  
summary(lmer(behaviorTime_sec ~ high_defect_rate_lag + round + (1|game) +  
            (1|superid),  
          data = IA_data_e2 %>% filter(time_pressure == 'Minus')))
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [

```

lmerModLmerTest]
Formula: behaviorTime_sec ~ high_defect_rate_lag + round + (1 | game) +
      (1 | superid)
Data: IA_data_e2 %>% filter(time_pressure == "Minus")

REML criterion at convergence: 1192.2

Scaled residuals:
      Min       1Q   Median       3Q      Max
-2.0322 -0.3084 -0.1641  0.0425  6.4899

Random effects:
Groups   Name             Variance Std.Dev.
superid  (Intercept)    6.414773  2.53274
game     (Intercept)    0.009413  0.09702
Residual                    12.457652  3.52954
Number of obs: 211, groups:  superid, 75; game, 25

Fixed effects:
              Estimate Std. Error      df t value
(Intercept)      3.52903    0.74703 149.44054   4.724
high_defect_rate_lagDefect rate > 0.5  1.25054    0.59541 188.67712   2.100
round            -0.03702    0.07108 183.67433  -0.521
              Pr(>|t|)
(Intercept)      5.28e-06 ***
high_defect_rate_lagDefect rate > 0.5  0.037 *
round            0.603
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:
      (Intr) h__r>0
hg___Dr>0.5 -0.407
round      -0.662 -0.162

```

```

summary(lmer(behaviorTime_sec ~ high_defect_rate_lag +
      round + (1|game) + (1|superid),
      data = IA_data_e2 %>% filter(time_pressure == 'Plus')))

```

boundary (singular) fit: see help('isSingular')

Linear mixed model fit by REML. t-tests use Satterthwaite's method [

```

lmerModLmerTest]
Formula: behaviorTime_sec ~ high_defect_rate_lag + round + (1 | game) +
      (1 | superid)
Data: IA_data_e2 %>% filter(time_pressure == "Plus")

REML criterion at convergence: 109

Scaled residuals:
      Min       1Q   Median       3Q      Max
-1.71800 -0.55936  0.07293  0.51427  2.17703

Random effects:
Groups   Name             Variance Std.Dev.
superid  (Intercept)  0.12424   0.3525
game     (Intercept)  0.00000   0.0000
Residual                    0.06913   0.2629
Number of obs: 113, groups:  superid, 55; game, 22

Fixed effects:
              Estimate Std. Error      df t value
(Intercept)    2.116992   0.098005 109.456692  21.601
high_defect_rate_lagDefect rate > 0.5  0.095327   0.066173  85.348506   1.441
round          -0.002140   0.008578  83.358857  -0.249
              Pr(>|t|)
(Intercept)    <2e-16 ***
high_defect_rate_lagDefect rate > 0.5    0.153
round          0.804
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:
      (Intr) h__r>0
hg___Dr>0.5 -0.353
round      -0.701 -0.111
optimizer (nloptwrap) convergence code: 0 (OK)
boundary (singular) fit: see help('isSingular')

```

Evaluating the effect of wealth visibility on inequality aversion punishment (Table S10, S11)

```

summary(glmer(punish_type_IA ~ showScore + round + (1|game) + (1|superid),
  data = expldata %>% filter(round > 0),

```

```

family = 'binomial', nAGQ=0,
control = glmerControl(optimizer = c("bobyqa"),
                        optCtrl=list(maxfun=2e5),
                        calc.derivs=FALSE)))

```

```

Generalized linear mixed model fit by maximum likelihood (Adaptive
Gauss-Hermite Quadrature, nAGQ = 0) [glmerMod]
Family: binomial ( logit )
Formula: punish_type_IA ~ showScore + round + (1 | game) + (1 | superid)
Data: exp1data %>% filter(round > 0)
Control: glmerControl(optimizer = c("bobyqa"), optCtrl = list(maxfun = 2e+05),
calc.derivs = FALSE)

```

AIC	BIC	logLik	deviance	df.resid
2115.4	2151.4	-1052.7	2105.4	9928

Scaled residuals:

Min	1Q	Median	3Q	Max
-1.6785	-0.0963	-0.0821	-0.0726	4.9926

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	4.6454	2.1553
game	(Intercept)	0.6706	0.8189

Number of obs: 9933, groups: superid, 719; game, 50

Fixed effects:

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	-4.626329	0.285225	-16.220	<2e-16 ***
showScore	0.233556	0.356549	0.655	0.512
round	-0.003266	0.015790	-0.207	0.836

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	shwScr
showScore	-0.656	
round	-0.424	0.000

```

summary(lmer(behaviorTime_sec ~ showScore + round + (1|game) + (1|superid),
data = exp1data %>% filter(punish_type_IA == 1)))

```



```

boundary (singular) fit: see help('isSingular')

Linear mixed model fit by REML. t-tests use Satterthwaite's method [
lmerModLmerTest]
Formula: behaviorTime_sec ~ showScore + round + (1 | game) + (1 | superid)
Data: exp1data %>% filter(punish_type_IA == 1)

REML criterion at convergence: 2074.9

Scaled residuals:
    Min       1Q   Median       3Q      Max
-2.0380 -0.4550 -0.2361  0.1051  5.8411

Random effects:
Groups   Name             Variance Std.Dev.
superid  (Intercept)    0.00      0.000
game     (Intercept)  25.92     5.092
Residual                    71.95     8.482
Number of obs: 286, groups:  superid, 120; game, 43

Fixed effects:
              Estimate Std. Error    df t value Pr(>|t|)
(Intercept)   7.16246    1.78256  67.67375   4.018  0.00015 ***
showScore     1.09465    1.99383  35.39306   0.549  0.58644
round        -0.01564    0.13893 281.94491  -0.113  0.91043
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:
      (Intr) shwScr
showScore -0.573
round     -0.576 -0.043
optimizer (nloptwrap) convergence code: 0 (OK)
boundary (singular) fit: see help('isSingular')

```

Testing the reciprocal effect of defection for defection decisions (Table S12)

```

# Reciprocation occurs when previous round local rate is >0

exp1data = exp1data %>% mutate(any_defectors_lag =
                                ifelse(local_rate_defect_lag > 0, 1, 0))

```

```
exp2data = exp2data %>% mutate(any_defectors_lag =
                                ifelse(local_rate_defect_lag > 0, 1, 0))
```

```
summary(lmer(behaviorTime_sec ~ any_defectors_lag + round +
              (1|game) + (1|superid),
              data = exp1data %>% filter(behavior_defect == 1, round > 0)))
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [lmerModLmerTest]
 Formula: behaviorTime_sec ~ any_defectors_lag + round + (1 | game) + (1 | superid)
 Data: exp1data %>% filter(behavior_defect == 1, round > 0)

REML criterion at convergence: 28985.1

Scaled residuals:

	Min	1Q	Median	3Q	Max
	-2.9714	-0.3557	-0.1635	0.0010	9.8659

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	15.0762	3.8828
game	(Intercept)	0.8647	0.9299
Residual		70.6379	8.4046

Number of obs: 4017, groups: superid, 532; game, 50

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	7.37080	0.61965	1108.55638	11.895	< 2e-16 ***
any_defectors_lag	-0.44426	0.53732	3371.01222	-0.827	0.408406
round	-0.12143	0.03459	3880.05350	-3.511	0.000452 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	any_d_
any_dfctrs_	-0.771	
round	-0.467	0.003

```
summary(lmer(behaviorTime_sec ~ any_defectors_lag + round + (1|game) +
              (1|superid),
```

```
data = exp2data %>% filter(behavior_defect == 1, round > 0,
                           time_pressure == 'Minus'))
```

boundary (singular) fit: see help('isSingular')

```
Linear mixed model fit by REML. t-tests use Satterthwaite's method [
lmerModLmerTest]
Formula: behaviorTime_sec ~ any_defectors_lag + round + (1 | game) + (1 |
superid)
Data: exp2data %>% filter(behavior_defect == 1, round > 0, time_pressure ==
"Minus")
```

REML criterion at convergence: 11007.6

Scaled residuals:

Min	1Q	Median	3Q	Max
-3.2771	-0.3082	-0.1322	0.0909	16.1598

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	1.460	1.208
game	(Intercept)	0.000	0.000
Residual		2.951	1.718

Number of obs: 2693, groups: superid, 259; game, 25

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	3.082e+00	1.933e-01	1.798e+03	15.947	<2e-16 ***
any_defectors_lag	-5.897e-03	1.662e-01	2.671e+03	-0.035	0.9717
round	-1.464e-02	8.403e-03	2.472e+03	-1.742	0.0816 .

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	any_d_
any_dfctrs_	-0.820	
round	-0.408	0.050

optimizer (nloptwrap) convergence code: 0 (OK)
boundary (singular) fit: see help('isSingular')

```
summary(lmer(behaviorTime_sec ~ any_defectors_lag + round + (1|game) +
             (1|superid),
             data = exp2data %>% filter(behavior_defect == 1, round > 0,
                                         time_pressure == 'Plus')))
```

Linear mixed model fit by REML. t-tests use Satterthwaite's method [
lmerModLmerTest]

Formula: behaviorTime_sec ~ any_defectors_lag + round + (1 | game) + (1 |
superid)

Data: exp2data %>% filter(behavior_defect == 1, round > 0, time_pressure ==
"Plus")

REML criterion at convergence: 1190.8

Scaled residuals:

Min	1Q	Median	3Q	Max
-2.4325	-0.6629	-0.0777	0.5550	3.7395

Random effects:

Groups	Name	Variance	Std.Dev.
superid	(Intercept)	0.07516	0.2742
game	(Intercept)	0.01126	0.1061
Residual		0.07867	0.2805

Number of obs: 2174, groups: superid, 247; game, 25

Fixed effects:

	Estimate	Std. Error	df	t value	Pr(> t)
(Intercept)	2.040e+00	4.621e-02	1.518e+02	44.135	< 2e-16 ***
any_defectors_lag	-5.518e-04	3.486e-02	2.146e+03	-0.016	0.987
round	-7.010e-03	1.541e-03	1.972e+03	-4.550	5.69e-06 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	any_d_
any_dfctrs_	-0.722	
round	-0.329	0.057

Evaluating the effect of choosing punishment on rewiring (Supplemental Table S13)

```
## Regression for punishment and rewiring, Exp. 1 -----
model_e1_rwr = glmer(rewired ~ behavior_punish + round + (1|game) + (1|superid),
  data = exp1data %>% filter(round > 0,
    behavior %in% c("C", "D", "P")),
  family = 'binomial', nAGQ=0,
  control = glmerControl(optimizer = c("bobyqa"),
    optCtrl=list(maxfun=2e5),
    calc.derivs=FALSE))
tidy(model_e1_rwr, exponentiate = T) %>% as.data.frame()
```

	effect	group	term	estimate	std.error	statistic
1	fixed	<NA>	(Intercept)	5.2864841	0.578111067	15.2268437
2	fixed	<NA>	behavior_punish	0.9535831	0.114125479	-0.3971294
3	fixed	<NA>	round	0.9001853	0.005162444	-18.3360179
4	ran_pars	superid	sd__(Intercept)	0.8038238	NA	NA
5	ran_pars	game	sd__(Intercept)	0.6347083	NA	NA

	p.value
1	2.346492e-52
2	6.912721e-01
3	4.269490e-75
4	NA
5	NA

```
## Regression for punishment and rewiring, Exp. 2 (TP-) -----
model_e2_rwr_minus = glmer(rewired ~ behavior_punish + round + (1|game) +
  (1|superid),
  data = exp2data %>% filter(round > 0,
    behavior %in% c('C', 'D', 'P'),
    time_pressure == 'Minus'),
  family = 'binomial', nAGQ=0,
  control = glmerControl(optimizer = c("bobyqa"),
    optCtrl=list(maxfun=2e5),
    calc.derivs=FALSE))
tidy(model_e2_rwr_minus, exponentiate = T) %>% as.data.frame()
```

	effect	group	term	estimate	std.error	statistic	p.value
1	fixed	<NA>	(Intercept)	8.1130162	1.085044141	15.653145	3.161973e-55
2	fixed	<NA>	behavior_punish	1.3454189	0.265622835	1.502857	1.328759e-01

```

3   fixed    <NA>          round 0.9448068 0.008581793 -6.250589 4.089089e-10
4 ran_pars superid sd__(Intercept) 1.4596213          NA          NA          NA
5 ran_pars   game sd__(Intercept) 0.3159409          NA          NA          NA

## Regression for punishment and rewiring, Exp. 2 (TP+) -----
model_e2_rwr_plus = glmer(rewired ~ behavior_punish + round + (1|game) + (1|superid),
  data = exp2data %>% filter(round > 0,
                                behavior %in% c('C', 'D', 'P'),
                                time_pressure == 'Plus'),
  family = 'binomial', nAGQ=0,
  control = glmerControl(optimizer = c("bobyqa"),
    optCtrl=list(maxfun=2e5),
    calc.derivs=FALSE))
tidy(model_e2_rwr_plus, exponentiate = T) %>% as.data.frame()

  effect    group      term estimate  std.error  statistic
1  fixed    <NA> (Intercept) 9.2522425 1.739726644 11.8323182
2  fixed    <NA> behavior_punish 1.1247841 0.248119669  0.5330676
3  fixed    <NA>      round 0.9408296 0.008932311 -6.4243497
4 ran_pars superid sd__(Intercept) 1.6406728          NA          NA
5 ran_pars   game sd__(Intercept) 0.6893328          NA          NA
  p.value
1 2.657009e-32
2 5.939868e-01
3 1.324345e-10
4          NA
5          NA

```

4. Figures


Figure 1 - Example of Player's Screen

```

example_fig1 = image_read('~Documents/Projects/harming_esn/figures/fig1A.png') %>%
  image_ggplot() +
  labs(tag = 'A')
example_fig2 = image_read('~Documents/Projects/harming_esn/figures/fig1B.png') %>%
  image_ggplot() +
  labs(tag = 'B')

example_fig1 / example_fig2

```

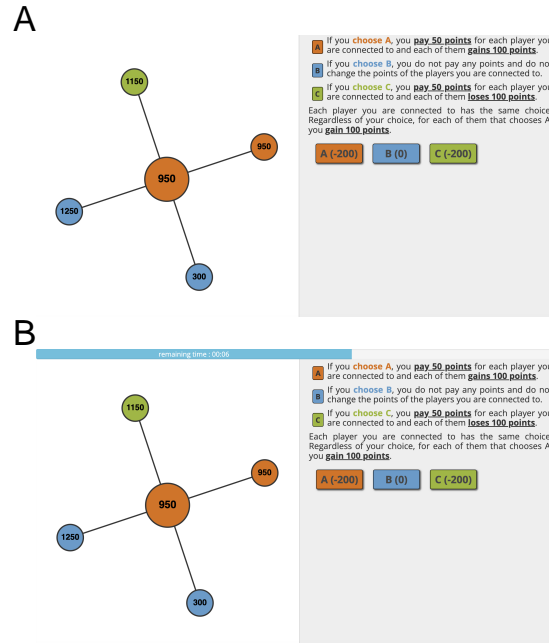

```
# ggsave(filename = "~/Documents/Projects/harming_esn/figures/fig1combined.png",
#         width = 8, height = 8, units = "in")
```

Figure 2 - Behavior Distribution, Decision Times, and Punishment Mechanisms, Experiment 1

```
# Fig 1A
exp1_fig1_data = bind_cols(data1_behavior_count, data1_behavior_CI, data1_times)[-7]


names(exp1_fig1_data) = c("behavior", "count", "crude_prop", "adjusted_prop",
                          "LL_prop", "UL_prop", "mean_dt", "se_mean_dt",
                          "UL_mean_dt", "LL_mean_dt")
exp1_fig1_data = exp1_fig1_data %>%
  mutate(behavior = case_match(behavior,
                              "C" ~ "Cooperation",
                              "D" ~ "Defection",
                              "P" ~ "Punishment"))

exp1_fig1_A = exp1_fig1_data %>%
  ggplot() +
  aes(x = behavior, y = adjusted_prop, fill = behavior) +
```

```

geom_bar(stat = "identity", width = 0.75, alpha = 0.5) +
geom_errorbar(aes(ymin = LL_prop, ymax = UL_prop, color = factor(behavior)),
              width = 0.25) +
theme_classic() +
scale_y_continuous(limits = c(0, 0.6), breaks = seq(0, 0.6, by = 0.2),
                  expand = c(0, 0)) +
ylab("Proportion") +
scale_fill_manual(values = c("#00A5CF", "#FFBF00", "#574AE2")) +
scale_color_manual(values = c("dodgerblue4", "darkorange3", "#574AE2")) +
labs(tag = "A") +
theme(panel.grid.minor = element_blank(),
      panel.grid.major = element_blank(),
      legend.position = "none",
      axis.text.x = element_text(size = 9),
      axis.title.x = element_blank(),
      axis.ticks.x = element_blank(),
      axis.ticks.y = element_blank())
exp1_fig1_A

```

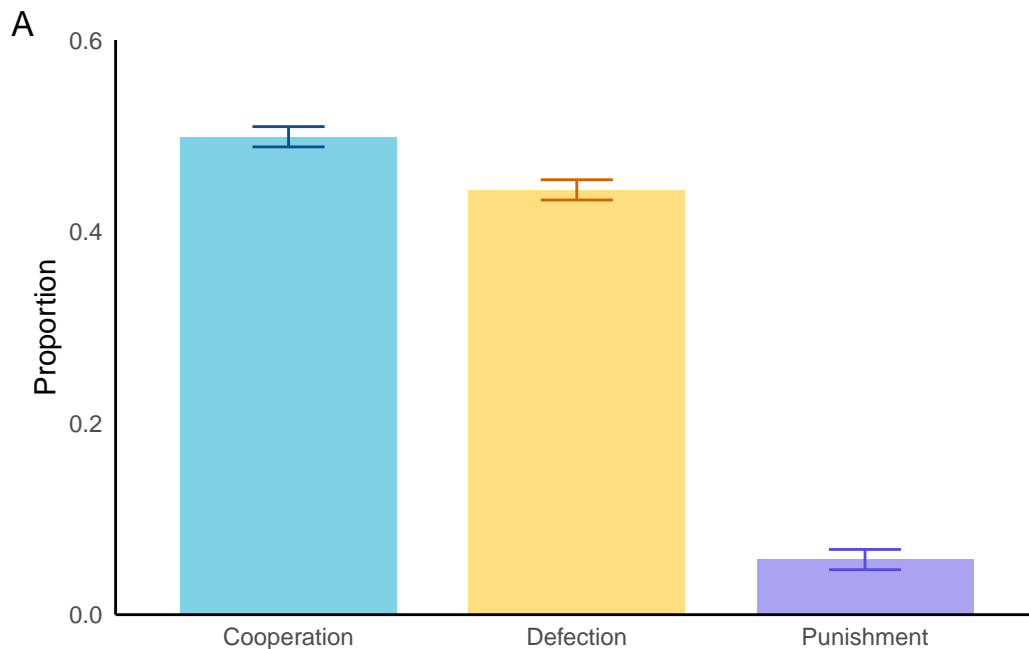

```

exp1_fig1_B = exp1_fig1_data %>%
ggplot() +
aes(x = behavior, y = mean_dt, fill = behavior) +


```



```

geom_bar(stat = "identity", width = 0.75, alpha = 0.5) +
geom_errorbar(aes(ymin = mean_dt - 1.96*se_mean_dt,
                  ymax = mean_dt + 1.96*se_mean_dt,
                  color = factor(behavior)), width = 0.25) +
theme_classic() +
scale_y_continuous(limits = c(0, 8.5), breaks = seq(0, 8, by = 2),
                  expand = c(0, 0)) +
ylab("Decision time \n (seconds)") +
scale_fill_manual(values = c("#00A5CF", "#FFBF00", "#574AE2")) +
scale_color_manual(values = c("dodgerblue4", "darkorange3", "#574AE2")) +
labs(tag = "B") +
theme(panel.grid.minor = element_blank(),
      panel.grid.major = element_blank(),
      legend.position = "none",
      axis.text.x = element_text(size = 9),
      axis.title.x = element_blank(),
      axis.ticks.x = element_blank(),
      axis.ticks.y = element_blank())
exp1_fig1_B

```

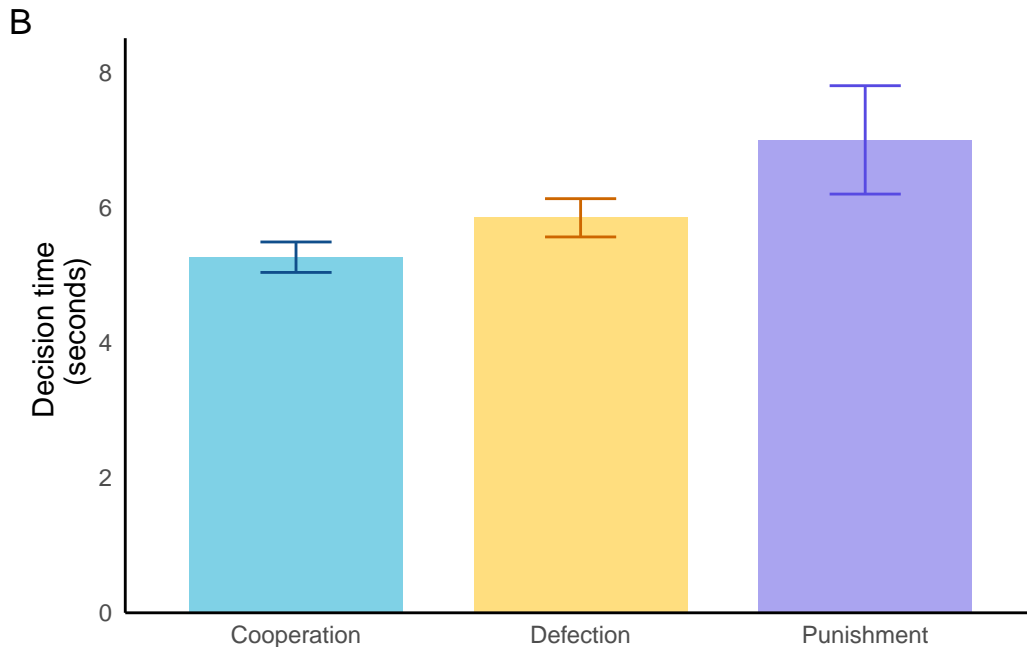

```

exp1data_NR = exp1data %>%
  group_by(punish_type_NR) %>%

```

```

count() %>%
ungroup() %>%
mutate(punish_type = "NR",
       total = sum(n),
       perc = n/sum(n),
       se_perc = sqrt((perc*(1-perc))/total)) %>%
filter(punish_type_NR == 1) %>%
select(punish_type, n, total, perc, se_perc)

exp1data_IA = exp1data %>%
group_by(punish_type_IA) %>%
count() %>%
ungroup() %>%
mutate(punish_type = "IA",
       total = sum(n),
       perc = n/sum(n),
       se_perc = sqrt((perc*(1-perc))/total)) %>%
filter(punish_type_IA == 1) %>%
select(punish_type, n, total, perc, se_perc)

exp1data_CR = exp1data %>%
group_by(punish_type_CR) %>%
count() %>%
ungroup() %>%
mutate(punish_type = "CR",
       total = sum(n),
       perc = n/sum(n),
       se_perc = sqrt((perc*(1-perc))/total)) %>%
filter(punish_type_CR == 1) %>%
select(punish_type, n, total, perc, se_perc)

exp1data_U = exp1data %>%
group_by(punish_type_U) %>%
count() %>%
ungroup() %>%
mutate(punish_type = "U",
       total = sum(n),
       perc = n/sum(n),
       se_perc = sqrt((perc*(1-perc))/total)) %>%
filter(punish_type_U == 1) %>%
select(punish_type, n, total, perc, se_perc)

```

```

figS1data = bind_rows(exp1data_CR, exp1data_IA, exp1data_NR, exp1data_U)

figS1data = figS1data %>%
  mutate(perc_LL = perc - 1.96*se_perc,
         perc_UL = perc + 1.96*se_perc)

# Decision times by punish type

exp1data_NR_times = exp1data %>%
  filter(punish_type_NR == 1, behavior_punish == 1) %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "NR",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp1data_IA_times = exp1data %>%
  filter(punish_type_IA == 1, behavior_punish == 1) %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec),
  ) %>%
  mutate(punish_type = "IA", mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp1data_CR_times = exp1data %>%
  filter(punish_type_CR == 1, behavior_punish == 1) %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "CR",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp1data_U_times = exp1data %>%
  filter(punish_type_U == 1, behavior_punish == 1) %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "U",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp1data_punish_types_times = bind_rows(exp1data_NR_times,
                                         exp1data_CR_times,

```

```

                                exp1data_IA_times,
                                exp1data_U_times) %>%
  select(punish_type, mean_dt, se_mean_dt, mean_LL, mean_UL)

fig1data = figS1data %>%
  left_join(exp1data_punish_types_times, by = "punish_type") %>%
  mutate(punish_type = case_match(punish_type,
    "CR" ~ "Copying/retaliation",
    "IA" ~ "Inequality aversion",
    "NR" ~ "Negative reinforcement",
    "U" ~ "Unclassified")) %>%
  mutate(punish_type_fct = factor(punish_type, levels = c("Copying/retaliation", "Negative r

fig1data

```

A tibble: 4 x 12

	punish_type	n	total	perc	se_perc	perc_LL	perc_UL	mean_dt	se_mean_dt
	<chr>	<int>	<int>	<dbl>	<dbl>	<dbl>	<dbl>	<dbl>	<dbl>
1	Copying/retalia~	149	10727	0.0139	0.00113	0.0117	0.0161	5.52	0.579
2	Inequality aver~	286	10727	0.0267	0.00156	0.0236	0.0297	7.03	0.574
3	Negative reinfo~	307	10727	0.0286	0.00161	0.0255	0.0318	6.27	0.505
4	Unclassified	154	10727	0.0144	0.00115	0.0121	0.0166	8.09	0.900

i 3 more variables: mean_LL <dbl>, mean_UL <dbl>, punish_type_fct <fct>

```


exp1_fig1_C = fig1data %>%
  ggplot(aes(x = punish_type_fct, y = perc, fill = punish_type_fct)) +
  geom_bar(position = "dodge", stat = "identity", alpha = 0.5, show.legend = F) +
  geom_errorbar(aes(ymin = perc + 1.96*se_perc,
    ymax = perc - 1.96*se_perc,
    width = 0.25),
    color = "purple4",
    position = position_dodge(.9),
    show.legend = F) +
  scale_fill_manual(values = c("Copying/retaliation" = "plum3",
    "Negative reinforcement" = "mediumslateblue",
    "Inequality aversion" = "mediumpurple3",
    "Unclassified" = "orchid4"), guide = "none") +
  scale_color_manual(guide = "none") +
  scale_x_discrete(labels = c("Copying/\nretaliation", "Negative\nreinforcement",
    "Inequality\naversion", "Unclassified")) +
  scale_y_continuous(limits = c(0, 0.05), expand = c(0, 0)) +

```

```

ylab("Proportion") +
xlab("") +
labs(tag = "C") +
theme_classic() +
theme(panel.grid.minor = element_blank(),
      panel.grid.major = element_blank(),
      legend.position = "bottom",
      legend.title = element_blank(),
      axis.text.x = element_text(size = 8),
      axis.title.x = element_blank(),
      axis.ticks.x = element_blank(),
      axis.ticks.y = element_blank())
expl_fig1_C

```

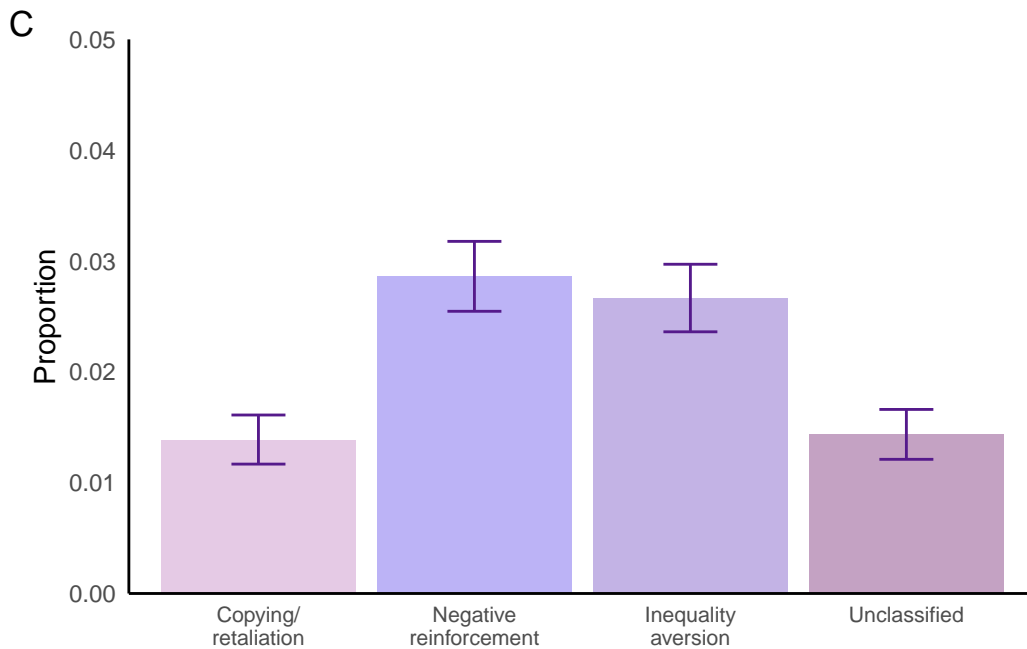

```


expl_fig1_D = fig1data %>%
  ggplot(aes(x = punish_type_fct, y = mean_dt, fill = punish_type_fct)) +
  geom_bar(stat = "identity", width = 0.75, alpha = 0.5) +
  geom_errorbar(aes(ymin = mean_LL,
                    ymax = mean_UL,
                    color = "purple4", width = 0.25)) +
  theme_classic() +
  scale_y_continuous(limits = c(0, 10), breaks = seq(0, 10, by = 2), expand = c(0, 0)) +

```

```


ylab("Decision time \n (seconds)") +
scale_fill_manual(values = c("Copying/retaliation" = "plum3",
                             "Negative reinforcement" = "mediumslateblue",
                             "Inequality aversion" = "mediumpurple3",
                             "Unclassified" = "orchid4"), guide = "none") +
scale_x_discrete(labels = c("Copying/\nretaliation", "Negative\nreinforcement",
                             "Inequality\naversion", "Unclassified")) +
scale_color_manual(guide = "none") +
theme_classic() +
labs(tag = "D") +
theme(panel.grid.minor = element_blank(),
      panel.grid.major = element_blank(),
      legend.position = "none",
      axis.text.x = element_text(size = 8),
      axis.title.x = element_blank(),
      axis.ticks.x = element_blank(),
      axis.ticks.y = element_blank())
expl_fig1_D

```

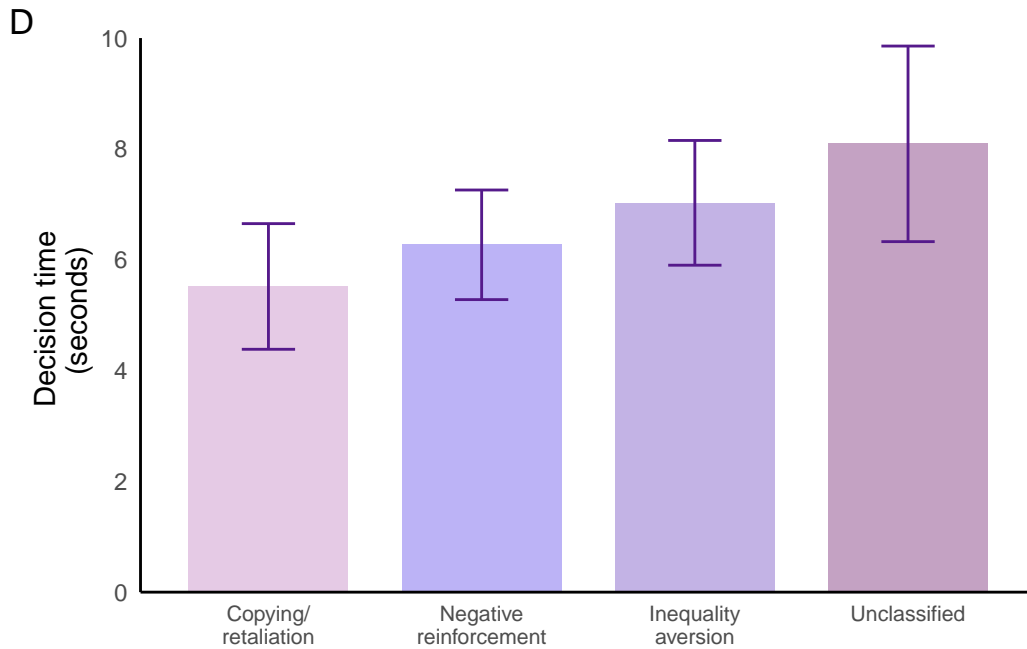

Main

```
(exp1_fig1_A + exp1_fig1_B)/ (exp1_fig1_C + exp1_fig1_D)
```

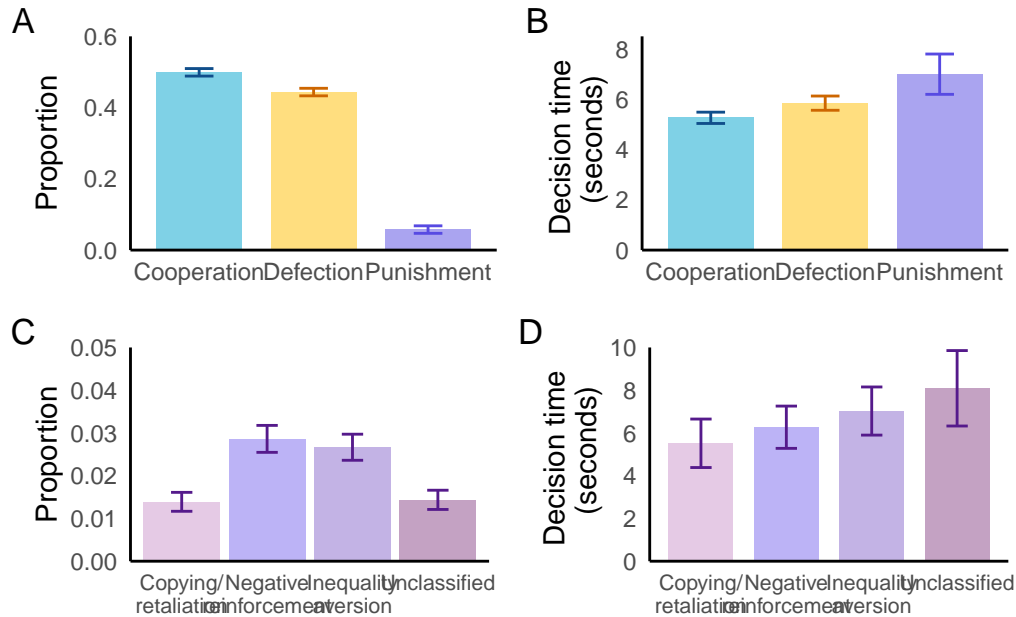

```
# ggsave(filename = "~/Documents/Projects/harming_esn/figures/fig2.png",
#         width = 8, height = 8, units = "in")
```

Figure 3 - Behavior Distribution, Decision Times, and Punishment Mechanisms, Experiment 2

```
exp2_tp_plus_fig3_data = bind_cols(exp2data_tp_plus_count, exp2data_tp_plus_CI,
                                   exp2data_tp_plus_times)[-7]
names(exp2_tp_plus_fig3_data) = c("behavior", "count", "crude_prop",
                                   "adjusted_prop", "LL_prop", "UL_prop", "mean_dt",
                                   "se_mean_dt", "LL_mean_dt", "UL_mean_dt")
exp2_tp_plus_fig3_data$setting = "TP+"

exp2_tp_minus_fig3_data = bind_cols(exp2data_tp_minus_count, exp2data_tp_minus_CI,
                                     exp2data_tp_minus_times)[-7]
```

```

names(exp2_tp_minus_fig3_data) = c("behavior", "count", "crude_prop",
                                   "adjusted_prop", "LL_prop", "UL_prop", "mean_dt",
                                   "se_mean_dt", "LL_mean_dt", "UL_mean_dt")

exp2_tp_minus_fig3_data$setting = "TP-"

fig3data = bind_rows(exp2_tp_minus_fig3_data, exp2_tp_plus_fig3_data)

fig3data = fig3data %>%
  mutate(behavior = case_match(behavior, "C" ~ "Cooperation",
                              "D" ~ "Defection", "P" ~ "Punishment"))

```

Main

```

fig3A = fig3data %>%
  ggplot(aes(x = behavior, y = adjusted_prop, fill = behavior, pattern = setting)) +
  geom_bar_pattern(position = "dodge", stat = "identity", alpha = 0.5,
                  pattern_density = 0.4, pattern_color = "white",
                  pattern_shape = 3) +
  geom_errorbar(aes(ymin = LL_prop,
                   ymax = UL_prop,
                   color = behavior,
                   width = 0.25),
               position = position_dodge(.9),
               show.legend = F) +
  scale_pattern_manual(values = c("none", "pch")) +
  scale_fill_manual(values = c("Cooperation" = "#00A5CF", "Defection" = "#FFBF00",
                              "Punishment" = "#574AE2")) +
  scale_color_manual(values = c("dodgerblue4", "darkorange3", "#574AE2")) +
  scale_y_continuous(limits = c(0, 0.65), expand = c(0, 0)) +
  guides(color = "none", fill = "none", pattern = guide_legend(title = "Setting")) +
  ylab("Proportion") +
  xlab("") +
  theme_classic() +
  labs(tag = "A") +
  theme(panel.grid.minor = element_blank(),
        panel.grid.major = element_blank(),
        axis.text.x = element_text(size = 10),
        axis.title.x = element_blank(),
        axis.ticks.x = element_blank(),


```



```

axis.ticks.y = element_blank(),
legend.position = "bottom",
legend.key.size = unit(1, "cm"),
legend.key = element_rect(fill = "#574AE2", color = NA)) +
annotate("text", x = 1:3,
  y = c(0.46, 0.61, 0.12),
  label = c("italic(p) == 0.661", "italic(p) == 0.758", "italic(p) == 0.475"),
  parse = T)
fig3A

```

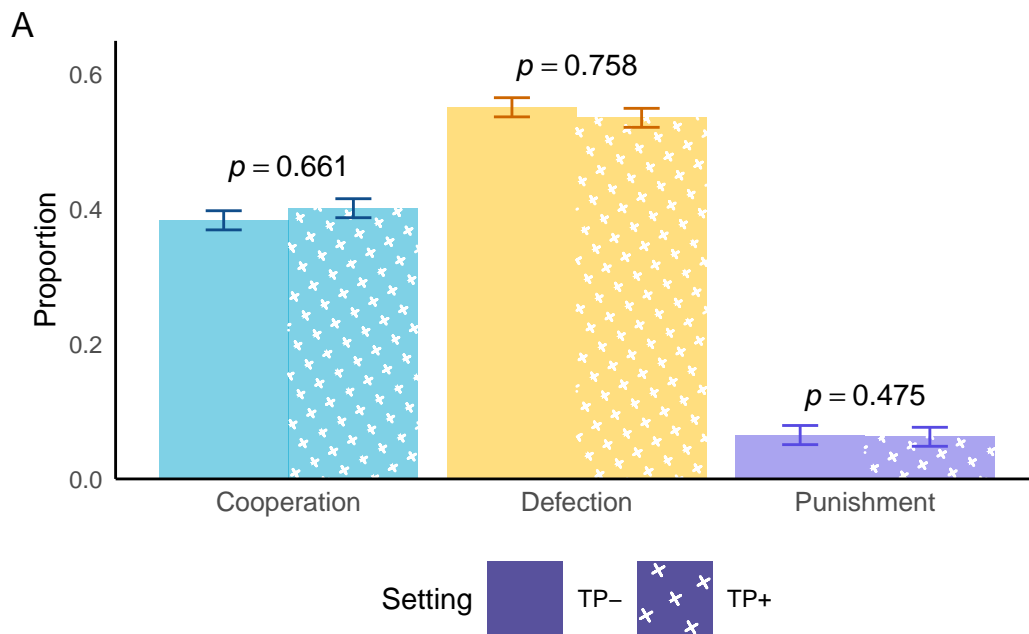

```

fig3B = fig3data %>%
  ggplot() +
  aes(x = behavior, y = mean_dt, fill = behavior, pattern = setting) +
  geom_bar_pattern(stat = "identity", width = 0.75, alpha = 0.5,
    position = "dodge",
    pattern_density = 0.4,
    pattern_color = "white",
    pattern_shape = 3, show.legend = F) +
  geom_errorbar(aes(ymin = mean_dt - se_mean_dt,
    ymax = mean_dt + se_mean_dt,
    color = factor(behavior)),
    position = position_dodge(0.75),


```

```


        width = 0.25,
        show.legend = F) +
geom_hline(yintercept = 3, color = "red2", alpha = 0.3) +
theme_classic() +
scale_pattern_manual(values = c("none", "pch")) +
scale_y_continuous(limits = c(0, 5), expand = c(0, 0)) +
scale_x_discrete(limits = c("Cooperation", "Defection", "Punishment")) +
ylab("Decision time \n (seconds)") +
scale_fill_manual(values = c("#00A5CF", "#FFBF00", "#574AE2")) +
scale_color_manual(values = c("dodgerblue4", "darkorange3", "#574AE2")) +
labs(tag = "B") +
theme(panel.grid.minor = element_blank(),
      panel.grid.major = element_blank(),
      legend.position = "none",
      axis.text.x = element_text(size = 10),
      axis.title.x = element_blank(),
      axis.ticks.x = element_blank(),
      axis.ticks.y = element_blank()) +
annotate("text", x = 1:3,
        y = c(3.45, 3.25, 4.25),
        label = c(rep(expression(paste(italic("p"), " < 0.0001")), 3)))

```

fig3B

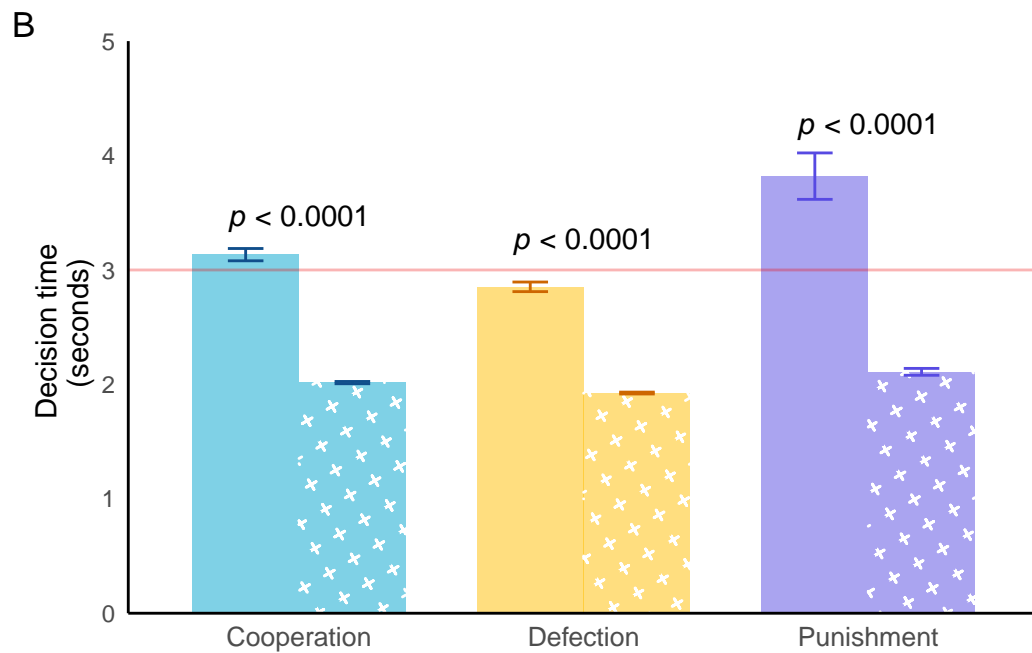

```
fig3A + fig3B +  
  plot_annotation(tag_levels = c("A", "B")) +  
  plot_layout(guides = "collect") &  
  theme(legend.position = "bottom")
```

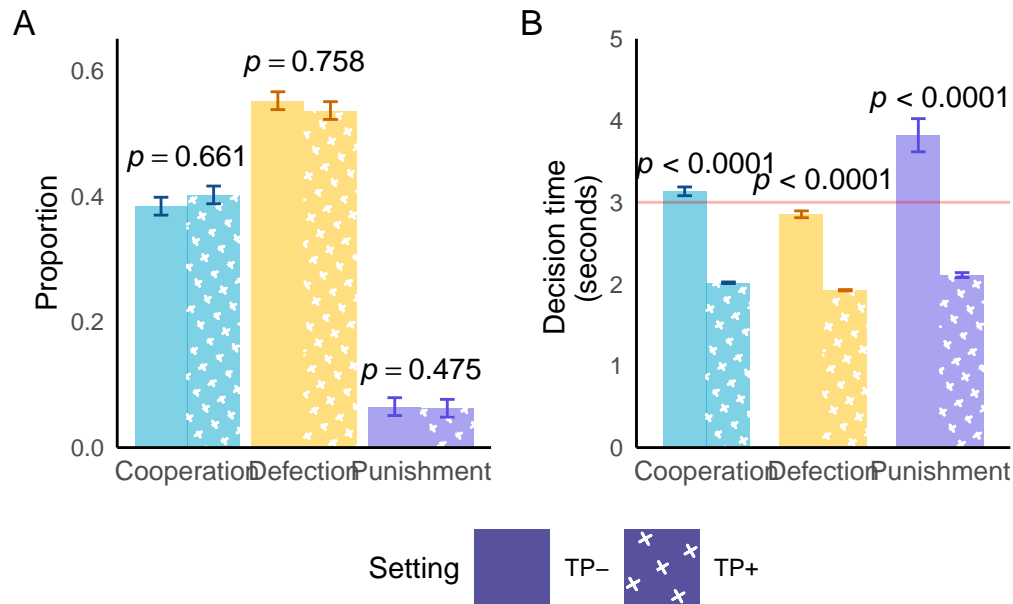

```
#ggsave(filename = "~/Documents/Projects/harming_esn/figures/fig3.png",
#width = 7, height = 5, units = "in")
```

Figure 4 - Punishment Mechanism Decision Times, Experiment 2

```
# Get the frequencies stratified by TP status and by punishment type
exp2data = exp2data %>%
  mutate(punish_type_U =
    ifelse(is.na(punish_type_CR) == 1 & is.na(punish_type_NR) == 1 |
      is.na(punish_type_IA) == 1 & is.na(punish_type_U) == 1,
      1, punish_type_U),
    punish_type_CR = ifelse(punish_type_U == 1, 0, punish_type_CR),
    punish_type_NR = ifelse(punish_type_U == 1, 0, punish_type_NR),
    punish_type_IA = ifelse(punish_type_U == 1, 0, punish_type_IA))

fig4_tp_minus_CR = exp2data %>%
  filter(time_pressure == "Minus") %>%
  group_by(punish_type_CR) %>%
  count() %>%
  ungroup() %>%
  mutate(setting = "TP-",
```

```

    punish_type = "CR",
    total = sum(n),
    perc = n/sum(n),
    se_perc = sqrt((perc*(1-perc))/total)) %>%
  filter(punish_type_CR == 1) %>%
  select(setting, punish_type, n, total, perc, se_perc)

fig4_tp_minus_IA = exp2data %>%
  filter(time_pressure == "Minus") %>%
  group_by(punish_type_IA) %>%
  count() %>%
  ungroup() %>%
  mutate(setting = "TP-",
    punish_type = "IA",
    total = sum(n),
    perc = n/sum(n),
    se_perc = sqrt((perc*(1-perc))/total)) %>%
  filter(punish_type_IA == 1) %>%
  select(setting, punish_type, n, total, perc, se_perc)

fig4_tp_minus_NR = exp2data %>%
  filter(time_pressure == "Minus") %>%
  group_by(punish_type_NR) %>%
  count() %>%
  ungroup() %>%
  mutate(setting = "TP-",
    punish_type = "NR",
    total = sum(n),
    perc = n/sum(n),
    se_perc = sqrt((perc*(1-perc))/total)) %>%
  filter(punish_type_NR == 1) %>%
  select(setting, punish_type, n, total, perc, se_perc)

fig4_tp_minus_U = exp2data %>%
  filter(time_pressure == "Minus") %>%
  group_by(punish_type_U) %>%
  count() %>%
  ungroup() %>%
  mutate(setting = "TP-",
    punish_type = "U",
    total = sum(n),
    perc = n/sum(n),

```

```

        se_perc = sqrt((perc*(1-perc))/total)) %>%
filter(punish_type_U == 1) %>%
select(setting, punish_type, n, total, perc, se_perc)

fig4_tp_minus_data = bind_rows(fig4_tp_minus_CR, fig4_tp_minus_IA,
                               fig4_tp_minus_NR, fig4_tp_minus_U)

fig4_tp_Plus_CR = exp2data %>%
  filter(time_pressure == "Plus") %>%
  group_by(punish_type_CR) %>%
  count() %>%
  ungroup() %>%
  mutate(setting = "TP+",
         punish_type = "CR",
         total = sum(n),
         perc = n/sum(n),
         se_perc = sqrt((perc*(1-perc))/total)) %>%
  filter(punish_type_CR == 1) %>%
  select(setting, punish_type, n, total, perc, se_perc)

fig4_tp_Plus_IA = exp2data %>%
  filter(time_pressure == "Plus") %>%
  group_by(punish_type_IA) %>%
  count() %>%
  ungroup() %>%
  mutate(setting = "TP+",
         punish_type = "IA",
         total = sum(n),
         perc = n/sum(n),
         se_perc = sqrt((perc*(1-perc))/total)) %>%
  filter(punish_type_IA == 1) %>%
  select(setting, punish_type, n, total, perc, se_perc)

fig4_tp_Plus_NR = exp2data %>%
  filter(time_pressure == "Plus") %>%
  group_by(punish_type_NR) %>%
  count() %>%
  ungroup() %>%
  mutate(setting = "TP+",
         punish_type = "NR",
         total = sum(n),
         perc = n/sum(n),

```

```

      se_perc = sqrt((perc*(1-perc))/total)) %>%
filter(punish_type_NR == 1) %>%
select(setting, punish_type, n, total, perc, se_perc)

fig4_tp_Plus_U = exp2data %>%
  filter(time_pressure == "Plus") %>%
  group_by(punish_type_U) %>%
  count() %>%
  ungroup() %>%
  mutate(setting = "TP+",
         punish_type = "U",
         total = sum(n),
         perc = n/sum(n),
         se_perc = sqrt((perc*(1-perc))/total)) %>%
  filter(punish_type_U == 1) %>%
  select(setting, punish_type, n, total, perc, se_perc)

fig4_tp_Plus_data = bind_rows(fig4_tp_Plus_CR, fig4_tp_Plus_IA,
                             fig4_tp_Plus_NR, fig4_tp_Plus_U)

exp2data_combined = bind_rows(fig4_tp_minus_data, fig4_tp_Plus_data)

```

```

exp2data_plus_NR_times = exp2data %>%
  filter(punish_type_NR == 1,
         behavior_punish == 1,
         time_pressure == "Plus") %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "NR",
         setting = "TP+",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp2data_plus_CR_times = exp2data %>%
  filter(punish_type_CR == 1,
         behavior_punish == 1,
         time_pressure == "Plus") %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "CR",
         setting = "TP+",
         mean_LL = mean_dt - 1.96*se_mean_dt,

```

```

    mean_UL = mean_dt + 1.96*se_mean_dt)

exp2data_plus_IA_times = exp2data %>%
  filter(punish_type_IA == 1,
         behavior_punish == 1,
         time_pressure == "Plus") %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "IA",
         setting = "TP+",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp2data_plus_U_times = exp2data %>%
  filter(punish_type_U == 1,
         behavior_punish == 1,
         time_pressure == "Plus") %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "U",
         setting = "TP+",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp2data_minus_NR_times = exp2data %>%
  filter(punish_type_NR == 1,
         behavior_punish == 1,
         time_pressure == "Minus") %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "NR",
         setting = "TP-",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp2data_minus_CR_times = exp2data %>%
  filter(punish_type_CR == 1,
         behavior_punish == 1,
         time_pressure == "Minus") %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "CR",

```



```

      setting = "TP-",
      mean_LL = mean_dt - 1.96*se_mean_dt,
      mean_UL = mean_dt + 1.96*se_mean_dt)

exp2data_minus_IA_times = exp2data %>%
  filter(punish_type_IA == 1,
         behavior_punish == 1,
         time_pressure == "Minus") %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "IA",
         setting = "TP-",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp2data_minus_U_times = exp2data %>%
  filter(punish_type_U == 1,
         behavior_punish == 1,
         time_pressure == "Minus") %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "U",
         setting = "TP-",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp2data_times = bind_rows(exp2data_minus_CR_times, exp2data_minus_IA_times,
                           exp2data_minus_NR_times, exp2data_minus_U_times,
                           exp2data_plus_CR_times, exp2data_plus_IA_times,
                           exp2data_plus_NR_times, exp2data_plus_U_times)

```

Main

```

# Create the combined figure
exp2data_combined = exp2data_combined %>%
  mutate(punish_type_fct = factor(punish_type,
                                  levels = c("CR", "NR", "IA", "U")))


exp2data_combined %>%
  ggplot(aes(x = punish_type_fct, y = perc, fill = punish_type_fct,

```

```

    pattern = setting)) +
geom_bar_pattern(position = "dodge", stat = "identity", alpha = 0.5,
    pattern_density = 0.25, pattern_color = "white",
    pattern_shape = 3) +
geom_errorbar(aes(ymin = perc + 1.96*se_perc,
    ymax = perc - 1.96*se_perc,
    width = 0.25),
    color = "purple4",
    position = position_dodge(.9),
    show.legend = F) +
scale_pattern_manual(values = c("none", "pch")) +
guides(color = "none", fill = "none",
    pattern = guide_legend(title = "Setting")) +
annotate("text", x = 1:4,
    y = c(0.025, 0.0425, 0.045, 0.02),
    label = c("italic(p) == 0.889", "italic(p) == 0.629",
        "italic(p) == 0.435", "italic(p) == 0.649"),
    parse = T) +
scale_fill_manual(values = c("CR" = "plum3",
    "NR" = "mediumslateblue",
    "IA" = "mediumpurple3",
    "U" = "orchid4"),
    limits = c("CR", "NR", "IA", "U"),
    guide = "none") +
scale_x_discrete(labels = c("Copying\\nretaliation", "Negative\\nreinforcement",
    "Inequality\\naversion", "Unclassified")) +
scale_y_continuous(limits = c(0, 0.05), expand = c(0, 0)) +
ylab("Proportion") +
xlab("") +
theme_classic() +
theme(panel.grid.minor = element_blank(),
    panel.grid.major = element_blank(),
    legend.position = "bottom",
    legend.key.size = unit(1, "cm"),
    legend.key = element_rect(fill = "#574AE2", color = NA),
    axis.title.x = element_blank(),
    axis.ticks.x = element_blank(),
    axis.ticks.y = element_blank())

```

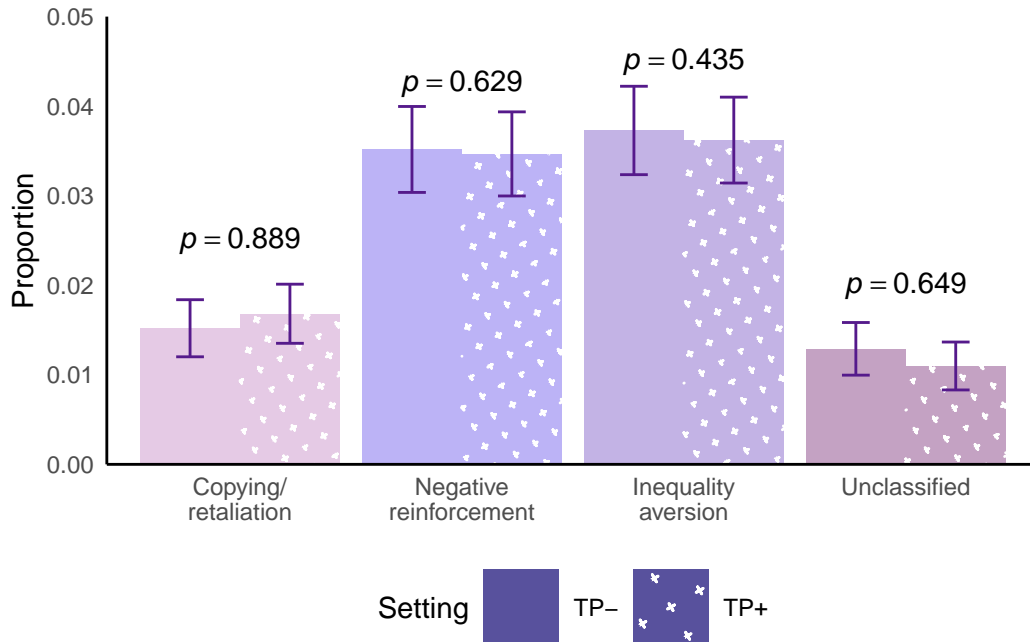

```
# ggsave(filename = "~/Documents/Projects/harming_esn/figures/fig4.png",
# width = 7, height = 5, units = "in")
```


Figure S2 - Distribution of Decision Times, Experiment 1

```
exp1data %>%
  filter(is.na(behaviorTime_prompt/1000) == 0, behavior %in% c("C", "D", "P")) %>%
  ggplot(aes(x = behaviorTime_prompt/1000, color = behavior)) +
  geom_density(adjust = 2, key_glyph = "path") +
  geom_vline(xintercept = 3, color = "red2", linetype = "dashed") +
  theme_classic() +
  labs(color = "Behavior") +
  xlab("Decision Time (sec)") +
  scale_x_log10(limits = c(1, 110), breaks = c(1, 10, 100),
               name = "Decision Time (sec)") +
  scale_y_continuous(limits = c(0, 2), name = "Density") +
  scale_color_manual(labels = c("Cooperation", "Defection", "Punishment"),
                    values = c("#00A5CF", "#FFBF00", "#574AE2"), guide = "none") +
  guides(colour=guide_legend(title = NULL)) +
  theme(panel.grid.minor = element_blank(),
        panel.grid.major = element_blank(),
```

```

legend.position = c(0.9, 0.9),
legend.title = element_blank(),
axis.ticks.x = element_blank(),
axis.ticks.y = element_blank()

```

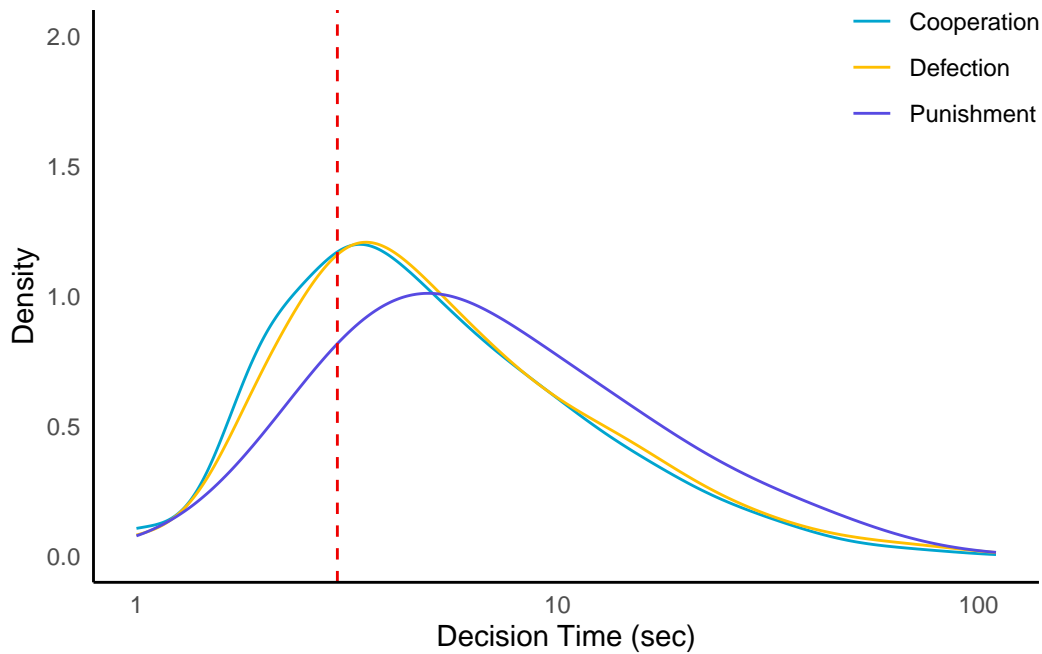

```

# ggsave(filename = "~/Documents/Projects/harming_esn/figures/figS2.png",
# width = 7, height = 5, units = "in")

```

Figure S3 - Sensitivity Analysis for Invisible Wealth Games Only (Exp. 1)

```

exp1data_invis_only = exp1data %>% filter(showScore == 0)

exp1data_invis_only_NR = exp1data_invis_only %>%
  group_by(punish_type_NR) %>%
  count() %>%
  ungroup() %>%
  mutate(punish_type = "NR",
         total = sum(n),
         perc = n/sum(n),
         se_perc = sqrt((perc*(1-perc))/total)) %>%

```

```

filter(punish_type_NR == 1) %>%
select(punish_type, n, total, perc, se_perc)

exp1data_invis_only_IA = exp1data_invis_only %>%
  group_by(punish_type_IA) %>%
  count() %>%
  ungroup() %>%
  mutate(punish_type = "IA",
         total = sum(n),
         perc = n/sum(n),
         se_perc = sqrt((perc*(1-perc))/total)) %>%
  filter(punish_type_IA == 1) %>%
  select(punish_type, n, total, perc, se_perc)

exp1data_invis_only_CR = exp1data_invis_only %>%
  group_by(punish_type_CR) %>%
  count() %>%
  ungroup() %>%
  mutate(punish_type = "CR",
         total = sum(n),
         perc = n/sum(n),
         se_perc = sqrt((perc*(1-perc))/total)) %>%
  filter(punish_type_CR == 1) %>%
  select(punish_type, n, total, perc, se_perc)

exp1data_invis_only_U = exp1data_invis_only %>%
  group_by(punish_type_U) %>%
  count() %>%
  ungroup() %>%
  mutate(punish_type = "U",
         total = sum(n),
         perc = n/sum(n),
         se_perc = sqrt((perc*(1-perc))/total)) %>%
  filter(punish_type_U == 1) %>%
  select(punish_type, n, total, perc, se_perc)

figS1data_invis_only =
  bind_rows(exp1data_invis_only_CR, exp1data_invis_only_IA,
            exp1data_invis_only_NR, exp1data_invis_only_U)

figS1data_invis_only = figS1data_invis_only %>%
  mutate(perc_LL = perc - 1.96*se_perc,

```

```

    perc_UL = perc + 1.96*se_perc)

exp1data_invis_only_NR_times = exp1data_invis_only %>%
  filter(punish_type_NR == 1, behavior_punish == 1) %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "NR",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp1data_invis_only_IA_times = exp1data_invis_only %>%
  filter(punish_type_IA == 1, behavior_punish == 1) %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec),
  ) %>%
  mutate(punish_type = "IA", mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp1data_invis_only_CR_times = exp1data_invis_only %>%
  filter(punish_type_CR == 1, behavior_punish == 1) %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "CR",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp1data_invis_only_U_times = exp1data_invis_only %>%
  filter(punish_type_U == 1, behavior_punish == 1) %>%
  summarize(mean_dt = mean1(behaviorTime_sec),
            se_mean_dt = se_mean(behaviorTime_sec)) %>%
  mutate(punish_type = "U",
         mean_LL = mean_dt - 1.96*se_mean_dt,
         mean_UL = mean_dt + 1.96*se_mean_dt)

exp1data_invis_only_punish_types_times = bind_rows(exp1data_invis_only_NR_times,
                                                    exp1data_invis_only_CR_times,
                                                    exp1data_invis_only_IA_times,
                                                    exp1data_invis_only_U_times) %>%
  select(punish_type, mean_dt, se_mean_dt, mean_LL, mean_UL)

fig2_data_invis_only = figS1data_invis_only %>%
  left_join(exp1data_invis_only_punish_types_times, by = "punish_type") %>%

```

```

mutate(punish_type = case_match(punish_type,
                                "CR" ~ "Copying/retaliation",
                                "IA" ~ "Inequality aversion",
                                "NR" ~ "Negative reinforcement",
                                "U" ~ "Unclassified")) %>%
mutate(punish_type_fct = factor(punish_type,
                                levels = c("Copying/retaliation",
                                             "Negative reinforcement",
                                             "Inequality aversion",
                                             "Unclassified")))

figS3_A = fig2_data_invis_only %>%
  ggplot(aes(x = punish_type_fct, y = perc, fill = punish_type_fct)) +
  geom_bar(position = "dodge", stat = "identity", alpha = 0.5, show.legend = F) +
  geom_errorbar(aes(ymin = perc + 1.96*se_perc,
                    ymax = perc - 1.96*se_perc,
                    width = 0.25),
                color = "purple4",
                position = position_dodge(.9),
                show.legend = F) +
  scale_fill_manual(values = c("Copying/retaliation" = "plum3",
                               "Negative reinforcement" = "mediumslateblue",
                               "Inequality aversion" = "mediumpurple3",
                               "Unclassified" = "orchid4"), guide = "none") +
  scale_color_manual(guide = "none") +
  scale_x_discrete(labels = c("Copying/\nretaliation", "Negative\nreinforcement",
                              "Inequality\naversion", "Unclassified")) +
  scale_y_continuous(limits = c(0, 0.05), expand = c(0, 0)) +
  ylab("Proportion") +
  xlab("") +
  labs(tag = "A") +
  theme_classic() +
  theme(panel.grid.minor = element_blank(),
        panel.grid.major = element_blank(),
        legend.position = "bottom",
        legend.title = element_blank(),
        axis.text.x = element_text(size = 8),
        axis.title.x = element_blank(),
        axis.ticks.x = element_blank(),
        axis.ticks.y = element_blank())

figS3_B = fig2_data_invis_only %>%
  ggplot(aes(x = punish_type_fct, y = mean_dt, fill = punish_type_fct)) +


```

```

geom_bar(stat = "identity", width = 0.75, alpha = 0.5) +
geom_errorbar(aes(ymin = mean_LL,
                  ymax = mean_UL),
              color = "purple4", width = 0.25) +
theme_classic() +
scale_y_continuous(limits = c(0, 12), breaks = seq(0, 12, by = 2), expand = c(0, 0)) +
ylab("Decision time \n (seconds)") +
scale_fill_manual(values = c("Copying/retaliation" = "plum3",
                             "Negative reinforcement" = "mediumslateblue",
                             "Inequality aversion" = "mediumpurple3",
                             "Unclassified" = "orchid4"), guide = "none") +
scale_x_discrete(labels = c("Copying/\nretaliation", "Negative\nreinforcement",
                             "Inequality\naversion", "Unclassified")) +
scale_color_manual(guide = "none") +
theme_classic() +
labs(tag = "B") +
theme(panel.grid.minor = element_blank(),
      panel.grid.major = element_blank(),
      legend.position = "none",
      axis.text.x = element_text(size = 8),
      axis.title.x = element_blank(),
      axis.ticks.x = element_blank(),
      axis.ticks.y = element_blank())

```

figS3_A + figS3_B

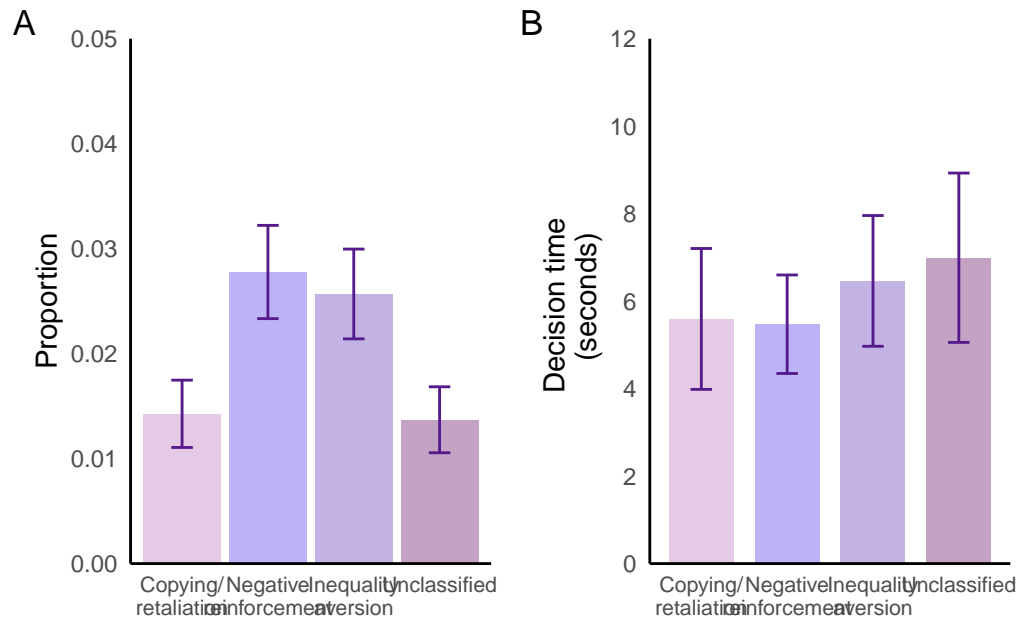

```
# ggsave(filename = "~/Documents/Projects/harming_esn/figures/figS3.png",
#         width = 8, height = 5, units = "in")
```