



Note

# A greedy approximation for minimum connected dominating sets

Lu Ruan<sup>a</sup>, Hongwei Du<sup>b</sup>, Xiaohua Jia<sup>b,\*</sup>, Weili Wu<sup>c,1,2</sup>,  
Yingshu Li<sup>d</sup>, Ker-I Ko<sup>e</sup>

<sup>a</sup>Department of Computer Science, Iowa State University, Ames, IA 50011-1040, USA

<sup>b</sup>Department of Computer Science, City University of Hong Kong, 83 Tat Chee Avenue, Kowloon Tong, Hong Kong

<sup>c</sup>Department of Computer Science, University of Texas at Dallas, Richardson, TX 75083, USA

<sup>d</sup>Department of Computer Science, University of Minnesota, Minneapolis, MN 55455, USA

<sup>e</sup>Department of Computer Science, State University of New York, Stony Brook, NY, USA

Received 29 May 2004; accepted 24 August 2004

Communicated by D.-Z. Du

## Abstract

Given a graph, a connected dominating set is a subset of vertices such that every vertex is either in the subset or adjacent to a vertex in the subset and the subgraph induced by the subset is connected. A minimum connected dominating set is such a vertex subset with minimum cardinality. In this paper, we present a new one-step greedy approximation with performance ratio  $\ln \delta + 2$  where  $\delta$  is the maximum degree in the input graph. The interesting aspect is that the greedy potential function of this algorithm is not submodular while all previously known one-step greedy algorithms with similar performance have submodular potential functions.

© 2004 Elsevier B.V. All rights reserved.

**Keywords:** Connected dominating set; Greedy approximation

\* Corresponding author.

E-mail addresses: [ruan@cs.iastate.edu](mailto:ruan@cs.iastate.edu) (L. Ruan), [jia@cs.cityu.edu.hk](mailto:jia@cs.cityu.edu.hk) (X. Jia), [weiliwu@cs.utdallas.edu](mailto:weiliwu@cs.utdallas.edu) (W. Wu), [yili@cs.umn.edu](mailto:yili@cs.umn.edu) (Y. Li), [keriko@cs.sunysb.edu](mailto:keriko@cs.sunysb.edu) (Ker-I Ko).

<sup>1</sup> Support in part by Hong Kong Research Grant Council under grant. CityU 1149/04E and National Science Foundation under grant. ACI-0305567.

<sup>2</sup> Support in part by National Science Foundation under grant.

## 1. Introduction

A *dominating set* of a graph is a subset of vertices such that every vertex is either in the subset or adjacent to (a vertex in) the subset and a *connected dominating set* has an additional condition that the subgraph induced by the dominating set is connected. Given a graph, we are interested in finding a connected dominating set with minimum cardinality. The optimal solution is called a *minimum connected dominating set*. Recently, the minimum connected dominating set problem received much attention in study of wireless networks [1–3,7,8].

The minimum connected dominating set problem is NP-complete [4]. Moreover, Guha and Khuller [5] showed that there does not exist a polynomial-time approximation with performance ratio  $\rho H(\delta)$  for  $0 < \rho < 1$  unless  $\text{NP} \subseteq \text{TIME}(n^{o(\log \log n)})$ , where  $\delta$  is the maximum degree in the input graph. Guha and Khuller [5] also gave a two-stage greedy algorithm with performance ratio  $3 + \ln \delta$ . In this paper, we present a new greedy approximation, which is one-stage, with performance ratio  $2 + \ln \delta$ . The greedy potential function of this algorithm is not supmodular. Therefore, the performance analysis of this algorithm is quite interesting.

## 2. Preliminary

Consider a graph  $G$  and a subset  $C$  of vertices in  $G$ . All vertices in  $G$  can be divided into three classes with respect to  $C$ . Vertices belong to  $C$ , which for convenience are called *black* vertices. Vertices are not in  $C$  but adjacent to  $C$ , which are called *gray* vertices. Vertices not in  $C$  and not adjacent to  $C$  either, which are called *white* vertices.

Clearly,  $C$  is a connected dominating set if and only if there is no white vertex and the subgraph induced by black vertices is connected. Namely, the number of white vertices plus the number of connected components of the subgraph induced by black vertices, called *black components*, equals one. This suggests a greedy algorithm with the potential function equal to the number of white vertices plus the number of black components as follows.

**Greedy Algorithm.** For a given connected graph  $G$ , do the following:

Set  $w := 1$ ;

**while**  $w = 1$  **do**

**if** there exists a white or gray vertex such that  
coloring it in black and its adjacent white vertices in  
gray would reduce the value of potential function  
**then** choose such a vertex to make the value of  
potential function reduce in a maximum amount  
**else** set  $w := 0$ ;

Clearly, when the while-loop ends, no white vertex will exist, i.e., all black vertices form a dominating set; however, the subgraph induced by black vertices may not be connected. An example is shown in Fig. 1. In fact, what appeared in this example is a typical case. Namely, if the number of subgraph induced by black vertices is not connected, then those black components are connected together by chains of two gray vertices. Based on this

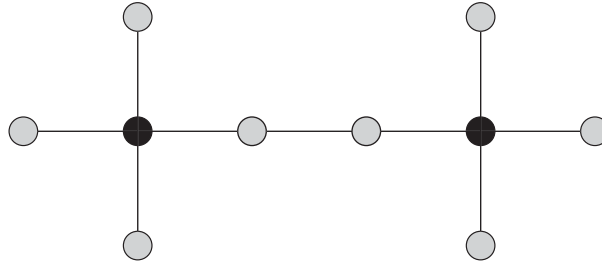


Fig. 1. Black components.

observation, Guha and Khuller [5] at end of the above algorithm color, at each time, two gray vertices in black to reduce the number of black components and finally obtain a connected dominating set. This results in a greedy approximation with performance ratio  $3 + \ln \delta$ .

### 3. Main results

We are going to modify the potential function. For each vertex subset  $C$ , let  $p(C)$  denote the number of connected components of the subgraph induced by black vertices. Let  $D(C)$  be the set of all edges incident to vertices in  $C$ . Denote by  $q(C)$  the number of connected components of the subgraph with vertex set  $V$  and edge set  $D(C)$ , denoted by  $(V, D(C))$ . Define  $f(C) = p(C) + q(C)$ .

**Lemma 3.1.** *Suppose  $G$  is a connected graph with at least three vertices. Then,  $C$  is a connected dominating set if and only if  $f(C \cup \{x\}) = f(C)$  for every  $x \in V$ .*

**Proof.** If  $C$  is a connected dominating set, then  $f(C) = 2$ , which reaches the minimum value. Therefore,  $f(C \cup \{x\}) = f(C)$  for every  $x \in V$ .

Conversely, suppose  $f(C \cup \{x\}) = f(C)$  for every  $x \in V$ . First,  $C$  cannot be the empty set. In fact, for contradiction, suppose  $C = \emptyset$ . Since  $G$  is a connected graph with at least three vertices, there must exist a vertex  $x$  with degree at least 2 and for such a vertex  $x$ ,  $f(C \cup \{x\}) < f(C)$ , a contradiction. Now, we may assume  $C \neq \emptyset$ . Consider a connected component of the subgraph induced by  $C$ . Let  $B$  denote its vertex set which is a subset of  $C$ . For every gray vertex  $y$  adjacent to  $B$ , if  $y$  is adjacent to a white vertex or a gray vertex not adjacent to  $B$ , then we must have  $p(C \cup \{y\}) < p(C)$  and  $q(C \cup \{y\}) \leq q(C)$ ; if  $y$  is adjacent to a black vertex not in  $B$ , then we must have  $p(C \cup \{y\}) \leq p(C)$  and  $q(C \cup \{y\}) < q(C)$ ; hence in all cases,  $f(C \cup \{y\}) < f(C)$ , a contradiction. Therefore, every gray vertex adjacent to  $B$  cannot be adjacent to any vertex neither in  $B$  nor adjacent to  $B$ . Since  $G$  is connected, it follows that every vertex of  $G$  must belong to  $B$  or adjacent to  $B$ . That is,  $B = C$  is a connected dominating set.  $\square$

This lemma means that when the Greedy Algorithm with potential function  $f$  ends, all black vertices form a connected dominating set  $C_G$ . To establish an upper bound for  $|C_G|$ , we first study a property of function  $q$ . For any  $A \subseteq V$  and  $y \in V$ , denote

$$\Delta_y q(A) = q(A) - q(A \cup \{y\}).$$

Then, we have

**Lemma 3.2.** *If  $A \subset B$ , then  $\Delta_y q(A) \geq \Delta_y q(B)$ .*

**Proof.** Note that each connected component of graph  $(V, D(B))$  is constituted by one or more connected components of graph  $(V, D(A))$  since  $A \subset B$ . Thus, the number of connected components of  $(V, D(B))$  dominated by  $y$  is no more than the number of connected components of  $(V, D(A))$  dominated by  $y$ . Therefore, the lemma holds.  $\square$

Let  $C^*$  be a minimum connected dominating set for  $G$ . Let  $a_i$  denote the value of potential function  $f$  when  $i$  vertices have been colored in black in the Greedy Algorithm. Initially,  $a_0 = n$  where  $n$  is the number of vertices in  $G$ .

**Lemma 3.3.** *For  $i = 1, 2, \dots, |C|$ ,*

$$a_i \leq a_{i-1} - \frac{a_{i-1} - 2}{|C^*|} + 1.$$

**Proof.** First, consider  $i \geq 2$ . Let  $x_1, x_2, \dots, x_{|C|}$  be elements of  $C_G$  in the ordering of their appearance in the Greedy Algorithm. Denote  $C_i = \{x_1, x_2, \dots, x_i\}$ . Then

$$a_i = f(C_i) = a_{i-1} - \Delta_{x_i} f(C_{i-1})$$

where

$$\Delta_{x_i} f(C_{i-1}) = \max_y \Delta_y f(C_{i-1}).$$

Since  $C^*$  is a connected dominating set, we can always arrange elements of  $C^*$  in an ordering  $y_1, y_2, \dots, y_{|C^*|}$  such that  $y_1$  is adjacent to a vertex in  $C_{i-1}$  and for  $j \geq 2$ ,  $y_j$  is adjacent to a vertex in  $\{y_1, \dots, y_{j-1}\}$ . Denote  $C_j^* = \{y_1, y_2, \dots, y_j\}$ . Denote

$$\Delta_{C^*} f(C_{i-1}) = \sum_{j=1}^{|C^*|} \Delta_{y_j} f(C_{i-1} \cup C_{j-1}^*).$$

Note that

$$\Delta_{y_j} p(C_{i-1} \cup C_{j-1}^*) \leq \Delta_{y_j} p(C_{i-1}) + 1.$$

In fact,  $y_j$  can dominate at most one additional connected component in the subgraph induced by  $C_{i-1} \cup C_{j-1}^*$  than in the subgraph induced by  $C_{i-1}$ , since all  $y_1, \dots, y_{j-1}$  are

connected. Moreover, by Lemma 3.2,

$$\Delta_{y_j} q(C_{i-1} \cup C_{j-1}^*) \leq \Delta_{y_j} q(C_{i-1}).$$

Therefore,

$$\Delta_{y_j} f(C_{i-1} \cup C_{j-1}^*) \leq \Delta_{y_j} f(C_{i-1}) + 1.$$

It follows that

$$\begin{aligned} a_{i-1} - 2 &= \Delta_{C^*} f(C_{i-1}) \\ &\leq \sum_{j=1}^{|C^*|} (\Delta_{y_j} f(C_{i-1}) + 1). \end{aligned}$$

There exists  $y_j \in C^*$  such that

$$\Delta_{y_j} f(C_{i-1}) + 1 \geq \frac{a_{i-1} - 2}{|C^*|}.$$

Hence,

$$\Delta_{x_i} f(C_{i-1}) \geq \frac{a_{i-1} - 2}{|C^*|} - 1.$$

This implies


$$a_i \leq a_{i-1} - \frac{a_{i-1} - 2}{|C^*|} + 1.$$

For  $i = 1$ , the proof is similar, we only need to note a difference that  $y_1$  can be chosen arbitrarily.  $\square$

**Theorem 3.4.** *The Greedy Algorithm with potential function  $f$  produces an approximation solution for minimum connected dominating set with performance ratio  $2 + \ln \delta$  where  $\delta$  is the maximum vertex degree in input graph.*

**Proof.** By Lemma 3.3,

$$\begin{aligned} a_i - 2 &\leq (a_{i-1} - 2) \left(1 - \frac{1}{|C^*|}\right) + 1 \\ &\leq (a_0 - 2) \left(1 - \frac{1}{|C^*|}\right)^i + \sum_{k=0}^{i-1} \left(1 - \frac{1}{|C^*|}\right)^k \\ &= (a_0 - 2) \left(1 - \frac{1}{|C^*|}\right)^i + |C^*| \left(1 - \left(1 - \frac{1}{|C^*|}\right)^i\right) \\ &= (a_0 - 2 - |C^*|) \left(1 - \frac{1}{|C^*|}\right)^i + |C^*|. \end{aligned}$$

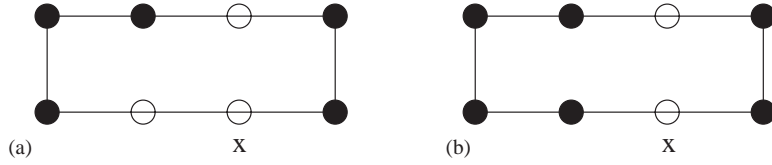Fig. 2.  $f$  is not supmodular.

Since  $a_i \leq a_{i-1} - 1$  and  $a_{|C_G|} = 2$ , we have  $a_{|C_G|-2|C^*|} \geq 2|C^*| + 2$ . Set  $i = |C_G| - 2|C^*|$ . Then

$$2|C^*| \leq (n - 2 - |C^*|) \left(1 - \frac{1}{|C^*|}\right)^i + |C^*|.$$

Since  $(1 - 1/|C^*|)^i \leq e^{-i/|C^*|}$ , we obtain

$$i \leq |C^*| \ln \frac{n - 2 - |C^*|}{|C^*|}.$$

Note that each vertex can dominate at most  $\delta + 1$  vertices. Hence,  $n/|C^*| \leq \delta + 1$ . Therefore,  $|C_G| = i + 2|C^*| \leq |C^*|(2 + \ln \delta)$ .  $\square$

#### 4. Discussion

If  $f(C)$  is supmodular, then Theorem 3.4 can be derived from a general result [6]. However, it is a very interesting aspect that the potential function  $f(C)$  is not supmodular. To see this, let us consider the graph in Fig. 2. The black vertices in Fig. 2(a) form set  $A$  and the black vertices in Fig. 2(b) form set  $B$ . Clearly,  $A \subset B$  and  $\Delta_x(A) = 0 > \Delta_x(B) = -1$ .

#### References

- [1] K.M. Alzoubi, P.-J. Wan, O. Frieder, New distributed algorithm for connected dominating set in wireless ad hoc networks, in: Proc. HICSS, Hawaii, 2002, pp. 3881–3887.
- [2] X. Cheng, X. Huang, D. Li, W. Wu, D.-Z. Du, Polynomial-time approximation scheme for minimum connected dominating set in ad hoc wireless networks, *Networks*, 42 (4) (2003) 202–208.
- [3] B. Das, V. Bharghavan, Routing in ad hoc networks using minimum connected dominating sets, ICC '97, Montreal, Canada, June 1997.
- [4] M.R. Garey, D.S. Johnson, *Computers and Intractability: A guide to the theory of NP-completeness*, Freeman, San Francisco, 1978.
- [5] S. Guha, S. Khuller, Approximation algorithms for connected dominating sets, *Algorithmica* 20 (1998) 374–387.
- [6] G.L. Nemhauser, L.A. Wolsey, *Integer and Combinatorial Optimization*, Wiley, New York, 1999.
- [7] P. Sinha, R. Sivakumar, V. Bharghavan, Enhancing ad hoc routing with dynamic virtual infrastructures, *INFOCOM* 3 (2001) 1763–1772.
- [8] J. Wu, H. Li, On calculating connected dominating set for efficient routing in ad hoc wireless networks, in: Proc. of the 3rd Internat. Workshop on Discrete Algorithms and Methods for MOBILE Computing and Communications, Seattle, WA, 1999, pp. 7–14.