


a ITPR1 (7LHF) resolves 2,300 residues




median deep-layer constraint 77

b ITPR2 (9YKK) resolves 2,168 residues

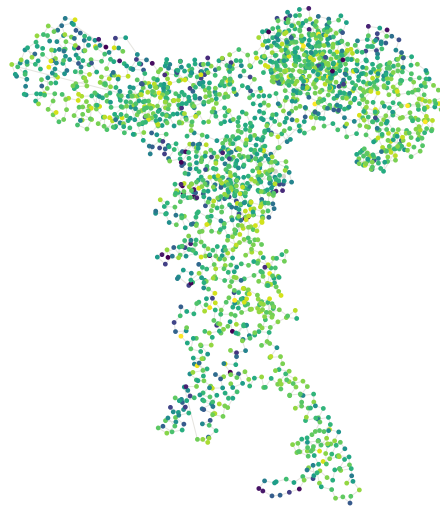


median deep-layer constraint 79

c ITPR3 (8TKG) resolves 2,210 residues


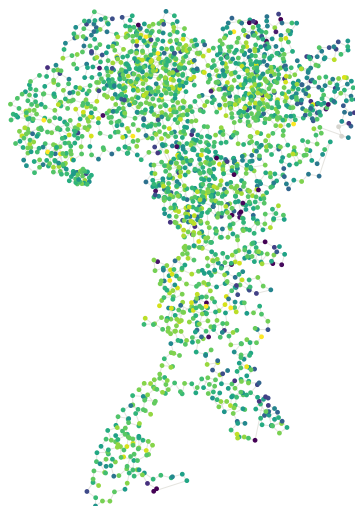


median deep-layer constraint 78

d ITPR3 (8TKG) is painted with the selection layer instead

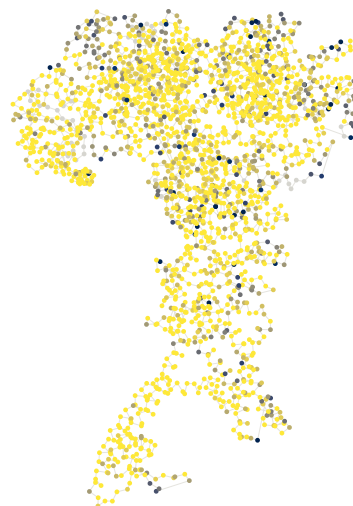

59 % of scored residues sit at the ceiling: no non-synonymous substitution anywhere in the tree. 53 residues are unscored



panels a–c: deep-layer constraint
(Jensen–Shannon divergence $\times$ 100)

panel d: selection layer
(1 – dN rate) $\times$ 100

● residue with no score (written –1 by S17, never 0)