

GDSFactory: An Open-Source Python Library for Chip Design and Simulation

Joaquin Matres,^{1,*} Niko Savola,^{2,3} Changyu Lian,¹ Marc de Cea,⁴ Floris Laporte,¹ Sebastian Goeldi,¹ and Troy Tamas¹

¹GDSFactory, 650 Castro St Ste 120 PMB 98035, Mountain View, CA 94041, USA

²Taara Connect, Inc., Sunnyvale, CA 94089, USA

³Department of Applied Physics, Aalto University, P.O. Box 13500, FI-00076 Aalto, Finland

⁴Lyte AI, 185 N Wolfe Rd, Sunnyvale, CA 94086, USA

*jmatres@gdsfactory.com

Abstract: We present GDSFactory, an open-source Python library for integrated circuit design automation across photonic, analog, quantum, and MEMS platforms. GDSFactory unifies the full chip-development flow—parametric layout, device simulation, circuit simulation via S-parameter analysis, and verification—within a single scriptable framework that interfaces with leading open-source and commercial solvers and foundry process design kits (PDKs).

1 Introduction

Photonic wafer fabrication cycles span many months, and every additional iteration needed to resolve Design-for-X (DfX) challenges—manufacturing, test, and reliability—adds cost, delays customer delivery, and ultimately erodes competitiveness. Software-based design and verification is fast and inexpensive by comparison, but it is only valuable insofar as it matches fabrication ground truth. GDSFactory bridges this gap with a comprehensive Python API spanning layout design, device simulation, circuit simulation, and verification [1].

Unlike traditional logic-driven electronic design flows [2], integrated photonics demands freeform parametric geometries and tight coupling between layout and electromagnetic simulation. GDSFactory meets these requirements with scriptable parametric cells (PCells), hierarchical assembly, and automatic routing, exposing seamless interfaces to industry-standard simulators while leveraging Python’s extensive scientific ecosystem [3] (Fig. 1).

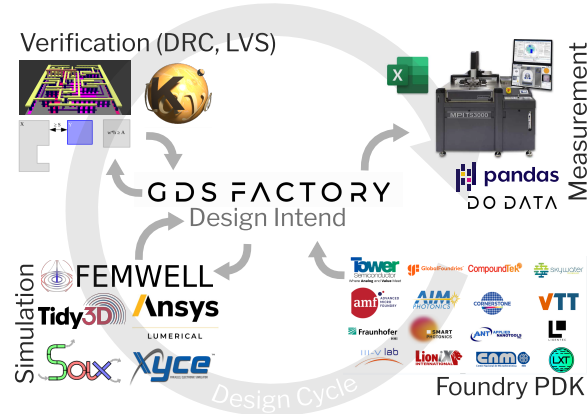


Figure 1. GDSFactory workflow: GDSFactory spans the entire design cycle, with a variety of Foundry PDKs available it is both easy to construct circuits reusing proven devices and to realize conceptually new designs. The generated component layouts can be used in various simulators for exploration, optimization and validation. GDSFactory tightly integrates with KLayout, leveraging its advanced design rule checks (DRC) and layout versus schematic (LVS) capabilities. For characterization of the fabricated devices GDSFactory provides rich metadata compatible to commercial wafer probers, including the position and orientation of fiber-to-waveguide couplers.

2 Layout Design

GDSFactory implements cells as Python functions that return a `Component` object holding polygons, electrical and optical port metadata, and convenience methods for export and plotting. Cells are built on KLayout’s C++ geometry engine [4] and defined through a functional style in which the `@gf.cell` decorator caches results to eliminate redundant regeneration. Port metadata drives automatic routing, with dedicated routing functions connecting individual ports or entire groups of ports. Components compose hierarchically and can also be assembled declaratively from YAML netlists, enabling schema-driven and machine-generated layouts.

3 Device Simulation

GDSFactory’s gplugins repository [5] provides unified interfaces to a growing list of simulators by reusing the core layout abstractions (Components, LayerStacks, and Ports). For instance, Components can be meshed via Gmsh [6] (through the Meshwell wrapper [7]) for cross-sectional or 3D analysis (Fig. 2). For the rigorous electromagnetic verification that photonics demands, the library supports full-wave analysis through both Finite-Difference Time-Domain (FDTD) and Finite Element Method (FEM) approaches. FDTD is supported through open-source backends including MEEP [8], Luminescent AI, and the GPU-accelerated Beamz [11], as well as industry-standard solvers such as Tidy3D [9] (cloud-based GPU acceleration) and Lumerical FDTD; a plugin for the open-source fdt dx solver is in development [10]. FEM-based and multiphysics solvers include Femwell [12] for waveguide mode analysis and thermal simulation, Palace [13] for RF and microwave simulation, and MEOW [14] for eigenmode expansion. At the device-physics level, TCAD simulation is supported through DEVSIM [15] for semiconductor device physics and Sentaurus for advanced process modeling.




Figure 2. GDSFactory meshing: (a) heater layout, (b) cross-sectional mesh, (c) 3D mesh.

Together these plugins form a complete device toolbox spanning TCAD, FEM, frequency-domain (FDFD), and time-domain (FDTD) solvers through a consistent interface (Fig. 3).

Device Solvers

From TCAD to FDTD – a complete toolbox for modern photonic and electronic design



Figure 3. Device solvers available through gplugins, from TCAD to FDTD: TCAD via DEVSIM and Sentaurus; finite-element multiphysics via Palace and Femwell; frequency-domain electromagnetics and eigenmode expansion via MEOW; and time-domain electromagnetics via MEEP, fdt dx, and the GPU-accelerated Beamz.

4 Circuit Simulation

Circuit-level simulation enables system-scale photonic design. GDSFactory supports this through netlist extraction, which composes device-level models into a full circuit (Fig. 4). In the frequency domain, SAX [16] performs differentiable S-parameter simulation on JAX, enabling gradient-based optimization, Monte Carlo analysis for yield estimation, and wavelength-dependent S-parameter interpolation from FDTD results. In the time domain, Circu-

lax [17]—a differentiable JAX-based framework—provides transient and time-resolved circuit simulation. For mixed photonic-electronic systems, VLSIR [19] provides SPICE netlist export.

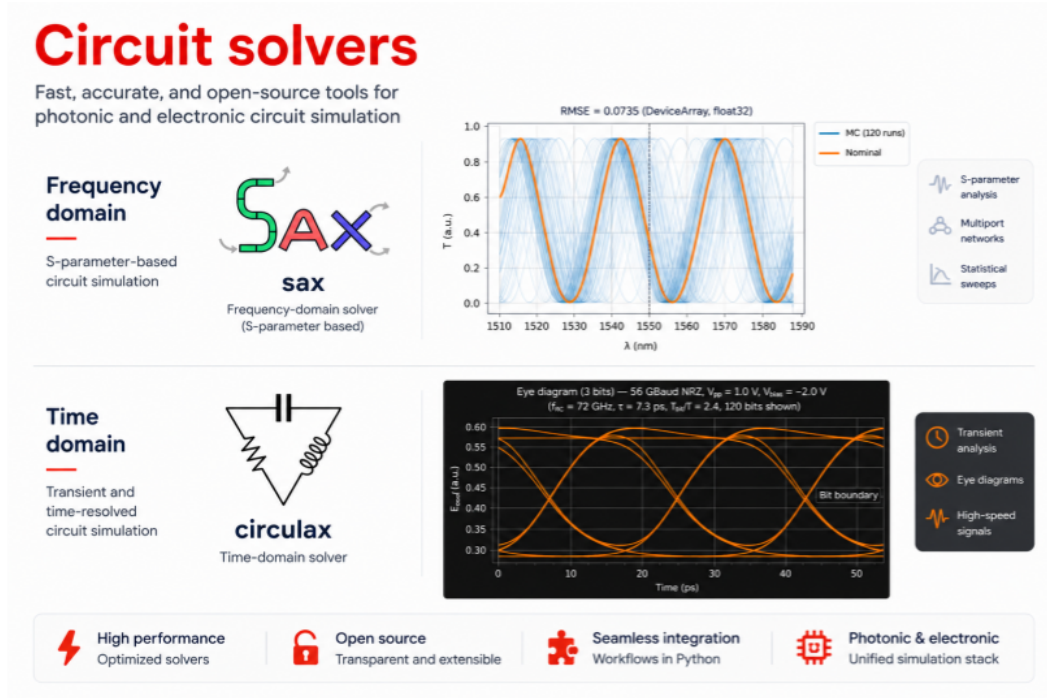


Figure 4. Circuit solvers for photonic and electronic circuit simulation: SAX for frequency-domain, S-parameter-based analysis, and Circulax for time-domain, transient simulation.

5 Process Design Kits

PDKs let GDSFactory drop into existing development flows while matching foundry ground-truth data. Open-source PDKs include GlobalFoundries 180nm, SkyWater 130nm [20], VTT 3 μ m SOI, SiEPIC, Cornerstone, IHP, Luxtelligence, and Quantum-RF-PDK. Commercial PDKs available through the GDSFactory+ subscription [21] include AIM Photonics, AMF, CompoundTek, Fraunhofer HHI, Smart Photonics, Tower PH18, OpenLight, III-V Labs, LioniX, Ligentec, Lightium, and QCI. For designs not tied to a specific foundry, the generic PDK follows standard layer conventions [22] for cross-foundry compatibility.

6 GDSFactory+

GDSFactory+ [21] is a commercial platform that extends the open-source library with capabilities for production chip development and team collaboration. Designs can be captured as Python code, declarative YAML netlists, or through a schema-driven graphical schematic editor, and rendered directly in VS Code; all three flows share the same components, PDK, and results. One-click verification checks design rules (DRC), connectivity, and layout-versus-schematic (LVS) against foundry rules, with an interactive results viewer, AI-generated violation summaries, and suggested fixes. Cloud-based simulation and data pipelines scale device, circuit, and multiphysics analyses and unify layouts, simulations, and on-wafer measurements from the device to the wafer and lot level in a shared data platform. Simulations are orchestrated through gSim [18], a unified client that dispatches jobs to multiple simulators—including SAX and Circulax—over a client-server architecture. GDSFactory+ additionally provides access to proprietary foundry PDKs distributed under non-disclosure agreement (NDA).

At the center of the platform is an AI design agent that keeps the engineer in the loop while accelerating every stage of the design cycle (Fig. 5). Through a natural-language interface, the agent generates and modifies parametric layouts, suggests components and circuit topologies, drives simulation and optimization, runs DRC/LVS and proposes fixes, and surfaces data-driven design recommendations. By automating routine steps while leaving design decisions and sign-off with the engineer, this human-in-the-loop workflow reduces iteration count and shortens the path from concept to verified, tape-out-ready design.

Accelerating the Full Chip Design Cycle with GDSFactory

Engineer-Guided, AI-Accelerated Design Automation

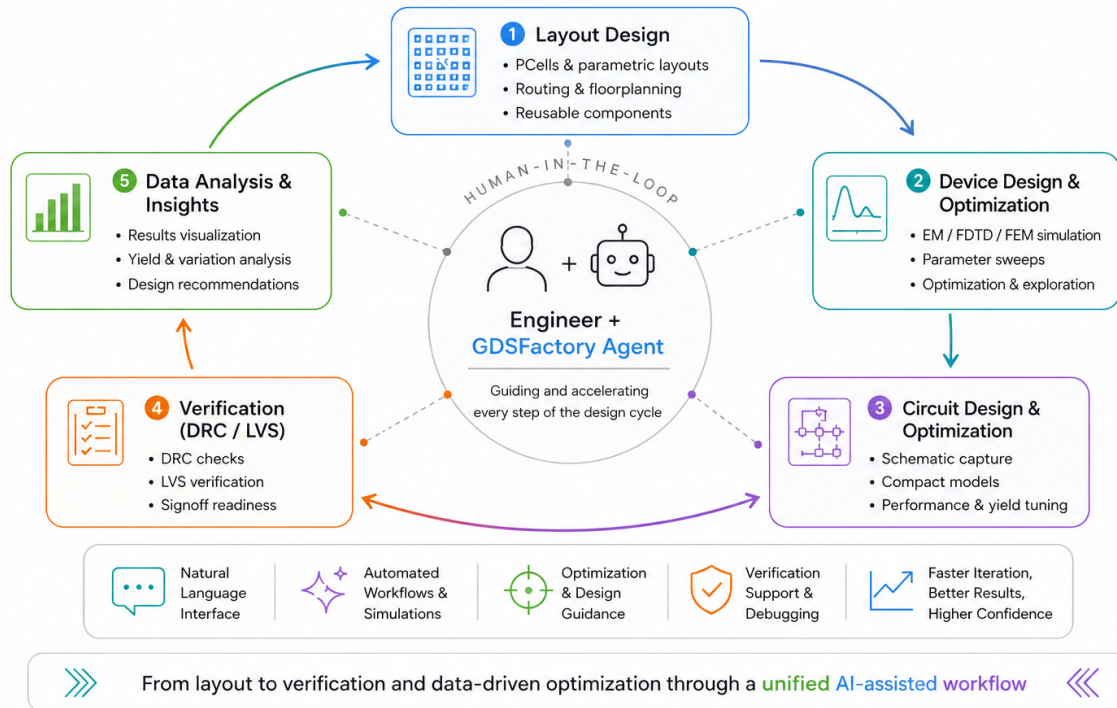


Figure 5. Engineer-guided, AI-accelerated design automation in GDSFactory+. A human-in-the-loop agent assists the engineer across the full chip design cycle—layout design, device design and optimization, circuit design and optimization, DRC/LVS verification, and data analysis—through a natural-language interface, automated workflows, optimization guidance, and verification support.

7 Conclusion

GDSFactory provides a unified, Python-driven workflow spanning layout, device simulation, and circuit simulation. Tight integration between device solvers and circuit simulators enables rapid iteration from component to system level, and its programmatic, open nature makes it a natural substrate for modern agentic design workflows [23]. The open-source library is freely available at <https://github.com/gdsfactory/gdsfactory>, and the GDSFactory+ platform—with its schema-driven layout, AI design agent, one-click DRC/LVS, and cloud simulation—at <https://gdsfactory.com>.

References

- [1] J. Matres *et al.*, “GDSFactory,” GitHub (2024), <https://github.com/GDSFactory/GDSFactory>.
- [2] W. Bogaerts *et al.*, “Silicon photonics circuit design: methods, tools and challenges,” *Laser Photon. Rev.* **12**, 1700237 (2018).
- [3] J. Matres, “Awesome Photonics,” GitHub (2024), https://github.com/joamatab/awesome_photonics.
- [4] M. Köfferlein, “KLayout,” <https://www.klayout.de/>.
- [5] J. Matres *et al.*, “gplugins,” GitHub (2024), <https://github.com/gdsfactory/gplugins>.
- [6] C. Geuzaine and J.-F. Remacle, “Gmsh: A 3-D finite element mesh generator with built-in pre- and post-processing facilities,” *Int. J. Numerical Meth. Engng*, vol. 79, no. 11, pp. 1309–1331, 2009. [Online]. Available: <https://doi.org/10.1002/nme.2579>.
- [7] S. Bilodeau *et al.*, “Meshwell,” GitHub (2026), <https://github.com/simbilod/meshwell>.
- [8] A. F. Oskooi *et al.*, “MEEP: A flexible free-software package for electromagnetic simulations by the FDTD method,” *Comput. Phys. Commun.* **181**, 687–702 (2010).
- [9] Flexcompute Inc., “Tidy3D,” <https://www.flexcompute.com/tidy3d/>.
- [10] Y. Mahlau *et al.*, “A flexible framework for large-scale FDTD simulations: open-source inverse design for 3D nanostructures,” in *Photonic and Phononic Properties of Engineered Nanostructures XV*, vol. 13377, pp. 40–52 (2025), <https://github.com/ymahlau/fdtdx>.
- [11] Q. Wach, “Beamz: A GPU-accelerated electromagnetic FDTD simulation framework for photonic chip design,” GitHub (2026), <https://github.com/beamzorg/beamz>.
- [12] H. Gehring *et al.*, “Femwell,” GitHub (2023), <https://github.com/HelgeGehring/femwell>.
- [13] AWS, “Palace: 3D Finite Element Solver for Computational Electromagnetics,” GitHub (2024), <https://github.com/aws-labs/palace>.
- [14] F. Laporte, “MEOW,” GitHub (2024), <https://github.com/flaport/meow>.
- [15] J. E. Sanchez, “DEVSIM: A TCAD Semiconductor Device Simulator,” *Journal of Open Source Software*, vol. 7, no. 70, p. 3898, Feb. 2022. [Online]. Available: <https://doi.org/10.21105/joss.03898>
- [16] F. Laporte, “SAX,” GitHub (2023), <https://github.com/flaport/sax>.
- [17] GDSFactory, “Circulax: A differentiable circuit simulation framework built on JAX,” GitHub (2026), <https://github.com/gdsfactory/circulax>.
- [18] GDSFactory, “gSim: A client-server interface for running multiple photonic simulators,” <https://gdsfactory.github.io/gsim/>.
- [19] D. Fritchman *et al.*, “VLSIR” GitHub (2024), <https://github.com/vlsir/vlsir>.
- [20] SkyWater Technology Foundry and Google, “SkyWater Open Source PDK,” GitHub (2023), <https://github.com/google/skywater-pdk>.
- [21] GDSFactory, “GDSFactory+,” <https://gdsfactory.com/>.
- [22] L. Chrostowski and M. Hochberg, *Silicon Photonics Design* (Cambridge, 2015).
- [23] A. Sharma *et al.*, “AI agents for photonic integrated circuit design automation,” *APL Machine Learning*, vol. 3, no. 4, Dec. 2025. doi: 10.1063/5.0300741.