


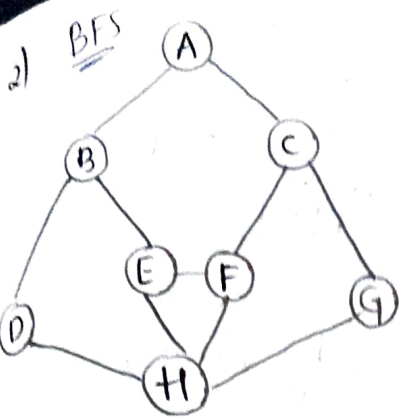

A

A

A is visited

• A[B, C]

B C

B C

B is visited

• B[A, D, E]

C D E

C D E

C is visited

• C[A, F, G]

D E F G

D E F G

... adjacency list

A[B, C]

B[A, D, E]

C[A, F, G]

D[B, H]

E[B, F, H]

F[C, E, H]

G[C, H]

H[D, E, F, G]

output:

A B C

D E F

G H

D is visited

• D[B, H]

E F G H

E F G H

E is visited

• E[B, F, H]

F G H H H

F G H F H

F is visited

G H F H H

G H F H H

G is visited

• G[C, H]

H F H H H

H F H H H

H is visited

H[D, E, F, G]

[F] [H] [H]

[F] [H] [H]

F is also visited

F is skipped

[H] [H]

H is already visited

H is skipped


[H]

H is already visited

H is skipped

Queue is Empty

Kruskal's algorithm:

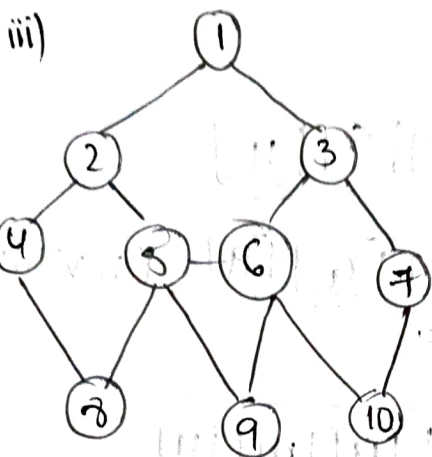

1 = [2, 3]

2 = [1, 4, 5]

3 = [1, 6, 7]

4 = [2, 8]

5 = [2, 6, 8, 9]

6 = [3, 9, 10]

7 = [3, 10]

8 = [4, 5, 9]

9 = [5, 6, 8, 10]

10 = [6, 7, 9]

Order:

1 2 3 4 5

6 7 8 9 10

~~Order~~

i) [1]

ii) [2, 3]

iii) [3, 4, 5]

iv) [4, 5, 6, 7]

v) [5, 6, 7, 8]

vi) [6, 7, 8, 9]

vii) [7, 8, 9, 10]

viii) [8, 9, 10, 10]

ix) [6, 8, 9, 9, 10, 10, 9]

x) [9, 10, 10, 9, 10]

xi) [10, 10, 9, 10]

xii) [10, 9, 10]

xiii) [9, 10]

xiv) []

Queue is Empty