


our computers

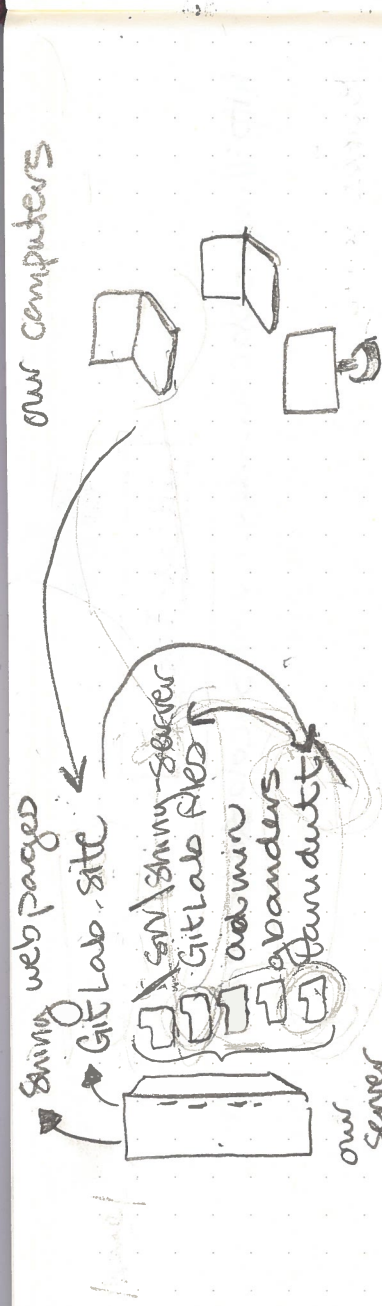

http://impactbcsu-dev.cuimbs.colostate.edu => GitLab
http://impactbcsu-dev.cuimbs.colostate.edu:3838 => GitLab

mouse-weights
index.Rmd
cp mouse-weights.Rmd /srv/shiny-server/mouse-weights
index.Rmd

Ports
80: GitLab
3838: shiny
8787: RStudio

File permissions

Shiny Server

manages one or more shiny apps, running on different URLs & ports

→ Install shiny → followed Posit docs: `posit.co/shiny-server/#install-shiny`

We have shiny 1.5.0

shiny server automatically started on boot → managed by systemd or upstart


shiny server 1.5.20.1002

start or stop manually:

```
sudo systemctl start shiny-server  
sudo systemctl stop shiny-server
```

configuration file is at `/etc/shiny-server/shiny-server.conf`
default → listens at port 3838

hosts shiny app stored in `/srv/shiny-server` → results available at base URL

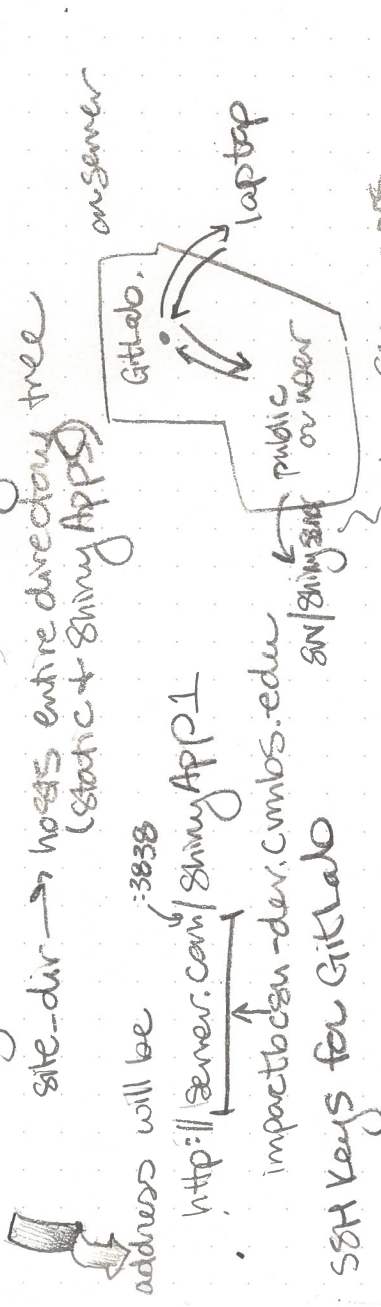

shiny user → in shiny config file, add `github` as part of `github` (this allows it to find packages I've installed in my local space)