

## Road To Zero

Generated by Doxygen 1.9.1



<b>1 Hierarchical Index</b>	<b>1</b>
1.1 Class Hierarchy	1
<b>2 Class Index</b>	<b>3</b>
2.1 Class List	3
<b>3 File Index</b>	<b>5</b>
3.1 File List	5
<b>4 Class Documentation</b>	<b>7</b>
4.1 AssetsManager Class Reference	7
4.1.1 Detailed Description	8
4.1.2 Constructor & Destructor Documentation	8
4.1.2.1 AssetsManager()	8
4.1.2.2 ~AssetsManager()	9
4.1.3 Member Function Documentation	9
4.1.3.1 __loadSoundBuffer()	9
4.1.3.2 clear()	10
4.1.3.3 getCurrentTrackKey()	11
4.1.3.4 getFont()	11
4.1.3.5 getSound()	12
4.1.3.6 getSoundBuffer()	12
4.1.3.7 getTexture()	13
4.1.3.8 getTrackStatus()	13
4.1.3.9 loadFont()	14
4.1.3.10 loadSound()	14
4.1.3.11 loadTexture()	15
4.1.3.12 loadTrack()	16
4.1.3.13 nextTrack()	17
4.1.3.14 pauseTrack()	17
4.1.3.15 playTrack()	17
4.1.3.16 previousTrack()	17
4.1.3.17 stopTrack()	18
4.1.4 Member Data Documentation	18
4.1.4.1 current_track	18
4.1.4.2 font_map	18
4.1.4.3 sound_map	18
4.1.4.4 soundbuffer_map	18
4.1.4.5 texture_map	19
4.1.4.6 track_map	19
4.2 ContextMenu Class Reference	19
4.2.1 Detailed Description	21
4.2.2 Constructor & Destructor Documentation	21

4.2.2.1 ContextMenu()	21
4.2.2.2 ~ContextMenu()	22
4.2.3 Member Function Documentation	22
4.2.3.1 __drawConsoleScreenFrame()	22
4.2.3.2 __drawConsoleText()	23
4.2.3.3 __drawVisualScreenFrame()	24
4.2.3.4 __handleKeyPressEvents()	24
4.2.3.5 __handleMouseButtonEvents()	25
4.2.3.6 __sendQuitGameMessage()	25
4.2.3.7 __sendRestartGameMessage()	26
4.2.3.8 __setConsoleState()	26
4.2.3.9 __setConsoleString()	26
4.2.3.10 __setUpConsoleScreen()	27
4.2.3.11 __setUpConsoleScreenFrame()	27
4.2.3.12 __setUpMenuFrame()	29
4.2.3.13 __setUpVisualScreen()	30
4.2.3.14 __setUpVisualScreenFrame()	30
4.2.3.15 draw()	32
4.2.3.16 processEvent()	32
4.2.3.17 processMessage()	32
4.2.4 Member Data Documentation	33
4.2.4.1 assets_manager_ptr	33
4.2.4.2 console_screen	33
4.2.4.3 console_screen_frame_bottom	34
4.2.4.4 console_screen_frame_left	34
4.2.4.5 console_screen_frame_right	34
4.2.4.6 console_screen_frame_top	34
4.2.4.7 console_state	34
4.2.4.8 console_string	34
4.2.4.9 console_string_changed	35
4.2.4.10 console_substring_idx	35
4.2.4.11 event_ptr	35
4.2.4.12 frame	35
4.2.4.13 game_menu_up	35
4.2.4.14 menu_frame	35
4.2.4.15 message_hub_ptr	36
4.2.4.16 position_x	36
4.2.4.17 position_y	36
4.2.4.18 render_window_ptr	36
4.2.4.19 visual_screen	36
4.2.4.20 visual_screen_frame_bottom	36
4.2.4.21 visual_screen_frame_left	37

4.2.4.22 visual_screen_frame_right . . . . .	37
4.2.4.23 visual_screen_frame_top . . . . .	37
4.3 Game Class Reference . . . . .	37
4.3.1 Detailed Description . . . . .	39
4.3.2 Constructor & Destructor Documentation . . . . .	39
4.3.2.1 Game() . . . . .	40
4.3.2.2 ~Game() . . . . .	40
4.3.3 Member Function Documentation . . . . .	41
4.3.3.1 __draw() . . . . .	41
4.3.3.2 __drawFrameClockOverlay() . . . . .	41
4.3.3.3 __drawHUD() . . . . .	42
4.3.3.4 __handleKeyPressEvents() . . . . .	43
4.3.3.5 __handleMouseButtonEvents() . . . . .	44
4.3.3.6 __insufficientCreditsAlarm() . . . . .	44
4.3.3.7 __processEvent() . . . . .	45
4.3.3.8 __processMessage() . . . . .	46
4.3.3.9 __sendGameStateMessage() . . . . .	47
4.3.3.10 __toggleFrameClockOverlay() . . . . .	48
4.3.3.11 run() . . . . .	48
4.3.4 Member Data Documentation . . . . .	49
4.3.4.1 assets_manager_ptr . . . . .	49
4.3.4.2 clock . . . . .	49
4.3.4.3 context_menu_ptr . . . . .	49
4.3.4.4 credits . . . . .	49
4.3.4.5 cumulative_emissions_tonnes . . . . .	50
4.3.4.6 demand_MWh . . . . .	50
4.3.4.7 event . . . . .	50
4.3.4.8 frame . . . . .	50
4.3.4.9 game_loop_broken . . . . .	50
4.3.4.10 game_phase . . . . .	50
4.3.4.11 hex_map_ptr . . . . .	51
4.3.4.12 message_hub . . . . .	51
4.3.4.13 month . . . . .	51
4.3.4.14 population . . . . .	51
4.3.4.15 quit_game . . . . .	51
4.3.4.16 render_window_ptr . . . . .	51
4.3.4.17 show_frame_clock_overlay . . . . .	52
4.3.4.18 time_since_start_s . . . . .	52
4.3.4.19 turn . . . . .	52
4.3.4.20 year . . . . .	52
4.4 HexMap Class Reference . . . . .	52
4.4.1 Detailed Description . . . . .	55

4.4.2 Constructor & Destructor Documentation	55
4.4.2.1 HexMap()	55
4.4.2.2 ~HexMap()	56
4.4.3 Member Function Documentation	56
4.4.3.1 __assembleHexMap()	56
4.4.3.2 __assessNeighbours()	56
4.4.3.3 __buildDrawOrderVector()	57
4.4.3.4 __enforceOceanContinuity()	58
4.4.3.5 __getMajorityTileType()	58
4.4.3.6 __getNeighboursVector()	59
4.4.3.7 __getNoise()	60
4.4.3.8 __getSelectedTile()	61
4.4.3.9 __getValidMapIndexPositions()	62
4.4.3.10 __handleKeyPressEvents()	63
4.4.3.11 __handleMouseButtonEvents()	63
4.4.3.12 __isLakeTouchingOcean()	64
4.4.3.13 __layTiles()	64
4.4.3.14 __procedurallyGenerateTileResources()	66
4.4.3.15 __procedurallyGenerateTileTypes()	67
4.4.3.16 __sendNoTileSelectedMessage()	68
4.4.3.17 __setUpGlassScreen()	68
4.4.3.18 __smoothTileTypes()	68
4.4.3.19 assess()	69
4.4.3.20 clear()	69
4.4.3.21 draw()	69
4.4.3.22 processEvent()	70
4.4.3.23 processMessage()	70
4.4.3.24 reroll()	71
4.4.3.25 toggleResourceOverlay()	71
4.4.4 Member Data Documentation	72
4.4.4.1 assets_manager_ptr	72
4.4.4.2 border_tiles_vec	72
4.4.4.3 event_ptr	72
4.4.4.4 frame	72
4.4.4.5 glass_screen	72
4.4.4.6 hex_draw_order_vec	73
4.4.4.7 hex_map	73
4.4.4.8 message_hub_ptr	73
4.4.4.9 n_layers	73
4.4.4.10 n_tiles	73
4.4.4.11 position_x	73
4.4.4.12 position_y	74

4.4.4.13 render_window_ptr . . . . .	74
4.4.4.14 show_resource . . . . .	74
4.4.4.15 tile_position_x_vec . . . . .	74
4.4.4.16 tile_position_y_vec . . . . .	74
4.4.4.17 tile_selected . . . . .	74
4.5 HexTile Class Reference . . . . .	75
4.5.1 Detailed Description . . . . .	78
4.5.2 Constructor & Destructor Documentation . . . . .	78
4.5.2.1 HexTile() . . . . .	78
4.5.2.2 ~HexTile() . . . . .	79
4.5.3 Member Function Documentation . . . . .	79
4.5.3.1 __clearDecoration() . . . . .	79
4.5.3.2 __getTileCoordsSubstring() . . . . .	80
4.5.3.3 __getTileImprovementSubstring() . . . . .	80
4.5.3.4 __getTileOptionsSubstring() . . . . .	81
4.5.3.5 __getTileResourceSubstring() . . . . .	81
4.5.3.6 __getTileTypeSubstring() . . . . .	82
4.5.3.7 __handleKeyPressEvents() . . . . .	83
4.5.3.8 __handleMouseButtonEvents() . . . . .	84
4.5.3.9 __isClicked() . . . . .	85
4.5.3.10 __sendAssessNeighboursMessage() . . . . .	85
4.5.3.11 __sendCreditsSpentMessage() . . . . .	86
4.5.3.12 __sendGameStateRequest() . . . . .	86
4.5.3.13 __sendInsufficientCreditsMessage() . . . . .	86
4.5.3.14 __sendTileSelectedMessage() . . . . .	87
4.5.3.15 __sendTileStateMessage() . . . . .	87
4.5.3.16 __sendUpdateGamePhaseMessage() . . . . .	87
4.5.3.17 __setResourceText() . . . . .	88
4.5.3.18 __setUpMagnifyingGlassSprite() . . . . .	89
4.5.3.19 __setUpNodeSprite() . . . . .	89
4.5.3.20 __setUpResourceChipSprite() . . . . .	90
4.5.3.21 __setUpSelectOutlineSprite() . . . . .	90
4.5.3.22 __setUpTileSprite() . . . . .	90
4.5.3.23 assess() . . . . .	91
4.5.3.24 decorateTile() . . . . .	91
4.5.3.25 draw() . . . . .	92
4.5.3.26 processEvent() . . . . .	93
4.5.3.27 processMessage() . . . . .	93
4.5.3.28 setTileResource() [1/2] . . . . .	94
4.5.3.29 setTileResource() [2/2] . . . . .	95
4.5.3.30 setTileType() [1/2] . . . . .	95
4.5.3.31 setTileType() [2/2] . . . . .	96

4.5.3.32 toggleResourceOverlay()	96
4.5.4 Member Data Documentation	97
4.5.4.1 assets_manager_ptr	97
4.5.4.2 credits	97
4.5.4.3 decoration_cleared	97
4.5.4.4 event_ptr	97
4.5.4.5 frame	98
4.5.4.6 game_phase	98
4.5.4.7 has_improvement	98
4.5.4.8 is_selected	98
4.5.4.9 magnifying_glass_sprite	98
4.5.4.10 major_radius	98
4.5.4.11 message_hub_ptr	99
4.5.4.12 minor_radius	99
4.5.4.13 node_sprite	99
4.5.4.14 position_x	99
4.5.4.15 position_y	99
4.5.4.16 render_window_ptr	99
4.5.4.17 resource_assessed	100
4.5.4.18 resource_assessment	100
4.5.4.19 resource_chip_sprite	100
4.5.4.20 resource_text	100
4.5.4.21 select_outline_sprite	100
4.5.4.22 show_node	100
4.5.4.23 show_resource	101
4.5.4.24 tile_decoration_sprite	101
4.5.4.25 tile_improvement_ptr	101
4.5.4.26 tile_resource	101
4.5.4.27 tile_sprite	101
4.5.4.28 tile_type	101
4.6 Message Struct Reference	102
4.6.1 Detailed Description	102
4.6.2 Member Data Documentation	102
4.6.2.1 bool_payload	102
4.6.2.2 channel	102
4.6.2.3 double_payload	103
4.6.2.4 int_payload	103
4.6.2.5 string_payload	103
4.6.2.6 subject	103
4.7 MessageHub Class Reference	103
4.7.1 Detailed Description	104
4.7.2 Constructor & Destructor Documentation	104



4.7.2.1 MessageHub()	104
4.7.2.2 ~MessageHub()	105
4.7.3 Member Function Documentation	105
4.7.3.1 addChannel()	105
4.7.3.2 clear()	105
4.7.3.3 clearMessages()	106
4.7.3.4 hasTraffic()	106
4.7.3.5 isEmpty()	106
4.7.3.6 popMessage()	107
4.7.3.7 receiveMessage()	108
4.7.3.8 removeChannel()	108
4.7.3.9 sendMessage()	109
4.7.4 Member Data Documentation	109
4.7.4.1 message_map	109
4.8 Settlement Class Reference	110
4.8.1 Detailed Description	111
4.8.2 Constructor & Destructor Documentation	111
4.8.2.1 Settlement()	111
4.8.2.2 ~Settlement()	112
4.8.3 Member Function Documentation	112
4.8.3.1 __handleKeyPressEvents()	112
4.8.3.2 __handleMouseButtonEvents()	113
4.8.3.3 __setUpTileImprovementSpriteStatic()	113
4.8.3.4 draw()	114
4.8.3.5 processEvent()	114
4.8.3.6 processMessage()	114
4.8.4 Member Data Documentation	114
4.8.4.1 population	115
4.9 TileImprovement Class Reference	115
4.9.1 Detailed Description	117
4.9.2 Constructor & Destructor Documentation	117
4.9.2.1 TileImprovement()	117
4.9.2.2 ~TileImprovement()	118
4.9.3 Member Function Documentation	118
4.9.3.1 __handleKeyPressEvents()	118
4.9.3.2 __handleMouseButtonEvents()	118
4.9.3.3 draw()	119
4.9.3.4 processEvent()	119
4.9.3.5 processMessage()	119
4.9.4 Member Data Documentation	119
4.9.4.1 assets_manager_ptr	120
4.9.4.2 credits	120

4.9.4.3 event_ptr	120
4.9.4.4 frame	120
4.9.4.5 game_phase	120
4.9.4.6 message_hub_ptr	120
4.9.4.7 position_x	121
4.9.4.8 position_y	121
4.9.4.9 render_window_ptr	121
4.9.4.10 tile_improvement_sprite_animated	121
4.9.4.11 tile_improvement_sprite_static	121
4.9.4.12 tile_improvement_type	121
<b>5 File Documentation</b>	<b>123</b>
5.1 header/ContextMenu.h File Reference	123
5.1.1 Detailed Description	124
5.1.2 Enumeration Type Documentation	124
5.1.2.1 ConsoleState	124
5.2 header/ESC_core/AssetsManager.h File Reference	124
5.2.1 Detailed Description	125
5.3 header/ESC_core/constants.h File Reference	125
5.3.1 Detailed Description	127
5.3.2 Function Documentation	127
5.3.2.1 FOREST_GREEN()	128
5.3.2.2 LAKE_BLUE()	128
5.3.2.3 MENU_FRAME_GREY()	128
5.3.2.4 MONOCHROME_SCREEN_BACKGROUND()	128
5.3.2.5 MONOCHROME_TEXT_AMBER()	128
5.3.2.6 MONOCHROME_TEXT_GREEN()	129
5.3.2.7 MONOCHROME_TEXT_RED()	129
5.3.2.8 MOUNTAINS_GREY()	129
5.3.2.9 OCEAN_BLUE()	129
5.3.2.10 PLAINS_YELLOW()	129
5.3.2.11 RESOURCE_CHIP_GREY()	130
5.3.2.12 VISUAL_SCREEN_FRAME_GREY()	130
5.3.3 Variable Documentation	130
5.3.3.1 BUILD_SETTLEMENT_COST	130
5.3.3.2 CO2E_KG_PER_LITRE_DIESEL	130
5.3.3.3 EMISSIONS_LIFETIME_LIMIT_TONNES	130
5.3.3.4 FLOAT_TOLERANCE	131
5.3.3.5 FRAMES_PER_SECOND	131
5.3.3.6 GAME_CHANNEL	131
5.3.3.7 GAME_HEIGHT	131
5.3.3.8 GAME_STATE_CHANNEL	131

5.3.3.9 GAME_WIDTH . . . . .	131
5.3.3.10 HEX_MAP_CHANNEL . . . . .	132
5.3.3.11 NO_TILE_SELECTED_CHANNEL . . . . .	132
5.3.3.12 RESOURCE_ASSESSMENT_COST . . . . .	132
5.3.3.13 SECONDS_PER_FRAME . . . . .	132
5.3.3.14 SECONDS_PER_MONTH . . . . .	132
5.3.3.15 SECONDS_PER_YEAR . . . . .	132
5.3.3.16 STARTING_POPULATION . . . . .	133
5.3.3.17 TILE_RESOURCE_CUMULATIVE_PROBABILITIES . . . . .	133
5.3.3.18 TILE_SELECTED_CHANNEL . . . . .	133
5.3.3.19 TILE_STATE_CHANNEL . . . . .	133
5.3.3.20 TILE_TYPE_CUMULATIVE_PROBABILITIES . . . . .	133
5.4 header/ESC_core/doxygen_cite.h File Reference . . . . .	134
5.4.1 Detailed Description . . . . .	134
5.5 header/ESC_core/includes.h File Reference . . . . .	134
5.5.1 Detailed Description . . . . .	135
5.6 header/ESC_core/MessageHub.h File Reference . . . . .	135
5.6.1 Detailed Description . . . . .	136
5.7 header/ESC_core/testing_utils.h File Reference . . . . .	136
5.7.1 Detailed Description . . . . .	137
5.7.2 Function Documentation . . . . .	137
5.7.2.1 expectedErrorNotDetected() . . . . .	138
5.7.2.2 printGold() . . . . .	138
5.7.2.3 printGreen() . . . . .	138
5.7.2.4 printRed() . . . . .	139
5.7.2.5 testFloatEquals() . . . . .	139
5.7.2.6 testGreaterThan() . . . . .	140
5.7.2.7 testGreaterThanOrEqualTo() . . . . .	140
5.7.2.8 testLessThan() . . . . .	141
5.7.2.9 testLessThanOrEqualTo() . . . . .	142
5.7.2.10 testTruth() . . . . .	142
5.8 header/Game.h File Reference . . . . .	143
5.8.1 Enumeration Type Documentation . . . . .	144
5.8.1.1 GamePhase . . . . .	144
5.9 header/HexMap.h File Reference . . . . .	144
5.9.1 Detailed Description . . . . .	145
5.10 header/HexTile.h File Reference . . . . .	145
5.10.1 Detailed Description . . . . .	146
5.10.2 Enumeration Type Documentation . . . . .	146
5.10.2.1 TileResource . . . . .	146
5.10.2.2 TileType . . . . .	147
5.11 header/Settlement.h File Reference . . . . .	147

5.11.1 Detailed Description . . . . .	148
5.12 header/TileImprovement.h File Reference . . . . .	148
5.12.1 Detailed Description . . . . .	149
5.12.2 Enumeration Type Documentation . . . . .	149
5.12.2.1 TileImprovementType . . . . .	150
5.13 source/ContextMenu.cpp File Reference . . . . .	151
5.13.1 Detailed Description . . . . .	151
5.14 source/ESC_core/AssetsManager.cpp File Reference . . . . .	151
5.14.1 Detailed Description . . . . .	152
5.15 source/ESC_core/MessageHub.cpp File Reference . . . . .	152
5.15.1 Detailed Description . . . . .	152
5.16 source/ESC_core/testing_utils.cpp File Reference . . . . .	152
5.16.1 Detailed Description . . . . .	153
5.16.2 Function Documentation . . . . .	153
5.16.2.1 expectedErrorNotDetected() . . . . .	153
5.16.2.2 printGold() . . . . .	154
5.16.2.3 printGreen() . . . . .	154
5.16.2.4 printRed() . . . . .	154
5.16.2.5 testFloatEquals() . . . . .	155
5.16.2.6 testGreaterThan() . . . . .	155
5.16.2.7 testGreaterThanOrEqualTo() . . . . .	156
5.16.2.8 testLessThan() . . . . .	157
5.16.2.9 testLessThanOrEqualTo() . . . . .	157
5.16.2.10 testTruth() . . . . .	158
5.17 source/Game.cpp File Reference . . . . .	158
5.17.1 Detailed Description . . . . .	159
5.18 source/HexMap.cpp File Reference . . . . .	159
5.18.1 Detailed Description . . . . .	159
5.19 source/HexTile.cpp File Reference . . . . .	159
5.19.1 Detailed Description . . . . .	160
5.20 source/main.cpp File Reference . . . . .	160
5.20.1 Detailed Description . . . . .	160
5.20.2 Function Documentation . . . . .	160
5.20.2.1 constructRenderWindow() . . . . .	160
5.20.2.2 loadAssets() . . . . .	161
5.20.2.3 main() . . . . .	162
5.21 source/Settlement.cpp File Reference . . . . .	162
5.21.1 Detailed Description . . . . .	162
5.22 source/TileImprovement.cpp File Reference . . . . .	163
5.22.1 Detailed Description . . . . .	163





# Chapter 1

## Hierarchical Index

### 1.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

AssetsManager . . . . .	7
ContextMenu . . . . .	19
Game . . . . .	37
HexMap . . . . .	52
HexTile . . . . .	75
Message . . . . .	102
MessageHub . . . . .	103
TileImprovement . . . . .	115
Settlement . . . . .	110





## Chapter 2

# Class Index

### 2.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">AssetsManager</a>	A class which manages visual and sound assets . . . . .	7
<a href="#">ContextMenu</a>	A class which defines a context menu for the game . . . . .	19
<a href="#">Game</a>	A class which acts as the central class for the game, by containing all other classes and implementing the game loop . . . . .	37
<a href="#">HexMap</a>	A class which defines a hex map of hex tiles . . . . .	52
<a href="#">HexTile</a>	A class which defines a hex tile of the hex map . . . . .	75
<a href="#">Message</a>	A structure which defines a standard message format . . . . .	102
<a href="#">MessageHub</a>	A class which acts as a central hub for inter-object message traffic . . . . .	103
<a href="#">Settlement</a>	A settlement class (child class of <a href="#">TileImprovement</a> ) . . . . .	110
<a href="#">TileImprovement</a>	A base class for the tile improvement hierarchy . . . . .	115



## Chapter 3

# File Index

### 3.1 File List

Here is a list of all files with brief descriptions:

header/ <a href="#">ContextMenu.h</a>	
Header file for the <a href="#">ContextMenu</a> class . . . . .	123
header/ <a href="#">Game.h</a> . . . . .	143
header/ <a href="#">HexMap.h</a>	
Header file for the <a href="#">HexMap</a> class . . . . .	144
header/ <a href="#">HexTile.h</a>	
Header file for the <a href="#">Game</a> class . . . . .	145
header/ <a href="#">Settlement.h</a>	
Header file for the <a href="#">Settlement</a> class . . . . .	147
header/ <a href="#">TileImprovement.h</a>	
Header file for the <a href="#">TileImprovement</a> class . . . . .	148
header/ESC_core/ <a href="#">AssetsManager.h</a>	
Header file for the <a href="#">AssetsManager</a> class . . . . .	124
header/ESC_core/ <a href="#">constants.h</a>	
Header file for various constants . . . . .	125
header/ESC_core/ <a href="#">doxygen_cite.h</a>	
Header file which simply cites the doxygen tool . . . . .	134
header/ESC_core/ <a href="#">includes.h</a>	
Header file for various includes . . . . .	134
header/ESC_core/ <a href="#">MessageHub.h</a>	
Header file for the <a href="#">MessageHub</a> class . . . . .	135
header/ESC_core/ <a href="#">testing_utils.h</a>	
Header file for various testing utilities . . . . .	136
source/ <a href="#">ContextMenu.cpp</a>	
Implementation file for the <a href="#">ContextMenu</a> class . . . . .	151
source/ <a href="#">Game.cpp</a>	
Implementation file for the <a href="#">Game</a> class . . . . .	158
source/ <a href="#">HexMap.cpp</a>	
Implementation file for the <a href="#">HexMap</a> class . . . . .	159
source/ <a href="#">HexTile.cpp</a>	
Implementation file for the <a href="#">HexTile</a> class . . . . .	159
source/ <a href="#">main.cpp</a>	
Implementation file for <a href="#">main()</a> for Road To Zero . . . . .	160
source/ <a href="#">Settlement.cpp</a>	
Implementation file for the <a href="#">Settlement</a> class . . . . .	162

source/ <a href="#">TileImprovement.cpp</a>	
Implementation file for the <a href="#">TileImprovement</a> class . . . . .	163
source/ESC_core/ <a href="#">AssetsManager.cpp</a>	
Implementation file for the <a href="#">AssetsManager</a> class . . . . .	151
source/ESC_core/ <a href="#">MessageHub.cpp</a>	
Implementation file for the <a href="#">MessageHub</a> class . . . . .	152
source/ESC_core/ <a href="#">testing_utils.cpp</a>	
Implementation file for various testing utilities . . . . .	152

## Chapter 4

# Class Documentation

### 4.1 AssetsManager Class Reference

A class which manages visual and sound assets.

```
#include <AssetsManager.h>
```

#### Public Member Functions

- [AssetsManager](#) (void)  
*Constructor for the [AssetsManager](#) class.*
- void [loadFont](#) (std::string, std::string)  
*Method to load a font and insert it into the font map.*
- void [loadTexture](#) (std::string, std::string)  
*Method to load a texture and insert it into the texture map.*
- void [loadSound](#) (std::string, std::string)  
*Method to load a sound and insert it into the sound map. Automatically creates a corresponding sf::SoundBuffer.*
- void [loadTrack](#) (std::string, std::string)  
*Method to load a track (sf::Music) and insert it into the track map.*
- sf::Font \* [getFont](#) (std::string)  
*Method to get font associated with given font key.*
- sf::Texture \* [getTexture](#) (std::string)  
*Method to get texture associated with given texture key.*
- sf::SoundBuffer \* [getSoundBuffer](#) (std::string)  
*Method to get soundbuffer associated with given sound key.*
- sf::Sound \* [getSound](#) (std::string)  
*Method to get sound associated with given sound key.*
- void [playTrack](#) (void)  
*Method to play the current track.*
- void [pauseTrack](#) (void)  
*Method to pause the current track.*
- void [stopTrack](#) (void)  
*Method to stop the current track.*
- void [nextTrack](#) (void)  
*Method to advance to the next track. Wraps around if the end of the track map is reached.*

- void [previousTrack](#) (void)  
*Method to return to the previous track. Wraps around if the beginning of the track map is reached.*
- std::string [getCurrentTrackKey](#) (void)  
*Method to get track key for current track.*
- sf::SoundSource::Status [getTrackStatus](#) (void)  
*Method to get the status of the current track.*
- void [clear](#) (void)  
*Method to clear all loaded assets.*
- [~AssetsManager](#) (void)  
*Destructor for the [AssetsManager](#) class.*

## Public Attributes

- std::map< std::string, sf::Font \* > [font\\_map](#)  
*A map of pointers to loaded fonts.*
- std::map< std::string, sf::Texture \* > [texture\\_map](#)  
*A map of pointers to loaded textures.*
- std::map< std::string, sf::SoundBuffer \* > [soundbuffer\\_map](#)  
*A map of pointers to sound buffers.*
- std::map< std::string, sf::Sound \* > [sound\\_map](#)  
*A map of pointers to loaded sounds.*
- std::map< std::string, sf::Music \* >::iterator [current\\_track](#)  
*A map iterator which corresponds to the current track (i.e., the track currently being played).*
- std::map< std::string, sf::Music \* > [track\\_map](#)  
*A map of pointers to opened tracks (i.e. sf::Music).*

## Private Member Functions

- void [\\_\\_loadSoundBuffer](#) (std::string, std::string)  
*Helper method to load a soundbuffer and insert it into the soundbuffer map. Should only be called by [loadSound\(\)](#), to create an sf::SoundBuffer corresponding to the loaded sf::Sound.*

### 4.1.1 Detailed Description

A class which manages visual and sound assets.

### 4.1.2 Constructor & Destructor Documentation

#### 4.1.2.1 AssetsManager()

```
AssetsManager::AssetsManager (
    void )
```

Constructor for the [AssetsManager](#) class.

```
110 {
111     //...
112
113     std::cout << "AssetsManager constructed at " << this << std::endl;
114
115     return;
116 } /* AssetsManager() */
```

### 4.1.2.2 ~AssetsManager()

```
AssetsManager::~AssetsManager (
    void )
```

Destructor for the [AssetsManager](#) class.

```
739 {
740     this->clear();
741
742     std::cout << "AssetsManager at " << this << " destroyed" << std::endl;
743
744     return;
745 } /* ~AssetsManager() */
```

## 4.1.3 Member Function Documentation

### 4.1.3.1 \_\_loadSoundBuffer()

```
void AssetsManager::__loadSoundBuffer (
    std::string path_2_sound,
    std::string sound_key ) [private]
```

Helper method to load a soundbuffer and insert it into the soundbuffer map. Should only be called by [loadSound\(\)](#), to create an `sf::SoundBuffer` corresponding to the loaded `sf::Sound`.

#### Parameters

<i>path_2_sound</i>	A path (either relative or absolute) to the sound file.
<i>sound_key</i>	A key associated with the sound (for indexing into the soundbuffer map).

```
47 {
48     // 1. check key, throw error if already in use
49     if (this->soundbuffer_map.count(sound_key) > 0) {
50         std::string error_str = "ERROR AssetsManager::__loadSoundBuffer() sound key ";
51         error_str += sound_key;
52         error_str += " is already in use";
53
54         this->clear();
55
56         #ifdef _WIN32
57             std::cout << error_str << std::endl;
58         #endif /* _WIN32 */
59
60         throw std::runtime_error(error_str);
61     }
62
63
64     // 2. load from file, throw error on fail
65     sf::SoundBuffer* soundbuffer_ptr = new sf::SoundBuffer();
66
67     if (not soundbuffer_ptr->loadFromFile(path_2_sound)) {
68         std::string error_str = "ERROR AssetsManager::__loadSoundBuffer() could not load ";
69         error_str += "soundbuffer at ";
70         error_str += path_2_sound;
71
72         this->clear();
73
74         #ifdef _WIN32
75             std::cout << error_str << std::endl;
76         #endif /* _WIN32 */
77
78         throw std::runtime_error(error_str);
79     }
80
81 }
```

```

82     // 3. insert into soundbuffer map
83     this->soundbuffer_map.insert(
84         std::pair<std::string, sf::SoundBuffer*>(sound_key, soundbuffer_ptr)
85     );
86
87     std::cout << "SoundBuffer " << sound_key << " inserted into soundbuffer map" <<
88         std::endl;
89
90     return;
91 } /* __loadSoundBuffer() */

```

#### 4.1.3.2 clear()

```

void AssetsManager::clear (
    void )

```

Method to clear all loaded assets.

```

646 {
647     // 1. clear fonts
648     std::map<std::string, sf::Font*>::iterator font_iter;
649     for (
650         font_iter = this->font_map.begin();
651         font_iter != this->font_map.end();
652         font_iter++
653     ) {
654         delete font_iter->second;
655
656         std::cout << "Font " << font_iter->first << " deleted from font map" <<
657             std::endl;
658     }
659     this->font_map.clear();
660
661     // 2. clear textures
662     std::map<std::string, sf::Texture*>::iterator texture_iter;
663     for (
664         texture_iter = this->texture_map.begin();
665         texture_iter != this->texture_map.end();
666         texture_iter++
667     ) {
668         delete texture_iter->second;
669
670         std::cout << "Texture " << texture_iter->first << " deleted from texture map" <<
671             std::endl;
672     }
673     this->texture_map.clear();
674
675     // 3. clear sound buffers
676     std::map<std::string, sf::SoundBuffer*>::iterator soundbuffer_iter;
677     for (
678         soundbuffer_iter = this->soundbuffer_map.begin();
679         soundbuffer_iter != this->soundbuffer_map.end();
680         soundbuffer_iter++
681     ) {
682         delete soundbuffer_iter->second;
683
684         std::cout << "SoundBuffer " << soundbuffer_iter->first <<
685             " deleted from soundbuffer map" << std::endl;
686     }
687     this->soundbuffer_map.clear();
688
689     // 4. clear sounds
690     std::map<std::string, sf::Sound*>::iterator sound_iter;
691     for (
692         sound_iter = this->sound_map.begin();
693         sound_iter != this->sound_map.end();
694         sound_iter++
695     ) {
696         sound_iter->second->stop();
697         delete sound_iter->second;
698
699         std::cout << "Sound " << sound_iter->first << " deleted from sound map" <<
700             std::endl;
701     }
702     this->sound_map.clear();
703
704 }

```



```

707
708 // 5. clear tracks
709 std::map<std::string, sf::Music*>::iterator track_iter;
710 for (
711     track_iter = this->track_map.begin();
712     track_iter != this->track_map.end();
713     track_iter++)
714 {
715     track_iter->second->stop();
716     delete track_iter->second;
717
718     std::cout << "Track " << track_iter->first << " deleted from track map" <<
719         std::endl;
720 }
721 this->track_map.clear();
722
723 return;
724 } /* clear() */

```

#### 4.1.3.3 getCurrentTrackKey()

```

std::string AssetsManager::getCurrentTrackKey (
    void )

```

Method to get track key for current track.

##### Returns

The track key for the current track.

```

610 {
611     return this->current_track->first;
612 } /* getCurrentTrackKey() */

```

#### 4.1.3.4 getFont()

```

sf::Font * AssetsManager::getFont (
    std::string font_key )

```

Method to get font associated with given font key.

##### Parameters

<i>font_key</i>	A key associated with the font (for indexing into the font map).
-----------------	--

##### Returns

A pointer to the corresponding font.

```

351 {
352     // 1. check key, throw error if not found
353     if (this->font_map.count(font_key) <= 0) {
354         std::string error_str = "ERROR AssetsManager::getFont() font key ";
355         error_str += font_key;
356         error_str += " is not contained in font map";
357
358         this->clear();
359
360         #ifdef _WIN32

```

```

361         std::cout << error_str << std::endl;
362     #endif /* _WIN32 */
363
364     throw std::runtime_error(error_str);
365 }
366
367 return this->font_map[font_key];
368 } /* getFont() */

```

#### 4.1.3.5 getSound()

```

sf::Sound * AssetsManager::getSound (
    std::string sound_key )

```

Method to get sound associated with given sound key.

##### Parameters

<i>sound_key</i>	A key associated with the sound (for indexing into the sound map).
------------------	--

##### Returns

A pointer to the corresponding sound.

```

461 {
462     // 1. check key, throw error if not found
463     if (this->sound_map.count(sound_key) <= 0) {
464         std::string error_str = "ERROR AssetsManager::getSound() sound key ";
465         error_str += sound_key;
466         error_str += " is not contained in sound map";
467
468         this->clear();
469
470         #ifdef _WIN32
471             std::cout << error_str << std::endl;
472         #endif /* _WIN32 */
473
474         throw std::runtime_error(error_str);
475     }
476
477     return this->sound_map[sound_key];
478 } /* getSound() */

```

#### 4.1.3.6 getSoundBuffer()

```

sf::SoundBuffer * AssetsManager::getSoundBuffer (
    std::string sound_key )

```

Method to get soundbuffer associated with given sound key.

##### Parameters

<i>sound_key</i>	A key associated with the soundbuffer (for indexing into the soundbuffer map).
------------------	--

**Returns**

A pointer to the corresponding soundbuffer.

```

425 {
426     // 1. check key, throw error if not found
427     if (this->soundbuffer_map.count(sound_key) <= 0) {
428         std::string error_str = "ERROR AssetsManager::getSoundBuffer() sound key ";
429         error_str += sound_key;
430         error_str += " is not contained in soundbuffer map";
431
432         this->clear();
433
434         #ifdef _WIN32
435             std::cout << error_str << std::endl;
436         #endif /* _WIN32 */
437
438         throw std::runtime_error(error_str);
439     }
440
441     return this->soundbuffer_map[sound_key];
442 } /* getSoundBuffer() */

```

**4.1.3.7 getTexture()**

```

sf::Texture * AssetsManager::getTexture (
    std::string texture_key )

```

Method to get texture associated with given texture key.

**Parameters**

<i>texture_key</i>	A key associated with the texture (for indexing into the texture map).
--------------------	--

**Returns**

A pointer to the corresponding texture.

```

388 {
389     // 1. check key, throw error if not found
390     if (this->texture_map.count(texture_key) <= 0) {
391         std::string error_str = "ERROR AssetsManager::getTexture() texture key ";
392         error_str += texture_key;
393         error_str += " is not contained in texture map";
394
395         this->clear();
396
397         #ifdef _WIN32
398             std::cout << error_str << std::endl;
399         #endif /* _WIN32 */
400
401         throw std::runtime_error(error_str);
402     }
403
404     return this->texture_map[texture_key];
405 } /* getTexture() */

```

**4.1.3.8 getTrackStatus()**

```

sf::SoundSource::Status AssetsManager::getTrackStatus (
    void )

```

Method to get the status of the current track.

**Returns**

The status of the current track.

```
629 {
630     return this->current_track->second->getStatus();
631 } /* getTrackStatus */
```

**4.1.3.9 loadFont()**

```
void AssetsManager::loadFont (
    std::string path_2_font,
    std::string font_key )
```

Method to load a font and insert it into the font map.

**Parameters**

<i>path_2_font</i>	A path (either relative or absolute) to the font file.
<i>font_key</i>	A key associated with the font (for indexing into the font map).

```
135 {
136     // 1. check key, throw error if already in use
137     if (this->font_map.count(font_key) > 0) {
138         std::string error_str = "ERROR AssetsManager::loadFont() font key ";
139         error_str += font_key;
140         error_str += " is already in use";
141
142         this->clear();
143
144         #ifdef _WIN32
145             std::cout << error_str << std::endl;
146         #endif /* _WIN32 */
147
148         throw std::runtime_error(error_str);
149     }
150
151     // 2. load from file, throw error on fail
152     sf::Font* font_ptr = new sf::Font();
153
154     if (not font_ptr->loadFromFile(path_2_font)) {
155         std::string error_str = "ERROR AssetsManager::loadFont() could not load ";
156         error_str += "font at ";
157         error_str += path_2_font;
158
159         this->clear();
160
161         #ifdef _WIN32
162             std::cout << error_str << std::endl;
163         #endif /* _WIN32 */
164
165         throw std::runtime_error(error_str);
166     }
167
168     // 3. insert into font map
169     this->font_map.insert(std::pair<std::string, sf::Font*>(font_key, font_ptr));
170
171     std::cout << "Font " << font_key << " inserted into font map" << std::endl;
172
173     return;
174 } /* loadFont() */
```

**4.1.3.10 loadSound()**

```
void AssetsManager::loadSound (
```

```
std::string path_2_sound,
std::string sound_key )
```

Method to load a sound and insert it into the sound map. Automatically creates a corresponding sf::SoundBuffer.

#### Parameters

<i>path_2_sound</i>	A path (either relative or absolute) to the sound file.
<i>sound_key</i>	A key associated with the sound (for indexing into the sound map).

```
259 {
260     // 1. create an associated sf::SoundBuffer
261     this->__loadSoundBuffer(path_2_sound, sound_key);
262
263     // 2. associate sf::Sound with sf::SoundBuffer
264     sf::Sound* sound_ptr = new sf::Sound();
265     sound_ptr->setBuffer(*(this->soundbuffer_map[sound_key]));
266
267     // 3. insert into sound map
268     this->sound_map.insert(std::pair<std::string, sf::Sound*>(sound_key, sound_ptr));
269
270     std::cout << "Sound " << sound_key << " inserted into sound map" << std::endl;
271
272     return;
273 } /* loadSound() */
```

#### 4.1.3.11 loadTexture()

```
void AssetsManager::loadTexture (
    std::string path_2_texture,
    std::string texture_key )
```

Method to load a texture and insert it into the texture map.

#### Parameters

<i>path_2_texture</i>	A path (either relative or absolute) to the texture file.
<i>texture_key</i>	A key associated with the texture (for indexing into the texture map).

```
196 {
197     // 1. check key, throw error if already in use
198     if (this->texture_map.count(texture_key) > 0) {
199         std::string error_str = "ERROR AssetsManager::loadTexture() texture key ";
200         error_str += texture_key;
201         error_str += " is already in use";
202
203         this->clear();
204
205         #ifdef _WIN32
206             std::cout << error_str << std::endl;
207         #endif /* _WIN32 */
208
209         throw std::runtime_error(error_str);
210     }
211
212     // 2. load from file, throw error on fail
213     sf::Texture* texture_ptr = new sf::Texture();
214
215     if (not texture_ptr->loadFromFile(path_2_texture)) {
216         std::string error_str = "ERROR AssetsManager::loadTexture() could not load ";
217         error_str += "texture at ";
218         error_str += path_2_texture;
219
220         this->clear();
221
222         #ifdef _WIN32
223             std::cout << error_str << std::endl;
224         #endif
```

```

225         #endif /* _WIN32 */
226
227         throw std::runtime_error(error_str);
228     }
229
230
231     // 3. insert into texture map
232     this->texture_map.insert(
233         std::pair<std::string, sf::Texture*>(texture_key, texture_ptr)
234     );
235
236     std::cout << "Texture " << texture_key << " inserted into texture map" << std::endl;
237
238     return;
239 } /* loadTexture() */

```

#### 4.1.3.12 loadTrack()

```

void AssetsManager::loadTrack (
    std::string path_2_track,
    std::string track_key )

```

Method to load a track (sf::Music) and insert it into the track map.

##### Parameters

<i>path_2_track</i>	A path (either relative or absolute) to the track file.
<i>track_key</i>	A key associated with the track (for indexing into the track map).

```

292 {
293     // 1. check key, throw error if already in use
294     if (this->track_map.count(track_key) > 0) {
295         std::string error_str = "ERROR AssetsManager::loadTrack() track key ";
296         error_str += track_key;
297         error_str += " is already in use";
298
299         this->clear();
300
301         #ifdef _WIN32
302             std::cout << error_str << std::endl;
303         #endif /* _WIN32 */
304
305         throw std::runtime_error(error_str);
306     }
307
308     // 2. open from file, throw error on fail
309     sf::Music* track_ptr = new sf::Music();
310
311     if (not track_ptr->openFromFile(path_2_track)) {
312         std::string error_str = "ERROR AssetsManager::loadTrack() could not open ";
313         error_str += "track at ";
314         error_str += path_2_track;
315
316         this->clear();
317
318         #ifdef _WIN32
319             std::cout << error_str << std::endl;
320         #endif /* _WIN32 */
321
322         throw std::runtime_error(error_str);
323     }
324
325     // 3. insert into track map
326     this->track_map.insert(std::pair<std::string, sf::Music*>(track_key, track_ptr));
327     this->current_track = this->track_map.begin();
328
329     std::cout << "Track " << track_key << " inserted into track map" << std::endl;
330
331     return;
332 } /* loadTrack() */

```

#### 4.1.3.13 nextTrack()

```
void AssetsManager::nextTrack (
    void )
```

Method to advance to the next track. Wraps around if the end of the track map is reached.

```
551 {
552     // 1. stop current track
553     this->stopTrack();
554
555     // 2. increment current track
556     this->current_track++;
557
558     // 3. handle wrap around
559     if (this->current_track == this->track_map.end()) {
560         this->current_track = this->track_map.begin();
561     }
562
563     return;
564 } /* nextTrack() */
```

#### 4.1.3.14 pauseTrack()

```
void AssetsManager::pauseTrack (
    void )
```

Method to pause the current track.

```
512 {
513     this->current_track->second->pause();
514
515     return;
516 } /* pauseTrack() */
```

#### 4.1.3.15 playTrack()

```
void AssetsManager::playTrack (
    void )
```

Method to play the current track.

```
493 {
494     this->current_track->second->play();
495
496     return;
497 } /* playTrack() */
```

#### 4.1.3.16 previousTrack()

```
void AssetsManager::previousTrack (
    void )
```

Method to return to the previous track. Wraps around if the beginning of the track map is reached.

```
580 {
581     // 1. stop current track
582     this->stopTrack();
583
584     // 2. handle wrap around
585     if (this->current_track == this->track_map.begin()) {
586         this->current_track = this->track_map.end();
587     }
588
589     // 3. decrement current track
590     this->current_track--;
591
592     return;
593 } /* previousTrack() */
```

#### 4.1.3.17 stopTrack()

```
void AssetsManager::stopTrack (
    void )
```

Method to stop the current track.

```
531 {
532     this->current_track->second->stop();
533
534     return;
535 } /* stopTrack() */
```

### 4.1.4 Member Data Documentation

#### 4.1.4.1 current\_track

```
std::map<std::string, sf::Music*>::iterator AssetsManager::current_track
```

A map iterator which corresponds to the current track (i.e., the track currently being played).

#### 4.1.4.2 font\_map

```
std::map<std::string, sf::Font*> AssetsManager::font_map
```

A map of pointers to loaded fonts.

#### 4.1.4.3 sound\_map

```
std::map<std::string, sf::Sound*> AssetsManager::sound_map
```

A map of pointers to loaded sounds.

#### 4.1.4.4 soundbuffer\_map

```
std::map<std::string, sf::SoundBuffer*> AssetsManager::soundbuffer_map
```

A map of pointers to sound buffers.



#### 4.1.4.5 texture\_map

```
std::map<std::string, sf::Texture*> AssetsManager::texture_map
```

A map of pointers to loaded textures.

#### 4.1.4.6 track\_map

```
std::map<std::string, sf::Music*> AssetsManager::track_map
```

A map of pointers to opened tracks (i.e. sf::Music).

The documentation for this class was generated from the following files:

- header/ESC\_core/[AssetsManager.h](#)
- source/ESC\_core/[AssetsManager.cpp](#)

## 4.2 ContextMenu Class Reference

A class which defines a context menu for the game.

```
#include <ContextMenu.h>
```

Collaboration diagram for ContextMenu:



### Public Member Functions

- [ContextMenu](#) (sf::Event \*, sf::RenderWindow \*, [AssetsManager](#) \*, [MessageHub](#) \*)  
*Constructor for the [ContextMenu](#) class.*
- void [processEvent](#) (void)  
*Method to processEvent [ContextMenu](#). To be called once per event.*
- void [processMessage](#) (void)  
*Method to processMessage [ContextMenu](#). To be called once per message.*
- void [draw](#) (void)  
*Method to draw the hex tile to the render window. To be called once per frame.*
- [~ContextMenu](#) (void)  
*Destructor for the [ContextMenu](#) class.*

## Public Attributes

- [ConsoleState console\\_state](#)  
*The current state of the console screen.*
- bool [console\\_string\\_changed](#)  
*Boolean which indicates if console string just changed.*
- bool [game\\_menu\\_up](#)  
*Indicates whether or not the game menu is up.*
- size\_t [console\\_substring\\_idx](#)  
*The current final index of the console string draw.*
- int [frame](#)  
*The current frame of this object.*
- double [position\\_x](#)  
*The position of the object.*
- double [position\\_y](#)  
*The position of the object.*
- std::string [console\\_string](#)  
*The string to be printed to the console screen.*
- sf::RectangleShape [menu\\_frame](#)  
*The frame of the context menu.*
- sf::RectangleShape [visual\\_screen](#)  
*The context menu screen for visuals.*
- sf::ConvexShape [visual\\_screen\\_frame\\_top](#)  
*The top framing of the visual screen.*
- sf::ConvexShape [visual\\_screen\\_frame\\_left](#)  
*The left framing of the visual screen.*
- sf::ConvexShape [visual\\_screen\\_frame\\_bottom](#)  
*The bottom framing of the visual screen.*
- sf::ConvexShape [visual\\_screen\\_frame\\_right](#)  
*The right framing of the visual screen.*
- sf::RectangleShape [console\\_screen](#)  
*The context menu console screen (for animated text output).*
- sf::ConvexShape [console\\_screen\\_frame\\_top](#)  
*The top framing of the console screen.*
- sf::ConvexShape [console\\_screen\\_frame\\_left](#)  
*The left framing of the console screen.*
- sf::ConvexShape [console\\_screen\\_frame\\_bottom](#)  
*The bottom framing of the console screen.*
- sf::ConvexShape [console\\_screen\\_frame\\_right](#)  
*The right framing of the console screen.*

## Private Member Functions

- void [\\_\\_setUpMenuFrame](#) (void)  
*Helper method to set up context menu frame (drawable).*
- void [\\_\\_setUpVisualScreen](#) (void)  
*Helper method to set up context menu visual screen (drawable).*
- void [\\_\\_setUpVisualScreenFrame](#) (void)  
*Helper method to set up framing for context menu visual screen (drawable).*
- void [\\_\\_drawVisualScreenFrame](#) (void)

- Helper method to draw visual screen frame.*
- void [\\_\\_setUpConsoleScreen](#) (void)
- Helper method to set up context menu console screen (drawable).*
- void [\\_\\_setUpConsoleScreenFrame](#) (void)
- Helper method to set up framing for context menu console screen (drawable).*
- void [\\_\\_drawConsoleScreenFrame](#) (void)
- Helper method to draw console screen frame.*
- void [\\_\\_setConsoleState](#) (ConsoleState)
- Helper method to set state of console screen and update string if necessary.*
- void [\\_\\_setConsoleString](#) (void)
- Helper method to set console string depending on console state.*
- void [\\_\\_drawConsoleText](#) (void)
- Helper method to draw animated text to context menu console screen.*
- void [\\_\\_handleKeyPressEvents](#) (void)
- Helper method to handle key press events.*
- void [\\_\\_handleMouseButtonEvents](#) (void)
- Helper method to handle mouse button events.*
- void [\\_\\_sendQuitGameMessage](#) (void)
- Helper method to format and send a quit game message.*
- void [\\_\\_sendRestartGameMessage](#) (void)
- Helper method to format and send a restart game message.*

## Private Attributes

- sf::Event \* [event\\_ptr](#)
- A pointer to the event class.*
- sf::RenderWindow \* [render\\_window\\_ptr](#)
- A pointer to the render window.*
- [AssetsManager](#) \* [assets\\_manager\\_ptr](#)
- A pointer to the assets manager.*
- [MessageHub](#) \* [message\\_hub\\_ptr](#)
- A pointer to the message hub.*

### 4.2.1 Detailed Description

A class which defines a context menu for the game.

### 4.2.2 Constructor & Destructor Documentation

#### 4.2.2.1 ContextMenu()

```
ContextMenu::ContextMenu (
    sf::Event * event_ptr,
    sf::RenderWindow * render_window_ptr,
    AssetsManager * assets_manager_ptr,
    MessageHub * message_hub_ptr )
```

Constructor for the [ContextMenu](#) class.

## Parameters

<i>event_ptr</i>	Pointer to the event class.
<i>render_window_ptr</i>	Pointer to the render window.
<i>assets_manager_ptr</i>	Pointer to the assets manager.
<i>message_hub_ptr</i>	Pointer to the message hub.

```

814 {
815     // 1. set attributes
816
817     // 1.1. private
818     this->event_ptr = event_ptr;
819     this->render_window_ptr = render_window_ptr;
820
821     this->assets_manager_ptr = assets_manager_ptr;
822     this->message_hub_ptr = message_hub_ptr;
823
824     // 1.2. public
825     this->console_state = ConsoleState :: NONE_STATE;
826     this->__setConsoleState(ConsoleState :: READY);
827
828     this->console_string_changed = true;
829     this->game_menu_up = false;
830
831     this->frame = 0;
832
833     this->position_x = GAME_WIDTH;
834     this->position_y = 0;
835
836     // 2. set up and position drawable attributes
837     this->__setUpMenuFrame();
838     this->__setUpVisualScreen();
839     this->__setUpVisualScreenFrame();
840     this->__setUpConsoleScreen();
841     this->__setUpConsoleScreenFrame();
842
843     std::cout << "ContextMenu constructed at " << this << std::endl;
844
845     return;
846 } /* ContextMenu() */

```

## 4.2.2.2 ~ContextMenu()

```

ContextMenu::~~ContextMenu (
    void )

```

Destructor for the [ContextMenu](#) class.

```

996 {
997     std::cout << "ContextMenu at " << this << " destroyed" << std::endl;
998
999     return;
1000 } /* ~ContextMenu() */

```

## 4.2.3 Member Function Documentation

## 4.2.3.1 \_\_drawConsoleScreenFrame()

```

void ContextMenu::__drawConsoleScreenFrame (
    void ) [private]

```

Helper method to draw console screen frame.

```

433 {
434     this->render_window_ptr->draw(this->console_screen_frame_top);
435     this->render_window_ptr->draw(this->console_screen_frame_left);
436     this->render_window_ptr->draw(this->console_screen_frame_bottom);
437     this->render_window_ptr->draw(this->console_screen_frame_right);
438
439     return;
440 } /* __drawContextScreenFrame() */

```

#### 4.2.3.2 \_\_drawConsoleText()

```

void ContextMenu::__drawConsoleText (
    void ) [private]

```

Helper method to draw animated text to context menu console screen.

```

556 {
557     // 1. set up console text (drawable)
558     sf::Text console_text;
559
560     if (this->console_string_changed) {
561         this->assets_manager_ptr->getSound("console string print")->play();
562
563         console_text.setString(this->console_string.substr(0, this->console_substring_idx));
564
565         this->console_substring_idx++;
566
567         while (
568             this->console_string.substr(0, this->console_substring_idx).back() == ' '
569         ) {
570             this->console_substring_idx++;
571
572             if (this->console_substring_idx >= this->console_string.size()) {
573                 break;
574             }
575         }
576
577         if (this->console_substring_idx >= this->console_string.size()) {
578             this->console_string_changed = false;
579         }
580     }
581
582     else {
583         console_text.setString(this->console_string);
584     }
585
586     console_text.setFont(*(this->assets_manager_ptr->getFont("Glass_TTY_VT220")));
587     console_text.setCharacterSize(16);
588     console_text.setFillColor(MONOCROME_TEXT_GREEN);
589
590     console_text.setPosition(
591         this->position_x - 50 - 300 + 16,
592         this->position_y + GAME_HEIGHT - 50 - 340 + 16
593     );
594
595
596     // 2. draw console text
597     this->render_window_ptr->draw(console_text);
598
599
600     // 3. assemble and draw blinking console cursor
601     if ((this->frame % FRAMES_PER_SECOND) > FRAMES_PER_SECOND / 2) {
602         sf::RectangleShape console_cursor(sf::Vector2f(10, 16));
603
604         console_cursor.setFillColor(MONOCROME_TEXT_GREEN);
605
606         console_cursor.setPosition(
607             console_text.getPosition().x,
608             console_text.getPosition().y + console_text.getLocalBounds().height + 10
609         );
610
611         this->render_window_ptr->draw(console_cursor);
612     }
613
614     // 4. updating frame count if console is in menu state
615     if (this->console_state == ConsoleState::MENU) {
616         std::string frame_count_string = "FRAME: ";
617         frame_count_string += std::to_string(this->frame);
618     }

```

```

619         sf::Text frame_count_text (
620             frame_count_string,
621             *(this->assets_manager_ptr->getFont("Glass_TTY_VT220")),
622             16
623         );
624
625         frame_count_text.setFillColor(MONOCROME_TEXT_GREEN);
626
627         frame_count_text.setPosition(
628             console_text.getPosition().x,
629             console_text.getPosition().y + console_text.getLocalBounds().height - 10
630         );
631
632         this->render_window_ptr->draw(frame_count_text);
633     }
634
635     return;
636 } /* __drawConsoleText() */

```

#### 4.2.3.3 \_\_drawVisualScreenFrame()

```

void ContextMenu::__drawVisualScreenFrame (
    void ) [private]

```

Helper method to draw visual screen frame.

```

208 {
209     this->render_window_ptr->draw(this->visual_screen_frame_top);
210     this->render_window_ptr->draw(this->visual_screen_frame_left);
211     this->render_window_ptr->draw(this->visual_screen_frame_bottom);
212     this->render_window_ptr->draw(this->visual_screen_frame_right);
213
214     return;
215 } /* __drawVisualScreenFrame() */

```

#### 4.2.3.4 \_\_handleKeyPressEvents()

```

void ContextMenu::__handleKeyPressEvents (
    void ) [private]

```

Helper method to handle key press events.

```

651 {
652     switch (this->event_ptr->key.code) {
653         case (sf::Keyboard::Escape): {
654             if (this->console_state == ConsoleState :: MENU) {
655                 this->__setConsoleState(ConsoleState :: READY);
656             }
657
658             else {
659                 this->__setConsoleState(ConsoleState :: MENU);
660             }
661
662             break;
663         }
664
665         case (sf::Keyboard::Q): {
666             if (this->console_state == ConsoleState :: MENU) {
667                 this->__sendQuitGameMessage();
668             }
669         }
670
671         case (sf::Keyboard::R): {
672             if (this->console_state == ConsoleState :: MENU) {
673                 this->__sendRestartGameMessage();
674             }
675         }
676     }
677 }
678
679

```

```

680         default: {
681             // do nothing!
682         }
683         break;
684     }
685 }
686
687 return;
688 } /* __handleKeyPressEvents() */

```

#### 4.2.3.5 \_\_handleMouseButtonEvents()

```

void ContextMenu::__handleMouseButtonEvents (
    void ) [private]

```

Helper method to handle mouse button events.

```

703 {
704     switch (this->event_ptr->mouseButton.button) {
705         case (sf::Mouse::Left): {
706             //...
707
708             break;
709         }
710
711         case (sf::Mouse::Right): {
712             //...
713
714             break;
715         }
716     }
717
718     default: {
719         // do nothing!
720     }
721     break;
722 }
723
724 }
725
726 return;
727 } /* __handleMouseButtonEvents() */

```

#### 4.2.3.6 \_\_sendQuitGameMessage()

```

void ContextMenu::__sendQuitGameMessage (
    void ) [private]

```

Helper method to format and send a quit game message.

```

742 {
743     Message quit_game_message;
744
745     quit_game_message.channel = GAME_CHANNEL;
746     quit_game_message.subject = "quit game";
747
748     this->message_hub_ptr->sendMessage(quit_game_message);
749
750     std::cout << "Quit game message sent by " << this << std::endl;
751     return;
752 } /* __sendQuitGameMessage() */

```

#### 4.2.3.7 \_\_sendRestartGameMessage()

```
void ContextMenu::__sendRestartGameMessage (
    void ) [private]
```

Helper method to format and send a restart game message.

```
767 {
768     Message restart_game_message;
769
770     restart_game_message.channel = GAME_CHANNEL;
771     restart_game_message.subject = "restart game";
772
773     this->message_hub_ptr->sendMessage(restart_game_message);
774
775     std::cout << "Restart game message sent by " << this << std::endl;
776     return;
777 } /* __sendRestartGameMessage() */
```

#### 4.2.3.8 \_\_setConsoleState()

```
void ContextMenu::__setConsoleState (
    ConsoleState console_state ) [private]
```

Helper method to set state of console screen and update string if necessary.

##### Parameters

<i>console_state</i>	The state (ConsoleState) to set the console to.
----------------------	---

```
457 {
458     // 1. if no change, do nothing
459     if (this->console_state == console_state) {
460         return;
461     }
462
463     // 2. update console state, set console string accordingly
464     this->console_state = console_state;
465     this->__setConsoleString();
466
467     return;
468 } /* __setConsoleState() */
```

#### 4.2.3.9 \_\_setConsoleString()

```
void ContextMenu::__setConsoleString (
    void ) [private]
```

Helper method to set console string depending on console state.

```
483 {
484     this->console_string_changed = true;
485     this->console_substring_idx = 0;
486
487     this->console_string.clear();
488
489     switch (this->console_state) {
490         case (ConsoleState :: MENU): {
491             // 32 char x 17 line console "-----\n";
492             this->console_string = "          **** MENU ****          \n";
493             this->console_string += "          \n";
494             this->console_string += "[R]:  RESTART          \n";
495             this->console_string += "          \n";
496             this->console_string += "[TAB]: TOGGLE RESOURCE OVERLAY \n";
497         }
```



```

497         this->console_string += "[T]:  TUTORIAL          \n";
498         this->console_string += "                  \n";
499         this->console_string += "                  \n";
500         this->console_string += "                  \n";
501         this->console_string += "                  \n";
502         this->console_string += "                  \n";
503         this->console_string += "                  \n";
504         this->console_string += "                  \n";
505         this->console_string += "[Q]:    QUIT          \n";
506         this->console_string += "[ESC]:  CLOSE MENU    \n";
507         this->console_string += "                  \n";
508
509         break;
510     }
511
512
513     case (ConsoleState :: TILE): {
514         // take console string from tile state message
515
516         break;
517     }
518
519
520     default: {
521         //          32 char x 17 line console "-----\n";
522         this->console_string = "    **** RTZ 64 CONTEXT V12 **** \n";
523         this->console_string += "                  \n";
524         this->console_string += "64K RAM SYSTEM  38911 BYTES FREE\n";
525         this->console_string += "                  \n";
526         this->console_string += "[TAB]:  TOGGLE RESOURCE OVERLAY \n";
527         this->console_string += "                  \n";
528         this->console_string += "[ESC]:           MENU          \n";
529         this->console_string += "[LEFT CLICK]:  TILE INFO/OPTIONS\n";
530         this->console_string += "[RIGHT CLICK]: CLEAR SELECTION  \n";
531         this->console_string += "                  \n";
532         this->console_string += "[ENTER]:  END TURN            \n";
533         this->console_string += "                  \n";
534         this->console_string += "READY.                      ";
535
536         break;
537     }
538 }
539
540 return;
541 } /* __setConsoleString() */

```

#### 4.2.3.10 \_\_setUpConsoleScreen()

```

void ContextMenu::__setUpConsoleScreen (
    void ) [private]

```

Helper method to set up context menu console screen (drawable).

```

230 {
231     this->console_screen.setSize(sf::Vector2f(300, 340));
232     this->console_screen.setOrigin(300, 340);
233     this->console_screen.setPosition(
234         this->position_x - 50,
235         this->position_y + GAME_HEIGHT - 50
236     );
237     this->console_screen.setFillColor(MONOCHROME_SCREEN_BACKGROUND);
238
239     return;
240 } /* __setUpConsoleScreen() */

```

#### 4.2.3.11 \_\_setUpConsoleScreenFrame()

```

void ContextMenu::__setUpConsoleScreenFrame (
    void ) [private]

```

Helper method to set up framing for context menu console screen (drawable).

```

255 {
256     int n_points = 4;
257
258     // 1. top framing
259     this->console_screen_frame_top.setPointCount(n_points);
260
261     this->console_screen_frame_top.setPoint(
262         0,
263         sf::Vector2f(
264             this->position_x - 50,
265             this->position_y + GAME_HEIGHT - 50 - 340
266         )
267     );
268     this->console_screen_frame_top.setPoint(
269         1,
270         sf::Vector2f(
271             this->position_x - 50 + 16,
272             this->position_y + GAME_HEIGHT - 50 - 340 - 16
273         )
274     );
275     this->console_screen_frame_top.setPoint(
276         2,
277         sf::Vector2f(
278             this->position_x - 350 - 16,
279             this->position_y + GAME_HEIGHT - 50 - 340 - 16
280         )
281     );
282     this->console_screen_frame_top.setPoint(
283         3,
284         sf::Vector2f(
285             this->position_x - 350,
286             this->position_y + GAME_HEIGHT - 50 - 340
287         )
288     );
289
290     this->console_screen_frame_top.setFillColors(VISUAL_SCREEN_FRAME_GREY);
291
292     this->console_screen_frame_top.setOutlineThickness(2);
293     this->console_screen_frame_top.setOutlineColor(sf::Color(0, 0, 0, 255));
294
295     this->console_screen_frame_top.move(0, -2);
296
297
298     // 2. left framing
299     this->console_screen_frame_left.setPointCount(n_points);
300
301     this->console_screen_frame_left.setPoint(
302         0,
303         sf::Vector2f(
304             this->position_x - 350,
305             this->position_y + GAME_HEIGHT - 50 - 340
306         )
307     );
308     this->console_screen_frame_left.setPoint(
309         1,
310         sf::Vector2f(
311             this->position_x - 350 - 16,
312             this->position_y + GAME_HEIGHT - 50 - 340 - 16
313         )
314     );
315     this->console_screen_frame_left.setPoint(
316         2,
317         sf::Vector2f(
318             this->position_x - 350 - 16,
319             this->position_y + GAME_HEIGHT - 50 + 16
320         )
321     );
322     this->console_screen_frame_left.setPoint(
323         3,
324         sf::Vector2f(
325             this->position_x - 350,
326             this->position_y + GAME_HEIGHT - 50
327         )
328     );
329
330     this->console_screen_frame_left.setFillColors(VISUAL_SCREEN_FRAME_GREY);
331
332     this->console_screen_frame_left.setOutlineThickness(2);
333     this->console_screen_frame_left.setOutlineColor(sf::Color(0, 0, 0, 255));
334
335     this->console_screen_frame_left.move(-2, 0);
336
337
338     // 3. bottom framing
339     this->console_screen_frame_bottom.setPointCount(n_points);
340

```

```

341     this->console_screen_frame_bottom.setPoint(
342         0,
343         sf::Vector2f(
344             this->position_x - 350,
345             this->position_y + GAME_HEIGHT - 50
346         )
347     );
348     this->console_screen_frame_bottom.setPoint(
349         1,
350         sf::Vector2f(
351             this->position_x - 350 - 16,
352             this->position_y + GAME_HEIGHT - 50 + 16
353         )
354     );
355     this->console_screen_frame_bottom.setPoint(
356         2,
357         sf::Vector2f(
358             this->position_x - 50 + 16,
359             this->position_y + GAME_HEIGHT - 50 + 16
360         )
361     );
362     this->console_screen_frame_bottom.setPoint(
363         3,
364         sf::Vector2f(
365             this->position_x - 50,
366             this->position_y + GAME_HEIGHT - 50
367         )
368     );
369     this->console_screen_frame_bottom.setFillColor(VISUAL_SCREEN_FRAME_GREY);
370
371     this->console_screen_frame_bottom.setOutlineThickness(2);
372     this->console_screen_frame_bottom.setOutlineColor(sf::Color(0, 0, 0, 255));
373
374     this->console_screen_frame_bottom.move(0, 2);
375
376
377     // 4. right framing
378     this->console_screen_frame_right.setPointCount(n_points);
379
380     this->console_screen_frame_right.setPoint(
381         0,
382         sf::Vector2f(
383             this->position_x - 50,
384             this->position_y + GAME_HEIGHT - 50
385         )
386     );
387
388     this->console_screen_frame_right.setPoint(
389         1,
390         sf::Vector2f(
391             this->position_x - 50 + 16,
392             this->position_y + GAME_HEIGHT - 50 + 16
393         )
394     );
395     this->console_screen_frame_right.setPoint(
396         2,
397         sf::Vector2f(
398             this->position_x - 50 + 16,
399             this->position_y + GAME_HEIGHT - 50 - 340 - 16
400         )
401     );
402     this->console_screen_frame_right.setPoint(
403         3,
404         sf::Vector2f(
405             this->position_x - 50,
406             this->position_y + GAME_HEIGHT - 50 - 340
407         )
408     );
409     this->console_screen_frame_right.setFillColor(VISUAL_SCREEN_FRAME_GREY);
410
411     this->console_screen_frame_right.setOutlineThickness(2);
412     this->console_screen_frame_right.setOutlineColor(sf::Color(0, 0, 0, 255));
413
414     this->console_screen_frame_right.move(2, 0);
415
416     return;
417 } /* __setUpConsoleScreenFrame() */
418 }

```

#### 4.2.3.12 \_\_setUpMenuFrame()

```
void ContextMenu::__setUpMenuFrame (
```

```
void ) [private]
```

Helper method to set up context menu frame (drawable).

```
34 {
35     this->menu_frame.setSize(sf::Vector2f(400, GAME_HEIGHT));
36     this->menu_frame.setOrigin(400, 0);
37     this->menu_frame.setPosition(this->position_x, this->position_y);
38     this->menu_frame.setFillColor(MENU_FRAME_GREY);
39
40     return;
41 } /* __setUpMenuFrame() */
```

#### 4.2.3.13 \_\_setUpVisualScreen()

```
void ContextMenu::__setUpVisualScreen (
    void ) [private]
```

Helper method to set up context menu visual screen (drawable).

```
56 {
57     this->visual_screen.setSize(sf::Vector2f(300, 300));
58     this->visual_screen.setOrigin(300, 0);
59     this->visual_screen.setPosition(this->position_x - 50, this->position_y + 50);
60     this->visual_screen.setFillColor(MONochrome_SCREEN_BACKGROUND);
61
62     return;
63 } /* __setUpVisualScreen() */
```

#### 4.2.3.14 \_\_setUpVisualScreenFrame()

```
void ContextMenu::__setUpVisualScreenFrame (
    void ) [private]
```

Helper method to set up framing for context menu visual screen (drawable).

```
78 {
79     int n_points = 4;
80
81     // 1. top framing
82     this->visual_screen_frame_top.setPointCount(n_points);
83
84     this->visual_screen_frame_top.setPoint(
85         0,
86         sf::Vector2f(this->position_x - 50, this->position_y + 50)
87     );
88     this->visual_screen_frame_top.setPoint(
89         1,
90         sf::Vector2f(this->position_x - 50 + 16, this->position_y + 50 - 16)
91     );
92     this->visual_screen_frame_top.setPoint(
93         2,
94         sf::Vector2f(this->position_x - 350 - 16, this->position_y + 50 - 16)
95     );
96     this->visual_screen_frame_top.setPoint(
97         3,
98         sf::Vector2f(this->position_x - 350, this->position_y + 50)
99     );
100
101     this->visual_screen_frame_top.setFillColor(VISUAL_SCREEN_FRAME_GREY);
102
103     this->visual_screen_frame_top.setOutlineThickness(2);
104     this->visual_screen_frame_top.setOutlineColor(sf::Color(0, 0, 0, 255));
105
106     this->visual_screen_frame_top.move(0, -2);
107
108
109     // 2. left framing
110     this->visual_screen_frame_left.setPointCount(n_points);
111
112     this->visual_screen_frame_left.setPoint(
```

```

113         0,
114         sf::Vector2f(this->position_x - 350, this->position_y + 50)
115     );
116     this->visual_screen_frame_left.setPoint(
117         1,
118         sf::Vector2f(this->position_x - 350 - 16, this->position_y + 50 - 16)
119     );
120     this->visual_screen_frame_left.setPoint(
121         2,
122         sf::Vector2f(this->position_x - 350 - 16, this->position_y + 350 + 16)
123     );
124     this->visual_screen_frame_left.setPoint(
125         3,
126         sf::Vector2f(this->position_x - 350, this->position_y + 350)
127     );
128
129     this->visual_screen_frame_left.setFillColor(VISUAL_SCREEN_FRAME_GREY);
130
131     this->visual_screen_frame_left.setOutlineThickness(2);
132     this->visual_screen_frame_left.setOutlineColor(sf::Color(0, 0, 0, 255));
133
134     this->visual_screen_frame_left.move(-2, 0);
135
136
137     // 3. bottom framing
138     this->visual_screen_frame_bottom.setPointCount(n_points);
139
140     this->visual_screen_frame_bottom.setPoint(
141         0,
142         sf::Vector2f(this->position_x - 350, this->position_y + 350)
143     );
144     this->visual_screen_frame_bottom.setPoint(
145         1,
146         sf::Vector2f(this->position_x - 350 - 16, this->position_y + 350 + 16)
147     );
148     this->visual_screen_frame_bottom.setPoint(
149         2,
150         sf::Vector2f(this->position_x - 50 + 16, this->position_y + 350 + 16)
151     );
152     this->visual_screen_frame_bottom.setPoint(
153         3,
154         sf::Vector2f(this->position_x - 50, this->position_y + 350)
155     );
156
157     this->visual_screen_frame_bottom.setFillColor(VISUAL_SCREEN_FRAME_GREY);
158
159     this->visual_screen_frame_bottom.setOutlineThickness(2);
160     this->visual_screen_frame_bottom.setOutlineColor(sf::Color(0, 0, 0, 255));
161
162     this->visual_screen_frame_bottom.move(0, 2);
163
164
165     // 4. right framing
166     this->visual_screen_frame_right.setPointCount(n_points);
167
168     this->visual_screen_frame_right.setPoint(
169         0,
170         sf::Vector2f(this->position_x - 50, this->position_y + 350)
171     );
172     this->visual_screen_frame_right.setPoint(
173         1,
174         sf::Vector2f(this->position_x - 50 + 16, this->position_y + 350 + 16)
175     );
176     this->visual_screen_frame_right.setPoint(
177         2,
178         sf::Vector2f(this->position_x - 50 + 16, this->position_y + 50 - 16)
179     );
180     this->visual_screen_frame_right.setPoint(
181         3,
182         sf::Vector2f(this->position_x - 50, this->position_y + 50)
183     );
184
185     this->visual_screen_frame_right.setFillColor(VISUAL_SCREEN_FRAME_GREY);
186
187     this->visual_screen_frame_right.setOutlineThickness(2);
188     this->visual_screen_frame_right.setOutlineColor(sf::Color(0, 0, 0, 255));
189
190     this->visual_screen_frame_right.move(2, 0);
191
192     return;
193 } /* __setUpVisualScreenFrame() */

```

#### 4.2.3.15 draw()

```
void ContextMenu::draw (
    void )
```

Method to draw the hex tile to the render window. To be called once per frame.

```
966 {
967     // 1. menu frame
968     this->render_window_ptr->draw(this->menu_frame);
969
970     // 2. visual screen
971     this->render_window_ptr->draw(this->visual_screen);
972     this->__drawVisualScreenFrame();
973
974     // 3. console screen
975     this->render_window_ptr->draw(this->console_screen);
976     this->__drawConsoleScreenFrame();
977     this->__drawConsoleText();
978
979     this->frame++;
980     return;
981 } /* draw() */
```

#### 4.2.3.16 processEvent()

```
void ContextMenu::processEvent (
    void )
```

Method to processEvent [ContextMenu](#). To be called once per event.

```
861 {
862     if (this->event_ptr->type == sf::Event::KeyPressed) {
863         this->__handleKeyPressEvents();
864     }
865
866     if (this->event_ptr->type == sf::Event::MouseButtonPressed) {
867         this->__handleMouseButtonEvents();
868     }
869
870     return;
871 } /* processEvent() */
```

#### 4.2.3.17 processMessage()

```
void ContextMenu::processMessage (
    void )
```

Method to processMessage [ContextMenu](#). To be called once per message.

```
886 {
887     switch (this->console_state) {
888         case (ConsoleState :: TILE): {
889             // process no tile selected
890             if (not this->message_hub_ptr->isEmpty(NO_TILE_SELECTED_CHANNEL)) {
891                 Message no_tile_selected_message = this->message_hub_ptr->receiveMessage(
892                     NO_TILE_SELECTED_CHANNEL
893                 );
894
895                 if (no_tile_selected_message.subject == "no tile selected") {
896                     this->__setConsoleState(ConsoleState :: READY);
897
898                     std::cout << "No tile selected message received by " << this <<
899                         std::endl;
900                     this->message_hub_ptr->popMessage(NO_TILE_SELECTED_CHANNEL);
901                 }
902             }
903
904             // process tile state
```

```

905         if (not this->message_hub_ptr->isEmpty(TILE_STATE_CHANNEL)) {
906             Message tile_state_message = this->message_hub_ptr->receiveMessage(
907                 TILE_STATE_CHANNEL
908             );
909
910             if (tile_state_message.subject == "tile state") {
911                 this->console_string = tile_state_message.string_payload["console string"];
912
913                 this->console_string_changed = true;
914                 this->console_substring_idx = 0;
915
916                 std::cout << "Tile state message received by " << this << std::endl;
917                 this->message_hub_ptr->popMessage(TILE_STATE_CHANNEL);
918             }
919         }
920
921         // process tile selected (subsequent left clicks causing program to hang)
922         if (not this->message_hub_ptr->isEmpty(TILE_SELECTED_CHANNEL)) {
923             this->message_hub_ptr->popMessage(TILE_SELECTED_CHANNEL);
924         }
925
926         break;
927     }
928
929     default: {
930         // process tile selected
931         if (not this->message_hub_ptr->isEmpty(TILE_SELECTED_CHANNEL)) {
932             Message tile_selected_message = this->message_hub_ptr->receiveMessage(
933                 TILE_SELECTED_CHANNEL
934             );
935
936             if (tile_selected_message.subject == "tile selected") {
937                 this->__setConsoleState(ConsoleState :: TILE);
938
939                 std::cout << "Tile selected message received by " << this <<
940                     std::endl;
941                 this->message_hub_ptr->popMessage(TILE_SELECTED_CHANNEL);
942             }
943         }
944
945         break;
946     }
947 }
948
949 return;
950 } /* processMessage() */

```

## 4.2.4 Member Data Documentation

### 4.2.4.1 assets\_manager\_ptr

`AssetsManager*` ContextMenu::assets\_manager\_ptr [private]

A pointer to the assets manager.

### 4.2.4.2 console\_screen

`sf::RectangleShape` ContextMenu::console\_screen

The context menu console screen (for animated text output).

#### 4.2.4.3 console\_screen\_frame\_bottom

```
sf::ConvexShape ContextMenu::console_screen_frame_bottom
```

The bottom framing of the console screen.

#### 4.2.4.4 console\_screen\_frame\_left

```
sf::ConvexShape ContextMenu::console_screen_frame_left
```

The left framing of the console screen.

#### 4.2.4.5 console\_screen\_frame\_right

```
sf::ConvexShape ContextMenu::console_screen_frame_right
```

The right framing of the console screen.

#### 4.2.4.6 console\_screen\_frame\_top

```
sf::ConvexShape ContextMenu::console_screen_frame_top
```

The top framing of the console screen.

#### 4.2.4.7 console\_state

```
ConsoleState ContextMenu::console_state
```

The current state of the console screen.

#### 4.2.4.8 console\_string

```
std::string ContextMenu::console_string
```

The string to be printed to the console screen.



#### 4.2.4.9 console\_string\_changed

```
bool ContextMenu::console_string_changed
```

Boolean which indicates if console string just changed.

#### 4.2.4.10 console\_substring\_idx

```
size_t ContextMenu::console_substring_idx
```

The current final index of the console string draw.

#### 4.2.4.11 event\_ptr

```
sf::Event* ContextMenu::event_ptr [private]
```

A pointer to the event class.

#### 4.2.4.12 frame

```
int ContextMenu::frame
```

The current frame of this object.

#### 4.2.4.13 game\_menu\_up

```
bool ContextMenu::game_menu_up
```

Indicates whether or not the game menu is up.

#### 4.2.4.14 menu\_frame

```
sf::RectangleShape ContextMenu::menu_frame
```

The frame of the context menu.

#### 4.2.4.15 message\_hub\_ptr

```
MessageHub* ContextMenu::message_hub_ptr [private]
```

A pointer to the message hub.

#### 4.2.4.16 position\_x

```
double ContextMenu::position_x
```

The position of the object.

#### 4.2.4.17 position\_y

```
double ContextMenu::position_y
```

The position of the object.

#### 4.2.4.18 render\_window\_ptr

```
sf::RenderWindow* ContextMenu::render_window_ptr [private]
```

A pointer to the render window.

#### 4.2.4.19 visual\_screen

```
sf::RectangleShape ContextMenu::visual_screen
```

The context menu screen for visuals.

#### 4.2.4.20 visual\_screen\_frame\_bottom

```
sf::ConvexShape ContextMenu::visual_screen_frame_bottom
```

The bottom framing of the visual screen.

## 4.2.4.21 visual\_screen\_frame\_left

```
sf::ConvexShape ContextMenu::visual_screen_frame_left
```

The left framing of the visual screen.

## 4.2.4.22 visual\_screen\_frame\_right

```
sf::ConvexShape ContextMenu::visual_screen_frame_right
```

The right framing of the visual screen.

## 4.2.4.23 visual\_screen\_frame\_top

```
sf::ConvexShape ContextMenu::visual_screen_frame_top
```

The top framing of the visual screen.

The documentation for this class was generated from the following files:


- header/[ContextMenu.h](#)
- source/[ContextMenu.cpp](#)

## 4.3 Game Class Reference

A class which acts as the central class for the game, by containing all other classes and implementing the game loop.

```
#include <Game.h>
```

Collaboration diagram for Game:

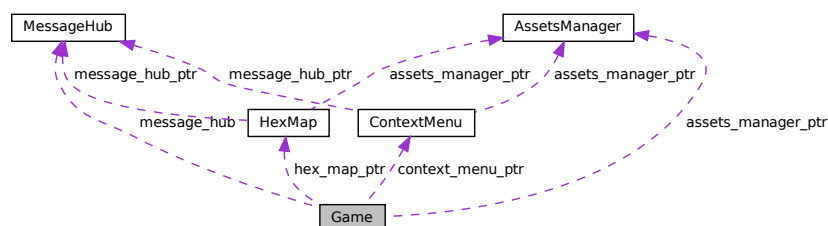

## Public Member Functions

- [Game](#) (sf::RenderWindow \*, [AssetsManager](#) \*)  
*Constructor for the [Game](#) class.*
- bool [run](#) (void)  
*Method to run game (defines game loop).*
- [~Game](#) (void)  
*Destructor for the [Game](#) class.*

## Public Attributes

- [GamePhase](#) [game\\_phase](#)  
*The current phase of the game.*
- bool [quit\\_game](#)  
*Boolean indicating whether to quit (true) or create a new [Game](#) instance (false).*
- bool [game\\_loop\\_broken](#)  
*Boolean indicating whether or not the game loop is broken.*
- bool [show\\_frame\\_clock\\_overlay](#)  
*Boolean indicating whether or not to show frame and clock overlay.*
- unsigned long long int [frame](#)  
*The current frame of the game.*
- double [time\\_since\\_start\\_s](#)  
*The time elapsed [s] since the start of the game.*
- int [year](#)  
*Current game year.*
- int [month](#)  
*Current game month.*
- int [population](#)  
*Current population.*
- int [credits](#)  
*Current balance of credits.*
- int [demand\\_MWh](#)  
*Current energy demand [MWh].*
- int [cumulative\\_emissions\\_tonnes](#)  
*Cumulative emissions [tonnes] (1 tonne = 1000 kg).*
- int [turn](#) = 0  
*The current game turn.*
- sf::Clock [clock](#)  
*The game clock.*
- sf::Event [event](#)  
*The game events class.*
- [MessageHub](#) [message\\_hub](#)  
*The message hub (for inter-object message traffic).*
- [HexMap](#) \* [hex\\_map\\_ptr](#)  
*Pointer to the hex map (defines game world).*
- [ContextMenu](#) \* [context\\_menu\\_ptr](#)  
*Pointer to the context menu.*

## Private Member Functions

- void [\\_\\_toggleFrameClockOverlay](#) (void)  
*Helper method to toggle frame clock overlay.*
- void [\\_\\_handleKeyPressEvents](#) (void)  
*Helper method to handle key press events.*
- void [\\_\\_handleMouseButtonEvents](#) (void)  
*Helper method to handle mouse button events.*
- void [\\_\\_processEvent](#) (void)  
*Helper method to process [Game](#). To be called once per event.*
- void [\\_\\_processMessage](#) (void)  
*Helper method to process [Game](#). To be called once per message.*
- void [\\_\\_sendGameStateMessage](#) (void)  
*Helper method to format and send a game state message.*
- void [\\_\\_insufficientCreditsAlarm](#) (void)  
*Helper method to sound and display and insufficient credits alarm.*
- void [\\_\\_drawFrameClockOverlay](#) (void)  
*Helper method to draw frame clock overlay.*
- void [\\_\\_drawHUD](#) (void)  
*Helper method to heads-up display (HUD).*
- void [\\_\\_draw](#) (void)  
*Helper method to draw game to the render window. To be called once per frame.*

## Private Attributes

- sf::RenderWindow \* [render\\_window\\_ptr](#)  
*A pointer to the render window.*
- [AssetsManager](#) \* [assets\\_manager\\_ptr](#)  
*A pointer to the assets manager.*

### 4.3.1 Detailed Description

A class which acts as the central class for the game, by containing all other classes and implementing the game loop.

### 4.3.2 Constructor & Destructor Documentation

### 4.3.2.1 Game()

```
Game::Game (
    sf::RenderWindow * render_window_ptr,
    AssetsManager * assets_manager_ptr )
```

Constructor for the [Game](#) class.

```
662 {
663     // 1. set attributes
664
665     // 1.1. private
666     this->render_window_ptr = render_window_ptr;
667
668     this->assets_manager_ptr = assets_manager_ptr;
669
670     // 1.2. public
671     this->game_phase = GamePhase :: BUILD_SETTLEMENT;
672
673     this->quit_game = false;
674     this->game_loop_broken = false;
675     this->show_frame_clock_overlay = false;
676
677     this->frame = 0;
678     this->time_since_start_s = 0;
679
680     double seconds_since_epoch = time(NULL);
681     double years_since_epoch = seconds_since_epoch / SECONDS_PER_YEAR;
682
683     this->year = 1970 + (int)years_since_epoch;
684     this->month = (years_since_epoch - (int)years_since_epoch) * 12 + 1;
685
686     this->population = 0;
687     this->credits = 500;
688     this->demand_MWh = 0;
689     this->cumulative_emissions_tonnes = 0;
690
691     this->hex_map_ptr = new HexMap(
692         6,
693         &(this->event),
694         this->render_window_ptr,
695         this->assets_manager_ptr,
696         &(this->message_hub)
697     );
698
699     this->context_menu_ptr = new ContextMenu(
700         &(this->event),
701         this->render_window_ptr,
702         this->assets_manager_ptr,
703         &(this->message_hub)
704     );
705
706     // 2. add message channel(s)
707     this->message_hub.addChannel(GAME_CHANNEL);
708     this->message_hub.addChannel(GAME_STATE_CHANNEL);
709
710     std::cout << "Game constructed at " << this << std::endl;
711
712     return;
713 } /* Game() */
```

### 4.3.2.2 ~Game()

```
Game::~~Game (
    void )
```

Destructor for the [Game](#) class.

```
790 {
791     // 1. clean up attributes
792     delete this->hex_map_ptr;
793     delete this->context_menu_ptr;
794
795     std::cout << "Game at " << this << " destroyed" << std::endl;
796
797     return;
798 } /* ~Game() */
```

### 4.3.3 Member Function Documentation

#### 4.3.3.1 `__draw()`

```
void Game::__draw (
    void ) [private]
```

Helper method to draw game to the render window. To be called once per frame.

```
629 {
630     this->__drawHUD();
631
632     if (this->show_frame_clock_overlay) {
633         this->__drawFrameClockOverlay();
634     }
635
636     return;
637 } /* draw() */
```

#### 4.3.3.2 `__drawFrameClockOverlay()`

```
void Game::__drawFrameClockOverlay (
    void ) [private]
```

Helper method to draw frame clock overlay.

```
455 {
456     std::string frame_clock_string = "FRAME: ";
457     frame_clock_string += std::to_string(this->frame);
458     frame_clock_string += "\nTIME SINCE START [s]: ";
459     frame_clock_string += std::to_string(this->time_since_start_s);
460
461     sf::Text frame_clock_text(
462         frame_clock_string,
463         *(this->assets_manager_ptr->getFont("DroidSansMono")),
464         16
465     );
466
467     sf::RectangleShape frame_clock_backing(
468         sf::Vector2f(
469             1.02 * frame_clock_text.getLocalBounds().width,
470             1.20 * frame_clock_text.getLocalBounds().height
471         )
472     );
473     frame_clock_backing.setFillColor(sf::Color(0, 0, 0, 255));
474
475     this->render_window_ptr->draw(frame_clock_backing);
476     this->render_window_ptr->draw(frame_clock_text);
477
478     return;
479 } /* __drawFrameClockOverlay() */
```

### 4.3.3.3 \_\_drawHUD()

```
void Game::__drawHUD (
    void ) [private]
```

Helper method to heads-up display (HUD).

```
494 {
495     // 1. first line (top)
496     std::string HUD_string = "YEAR: ";
497     HUD_string += std::to_string(this->year);
498
499     HUD_string += "    MONTH: ";
500     HUD_string += std::to_string(this->month);
501
502     HUD_string += "    POPULATION: ";
503     HUD_string += std::to_string(this->population);
504
505     HUD_string += "    CREDITS: ";
506     HUD_string += std::to_string(this->credits);
507     HUD_string += " K";
508
509     HUD_string += "    CURRENT DEMAND: ";
510     HUD_string += std::to_string(this->demand_MWh);
511     HUD_string += " MWh";
512
513     sf::Text HUD_text(
514         HUD_string,
515         *(this->assets_manager_ptr->getFont("Glass_TTY_VT220")),
516         16
517     );
518
519     HUD_text.setPosition(
520         (800 - HUD_text.getLocalBounds().width) / 2,
521         8
522     );
523
524     HUD_text.setFillColor(MONOCROME_TEXT_GREEN);
525
526     this->render_window_ptr->draw(HUD_text);
527
528
529     // 2. second line (top)
530     HUD_string = "CUMULATIVE EMISSIONS: ";
531     HUD_string += std::to_string(this->cumulative_emissions_tonnes);
532     HUD_string += " tonnes (CO2e)";
533
534     HUD_string += "    LIFETIME LIMIT: ";
535     HUD_string += std::to_string(EMISSIONS_LIFETIME_LIMIT_TONNES);
536     HUD_string += " tonnes (CO2e)";
537
538     HUD_text.setString(HUD_string);
539
540     HUD_text.setPosition(
541         (800 - HUD_text.getLocalBounds().width) / 2,
542         35
543     );
544
545     this->render_window_ptr->draw(HUD_text);
546
547
548     // 3. third line (bottom)
549     HUD_string = "GAME PHASE: ";
550
551     switch (this->game_phase) {
552         case (GamePhase :: BUILD_SETTLEMENT): {
553             HUD_string += "BUILD SETTLEMENT";
554
555             break;
556         }
557
558
559         case (GamePhase :: SYSTEM_MANAGEMENT): {
560             HUD_string += "SYSTEM MANAGEMENT";
561
562             break;
563         }
564
565
566         case (GamePhase :: LOSS_EMISSIONS): {
567             HUD_string += "LOSS (EMISSIONS)";
568
569             break;
570         }
571     }
```



```

572
573     case (GamePhase :: LOSS_DEMAND): {
574         HUD_string += "LOSS (DEMAND)";
575
576         break;
577     }
578
579
580     case (GamePhase :: LOSS_CREDITS): {
581         HUD_string += "LOSS (CREDITS)";
582
583         break;
584     }
585
586
587     case (GamePhase :: VICTORY): {
588         HUD_string += "VICTORY";
589
590         break;
591     }
592
593
594     default: {
595         HUD_string += "???";
596
597         break;
598     }
599 }
600
601 HUD_string += "    TURN: ";
602 HUD_string += std::to_string(this->turn);
603
604 HUD_text.setString(HUD_string);
605
606 HUD_text.setPosition(
607     (800 - HUD_text.getLocalBounds().width) / 2,
608     GAME_HEIGHT - 35
609 );
610
611 this->render_window_ptr->draw(HUD_text);
612
613 return;
614 } /* __drawHUD() */

```

#### 4.3.3.4 \_\_handleKeyPressEvents()

```

void Game::__handleKeyPressEvents (
    void ) [private]

```

Helper method to handle key press events.

```

59 {
60     switch (this->event.key.code) {
61         case (sf::Keyboard::Tilde): {
62             this->__toggleFrameClockOverlay();
63
64             break;
65         }
66
67
68         case (sf::Keyboard::Tab): {
69             this->hex_map_ptr->toggleResourceOverlay();
70
71             break;
72         }
73
74
75         default: {
76             // do nothing!
77
78             break;
79         }
80     }
81
82     return;
83 } /* __handleKeyPressEvents() */

```

#### 4.3.3.5 \_\_handleMouseButtonEvents()

```
void Game::__handleMouseButtonEvents (
    void ) [private]
```

Helper method to handle mouse button events.

```
98 {
99     switch (this->event.mouseButton.button) {
100         case (sf::Mouse::Left): {
101             //...
102
103             break;
104         }
105
106         case (sf::Mouse::Right): {
107             //...
108
109             break;
110         }
111
112         default: {
113             // do nothing!
114
115             break;
116         }
117     }
118 }
119
120
121 return;
122 } /* __handleMouseButtonEvents() */
```

#### 4.3.3.6 \_\_insufficientCreditsAlarm()

```
void Game::__insufficientCreditsAlarm (
    void ) [private]
```

Helper method to sound and display and insufficient credits alarm.

```
354 {
355     // 1. sound buzzer
356     this->assets_manager_ptr->getSound("insufficient credits")->play();
357
358     // 2. construct alarm text and backing rectangle
359     sf::Text insufficient_credits_text(
360         "INSUFFICIENT CREDITS",
361         (*this->assets_manager_ptr->getFont("DroidSansMono")),
362         32
363     );
364
365     insufficient_credits_text.setOrigin(
366         insufficient_credits_text.getLocalBounds().width / 2,
367         insufficient_credits_text.getLocalBounds().height / 2
368     );
369
370     insufficient_credits_text.setPosition(400, GAME_HEIGHT / 2);
371
372     sf::RectangleShape backing_rectangle(
373         sf::Vector2f(
374             1.1 * insufficient_credits_text.getLocalBounds().width,
375             1.5 * insufficient_credits_text.getLocalBounds().height
376         )
377     );
378
379     backing_rectangle.setFill-color(RESOURCE_CHIP_GREY);
380
381     backing_rectangle.setOrigin(
382         backing_rectangle.getLocalBounds().width / 2,
383         backing_rectangle.getLocalBounds().height / 2
384     );
385
386     backing_rectangle.setPosition(400, (GAME_HEIGHT / 2) + 8);
387
388     // 3. display loop (blocking ~3 seconds)
389     bool red_flag = true;
390     int alarm_frame = 0;
```

```

391     double time_since_alarm_s = 0;
392
393     sf::Clock alarm_clock;
394
395     while (alarm_frame < 2.5 * FRAMES_PER_SECOND) {
396
397         time_since_alarm_s = alarm_clock.getElapsedTime().asSeconds();
398
399         if (time_since_alarm_s >= (alarm_frame + 1) * SECONDS_PER_FRAME) {
400             while (this->render_window_ptr->pollEvent(this->event)) {
401                 // do nothing!
402             }
403
404             this->render_window_ptr->clear();
405
406             this->hex_map_ptr->draw();
407             this->context_menu_ptr->draw();
408             this->__draw();
409
410             if (alarm_frame % 20 == 0) {
411                 if (red_flag) {
412                     red_flag = false;
413                 }
414
415                 else {
416                     red_flag = true;
417                 }
418             }
419
420             if (red_flag) {
421                 insufficient_credits_text.setFillColor(MONOCHROME_TEXT_RED);
422             }
423
424             else {
425                 insufficient_credits_text.setFillColor(sf::Color(255, 255, 255));
426             }
427
428             this->render_window_ptr->draw(backing_rectangle);
429             this->render_window_ptr->draw(insufficient_credits_text);
430
431             this->render_window_ptr->display();
432
433             alarm_frame++;
434             this->frame++;
435         }
436     }
437 }
438
439 return;
440 } /* __insufficientCreditsAlarm( */

```

#### 4.3.3.7 \_\_processEvent()

```

void Game::__processEvent (
    void ) [private]

```

Helper method to process `Game`. To be called once per event.

```

138 {
139     if (this->event.type == sf::Event::Closed) {
140         this->quit_game = true;
141         this->game_loop_broken = true;
142     }
143
144     if (this->event.type == sf::Event::KeyPressed) {
145         this->__handleKeyPressEvents();
146     }
147
148     if (this->event.type == sf::Event::MouseButtonPressed) {
149         this->__handleMouseButtonEvents();
150     }
151
152     return;
153 } /* __processEvent() */

```

#### 4.3.3.8 \_\_processMessage()

```
void Game::__processMessage (
    void ) [private]
```

Helper method to process [Game](#). To be called once per message.

```
251 {
252     if (not this->message_hub.isEmpty(GAME_CHANNEL)) {
253         Message game_channel_message = this->message_hub.receiveMessage(GAME_CHANNEL);
254
255         if (game_channel_message.subject == "quit game") {
256             this->quit_game = true;
257             this->game_loop_broken = true;
258
259             std::cout << "Quit game message received by " << this << std::endl;
260             this->message_hub.popMessage(GAME_CHANNEL);
261         }
262
263         if (game_channel_message.subject == "restart game") {
264             this->game_loop_broken = true;
265
266             std::cout << "Restart game message received by " << this << std::endl;
267             this->message_hub.popMessage(GAME_CHANNEL);
268         }
269
270         if (game_channel_message.subject == "state request") {
271             std::cout << "Game state request message received by " << this << std::endl;
272
273             this->__sendGameStateMessage();
274             this->message_hub.popMessage(GAME_CHANNEL);
275         }
276
277         if (game_channel_message.subject == "credits spent") {
278             this->credits -= game_channel_message.int_payload["credits spent"];
279
280             std::cout << "Credits spent message ( " <<
281                 game_channel_message.int_payload["credits spent"] << " ) received by "
282                 << this << std::endl;
283
284             std::cout << "Current credits (Game): " << this->credits << " K" <<
285                 std::endl;
286
287             this->message_hub.popMessage(GAME_CHANNEL);
288         }
289
290         if (game_channel_message.subject == "insufficient credits") {
291             std::cout << "Insufficient credits message received by " << this <<
292                 std::endl;
293
294             this->__insufficientCreditsAlarm();
295
296             this->message_hub.popMessage(GAME_CHANNEL);
297         }
298
299         if (game_channel_message.subject == "update game phase") {
300             std::cout << "Update game phase message received by " << this << std::endl;
301
302             if (
303                 game_channel_message.string_payload["game phase"] == "system management"
304             ) {
305                 this->game_phase = GamePhase :: SYSTEM_MANAGEMENT;
306                 this->population = STARTING_POPULATION;
307                 this->turn++;
308             }
309
310             else if (
311                 game_channel_message.string_payload["game phase"] == "loss emissions"
312             ) {
313                 this->game_phase = GamePhase :: LOSS_EMISSIONS;
314             }
315
316             else if (
317                 game_channel_message.string_payload["game phase"] == "loss demand"
318             ) {
319                 this->game_phase = GamePhase :: LOSS_DEMAND;
320             }
321
322             else if (
323                 game_channel_message.string_payload["game phase"] == "loss credits"
324             ) {
325                 this->game_phase = GamePhase :: LOSS_CREDITS;
326             }
327
328             else if (
```

```

329         game_channel_message.string_payload["game phase"] == "victory"
330     ) {
331         this->game_phase = GamePhase :: VICTORY;
332     }
333
334     this->message_hub.popMessage(GAME_CHANNEL);
335 }
336 }
337
338 return;
339 } /* __processMessage() */

```

#### 4.3.3.9 \_\_sendGameStateMessage()

```

void Game::__sendGameStateMessage (
    void ) [private]

```

Helper method to format and send a game state message.

```

168 {
169     Message game_state_message;
170
171     game_state_message.channel = GAME_STATE_CHANNEL;
172     game_state_message.subject = "game state";
173
174     game_state_message.int_payload["year"] = this->year;
175     game_state_message.int_payload["month"] = this->month;
176     game_state_message.int_payload["population"] = this->population;
177     game_state_message.int_payload["credits"] = this->credits;
178     game_state_message.int_payload["demand_MWh"] = this->demand_MWh;
179     game_state_message.int_payload["cumulative_emissions_tonnes"] =
180         this->cumulative_emissions_tonnes;
181
182     switch (this->game_phase) {
183     case (GamePhase :: BUILD_SETTLEMENT): {
184         game_state_message.string_payload["game phase"] = "build settlement";
185         break;
186     }
187
188
189
190     case (GamePhase :: SYSTEM_MANAGEMENT): {
191         game_state_message.string_payload["game phase"] = "system management";
192         break;
193     }
194
195
196
197     case (GamePhase :: LOSS_EMISSIONS): {
198         game_state_message.string_payload["game phase"] = "loss emissions";
199         break;
200     }
201
202
203
204     case (GamePhase :: LOSS_DEMAND): {
205         game_state_message.string_payload["game phase"] = "loss demand";
206         break;
207     }
208
209
210
211     case (GamePhase :: LOSS_CREDITS): {
212         game_state_message.string_payload["game phase"] = "loss credits";
213         break;
214     }
215
216
217
218     case (GamePhase :: VICTORY): {
219         game_state_message.string_payload["game phase"] = "victory";
220         break;
221     }
222
223
224
225     default: {
226         // do nothing!
227

```

```

228         break;
229     }
230 }
231
232 this->message_hub.sendMessage(game_state_message);
233
234 std::cout << "Game state message sent by " << this << std::endl;
235 return;
236 } /* __sendGameStateMessage() */

```

#### 4.3.3.10 \_\_toggleFrameClockOverlay()

```

void Game::__toggleFrameClockOverlay (
    void ) [private]

```

Helper method to toggle frame clock overlay.

```

34 {
35     if (this->show_frame_clock_overlay) {
36         this->show_frame_clock_overlay = false;
37     }
38
39     else {
40         this->show_frame_clock_overlay = true;
41     }
42
43     return;
44 } /* __toggleFrameClockOverlay() */

```

#### 4.3.3.11 run()

```

bool Game::run (
    void )

```

Method to run game (defines game loop).

#### Returns

Boolean indicating whether to quit (true) or create a new [Game](#) instance (false).

```

731 {
732     // 1. play brand animation
733     //...
734
735     // 2. show splash screen
736     //...
737
738     // 3. start game loop
739     while (not this->game_loop_broken) {
740         this->time_since_start_s = this->clock.getElapsedTime().asSeconds();
741
742         if (this->time_since_start_s >= (this->frame + 1) * SECONDS_PER_FRAME) {
743             // 6.1. process events
744             while (this->render_window_ptr->pollEvent(this->event)) {
745                 this->hex_map_ptr->processEvent();
746                 this->context_menu_ptr->processEvent();
747                 this->__processEvent();
748             }
749
750             // 6.2. process messages
751             while (this->message_hub.hasTraffic()) {
752                 this->hex_map_ptr->processMessage();
753                 this->context_menu_ptr->processMessage();
754                 this->__processMessage();
755             }
756         }
757     }
758 }

```

```
759         // 6.3. draw frame
760         this->render_window_ptr->clear();
761
762         this->hex_map_ptr->draw();
763         this->context_menu_ptr->draw();
764         this->__draw();
765
766         this->render_window_ptr->display();
767
768
769         // 6.4. increment frame
770         this->frame++;
771     }
772 }
773
774 return this->quit_game;
775 } /* run() */
```

## 4.3.4 Member Data Documentation

### 4.3.4.1 assets\_manager\_ptr

`AssetsManager*` Game::assets\_manager\_ptr [private]

A pointer to the assets manager.

### 4.3.4.2 clock

`sf::Clock` Game::clock

The game clock.

### 4.3.4.3 context\_menu\_ptr

`ContextMenu*` Game::context\_menu\_ptr

Pointer to the context menu.

### 4.3.4.4 credits

`int` Game::credits

Current balance of credits.

#### 4.3.4.5 cumulative\_emissions\_tonnes

```
int Game::cumulative_emissions_tonnes
```

Cumulative emissions [tonnes] (1 tonne = 1000 kg).

#### 4.3.4.6 demand\_MWh

```
int Game::demand_MWh
```

Current energy demand [MWh].

#### 4.3.4.7 event

```
sf::Event Game::event
```

The game events class.

#### 4.3.4.8 frame

```
unsigned long long int Game::frame
```

The current frame of the game.

#### 4.3.4.9 game\_loop\_broken

```
bool Game::game_loop_broken
```

Boolean indicating whether or not the game loop is broken.

#### 4.3.4.10 game\_phase

```
GamePhase Game::game_phase
```

The current phase of the game.



#### 4.3.4.11 hex\_map\_ptr

```
HexMap* Game::hex_map_ptr
```

Pointer to the hex map (defines game world).

#### 4.3.4.12 message\_hub

```
MessageHub Game::message_hub
```

The message hub (for inter-object message traffic).

#### 4.3.4.13 month

```
int Game::month
```

Current game month.

#### 4.3.4.14 population

```
int Game::population
```

Current population.

#### 4.3.4.15 quit\_game

```
bool Game::quit_game
```

Boolean indicating whether to quit (true) or create a new [Game](#) instance (false).

#### 4.3.4.16 render\_window\_ptr

```
sf::RenderWindow* Game::render_window_ptr [private]
```

A pointer to the render window.

#### 4.3.4.17 show\_frame\_clock\_overlay

```
bool Game::show_frame_clock_overlay
```

Boolean indicating whether or not to show frame and clock overlay.

#### 4.3.4.18 time\_since\_start\_s

```
double Game::time_since_start_s
```

The time elapsed [s] since the start of the game.

#### 4.3.4.19 turn

```
int Game::turn = 0
```

The current game turn.

#### 4.3.4.20 year

```
int Game::year
```

Current game year.

The documentation for this class was generated from the following files:


- header/[Game.h](#)
- source/[Game.cpp](#)

## 4.4 HexMap Class Reference

A class which defines a hex map of hex tiles.

```
#include <HexMap.h>
```

Collaboration diagram for HexMap:

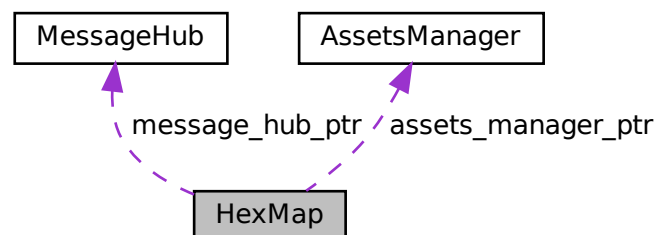

## Public Member Functions

- [HexMap](#) (int, sf::Event \*, sf::RenderWindow \*, [AssetsManager](#) \*, [MessageHub](#) \*)  
*Constructor (intended) for the [HexMap](#) class.*
- void [assess](#) (void)  
*Method to assess the resource of the selected tile.*
- void [reroll](#) (void)  
*Method to re-roll the hex map.*
- void [toggleResourceOverlay](#) (void)  
*Method to toggle the hex map resource overlay.*
- void [processEvent](#) (void)  
*Method to process [HexMap](#). To be called once per event.*
- void [processMessage](#) (void)  
*Method to process [HexMap](#). To be called once per message.*
- void [draw](#) (void)  
*Method to draw the hex map to the render window. To be called once per frame.*
- void [clear](#) (void)  
*Method to clear the hex map.*
- [~HexMap](#) (void)  
*Destructor for the [HexMap](#) class.*

## Public Attributes

- bool [show\\_resource](#)  
*A boolean which indicates whether or not to show resource value.*
- bool [tile\\_selected](#)  
*A boolean which indicates if a tile is currently selected.*
- int [n\\_layers](#)  
*The number of layers in the hex map.*
- int [n\\_tiles](#)  
*The number of tiles in the hex map.*
- int [frame](#)  
*The current frame of this object.*
- double [position\\_x](#)  
*The x position of the hex map's origin (i.e. central) tile.*
- double [position\\_y](#)  
*The y position of the hex map's origin (i.e. central) tile.*
- sf::RectangleShape [glass\\_screen](#)  
*To give the effect of an old glass screen over the hex map.*
- std::vector< double > [tile\\_position\\_x\\_vec](#)  
*A vector of tile x positions.*
- std::vector< double > [tile\\_position\\_y\\_vec](#)  
*A vector of tile y position.*
- std::vector< [HexTile](#) \* > [border\\_tiles\\_vec](#)  
*A vector of pointers to the border tiles.*
- std::map< double, std::map< double, [HexTile](#) \* > > [hex\\_map](#)  
*A position-indexed, nested map of hex tiles.*
- std::vector< [HexTile](#) \* > [hex\\_draw\\_order\\_vec](#)  
*A vector of hex tiles, in drawing order.*

## Private Member Functions

- void [\\_\\_setUpGlassScreen](#) (void)  
*Helper method to set up glass screen effect (drawable).*
- void [\\_\\_layTiles](#) (void)  
*Helper method to lay the hex tiles down to generate the game world.*
- void [\\_\\_buildDrawOrderVector](#) (void)  
*Helper method to build tile drawing order vector.*
- std::vector< double > [\\_\\_getNoise](#) (int, int=128)  
*Helper method to generate a vector of noise, with values mapped to the closed interval [0, 1]. Applies a random cosine series approach.*
- void [\\_\\_procedurallyGenerateTileTypes](#) (void)  
*Helper method to procedurally generate tile types and set tiles accordingly.*
- std::vector< double > [\\_\\_getValidMapIndexPositions](#) (double, double)  
*Helper method to translate given position into valid index position for a.*
- std::vector< [HexTile](#) \* > [\\_\\_getNeighboursVector](#) ([HexTile](#) \*)  
*Helper method to assemble a vector pointers to all neighbours of the given tile.*
- [TileType](#) [\\_\\_getMajorityTileType](#) ([HexTile](#) \*)  
*Function to return majority tile type of a tile and its neighbours. If no clear majority, simply returns the type of the given tile.*
- void [\\_\\_smoothTileTypes](#) (void)  
*Helper method to smooth tile types using a majority rules approach.*
- bool [\\_\\_isLakeTouchingOcean](#) ([HexTile](#) \*)
- void [\\_\\_enforceOceanContinuity](#) (void)  
*Helper method to scan tiles and enforce ocean continuity. That is to say, if a lake tile is found to be in contact with an ocean tile, then it becomes ocean.*
- void [\\_\\_procedurallyGenerateTileResources](#) (void)  
*Helper method to procedurally generate tile resources and set tiles accordingly.*
- void [\\_\\_assembleHexMap](#) (void)  
*Helper method to assemble the hex map.*
- [HexTile](#) \* [\\_\\_getSelectedTile](#) (void)  
*Helper method to get pointer to selected tile.*
- void [\\_\\_handleKeyPressEvents](#) (void)  
*Helper method to handle key press events.*
- void [\\_\\_handleMouseButtonEvents](#) (void)  
*Helper method to handle mouse button events.*
- void [\\_\\_sendNoTileSelectedMessage](#) (void)  
*Helper method to format and send message on no tile selected.*
- void [\\_\\_assessNeighbours](#) ([HexTile](#) \*)  
*Helper method to assess all neighbours of the given tile.*

## Private Attributes

- sf::Event \* [event\\_ptr](#)  
*A pointer to the event class.*
- sf::RenderWindow \* [render\\_window\\_ptr](#)  
*A pointer to the render window.*
- [AssetsManager](#) \* [assets\\_manager\\_ptr](#)  
*A pointer to the assets manager.*
- [MessageHub](#) \* [message\\_hub\\_ptr](#)  
*A pointer to the message hub.*

### 4.4.1 Detailed Description

A class which defines a hex map of hex tiles.

### 4.4.2 Constructor & Destructor Documentation

#### 4.4.2.1 HexMap()

```
HexMap::HexMap (
    int n_layers,
    sf::Event * event_ptr,
    sf::RenderWindow * render_window_ptr,
    AssetsManager * assets_manager_ptr,
    MessageHub * message_hub_ptr )
```

Constructor (intended) for the [HexMap](#) class.

##### Parameters

<i>n_layers</i>	The number of layers in the <a href="#">HexMap</a> .
<i>event_ptr</i>	Pointer to the event class.
<i>render_window_ptr</i>	Pointer to the render window.
<i>assets_manager_ptr</i>	Pointer to the assets manager.
<i>message_hub_ptr</i>	Pointer to the message hub.

```
1082 {
1083     // 1. set attributes
1084
1085     // 1.1. private
1086     this->event_ptr = event_ptr;
1087     this->render_window_ptr = render_window_ptr;
1088
1089     this->assets_manager_ptr = assets_manager_ptr;
1090     this->message_hub_ptr = message_hub_ptr;
1091
1092     // 1.2. public
1093     this->show_resource = false;
1094     this->tile_selected = false;
1095
1096     this->frame = 0;
1097
1098     this->n_layers = n_layers;
1099     if (this->n_layers < 0) {
1100         this->n_layers = 0;
1101     }
1102
1103     this->position_x = 400;
1104     this->position_y = 400;
1105
1106     // 2. assemble n layer hex map
1107     this->__assembleHexMap();
1108
1109     // 3. set up and position drawable attributes
1110     this->__setUpGlassScreen();
1111
1112     // 4. add message channel(s)
1113     this->message_hub_ptr->addChannel(TILE_SELECTED_CHANNEL);
1114     this->message_hub_ptr->addChannel(NO_TILE_SELECTED_CHANNEL);
1115     this->message_hub_ptr->addChannel(TILE_STATE_CHANNEL);
1116     this->message_hub_ptr->addChannel(HEX_MAP_CHANNEL);
1117
1118     std::cout << "HexMap constructed at " << this << std::endl;
1119 }
```

```

1120     return;
1121 }    /* HexMap(), intended */

```

#### 4.4.2.2 ~HexMap()

```

HexMap::~~HexMap (
    void )

```

Destructor for the [HexMap](#) class.

```

1395 {
1396     this->clear();
1397
1398     std::cout << "HexMap at " << this << " destroyed" << std::endl;
1399
1400     return;
1401 }    /* ~HexMap() */

```

### 4.4.3 Member Function Documentation

#### 4.4.3.1 \_\_assembleHexMap()

```

void HexMap::__assembleHexMap (
    void ) [private]

```

Helper method to assemble the hex map.

```

841 {
842     // 1. seed RNG (using milliseconds since 1 Jan 1970)
843     unsigned long long int milliseconds_since_epoch =
844         std::chrono::duration_cast<std::chrono::milliseconds>(
845             std::chrono::system_clock::now().time_since_epoch()
846         ).count();
847     srand(milliseconds_since_epoch);
848
849     // 2. lay tiles
850     this->__layTiles();
851     this->__buildDrawOrderVector();
852
853     // 3. procedurally generate types
854     this->__procedurallyGenerateTileTypes();
855
856     // 4. procedurally generate resources
857     this->__procedurallyGenerateTileResources();
858
859     return;
860 }    /* __assembleHexMap() */

```

#### 4.4.3.2 \_\_assessNeighbours()

```

void HexMap::__assessNeighbours (
    HexTile * hex_ptr ) [private]

```

Helper method to assess all neighbours of the given tile.

## Parameters

<i>Pointer</i>	to the tile whose neighbours are to be assessed.
----------------	--

```

1033 {
1034     std::vector<HexTile*> neighbours_vec = this->__getNeighboursVector(hex_ptr);
1035
1036     for (size_t i = 0; i < neighbours_vec.size(); i++) {
1037         neighbours_vec[i]->assess();
1038     }
1039
1040     return;
1041 } /* __assessNeighbours() */

```

## 4.4.3.3 \_\_buildDrawOrderVector()

```

void HexMap::__buildDrawOrderVector (
    void ) [private]

```

Helper method to build tile drawing order vector.

```

239 {
240     // 1. build temp list of tiles
241     std::list<HexTile*> temp_list;
242
243     std::map<double, std::map<double, HexTile*>::iterator hex_map_iter_x;
244     std::map<double, HexTile*>::iterator hex_map_iter_y;
245     for (
246         hex_map_iter_x = this->hex_map.begin();
247         hex_map_iter_x != this->hex_map.end();
248         hex_map_iter_x++
249     ) {
250         for (
251             hex_map_iter_y = hex_map_iter_x->second.begin();
252             hex_map_iter_y != hex_map_iter_x->second.end();
253             hex_map_iter_y++
254         ) {
255             temp_list.push_back(hex_map_iter_y->second);
256         }
257     }
258
259     // 2. move elements from temp list to drawing order vector
260     double min_position_y = 0;
261     std::list<HexTile*>::iterator list_iter;
262
263     while (not temp_list.empty()) {
264         // 2.1. determine min y position
265         min_position_y = std::numeric_limits<double>::infinity();
266
267         for (
268             list_iter = temp_list.begin();
269             list_iter != temp_list.end();
270             list_iter++
271         ) {
272             if ((*list_iter)->position_y < min_position_y) {
273                 min_position_y = (*list_iter)->position_y;
274             }
275         }
276
277         // 2.2 move min y list elements to drawing order vec
278         list_iter = temp_list.begin();
279         while (list_iter != temp_list.end()) {
280             if ((*list_iter)->position_y == min_position_y) {
281                 this->hex_draw_order_vec.push_back((*list_iter));
282                 list_iter = temp_list.erase(list_iter);
283             }
284
285             else {
286                 list_iter++;
287             }
288         }
289     }
290
291     return;
292 } /* __buildDrawOrderVector() */

```

#### 4.4.3.4 \_\_enforceOceanContinuity()

```
void HexMap::__enforceOceanContinuity (
    void ) [private]
```

Helper method to scan tiles and enforce ocean continuity. That is to say, if a lake tile is found to be in contact with an ocean tile, then it becomes ocean.

```
752 {
753     std::cout << "enforcing ocean continuity ..." << std::endl;
754
755     bool tile_changed = false;
756
757     // 1. scan tiles and enforce (where appropriate)
758     std::map<double, std::map<double, HexTile*>::iterator hex_map_iter_x;
759     std::map<double, HexTile*>::iterator hex_map_iter_y;
760     HexTile* hex_ptr;
761     for (
762         hex_map_iter_x = this->hex_map.begin();
763         hex_map_iter_x != this->hex_map.end();
764         hex_map_iter_x++
765     ) {
766         for (
767             hex_map_iter_y = hex_map_iter_x->second.begin();
768             hex_map_iter_y != hex_map_iter_x->second.end();
769             hex_map_iter_y++
770         ) {
771             hex_ptr = hex_map_iter_y->second;
772
773             if (this->__isLakeTouchingOcean(hex_ptr)) {
774                 hex_ptr->setTileType(TileType :: OCEAN);
775                 tile_changed = true;
776             }
777         }
778     }
779
780     if (tile_changed) {
781         this->__enforceOceanContinuity();
782     }
783     else {
784         return;
785     }
786 } /* __enforceOceanContinuity() */
```

#### 4.4.3.5 \_\_getMajorityTileType()

```
TileType HexMap::__getMajorityTileType (
    HexTile * hex_ptr ) [private]
```

Function to return majority tile type of a tile and its neighbours. If no clear majority, simply returns the type of the given tile.

##### Parameters

<i>hex_ptr</i>	Pointer to the given tile.
----------------	----------------------------

##### Returns

The majority tile type of the tile and its neighbours. If no clear majority type, then the type of the given tile is simply returned.

```
608 {
609     // 1. init type count map
610     std::map<TileType, int> type_count_map;
611     type_count_map[hex_ptr->tile_type] = 1;
612
613     // 2. survey neighbours, count type instances
```



```

614     std::vector<HexTile*> neighbours_vec = this->__getNeighboursVector(hex_ptr);
615
616     for (size_t i = 0; i < neighbours_vec.size(); i++) {
617         if (type_count_map.count(neighbours_vec[i]->tile_type) <= 0) {
618             type_count_map[neighbours_vec[i]->tile_type] = 1;
619         }
620         else {
621             type_count_map[neighbours_vec[i]->tile_type] += 1;
622         }
623     }
624
625     // 3. find majority tile type
626     int max_count = -1 * std::numeric_limits<int>::infinity();
627     TileType majority_tile_type = hex_ptr->tile_type;
628
629     std::map<TileType, int>::iterator map_iter;
630     for (
631         map_iter = type_count_map.begin();
632         map_iter != type_count_map.end();
633         map_iter++
634     ){
635         if (map_iter->second > max_count) {
636             max_count = map_iter->second;
637             majority_tile_type = map_iter->first;
638         }
639     }
640
641     // 4. detect ties
642     for (
643         map_iter = type_count_map.begin();
644         map_iter != type_count_map.end();
645         map_iter++
646     ){
647         if (
648             map_iter->second == max_count and
649             map_iter->first != majority_tile_type
650         ) {
651             majority_tile_type = hex_ptr->tile_type;
652             break;
653         }
654     }
655
656     return majority_tile_type;
657 } /* __getMajorityTileType() */

```

#### 4.4.3.6 \_\_getNeighboursVector()

```

std::vector< HexTile * > HexMap::__getNeighboursVector (
    HexTile * hex_ptr ) [private]

```

Helper method to assemble a vector pointers to all neighbours of the given tile.

##### Parameters

<i>hex_ptr</i>	A pointer to the given tile.
----------------	------------------------------

##### Returns

A vector of pointers to all neighbours of the given tile.

```

550 {
551     std::vector<HexTile*> neighbours_vec;
552
553     // 1. build potential neighbour positions
554     std::vector<double> potential_neighbour_x_vec(6, 0);
555     std::vector<double> potential_neighbour_y_vec(6, 0);
556
557     for (int i = 0; i < 6; i++) {
558         potential_neighbour_x_vec[i] = hex_ptr->position_x +
559             2 * hex_ptr->minor_radius * cos((60 * i) * (M_PI / 180));
560
561         potential_neighbour_y_vec[i] = hex_ptr->position_y +

```

```

562         2 * hex_ptr->minor_radius * sin((60 * i) * (M_PI / 180));
563     }
564
565     // 2. populate neighbours vector
566     std::vector<double> map_index_positions;
567     double potential_x = 0;
568     double potential_y = 0;
569
570     for (int i = 0; i < 6; i++) {
571         potential_x = potential_neighbour_x_vec[i];
572         potential_y = potential_neighbour_y_vec[i];
573
574         map_index_positions = this->__getValidMapIndexPositions(
575             potential_x,
576             potential_y
577         );
578
579         if (not (map_index_positions[0] == -1)) {
580             neighbours_vec.push_back(
581                 this->hex_map[map_index_positions[0]][map_index_positions[1]]
582             );
583         }
584     }
585
586     return neighbours_vec;
587 } /* __getNeighbourVector() */

```

#### 4.4.3.7 \_\_getNoise()

```

std::vector< double > HexMap::__getNoise (
    int n_elements,
    int n_components = 128 ) [private]

```

Helper method to generate a vector of noise, with values mapped to the closed interval [0, 1]. Applies a random cosine series approach.

##### Parameters

<i>n_elements</i>	The number of elements in the generated noise vector.
<i>n_components</i>	The number of components to use in the random cosine series. Defaults to 64.

##### Returns

A vector of noise, with values mapped to the closed interval [0, 1].

```

315 {
316     // 1. generate random amplitude, wave number, direction, and phase vectors
317     std::vector<double> random_amplitude_vec(n_components, 0);
318     std::vector<double> random_wave_number_vec(n_components, 0);
319     std::vector<double> random_frequency_vec(n_components, 0);
320     std::vector<double> random_direction_vec(n_components, 0);
321     std::vector<double> random_phase_vec(n_components, 0);
322
323     for (int i = 0; i < n_components; i++) {
324         random_amplitude_vec[i] = 10 * ((double)rand() / RAND_MAX);
325
326         random_wave_number_vec[i] = 2 * M_PI * ((double)rand() / RAND_MAX);
327
328         random_frequency_vec[i] = ((double)rand() / RAND_MAX);
329
330         random_direction_vec[i] = 2 * M_PI * ((double)rand() / RAND_MAX);
331
332         random_phase_vec[i] = 2 * M_PI * ((double)rand() / RAND_MAX);
333     }
334
335     // 2. generate noise vec
336     double amp = 0;
337     double wave_no = 0;
338     double freq = 0;
339     double dir = 0;

```

```

340     double phase = 0;
341
342     double x = 0;
343     double y = 0;
344     double t = time(NULL);
345
346     double max_noise = -1 * std::numeric_limits<double>::infinity();
347     double min_noise = std::numeric_limits<double>::infinity();
348
349     double noise = 0;
350     std::vector<double> noise_vec(n_elements, 0);
351
352     for (int i = 0; i < n_elements; i++) {
353         x = this->tile_position_x_vec[i] - this->position_x;
354         y = this->tile_position_y_vec[i] - this->position_y;
355
356         for (int j = 0; j < n_components; j++) {
357             amp = random_amplitude_vec[j];
358             wave_no = random_wave_number_vec[j];
359             freq = random_frequency_vec[j];
360             dir = random_direction_vec[j];
361             phase = random_phase_vec[j];
362
363             noise += (amp / (j + 1)) * cos(
364                 wave_no * (j + 1) * (x * sin(dir) + y * cos(dir)) +
365                 2 * M_PI * (j + 1) * freq * t +
366                 phase
367             );
368         }
369
370         noise_vec[i] = noise;
371
372         if (noise > max_noise) {
373             max_noise = noise;
374         }
375
376         else if (noise < min_noise) {
377             min_noise = noise;
378         }
379
380         noise = 0;
381     }
382
383     // 3. normalize noise vec
384     for (int i = 0; i < n_elements; i++) {
385         noise_vec[i] = (noise_vec[i] - min_noise) / (max_noise - min_noise);
386
387         if (noise_vec[i] < 0) {
388             noise_vec[i] = 0;
389         }
390         else if (noise_vec[i] > 1) {
391             noise_vec[i] = 1;
392         }
393     }
394
395     return noise_vec;
396 } /* __getNoise() */

```

#### 4.4.3.8 \_\_getSelectedTile()

```

HexTile * HexMap::__getSelectedTile (
    void ) [private]

```

Helper method to get pointer to selected tile.

#### Returns

Pointer to selected tile (or NULL if no tile selected).

```

877 {
878     HexTile* selected_tile_ptr = NULL;
879
880     bool break_flag = false;
881     std::map<double, std::map<double, HexTile*>::iterator hex_map_iter_x;
882     std::map<double, HexTile*>::iterator hex_map_iter_y;
883

```

```

884     for (
885         hex_map_iter_x = this->hex_map.begin();
886         hex_map_iter_x != this->hex_map.end();
887         hex_map_iter_x++
888     ) {
889         for (
890             hex_map_iter_y = hex_map_iter_x->second.begin();
891             hex_map_iter_y != hex_map_iter_x->second.end();
892             hex_map_iter_y++
893         ) {
894             if (hex_map_iter_y->second->is_selected) {
895                 selected_tile_ptr = hex_map_iter_y->second;
896                 break_flag = true;
897             }
898
899             if (break_flag) {
900                 break;
901             }
902         }
903
904         if (break_flag) {
905             break;
906         }
907     }
908
909     return selected_tile_ptr;
910 } /* __getSelectedTile() */

```

#### 4.4.3.9 \_\_getValidMapIndexPositions()

```

std::vector< double > HexMap::__getValidMapIndexPositions (
    double potential_x,
    double potential_y ) [private]

```

Helper method to translate given position into valid index position for a.

##### Parameters

<i>potential_x</i>	The potential x position of the tile.
<i>potential_y</i>	The potential y position of the tile.

##### Returns

A vector of positions, either valid for indexing into the hex map, or sentinel values (-1) if invalid.

```

496 {
497     std::vector<double> map_index_positions = {-1, -1};
498
499     std::map<double, std::map<double, HexTile*>::iterator hex_map_iter_x;
500     std::map<double, HexTile*>::iterator hex_map_iter_y;
501     HexTile* hex_ptr;
502
503     double distance = 0;
504
505     for (
506         hex_map_iter_x = this->hex_map.begin();
507         hex_map_iter_x != this->hex_map.end();
508         hex_map_iter_x++
509     ) {
510         for (
511             hex_map_iter_y = hex_map_iter_x->second.begin();
512             hex_map_iter_y != hex_map_iter_x->second.end();
513             hex_map_iter_y++
514         ) {
515             hex_ptr = hex_map_iter_y->second;
516
517             distance = sqrt(

```

```

518             pow(hex_ptr->position_x - potential_x, 2) +
519             pow(hex_ptr->position_y - potential_y, 2)
520         );
521
522         if (distance <= hex_ptr->minor_radius / 4) {
523             map_index_positions = {hex_ptr->position_x, hex_ptr->position_y};
524             return map_index_positions;
525         }
526     }
527 }
528
529 return map_index_positions;
530 } /* __isInHexMap() */

```

#### 4.4.3.10 \_\_handleKeyPressEvents()

```

void HexMap::__handleKeyPressEvents (
    void ) [private]

```

Helper method to handle key press events.

```

925 {
926     switch (this->event_ptr->key.code) {
927         case (sf::Keyboard::Escape): {
928             this->tile_selected = false;
929         }
930
931
932         default: {
933             // do nothing!
934
935             break;
936         }
937     }
938
939     return;
940 } /* __handleKeyPressEvents() */

```

#### 4.4.3.11 \_\_handleMouseButtonEvents()

```

void HexMap::__handleMouseButtonEvents (
    void ) [private]

```

Helper method to handle mouse button events.

```

955 {
956     switch (this->event_ptr->mouseButton.button) {
957         case (sf::Mouse::Left): {
958             HexTile* hex_ptr = this->__getSelectedTile();
959
960             if (hex_ptr != NULL) {
961                 this->tile_selected = true;
962             }
963
964             else if (this->tile_selected) {
965                 this->tile_selected = false;
966                 this->__sendNoTileSelectedMessage();
967             }
968
969             break;
970         }
971
972
973         case (sf::Mouse::Right): {
974             if (this->tile_selected) {
975                 this->tile_selected = false;
976                 this->__sendNoTileSelectedMessage();
977             }
978
979             break;
980         }
981     }
982 }

```

```

981
982
983         default: {
984             // do nothing!
985
986             break;
987         }
988     }
989
990     return;
991 } /* __handleMouseButtonEvents() */

```

#### 4.4.3.12 \_\_isLakeTouchingOcean()

```

bool HexMap::__isLakeTouchingOcean (
    HexTile * hex_ptr ) [private]
719 {
720     // 1. if not lake tile, return
721     if (not (hex_ptr->tile_type == TileType :: LAKE)) {
722         return false;
723     }
724
725     // 2. scan neighbours for ocean tiles
726     std::vector<HexTile*> neighbours_vec = this->__getNeighboursVector(hex_ptr);
727
728     for (size_t i = 0; i < neighbours_vec.size(); i++) {
729         if (neighbours_vec[i]->tile_type == TileType :: OCEAN) {
730             return true;
731         }
732     }
733
734     return false;
735 } /* __isLakeTouchingOcean() */

```

#### 4.4.3.13 \_\_layTiles()

```

void HexMap::__layTiles (
    void ) [private]

```

Helper method to lay the hex tiles down to generate the game world.

```

54 {
55     this->n_tiles = 0;
56
57     // 1. add origin tile
58     HexTile* hex_ptr = new HexTile(
59         this->position_x,
60         this->position_y,
61         this->event_ptr,
62         this->render_window_ptr,
63         this->assets_manager_ptr,
64         this->message_hub_ptr
65     );
66
67     this->hex_map[this->position_x][this->position_y] = hex_ptr;
68     this->tile_position_x_vec.push_back(this->position_x);
69     this->tile_position_y_vec.push_back(this->position_y);
70     this->n_tiles++;
71
72
73     // 2. fill out first row (reflect across origin tile)
74     for (int i = 0; i < this->n_layers; i++) {
75         hex_ptr = new HexTile(
76             this->position_x + 2 * (i + 1) * hex_ptr->minor_radius,
77             this->position_y,
78             this->event_ptr,
79             this->render_window_ptr,
80             this->assets_manager_ptr,
81             this->message_hub_ptr
82         );
83

```

```

84     this->hex_map[hex_ptr->position_x][hex_ptr->position_y] = hex_ptr;
85     this->tile_position_x_vec.push_back(hex_ptr->position_x);
86     this->tile_position_y_vec.push_back(hex_ptr->position_y);
87     this->n_tiles++;
88
89     if (i == this->n_layers - 1) {
90         this->border_tiles_vec.push_back(hex_ptr);
91     }
92
93     hex_ptr = new HexTile(
94         this->position_x - 2 * (i + 1) * hex_ptr->minor_radius,
95         this->position_y,
96         this->event_ptr,
97         this->render_window_ptr,
98         this->assets_manager_ptr,
99         this->message_hub_ptr
100    );
101
102    this->hex_map[hex_ptr->position_x][hex_ptr->position_y] = hex_ptr;
103    this->tile_position_x_vec.push_back(hex_ptr->position_x);
104    this->tile_position_y_vec.push_back(hex_ptr->position_y);
105    this->n_tiles++;
106
107    if (i == this->n_layers - 1) {
108        this->border_tiles_vec.push_back(hex_ptr);
109    }
110 }
111
112 // 3. fill out subsequent rows (reflect across first row)
113 HexTile* first_row_left_tile = hex_ptr;
114
115 int offset_count = 1;
116
117 double x_offset = 0;
118 double y_offset = 0;
119
120 for (
121     int row_width = 2 * this->n_layers;
122     row_width > this->n_layers;
123     row_width--
124 ) {
125     // 3.1. upper row
126     x_offset = first_row_left_tile->position_x +
127         2 * offset_count * first_row_left_tile->minor_radius *
128         cos(60 * (M_PI / 180));
129
130     y_offset = first_row_left_tile->position_y -
131         2 * offset_count * first_row_left_tile->minor_radius *
132         sin(60 * (M_PI / 180));
133
134     hex_ptr = new HexTile(
135         x_offset,
136         y_offset,
137         this->event_ptr,
138         this->render_window_ptr,
139         this->assets_manager_ptr,
140         this->message_hub_ptr
141     );
142
143     this->hex_map[hex_ptr->position_x][hex_ptr->position_y] = hex_ptr;
144     this->tile_position_x_vec.push_back(hex_ptr->position_x);
145     this->tile_position_y_vec.push_back(hex_ptr->position_y);
146     this->n_tiles++;
147
148     this->border_tiles_vec.push_back(hex_ptr);
149
150     for (int i = 1; i < row_width; i++) {
151         x_offset += 2 * first_row_left_tile->minor_radius;
152
153         hex_ptr = new HexTile(
154             x_offset,
155             y_offset,
156             this->event_ptr,
157             this->render_window_ptr,
158             this->assets_manager_ptr,
159             this->message_hub_ptr
160         );
161
162         this->hex_map[hex_ptr->position_x][hex_ptr->position_y] = hex_ptr;
163         this->tile_position_x_vec.push_back(hex_ptr->position_x);
164         this->tile_position_y_vec.push_back(hex_ptr->position_y);
165         this->n_tiles++;
166
167         if (row_width == this->n_layers + 1 or i == row_width - 1) {
168             this->border_tiles_vec.push_back(hex_ptr);
169         }
170     }

```

```

171     }
172
173     // 3.2. lower row
174     x_offset = first_row_left_tile->position_x +
175         2 * offset_count * first_row_left_tile->minor_radius *
176         cos(60 * (M_PI / 180));
177
178     y_offset = first_row_left_tile->position_y +
179         2 * offset_count * first_row_left_tile->minor_radius *
180         sin(60 * (M_PI / 180));
181
182     hex_ptr = new HexTile(
183         x_offset,
184         y_offset,
185         this->event_ptr,
186         this->render_window_ptr,
187         this->assets_manager_ptr,
188         this->message_hub_ptr
189     );
190
191     this->hex_map[hex_ptr->position_x][hex_ptr->position_y] = hex_ptr;
192     this->tile_position_x_vec.push_back(hex_ptr->position_x);
193     this->tile_position_y_vec.push_back(hex_ptr->position_y);
194     this->n_tiles++;
195
196     this->border_tiles_vec.push_back(hex_ptr);
197
198     for (int i = 1; i < row_width; i++) {
199         x_offset += 2 * first_row_left_tile->minor_radius;
200
201         hex_ptr = new HexTile(
202             x_offset,
203             y_offset,
204             this->event_ptr,
205             this->render_window_ptr,
206             this->assets_manager_ptr,
207             this->message_hub_ptr
208         );
209
210         this->hex_map[hex_ptr->position_x][hex_ptr->position_y] = hex_ptr;
211         this->tile_position_x_vec.push_back(hex_ptr->position_x);
212         this->tile_position_y_vec.push_back(hex_ptr->position_y);
213         this->n_tiles++;
214
215         if (row_width == this->n_layers + 1 or i == row_width - 1) {
216             this->border_tiles_vec.push_back(hex_ptr);
217         }
218     }
219
220     offset_count++;
221 }
222
223 return;
224 } /* __layTiles() */

```

#### 4.4.3.14 \_\_procedurallyGenerateTileResources()

```

void HexMap::__procedurallyGenerateTileResources (
    void ) [private]

```

Helper method to procedurally generate tile resources and set tiles accordingly.

```

801 {
802     // 1. get random cosine series noise vec
803     std::vector<double> noise_vec = this->__getNoise(this->n_tiles);
804
805     // 2. set tile resources based on random cosine series noise
806     int noise_idx = 0;
807
808     std::map<double, std::map<double, HexTile*>::iterator hex_map_iter_x;
809     std::map<double, HexTile*>::iterator hex_map_iter_y;
810     for (
811         hex_map_iter_x = this->hex_map.begin();
812         hex_map_iter_x != this->hex_map.end();
813         hex_map_iter_x++
814     ) {
815         for (
816             hex_map_iter_y = hex_map_iter_x->second.begin();
817             hex_map_iter_y != hex_map_iter_x->second.end();

```



```

818         hex_map_iter_y++
819     ) {
820         hex_map_iter_y->second->setTileResource(noise_vec[noise_idx]);
821         noise_idx++;
822     }
823 }
824
825 return;
826 } /* __procedurallyGenerateTileResources() */

```

#### 4.4.3.15 \_\_procedurallyGenerateTileTypes()

```

void HexMap::__procedurallyGenerateTileTypes (
    void ) [private]

```

Helper method to procedurally generate tile types and set tiles accordingly.

```

411 {
412     // 1. get random cosine series noise vec
413     std::vector<double> noise_vec = this->__getNoise(this->n_tiles);
414
415     // 2. set initial tile types based on either random cosine series noise or white
416     //     noise (decided by coin toss)
417     int noise_idx = 0;
418
419     std::map<double, std::map<double, HexTile*>::iterator hex_map_iter_x;
420     std::map<double, HexTile*>::iterator hex_map_iter_y;
421     for (
422         hex_map_iter_x = this->hex_map.begin();
423         hex_map_iter_x != this->hex_map.end();
424         hex_map_iter_x++
425     ) {
426         for (
427             hex_map_iter_y = hex_map_iter_x->second.begin();
428             hex_map_iter_y != hex_map_iter_x->second.end();
429             hex_map_iter_y++
430         ) {
431             if ((double)rand() / RAND_MAX > 0.5) {
432                 hex_map_iter_y->second->setTileType(noise_vec[noise_idx]);
433             }
434             else {
435                 hex_map_iter_y->second->setTileType((double)rand() / RAND_MAX);
436             }
437             noise_idx++;
438         }
439     }
440
441     // 3. smooth tile types (majority rules)
442     this->__smoothTileTypes();
443
444     // 4. set border tile type to ocean
445     for (size_t i = 0; i < this->border_tiles_vec.size(); i++) {
446         this->border_tiles_vec[i]->setTileType(TileType :: OCEAN);
447     }
448
449     // 5. enforce ocean continuity (i.e. all lake tiles touching ocean become ocean)
450     this->__enforceOceanContinuity();
451
452     // 6. decorate tiles
453     for (
454         hex_map_iter_x = this->hex_map.begin();
455         hex_map_iter_x != this->hex_map.end();
456         hex_map_iter_x++
457     ) {
458         for (
459             hex_map_iter_y = hex_map_iter_x->second.begin();
460             hex_map_iter_y != hex_map_iter_x->second.end();
461             hex_map_iter_y++
462         ) {
463             hex_map_iter_y->second->decorateTile();
464         }
465     }
466
467     return;
468 } /* __procedurallyGenerateTileTypes() */

```

#### 4.4.3.16 \_\_sendNoTileSelectedMessage()

```
void HexMap::__sendNoTileSelectedMessage (
    void ) [private]
```

Helper method to format and send message on no tile selected.

```
1006 {
1007     Message no_tile_selected_message;
1008
1009     no_tile_selected_message.channel = NO_TILE_SELECTED_CHANNEL;
1010     no_tile_selected_message.subject = "no tile selected";
1011
1012     this->message_hub_ptr->sendMessage(no_tile_selected_message);
1013
1014     std::cout << "No tile selected message sent by " << this << std::endl;
1015     return;
1016 } /* __sendNoTileSelectedMessage() */
```

#### 4.4.3.17 \_\_setUpGlassScreen()

```
void HexMap::__setUpGlassScreen (
    void ) [private]
```

Helper method to set up glass screen effect (drawable).

```
34 {
35     this->glass_screen.setSize(sf::Vector2f(GAME_WIDTH, GAME_HEIGHT));
36     this->glass_screen.setFillColor(sf::Color(MONOCROME_SCREEN_BACKGROUND));
37
38     return;
39 } /* __setUpGlassScreen() */
```

#### 4.4.3.18 \_\_smoothTileTypes()

```
void HexMap::__smoothTileTypes (
    void ) [private]
```

Helper method to smooth tile types using a majority rules approach.

```
672 {
673     std::cout << "smoothing ..." << std::endl;
674
675     std::map<double, std::map<double, HexTile*>::iterator hex_map_iter_x;
676     std::map<double, HexTile*>::iterator hex_map_iter_y;
677     HexTile* hex_ptr;
678     TileType majority_tile_type;
679
680     for (
681         hex_map_iter_x = this->hex_map.begin();
682         hex_map_iter_x != this->hex_map.end();
683         hex_map_iter_x++
684     ) {
685         for (
686             hex_map_iter_y = hex_map_iter_x->second.begin();
687             hex_map_iter_y != hex_map_iter_x->second.end();
688             hex_map_iter_y++
689         ) {
690             hex_ptr = hex_map_iter_y->second;
691             majority_tile_type = this->__getMajorityTileType(hex_ptr);
692
693             if (majority_tile_type != hex_ptr->tile_type) {
694                 hex_ptr->setTileType(majority_tile_type);
695             }
696         }
697     }
698
699     return;
700 } /* __smoothTileTypes() */
```

**4.4.3.19 assess()**

```
void HexMap::assess (
    void )
```

Method to assess the resource of the selected tile.

```
1136 {
1137     HexTile* selected_tile_ptr = this->__getSelectedTile();
1138     if (selected_tile_ptr != NULL) {
1139         selected_tile_ptr->assess();
1140     }
1141
1142     return;
1143 } /* assess() */
```

**4.4.3.20 clear()**

```
void HexMap::clear (
    void )
```

Method to clear the hex map.

```
1357 {
1358     std::map<double, std::map<double, HexTile*>::iterator hex_map_iter_x;
1359     std::map<double, HexTile*>::iterator hex_map_iter_y;
1360     for (
1361         hex_map_iter_x = this->hex_map.begin();
1362         hex_map_iter_x != this->hex_map.end();
1363         hex_map_iter_x++
1364     ) {
1365         for (
1366             hex_map_iter_y = hex_map_iter_x->second.begin();
1367             hex_map_iter_y != hex_map_iter_x->second.end();
1368             hex_map_iter_y++
1369         ) {
1370             delete hex_map_iter_y->second;
1371         }
1372     }
1373     this->hex_map.clear();
1374
1375     this->tile_position_x_vec.clear();
1376     this->tile_position_y_vec.clear();
1377     this->border_tiles_vec.clear();
1378
1379     return;
1380 } /* clear() */
```

**4.4.3.21 draw()**

```
void HexMap::draw (
    void )
```

Method to draw the hex map to the render window. To be called once per frame.

```
1314 {
1315     // 1. draw background
1316     sf::Color glass_screen_colour = this->glass_screen.getFillColor();
1317     glass_screen_colour.a = 255;
1318     this->glass_screen.setFillColor(glass_screen_colour);
1319
1320     this->render_window_ptr->draw(this->glass_screen);
1321
1322     // 2. draw tiles in drawing order
1323     for (size_t i = 0; i < this->hex_draw_order_vec.size(); i++) {
1324         this->hex_draw_order_vec[i]->draw();
1325     }
1326
1327     // 3. redraw selected tile
```

```

1328     HexTile* selected_tile_ptr = this->__getSelectedTile();
1329     if (selected_tile_ptr != NULL) {
1330         selected_tile_ptr->draw();
1331     }
1332
1333     // 4. draw glass screen
1334     glass_screen_colour = this->glass_screen.getFillColor();
1335     glass_screen_colour.a = 40;
1336     this->glass_screen.setFillColor(glass_screen_colour);
1337
1338     this->render_window_ptr->draw(this->glass_screen);
1339
1340     this->frame++;
1341     return;
1342 } /* draw() */

```

#### 4.4.3.22 processEvent()

```

void HexMap::processEvent (
    void )

```

Method to process [HexMap](#). To be called once per event.

```

1221 {
1222     // 1. process HexTile events
1223     std::map<double, std::map<double, HexTile*>::iterator hex_map_iter_x;
1224     std::map<double, HexTile*>::iterator hex_map_iter_y;
1225     for (
1226         hex_map_iter_x = this->hex_map.begin();
1227         hex_map_iter_x != this->hex_map.end();
1228         hex_map_iter_x++
1229     ) {
1230         for (
1231             hex_map_iter_y = hex_map_iter_x->second.begin();
1232             hex_map_iter_y != hex_map_iter_x->second.end();
1233             hex_map_iter_y++
1234         ) {
1235             hex_map_iter_y->second->processEvent();
1236         }
1237     }
1238
1239     // 2. process HexMap events
1240     if (this->event_ptr->type == sf::Event::KeyPressed) {
1241         this->__handleKeyPressEvents();
1242     }
1243
1244     if (this->event_ptr->type == sf::Event::MouseButtonPressed) {
1245         this->__handleMouseButtonEvents();
1246     }
1247
1248     return;
1249 } /* processEvent() */

```

#### 4.4.3.23 processMessage()

```

void HexMap::processMessage (
    void )

```

Method to process [HexMap](#). To be called once per message.

```

1264 {
1265     // 1. process HexTile messages
1266     std::map<double, std::map<double, HexTile*>::iterator hex_map_iter_x;
1267     std::map<double, HexTile*>::iterator hex_map_iter_y;
1268     for (
1269         hex_map_iter_x = this->hex_map.begin();
1270         hex_map_iter_x != this->hex_map.end();
1271         hex_map_iter_x++
1272     ) {
1273         for (
1274             hex_map_iter_y = hex_map_iter_x->second.begin();

```

```

1275         hex_map_iter_y != hex_map_iter_x->second.end();
1276         hex_map_iter_y++
1277     ) {
1278         hex_map_iter_y->second->processMessage();
1279     }
1280 }
1281
1282 // 2. process HexMap messages
1283 if (not this->message_hub_ptr->isEmpty(HEX_MAP_CHANNEL)) {
1284     Message hex_map_message = this->message_hub_ptr->receiveMessage(
1285         HEX_MAP_CHANNEL
1286     );
1287
1288     if (hex_map_message.subject == "assess neighbours") {
1289         HexTile* hex_ptr = this->__getSelectedTile();
1290         this->__assessNeighbours(hex_ptr);
1291
1292         std::cout << "Assess neighbours message received by " << this << std::endl;
1293         this->message_hub_ptr->popMessage(HEX_MAP_CHANNEL);
1294     }
1295 }
1296
1297 return;
1298 } /* processMessage() */

```

#### 4.4.3.24 reroll()

```

void HexMap::reroll (
    void )

```

Method to re-roll the hex map.

```

1158 {
1159     this->clear();
1160     this->__assembleHexMap();
1161
1162     return;
1163 } /* reroll() */

```

#### 4.4.3.25 toggleResourceOverlay()

```

void HexMap::toggleResourceOverlay (
    void )

```

Method to toggle the hex map resource overlay.

```

1178 {
1179     std::map<double, std::map<double, HexTile*>::iterator hex_map_iter_x;
1180     std::map<double, HexTile*>::iterator hex_map_iter_y;
1181     for (
1182         hex_map_iter_x = this->hex_map.begin();
1183         hex_map_iter_x != this->hex_map.end();
1184         hex_map_iter_x++
1185     ) {
1186         for (
1187             hex_map_iter_y = hex_map_iter_x->second.begin();
1188             hex_map_iter_y != hex_map_iter_x->second.end();
1189             hex_map_iter_y++
1190         ) {
1191             hex_map_iter_y->second->toggleResourceOverlay();
1192         }
1193     }
1194
1195     if (this->show_resource) {
1196         this->show_resource = false;
1197         this->assets_manager_ptr->getSound("resource overlay toggle off")->play();
1198     }
1199
1200     else {
1201         this->show_resource = true;
1202         this->assets_manager_ptr->getSound("resource overlay toggle on")->play();
1203     }
1204
1205     return;
1206 } /* toggleResourceOverlay() */

```

## 4.4.4 Member Data Documentation

### 4.4.4.1 assets\_manager\_ptr

```
AssetsManager* HexMap::assets_manager_ptr [private]
```

A pointer to the assets manager.

### 4.4.4.2 border\_tiles\_vec

```
std::vector<HexTile*> HexMap::border_tiles_vec
```

A vector of pointers to the border tiles.

### 4.4.4.3 event\_ptr

```
sf::Event* HexMap::event_ptr [private]
```

A pointer to the event class.

### 4.4.4.4 frame

```
int HexMap::frame
```

The current frame of this object.

### 4.4.4.5 glass\_screen

```
sf::RectangleShape HexMap::glass_screen
```

To give the effect of an old glass screen over the hex map.

#### 4.4.4.6 hex\_draw\_order\_vec

```
std::vector<HexTile*> HexMap::hex_draw_order_vec
```

A vector of hex tiles, in drawing order.

#### 4.4.4.7 hex\_map

```
std::map<double, std::map<double, HexTile*> > HexMap::hex_map
```

A position-indexed, nested map of hex tiles.

#### 4.4.4.8 message\_hub\_ptr

```
MessageHub* HexMap::message_hub_ptr [private]
```

A pointer to the message hub.

#### 4.4.4.9 n\_layers

```
int HexMap::n_layers
```

The number of layers in the hex map.

#### 4.4.4.10 n\_tiles

```
int HexMap::n_tiles
```

The number of tiles in the hex map.

#### 4.4.4.11 position\_x

```
double HexMap::position_x
```

The x position of the hex map's origin (i.e. central) tile.

#### 4.4.4.12 position\_y

```
double HexMap::position_y
```

The y position of the hex map's origin (i.e. central) tile.

#### 4.4.4.13 render\_window\_ptr

```
sf::RenderWindow* HexMap::render_window_ptr [private]
```

A pointer to the render window.

#### 4.4.4.14 show\_resource

```
bool HexMap::show_resource
```

A boolean which indicates whether or not to show resource value.

#### 4.4.4.15 tile\_position\_x\_vec

```
std::vector<double> HexMap::tile_position_x_vec
```

A vector of tile x positions.

#### 4.4.4.16 tile\_position\_y\_vec

```
std::vector<double> HexMap::tile_position_y_vec
```

A vector of tile y position.

#### 4.4.4.17 tile\_selected

```
bool HexMap::tile_selected
```

A boolean which indicates if a tile is currently selected.

The documentation for this class was generated from the following files:

- header/[HexMap.h](#)
- source/[HexMap.cpp](#)




## 4.5 HexTile Class Reference

A class which defines a hex tile of the hex map.

```
#include <HexTile.h>
```

Collaboration diagram for HexTile:

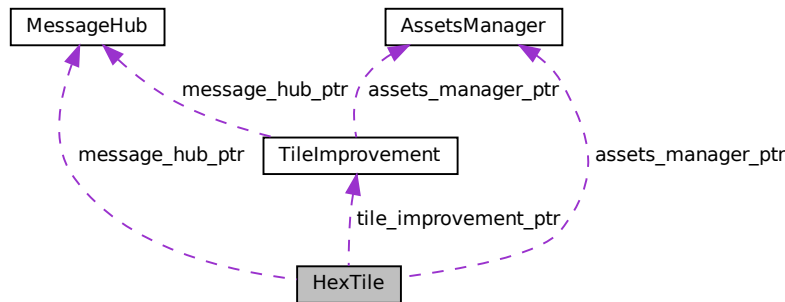

### Public Member Functions

- [HexTile](#) (double, double, sf::Event \*, sf::RenderWindow \*, [AssetsManager](#) \*, [MessageHub](#) \*)  
*Constructor for the [HexTile](#) class.*
- void [setTileType](#) ([TileType](#))  
*Method to set the tile type (by enum value).*
- void [setTileType](#) (double)  
*Method to set the tile type (by numeric input).*
- void [setTileResource](#) ([TileResource](#))  
*Method to set the tile resource (by enum value).*
- void [setTileResource](#) (double)  
*Method to set the tile resource (by numeric input).*
- void [decorateTile](#) (void)  
*Method to decorate tile.*
- void [toggleResourceOverlay](#) (void)  
*Method to toggle the tile resource overlay.*
- void [assess](#) (void)  
*Method to assess the tile's resource.*
- void [processEvent](#) (void)  
*Method to process [HexTile](#). To be called once per event.*
- void [processMessage](#) (void)  
*Method to process [HexTile](#). To be called once per message.*
- void [draw](#) (void)  
*Method to draw the hex tile to the render window. To be called once per frame.*
- [~HexTile](#) (void)  
*Destructor for the [HexTile](#) class.*

## Public Attributes

- [TileType](#) `tile_type`
- [TileResource](#) `tile_resource`
- `bool` `show_node`  
*A boolean which indicates whether or not to show the tile node.*
- `bool` `show_resource`  
*A boolean which indicates whether or not to show resource value.*
- `bool` `resource_assessed`  
*A boolean which indicates whether or not the resource has been assessed.*
- `bool` `resource_assessment`  
*A boolean which triggers a resource assessment notification.*
- `bool` `is_selected`  
*A boolean which indicates whether or not the tile is selected.*
- `bool` `decoration_cleared`  
*A boolean which indicates if the tile decoration has been cleared.*
- `bool` `has_improvement`  
*A boolean which indicates if tile has improvement or not.*
- [TileImprovement](#) \* `tile_improvement_ptr`  
*A pointer to the improvement for this tile.*
- `int` `frame`  
*The current frame of this object.*
- `int` `credits`  
*The current balance of credits.*
- `double` `position_x`  
*The x position of the tile.*
- `double` `position_y`  
*The y position of the tile.*
- `double` `major_radius`  
*The radius of the smallest bounding circle.*
- `double` `minor_radius`  
*The radius of the largest inscribed circle.*
- `std::string` `game_phase`  
*The current phase of the game.*
- `sf::CircleShape` `node_sprite`  
*A circle shape to mark the tile node.*
- `sf::ConvexShape` `tile_sprite`  
*A convex shape which represents the tile.*
- `sf::ConvexShape` `select_outline_sprite`  
*A convex shape which outlines the tile when selected.*
- `sf::CircleShape` `resource_chip_sprite`  
*A circle shape which represents a resource chip.*
- `sf::Text` `resource_text`  
*A text representation of the resource.*
- `sf::Sprite` `tile_decoration_sprite`  
*A tile decoration sprite.*
- `sf::Sprite` `magnifying_glass_sprite`  
*A magnifying glass sprite.*

## Private Member Functions

- void [\\_\\_setUpNodeSprite](#) (void)  
*Helper method to set up node sprite.*
- void [\\_\\_setUpTileSprite](#) (void)  
*Helper method to set up tile sprite.*
- void [\\_\\_setUpSelectOutlineSprite](#) (void)  
*Helper method to set up select outline sprite.*
- void [\\_\\_setUpResourceChipSprite](#) (void)  
*Helper method to set up resource chip sprite.*
- void [\\_\\_setResourceText](#) (void)  
*Helper method to set up resource text.*
- void [\\_\\_setUpMagnifyingGlassSprite](#) (void)  
*Helper method to set up and position magnifying glass sprite.*
- void [\\_\\_clearDecoration](#) (void)  
*Helper method to clear tile decoration.*
- bool [\\_\\_isClicked](#) (void)  
*Helper method to determine if tile was clicked on.*
- void [\\_\\_handleKeyPressEvents](#) (void)  
*Helper method to handle key press events.*
- void [\\_\\_handleMouseButtonEvents](#) (void)  
*Helper method to handle mouse button events.*
- void [\\_\\_sendTileSelectedMessage](#) (void)  
*Helper method to format and send message on tile selection.*
- std::string [\\_\\_getTileCoordsSubstring](#) (void)  
*Helper method to assemble and return tile coordinates substring.*
- std::string [\\_\\_getTileTypeSubstring](#) (void)  
*Helper method to assemble and return tile type substring.*
- std::string [\\_\\_getTileResourceSubstring](#) (void)  
*Helper method to assemble and return tile resource substring.*
- std::string [\\_\\_getTileImprovementSubstring](#) (void)  
*Helper method to assemble and return the tile improvement substring.*
- std::string [\\_\\_getTileOptionsSubstring](#) (void)  
*Helper method to assemble and return tile options substring.*
- void [\\_\\_sendTileStateMessage](#) (void)  
*Helper method to format and send tile state message.*
- void [\\_\\_sendAssessNeighboursMessage](#) (void)  
*Helper method to format and send assess neighbours message.*
- void [\\_\\_sendGameStateRequest](#) (void)  
*Helper method to format and send a game state request (message).*
- void [\\_\\_sendUpdateGamePhaseMessage](#) (std::string)  
*Helper method to format and send update game phase message.*
- void [\\_\\_sendCreditsSpentMessage](#) (int)  
*Helper method to format and send a credits spent message.*
- void [\\_\\_sendInsufficientCreditsMessage](#) (void)  
*Helper method to format and send an insufficient credits message.*

## Private Attributes

- `sf::Event * event_ptr`  
*A pointer to the event class.*
- `sf::RenderWindow * render_window_ptr`  
*A pointer to the render window.*
- `AssetsManager * assets_manager_ptr`  
*A pointer to the assets manager.*
- `MessageHub * message_hub_ptr`  
*A pointer to the message hub.*

### 4.5.1 Detailed Description

A class which defines a hex tile of the hex map.

### 4.5.2 Constructor & Destructor Documentation

#### 4.5.2.1 HexTile()

```
HexTile::HexTile (
    double position_x,
    double position_y,
    sf::Event * event_ptr,
    sf::RenderWindow * render_window_ptr,
    AssetsManager * assets_manager_ptr,
    MessageHub * message_hub_ptr )
```

Constructor for the [HexTile](#) class.

Ref: [Wikipedia \[2023\]](#)

#### Parameters

<i>position_x</i>	The x position of the tile.
<i>position_y</i>	The y position of the tile.
<i>event_ptr</i>	Pointer to the event class.
<i>render_window_ptr</i>	Pointer to the render window.
<i>assets_manager_ptr</i>	Pointer to the assets manager.
<i>message_hub_ptr</i>	Pointer to the message hub.

```
981 {
982     // 1. set attributes
983
984     // 1.1. private
985     this->event_ptr = event_ptr;
986     this->render_window_ptr = render_window_ptr;
987
988     this->assets_manager_ptr = assets_manager_ptr;
989     this->message_hub_ptr = message_hub_ptr;
990 }
```

```

991 // 1.2. public
992 this->show_node = false;
993 this->show_resource = false;
994 this->resource_assessed = false;
995 this->resource_assessment = false;
996 this->is_selected = false;
997
998 this->decoration_cleared = false;
999 this->has_improvement = false;
1000 this->tile_improvement_ptr = NULL;
1001
1002 this->frame = 0;
1003 this->credits = 0;
1004
1005 this->position_x = position_x;
1006 this->position_y = position_y;
1007
1008 this->major_radius = 32;
1009 this->minor_radius = (sqrt(3) / 2) * this->major_radius;
1010
1011 this->game_phase = "build settlement";
1012
1013 // 2. set up and position drawable attributes
1014 this->__setUpNodeSprite();
1015 this->__setUpTileSprite();
1016 this->__setUpSelectOutlineSprite();
1017 this->__setUpResourceChipSprite();
1018 this->__setResourceText();
1019 this->__setUpMagnifyingGlassSprite();
1020
1021 // 3. set tile type and resource (default to none type and average)
1022 this->setTileType(TileType :: NONE_TYPE);
1023 this->setTileResource(TileResource :: AVERAGE);
1024
1025 std::cout << "HexTile constructed at " << this << std::endl;
1026
1027 return;
1028 } /* HexTile() */

```

#### 4.5.2.2 ~HexTile()

```

HexTile::~HexTile (
    void )

```

Destructor for the [HexTile](#) class.

```

1523 {
1524     if (this->tile_improvement_ptr != NULL) {
1525         delete this->tile_improvement_ptr;
1526     }
1527
1528     std::cout << "HexTile at " << this << " destroyed" << std::endl;
1529
1530     return;
1531 } /* ~HexTile() */

```

### 4.5.3 Member Function Documentation

#### 4.5.3.1 \_\_clearDecoration()

```

void HexTile::__clearDecoration (
    void ) [private]

```

Helper method to clear tile decoration.

```

274 {
275     this->decoration_cleared = true;
276
277     return;
278 } /* __clearDecoration() */

```

#### 4.5.3.2 \_\_getTileCoordsSubstring()

```
std::string HexTile::__getTileCoordsSubstring (
    void ) [private]
```

Helper method to assemble and return tile coordinates substring.

##### Returns

Tile coordinates substring.

```
502 {
503     std::string coords_substring = "TILE COORDS: ";
504     coords_substring += std::to_string(int(this->position_x - 400));
505     coords_substring += ", ";
506     coords_substring += std::to_string(int(this->position_y - 400));
507     coords_substring += "\n";
508
509     return coords_substring;
510 } /* __getTileCoordsSubstring() */
```

#### 4.5.3.3 \_\_getTileImprovementSubstring()

```
std::string HexTile::__getTileImprovementSubstring (
    void ) [private]
```

Helper method to assemble and return the tile improvement substring.

##### Returns

Tile improvement substring.

```
661 {
662     std::string improvement_substring = "TILE IMPROVEMENT: ";
663
664     if (this->has_improvement) {
665         switch(this->tile_improvement_ptr->tile_improvement_type) {
666             case (TileImprovementType :: SETTLEMENT): {
667                 improvement_substring += "SETTLEMENT\n";
668
669                 break;
670             }
671
672             default: {
673                 improvement_substring += "???\n";
674
675                 break;
676             }
677         }
678     }
679
680     else {
681         improvement_substring += "NONE\n";
682     }
683
684     return improvement_substring;
685 } /* __getTileImprovementSubstring() */
```

#### 4.5.3.4 \_\_getTileOptionsSubstring()

```
std::string HexTile::__getTileOptionsSubstring (
    void ) [private]
```

Helper method to assemble and return tile options substring.

##### Returns

Tile options substring.

```
703 {
704     //          32 char x 17 line console "-----\n";
705     std::string options_substring = "      **** TILE OPTIONS **** \n";
706     options_substring += "      \n";
707
708     if (this->game_phase == "build settlement") {
709         if (
710             (this->tile_type != TileType :: OCEAN) and
711             (this->tile_type != TileType :: LAKE)
712         ) {
713             options_substring += "[B]:  BUILD SETTLEMENT (";
714             options_substring += std::to_string(BUILD_SETTLEMENT_COST);
715             options_substring += " K)";
716         }
717     }
718
719     else if (this->game_phase == "system management") {
720         if (this->has_improvement) {
721             //...
722         }
723
724         else if (not this->resource_assessed) {
725             options_substring += "[A]:  ASSESS RESOURCE (";
726             options_substring += std::to_string(RESOURCE_ASSESSMENT_COST);
727             options_substring += " K)\n";
728         }
729
730         else if (not this->decoration_cleared) {
731             //...
732         }
733
734         else {
735             //...
736         }
737
738         else if (this->game_phase == "victory") {
739             options_substring += "      **** VICTORY **** \n";
740         }
741
742         else {
743             options_substring += "      **** LOSS **** \n";
744         }
745     }
746     return options_substring;
747 } /* __getTileOptionsString() */
```

#### 4.5.3.5 \_\_getTileResourceSubstring()

```
std::string HexTile::__getTileResourceSubstring (
    void ) [private]
```

Helper method to assemble and return tile resource substring.

**Returns**

Tile resource substring.

```

591 {
592     std::string resource_substring = "TILE RESOURCE:      ";
593
594     if (this->resource_assessed) {
595         switch (this->tile_resource) {
596             case (TileResource :: POOR): {
597                 resource_substring += "POOR\n";
598
599                 break;
600             }
601
602             case (TileResource ::BELOW_AVERAGE): {
603                 resource_substring += "BELOW AVERAGE\n";
604
605                 break;
606             }
607
608             case (TileResource :: AVERAGE): {
609                 resource_substring += "AVERAGE\n";
610
611                 break;
612             }
613
614             case (TileResource :: ABOVE_AVERAGE): {
615                 resource_substring += "ABOVE AVERAGE\n";
616
617                 break;
618             }
619
620             case (TileResource :: GOOD): {
621                 resource_substring += "GOOD\n";
622
623                 break;
624             }
625
626             default: {
627                 resource_substring += "???\n";
628
629                 break;
630             }
631         }
632     }
633     else {
634         resource_substring += "???\n";
635     }
636     return resource_substring;
637 }
638
639 /* __getTileResourceSubstring() */

```

**4.5.3.6 \_\_getTileTypeSubstring()**

```

std::string HexTile::__getTileTypeSubstring (
    void ) [private]

```

Helper method to assemble and return tile type substring.

**Returns**

Tile type substring.

```

527 {
528     std::string type_substring = "TILE TYPE:      ";
529
530     switch (this->tile_type) {
531         case (TileType :: FOREST): {
532             type_substring += "FOREST\n";

```



```

533
534         break;
535     }
536
537
538     case (TileType :: LAKE): {
539         type_substring += "LAKE\n";
540
541         break;
542     }
543
544
545     case (TileType :: MOUNTAINS): {
546         type_substring += "MOUNTAINS\n";
547
548         break;
549     }
550
551
552     case (TileType :: OCEAN): {
553         type_substring += "OCEAN\n";
554
555         break;
556     }
557
558
559     case (TileType :: PLAINS): {
560         type_substring += "PLAINS\n";
561
562         break;
563     }
564
565
566     default: {
567         type_substring += "???\n";
568
569         break;
570     }
571 }
572
573 return type_substring;
574 } /* __getTileTypeSubstring() */

```

#### 4.5.3.7 \_\_handleKeyPressEvents()

```

void HexTile::__handleKeyPressEvents (
    void ) [private]

```

Helper method to handle key press events.

```

327 {
328     if (this->event_ptr->key.code == sf::Keyboard::Escape) {
329         this->is_selected = false;
330     }
331
332     if (not this->is_selected) {
333         return;
334     }
335
336
337     if (this->game_phase == "build settlement") {
338         if (
339             (this->tile_type != TileType :: OCEAN) and
340             (this->tile_type != TileType :: LAKE)
341         ) {
342             if (this->event_ptr->key.code == sf::Keyboard::B) {
343                 this->__clearDecoration();
344
345                 this->tile_improvement_ptr = new Settlement(
346                     this->position_x,
347                     this->position_y,
348                     this->event_ptr,
349                     this->render_window_ptr,
350                     this->assets_manager_ptr,
351                     this->message_hub_ptr
352                 );
353
354                 this->has_improvement = true;
355

```

```

356         this->assess();
357         this->__sendAssessNeighboursMessage();
358
359         this->__sendUpdateGamePhaseMessage("system management");
360         this->__sendCreditsSpentMessage(BUILD_SETTLEMENT_COST);
361         this->__sendTileStateMessage();
362         this->__sendGameStateRequest();
363     }
364 }
365 }
366
367
368 else if (this->game_phase == "system management") {
369     if (this->has_improvement) {
370         //...
371     }
372
373     else if (not this->resource_assessed) {
374         if (this->event_ptr->key.code == sf::Keyboard::A) {
375             if (this->resource_assessed) {
376                 std::cout << "Cannot assess resource: already assessed" <<
377                     std::endl;
378             }
379
380             else if (this->credits < RESOURCE_ASSESSMENT_COST) {
381                 std::cout << "Cannot assess resource: insufficient credits (need "
382                     << RESOURCE_ASSESSMENT_COST << " K)" << std::endl;
383
384                 this->__sendInsufficientCreditsMessage();
385             }
386
387             else {
388                 this->assess();
389                 this->__sendCreditsSpentMessage(RESOURCE_ASSESSMENT_COST);
390                 this->__sendTileStateMessage();
391                 this->__sendGameStateRequest();
392             }
393         }
394     }
395 }
396
397
398 else if (not this->decoration_cleared) {
399     //...
400 }
401
402
403 else {
404     //...
405 }
406 }
407
408 return;
409 } /* __handleKeyPressEvents() */

```

#### 4.5.3.8 \_\_handleMouseButtonEvents()

```

void HexTile::__handleMouseButtonEvents (
    void ) [private]

```

Helper method to handle mouse button events.

```

424 {
425     switch (this->event_ptr->mouseButton.button) {
426         case (sf::Mouse::Left): {
427             if (this->isClicked()) {
428                 std::cout << "Tile (" << this->position_x << ", " <<
429                     this->position_y << ") was selected" << std::endl;
430
431                 this->is_selected = true;
432
433                 this->__sendTileSelectedMessage();
434                 this->__sendTileStateMessage();
435                 this->__sendGameStateRequest();
436             }
437
438             else {
439                 this->is_selected = false;
440             }

```

```

441
442         break;
443     }
444
445
446     case (sf::Mouse::Right): {
447         this->is_selected = false;
448
449         break;
450     }
451
452
453     default: {
454         // do nothing!
455
456         break;
457     }
458 }
459
460 return;
461 } /* __handleMouseButtonEvents() */

```

#### 4.5.3.9 \_\_isClicked()

```

bool HexTile::__isClicked (
    void ) [private]

```

Helper method to determine if tile was clicked on.

##### Returns

Boolean indicating whether or not tile was clicked on.

```

295 {
296     sf::Vector2i mouse_position = sf::Mouse::getPosition(*render_window_ptr);
297
298     double mouse_x = mouse_position.x;
299     double mouse_y = mouse_position.y;
300
301     double distance = sqrt(
302         pow(this->position_x - mouse_x, 2) +
303         pow(this->position_y - mouse_y, 2)
304     );
305
306     if (distance < this->minor_radius) {
307         return true;
308     }
309     else {
310         return false;
311     }
312 } /* __isClicked() */

```

#### 4.5.3.10 \_\_sendAssessNeighboursMessage()

```

void HexTile::__sendAssessNeighboursMessage (
    void ) [private]

```

Helper method to format and send assess neighbours message.

```

812 {
813     Message assess_neighbours_message;
814
815     assess_neighbours_message.channel = HEX_MAP_CHANNEL;
816     assess_neighbours_message.subject = "assess neighbours";
817
818     this->message_hub_ptr->sendMessage(assess_neighbours_message);
819
820     std::cout << "Assess neighbours message sent by " << this << std::endl;
821
822     return;
823 } /* __sendAssessNeighboursMessage() */

```

#### 4.5.3.11 \_\_sendCreditsSpentMessage()

```
void HexTile::__sendCreditsSpentMessage (
    int credits_spent ) [private]
```

Helper method to format and send a credits spent message.

##### Parameters

<i>credits_spent</i>	The number of credits that were spent.
----------------------	--

```
895 {
896     Message credits_spent_message;
897
898     credits_spent_message.channel = GAME_CHANNEL;
899     credits_spent_message.subject = "credits spent";
900
901     credits_spent_message.int_payload["credits spent"] = credits_spent;
902
903     this->message_hub_ptr->sendMessage(credits_spent_message);
904
905     std::cout << "Credits spent (" << credits_spent << ") message sent by " << this
906         << std::endl;
907     return;
908 } /* __sendCreditsSpentMessage() */
```

#### 4.5.3.12 \_\_sendGameStateRequest()

```
void HexTile::__sendGameStateRequest (
    void ) [private]
```

Helper method to format and send a game state request (message).

```
838 {
839     Message game_state_request;
840
841     game_state_request.channel = GAME_CHANNEL;
842     game_state_request.subject = "state request";
843
844     this->message_hub_ptr->sendMessage(game_state_request);
845
846     std::cout << "Game state request message sent by " << this << std::endl;
847     return;
848 } /* __sendGameStateRequest() */
```

#### 4.5.3.13 \_\_sendInsufficientCreditsMessage()

```
void HexTile::__sendInsufficientCreditsMessage (
    void ) [private]
```

Helper method to format and send an insufficient credits message.

```
923 {
924     Message insufficient_credits_message;
925
926     insufficient_credits_message.channel = GAME_CHANNEL;
927     insufficient_credits_message.subject = "insufficient credits";
928
929     this->message_hub_ptr->sendMessage(insufficient_credits_message);
930
931     std::cout << "Insufficient credits message sent by " << this << std::endl;
932
933     return;
934 } /* __sendInsufficientCreditsMessage() */
```

**4.5.3.14 \_\_sendTileSelectedMessage()**

```
void HexTile::__sendTileSelectedMessage (
    void ) [private]
```

Helper method to format and send message on tile selection.

```
476 {
477     Message tile_selected_message;
478
479     tile_selected_message.channel = TILE_SELECTED_CHANNEL;
480     tile_selected_message.subject = "tile selected";
481
482     this->message_hub_ptr->sendMessage(tile_selected_message);
483
484     return;
485 } /* __sendTileSelectedMessage() */
```

**4.5.3.15 \_\_sendTileStateMessage()**

```
void HexTile::__sendTileStateMessage (
    void ) [private]
```

Helper method to format and send tile state message.

```
769 {
770     Message tile_state_message;
771
772     tile_state_message.channel = TILE_STATE_CHANNEL;
773     tile_state_message.subject = "tile state";
774
775
776     //          32 char x 17 line console "-----\n";
777     std::string console_string          = "      **** TILE INFO ****      \n";
778     console_string                     += "                                     \n";
779
780     console_string                     += this->__getTileCoordsSubstring();
781     console_string                     += "                                     \n";
782
783     console_string                     += this->__getTileTypeSubstring();
784     console_string                     += this->__getTileResourceSubstring();
785     console_string                     += this->__getTileImprovementSubstring();
786     console_string                     += "                                     \n";
787
788     console_string                     += this->__getTileOptionsSubstring();
789
790
791     tile_state_message.string_payload["console string"] = console_string;
792
793     this->message_hub_ptr->sendMessage(tile_state_message);
794
795     std::cout << "Tile state message sent by " << this << std::endl;
796     return;
797 } /* __sendTileStateMessage() */
```

**4.5.3.16 \_\_sendUpdateGamePhaseMessage()**

```
void HexTile::__sendUpdateGamePhaseMessage (
    std::string game_phase ) [private]
```

Helper method to format and send update game phase message.

**Parameters**

<i>game_phase</i>	The updated game phase.
-------------------	-------------------------

```

865 {
866     Message update_game_phase_message;
867
868     update_game_phase_message.channel = GAME_CHANNEL;
869     update_game_phase_message.subject = "update game phase";
870
871     update_game_phase_message.string_payload["game phase"] = game_phase;
872
873     this->message_hub_ptr->sendMessage(update_game_phase_message);
874
875     std::cout << "Update game phase message sent by " << this << std::endl;
876
877     return;
878 } /* __sendUpdateGamePhaseMessage() */

```

#### 4.5.3.17 \_\_setResourceText()

```

void HexTile::__setResourceText (
    void ) [private]

```

Helper method to set up resource text.

```

159 {
160     this->resource_text.setFont(*(assets_manager_ptr->getFont("DroidSansMono")));
161
162     this->resource_text.setFillColor(sf::Color(0, 0, 0, 255));
163
164     if (this->resource_assessed) {
165         switch (this->tile_resource) {
166             case (TileResource :: POOR): {
167                 this->resource_text.setString("-2");
168                 this->resource_text.setFillColor(MONOCROME_TEXT_RED);
169
170                 break;
171             }
172
173             case (TileResource :: BELOW_AVERAGE): {
174                 this->resource_text.setString("-1");
175                 this->resource_text.setFillColor(MONOCROME_TEXT_RED);
176
177                 break;
178             }
179
180             case (TileResource :: AVERAGE): {
181                 this->resource_text.setString("+0");
182
183                 break;
184             }
185
186             case (TileResource :: ABOVE_AVERAGE): {
187                 this->resource_text.setString("+1");
188                 this->resource_text.setFillColor(MONOCROME_TEXT_GREEN);
189
190                 break;
191             }
192
193             case (TileResource :: GOOD): {
194                 this->resource_text.setString("+2");
195                 this->resource_text.setFillColor(MONOCROME_TEXT_GREEN);
196
197                 break;
198             }
199
200             default: {
201                 this->resource_text.setString("");
202
203                 break;
204             }
205         }
206     }
207
208     else {
209         this->resource_text.setString("");
210     }
211
212     this->resource_text.setCharacterSize(20);
213
214     this->resource_text.setOrigin(
215         this->resource_text.getLocalBounds().width / 2,

```

```

216         this->resource_text.getLocalBounds().height / 2
217     );
218
219     this->resource_text.setPosition(
220         this->position_x,
221         this->position_y - 4
222     );
223
224     this->resource_text.setOutlineThickness(1);
225     this->resource_text.setOutlineColor(sf::Color(0, 0, 0, 255));
226
227     return;
228 } /* __setResourceText() */

```

#### 4.5.3.18 \_\_setUpMagnifyingGlassSprite()

```

void HexTile::__setUpMagnifyingGlassSprite (
    void ) [private]

```

Helper method to set up and position magnifying glass sprite.

```

243 {
244     this->magnifying_glass_sprite.setTexture(
245         *(this->assets_manager_ptr->getTexture("magnifying_glass_64x64_1"))
246     );
247
248     this->magnifying_glass_sprite.setOrigin(
249         this->magnifying_glass_sprite.getLocalBounds().width / 2,
250         this->magnifying_glass_sprite.getLocalBounds().height / 2
251     );
252
253     this->magnifying_glass_sprite.setPosition(
254         this->position_x,
255         this->position_y
256     );
257
258     return;
259 } /* __setUpMagnifyingGlassSprite() */

```

#### 4.5.3.19 \_\_setUpNodeSprite()

```

void HexTile::__setUpNodeSprite (
    void ) [private]

```

Helper method to set up node sprite.

```

34 {
35     this->node_sprite.setRadius(4);
36
37     this->node_sprite.setOrigin(
38         this->node_sprite.getLocalBounds().width / 2,
39         this->node_sprite.getLocalBounds().height / 2
40     );
41
42     this->node_sprite.setPosition(this->position_x, this->position_y);
43
44     this->node_sprite.setFillColor(sf::Color(255, 0, 0, 255));
45
46     return;
47 } /* __setUpNodeSprite() */

```

#### 4.5.3.20 \_\_setUpResourceChipSprite()

```
void HexTile::__setUpResourceChipSprite (
    void ) [private]
```

Helper method to set up resource chip sprite.

```
132 {
133     this->resource_chip_sprite.setRadius(2 * this->minor_radius / 3);
134
135     this->resource_chip_sprite.setOrigin(
136         this->resource_chip_sprite.getLocalBounds().width / 2,
137         this->resource_chip_sprite.getLocalBounds().height / 2
138     );
139
140     this->resource_chip_sprite.setPosition(this->position_x, this->position_y);
141
142     this->resource_chip_sprite.setFillColor(RESOURCE_CHIP_GREY);
143
144     return;
145 } /* __setUpResourceChip() */
```

#### 4.5.3.21 \_\_setUpSelectOutlineSprite()

```
void HexTile::__setUpSelectOutlineSprite (
    void ) [private]
```

Helper method to set up select outline sprite.

```
96 {
97     int n_points = 6;
98
99     this->select_outline_sprite.setPointCount(n_points);
100
101     for (int i = 0; i < n_points; i++) {
102         this->select_outline_sprite.setPoint(
103             i,
104             sf::Vector2f(
105                 this->position_x + this->major_radius * cos((30 + 60 * i) * (M_PI / 180)),
106                 this->position_y + this->major_radius * sin((30 + 60 * i) * (M_PI / 180))
107             )
108         );
109     }
110
111     this->select_outline_sprite.setOutlineThickness(4);
112     this->select_outline_sprite.setOutlineColor(MONOCHROME_TEXT_RED);
113
114     this->select_outline_sprite.setFillColor(sf::Color(0, 0, 0, 0));
115
116     return;
117 } /* __setUpSelectOutline() */
```

#### 4.5.3.22 \_\_setUpTileSprite()

```
void HexTile::__setUpTileSprite (
    void ) [private]
```

Helper method to set up tile sprite.

```
62 {
63     int n_points = 6;
64
65     this->tile_sprite.setPointCount(n_points);
66
67     for (int i = 0; i < n_points; i++) {
68         this->tile_sprite.setPoint(
69             i,
70             sf::Vector2f(
71                 this->position_x + this->major_radius * cos((30 + 60 * i) * (M_PI / 180)),
```



```

72         this->position_y + this->major_radius * sin((30 + 60 * i) * (M_PI / 180))
73     )
74     );
75 }
76
77 this->tile_sprite.setOutlineThickness(1);
78 this->tile_sprite.setOutlineColor(sf::Color(175, 175, 175, 255));
79
80 return;
81 } /* __setUpTileSprite() */

```

#### 4.5.3.23 assess()

```

void HexTile::assess (
    void )

```

Method to assess the tile's resource.

```

1347 {
1348     this->resource_assessed = true;
1349     this->resource_assessment = true;
1350
1351     this->assets_manager_ptr->getSound("resource assessment")->play();
1352
1353     this->__setResourceText();
1354     this->__sendTileStateMessage();
1355
1356     return;
1357 } /* assess() */

```

#### 4.5.3.24 decorateTile()

```

void HexTile::decorateTile (
    void )

```

Method to decorate tile.

```

1225 {
1226     switch (this->tile_type) {
1227         case (TileType :: FOREST): {
1228             this->tile_decoration_sprite.setTexture(
1229                 *(this->assets_manager_ptr->getTexture("pine_tree_64x64_1"))
1230             );
1231
1232             break;
1233         }
1234
1235         case (TileType :: LAKE): {
1236             this->tile_decoration_sprite.setTexture(
1237                 *(this->assets_manager_ptr->getTexture("water_shimmer_64x64_1"))
1238             );
1239
1240             break;
1241         }
1242
1243         case (TileType :: MOUNTAINS): {
1244             this->tile_decoration_sprite.setTexture(
1245                 *(this->assets_manager_ptr->getTexture("mountain_64x64_1"))
1246             );
1247
1248             break;
1249         }
1250
1251         case (TileType :: OCEAN): {
1252             this->tile_decoration_sprite.setTexture(
1253                 *(this->assets_manager_ptr->getTexture("water_waves_64x64_1"))
1254             );
1255
1256             break;
1257         }
1258     }

```

```

1259         case (TileType :: PLAINS): {
1260             this->tile_decoration_sprite.setTexture(
1261                 *(this->assets_manager_ptr->getTexture("wheat_64x64_1"))
1262             );
1263
1264             break;
1265         }
1266
1267         default: {
1268             // do nothing!
1269
1270             break;
1271         }
1272     }
1273
1274
1275     if (this->tile_type == TileType :: OCEAN or this->tile_type == TileType :: LAKE) {
1276         this->tile_decoration_sprite.setOrigin(
1277             this->tile_decoration_sprite.getLocalBounds().width / 2,
1278             this->tile_decoration_sprite.getLocalBounds().height / 2
1279         );
1280
1281         this->tile_decoration_sprite.setPosition(
1282             this->position_x,
1283             this->position_y
1284         );
1285
1286         if ((double)rand() / RAND_MAX > 0.5) {
1287             this->tile_decoration_sprite.setScale(sf::Vector2f(-1, 1));
1288         }
1289     }
1290
1291     else {
1292         this->tile_decoration_sprite.setOrigin(
1293             this->tile_decoration_sprite.getLocalBounds().width / 2,
1294             this->tile_decoration_sprite.getLocalBounds().height
1295         );
1296
1297         this->tile_decoration_sprite.setPosition(
1298             this->position_x,
1299             this->position_y + 12
1300         );
1301
1302         if ((double)rand() / RAND_MAX > 0.5) {
1303             this->tile_decoration_sprite.setScale(sf::Vector2f(-1, 1));
1304         }
1305     }
1306
1307     return;
1308 } /* decorateTile(void) */

```

#### 4.5.3.25 draw()

```

void HexTile::draw (
    void )

```

Method to draw the hex tile to the render window. To be called once per frame.

```

1452 {
1453     // 1. draw hex
1454     this->render_window_ptr->draw(this->tile_sprite);
1455
1456     // 2. draw node
1457     if (this->show_node) {
1458         this->render_window_ptr->draw(this->node_sprite);
1459     }
1460
1461     // 3. draw tile decoration
1462     if (not this->decoration_cleared) {
1463         this->render_window_ptr->draw(this->tile_decoration_sprite);
1464     }
1465
1466     // 4. draw tile improvement
1467     if (this->has_improvement) {
1468         this->tile_improvement_ptr->draw();
1469     }
1470
1471     // 5. draw resource
1472     if (this->show_resource) {

```

```

1473         this->render_window_ptr->draw(this->resource_chip_sprite);
1474         this->render_window_ptr->draw(this->resource_text);
1475     }
1476
1477     // 6. draw selection outline
1478     if (this->is_selected) {
1479         sf::Color outline_colour = this->select_outline_sprite.getOutlineColor();
1480
1481         outline_colour.a =
1482             255 * pow(cos((M_PI * this->frame) / (1.5 * FRAMES_PER_SECOND)), 2);
1483
1484         this->select_outline_sprite.setOutlineColor(outline_colour);
1485
1486         this->render_window_ptr->draw(this->select_outline_sprite);
1487     }
1488
1489     // 7. draw resource assessment notification
1490     if (this->resource_assessment) {
1491         int alpha = this->magnifying_glass_sprite.getColor().a;
1492
1493         alpha -= 3;
1494         if (alpha < 0) {
1495             alpha = 0;
1496             this->resource_assessment = false;
1497         }
1498
1499         this->magnifying_glass_sprite.setColor(
1500             sf::Color(255, 255, 255, alpha)
1501         );
1502
1503         this->render_window_ptr->draw(this->magnifying_glass_sprite);
1504     }
1505
1506     this->frame++;
1507     return;
1508 } /* draw() */

```

#### 4.5.3.26 processEvent()

```

void HexTile::processEvent (
    void )

```

Method to process [HexTile](#). To be called once per event.

```

1372 {
1373     // 1. process TileImprovement events
1374     if (this->tile_improvement_ptr != NULL) {
1375         this->tile_improvement_ptr->processEvent();
1376     }
1377
1378     // 2. process HexTile events
1379     if (this->event_ptr->type == sf::Event::KeyPressed) {
1380         this->__handleKeyPressEvents();
1381     }
1382
1383     if (this->event_ptr->type == sf::Event::MouseButtonPressed) {
1384         this->__handleMouseButtonEvents();
1385     }
1386
1387     return;
1388 } /* processEvent() */

```

#### 4.5.3.27 processMessage()

```

void HexTile::processMessage (
    void )

```

Method to process [HexTile](#). To be called once per message.

```

1403 {
1404     // 1. process TileImprovement messages

```

```

1405     if (this->tile_improvement_ptr != NULL) {
1406         this->tile_improvement_ptr->processMessage();
1407     }
1408
1409     // 2. process HexTile messages
1410     if (this->is_selected) {
1411         if (not this->message_hub_ptr->isEmpty(GAME_STATE_CHANNEL)) {
1412             Message game_state_message = this->message_hub_ptr->receiveMessage(
1413                 GAME_STATE_CHANNEL
1414             );
1415
1416             if (game_state_message.subject == "game state") {
1417                 this->credits = game_state_message.int_payload["credits"];
1418                 this->game_phase = game_state_message.string_payload["game phase"];
1419
1420                 if (this->tile_improvement_ptr != NULL) {
1421                     this->tile_improvement_ptr->credits = this->credits;
1422                     this->tile_improvement_ptr->game_phase = this->game_phase;
1423                 }
1424
1425                 std::cout << "Game state message received by " << this << std::endl;
1426                 this->__sendTileStateMessage();
1427                 this->message_hub_ptr->popMessage(GAME_STATE_CHANNEL);
1428             }
1429         }
1430
1431         std::cout << "Current credits (HexTile): " << this->credits << " K" <<
1432             std::endl;
1433     }
1434
1435     return;
1436 } /* processMessage() */

```

#### 4.5.3.28 setTileResource() [1/2]

```

void HexTile::setTileResource (
    double input_value )

```

Method to set the tile resource (by numeric input).

##### Parameters

<i>input_value</i>	A numerical input in the closed interval [0, 1].
--------------------	--

```

1174 {
1175     // 1. check input
1176     if (input_value < 0 or input_value > 1) {
1177         std::string error_str = "ERROR HexTile::setTileResource() given input value is ";
1178         error_str += "not in the closed interval [0, 1]";
1179
1180         #ifdef _WIN32
1181             std::cout << error_str << std::endl;
1182         #endif /* _WIN32 */
1183
1184         throw std::runtime_error(error_str);
1185     }
1186
1187     // 2. convert input value to tile resource
1188     TileResource tile_resource;
1189
1190     if (input_value <= TILE_RESOURCE_CUMULATIVE_PROBABILITIES[0]) {
1191         tile_resource = TileResource :: POOR;
1192     }
1193     else if (input_value <= TILE_RESOURCE_CUMULATIVE_PROBABILITIES[1]) {
1194         tile_resource = TileResource :: BELOW_AVERAGE;
1195     }
1196     else if (input_value <= TILE_RESOURCE_CUMULATIVE_PROBABILITIES[2]) {
1197         tile_resource = TileResource :: AVERAGE;
1198     }
1199     else if (input_value <= TILE_RESOURCE_CUMULATIVE_PROBABILITIES[3]) {
1200         tile_resource = TileResource :: ABOVE_AVERAGE;
1201     }
1202     else {
1203         tile_resource = TileResource :: GOOD;
1204     }

```

```

1205
1206 // 3. call alternate method
1207 this->setTileResource(tile_resource);
1208
1209 return;
1210 } /* setTileResource(double) */

```

#### 4.5.3.29 setTileResource() [2/2]

```

void HexTile::setTileResource (
    TileResource tile_resource )

```

Method to set the tile resource (by enum value).

##### Parameters

<i>tile_resource</i>	The resource (TileResource) value to attribute to the tile.
----------------------	---

```

1152 {
1153     this->tile_resource = tile_resource;
1154     this->__setResourceText();
1155
1156     return;
1157 } /* setTileResource(TileResource) */

```

#### 4.5.3.30 setTileType() [1/2]

```

void HexTile::setTileType (
    double input_value )

```

Method to set the tile type (by numeric input).

##### Parameters

<i>input_value</i>	A numerical input in the closed interval [0, 1].
--------------------	--

```

1102 {
1103     // 1. check input
1104     if (input_value < 0 or input_value > 1) {
1105         std::string error_str = "ERROR HexTile::setTileType() given input value is ";
1106         error_str += "not in the closed interval [0, 1]";
1107
1108         #ifdef _WIN32
1109             std::cout << error_str << std::endl;
1110         #endif /* _WIN32 */
1111
1112         throw std::runtime_error(error_str);
1113     }
1114
1115     // 2. convert input value to tile type
1116     TileType tile_type;
1117
1118     if (input_value <= TILE_TYPE_CUMULATIVE_PROBABILITIES[0]) {
1119         tile_type = TileType :: LAKE;
1120     }
1121     else if (input_value <= TILE_TYPE_CUMULATIVE_PROBABILITIES[1]) {
1122         tile_type = TileType :: PLAINS;
1123     }
1124     else if (input_value <= TILE_TYPE_CUMULATIVE_PROBABILITIES[2]) {
1125         tile_type = TileType :: FOREST;
1126     }
1127     else {

```

```

1128         tile_type = TileType :: MOUNTAINS;
1129     }
1130
1131     // 3. call alternate method
1132     this->setTileType(tile_type);
1133
1134     return;
1135 } /* setTileType(double) */

```

#### 4.5.3.31 setTileType() [2/2]

```

void HexTile::setTileType (
    TileType tile_type )

```

Method to set the tile type (by enum value).

##### Parameters

<i>tile_type</i>	The type (TileType) to set the tile to.
------------------	---

```

1043 {
1044     this->tile_type = tile_type;
1045
1046     switch (this->tile_type) {
1047         case (TileType :: FOREST): {
1048             this->tile_sprite.setFillColor(FOREST_GREEN);
1049
1050             break;
1051         }
1052
1053         case (TileType :: LAKE): {
1054             this->tile_sprite.setFillColor(LAKE_BLUE);
1055
1056             break;
1057         }
1058
1059         case (TileType :: MOUNTAINS): {
1060             this->tile_sprite.setFillColor(MOUNTAINS_GREY);
1061
1062             break;
1063         }
1064
1065         case (TileType :: OCEAN): {
1066             this->tile_sprite.setFillColor(OCEAN_BLUE);
1067
1068             break;
1069         }
1070
1071         case (TileType :: PLAINS): {
1072             this->tile_sprite.setFillColor(PLAINS_YELLOW);
1073
1074             break;
1075         }
1076
1077         default: {
1078             // do nothing!
1079
1080             break;
1081         }
1082     }
1083
1084     return;
1085 } /* setTileType(TileType) */

```

#### 4.5.3.32 toggleResourceOverlay()

```

void HexTile::toggleResourceOverlay (
    void )

```

Method to toggle the tile resource overlay.

```
1323 {  
1324     if (this->show_resource) {  
1325         this->show_resource = false;  
1326     }  
1327     else {  
1328         this->show_resource = true;  
1329     }  
1330  
1331     return;  
1332 } /* toggleResourceOverlay() */
```

## 4.5.4 Member Data Documentation

### 4.5.4.1 assets\_manager\_ptr

```
AssetsManager* HexTile::assets_manager_ptr [private]
```

A pointer to the assets manager.

### 4.5.4.2 credits

```
int HexTile::credits
```

The current balance of credits.

### 4.5.4.3 decoration\_cleared

```
bool HexTile::decoration_cleared
```

A boolean which indicates if the tile decoration has been cleared.

### 4.5.4.4 event\_ptr

```
sf::Event* HexTile::event_ptr [private]
```

A pointer to the event class.

#### 4.5.4.5 frame

```
int HexTile::frame
```

The current frame of this object.

#### 4.5.4.6 game\_phase

```
std::string HexTile::game_phase
```

The current phase of the game.

#### 4.5.4.7 has\_improvement

```
bool HexTile::has_improvement
```

A boolean which indicates if tile has improvement or not.

#### 4.5.4.8 is\_selected

```
bool HexTile::is_selected
```

A boolean which indicates whether or not the tile is selected.

#### 4.5.4.9 magnifying\_glass\_sprite

```
sf::Sprite HexTile::magnifying_glass_sprite
```

A magnifying glass sprite.

#### 4.5.4.10 major\_radius

```
double HexTile::major_radius
```

The radius of the smallest bounding circle.



#### 4.5.4.11 message\_hub\_ptr

```
MessageHub* HexTile::message_hub_ptr [private]
```

A pointer to the message hub.

#### 4.5.4.12 minor\_radius

```
double HexTile::minor_radius
```

The radius of the largest inscribed circle.

#### 4.5.4.13 node\_sprite

```
sf::CircleShape HexTile::node_sprite
```

A circle shape to mark the tile node.

#### 4.5.4.14 position\_x

```
double HexTile::position_x
```

The x position of the tile.

#### 4.5.4.15 position\_y

```
double HexTile::position_y
```

The y position of the tile.

#### 4.5.4.16 render\_window\_ptr

```
sf::RenderWindow* HexTile::render_window_ptr [private]
```

A pointer to the render window.

#### 4.5.4.17 resource\_assessed

```
bool HexTile::resource_assessed
```

A boolean which indicates whether or not the resource has been assessed.

#### 4.5.4.18 resource\_assessment

```
bool HexTile::resource_assessment
```

A boolean which triggers a resource assessment notification.

#### 4.5.4.19 resource\_chip\_sprite

```
sf::CircleShape HexTile::resource_chip_sprite
```

A circle shape which represents a resource chip.

#### 4.5.4.20 resource\_text

```
sf::Text HexTile::resource_text
```

A text representation of the resource.

#### 4.5.4.21 select\_outline\_sprite

```
sf::ConvexShape HexTile::select_outline_sprite
```

A convex shape which outlines the tile when selected.

#### 4.5.4.22 show\_node

```
bool HexTile::show_node
```

A boolean which indicates whether or not to show the tile node.

#### 4.5.4.23 show\_resource

```
bool HexTile::show_resource
```

A boolean which indicates whether or not to show resource value.

#### 4.5.4.24 tile\_decoration\_sprite

```
sf::Sprite HexTile::tile_decoration_sprite
```

A tile decoration sprite.

#### 4.5.4.25 tile\_improvement\_ptr

```
TileImprovement* HexTile::tile_improvement_ptr
```

A pointer to the improvement for this tile.

#### 4.5.4.26 tile\_resource

```
TileResource HexTile::tile_resource
```

#### 4.5.4.27 tile\_sprite

```
sf::ConvexShape HexTile::tile_sprite
```

A convex shape which represents the tile.

#### 4.5.4.28 tile\_type

```
TileType HexTile::tile_type
```

The documentation for this class was generated from the following files:

- header/[HexTile.h](#)
- source/[HexTile.cpp](#)

## 4.6 Message Struct Reference

A structure which defines a standard message format.

```
#include <MessageHub.h>
```

### Public Attributes

- `std::string channel = ""`  
*A string identifying the appropriate channel for this message.*
- `std::string subject = ""`  
*A string describing the message subject.*
- `std::map< std::string, bool > bool_payload = {}`  
*A boolean payload.*
- `std::map< std::string, int > int_payload = {}`  
*A vector payload.*
- `std::map< std::string, double > double_payload = {}`  
*A vector payload.*
- `std::map< std::string, std::string > string_payload = {}`  
*A string payload.*

### 4.6.1 Detailed Description

A structure which defines a standard message format.

### 4.6.2 Member Data Documentation

#### 4.6.2.1 bool\_payload

```
std::map<std::string, bool> Message::bool_payload = {}
```

A boolean payload.

#### 4.6.2.2 channel

```
std::string Message::channel = ""
```

A string identifying the appropriate channel for this message.

#### 4.6.2.3 double\_payload

```
std::map<std::string, double> Message::double_payload = {}
```

A vector payload.

#### 4.6.2.4 int\_payload

```
std::map<std::string, int> Message::int_payload = {}
```

A vector payload.

#### 4.6.2.5 string\_payload

```
std::map<std::string, std::string> Message::string_payload = {}
```

A string payload.

#### 4.6.2.6 subject

```
std::string Message::subject = ""
```

A string describing the message subject.

The documentation for this struct was generated from the following file:

- header/ESC\_core/[MessageHub.h](#)

## 4.7 MessageHub Class Reference

A class which acts as a central hub for inter-object message traffic.

```
#include <MessageHub.h>
```

## Public Member Functions

- [MessageHub](#) (void)  
*Constructor for the [MessageHub](#) class.*
- bool [hasTraffic](#) (void)  
*Method to determine if there remains any message traffic.*
- void [addChannel](#) (std::string)  
*Method to add channel to message map.*
- void [removeChannel](#) (std::string)  
*Method to remove channel from message map.*
- void [sendMessage](#) ([Message](#))  
*Method to send a message to the message map. Channels are implemented in a first in, first out manner (i.e. message queue).*
- bool [isEmpty](#) (std::string)  
*Method to check if channel is empty.*
- [Message](#) [receiveMessage](#) (std::string)  
*Method to receive the first message in the channel. Channels are implemented in a first in, first out manner (i.e. message queue).*
- void [popMessage](#) (std::string)  
*Method to pop first message off of the given channel. Channels are implemented in a first in, first out manner (i.e. message queue).*
- void [clearMessages](#) (void)  
*Method to clear messages from the [MessageHub](#).*
- void [clear](#) (void)  
*Method to clear the [MessageHub](#).*
- [~MessageHub](#) (void)  
*Destructor for the [MessageHub](#) class.*

## Private Attributes

- std::map< std::string, std::list< [Message](#) > > [message\\_map](#)  
*A map <string, list of [Message](#)> for sending and receiving messages. Here the key is the channel, and each channel maintains a list (history) of messages.*

### 4.7.1 Detailed Description

A class which acts as a central hub for inter-object message traffic.

### 4.7.2 Constructor & Destructor Documentation

#### 4.7.2.1 MessageHub()

```
MessageHub::MessageHub (
    void )
```

Constructor for the [MessageHub](#) class.

```
46 {
47     //...
48
49     std::cout << "MessageHub constructed at " << this << std::endl;
50
51     return;
52 } /* MessageHub() */
```

### 4.7.2.2 ~MessageHub()

```
MessageHub::~MessageHub (
    void )
```

Destructor for the [MessageHub](#) class.

```
393 {
394     this->clear();
395
396     std::cout << "MessageHub at " << this << " destroyed" << std::endl;
397
398     return;
399 } /* ~MessageHub() */
```

## 4.7.3 Member Function Documentation

### 4.7.3.1 addChannel()

```
void MessageHub::addChannel (
    std::string channel )
```

Method to add channel to message map.

#### Parameters

<i>channel</i>	The key for the message channel being added.
----------------	--

```
97 {
98     // 1. check if channel is in map (if so, throw error)
99     if (this->message_map.count(channel) > 0) {
100         std::string error_str = "ERROR MessageHub::addChannel() channel ";
101         error_str += channel;
102         error_str += " is already in message map";
103
104         #ifdef _WIN32
105             std::cout << error_str << std::endl;
106         #endif /* _WIN32 */
107
108         throw std::runtime_error(error_str);
109     }
110
111     // 2. add channel to map
112     this->message_map[channel] = {};
113
114     std::cout << "Channel " << channel << " added to message hub" << std::endl;
115
116     return;
117 } /* addChannel() */
```

### 4.7.3.2 clear()

```
void MessageHub::clear (
    void )
```

Method to clear the [MessageHub](#).

```
373 {
374
375     this->clearMessages();
```

```

376     this->message_map.clear();
377
378     return;
379 } /* clear() */

```

#### 4.7.3.3 clearMessages()

```

void MessageHub::clearMessages (
    void )

```

Method to clear messages from the [MessageHub](#).

```

347 {
348     std::map<std::string, std::list<Message>::iterator map_iter;
349     for (
350         map_iter = this->message_map.begin();
351         map_iter != this->message_map.end();
352         map_iter++
353     ) {
354         map_iter->second.clear();
355     }
356
357     return;
358 } /* clearMessages() */

```

#### 4.7.3.4 hasTraffic()

```

bool MessageHub::hasTraffic (
    void )

```

Method to determine if there remains any message traffic.

```

67 {
68     std::map<std::string, std::list<Message>::iterator map_iter;
69     for (
70         map_iter = this->message_map.begin();
71         map_iter != this->message_map.end();
72         map_iter++
73     ) {
74         if (not map_iter->second.empty()) {
75             return true;
76         }
77     }
78
79     return false;
80 } /* hasTraffic() */

```

#### 4.7.3.5 isEmpty()

```

bool MessageHub::isEmpty (
    std::string channel )

```

Method to check if channel is empty.

##### Parameters

<i>channel</i>	The key for the message channel being checked.
----------------	--



**Returns**

A boolean indicating whether the channel is empty or not.

```

212 {
213     // 1. check if channel is in map (if not, throw error)
214     if (this->message_map.count(channel) <= 0) {
215         std::string error_str = "ERROR MessageHub::isEmpty() channel ";
216         error_str += channel;
217         error_str += " is not in message map";
218
219         #ifdef _WIN32
220             std::cout << error_str << std::endl;
221         #endif /* _WIN32 */
222
223         throw std::runtime_error(error_str);
224     }
225
226     if (this->message_map[channel].empty()) {
227         return true;
228     }
229     else {
230         return false;
231     }
232 } /* isEmpty() */

```

**4.7.3.6 popMessage()**

```

void MessageHub::popMessage (
    std::string channel )

```

Method to pop first message off of the given channel. Channels are implemented in a first in, first out manner (i.e. message queue).

**Parameters**

<i>channel</i>	The key for the message channel being popped.
----------------	---

```

301 {
302     // 1. check if channel is in map (if not, throw error)
303     if (this->message_map.count(channel) <= 0) {
304         std::string error_str = "ERROR MessageHub::receiveMessage() channel ";
305         error_str += channel;
306         error_str += " is not in message map";
307
308         #ifdef _WIN32
309             std::cout << error_str << std::endl;
310         #endif /* _WIN32 */
311
312         throw std::runtime_error(error_str);
313     }
314
315     // 2. check if channel is empty (if so, throw error)
316     if (this->message_map[channel].empty()) {
317         std::string error_str = "ERROR MessageHub::receiveMessage() channel ";
318         error_str += channel;
319         error_str += " is empty";
320
321         #ifdef _WIN32
322             std::cout << error_str << std::endl;
323         #endif /* _WIN32 */
324
325         throw std::runtime_error(error_str);
326     }
327
328     // 3. pop message
329     this->message_map[channel].pop_front();
330
331     return;
332 } /* popMessage() */

```

#### 4.7.3.7 receiveMessage()

```
Message MessageHub::receiveMessage (
    std::string channel )
```

Method to receive the first message in the channel. Channels are implemented in a first in, first out manner (i.e. message queue).

##### Parameters

<i>channel</i>	The key for the message channel being received from.
----------------	--

##### Returns

The first message in the given channel.

```
252 {
253     // 1. check if channel is in map (if not, throw error)
254     if (this->message_map.count(channel) <= 0) {
255         std::string error_str = "ERROR MessageHub::receiveMessage() channel ";
256         error_str += channel;
257         error_str += " is not in message map";
258
259         #ifdef _WIN32
260             std::cout << error_str << std::endl;
261         #endif /* _WIN32 */
262
263         throw std::runtime_error(error_str);
264     }
265
266     // 2. check if channel is empty (if so, throw error)
267     if (this->message_map[channel].empty()) {
268         std::string error_str = "ERROR MessageHub::receiveMessage() channel ";
269         error_str += channel;
270         error_str += " is empty";
271
272         #ifdef _WIN32
273             std::cout << error_str << std::endl;
274         #endif /* _WIN32 */
275
276         throw std::runtime_error(error_str);
277     }
278
279     // 3. receive message
280     Message message = this->message_map[channel].front();
281
282     return message;
283 } /* receiveMessage() */
```

#### 4.7.3.8 removeChannel()

```
void MessageHub::removeChannel (
    std::string channel )
```

Method to remove channel from message map.

##### Parameters

<i>channel</i>	The key for the message channel being removed.
----------------	--

```
134 {
135     // 1. check if channel is in map (if not, throw error)
136     if (this->message_map.count(channel) <= 0) {
137         std::string error_str = "ERROR MessageHub::removeChannel() channel ";
```

```

138         error_str += channel;
139         error_str += " is not in message map";
140
141         #ifdef _WIN32
142             std::cout << error_str << std::endl;
143         #endif /* _WIN32 */
144
145         throw std::runtime_error(error_str);
146     }
147
148     // 2. remove channel from map
149     this->message_map[channel].clear();
150     this->message_map.erase(channel);
151
152     std::cout << "Channel " << channel << " removed from message hub" << std::endl;
153
154     return;
155 } /* removeChannel() */

```

#### 4.7.3.9 sendMessage()

```

void MessageHub::sendMessage (
    Message message )

```

Method to send a message to the message map. Channels are implemented in a first in, first out manner (i.e. message queue).

##### Parameters

<i>message</i>	The message to be sent.
----------------	-------------------------

```

173 {
174     // 1. check if channel is in map (if not, throw error)
175     std::string channel = message.channel;
176
177     if (this->message_map.count(channel) <= 0) {
178         std::string error_str = "ERROR MessageHub::sendMessage() channel ";
179         error_str += channel;
180         error_str += " is not in message map";
181
182         #ifdef _WIN32
183             std::cout << error_str << std::endl;
184         #endif /* _WIN32 */
185
186         throw std::runtime_error(error_str);
187     }
188
189     // 2. send message to message map
190     this->message_map[channel].push_back(message);
191
192     return;
193 } /* sendMessage() */

```

## 4.7.4 Member Data Documentation

### 4.7.4.1 message\_map

```
std::map<std::string, std::list<Message> > MessageHub::message_map [private]
```

A map <string, list of [Message](#)> for sending and receiving messages. Here the key is the channel, and each channel maintains a list (history) of messages.

The documentation for this class was generated from the following files:


- [header/ESC\\_core/MessageHub.h](#)
- [source/ESC\\_core/MessageHub.cpp](#)

## 4.8 Settlement Class Reference


A settlement class (child class of [TileImprovement](#)).

```
#include <Settlement.h>
```

Inheritance diagram for Settlement:



Collaboration diagram for Settlement:

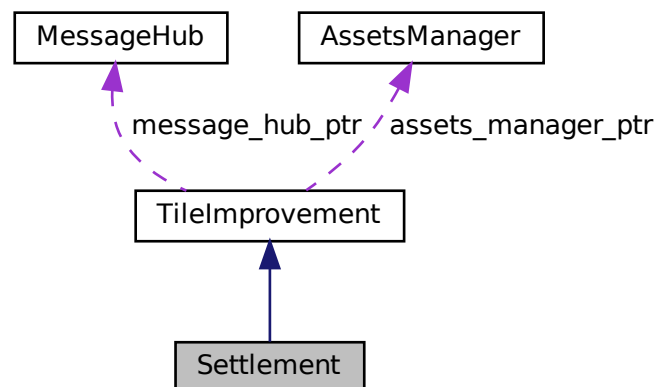

### Public Member Functions

- [Settlement](#) (double, double, sf::Event \*, sf::RenderWindow \*, [AssetsManager](#) \*, [MessageHub](#) \*)  
*Constructor for the [Settlement](#) class.*

- void [processEvent](#) (void)  
*Method to process [Settlement](#). To be called once per event.*
- void [processMessage](#) (void)  
*Method to process [Settlement](#). To be called once per message.*
- void [draw](#) (void)  
*Method to draw the hex tile to the render window. To be called once per frame.*
- virtual [~Settlement](#) (void)  
*Destructor for the [Settlement](#) class.*

## Public Attributes

- int [population](#)  
*Current population.*

## Private Member Functions

- void [\\_\\_setUpTileImprovementSpriteStatic](#) (void)  
*Helper method to set up tile improvement sprite (static).*
- void [\\_\\_handleKeyPressEvents](#) (void)  
*Helper method to handle key press events.*
- void [\\_\\_handleMouseButtonEvents](#) (void)  
*Helper method to handle mouse button events.*

## Additional Inherited Members

### 4.8.1 Detailed Description

A settlement class (child class of [TileImprovement](#)).

### 4.8.2 Constructor & Destructor Documentation

#### 4.8.2.1 Settlement()

```
Settlement::Settlement (
    double position_x,
    double position_y,
    sf::Event * event_ptr,
    sf::RenderWindow * render_window_ptr,
    AssetsManager * assets_manager_ptr,
    MessageHub * message_hub_ptr )
```

Constructor for the [Settlement](#) class.

Ref: [Wikipedia](#) [2023]

## Parameters

<i>position_x</i>	The x position of the tile.
<i>position_y</i>	The y position of the tile.
<i>event_ptr</i>	Pointer to the event class.
<i>render_window_ptr</i>	Pointer to the render window.
<i>assets_manager_ptr</i>	Pointer to the assets manager.
<i>message_hub_ptr</i>	Pointer to the message hub.

```

163 :
164 TileImprovement (
165     position_x,
166     position_y,
167     event_ptr,
168     render_window_ptr,
169     assets_manager_ptr,
170     message_hub_ptr
171 )
172 {
173     // 1. set attributes
174
175     // 1.1. private
176     //...
177
178     // 1.2. public
179     this->tile_improvement_type = TileImprovementType :: SETTLEMENT;
180
181     this->population = 100;
182
183     this->__setUpTileImprovementSpriteStatic();
184
185     std::cout << "Settlement constructed at " << this << std::endl;
186
187     return;
188 } /* Settlement() */

```

## 4.8.2.2 ~Settlement()

```

Settlement::~~Settlement (
    void ) [virtual]

```

Destructor for the [Settlement](#) class.

```

268 {
269     std::cout << "Settlement at " << this << " destroyed" << std::endl;
270
271     return;
272 } /* ~Settlement() */

```

## 4.8.3 Member Function Documentation

## 4.8.3.1 \_\_handleKeyPressEvents()

```

void Settlement::__handleKeyPressEvents (
    void ) [private], [virtual]

```

Helper method to handle key press events.

Reimplemented from [TileImprovement](#).

```

65 {
66     switch (this->event_ptr->key.code) {
67         //...
68
69         default: {
70             // do nothing!
71
72             break;
73         }
74     }
75 }
76
77 return;
78 } /* __handleKeyPressEvents() */

```

#### 4.8.3.2 \_\_handleMouseButtonEvents()

```

void Settlement::__handleMouseButtonEvents (
    void ) [private], [virtual]

```

Helper method to handle mouse button events.

Reimplemented from [TileImprovement](#).

```

93 {
94     switch (this->event_ptr->mouseButton.button) {
95         case (sf::Mouse::Left): {
96             //...
97
98             break;
99         }
100
101         case (sf::Mouse::Right): {
102             //...
103
104             break;
105         }
106
107         default: {
108             // do nothing!
109
110             break;
111         }
112     }
113 }
114 }
115
116 return;
117 } /* __handleMouseButtonEvents() */

```

#### 4.8.3.3 \_\_setUpTileImprovementSpriteStatic()

```

void Settlement::__setUpTileImprovementSpriteStatic (
    void ) [private]

```

Helper method to set up tile improvement sprite (static).

```

34 {
35     this->tile_improvement_sprite_static.setTexture(
36         *(this->assets_manager_ptr->getTexture("brick_house_64x64_1"))
37     );
38
39     this->tile_improvement_sprite_static.setOrigin(
40         this->tile_improvement_sprite_static.getLocalBounds().width / 2,
41         this->tile_improvement_sprite_static.getLocalBounds().height
42     );
43
44     this->tile_improvement_sprite_static.setPosition(
45         this->position_x,
46         this->position_y + 12
47     );
48
49     return;
50 } /* __setUpTileImprovementSpriteStatic() */

```

#### 4.8.3.4 draw()

```
void Settlement::draw (
    void ) [virtual]
```

Method to draw the hex tile to the render window. To be called once per frame.

Reimplemented from [TileImprovement](#).

```
248 {
249     this->render_window_ptr->draw(this->tile_improvement_sprite_static);
250
251     this->frame++;
252     return;
253 } /* draw() */
```

#### 4.8.3.5 processEvent()

```
void Settlement::processEvent (
    void ) [virtual]
```

Method to process [Settlement](#). To be called once per event.

Reimplemented from [TileImprovement](#).

```
203 {
204     if (this->event_ptr->type == sf::Event::KeyPressed) {
205         this->__handleKeyPressEvents();
206     }
207
208     if (this->event_ptr->type == sf::Event::MouseButtonPressed) {
209         this->__handleMouseButtonEvents();
210     }
211
212     return;
213 } /* processEvent() */
```

#### 4.8.3.6 processMessage()

```
void Settlement::processMessage (
    void ) [virtual]
```

Method to process [Settlement](#). To be called once per message.

Reimplemented from [TileImprovement](#).

```
228 {
229     //...
230
231     return;
232 } /* processMessage() */
```

### 4.8.4 Member Data Documentation



#### 4.8.4.1 population

```
int Settlement::population
```

Current population.

The documentation for this class was generated from the following files:


- header/[Settlement.h](#)
- source/[Settlement.cpp](#)

## 4.9 TileImprovement Class Reference


A base class for the tile improvement hierarchy.

```
#include <TileImprovement.h>
```

Inheritance diagram for TileImprovement:



Collaboration diagram for TileImprovement:

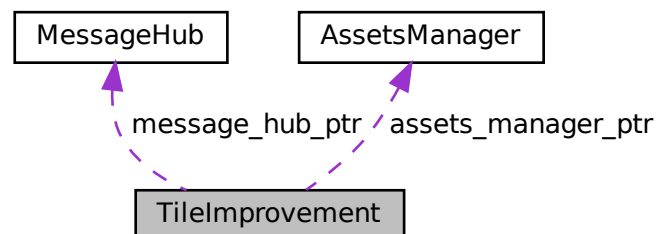

## Public Member Functions

- [TileImprovement](#) (double, double, sf::Event \*, sf::RenderWindow \*, [AssetsManager](#) \*, [MessageHub](#) \*)  
*Constructor for the [TileImprovement](#) class.*
- virtual void [processEvent](#) (void)  
*Method to process [TileImprovement](#). To be called once per event.*
- virtual void [processMessage](#) (void)  
*Method to process [TileImprovement](#). To be called once per message.*
- virtual void [draw](#) (void)  
*Method to draw the hex tile to the render window. To be called once per frame.*
- virtual [~TileImprovement](#) (void)  
*Destructor for the [TileImprovement](#) class.*

## Public Attributes

- [TileImprovementType](#) [tile\\_improvement\\_type](#)  
*The type of the tile improvement.*
- int [frame](#)  
*The current frame of this object.*
- int [credits](#)  
*The current balance of credits.*
- double [position\\_x](#)  
*The x position of the tile improvement.*
- double [position\\_y](#)  
*The y position of the tile improvement.*
- std::string [game\\_phase](#)  
*The current phase of the game.*
- sf::Sprite [tile\\_improvement\\_sprite\\_static](#)  
*A static sprite, for decorating the tile.*
- std::vector< sf::Sprite > [tile\\_improvement\\_sprite\\_animated](#)  
*An animated sprite, for the [ContextMenu](#) visual screen.*

## Protected Member Functions

- virtual void [\\_\\_handleKeyPressEvents](#) (void)  
*Helper method to handle key press events.*
- virtual void [\\_\\_handleMouseButtonEvents](#) (void)  
*Helper method to handle mouse button events.*

## Protected Attributes

- sf::Event \* [event\\_ptr](#)  
*A pointer to the event class.*
- sf::RenderWindow \* [render\\_window\\_ptr](#)  
*A pointer to the render window.*
- [AssetsManager](#) \* [assets\\_manager\\_ptr](#)  
*A pointer to the assets manager.*
- [MessageHub](#) \* [message\\_hub\\_ptr](#)  
*A pointer to the message hub.*

### 4.9.1 Detailed Description

A base class for the tile improvement hierarchy.

### 4.9.2 Constructor & Destructor Documentation

#### 4.9.2.1 TileImprovement()

```
TileImprovement::TileImprovement (
    double position_x,
    double position_y,
    sf::Event * event_ptr,
    sf::RenderWindow * render_window_ptr,
    AssetsManager * assets_manager_ptr,
    MessageHub * message_hub_ptr )
```

Constructor for the [TileImprovement](#) class.

Ref: [Wikipedia \[2023\]](#)

#### Parameters

<i>position_x</i>	The x position of the tile.
<i>position_y</i>	The y position of the tile.
<i>event_ptr</i>	Pointer to the event class.
<i>render_window_ptr</i>	Pointer to the render window.
<i>assets_manager_ptr</i>	Pointer to the assets manager.
<i>message_hub_ptr</i>	Pointer to the message hub.

```
133 {
134     // 1. set attributes
135
136     // 1.1. protected
137     this->event_ptr = event_ptr;
138     this->render_window_ptr = render_window_ptr;
139
140     this->assets_manager_ptr = assets_manager_ptr;
141     this->message_hub_ptr = message_hub_ptr;
142
143     // 1.2. public
144     this->frame = 0;
145     this->credits = 0;
146
147     this->position_x = position_x;
148     this->position_y = position_y;
149
150     this->game_phase = "build settlement";
151
152     std::cout << "TileImprovement constructed at " << this << std::endl;
153
154     return;
155 } /* TileImprovement() */
```

#### 4.9.2.2 ~TileImprovement()

```
TileImprovement::~~TileImprovement (
    void ) [virtual]
```

Destructor for the [TileImprovement](#) class.

```
235 {
236     std::cout << "TileImprovement at " << this << " destroyed" << std::endl;
237
238     return;
239 } /* ~TileImprovement() */
```

### 4.9.3 Member Function Documentation

#### 4.9.3.1 \_\_handleKeyPressEvents()

```
void TileImprovement::__handleKeyPressEvents (
    void ) [protected], [virtual]
```

Helper method to handle key press events.

Reimplemented in [Settlement](#).

```
34 {
35     switch (this->event_ptr->key.code) {
36         //...
37
38
39         default: {
40             // do nothing!
41
42             break;
43         }
44     }
45
46     return;
47 } /* __handleKeyPressEvents() */
```

#### 4.9.3.2 \_\_handleMouseButtonEvents()

```
void TileImprovement::__handleMouseButtonEvents (
    void ) [protected], [virtual]
```

Helper method to handle mouse button events.

Reimplemented in [Settlement](#).

```
62 {
63     switch (this->event_ptr->mouseButton.button) {
64         case (sf::Mouse::Left): {
65             //...
66
67             break;
68         }
69
70
71         case (sf::Mouse::Right): {
72             //...
73
74             break;
75         }
76
77         default: {
78             // do nothing!
79
80             break;
81         }
82     }
83
84
85     return;
86 } /* __handleMouseButtonEvents() */
```

#### 4.9.3.3 draw()

```
void TileImprovement::draw (
    void ) [virtual]
```

Method to draw the hex tile to the render window. To be called once per frame.

Reimplemented in [Settlement](#).

```
215 {
216     //...
217
218     this->frame++;
219     return;
220 } /* draw() */
```

#### 4.9.3.4 processEvent()

```
void TileImprovement::processEvent (
    void ) [virtual]
```

Method to process [TileImprovement](#). To be called once per event.

Reimplemented in [Settlement](#).

```
170 {
171     if (this->event_ptr->type == sf::Event::KeyPressed) {
172         this->__handleKeyPressEvents();
173     }
174
175     if (this->event_ptr->type == sf::Event::MouseButtonPressed) {
176         this->__handleMouseButtonEvents();
177     }
178
179     return;
180 } /* processEvent() */
```

#### 4.9.3.5 processMessage()

```
void TileImprovement::processMessage (
    void ) [virtual]
```

Method to process [TileImprovement](#). To be called once per message.

Reimplemented in [Settlement](#).

```
195 {
196     //...
197
198     return;
199 } /* processMessage() */
```

### 4.9.4 Member Data Documentation

#### 4.9.4.1 assets\_manager\_ptr

```
AssetsManager* TileImprovement::assets_manager_ptr [protected]
```

A pointer to the assets manager.

#### 4.9.4.2 credits

```
int TileImprovement::credits
```

The current balance of credits.

#### 4.9.4.3 event\_ptr

```
sf::Event* TileImprovement::event_ptr [protected]
```

A pointer to the event class.

#### 4.9.4.4 frame

```
int TileImprovement::frame
```

The current frame of this object.

#### 4.9.4.5 game\_phase

```
std::string TileImprovement::game_phase
```

The current phase of the game.

#### 4.9.4.6 message\_hub\_ptr

```
MessageHub* TileImprovement::message_hub_ptr [protected]
```

A pointer to the message hub.

#### 4.9.4.7 position\_x

```
double TileImprovement::position_x
```

The x position of the tile improvement.

#### 4.9.4.8 position\_y

```
double TileImprovement::position_y
```

The y position of the tile improvement.

#### 4.9.4.9 render\_window\_ptr

```
sf::RenderWindow* TileImprovement::render_window_ptr [protected]
```

A pointer to the render window.

#### 4.9.4.10 tile\_improvement\_sprite\_animated

```
std::vector<sf::Sprite> TileImprovement::tile_improvement_sprite_animated
```

An animated sprite, for the [ContextMenu](#) visual screen.

#### 4.9.4.11 tile\_improvement\_sprite\_static

```
sf::Sprite TileImprovement::tile_improvement_sprite_static
```

A static sprite, for decorating the tile.

#### 4.9.4.12 tile\_improvement\_type

```
TileImprovementType TileImprovement::tile_improvement_type
```

The type of the tile improvement.

The documentation for this class was generated from the following files:

- header/[TileImprovement.h](#)
- source/[TileImprovement.cpp](#)





## Chapter 5


# File Documentation

### 5.1 header/ContextMenu.h File Reference


Header file for the [ContextMenu](#) class.

```
#include "ESC_core/constants.h"
#include "ESC_core/includes.h"
#include "ESC_core/AssetsManager.h"
#include "ESC_core/MessageHub.h"
```

Include dependency graph for ContextMenu.h:



This graph shows which files directly or indirectly include this file:

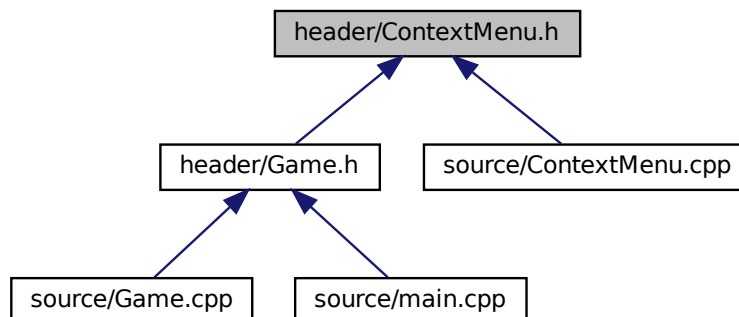

## Classes

- class [ContextMenu](#)

*A class which defines a context menu for the game.*

## Enumerations

- enum [ConsoleState](#) {  
[NONE\\_STATE](#) , [READY](#) , [MENU](#) , [TILE](#) ,  
[N\\_CONSOLE\\_STATES](#) }

*An enumeration of the different console screen states.*

### 5.1.1 Detailed Description

Header file for the [ContextMenu](#) class.

### 5.1.2 Enumeration Type Documentation

#### 5.1.2.1 ConsoleState

enum [ConsoleState](#)

An enumeration of the different console screen states.

##### Enumerator

NONE_STATE	None state (for initialization)
READY	Ready (default) state.
MENU	<a href="#">Game</a> menu state.
TILE	Tile context state.
N_CONSOLE_STATES	A simple hack to get the number of console screen states.

```

34         {
35     NONE_STATE,
36     READY,
37     MENU,
38     TILE,
39     N_CONSOLE_STATES
40 };

```

## 5.2 header/ESC\_core/AssetsManager.h File Reference


Header file for the [AssetsManager](#) class.

```


#include "constants.h"
#include "includes.h"

```

Include dependency graph for AssetsManager.h:



This graph shows which files directly or indirectly include this file:

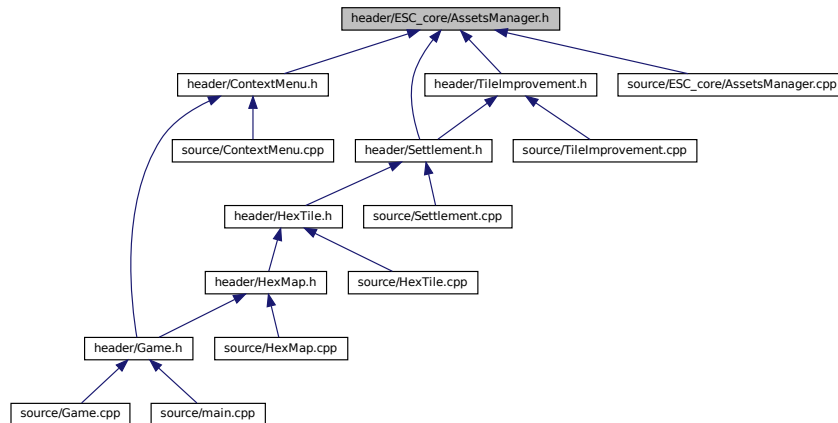

## Classes

- class [AssetsManager](#)  
*A class which manages visual and sound assets.*

### 5.2.1 Detailed Description

Header file for the [AssetsManager](#) class.

## 5.3 header/ESC\_core/constants.h File Reference


Header file for various constants.

```
#include "includes.h"
```

Include dependency graph for constants.h:



This graph shows which files directly or indirectly include this file:

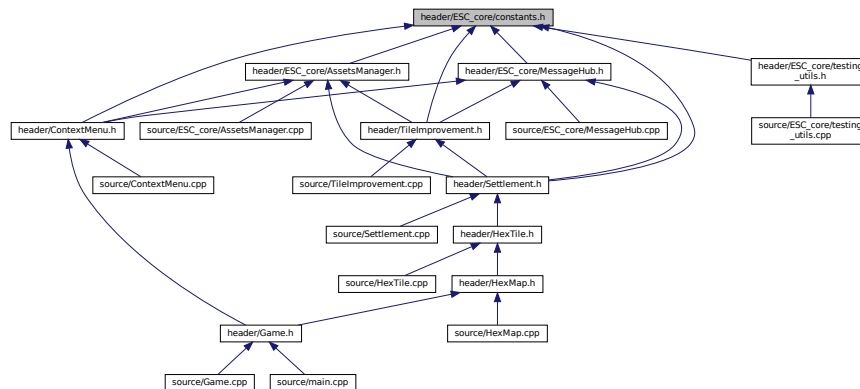

## Functions

- const sf::Color **FOREST\_GREEN** (34, 139, 34)  
The base colour of a forest tile.
- const sf::Color **LAKE\_BLUE** (0, 102, 204)  
The base colour of a lake (water) tile.
- const sf::Color **MOUNTAINS\_GREY** (97, 110, 113)  
The base colour of a mountains tile.
- const sf::Color **OCEAN\_BLUE** (0, 51, 102)  
The base colour of an ocean (water) tile.
- const sf::Color **PLAINS\_YELLOW** (245, 222, 133)  
The base colour of a plains tile.
- const sf::Color **RESOURCE\_CHIP\_GREY** (175, 175, 175, 250)  
The base colour of the resource chip (backing).
- const sf::Color **MENU\_FRAME\_GREY** (185, 187, 182)  
The base colour of the context menu frame.
- const sf::Color **MONOCHROME\_SCREEN\_BACKGROUND** (40, 40, 40)  
The base colour of old monochrome screens.
- const sf::Color **VISUAL\_SCREEN\_FRAME\_GREY** (151, 151, 143)  
The base colour of the framing of the visual screen.
- const sf::Color **MONOCHROME\_TEXT\_GREEN** (0, 255, 102)  
The base colour of old monochrome text (green).
- const sf::Color **MONOCHROME\_TEXT\_AMBER** (255, 176, 0)  
The base colour of old monochrome text (amber).
- const sf::Color **MONOCHROME\_TEXT\_RED** (255, 44, 0)  
The base colour of old monochrome text (red).

## Variables

- const double **FLOAT\_TOLERANCE** = 1e-6  
Tolerance for floating point equality tests.
- const unsigned long long int **SECONDS\_PER\_YEAR** = 31537970
- const unsigned long long int **SECONDS\_PER\_MONTH** = 2628164

- const int `FRAMES_PER_SECOND` = 60  
*Target frames per second.*
- const double `SECONDS_PER_FRAME` = 1.0 / 60  
*Target seconds per frame (just reciprocal of target frames per second).*
- const int `GAME_WIDTH` = 1200  
*Width of the game space.*
- const int `GAME_HEIGHT` = 800  
*Height of the game space.*
- const std::vector< double > `TILE_TYPE_CUMULATIVE_PROBABILITIES`  
*Cumulative probabilities for each tile type (to support procedural generation).*
- const std::vector< double > `TILE_RESOURCE_CUMULATIVE_PROBABILITIES`  
*Cumulative probabilities for each tile resource (to support procedural generation).*
- const std::string `TILE_SELECTED_CHANNEL` = "TILE SELECTED CHANNEL"  
*A message channel for tile selection messages.*
- const std::string `NO_TILE_SELECTED_CHANNEL` = "NO TILE SELECTED CHANNEL"  
*A message channel for no tile selected messages.*
- const std::string `TILE_STATE_CHANNEL` = "TILE STATE CHANNEL"  
*A message channel for tile state messages.*
- const std::string `HEX_MAP_CHANNEL` = "HEX MAP CHANNEL"  
*A message channel for hex map messages.*
- const int `EMISSIONS_LIFETIME_LIMIT_TONNES` = 1500  
*The CO2-equivalent mass of emissions that would result from burning 1,000,000 L of diesel fuel.*
- const int `RESOURCE_ASSESSMENT_COST` = 20  
*The cost of doing a resource assessment.*
- const int `BUILD_SETTLEMENT_COST` = 250  
*The cost of building a settlement.*
- const int `STARTING_POPULATION` = 100  
*The starting population of a settlement.*
- const double `CO2E_KG_PER_LITRE_DIESEL` = 3.1596  
*The CO2-equivalent mass of emissions that result from burning one litre of diesel fuel.*
- const std::string `GAME_CHANNEL` = "GAME CHANNEL"  
*A message channel for game messages.*
- const std::string `GAME_STATE_CHANNEL` = "GAME STATE CHANNEL"  
*A message channel for game state messages.*

### 5.3.1 Detailed Description

Header file for various constants.

### 5.3.2 Function Documentation

### 5.3.2.1 FOREST\_GREEN()

```
const sf::Color FOREST_GREEN (
    34 ,
    139 ,
    34 )
```

The base colour of a forest tile.

### 5.3.2.2 LAKE\_BLUE()

```
const sf::Color LAKE_BLUE (
    0 ,
    102 ,
    204 )
```

The base colour of a lake (water) tile.

### 5.3.2.3 MENU\_FRAME\_GREY()

```
const sf::Color MENU_FRAME_GREY (
    185 ,
    187 ,
    182 )
```

The base colour of the context menu frame.

### 5.3.2.4 MONOCHROME\_SCREEN\_BACKGROUND()

```
const sf::Color MONOCHROME_SCREEN_BACKGROUND (
    40 ,
    40 ,
    40 )
```

The base colour of old monochrome screens.

### 5.3.2.5 MONOCHROME\_TEXT\_AMBER()

```
const sf::Color MONOCHROME_TEXT_AMBER (
    255 ,
    176 ,
    0 )
```

The base colour of old monochrome text (amber).

#### 5.3.2.6 MONOCHROME\_TEXT\_GREEN()

```
const sf::Color MONOCHROME_TEXT_GREEN (
    0 ,
    255 ,
    102 )
```

The base colour of old monochrome text (green).

#### 5.3.2.7 MONOCHROME\_TEXT\_RED()

```
const sf::Color MONOCHROME_TEXT_RED (
    255 ,
    44 ,
    0 )
```

The base colour of old monochrome text (red).

#### 5.3.2.8 MOUNTAINS\_GREY()

```
const sf::Color MOUNTAINS_GREY (
    97 ,
    110 ,
    113 )
```

The base colour of a mountains tile.

#### 5.3.2.9 OCEAN\_BLUE()

```
const sf::Color OCEAN_BLUE (
    0 ,
    51 ,
    102 )
```

The base colour of an ocean (water) tile.

#### 5.3.2.10 PLAINS\_YELLOW()

```
const sf::Color PLAINS_YELLOW (
    245 ,
    222 ,
    133 )
```

The base colour of a plains tile.

#### 5.3.2.11 RESOURCE\_CHIP\_GREY()

```
const sf::Color RESOURCE_CHIP_GREY (
    175 ,
    175 ,
    175 ,
    250 )
```

The base colour of the resource chip (backing).

#### 5.3.2.12 VISUAL\_SCREEN\_FRAME\_GREY()

```
const sf::Color VISUAL_SCREEN_FRAME_GREY (
    151 ,
    151 ,
    143 )
```

The base colour of the framing of the visual screen.

### 5.3.3 Variable Documentation

#### 5.3.3.1 BUILD\_SETTLEMENT\_COST

```
const int BUILD_SETTLEMENT_COST = 250
```

The cost of building a settlement.

#### 5.3.3.2 CO2E\_KG\_PER\_LITRE\_DIESEL

```
const double CO2E_KG_PER_LITRE_DIESEL = 3.1596
```

The CO2-equivalent mass of emissions that result from burning one litre of diesel fuel.

#### 5.3.3.3 EMISSIONS\_LIFETIME\_LIMIT\_TONNES

```
const int EMISSIONS_LIFETIME_LIMIT_TONNES = 1500
```

The CO2-equivalent mass of emissions that would result from burning 1,000,000 L of diesel fuel.



#### 5.3.3.4 FLOAT\_TOLERANCE

```
const double FLOAT_TOLERANCE = 1e-6
```

Tolerance for floating point equality tests.

#### 5.3.3.5 FRAMES\_PER\_SECOND

```
const int FRAMES_PER_SECOND = 60
```

Target frames per second.

#### 5.3.3.6 GAME\_CHANNEL

```
const std::string GAME_CHANNEL = "GAME CHANNEL"
```

A message channel for game messages.

#### 5.3.3.7 GAME\_HEIGHT

```
const int GAME_HEIGHT = 800
```

Height of the game space.

#### 5.3.3.8 GAME\_STATE\_CHANNEL

```
const std::string GAME_STATE_CHANNEL = "GAME STATE CHANNEL"
```

A message channel for game state messages.

#### 5.3.3.9 GAME\_WIDTH

```
const int GAME_WIDTH = 1200
```

Width of the game space.

#### 5.3.3.10 HEX\_MAP\_CHANNEL

```
const std::string HEX_MAP_CHANNEL = "HEX MAP CHANNEL"
```

A message channel for hex map messages.

#### 5.3.3.11 NO\_TILE\_SELECTED\_CHANNEL

```
const std::string NO_TILE_SELECTED_CHANNEL = "NO TILE SELECTED CHANNEL"
```

A message channel for no tile selected messages.

#### 5.3.3.12 RESOURCE\_ASSESSMENT\_COST

```
const int RESOURCE_ASSESSMENT_COST = 20
```

The cost of doing a resource assessment.

#### 5.3.3.13 SECONDS\_PER\_FRAME

```
const double SECONDS_PER_FRAME = 1.0 / 60
```

Target seconds per frame (just reciprocal of target frames per second).

#### 5.3.3.14 SECONDS\_PER\_MONTH

```
const unsigned long long int SECONDS_PER_MONTH = 2628164
```

#### 5.3.3.15 SECONDS\_PER\_YEAR

```
const unsigned long long int SECONDS_PER_YEAR = 31537970
```

#### 5.3.3.16 STARTING\_POPULATION

```
const int STARTING_POPULATION = 100
```

The starting population of a settlement.

#### 5.3.3.17 TILE\_RESOURCE\_CUMULATIVE\_PROBABILITIES

```
const std::vector<double> TILE_RESOURCE_CUMULATIVE_PROBABILITIES
```

**Initial value:**

```
= {  
    0.10,  
    0.30,  
    0.70,  
    0.90,  
    1.00  
}
```

Cumulative probabilities for each tile resource (to support procedural generation).

#### 5.3.3.18 TILE\_SELECTED\_CHANNEL

```
const std::string TILE_SELECTED_CHANNEL = "TILE SELECTED CHANNEL"
```

A message channel for tile selection messages.

#### 5.3.3.19 TILE\_STATE\_CHANNEL

```
const std::string TILE_STATE_CHANNEL = "TILE STATE CHANNEL"
```

A message channel for tile state messages.

#### 5.3.3.20 TILE\_TYPE\_CUMULATIVE\_PROBABILITIES

```
const std::vector<double> TILE_TYPE_CUMULATIVE_PROBABILITIES
```

**Initial value:**

```
= {  
    0.25,  
    0.50,  
    0.75,  
    1.00  
}
```

Cumulative probabilities for each tile type (to support procedural generation).

## 5.4 header/ESC\_core/doxygen\_cite.h File Reference

Header file which simply cites the doxygen tool.

### 5.4.1 Detailed Description

Header file which simply cites the doxygen tool.

Ref: [van Heesch. \[2023\]](#)

## 5.5 header/ESC\_core/includes.h File Reference


Header file for various includes.

```
#include <chrono>
#include <cmath>
#include <cstdlib>
#include <filesystem>
#include <fstream>
#include <iomanip>
#include <iostream>
#include <limits>
#include <list>
#include <map>
#include <stdexcept>
#include <sstream>
#include <string>
#include <vector>
#include <SFML/Audio.hpp>
#include <SFML/Config.hpp>
#include <SFML/GpuPreference.hpp>
#include <SFML/Graphics.hpp>
#include <SFML/Main.hpp>
#include <SFML/Network.hpp>
#include <SFML/OpenGL.hpp>
#include <SFML/System.hpp>
#include <SFML/Window.hpp>
```

Include dependency graph for includes.h:



This graph shows which files directly or indirectly include this file:

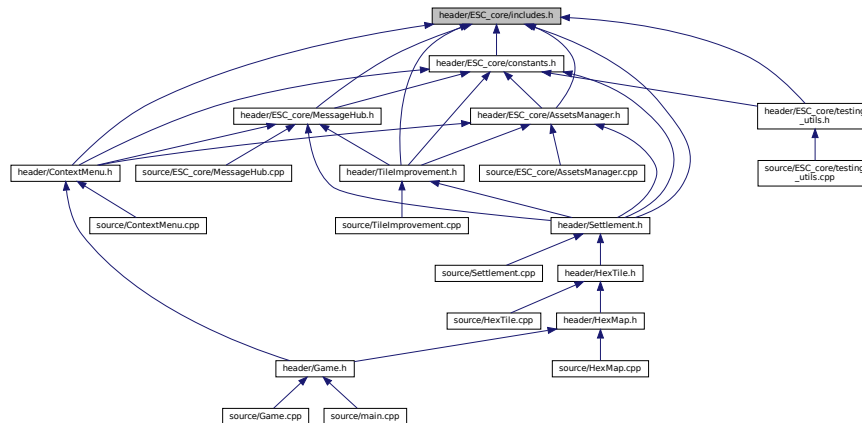

### 5.5.1 Detailed Description

Header file for various includes.

Ref: Gomila [2023]


## 5.6 header/ESC\_core/MessageHub.h File Reference

Header file for the `MessageHub` class.


```
#include "constants.h"
```

```
#include "includes.h"
```

Include dependency graph for MessageHub.h:



This graph shows which files directly or indirectly include this file:

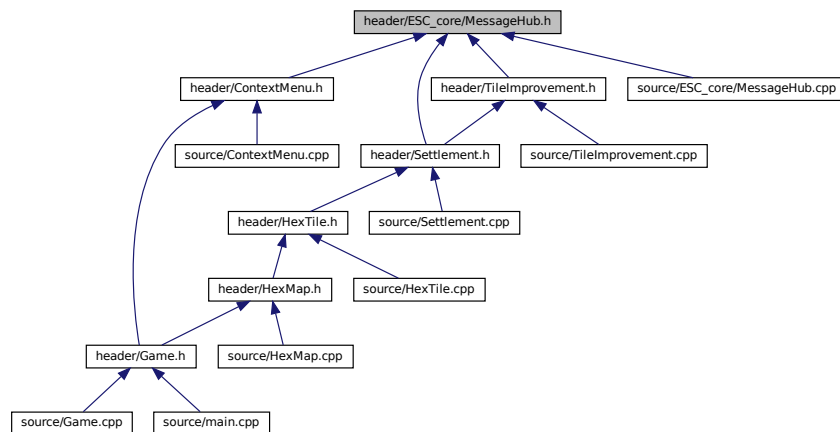

## Classes

- struct [Message](#)  
A structure which defines a standard message format.
- class [MessageHub](#)  
A class which acts as a central hub for inter-object message traffic.

### 5.6.1 Detailed Description

Header file for the [MessageHub](#) class.


## 5.7 header/ESC\_core/testing\_utils.h File Reference

Header file for various testing utilities.


```
#include "constants.h"
```

```
#include "includes.h"
```

Include dependency graph for testing\_utils.h:



This graph shows which files directly or indirectly include this file:

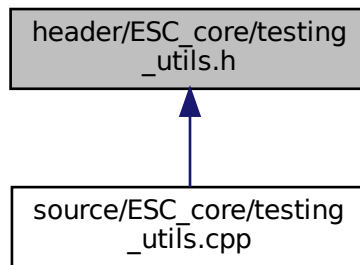

## Functions

- void `printGreen` (std::string)  
*A function that sends green text to std::cout.*
- void `printGold` (std::string)  
*A function that sends gold text to std::cout.*
- void `printRed` (std::string)  
*A function that sends red text to std::cout.*
- void `testFloatEquals` (double, double, std::string, int)  
*Tests for the equality of two floating point numbers  $x$  and  $y$  (to within `FLOAT_TOLERANCE`).*
- void `testGreaterThan` (double, double, std::string, int)  
*Tests if  $x > y$ .*
- void `testGreaterThanOrEqualTo` (double, double, std::string, int)  
*Tests if  $x \geq y$ .*
- void `testLessThan` (double, double, std::string, int)  
*Tests if  $x < y$ .*
- void `testLessThanOrEqualTo` (double, double, std::string, int)  
*Tests if  $x \leq y$ .*
- void `testTruth` (bool, std::string, int)  
*Tests if the given statement is true.*
- void `expectedErrorNotDetected` (std::string, int)  
*A utility function to print out a meaningful error message whenever an expected error fails to be thrown/caught/detected.*

### 5.7.1 Detailed Description

Header file for various testing utilities.

This is a library of utility functions used throughout the various test suites.

### 5.7.2 Function Documentation

### 5.7.2.1 expectedErrorNotDetected()

```
void expectedErrorNotDetected (
    std::string file,
    int line )
```

A utility function to print out a meaningful error message whenever an expected error fails to be thrown/caught/detected.

#### Parameters

<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```
430 {
431     std::string error_str = "\n ERROR   failed to throw expected error prior to line ";
432     error_str += std::to_string(line);
433     error_str += " of ";
434     error_str += file;
435
436     #ifdef _WIN32
437         std::cout << error_str << std::endl;
438     #endif
439
440     throw std::runtime_error(error_str);
441     return;
442 } /* expectedErrorNotDetected() */
```

### 5.7.2.2 printGold()

```
void printGold (
    std::string input_str )
```

A function that sends gold text to std::cout.

#### Parameters

<i>input_str</i>	The text of the string to be sent to std::cout.
------------------	---

```
82 {
83     std::cout << "\x1B[33m" << input_str << "\033[0m";
84     return;
85 } /* printGold() */
```

### 5.7.2.3 printGreen()

```
void printGreen (
    std::string input_str )
```

A function that sends green text to std::cout.

#### Parameters

<i>input_str</i>	The text of the string to be sent to std::cout.
------------------	---



```

62 {
63     std::cout << "\x1B[32m" << input_str << "\033[0m";
64     return;
65 } /* printGreen() */

```

### 5.7.2.4 printRed()

```

void printRed (
    std::string input_str )

```

A function that sends red text to std::cout.

#### Parameters

<i>input_str</i>	The text of the string to be sent to std::cout.
------------------	---

```

102 {
103     std::cout << "\x1B[31m" << input_str << "\033[0m";
104     return;
105 } /* printRed() */

```

### 5.7.2.5 testFloatEquals()

```

void testFloatEquals (
    double x,
    double y,
    std::string file,
    int line )

```

Tests for the equality of two floating point numbers *x* and *y* (to within FLOAT\_TOLERANCE).

#### Parameters

<i>x</i>	The first of two numbers to test.
<i>y</i>	The second of two numbers to test.
<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```

136 {
137     if (fabs(x - y) <= FLOAT_TOLERANCE) {
138         return;
139     }
140
141     std::string error_str = "ERROR: testFloatEquals():\t in ";
142     error_str += file;
143     error_str += "\tline ";
144     error_str += std::to_string(line);
145     error_str += ":\t\n";
146     error_str += std::to_string(x);
147     error_str += " and ";
148     error_str += std::to_string(y);
149     error_str += " are not equal to within +/- ";
150     error_str += std::to_string(FLOAT_TOLERANCE);
151     error_str += "\n";
152
153     #ifdef _WIN32
154         std::cout << error_str << std::endl;
155     #endif

```

```

156
157     throw std::runtime_error(error_str);
158     return;
159 } /* testFloatEquals() */

```

### 5.7.2.6 testGreaterThan()

```

void testGreaterThan (
    double x,
    double y,
    std::string file,
    int line )

```

Tests if  $x > y$ .

#### Parameters

<i>x</i>	The first of two numbers to test.
<i>y</i>	The second of two numbers to test.
<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```

189 {
190     if (x > y) {
191         return;
192     }
193
194     std::string error_str = "ERROR: testGreaterThan():\t in ";
195     error_str += file;
196     error_str += "\tline ";
197     error_str += std::to_string(line);
198     error_str += ":\t\n";
199     error_str += std::to_string(x);
200     error_str += " is not greater than ";
201     error_str += std::to_string(y);
202     error_str += "\n";
203
204     #ifdef _WIN32
205         std::cout << error_str << std::endl;
206     #endif
207
208     throw std::runtime_error(error_str);
209     return;
210 } /* testGreaterThan() */

```

### 5.7.2.7 testGreaterThanOrEqualTo()

```

void testGreaterThanOrEqualTo (
    double x,
    double y,
    std::string file,
    int line )

```

Tests if  $x \geq y$ .

#### Parameters

<i>x</i>	The first of two numbers to test.
----------	-----------------------------------

## Parameters

<i>y</i>	The second of two numbers to test.
<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```

240 {
241     if (x >= y) {
242         return;
243     }
244
245     std::string error_str = "ERROR: testGreaterThanOrEqualTo():\t in ";
246     error_str += file;
247     error_str += "\tline ";
248     error_str += std::to_string(line);
249     error_str += ":\t\n";
250     error_str += std::to_string(x);
251     error_str += " is not greater than or equal to ";
252     error_str += std::to_string(y);
253     error_str += "\n";
254
255     #ifdef _WIN32
256         std::cout << error_str << std::endl;
257     #endif
258
259     throw std::runtime_error(error_str);
260     return;
261 } /* testGreaterThanOrEqualTo() */

```

## 5.7.2.8 testLessThan()

```

void testLessThan (
    double x,
    double y,
    std::string file,
    int line )

```

Tests if  $x < y$ .

## Parameters

<i>x</i>	The first of two numbers to test.
<i>y</i>	The second of two numbers to test.
<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```

291 {
292     if (x < y) {
293         return;
294     }
295
296     std::string error_str = "ERROR: testLessThan():\t in ";
297     error_str += file;
298     error_str += "\tline ";
299     error_str += std::to_string(line);
300     error_str += ":\t\n";
301     error_str += std::to_string(x);
302     error_str += " is not less than ";
303     error_str += std::to_string(y);
304     error_str += "\n";
305
306     #ifdef _WIN32
307         std::cout << error_str << std::endl;
308     #endif
309
310     throw std::runtime_error(error_str);
311     return;

```

```
312 }    /* testLessThan() */
```

### 5.7.2.9 testLessThanOrEqualTo()

```
void testLessThanOrEqualTo (
    double x,
    double y,
    std::string file,
    int line )
```

Tests if  $x \leq y$ .

#### Parameters

<i>x</i>	The first of two numbers to test.
<i>y</i>	The second of two numbers to test.
<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```
342 {
343     if (x <= y) {
344         return;
345     }
346
347     std::string error_str = "ERROR: testLessThanOrEqualTo():\t in ";
348     error_str += file;
349     error_str += "\tline ";
350     error_str += std::to_string(line);
351     error_str += ":\t\n";
352     error_str += std::to_string(x);
353     error_str += " is not less than or equal to ";
354     error_str += std::to_string(y);
355     error_str += "\n";
356
357     #ifdef _WIN32
358         std::cout << error_str << std::endl;
359     #endif
360
361     throw std::runtime_error(error_str);
362     return;
363 }    /* testLessThanOrEqualTo() */
```

### 5.7.2.10 testTruth()

```
void testTruth (
    bool statement,
    std::string file,
    int line )
```

Tests if the given statement is true.

#### Parameters

<i>statement</i>	The statement whose truth is to be tested ("1 == 0", for example).
<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```

390 {
391     if (statement) {
392         return;
393     }
394
395     std::string error_str = "ERROR: testTruth():\t in ";
396     error_str += file;
397     error_str += "\tline ";
398     error_str += std::to_string(line);
399     error_str += ":\t\n";
400     error_str += "Given statement is not true";
401
402     #ifdef _WIN32
403         std::cout << error_str << std::endl;
404     #endif
405
406     throw std::runtime_error(error_str);
407     return;
408 } /* testTruth() */

```


## 5.8 header/Game.h File Reference

```


#include "HexMap.h"
#include "ContextMenu.h"

```

Include dependency graph for Game.h:

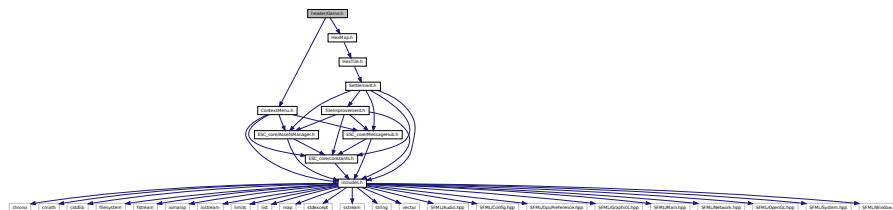

This graph shows which files directly or indirectly include this file:

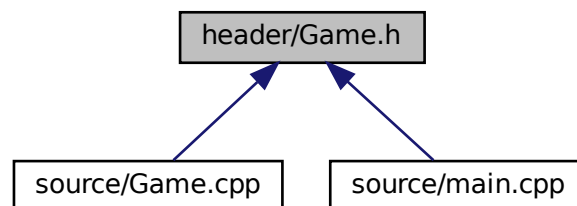

## Classes


- class [Game](#)

*A class which acts as the central class for the game, by containing all other classes and implementing the game loop.*





This graph shows which files directly or indirectly include this file:

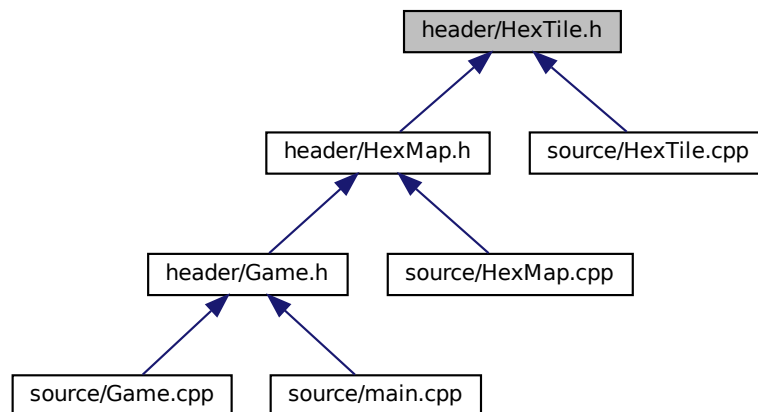

## Classes

- class [HexTile](#)  
A class which defines a hex tile of the hex map.

## Enumerations

- enum [TileType](#) {  
  [NONE\\_TYPE](#) , [FOREST](#) , [LAKE](#) , [MOUNTAINS](#) ,  
  [OCEAN](#) , [PLAINS](#) , [N\\_TILE\\_TYPES](#) }  
An enumeration of the different tile types.
- enum [TileResource](#) {  
  [POOR](#) , [BELOW\\_AVERAGE](#) , [AVERAGE](#) , [ABOVE\\_AVERAGE](#) ,  
  [GOOD](#) , [N\\_TILE\\_RESOURCES](#) }  
An enumeration of the different tile resource values.

### 5.10.1 Detailed Description

Header file for the [Game](#) class.

Header file for the [HexTile](#) class.

### 5.10.2 Enumeration Type Documentation

#### 5.10.2.1 TileResource

enum [TileResource](#)

An enumeration of the different tile resource values.



## Enumerator

POOR	A poor resource value.
BELOW_AVERAGE	A below average resource value.
AVERAGE	An average resource value.
ABOVE_AVERAGE	An above average resource value.
GOOD	A good resource value.
N_TILE_RESOURCES	A simple hack to get the number of elements in TileResource.

```

48         {
49     POOR,
50     BELOW_AVERAGE,
51     AVERAGE,
52     ABOVE_AVERAGE,
53     GOOD,
54     N_TILE_RESOURCES
55 }; /* TileResource */

```

## 5.10.2.2 TileType

```
enum TileType
```

An enumeration of the different tile types.

## Enumerator

NONE_TYPE	A dummy tile (for initialization).
FOREST	A forest tile.
LAKE	A lake tile.
MOUNTAINS	A mountains tile.
OCEAN	An ocean tile.
PLAINS	A plains tile.
N_TILE_TYPES	A simple hack to get the number of elements in TileType.

```

31         {
32     NONE_TYPE,
33     FOREST,
34     LAKE,
35     MOUNTAINS,
36     OCEAN,
37     PLAINS,
38     N_TILE_TYPES
39 }; /* TileType */

```

## 5.11 header/Settlement.h File Reference

Header file for the [Settlement](#) class.


```

#include "ESC_core/constants.h"
#include "ESC_core/includes.h"
#include "ESC_core/AssetsManager.h"
#include "ESC_core/MessageHub.h"


```

```
#include "TileImprovement.h"
```

Include dependency graph for Settlement.h:



This graph shows which files directly or indirectly include this file:

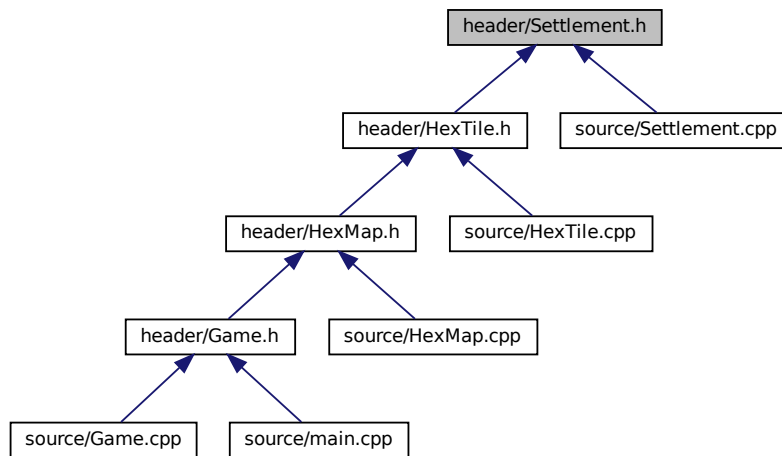

## Classes

- class [Settlement](#)  
A settlement class (child class of [TileImprovement](#)).

### 5.11.1 Detailed Description

Header file for the [Settlement](#) class.

## 5.12 header/TileImprovement.h File Reference

Header file for the [TileImprovement](#) class.

```
#include "ESC_core/constants.h"
#include "ESC_core/includes.h"
#include "ESC_core/AssetsManager.h"
```



### 5.12.2.1 TileImprovementType

enum `TileImprovementType`

An enumeration of the different tile improvement types.





## Functions

- void `printGreen` (std::string input\_str)  
A function that sends green text to std::cout.
- void `printGold` (std::string input\_str)  
A function that sends gold text to std::cout.
- void `printRed` (std::string input\_str)  
A function that sends red text to std::cout.
- void `testFloatEquals` (double x, double y, std::string file, int line)  
Tests for the equality of two floating point numbers x and y (to within `FLOAT_TOLERANCE`).
- void `testGreaterThan` (double x, double y, std::string file, int line)  
Tests if  $x > y$ .
- void `testGreaterThanOrEqualTo` (double x, double y, std::string file, int line)  
Tests if  $x \geq y$ .
- void `testLessThan` (double x, double y, std::string file, int line)  
Tests if  $x < y$ .
- void `testLessThanOrEqualTo` (double x, double y, std::string file, int line)  
Tests if  $x \leq y$ .
- void `testTruth` (bool statement, std::string file, int line)  
Tests if the given statement is true.
- void `expectedErrorNotDetected` (std::string file, int line)  
A utility function to print out a meaningful error message whenever an expected error fails to be thrown/caught/detected.

### 5.16.1 Detailed Description

Implementation file for various testing utilities.

This is a library of utility functions used throughout the various test suites.

### 5.16.2 Function Documentation

#### 5.16.2.1 `expectedErrorNotDetected()`

```
void expectedErrorNotDetected (
    std::string file,
    int line )
```

A utility function to print out a meaningful error message whenever an expected error fails to be thrown/caught/detected.

#### Parameters

<i>file</i>	The file in which the test is applied (you should be able to just pass in " <code>__FILE__</code> ").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in " <code>__LINE__</code> ").

```
430 {
431     std::string error_str = "\n ERROR   failed to throw expected error prior to line ";
432     error_str += std::to_string(line);
```

```
433     error_str += " of ";
434     error_str += file;
435
436     #ifdef _WIN32
437         std::cout << error_str << std::endl;
438     #endif
439
440     throw std::runtime_error(error_str);
441     return;
442 } /* expectedErrorNotDetected() */
```

### 5.16.2.2 printGold()

```
void printGold (
    std::string input_str )
```

A function that sends gold text to std::cout.

#### Parameters

<i>input_str</i>	The text of the string to be sent to std::cout.
------------------	---

```
82 {
83     std::cout << "\x1B[33m" << input_str << "\033[0m";
84     return;
85 } /* printGold() */
```

### 5.16.2.3 printGreen()

```
void printGreen (
    std::string input_str )
```

A function that sends green text to std::cout.

#### Parameters

<i>input_str</i>	The text of the string to be sent to std::cout.
------------------	---

```
62 {
63     std::cout << "\x1B[32m" << input_str << "\033[0m";
64     return;
65 } /* printGreen() */
```

### 5.16.2.4 printRed()

```
void printRed (
    std::string input_str )
```

A function that sends red text to std::cout.



## Parameters

<i>input_str</i>	The text of the string to be sent to <code>std::cout</code> .
------------------	---

```

102 {
103     std::cout << "\x1B[31m" << input_str << "\033[0m";
104     return;
105 } /* printRed() */

```

## 5.16.2.5 testFloatEquals()

```

void testFloatEquals (
    double x,
    double y,
    std::string file,
    int line )

```

Tests for the equality of two floating point numbers  $x$  and  $y$  (to within `FLOAT_TOLERANCE`).

## Parameters

<i>x</i>	The first of two numbers to test.
<i>y</i>	The second of two numbers to test.
<i>file</i>	The file in which the test is applied (you should be able to just pass in " <code>__FILE__</code> ").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in " <code>__LINE__</code> ").

```

136 {
137     if (fabs(x - y) <= FLOAT_TOLERANCE) {
138         return;
139     }
140
141     std::string error_str = "ERROR: testFloatEquals():\t in ";
142     error_str += file;
143     error_str += "\tline ";
144     error_str += std::to_string(line);
145     error_str += ":\t\n";
146     error_str += std::to_string(x);
147     error_str += " and ";
148     error_str += std::to_string(y);
149     error_str += " are not equal to within +/- ";
150     error_str += std::to_string(FLOAT_TOLERANCE);
151     error_str += "\n";
152
153     #ifdef WIN32
154         std::cout << error_str << std::endl;
155     #endif
156
157     throw std::runtime_error(error_str);
158     return;
159 } /* testFloatEquals() */

```

## 5.16.2.6 testGreaterThan()

```

void testGreaterThan (
    double x,
    double y,
    std::string file,
    int line )

```

Tests if  $x > y$ .

## Parameters

<i>x</i>	The first of two numbers to test.
<i>y</i>	The second of two numbers to test.
<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```

189 {
190     if (x > y) {
191         return;
192     }
193
194     std::string error_str = "ERROR: testGreaterThan():\t in ";
195     error_str += file;
196     error_str += "\tline ";
197     error_str += std::to_string(line);
198     error_str += ":\t\n";
199     error_str += std::to_string(x);
200     error_str += " is not greater than ";
201     error_str += std::to_string(y);
202     error_str += "\n";
203
204     #ifdef _WIN32
205         std::cout << error_str << std::endl;
206     #endif
207
208     throw std::runtime_error(error_str);
209     return;
210 } /* testGreaterThan() */

```

## 5.16.2.7 testGreaterThanOrEqualTo()

```

void testGreaterThanOrEqualTo (
    double x,
    double y,
    std::string file,
    int line )

```

Tests if  $x \geq y$ .

## Parameters

<i>x</i>	The first of two numbers to test.
<i>y</i>	The second of two numbers to test.
<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```

240 {
241     if (x >= y) {
242         return;
243     }
244
245     std::string error_str = "ERROR: testGreaterThanOrEqualTo():\t in ";
246     error_str += file;
247     error_str += "\tline ";
248     error_str += std::to_string(line);
249     error_str += ":\t\n";
250     error_str += std::to_string(x);
251     error_str += " is not greater than or equal to ";
252     error_str += std::to_string(y);
253     error_str += "\n";
254
255     #ifdef _WIN32
256         std::cout << error_str << std::endl;
257     #endif
258
259     throw std::runtime_error(error_str);

```

```

260     return;
261 } /* testGreaterThanOrEqualTo() */

```

### 5.16.2.8 testLessThan()

```

void testLessThan (
    double x,
    double y,
    std::string file,
    int line )

```

Tests if  $x < y$ .

#### Parameters

<i>x</i>	The first of two numbers to test.
<i>y</i>	The second of two numbers to test.
<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```

291 {
292     if (x < y) {
293         return;
294     }
295
296     std::string error_str = "ERROR: testLessThan():\t in ";
297     error_str += file;
298     error_str += "\tline ";
299     error_str += std::to_string(line);
300     error_str += ":\t\n";
301     error_str += std::to_string(x);
302     error_str += " is not less than ";
303     error_str += std::to_string(y);
304     error_str += "\n";
305
306     #ifdef _WIN32
307         std::cout << error_str << std::endl;
308     #endif
309
310     throw std::runtime_error(error_str);
311     return;
312 } /* testLessThan() */

```

### 5.16.2.9 testLessThanOrEqualTo()

```

void testLessThanOrEqualTo (
    double x,
    double y,
    std::string file,
    int line )

```

Tests if  $x \leq y$ .

#### Parameters

<i>x</i>	The first of two numbers to test.
<i>y</i>	The second of two numbers to test.
<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```

342 {
343     if (x <= y) {
344         return;
345     }
346
347     std::string error_str = "ERROR: testLessThanOrEqualTo():\t in ";
348     error_str += file;
349     error_str += "\tline ";
350     error_str += std::to_string(line);
351     error_str += ":\t\n";
352     error_str += std::to_string(x);
353     error_str += " is not less than or equal to ";
354     error_str += std::to_string(y);
355     error_str += "\n";
356
357     #ifdef _WIN32
358         std::cout << error_str << std::endl;
359     #endif
360
361     throw std::runtime_error(error_str);
362     return;
363 } /* testLessThanOrEqualTo() */

```

### 5.16.2.10 testTruth()

```

void testTruth (
    bool statement,
    std::string file,
    int line )

```

Tests if the given statement is true.

#### Parameters

<i>statement</i>	The statement whose truth is to be tested ("1 == 0", for example).
<i>file</i>	The file in which the test is applied (you should be able to just pass in "__FILE__").
<i>line</i>	The line of the file in which the test is applied (you should be able to just pass in "__LINE__").

```

390 {
391     if (statement) {
392         return;
393     }
394
395     std::string error_str = "ERROR: testTruth():\t in ";
396     error_str += file;
397     error_str += "\tline ";
398     error_str += std::to_string(line);
399     error_str += ":\t\n";
400     error_str += "Given statement is not true";
401
402     #ifdef _WIN32
403         std::cout << error_str << std::endl;
404     #endif
405
406     throw std::runtime_error(error_str);
407     return;
408 } /* testTruth() */

```

## 5.17 source/Game.cpp File Reference

Implementation file for the [Game](#) class.





### 5.20.2.2 loadAssets()

```
void loadAssets (
    AssetsManager * assets_manager_ptr )
```

Helper function to load game assets.

#### Parameters

<code>assets_manager_ptr</code>	Pointer to the assets manager.
---------------------------------	--------------------------------

```
32 {
33     // 1. load font assets
34     assets_manager_ptr->loadFont("assets/fonts/DroidSansMono.ttf", "DroidSansMono");
35     assets_manager_ptr->loadFont("assets/fonts/Glass_TTY_VT220.ttf", "Glass_TTY_VT220");
36
37
38     // 2. load tile sheets
39     assets_manager_ptr->loadTexture(
40         "assets/tile_sheets/pine_tree_64x64_1.png",
41         "pine_tree_64x64_1"
42     );
43
44     assets_manager_ptr->loadTexture(
45         "assets/tile_sheets/wheat_64x64_1.png",
46         "wheat_64x64_1"
47     );
48
49     assets_manager_ptr->loadTexture(
50         "assets/tile_sheets/mountain_64x64_1.png",
51         "mountain_64x64_1"
52     );
53
54     assets_manager_ptr->loadTexture(
55         "assets/tile_sheets/water_waves_64x64_1.png",
56         "water_waves_64x64_1"
57     );
58
59     assets_manager_ptr->loadTexture(
60         "assets/tile_sheets/water_shimmer_64x64_1.png",
61         "water_shimmer_64x64_1"
62     );
63
64     assets_manager_ptr->loadTexture(
65         "assets/tile_sheets/brick_house_64x64_1.png",
66         "brick_house_64x64_1"
67     );
68
69     assets_manager_ptr->loadTexture(
70         "assets/tile_sheets/magnifying_glass_64x64_1.png",
71         "magnifying_glass_64x64_1"
72     );
73
74
75     // 3. load sounds
76     assets_manager_ptr->loadSound(
77         "assets/audio/samples/mixkit-apartment-buzzer-bell-press-932.ogg",
78         "insufficient credits"
79     );
80
81     assets_manager_ptr->loadSound(
82         "assets/audio/samples/mixkit-sci-fi-click-900.ogg",
83         "resource assessment"
84     );
85
86     assets_manager_ptr->loadSound(
87         "assets/audio/samples/mixkit-interface-click-1126.ogg",
88         "console string print"
89     );
90
91     assets_manager_ptr->loadSound(
92         "assets/audio/samples/mixkit-video-game-retro-click-237.ogg",
93         "resource overlay toggle on"
94     );
95
96     assets_manager_ptr->loadSound(
97         "assets/audio/samples/mixkit-video-game-retro-click-237_REVERSED.ogg",
98         "resource overlay toggle off"
99     );
100
101     return;
```

```
102 }    /* loadAssets() */
```

### 5.20.2.3 main()

```
int main (
    int argc,
    char ** argv )
{
    // 1. load assets
    AssetsManager assets_manager;
    loadAssets(&assets_manager);

    // 2. construct render window
    sf::RenderWindow* render_window_ptr = constructRenderWindow();

    // 3. start game loop
    bool quit_game = false;

    while (not quit_game) {
        Game game(render_window_ptr, &assets_manager);
        quit_game = game.run();
    }


    // 4. clean up
    render_window_ptr->close();
    delete render_window_ptr;

    return 0;
} /* main() */
```

## 5.21 source/Settlement.cpp File Reference

Implementation file for the [Settlement](#) class.

```
#include "../header/Settlement.h"
Include dependency graph for Settlement.cpp:
```

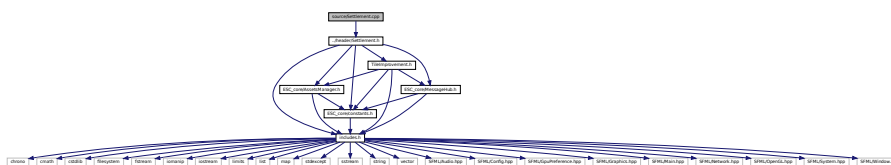

### 5.21.1 Detailed Description

Implementation file for the [Settlement](#) class.

A base class for the tile improvement hierarchy.







# Bibliography

L. Gomila. SFML: Simple and Fast Multimedia Library, 2023. URL <https://www.sfml-dev.org/>. 135

D. van Heesch. Doxygen: Generate documentation from source code, 2023. URL <https://www.doxygen.nl>. 134

Wikipedia. Hexagon, 2023. URL <https://en.wikipedia.org/wiki/Hexagon>. 78, 111, 117



# Index

- \_\_assembleHexMap
  - HexMap, [56](#)
- \_\_assessNeighbours
  - HexMap, [56](#)
- \_\_buildDrawOrderVector
  - HexMap, [57](#)
- \_\_clearDecoration
  - HexTile, [79](#)
- \_\_draw
  - Game, [41](#)
- \_\_drawConsoleScreenFrame
  - ContextMenu, [22](#)
- \_\_drawConsoleText
  - ContextMenu, [23](#)
- \_\_drawFrameClockOverlay
  - Game, [41](#)
- \_\_drawHUD
  - Game, [41](#)
- \_\_drawVisualScreenFrame
  - ContextMenu, [24](#)
- \_\_enforceOceanContinuity
  - HexMap, [57](#)
- \_\_getMajorityTileType
  - HexMap, [58](#)
- \_\_getNeighboursVector
  - HexMap, [59](#)
- \_\_getNoise
  - HexMap, [60](#)
- \_\_getSelectedTile
  - HexMap, [61](#)
- \_\_getTileCoordsSubstring
  - HexTile, [79](#)
- \_\_getTileImprovementSubstring
  - HexTile, [80](#)
- \_\_getTileOptionsSubstring
  - HexTile, [80](#)
- \_\_getTileResourceSubstring
  - HexTile, [81](#)
- \_\_getTileTypeSubstring
  - HexTile, [82](#)
- \_\_getValidMapIndexPositions
  - HexMap, [62](#)
- \_\_handleKeyPressEvents
  - ContextMenu, [24](#)
  - Game, [43](#)
  - HexMap, [63](#)
  - HexTile, [83](#)
  - Settlement, [112](#)
  - TileImprovement, [118](#)
- \_\_handleMouseButtonEvents
  - ContextMenu, [25](#)
  - Game, [43](#)
  - HexMap, [63](#)
  - HexTile, [84](#)
  - Settlement, [113](#)
  - TileImprovement, [118](#)
- \_\_insufficientCreditsAlarm
  - Game, [44](#)
- \_\_isClicked
  - HexTile, [85](#)
- \_\_isLakeTouchingOcean
  - HexMap, [64](#)
- \_\_layTiles
  - HexMap, [64](#)
- \_\_loadSoundBuffer
  - AssetsManager, [9](#)
- \_\_procedurallyGenerateTileResources
  - HexMap, [66](#)
- \_\_procedurallyGenerateTileTypes
  - HexMap, [67](#)
- \_\_processEvent
  - Game, [45](#)
- \_\_processMessage
  - Game, [45](#)
- \_\_sendAssessNeighboursMessage
  - HexTile, [85](#)
- \_\_sendCreditsSpentMessage
  - HexTile, [85](#)
- \_\_sendGameStateMessage
  - Game, [47](#)
- \_\_sendGameStateRequest
  - HexTile, [86](#)
- \_\_sendInsufficientCreditsMessage
  - HexTile, [86](#)
- \_\_sendNoTileSelectedMessage
  - HexMap, [67](#)
- \_\_sendQuitGameMessage
  - ContextMenu, [25](#)
- \_\_sendRestartGameMessage
  - ContextMenu, [25](#)
- \_\_sendTileSelectedMessage
  - HexTile, [86](#)
- \_\_sendTileStateMessage
  - HexTile, [87](#)
- \_\_sendUpdateGamePhaseMessage
  - HexTile, [87](#)
- \_\_setConsoleState
  - ContextMenu, [26](#)

- \_\_setConsoleString
  - ContextMenu, 26
- \_\_setResourceText
  - HexTile, 88
- \_\_setUpConsoleScreen
  - ContextMenu, 27
- \_\_setUpConsoleScreenFrame
  - ContextMenu, 27
- \_\_setUpGlassScreen
  - HexMap, 68
- \_\_setUpMagnifyingGlassSprite
  - HexTile, 89
- \_\_setUpMenuFrame
  - ContextMenu, 29
- \_\_setUpNodeSprite
  - HexTile, 89
- \_\_setUpResourceChipSprite
  - HexTile, 89
- \_\_setUpSelectOutlineSprite
  - HexTile, 90
- \_\_setUpTileImprovementSpriteStatic
  - Settlement, 113
- \_\_setUpTileSprite
  - HexTile, 90
- \_\_setUpVisualScreen
  - ContextMenu, 30
- \_\_setUpVisualScreenFrame
  - ContextMenu, 30
- \_\_smoothTileTypes
  - HexMap, 68
- \_\_toggleFrameClockOverlay
  - Game, 48
- ~AssetsManager
  - AssetsManager, 8
- ~ContextMenu
  - ContextMenu, 22
- ~Game
  - Game, 40
- ~HexMap
  - HexMap, 56
- ~HexTile
  - HexTile, 79
- ~MessageHub
  - MessageHub, 104
- ~Settlement
  - Settlement, 112
- ~TileImprovement
  - TileImprovement, 117
- ABOVE\_AVERAGE
  - HexTile.h, 147
- addChannel
  - MessageHub, 105
- assess
  - HexMap, 68
  - HexTile, 91
- assets\_manager\_ptr
  - ContextMenu, 33
  - Game, 49
- HexMap, 72
- HexTile, 97
- TileImprovement, 119
- AssetsManager, 7
  - \_\_loadSoundBuffer, 9
  - ~AssetsManager, 8
  - AssetsManager, 8
  - clear, 10
  - current\_track, 18
  - font\_map, 18
  - getCurrentTrackKey, 11
  - getFont, 11
  - getSound, 12
  - getSoundBuffer, 12
  - getTexture, 13
  - getTrackStatus, 13
  - loadFont, 14
  - loadSound, 14
  - loadTexture, 15
  - loadTrack, 16
  - nextTrack, 16
  - pauseTrack, 17
  - playTrack, 17
  - previousTrack, 17
  - sound\_map, 18
  - soundbuffer\_map, 18
  - stopTrack, 17
  - texture\_map, 18
  - track\_map, 19
- AVERAGE
  - HexTile.h, 147
- BELOW\_AVERAGE
  - HexTile.h, 147
- bool\_payload
  - Message, 102
- border\_tiles\_vec
  - HexMap, 72
- BUILD\_SETTLEMENT
  - Game.h, 144
- BUILD\_SETTLEMENT\_COST
  - constants.h, 130
- channel
  - Message, 102
- clear
  - AssetsManager, 10
  - HexMap, 69
  - MessageHub, 105
- clearMessages
  - MessageHub, 106
- clock
  - Game, 49
- CO2E\_KG\_PER\_LITRE\_DIESEL
  - constants.h, 130
- console\_screen
  - ContextMenu, 33
- console\_screen\_frame\_bottom
  - ContextMenu, 33

- console\_screen\_frame\_left
  - ContextMenu, 34
- console\_screen\_frame\_right
  - ContextMenu, 34
- console\_screen\_frame\_top
  - ContextMenu, 34
- console\_state
  - ContextMenu, 34
- console\_string
  - ContextMenu, 34
- console\_string\_changed
  - ContextMenu, 34
- console\_substring\_idx
  - ContextMenu, 35
- ConsoleState
  - ContextMenu.h, 124
- constants.h
  - BUILD\_SETTLEMENT\_COST, 130
  - CO2E\_KG\_PER\_LITRE\_DIESEL, 130
  - EMISSIONS\_LIFETIME\_LIMIT\_TONNES, 130
  - FLOAT\_TOLERANCE, 130
  - FOREST\_GREEN, 127
  - FRAMES\_PER\_SECOND, 131
  - GAME\_CHANNEL, 131
  - GAME\_HEIGHT, 131
  - GAME\_STATE\_CHANNEL, 131
  - GAME\_WIDTH, 131
  - HEX\_MAP\_CHANNEL, 131
  - LAKE\_BLUE, 128
  - MENU\_FRAME\_GREY, 128
  - MONOCHROME\_SCREEN\_BACKGROUND, 128
  - MONOCHROME\_TEXT\_AMBER, 128
  - MONOCHROME\_TEXT\_GREEN, 128
  - MONOCHROME\_TEXT\_RED, 129
  - MOUNTAINS\_GREY, 129
  - NO\_TILE\_SELECTED\_CHANNEL, 132
  - OCEAN\_BLUE, 129
  - PLAINS\_YELLOW, 129
  - RESOURCE\_ASSESSMENT\_COST, 132
  - RESOURCE\_CHIP\_GREY, 129
  - SECONDS\_PER\_FRAME, 132
  - SECONDS\_PER\_MONTH, 132
  - SECONDS\_PER\_YEAR, 132
  - STARTING\_POPULATION, 132
  - TILE\_RESOURCE\_CUMULATIVE\_PROBABILITIES, 133
  - TILE\_SELECTED\_CHANNEL, 133
  - TILE\_STATE\_CHANNEL, 133
  - TILE\_TYPE\_CUMULATIVE\_PROBABILITIES, 133
  - VISUAL\_SCREEN\_FRAME\_GREY, 130
- constructRenderWindow
  - main.cpp, 160
- context\_menu\_ptr
  - Game, 49
- ContextMenu, 19
  - \_\_drawConsoleScreenFrame, 22
  - \_\_drawConsoleText, 23
  - \_\_drawVisualScreenFrame, 24
  - \_\_handleKeyPressEvents, 24
  - \_\_handleMouseButtonEvents, 25
  - \_\_sendQuitGameMessage, 25
  - \_\_sendRestartGameMessage, 25
  - \_\_setConsoleState, 26
  - \_\_setConsoleString, 26
  - \_\_setUpConsoleScreen, 27
  - \_\_setUpConsoleScreenFrame, 27
  - \_\_setUpMenuFrame, 29
  - \_\_setUpVisualScreen, 30
  - \_\_setUpVisualScreenFrame, 30
  - ~ContextMenu, 22
- assets\_manager\_ptr, 33
- console\_screen, 33
- console\_screen\_frame\_bottom, 33
- console\_screen\_frame\_left, 34
- console\_screen\_frame\_right, 34
- console\_screen\_frame\_top, 34
- console\_state, 34
- console\_string, 34
- console\_string\_changed, 34
- console\_substring\_idx, 35
- ContextMenu, 21
- draw, 31
- event\_ptr, 35
- frame, 35
- game\_menu\_up, 35
- menu\_frame, 35
- message\_hub\_ptr, 35
- position\_x, 36
- position\_y, 36
- processEvent, 32
- processMessage, 32
- render\_window\_ptr, 36
- visual\_screen, 36
- visual\_screen\_frame\_bottom, 36
- visual\_screen\_frame\_left, 36
- visual\_screen\_frame\_right, 37
- visual\_screen\_frame\_top, 37
- ContextMenu.h
  - ConsoleState, 124
  - MENU, 124
  - N\_CONSOLE\_STATES, 124
  - NONE\_STATE, 124
  - READY, 124
  - TILE, 124
- credits
  - Game, 49
  - HexTile, 97
  - TileImprovement, 120
- cumulative\_emissions\_tonnes
  - Game, 49
- current\_track
  - AssetsManager, 18
- decorateTile
  - HexTile, 91
- decoration\_cleared
  - HexTile, 97

- demand\_MWh
  - Game, 50
- double\_payload
  - Message, 102
- draw
  - ContextMenu, 31
  - HexMap, 69
  - HexTile, 92
  - Settlement, 113
  - TileImprovement, 118
- EMISSIONS\_LIFETIME\_LIMIT\_TONNES
  - constants.h, 130
- ENERGY\_STORAGE\_SYSTEM
  - TileImprovement.h, 151
- event
  - Game, 50
- event\_ptr
  - ContextMenu, 35
  - HexMap, 72
  - HexTile, 97
  - TileImprovement, 120
- expectedErrorNotDetected
  - testing\_utils.cpp, 153
  - testing\_utils.h, 137
- FLOAT\_TOLERANCE
  - constants.h, 130
- font\_map
  - AssetsManager, 18
- FOREST
  - HexTile.h, 147
- FOREST\_GREEN
  - constants.h, 127
- frame
  - ContextMenu, 35
  - Game, 50
  - HexMap, 72
  - HexTile, 97
  - TileImprovement, 120
- FRAMES\_PER\_SECOND
  - constants.h, 131
- Game, 37
  - \_\_draw, 41
  - \_\_drawFrameClockOverlay, 41
  - \_\_drawHUD, 41
  - \_\_handleKeyPressEvents, 43
  - \_\_handleMouseButtonEvents, 43
  - \_\_insufficientCreditsAlarm, 44
  - \_\_processEvent, 45
  - \_\_processMessage, 45
  - \_\_sendGameStateMessage, 47
  - \_\_toggleFrameClockOverlay, 48
  - ~Game, 40
  - assets\_manager\_ptr, 49
  - clock, 49
  - context\_menu\_ptr, 49
  - credits, 49
  - cumulative\_emissions\_tonnes, 49
  - demand\_MWh, 50
  - event, 50
  - frame, 50
  - Game, 39
  - game\_loop\_broken, 50
  - game\_phase, 50
  - hex\_map\_ptr, 50
  - message\_hub, 51
  - month, 51
  - population, 51
  - quit\_game, 51
  - render\_window\_ptr, 51
  - run, 48
  - show\_frame\_clock\_overlay, 51
  - time\_since\_start\_s, 52
  - turn, 52
  - year, 52
- Game.h
  - BUILD\_SETTLEMENT, 144
  - GamePhase, 144
  - LOSS\_CREDITS, 144
  - LOSS\_DEMAND, 144
  - LOSS\_EMISSIONS, 144
  - N\_GAME\_PHASES, 144
  - SYSTEM\_MANAGEMENT, 144
  - VICTORY, 144
- GAME\_CHANNEL
  - constants.h, 131
- GAME\_HEIGHT
  - constants.h, 131
- game\_loop\_broken
  - Game, 50
- game\_menu\_up
  - ContextMenu, 35
- game\_phase
  - Game, 50
  - HexTile, 98
  - TileImprovement, 120
- GAME\_STATE\_CHANNEL
  - constants.h, 131
- GAME\_WIDTH
  - constants.h, 131
- GamePhase
  - Game.h, 144
- getCurrentTrackKey
  - AssetsManager, 11
- getFont
  - AssetsManager, 11
- getSound
  - AssetsManager, 12
- getSoundBuffer
  - AssetsManager, 12
- getTexture
  - AssetsManager, 13
- getTrackStatus
  - AssetsManager, 13
- glass\_screen



- HexMap, 72
- GOOD
  - HexTile.h, 147
- has\_improvement
  - HexTile, 98
- hasTraffic
  - MessageHub, 106
- header/ContextMenu.h, 123
- header/ESC\_core/AssetsManager.h, 124
- header/ESC\_core/constants.h, 125
- header/ESC\_core/doxygen\_cite.h, 134
- header/ESC\_core/includes.h, 134
- header/ESC\_core/MessageHub.h, 135
- header/ESC\_core/testing\_utils.h, 136
- header/Game.h, 143
- header/HexMap.h, 144
- header/HexTile.h, 145
- header/Settlement.h, 147
- header/TileImprovement.h, 148
- hex\_draw\_order\_vec
  - HexMap, 72
- hex\_map
  - HexMap, 73
- HEX\_MAP\_CHANNEL
  - constants.h, 131
- hex\_map\_ptr
  - Game, 50
- HexMap, 52
  - \_\_assembleHexMap, 56
  - \_\_assessNeighbours, 56
  - \_\_buildDrawOrderVector, 57
  - \_\_enforceOceanContinuity, 57
  - \_\_getMajorityTileType, 58
  - \_\_getNeighboursVector, 59
  - \_\_getNoise, 60
  - \_\_getSelectedTile, 61
  - \_\_getValidMapIndexPositions, 62
  - \_\_handleKeyPressEvents, 63
  - \_\_handleMouseButtonEvents, 63
  - \_\_isLakeTouchingOcean, 64
  - \_\_layTiles, 64
  - \_\_procedurallyGenerateTileResources, 66
  - \_\_procedurallyGenerateTileTypes, 67
  - \_\_sendNoTileSelectedMessage, 67
  - \_\_setUpGlassScreen, 68
  - \_\_smoothTileTypes, 68
  - ~HexMap, 56
  - assess, 68
  - assets\_manager\_ptr, 72
  - border\_tiles\_vec, 72
  - clear, 69
  - draw, 69
  - event\_ptr, 72
  - frame, 72
  - glass\_screen, 72
  - hex\_draw\_order\_vec, 72
  - hex\_map, 73
  - HexMap, 55
  - message\_hub\_ptr, 73
  - n\_layers, 73
  - n\_tiles, 73
  - position\_x, 73
  - position\_y, 73
  - processEvent, 70
  - processMessage, 70
  - render\_window\_ptr, 74
  - reroll, 71
  - show\_resource, 74
  - tile\_position\_x\_vec, 74
  - tile\_position\_y\_vec, 74
  - tile\_selected, 74
  - toggleResourceOverlay, 71
- HexTile, 75
  - \_\_clearDecoration, 79
  - \_\_getTileCoordsSubstring, 79
  - \_\_getTileImprovementSubstring, 80
  - \_\_getTileOptionsSubstring, 80
  - \_\_getTileResourceSubstring, 81
  - \_\_getTileTypeSubstring, 82
  - \_\_handleKeyPressEvents, 83
  - \_\_handleMouseButtonEvents, 84
  - \_\_isClicked, 85
  - \_\_sendAssessNeighboursMessage, 85
  - \_\_sendCreditsSpentMessage, 85
  - \_\_sendGameStateRequest, 86
  - \_\_sendInsufficientCreditsMessage, 86
  - \_\_sendTileSelectedMessage, 86
  - \_\_sendTileStateMessage, 87
  - \_\_sendUpdateGamePhaseMessage, 87
  - \_\_setResourceText, 88
  - \_\_setUpMagnifyingGlassSprite, 89
  - \_\_setUpNodeSprite, 89
  - \_\_setUpResourceChipSprite, 89
  - \_\_setUpSelectOutlineSprite, 90
  - \_\_setUpTileSprite, 90
  - ~HexTile, 79
  - assess, 91
  - assets\_manager\_ptr, 97
  - credits, 97
  - decorateTile, 91
  - decoration\_cleared, 97
  - draw, 92
  - event\_ptr, 97
  - frame, 97
  - game\_phase, 98
  - has\_improvement, 98
  - HexTile, 78
  - is\_selected, 98
  - magnifying\_glass\_sprite, 98
  - major\_radius, 98
  - message\_hub\_ptr, 98
  - minor\_radius, 99
  - node\_sprite, 99
  - position\_x, 99
  - position\_y, 99
  - processEvent, 93

- processMessage, 93
- render\_window\_ptr, 99
- resource\_assessed, 99
- resource\_assessment, 100
- resource\_chip\_sprite, 100
- resource\_text, 100
- select\_outline\_sprite, 100
- setTileResource, 94, 95
- setTileType, 95, 96
- show\_node, 100
- show\_resource, 100
- tile\_decoration\_sprite, 101
- tile\_improvement\_ptr, 101
- tile\_resource, 101
- tile\_sprite, 101
- tile\_type, 101
- toggleResourceOverlay, 96
- HexTile.h
  - ABOVE\_AVERAGE, 147
  - AVERAGE, 147
  - BELOW\_AVERAGE, 147
  - FOREST, 147
  - GOOD, 147
  - LAKE, 147
  - MOUNTAINS, 147
  - N\_TILE\_RESOURCES, 147
  - N\_TILE\_TYPES, 147
  - NONE\_TYPE, 147
  - OCEAN, 147
  - PLAINS, 147
  - POOR, 147
  - TileResource, 146
  - TileType, 147
- int\_payload
  - Message, 103
- is\_selected
  - HexTile, 98
- isEmpty
  - MessageHub, 106
- LAKE
  - HexTile.h, 147
- LAKE\_BLUE
  - constants.h, 128
- loadAssets
  - main.cpp, 160
- loadFont
  - AssetsManager, 14
- loadSound
  - AssetsManager, 14
- loadTexture
  - AssetsManager, 15
- loadTrack
  - AssetsManager, 16
- LOSS\_CREDITS
  - Game.h, 144
- LOSS\_DEMAND
  - Game.h, 144
- LOSS\_EMISSIONS
  - Game.h, 144
- magnifying\_glass\_sprite
  - HexTile, 98
- main
  - main.cpp, 162
- main.cpp
  - constructRenderWindow, 160
  - loadAssets, 160
  - main, 162
- major\_radius
  - HexTile, 98
- MENU
  - ContextMenu.h, 124
- menu\_frame
  - ContextMenu, 35
- MENU\_FRAME\_GREY
  - constants.h, 128
- Message, 102
  - bool\_payload, 102
  - channel, 102
  - double\_payload, 102
  - int\_payload, 103
  - string\_payload, 103
  - subject, 103
- message\_hub
  - Game, 51
- message\_hub\_ptr
  - ContextMenu, 35
  - HexMap, 73
  - HexTile, 98
  - TileImprovement, 120
- message\_map
  - MessageHub, 109
- MessageHub, 103
  - ~MessageHub, 104
  - addChannel, 105
  - clear, 105
  - clearMessages, 106
  - hasTraffic, 106
  - isEmpty, 106
  - message\_map, 109
  - MessageHub, 104
  - popMessage, 107
  - receiveMessage, 107
  - removeChannel, 108
  - sendMessage, 109
- minor\_radius
  - HexTile, 99
- MONOCHROME\_SCREEN\_BACKGROUND
  - constants.h, 128
- MONOCHROME\_TEXT\_AMBER
  - constants.h, 128
- MONOCHROME\_TEXT\_GREEN
  - constants.h, 128
- MONOCHROME\_TEXT\_RED
  - constants.h, 129
- month

- Game, 51
- MOUNTAINS
  - HexTile.h, 147
- MOUNTAINS\_GREY
  - constants.h, 129
- N\_CONSOLE\_STATES
  - ContextMenu.h, 124
- N\_GAME\_PHASES
  - Game.h, 144
- n\_layers
  - HexMap, 73
- N\_TILE\_IMPROVEMENT\_TYPES
  - TileImprovement.h, 151
- N\_TILE\_RESOURCES
  - HexTile.h, 147
- N\_TILE\_TYPES
  - HexTile.h, 147
- n\_tiles
  - HexMap, 73
- nextTrack
  - AssetsManager, 16
- NO\_TILE\_SELECTED\_CHANNEL
  - constants.h, 132
- node\_sprite
  - HexTile, 99
- NONE\_STATE
  - ContextMenu.h, 124
- NONE\_TYPE
  - HexTile.h, 147
- OCEAN
  - HexTile.h, 147
- OCEAN\_BLUE
  - constants.h, 129
- pauseTrack
  - AssetsManager, 17
- PLAINS
  - HexTile.h, 147
- PLAINS\_YELLOW
  - constants.h, 129
- playTrack
  - AssetsManager, 17
- POOR
  - HexTile.h, 147
- popMessage
  - MessageHub, 107
- population
  - Game, 51
  - Settlement, 114
- position\_x
  - ContextMenu, 36
  - HexMap, 73
  - HexTile, 99
  - TileImprovement, 120
- position\_y
  - ContextMenu, 36
  - HexMap, 73
- HexTile, 99
  - TileImprovement, 121
- previousTrack
  - AssetsManager, 17
- printGold
  - testing\_utils.cpp, 154
  - testing\_utils.h, 138
- printGreen
  - testing\_utils.cpp, 154
  - testing\_utils.h, 138
- printRed
  - testing\_utils.cpp, 154
  - testing\_utils.h, 139
- processEvent
  - ContextMenu, 32
  - HexMap, 70
  - HexTile, 93
  - Settlement, 114
  - TileImprovement, 119
- processMessage
  - ContextMenu, 32
  - HexMap, 70
  - HexTile, 93
  - Settlement, 114
  - TileImprovement, 119
- quit\_game
  - Game, 51
- READY
  - ContextMenu.h, 124
- receiveMessage
  - MessageHub, 107
- removeChannel
  - MessageHub, 108
- render\_window\_ptr
  - ContextMenu, 36
  - Game, 51
  - HexMap, 74
  - HexTile, 99
  - TileImprovement, 121
- reroll
  - HexMap, 71
- resource\_assessed
  - HexTile, 99
- resource\_assessment
  - HexTile, 100
- RESOURCE\_ASSESSMENT\_COST
  - constants.h, 132
- RESOURCE\_CHIP\_GREY
  - constants.h, 129
- resource\_chip\_sprite
  - HexTile, 100
- resource\_text
  - HexTile, 100
- run
  - Game, 48
- SECONDS\_PER\_FRAME

- constants.h, [132](#)
- SECONDS\_PER\_MONTH
  - constants.h, [132](#)
- SECONDS\_PER\_YEAR
  - constants.h, [132](#)
- select\_outline\_sprite
  - HexTile, [100](#)
- sendMessage
  - MessageHub, [109](#)
- setTileResource
  - HexTile, [94](#), [95](#)
- setTileType
  - HexTile, [95](#), [96](#)
- SETTLEMENT
  - TileImprovement.h, [151](#)
- Settlement, [110](#)
  - \_\_handleKeyPressEvents, [112](#)
  - \_\_handleMouseButtonEvents, [113](#)
  - \_\_setUpTileImprovementSpriteStatic, [113](#)
  - ~Settlement, [112](#)
  - draw, [113](#)
  - population, [114](#)
  - processEvent, [114](#)
  - processMessage, [114](#)
  - Settlement, [111](#)
- show\_frame\_clock\_overlay
  - Game, [51](#)
- show\_node
  - HexTile, [100](#)
- show\_resource
  - HexMap, [74](#)
  - HexTile, [100](#)
- SOLAR\_PV
  - TileImprovement.h, [151](#)
- sound\_map
  - AssetsManager, [18](#)
- soundbuffer\_map
  - AssetsManager, [18](#)
- source/ContextMenu.cpp, [151](#)
- source/ESC\_core/AssetsManager.cpp, [151](#)
- source/ESC\_core/MessageHub.cpp, [152](#)
- source/ESC\_core/testing\_utils.cpp, [152](#)
- source/Game.cpp, [158](#)
- source/HexMap.cpp, [159](#)
- source/HexTile.cpp, [159](#)
- source/main.cpp, [160](#)
- source/Settlement.cpp, [162](#)
- source/TileImprovement.cpp, [163](#)
- STARTING\_POPULATION
  - constants.h, [132](#)
- stopTrack
  - AssetsManager, [17](#)
- string\_payload
  - Message, [103](#)
- subject
  - Message, [103](#)
- SYSTEM\_MANAGEMENT
  - Game.h, [144](#)
- testFloatEquals
  - testing\_utils.cpp, [155](#)
  - testing\_utils.h, [139](#)
- testGreaterThan
  - testing\_utils.cpp, [155](#)
  - testing\_utils.h, [140](#)
- testGreaterThanOrEqualTo
  - testing\_utils.cpp, [156](#)
  - testing\_utils.h, [140](#)
- testing\_utils.cpp
  - expectedErrorNotDetected, [153](#)
  - printGold, [154](#)
  - printGreen, [154](#)
  - printRed, [154](#)
  - testFloatEquals, [155](#)
  - testGreaterThan, [155](#)
  - testGreaterThanOrEqualTo, [156](#)
  - testLessThan, [157](#)
  - testLessThanOrEqualTo, [157](#)
  - testTruth, [158](#)
- testing\_utils.h
  - expectedErrorNotDetected, [137](#)
  - printGold, [138](#)
  - printGreen, [138](#)
  - printRed, [139](#)
  - testFloatEquals, [139](#)
  - testGreaterThan, [140](#)
  - testGreaterThanOrEqualTo, [140](#)
  - testLessThan, [141](#)
  - testLessThanOrEqualTo, [142](#)
  - testTruth, [142](#)
- testLessThan
  - testing\_utils.cpp, [157](#)
  - testing\_utils.h, [141](#)
- testLessThanOrEqualTo
  - testing\_utils.cpp, [157](#)
  - testing\_utils.h, [142](#)
- testTruth
  - testing\_utils.cpp, [158](#)
  - testing\_utils.h, [142](#)
- texture\_map
  - AssetsManager, [18](#)
- TIDAL\_TURBINE
  - TileImprovement.h, [151](#)
- TILE
  - ContextMenu.h, [124](#)
- tile\_decoration\_sprite
  - HexTile, [101](#)
- tile\_improvement\_ptr
  - HexTile, [101](#)
- tile\_improvement\_sprite\_animated
  - TileImprovement, [121](#)
- tile\_improvement\_sprite\_static
  - TileImprovement, [121](#)
- tile\_improvement\_type
  - TileImprovement, [121](#)
- tile\_position\_x\_vec
  - HexMap, [74](#)

- tile\_position\_y\_vec
  - HexMap, [74](#)
- tile\_resource
  - HexTile, [101](#)
- TILE\_RESOURCE\_CUMULATIVE\_PROBABILITIES
  - constants.h, [133](#)
- tile\_selected
  - HexMap, [74](#)
- TILE\_SELECTED\_CHANNEL
  - constants.h, [133](#)
- tile\_sprite
  - HexTile, [101](#)
- TILE\_STATE\_CHANNEL
  - constants.h, [133](#)
- tile\_type
  - HexTile, [101](#)
- TILE\_TYPE\_CUMULATIVE\_PROBABILITIES
  - constants.h, [133](#)
- TileImprovement, [115](#)
  - \_\_handleKeyPressEvents, [118](#)
  - \_\_handleMouseButtonEvents, [118](#)
  - ~TileImprovement, [117](#)
  - assets\_manager\_ptr, [119](#)
  - credits, [120](#)
  - draw, [118](#)
  - event\_ptr, [120](#)
  - frame, [120](#)
  - game\_phase, [120](#)
  - message\_hub\_ptr, [120](#)
  - position\_x, [120](#)
  - position\_y, [121](#)
  - processEvent, [119](#)
  - processMessage, [119](#)
  - render\_window\_ptr, [121](#)
  - tile\_improvement\_sprite\_animated, [121](#)
  - tile\_improvement\_sprite\_static, [121](#)
  - tile\_improvement\_type, [121](#)
  - TileImprovement, [117](#)
- TileImprovement.h
  - ENERGY\_STORAGE\_SYSTEM, [151](#)
  - N\_TILE\_IMPROVEMENT\_TYPES, [151](#)
  - SETTLEMENT, [151](#)
  - SOLAR\_PV, [151](#)
  - TIDAL\_TURBINE, [151](#)
  - TileImprovementType, [149](#)
  - WAVE\_ENERGY\_CONVERTER, [151](#)
  - WIND\_TURBINE, [151](#)
- TileImprovementType
  - TileImprovement.h, [149](#)
- TileResource
  - HexTile.h, [146](#)
- TileType
  - HexTile.h, [147](#)
- time\_since\_start\_s
  - Game, [52](#)
- toggleResourceOverlay
  - HexMap, [71](#)
  - HexTile, [96](#)
- track\_map
  - AssetsManager, [19](#)
- turn
  - Game, [52](#)
- VICTORY
  - Game.h, [144](#)
- visual\_screen
  - ContextMenu, [36](#)
- visual\_screen\_frame\_bottom
  - ContextMenu, [36](#)
- VISUAL\_SCREEN\_FRAME\_GREY
  - constants.h, [130](#)
- visual\_screen\_frame\_left
  - ContextMenu, [36](#)
- visual\_screen\_frame\_right
  - ContextMenu, [37](#)
- visual\_screen\_frame\_top
  - ContextMenu, [37](#)
- WAVE\_ENERGY\_CONVERTER
  - TileImprovement.h, [151](#)
- WIND\_TURBINE
  - TileImprovement.h, [151](#)
- year
  - Game, [52](#)