UNIFI (ISO 20022) Message Definition Report

_____

Bank-to-Customer Cash Management Standards

Approved by UNIFI Payments SEG on 5 March 2007

Edition April 2007

Table Of Contents

Overview **1**
Scope 1
How to read 1
Message Flows **2**
Reporting from Account Servicer to Account Owner 2
Reporting from Account Servicer through a Forwarding Agent 4
MX camt.052.001.01 BankToCustomerAccountReportV01 ..... **6**
Message Scope and Usage 6
Message Structure 6
Message Items Description 16
Business Example 108
MX camt.053.001.01 BankToCustomerStatementV01 ..... **113**
Message Scope and Usage 113
Message Structure 113
Message Items Description 123
Business Example 214
MX camt.054.001.01 BankToCustomerDebitCreditNotificationV01 ..... **221**
Message Scope and Usage 221
Message Structure 221
Message Items Description 231
Business Example 313
Message Item Types **317**
Data Types 317
End Points 333
Indexes **376**
Index of Message Items 376
Index of XML tags 396
Index of Message Item Types 417
Revision Record **435**

Overview

Scope

This document describes a set of account information messages approved by the ISO 20022 Payments Standards Evaluation Group as UNIFI messages in March 2007. These messages can be used to provide account information for reconciliation and cash positioning.

This set includes the following messages: :
1. BankToCustomerAccountReport
2. BankToCustomerStatement
3. BankToCustomerDebitCreditNotification

How to read

In compliance with ISO 20022, UML (Unified Modelling Language) is used to depict business and logical models. As knowledge of UML is not a requirement to discuss the business standards, the data format for the messages is presented in a user-friendlier way. This way of representation is automatically generated from the models, thereby ensuring absolute consistency between the model information and the published standard.

Message Flows

Reporting from Account Servicer to Account Owner

Introduction

The Bank-to-Customer Cash Management messages are sent from the Account Servicer to the Account Owner, or a party authorised by the Account Owner to receive the account information (i.e. the Message Recipient).

Sequence Diagrams

The scenarios illustrate the reporting from Account Servicer to Account Owner

Scenario 1

The following service has been agreed between Account Owner and Account Servicer : During the day, the Account Servicer sends one or more BankToCustomerAccountReport messages to inform the AccountOwner of any intraday movements (booked and pending) on the account. At the end of the business day, the Account Servicer summarizes all booked entries in the BankToCustomerStatement and provides booked and available balance information.

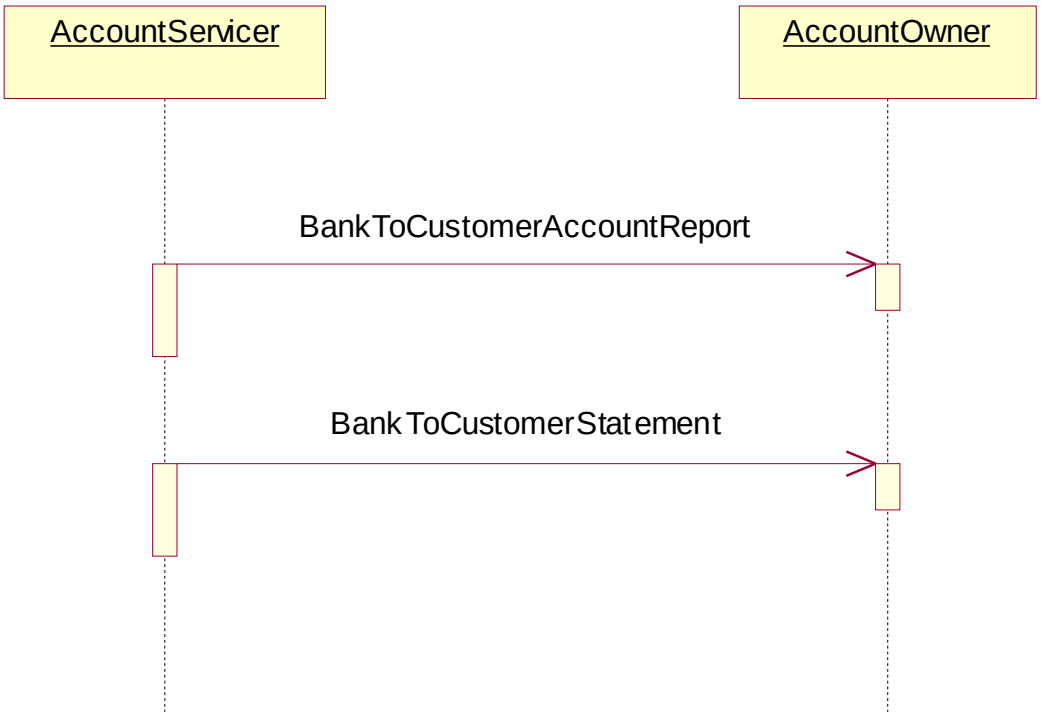

Scenario 2

The following service has been agreed between Account Owner and Account Servicer : During the day, the Account Servicer will send a BankToCustomerDebitCreditNotification for any incoming credits above a certain threshold. At a pre-agreed time during the day, the Account Servicer will also provide an intraday BankToCustomerAccountReport, summarizing all movements (booked and pending) which have been posted to the account since the start of the business day. The Account Servicer will also include balance information (booked and expected) in the message. At the end of the

business day, the Account Servicer summarizes all booked entries in the BankToCustomerStatement and provides booked and available balance information.

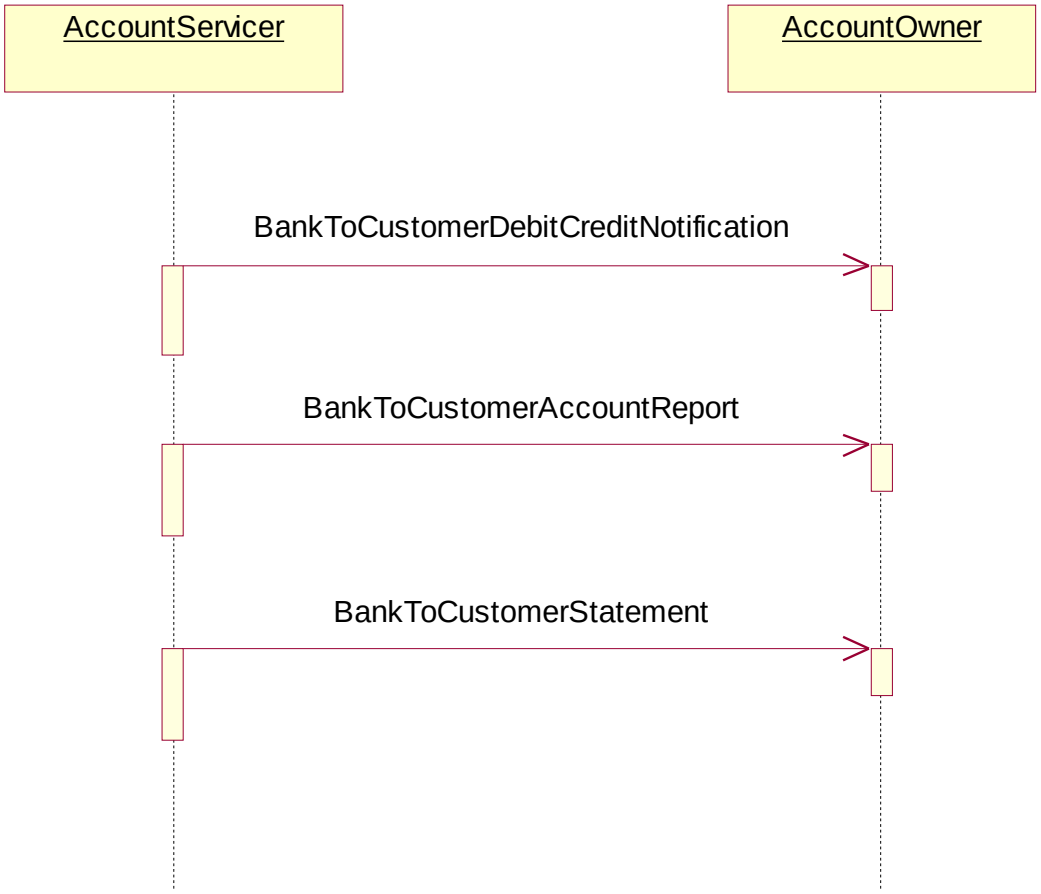

Scenario 3

This scenario shows that the Bank to Customer Cash Management messages can also be delivered to a party authorised by the Account Owner to receive the account information (ie the Message Recipient).

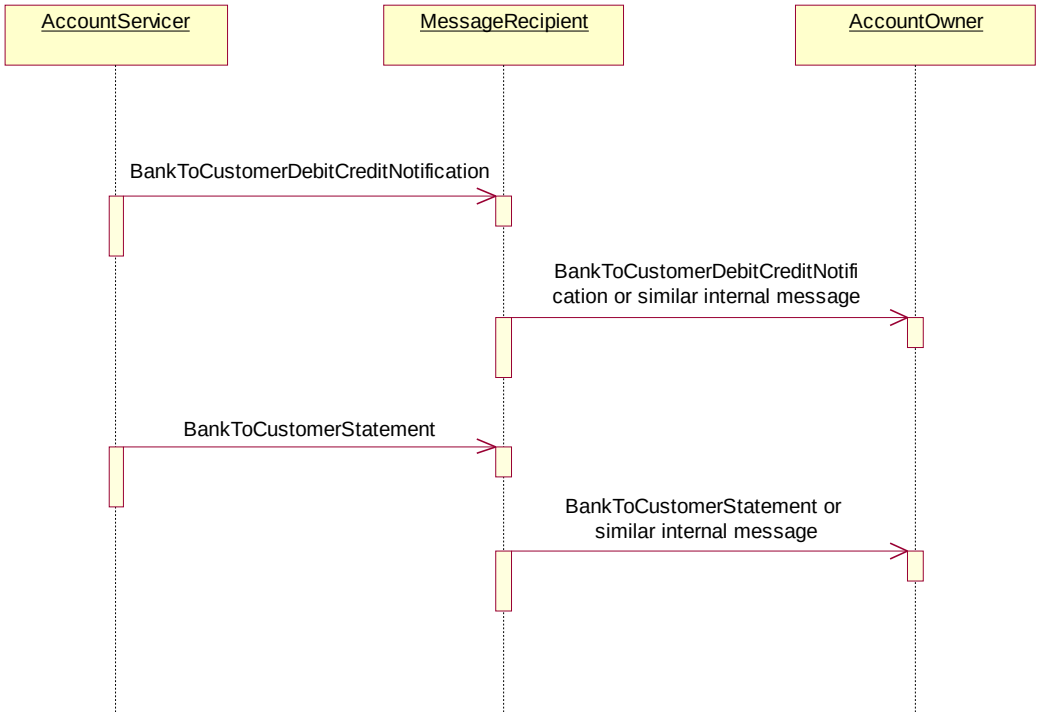

Reporting from Account Servicer through a Forwarding Agent

Introduction

The Bank-to-Customer Cash Management messages are sent from the Account Servicer through a Forwarding Agent (who plays the role of 'concentrating institution' for the account owner) to the the Account Owner, or a party authorised by the Account Owner to receive the account information (i.e. the Message Recipient). Which messages will be sent will be agreed between the 3 parties.

Sequence Diagrams

The scenarios illustrate the reporting through a Forwarding Agent

Scenario

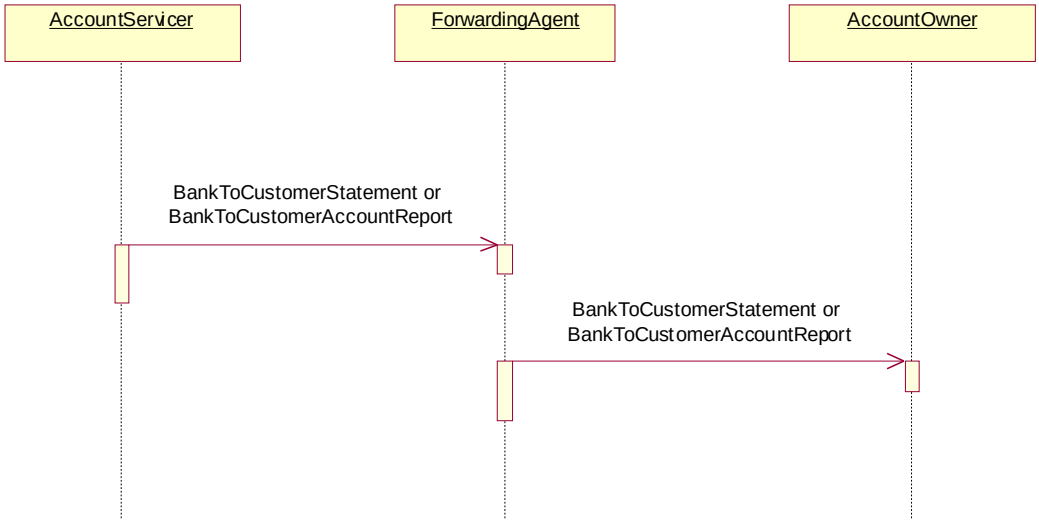
AccountServicer
ForwardingAgent
AccountOwner
BankToCustomerStatement or
BankToCustomerAccountReport
BankToCustomerStatement or
BankToCustomerAccountReport

MX camt.052.001.01 BankToCustomerAccountReportV01

Message Scope and Usage

Scope

The Bank-to-Customer Account Report message is sent by the account servicer to an account owner or to a party authorised by the account owner to receive the message. It can be used to inform the account owner, or authorised party, of the entries reported to the account, and/or to provide the owner with balance information on the account at a given point in time.

Usage

The Bank-to-Customer Account Report message can contain reports for more than 1 account. It provides information for cash management and/or reconciliation. It can be used to :
- report pending and booked items;
- provide balance information

It can include underlying details of transactions that have been included in the entry.
It is possible that the receiver of the message is not the account owner, but a party entitled by the account owner to receive the account information (also known as recipient).
For a statement that is required due to local legal stipulations, the Bank-to-Customer Account Statement message should be used.

Outline

The Bank-to-Customer Account Report message is composed of 2 building blocks:
A. Group Header
This building block is mandatory and present once. It contains elements such as Message Identification and CreationDateTime.
B. Report
This building block is mandatory and repetitive. It should be repeated for each account on which a report is provided. The report contains components such as Balance and Entry information.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<BkToCstmrAcctRpt V01>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		MessageRecipient	<MsgRcpt>	[0..1]	+	
1.4		MessagePagination	<MsgPgntn>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.5		PageNumber	<PgNb>	[1..1]	Text	
1.6		LastPageIndicator	<LastPgInd>	[1..1]	Indicator	
1.7		AdditionalInformation	<AddtlInf>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		Report	<Rpt>	[1..n]		
2.1		Identification	<Id>	[1..1]	Text	
2.2		ElectronicSequenceNumber	<ElctrncSeqNb>	[0..1]	Quantity	
2.3		LegalSequenceNumber	<LglSeqNb>	[0..1]	Quantity	
2.4		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
2.5		FromToDate	<FrToDt>	[0..1]	+	
2.6		CopyDuplicateIndicator	<CpyDplctInd>	[0..1]	Code	
2.7		Account	<Acct>	[1..1]		
2.8		Identification	<Id>	[1..1]	+	
2.9		Type	<Tp>	[0..1]		
2.10	{Or	Code	<Cd>	[1..1]	Code	
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.12		Currency	<Ccy>	[0..1]	Code	
2.13		Name	<Nm>	[0..1]	Text	
2.14		Owner	<Ownr>	[0..1]	+	
2.15		Servicer	<Svcr>	[0..1]	+	
2.16		RelatedAccount	<RltdAcct>	[0..1]	+	
2.17		Interest	<Intrst>	[0..n]		
2.18		Type	<Tp>	[0..1]		
2.19	{Or	Code	<Cd>	[1..1]	Code	
2.20	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.21		Rate	<Rate>	[0..n]		
2.22		Rate	<Rate>	[1..1]		
2.23	{Or	PercentageRate	<PctgRate>	[1..1]	Rate	
2.24	Or}	TextualRate	<TxtlRate>	[1..1]	Text	
2.25		ValidityRange	<VldtyRg>	[0..1]	+	
2.26		FromToDate	<FrToDt>	[0..1]	+	
2.27		Reason	<Rsn>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.28		Balance	<Bal>	[0..n]		
2.29		Type	<Tp>	[1..1]		
2.30	{Or	Code	<Cd>	[1..1]	Code	
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.32		CreditLine	<CdtLine>	[0..1]		
2.33		Included	<Incl>	[1..1]	Indicator	
2.34		Amount	<Amt>	[0..1]	Amount	
2.35		Amount	<Amt>	[1..1]	Amount	
2.36		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.37		Date	<Dt>	[1..1]	+	
2.38		Availability	<Avlbty>	[0..n]		
2.39		Date	<Dt>	[1..1]		
2.40	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text	
2.41	Or}	ActualDate	<ActlDt>	[1..1]	DateTime	
2.42		Amount	<Amt>	[1..1]	Amount	
2.43		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.44		TransactionsSummary	<TxsSummry>	[0..1]		
2.45		TotalEntries	<TtlNtries>	[0..1]		
2.46		NumberOfEntries	<NbOfNtries>	[0..1]	Text	
2.47		Sum	<Sum>	[0..1]	Quantity	
2.48		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity	
2.49		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code	
2.50		TotalCreditEntries	<TtlCdtNtries>	[0..1]		
2.51		NumberOfEntries	<NbOfNtries>	[0..1]	Text	
2.52		Sum	<Sum>	[0..1]	Quantity	
2.53		TotalDebitEntries	<TtlDbtNtries>	[0..1]		
2.54		NumberOfEntries	<NbOfNtries>	[0..1]	Text	
2.55		Sum	<Sum>	[0..1]	Quantity	
2.56		TotalEntriesPerBankTransactionCode	<TtlNtriesPerBkTxCd>	[0..n]		
2.57		NumberOfEntries	<NbOfNtries>	[0..1]	Text	
2.58		Sum	<Sum>	[0..1]	Quantity	
2.59		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity	
2.60		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code	
2.61		BankTransactionCode	<BkTxCd>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.62		Domain	<Domn>	[0..1]		
2.63		Code	<Cd>	[1..1]	Code	
2.64		Family	<Fmly>	[1..1]		
2.65		Code	<Cd>	[1..1]	Code	
2.66		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.67		Proprietary	<Prtry>	[0..1]		
2.68		Code	<Cd>	[1..1]	Text	
2.69		Issuer	<Issr>	[0..1]	Text	
2.70		Availability	<Avlbty>	[0..n]		
2.71		Date	<Dt>	[1..1]		
2.72	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text	
2.73	Or}	ActualDate	<ActlDt>	[1..1]	DateTime	
2.74		Amount	<Amt>	[1..1]	Amount	
2.75		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.76		Entry	<Ntry>	[0..n]		
2.77		Amount	<Amt>	[1..1]	Amount	
2.78		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.79		ReversalIndicator	<RvslInd>	[0..1]	Indicator	
2.80		Status	<Sts>	[1..1]	Code	
2.81		BookingDate	<BookgDt>	[0..1]	+	
2.82		ValueDate	<ValDt>	[0..1]	+	
2.83		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text	
2.84		Availability	<Avlbty>	[0..n]		
2.85		Date	<Dt>	[1..1]		
2.86	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text	
2.87	Or}	ActualDate	<ActlDt>	[1..1]	DateTime	
2.88		Amount	<Amt>	[1..1]	Amount	
2.89		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.90		BankTransactionCode	<BkTxCd>	[1..1]		
2.91		Domain	<Domn>	[0..1]		
2.92		Code	<Cd>	[1..1]	Code	
2.93		Family	<Fmly>	[1..1]		
2.94		Code	<Cd>	[1..1]	Code	
2.95		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.96		Proprietary	<Prtry>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.97		Code	<Cd>	[1..1]	Text	
2.98		Issuer	<Issr>	[0..1]	Text	
2.99		CommissionWaiverIndicator	<ComssnWvrInd>	[0..1]	Indicator	
2.100		AdditionalInformationIndicator	<AddtlInfInd>	[0..1]		
2.101		MessageNameIdentification	<MsgNmId>	[0..1]	Text	
2.102		MessageIdentification	<MsgId>	[0..1]	Text	
2.103		Batch	<Btch>	[0..n]		
2.104		MessageIdentification	<MsgId>	[0..1]	Text	
2.105		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text	
2.106		NumberOfTransactions	<NbOfTxs>	[0..1]	Text	
2.107		AmountDetails	<AmtDtls>	[0..1]		
2.108		InstructedAmount	<InstdAmt>	[0..1]		
2.109		Amount	<Amt>	[1..1]	Amount	
2.110		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.111		TransactionAmount	<TxAmt>	[0..1]		
2.112		Amount	<Amt>	[1..1]	Amount	
2.113		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.114		CounterValueAmount	<CntrValAmt>	[0..1]		
2.115		Amount	<Amt>	[1..1]	Amount	
2.116		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.117		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]		
2.118		Amount	<Amt>	[1..1]	Amount	
2.119		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.120		ProprietaryAmount	<PrtryAmt>	[0..n]		
2.121		Type	<Tp>	[1..1]	Text	
2.122		Amount	<Amt>	[1..1]	Amount	
2.123		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.124		Charges	<Chrgs>	[0..n]		
2.125		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount	
2.126		Amount	<Amt>	[1..1]	Amount	
2.127		Type	<Tp>	[0..1]		
2.128	{Or	Code	<Cd>	[1..1]	Code	
2.129	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text	
2.130		Rate	<Rate>	[0..1]	Rate	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.131		Bearer	 	[0..1]	Code	
2.132		Party	<Pty>	[0..1]	+	
2.133		Tax	<Tax>	[0..1]		
2.134		Identification	<Id>	[0..1]	Text	
2.135		Rate	<Rate>	[0..1]	Rate	
2.136		Amount	<Amt>	[0..1]	Amount	
2.137		Interest	<Intrst>	[0..n]		
2.138		Amount	<Amt>	[1..1]	Amount	
2.139		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.140		Type	<Tp>	[0..1]		
2.141	{Or	Code	<Cd>	[1..1]	Code	
2.142	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.143		Rate	<Rate>	[0..n]		
2.144		Rate	<Rate>	[1..1]		
2.145	{Or	PercentageRate	<PctgRate>	[1..1]	Rate	
2.146	Or}	TextualRate	<TxtlRate>	[1..1]	Text	
2.147		ValidityRange	<VldtyRg>	[0..1]	+	
2.148		FromToDate	<FrToDt>	[0..1]	+	
2.149		Reason	<Rsn>	[0..1]	Text	
2.150		TransactionDetails	<TxDtls>	[0..n]		
2.151		References	<Refs>	[0..1]		
2.152		MessageIdentification	<MsgId>	[0..1]	Text	
2.153		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text	
2.154		InstructionIdentification	<InstrId>	[0..1]	Text	
2.155		EndToEndIdentification	<EndToEndId>	[0..1]	Text	
2.156		TransactionIdentification	<TxId>	[0..1]	Text	
2.157		MandateIdentification	<MndtId>	[0..1]	Text	
2.158		ChequeNumber	<ChqNb>	[0..1]	Text	
2.159		ClearingSystemReference	<ClrSysRef>	[0..1]	Text	
2.160		Proprietary	<Prtry>	[0..1]		
2.161		Type	<Tp>	[1..1]	Text	
2.162		Reference	<Ref>	[1..1]	Text	
2.163		AmountDetails	<AmtDtls>	[0..1]		
2.164		InstructedAmount	<InstdAmt>	[0..1]		
2.165		Amount	<Amt>	[1..1]	Amount	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.166		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.167		TransactionAmount	<TxAmt>	[0..1]		
2.168		Amount	<Amt>	[1..1]	Amount	
2.169		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.170		CounterValueAmount	<CntrValAmt>	[0..1]		
2.171		Amount	<Amt>	[1..1]	Amount	
2.172		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.173		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]		
2.174		Amount	<Amt>	[1..1]	Amount	
2.175		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.176		ProprietaryAmount	<PrtryAmt>	[0..n]		
2.177		Type	<Tp>	[1..1]	Text	
2.178		Amount	<Amt>	[1..1]	Amount	
2.179		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.180		Availability	<Avlbty>	[0..n]		
2.181		Date	<Dt>	[1..1]		
2.182	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text	
2.183	Or}	ActualDate	<ActlDt>	[1..1]	DateTime	
2.184		Amount	<Amt>	[1..1]	Amount	
2.185		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.186		BankTransactionCode	<BkTxCd>	[0..1]		
2.187		Domain	<Domn>	[0..1]		
2.188		Code	<Cd>	[1..1]	Code	
2.189		Family	<Fmly>	[1..1]		
2.190		Code	<Cd>	[1..1]	Code	
2.191		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.192		Proprietary	<Prtry>	[0..1]		
2.193		Code	<Cd>	[1..1]	Text	
2.194		Issuer	<Issr>	[0..1]	Text	
2.195		Charges	<Chrgs>	[0..n]		
2.196		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount	
2.197		Amount	<Amt>	[1..1]	Amount	
2.198		Type	<Tp>	[0..1]		
2.199	{Or	Code	<Cd>	[1..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.200	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text	
2.201		Rate	<Rate>	[0..1]	Rate	
2.202		Bearer	 	[0..1]	Code	
2.203		Party	<Pty>	[0..1]	+	
2.204		Tax	<Tax>	[0..1]		
2.205		Identification	<Id>	[0..1]	Text	
2.206		Rate	<Rate>	[0..1]	Rate	
2.207		Amount	<Amt>	[0..1]	Amount	
2.208		Interest	<Intrst>	[0..n]		
2.209		Amount	<Amt>	[1..1]	Amount	
2.210		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.211		Type	<Tp>	[0..1]		
2.212	{Or	Code	<Cd>	[1..1]	Code	
2.213	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.214		Rate	<Rate>	[0..n]		
2.215		Rate	<Rate>	[1..1]		
2.216	{Or	PercentageRate	<PctgRate>	[1..1]	Rate	
2.217	Or}	TextualRate	<TxtlRate>	[1..1]	Text	
2.218		ValidityRange	<VldtyRg>	[0..1]	+	
2.219		FromToDate	<FrToDt>	[0..1]	+	
2.220		Reason	<Rsn>	[0..1]	Text	
2.221		RelatedParties	<RltdPties>	[0..1]		
2.222		InitiatingParty	<InitgPty>	[0..1]	+	
2.223		Debtor	<Dbtr>	[0..1]	+	
2.224		DebtorAccount	<DbtrAcct>	[0..1]	+	
2.225		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.226		Creditor	<Cdtr>	[0..1]	+	
2.227		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.228		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.229		TradingParty	<TradgPty>	[0..1]	+	
2.230		Proprietary	<Prtry>	[0..n]		
2.231		Type	<Tp>	[1..1]	Text	
2.232		Party	<Pty>	[1..1]	+	
2.233		RelatedAgents	<RltdAgts>	[0..1]		
2.234		DebtorAgent	<DbtrAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.235		CreditorAgent	<CdtrAgt>	[0..1]	+	
2.236		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+	
2.237		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+	
2.238		IntermediaryAgent3	<IntrmyAgt3>	[0..1]	+	
2.239		ReceivingAgent	<RcvgAgt>	[0..1]	+	
2.240		DeliveringAgent	<DlvrgAgt>	[0..1]	+	
2.241		IssuingAgent	<IssgAgt>	[0..1]	+	
2.242		SettlementPlace	<SttlmPlc>	[0..1]	+	
2.243		Proprietary	<Prtry>	[0..n]		
2.244		Type	<Tp>	[1..1]	Text	
2.245		Agent	<Agt>	[1..1]	+	
2.246		Purpose	<Purp>	[0..1]		
2.247	{Or	Code	<Cd>	[1..1]	Code	
2.248	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.249		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]		
2.250		RemittanceIdentification	<RmtId>	[0..1]	Text	
2.251		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code	
2.252		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text	
2.253		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]		
2.254		Name	<Nm>	[1..1]	Text	
2.255		Address	<Adr>	[1..1]	+	
2.256		RemittanceInformation	<RmtInf>	[0..1]		
2.257		Unstructured	<Ustrd>	[0..n]	Text	
2.258		Structured	<Strd>	[0..n]		
2.259		ReferredDocumentInformation	<RfrdDocInf>	[0..1]		
2.260		ReferredDocumentType	<RfrdDocTp>	[0..1]		
2.261	{Or	Code	<Cd>	[1..1]	Code	
2.262	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.263		Issuer	<Issr>	[0..1]	Text	
2.264		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text	
2.265		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime	
2.266		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]		
2.267	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount	
2.268	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.269	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount	
2.270	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount	
2.271	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount	
2.272		CreditorReferenceInformation	<CdtrRefInf>	[0..1]		
2.273		CreditorReferenceType	<CdtrRefTp>	[0..1]		
2.274	{Or	Code	<Cd>	[1..1]	Code	
2.275	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.276		Issuer	<Issr>	[0..1]	Text	
2.277		CreditorReference	<CdtrRef>	[0..1]	Text	
2.278		Invoicer	<Invcr>	[0..1]	+	
2.279		Invoicee	<Invcee>	[0..1]	+	
2.280		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text	
2.281		RelatedDates	<RltdDts>	[0..1]		
2.282		AcceptanceDateTime	<AccptncDtTm>	[0..1]	DateTime	
2.283		TradeDate	<TradDt>	[0..1]	DateTime	
2.284		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime	
2.285		StartDate	<StartDt>	[0..1]	DateTime	
2.286		EndDate	<EndDt>	[0..1]	DateTime	
2.287		TransactionDateTime	<TxDtTm>	[0..1]	DateTime	
2.288		Proprietary	<Prtry>	[0..n]		
2.289		Type	<Tp>	[1..1]	Text	
2.290	{Or	Date	<Dt>	[1..1]	DateTime	
2.291	Or}	DateTime	<DtTm>	[1..1]	DateTime	
2.292		RelatedPrice	<RltdPric>	[0..1]		
2.293	{Or	DealPrice	<DealPric>	[1..1]	Amount	
2.294	Or}	Proprietary	<Prtry>	[1..n]		
2.295		Type	<Tp>	[1..1]	Text	
2.296		Price	<Pric>	[1..1]	Amount	
2.297		RelatedQuantities	<RltdQties>	[0..n]		
2.298	{Or	Quantity	<Qty>	[1..1]	+	
2.299	Or}	Proprietary	<Prtry>	[1..1]		
2.300		Type	<Tp>	[1..1]	Text	
2.301		Quantity	<Qty>	[1..1]	Text	
2.302		FinancialInstrumentIdentification	<FinInstrmId>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.303	{Or	ISIN	<ISIN>	[1..1]	Identifier	
2.304	Or}	Proprietary	<Prtry>	[1..1]		
2.305		Type	<Tp>	[1..1]	Text	
2.306		Identification	<Id>	[1..1]	Text	
2.307		Tax	<Tax>	[0..1]	+	
2.308		ReturnInformation	<RtrInf>	[0..1]		
2.309		OriginalBankTransactionCode	<OrgnlBkTxCd>	[0..1]		
2.310		Domain	<Domn>	[0..1]		
2.311		Code	<Cd>	[1..1]	Code	
2.312		Family	<Fmly>	[1..1]		
2.313		Code	<Cd>	[1..1]	Code	
2.314		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.315		Proprietary	<Prtry>	[0..1]		
2.316		Code	<Cd>	[1..1]	Text	
2.317		Issuer	<Issr>	[0..1]	Text	
2.318		ReturnOriginator	<RtrOrgtr>	[0..1]	+	
2.319		ReturnReason	<RtrRsn>	[0..1]		
2.320	{Or	Code	<Cd>	[1..1]	Code	
2.321	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.322		AdditionalReturnReasonInformation	<AddtlRtrRsnInf>	[0..n]	Text	
2.323		CorporateAction	<CorpActn>	[0..1]		
2.324		Code	<Cd>	[0..1]	Text	
2.325		Number	<Nb>	[0..1]	Text	
2.326		Proprietary	<Prtry>	[0..1]	Text	
2.327		SafekeepingAccount	<SfkpgAcct>	[0..1]	+	
2.328		AdditionalTransactionInformation	<AddtlTxInf>	[0..1]	Text	
2.329		AdditionalEntryInformation	<AddtlNtryInf>	[0..1]	Text	
2.330		AdditionalReportInformation	<AddtlRptInf>	[0..1]	Text	

Message Items Description

*The following section identifies the elements of the **BankToCustomerAccountReportV01** message.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]
Definition: Common information for the message.

Type: *The **GroupHeader** block is composed of the following **GroupHeader23** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		MessageRecipient	<MsgRcpt>	[0..1]	+
1.4		MessagePagination	<MsgPgntn>	[0..1]	
1.7		AdditionalInformation	<AddtlInf>	[0..1]	Text

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the account servicing institution and sent to the account owner to unambiguously identify the message.

Usage: The account servicing institution has to make sure that 'MessageIdentification' is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created by the account servicer.

Data Type: ISODateTime

1.3 MessageRecipient <MsgRcpt>

Presence: [0..1]

Definition: Party that is entitled by the account owner to receive information about movements in the account.

Guideline : MessageRecipient should only be identified when different from the account owner.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

1.4 MessagePagination <MsgPgntn>

Presence: [0..1]

Definition: Pagination of the message.

Usage: the pagination of the message is only allowed when agreed between the parties.

Type: *This message item is composed of the following **Pagination** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.5		PageNumber	<PgNb>	[1..1]	Text
1.6		LastPageIndicator	<LastPgInd>	[1..1]	Indicator

1.5 PageNumber <PgNb>

Presence: [1..1]
Definition: Page number.
Data Type: Max5NumericText
Format: [0-9]{1,5}

1.6 LastPageIndicator <LastPgInd>

Presence: [1..1]
Definition: Indicates the last page.
Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

1.7 AdditionalInformation <AddtlInf>

Presence: [0..1]
Definition: Further details on the message.
Data Type: Max500Text
Format: maxLength: 500
minLength: 1

2.0 Report <Rpt>

Presence: [1..n]
Definition: Reports on a cash account.
Type: *The **Report** block is composed of the following **AccountReport9** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		Identification	<Id>	[1..1]	Text
2.2		ElectronicSequenceNumber	<ElctrncSeqNb>	[0..1]	Quantity
2.3		LegalSequenceNumber	<LglSeqNb>	[0..1]	Quantity
2.4		CreationDateTime	<CreDtTm>	[1..1]	DateTime
2.5		FromToDate	<FrToDt>	[0..1]	+
2.6		CopyDuplicateIndicator	<CpyDplctInd>	[0..1]	Code
2.7		Account	<Acct>	[1..1]	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.16		RelatedAccount	<RltdAcct>	[0..1]	+
2.17		Interest	<Intrst>	[0..n]	
2.28		Balance	<Bal>	[0..n]	
2.44		TransactionsSummary	<TxsSummry>	[0..1]	
2.76		Entry	<Ntry>	[0..n]	
2.330		AdditionalReportInformation	<AddtlRptInf>	[0..1]	Text

2.1 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of the account report, assigned by the account servicer.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.2 ElectronicSequenceNumber <ElctrncSeqNb>

Presence: [0..1]

Definition: Sequential number of the report, assigned by the account servicer. It is increased incrementally for each report sent electronically.

Data Type: Number

Format: fractionDigits: 0
totalDigits: 18

2.3 LegalSequenceNumber <LglSeqNb>

Presence: [0..1]

Definition: Legal sequential number of the report, assigned by the account servicer. It is increased incrementally for each report sent.

Usage : in those scenarios where eg a paper statement is a legal requirement, the paper statement may have a different numbering than the electronic sequential number. Paper statements can for instance only be sent if movement on the account has taken place, whereas electronic statements can be sent eg each day, regardless of whether movements have taken place or not.

Data Type: Number

Format: fractionDigits: 0
totalDigits: 18

2.4 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the report was created.

Data Type: ISODateTime

2.5 FromToDate <FrToDt>

Presence: [0..1]

Definition: Range of time between the start date and the end date for which the account report is issued.

Type: *This message item is composed of the following **DateTimePeriodDetails** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDateTime	<FrDtTm>	[1..1]	DateTime
	ToDateTime	<ToDtTm>	[1..1]	DateTime

For additional Type information, please refer to DateTimePeriodDetails p.345 in 'Message Item Types' section.

2.6 CopyDuplicateIndicator <CpyDplctInd>

Presence: [0..1]

Definition: Specifies if this document is a copy, a duplicate, or a duplicate of a copy.

Data Type: Code

*When this message item is present, one of the following **CopyDuplicate1Code** values must be used:*

Code	Name	Definition
CODU	CopyDuplicate	Message is being sent as a copy to a party other than the account owner, for information purposes and the message is a duplicate of a message previously sent.
COPY	Copy	Message is being sent as a copy to a party other than the account owner, for information purposes.
DUPL	Duplicate	Message is for information/confirmation purposes. It is a duplicate of a message previously sent.

2.7 Account <Acct>

Presence: [1..1]

Definition: Business relationship between two entities; one entity is the account owner, the other entity is the account servicer.

Type: *This message item is composed of the following **CashAccount13** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.8		Identification	<Id>	[1..1]	+
2.9		Type	<Tp>	[0..1]	
2.12		Currency	<Ccy>	[0..1]	Code
2.13		Name	<Nm>	[0..1]	Text
2.14		Owner	<Ownr>	[0..1]	+
2.15		Servicer	<Svcr>	[0..1]	+

2.8 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.

Type: *This message item is composed of one of the following **AccountIdentification3Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier
Or}	ProprietaryAccount	<PrtryAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification3Choice p.333 in 'Message Item Types' section.

2.9 Type <Tp>

Presence: [0..1]
Definition: Nature, or use, of the account.
Type: *This message item is composed of one of the following **CashAccountType2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.10	{Or	Code	<Cd>	[1..1]	Code
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text

2.10 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.9** Type.*
Definition: Nature or use of the account in a coded form.
Data Type: Code
*One of the following **CashAccountType4Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
CISH	CashIncome	Account used for payment of income if different from the current cash account.
COMM	Commission	Account used for commission if different from the account for payment.
LOAN	Loan	Account used for loans.
MGLD	MarginalLending	Account used for a marginal lending facility.
MOMA	MoneyMarket	Account used for money markets if different from the cash account.
NREX	NonResidentExternal	Account used for non-resident external.
ODFT	Overdraft	Account is used for overdrafts.
ONDP	OverNightDeposit	Account used for overnight deposits.

Code	Name	Definition
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SLRY	Salary	Accounts used for salary payments.
SVGS	Savings	Account used for savings.
TAXE	Tax	Account used for taxes if different from the account for payment.
TRAS	CashTrading	Account used for trading if different from the current cash account.

2.11 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.9** Type.*
Definition: Proprietary nature or use of the account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.12 Currency <Ccy>

Presence: [0..1]
Definition: Identification of the currency in which the account is held.
Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

2.13 Name <Nm>

Presence: [0..1]
Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.14 Owner <Ownr>

Presence: [0..1]
Definition: Party that legally owns the account.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.15 Servicer <Svcr>

Presence: [0..1]

Definition: Party that manages the account on behalf of the account owner, ie, manages the registration and booking of entries on the account, calculates balances on the account and provides information about the account.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.16 RelatedAccount <RltdAcct>

Presence: [0..1]

Definition: Identifies the parent account of the reported account.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.17 Interest <Intrst>

Presence: [0..n]

Definition: Provides general interest information that applies to the account at a particular moment in time.

Type: *This message item is composed of the following **AccountInterest1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.18		Type	<Tp>	[0..1]	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.21		Rate	<Rate>	[0..n]	
2.26		FromToDate	<FrToDt>	[0..1]	+
2.27		Reason	<Rsn>	[0..1]	Text

2.18 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of interest.
Type: *This message item is composed of one of the following* ***InterestType1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.19	{Or	Code	<Cd>	[1..1]	Code
2.20	Or}	Proprietary	<Prtry>	[1..1]	Text

2.19 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.18*** *Type.*
Definition: Specifies the type of interest.
Data Type: Code
One of the following ***InterestType1Code*** *values must be used:*

Code	Name	Definition
INDY	IntraDay	During or within a business day.
OVRN	OverNight	Period of time between the end of a business day and the start of the next business day (usually the day after).

2.20 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***2.18*** *Type.*
Definition: Specifies the type of interest in uncoded form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.21 Rate <Rate>

Presence: [0..n]
Definition: Set of elements qualifying the interest rate.
Type: *This message item is composed of the following* ***Rate1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.22		Rate	<Rate>	[1..1]	
2.25		ValidityRange	<VldtyRg>	[0..1]	+

2.22 Rate <Rate>

Presence: [1..1]

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.
Example percentage rate : Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Example Textual rate : Rate is expressed as a text.

Type: *This message item is composed of one of the following **RateTypeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.23	{Or	PercentageRate	<PctgRate>	[1..1]	Rate
2.24	Or}	TextualRate	<TxtlRate>	[1..1]	Text

2.23 PercentageRate <PctgRate>

Presence: [1..1]

*This message item is part of choice **2.22** Rate.*

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.24 TextualRate <TxtlRate>

Presence: [1..1]

*This message item is part of choice **2.22** Rate.*

Definition: Rate is expressed as a text.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.25 ValidityRange <VldtyRg>

Presence: [0..1]

Definition: An amount range where the interest rate is applicable

Type: *This message item is composed of the following **CurrencyAndAmountRange** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Amount	<Amt>	[1..1]	
	CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
	Currency	<Ccy>	[1..1]	Code

For additional Type information, please refer to CurrencyAndAmountRange p.339 in 'Message Item Types' section.

2.26 FromToDate <FrToDt>

Presence: [0..1]
Definition: Range of time between a start date and an end date for the calculation of the interest.
Type: *This message item is composed of the following **DateTimePeriodDetails** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDateTime	<FrDtTm>	[1..1]	DateTime
	ToDateTime	<ToDtTm>	[1..1]	DateTime

For additional Type information, please refer to DateTimePeriodDetails p.345 in 'Message Item Types' section.

2.27 Reason <Rsn>

Presence: [0..1]
Definition: Underlying reason for the interest, eg, yearly credit interest on a savings account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.28 Balance <Bal>

Presence: [0..n]
Definition: Set of elements defining the balance(s).
Type: *This message item is composed of the following **CashBalance1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.29		Type	<Tp>	[1..1]	
2.32		CreditLine	<CdtLine>	[0..1]	
2.35		Amount	<Amt>	[1..1]	Amount
2.36		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code
2.37		Date	<Dt>	[1..1]	+
2.38		Availability	<Avlbty>	[0..n]	

Rule(s): AvailabilityAndTypeRule
If Type is equal to ForwardAvailable, Availability is not allowed.

2.29 Type <Tp>

Presence: [1..1]
Definition: Specifies the nature of a balance, eg, opening booked balance.
Type: *This message item is composed of one of the following* ***BalanceType1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.30	{Or	Code	<Cd>	[1..1]	Code
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text

2.30 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.29*** *Type.*
Definition: Specifies the code for the type of a balance, eg, opening booked balance.
Data Type: Code
One of the following ***BalanceType8Code*** *values must be used:*

Code	Name	Definition
CCLA	CollectionClosingAvailable	Collection closing balance of amount of money that is at the disposal of the account owner on the date specified.
CCLB	CollectionClosingBooked	Collection balance of the account at the end of the pre-agreed account reporting period. It is the sum of the opening booked balance at the beginning of the period and all entries booked to the account during the pre-agreed account reporting period.
CFWA	CollectionForwardAvailable	Collection forward available balance of money that is at the disposal of the account owner on the date specified.
CITA	CollectionInterimAvailable	Collection available balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
CITB	CollectionInterimBooked	Collection balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
CLAV	ClosingAvailable	Closing balance of amount of money that is at the disposal of the account owner on the date specified.
CLBD	ClosingBooked	Balance of the account at the end of the pre-agreed account reporting period. It is the sum of the opening booked balance at the beginning of the period and all entries booked to the account during the pre-agreed account reporting period.
COPA	CollectionOpeningAvailable	Collection opening balance of amount of money that is at the disposal of the account owner on the date specified.

Code	Name	Definition
COPB	CollectionOpeningBooked	Collection book balance of the account at the beginning of the account reporting period. It always equals the closing book balance from the previous report.
CXPC	CollectionExpected	Collection balance, composed of booked entries and pending items known at the time of calculation , which projects the end of day balance if everything is booked on the account and no other entry is posted.
DCLA	DisbursementClosingAvailable	Disbursement closing balance of amount of money that is at the disposal of the account owner on the date specified.
DCLB	DisbursementClosingBooked	Disbursement balance of the account at the end of the pre-agreed account reporting period. It is the sum of the opening booked balance at the beginning of the period and all entries booked to the account during the pre-agreed account reporting period.
DFWA	DisbursementForwardAvailable	Disbursement forward available balance of money that is at the disposal of the account owner on the date specified.
DITA	DisbursementInterimAvailable	Disbursement available balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
DITB	DisbursementInterimBooked	Disbursement balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
DOPA	DisbursementOpeningAvailable	Disbursement opening balance of amount of money that is at the disposal of the account owner on the date specified.
DOPB	DisbursementOpeningBooked	Disbursement book balance of the account at the beginning of the account reporting period. It always equals the closing book balance from the previous report.
DXPC	DisbursementExpected	Disbursement balance, composed of booked entries and pending items known at the time of calculation , which projects the end of day balance if everything is booked on the account and no other entry is posted.
FWAV	ForwardAvailable	Forward available balance of money that is at the disposal of the account owner on the date specified.
ICLA	InvestmentClosingAvailable	Investment closing balance of an amount of money that is at the disposal of the account owner on the date specified.
ICLB	InvestmentClosingBooked	Investment (mutual funds) balance of the account at the end of the pre-agreed account reporting period. It is the sum of the opening booked balance at the beginning of the period and all entries booked to the account during the pre-agreed account reporting period.

Code	Name	Definition
IFWA	InvestmentForwardAvailable	Investment forward available balance of money that is at the disposal of the account owner on the date specified.
IITA	InvestmentInterimAvailable	Investment available balance for calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
IITB	InvestmentInterimBooked	Investment balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
IOPA	InvestmentOpeningAvailable	Investment opening balance of amount of money that is at the disposal of the account owner on the date specified.
IOPB	InvestmentOpeningBooked	Investment book balance of the account at the beginning of the account reporting period. It always equals the closing book balance from the previous report.
ITAV	InterimAvailable	Available balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
ITBD	InterimBooked	Balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
IXPC	InvestmentExpected	Investment balance, composed of booked entries and pending items known at the time of calculation , which projects the end of day balance if everything is booked on the account and no other entry is posted.
OPAV	OpeningAvailable	Opening balance of amount of money that is at the disposal of the account owner on the date specified.
OPBD	OpeningBooked	Book balance of the account at the beginning of the account reporting period. It always equals the closing book balance from the previous report.
PRCD	PreviouslyClosedBooked	Balance of the account at the previously closed account reporting period. The opening booked balance for the new period has to be equal to this balance. Usage: the previously booked closing balance should equal (inclusive date) the booked closing balance of the date it references and equal the actual booked opening balance of the current date.

Code	Name	Definition
XPCD	Expected	Balance, composed of booked entries and pending items known at the time of calculation , which projects the end of day balance if everything is booked on the account and no other entry is posted.

2.31 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.29** Type.*
Definition: Specifies a proprietary code for the balance type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.32 CreditLine <CdtLine>

Presence: [0..1]
Definition: Provides further details on the credit line information.
Type: *This message item is composed of the following **CreditLine1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.33		Included	<Incl>	[1..1]	Indicator
2.34		Amount	<Amt>	[0..1]	Amount

2.33 Included <Incl>

Presence: [1..1]
Definition: Indicates whether the credit line is included or not.

Usage : if not present, credit line is not included in the balance amount.
Data Type: *One of the following **TrueFalseIndicator** values must be used:*
MeaningWhenTrue: True
MeaningWhenFalse: False

2.34 Amount <Amt>

Presence: [0..1]
Definition: Amount of money of the credit line.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**

ValidationByTable

2.35 Amount <Amt>

Presence: [1..1]

Definition: Currency and amount of money of the cash balance.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.36 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]

Definition: Indicates whether the balance is a credit or a debit balance. A zero balance is considered to be a credit balance

Data Type: Code

One of the following ***CreditDebitCode*** *values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.37 Date <Dt>

Presence: [1..1]

Definition: Specifies the date (and time) of the balance.

Type: *This message item is composed of one of the following* ***DateAndDateTimeChoice*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	Date	<Dt>	[1..1]	DateTime
Or}	DateTime	<DtTm>	[1..1]	DateTime

For additional Type information, please refer to DateAndDateTimeChoice p.345 in 'Message Item Types' section.

2.38 Availability <Avlbty>

Presence: [0..n]

Definition: Set of elements used to indicate when the booked amount of money will become available, ie can be accessed and start generating interest.

Usage : this type of info is eg used in US, and is linked to particular instruments, such as cheques.
Example : When a cheque is deposited, it will be booked on the deposit day, but the funds will only be accessible as of the indicated availability day (according to national banking regulations).

Type: *This message item is composed of the following* ***CashBalanceAvailability1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.39		Date	<Dt>	[1..1]	
2.42		Amount	<Amt>	[1..1]	Amount
2.43		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

2.39 Date <Dt>

Presence: [1..1]
Definition: Indicates when the amount of money will become available.
Type: *This message item is composed of one of the following* ***CashBalanceAvailabilityDate1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.40	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text
2.41	Or}	ActualDate	<ActlDt>	[1..1]	DateTime

2.40 NumberOfDays <NbOfDays>

Presence: [1..1]
This message item is part of choice ***2.39*** *Date.*
Definition: Indicates the number of float days attached to the balance.
Data Type: Max15PlusSignedNumericText
Format: [+]{0,1}[0-9]{1,15}

2.41 ActualDate <ActlDt>

Presence: [1..1]
This message item is part of choice ***2.39*** *Date.*
Definition: Identifies the actual availability date.
Data Type: ISODate

2.42 Amount <Amt>

Presence: [1..1]
Definition: Identifies the available amount.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.43 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]

Definition: Indicates whether the availability balance is a credit or a debit balance. A zero balance is considered to be a credit balance

Data Type: Code

*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.44 TransactionsSummary <TxsSummry>

Presence: [0..1]

Definition: Set of element providing summary information on entries.

Type: *This message item is composed of the following **TotalTransactions1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.45		TotalEntries	<TtlNtries>	[0..1]	
2.50		TotalCreditEntries	<TtlCdtNtries>	[0..1]	
2.53		TotalDebitEntries	<TtlDbtNtries>	[0..1]	
2.56		TotalEntriesPerBankTransactionCode	<TtlNtriesPerBkTxCd>	[0..n]	

2.45 TotalEntries <TtlNtries>

Presence: [0..1]

Definition: Indicates the total number and sum of debit and credit entries.

Type: *This message item is composed of the following **NumberAndSumOfTransactions2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.46		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.47		Sum	<Sum>	[0..1]	Quantity
2.48		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity
2.49		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code

Guideline(s): DebitCreditIndicatorGuideline
DebitCreditIndicator should be present when TotalNetEntryAmount is present.

2.46 NumberOfEntries <NbOfNtries>

Presence: [0..1]

Definition: Number of individual entries included in the report.

Data Type: Max15NumericText

Format: [0-9]{1,15}

2.47 Sum <Sum>

Presence: [0..1]
Definition: Total of all individual entries included in the report.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.48 TotalNetEntryAmount <TtlNetNtryAmt>

Presence: [0..1]
Definition: Resulting amount of the netted amounts for all debit and credit entries.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.49 CreditDebitIndicator <CdtDbtInd>

Presence: [0..1]
Definition: Indicates whether the total net entry amount is a credit or a debit amount.
Data Type: Code
*When this message item is present, one of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.50 TotalCreditEntries <TtlCdtNtries>

Presence: [0..1]
Definition: Indicates the total number and sum of credit entries.
Type: *This message item is composed of the following **NumberAndSumOfTransactions1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.51		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.52		Sum	<Sum>	[0..1]	Quantity

2.51 NumberOfEntries <NbOfNtries>

Presence: [0..1]
Definition: Number of individual entries included in the report.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.52 Sum <Sum>

Presence: [0..1]
Definition: Total of all individual entries included in the report.

Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.53 TotalDebitEntries <TtlDbtNtries>

Presence: [0..1]
Definition: Indicates the total number and sum of debit entries.
Type: *This message item is composed of the following **NumberAndSumOfTransactions1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.54		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.55		Sum	<Sum>	[0..1]	Quantity

2.54 NumberOfEntries <NbOfNtries>

Presence: [0..1]
Definition: Number of individual entries included in the report.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.55 Sum <Sum>

Presence: [0..1]
Definition: Total of all individual entries included in the report.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.56 TotalEntriesPerBankTransactionCode <TtlNtriesPerBkTxCd>

Presence: [0..n]
Definition: Indicates the total number and sum of entries per bank transaction code.
Type: *This message item is composed of the following **NumberAndSumOfTransactionsPerBankTransactionCode1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.57		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.58		Sum	<Sum>	[0..1]	Quantity
2.59		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity
2.60		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
2.61		BankTransactionCode	<BkTxCd>	[1..1]	
2.70		Availability	<Avlbty>	[0..n]	

Guideline(s): DebitCreditIndicatorGuideline
DebitCreditIndicator should be present when TotalNetEntryAmount is present.

2.57 NumberOfEntries <NbOfNtries>

Presence: [0..1]
Definition: Number of individual entries contained in the report.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.58 Sum <Sum>

Presence: [0..1]
Definition: Total of all individual entries included in the report.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.59 TotalNetEntryAmount <TtlNetNtryAmt>

Presence: [0..1]
Definition: Resulting amount of the netted amounts for all debit and credit entries per bank transaction code.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.60 CreditDebitIndicator <CdtDbtInd>

Presence: [0..1]
Definition: Indicates whether the total net entry amount is a credit or a debit amount.
Data Type: Code
*When this message item is present, one of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.61 BankTransactionCode <BkTxCd>

Presence: [1..1]
Definition: Set of elements to fully identify the type of underlying transaction resulting in an entry.
Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.62		Domain	<Domn>	[0..1]	
2.67		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.62 Domain <Domn>

Presence: [0..1]

Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.

Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.63		Code	<Cd>	[1..1]	Code
2.64		Family	<Fmly>	[1..1]	

2.63 Code <Cd>

Presence: [1..1]

Definition: Specifies the business area of the underlying transaction.

Data Type: ExternalBankTransactionDomainCode

Format: maxLength: 4
minLength: 1

2.64 Family <Fmly>

Presence: [1..1]

Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.

Type: *This message item is composed of the following **BankTransactionCodeStructure3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.65		Code	<Cd>	[1..1]	Code
2.66		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.65 Code <Cd>

Presence: [1..1]

Definition: Specifies the family within a domain.

Data Type: ExternalBankTransactionFamilyCode

Format: maxLength: 4
minLength: 1

2.66 SubFamilyCode <SubFmlyCd>

Presence: [1..1]

Definition: Specifies the sub-product family within a specific family.

Data Type: ExternalBankTransactionSubFamilyCode

Format: maxLength: 4
minLength: 1

2.67 Proprietary <Prtry>

Presence: [0..1]

Definition: Proprietary identification of the bank transaction code, as defined by the issuer.

Type: *This message item is composed of the following **ProprietaryBankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.68		Code	<Cd>	[1..1]	Text
2.69		Issuer	<Issr>	[0..1]	Text

2.68 Code <Cd>

Presence: [1..1]

Definition: Proprietary bank transaction code to identify the underlying transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.69 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the proprietary bank transaction code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.70 Availability <Avlbty>

Presence: [0..n]

Definition: Set of elements used to indicate when the booked amount of money will become available, ie can be accessed and start generating interest.

Type: *This message item is composed of the following **CashBalanceAvailability1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.71		Date	<Dt>	[1..1]	
2.74		Amount	<Amt>	[1..1]	Amount
2.75		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

2.71 Date <Dt>

Presence: [1..1]

Definition: Indicates when the amount of money will become available.

Type: *This message item is composed of one of the following* ***CashBalanceAvailabilityDate1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.72	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text
2.73	Or}	ActualDate	<ActlDt>	[1..1]	DateTime

2.72 NumberOfDays <NbOfDays>

Presence: [1..1]
This message item is part of choice ***2.71*** *Date.*
Definition: Indicates the number of float days attached to the balance.
Data Type: Max15PlusSignedNumericText
Format: [+]{0,1}[0-9]{1,15}

2.73 ActualDate <ActlDt>

Presence: [1..1]
This message item is part of choice ***2.71*** *Date.*
Definition: Identifies the actual availability date.
Data Type: ISODate

2.74 Amount <Amt>

Presence: [1..1]
Definition: Identifies the available amount.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.75 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Indicates whether the availability balance is a credit or a debit balance. A zero balance is considered to be a credit balance
Data Type: Code
One of the following ***CreditDebitCode*** *values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.76 Entry <Ntry>

Presence: [0..n]
Definition: Specifies the elements of an entry in the report.

Usage: At least one reference must be provided to identify the entry and its underlying transaction(s).

Type: *This message item is composed of the following **ReportEntry1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.77		Amount	<Amt>	[1..1]	Amount
2.78		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code
2.79		ReversalIndicator	<RvslInd>	[0..1]	Indicator
2.80		Status	<Sts>	[1..1]	Code
2.81		BookingDate	<BookgDt>	[0..1]	+
2.82		ValueDate	<ValDt>	[0..1]	+
2.83		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text
2.84		Availability	<Avlbty>	[0..n]	
2.90		BankTransactionCode	<BkTxCd>	[1..1]	
2.99		CommissionWaiverIndicator	<ComssnWvrInd>	[0..1]	Indicator
2.100		AdditionalInformationIndicator	<AddtlInfInd>	[0..1]	
2.103		Batch	<Btch>	[0..n]	
2.107		AmountDetails	<AmtDtls>	[0..1]	
2.124		Charges	<Chrgs>	[0..n]	
2.137		Interest	<Intrst>	[0..n]	
2.150		TransactionDetails	<TxDtls>	[0..n]	
2.329		AdditionalEntryInformation	<AddtlNtryInf>	[0..1]	Text

Rule(s): StatusAndBookingDateRule
If Status is pending, BookingDate is not allowed.

Guideline(s): ReferenceGuideline
At least one reference should present to identify the underlying transaction(s).

2.77 Amount <Amt>

Presence: [1..1]
Definition: Amount of money in the cash entry.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.78 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Specifies if an entry is a credit or a debit.
Data Type: Code
*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.79 ReversalIndicator <RvslInd>

Presence: [0..1]
Definition: Indicates whether the entry is the result of a reversal operation.

Usage : this element should only be present if the entry is the result of a reversal operation.
If the CreditDebitIndicator is CRDT and ReversalIndicator is Yes, the original operation was a debit entry.
If the CreditDebitIndicator is DBIT and ReversalIndicator is Yes, the original operation was a credit entry.

Data Type: *One of the following **TrueFalseIndicator** values must be used:*
MeaningWhenTrue: True
MeaningWhenFalse: False

2.80 Status <Sts>

Presence: [1..1]
Definition: Status of an entry on the books of the account servicer.
Data Type: Code
*One of the following **EntryStatus2Code** values must be used:*

Code	Name	Definition
BOOK	Booked	Booked means that the transfer of money has been completed between account servicer and account owner Usage : Status Booked does not necessarily imply finality of money as this depends on other factors such as the payment system used, the completion of the end-to-end transaction and the terms agreed between account servicer and owner. Status Booked is the only status that can be reversed.
INFO	Information	Entry is only provided for information, and no booking on the account owner's account in the account servicer's ledger has been performed.
PDNG	Pending	Booking on the account owner's account in the account servicer's ledger has not been completed.

Code	Name	Definition
		Usage : this can be used for expected items, or for items for which some conditions still need to be fulfilled before they can be booked. If booking takes place, the entry will be included with status Booked in subsequent account report or statement. Status Pending cannot be reversed.

2.81 BookingDate <BookgDt>

Presence: [0..1]

Definition: Date and time when an entry is posted to an account on the account servicer's books.

Usage : Booking date is only present if Status is booked.

Type: *This message item is composed of one of the following **DateAndDateTimeChoice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	Date	<Dt>	[1..1]	DateTime
Or}	DateTime	<DtTm>	[1..1]	DateTime

For additional Type information, please refer to DateAndDateTimeChoice p.345 in 'Message Item Types' section.

2.82 ValueDate <ValDt>

Presence: [0..1]

Definition: Date and time assets become available to the account owner (in a credit entry), or cease to be available to the account owner (in a debit entry).

Usage : When entry status is pending , and value date is present, value date refers to an expected/requested value date.
For entries which are subject to availability/float (and for which availability information is present), value date must not be used, as the availability component identifies the number of availability days.

Type: *This message item is composed of one of the following **DateAndDateTimeChoice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	Date	<Dt>	[1..1]	DateTime
Or}	DateTime	<DtTm>	[1..1]	DateTime

For additional Type information, please refer to DateAndDateTimeChoice p.345 in 'Message Item Types' section.

2.83 AccountServicerReference <AcctSvcrRef>

Presence: [0..1]

Definition: Account servicing institution's reference for the entry.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.84 Availability <Avlbty>

Presence: [0..n]

Definition: Set of elements used to indicate when the booked amount of money will become available, ie can be accessed and start generating interest.

Usage : this type of info is eg used in US, and is linked to particular instruments, such as cheques.
Example : When a cheque is deposited, it will be booked on the deposit day, but the funds will only be accessible as of the indicated availability day (according to national banking regulations).

Type: *This message item is composed of the following **CashBalanceAvailability1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.85		Date	<Dt>	[1..1]	
2.88		Amount	<Amt>	[1..1]	Amount
2.89		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

2.85 Date <Dt>

Presence: [1..1]

Definition: Indicates when the amount of money will become available.

Type: *This message item is composed of one of the following **CashBalanceAvailabilityDate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.86	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text
2.87	Or}	ActualDate	<ActlDt>	[1..1]	DateTime

2.86 NumberOfDays <NbOfDays>

Presence: [1..1]

*This message item is part of choice **2.85** Date.*

Definition: Indicates the number of float days attached to the balance.

Data Type: Max15PlusSignedNumericText

Format: [+]{0,1}[0-9]{1,15}

2.87 ActualDate <ActlDt>

Presence: [1..1]

*This message item is part of choice **2.85** Date.*

Definition: Identifies the actual availability date.

Data Type: ISODate

2.88 Amount <Amt>

Presence: [1..1]

Definition: Identifies the available amount.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.89 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]

Definition: Indicates whether the availability balance is a credit or a debit balance. A zero balance is considered to be a credit balance

Data Type: Code

*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.90 BankTransactionCode <BkTxCd>

Presence: [1..1]

Definition: Set of elements to fully identify the type of underlying transaction resulting in the entry.

Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.91		Domain	<Domn>	[0..1]	
2.96		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.91 Domain <Domn>

Presence: [0..1]

Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.

Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.92		Code	<Cd>	[1..1]	Code
2.93		Family	<Fmly>	[1..1]	

2.92 Code <Cd>

Presence: [1..1]
Definition: Specifies the business area of the underlying transaction.
Data Type: ExternalBankTransactionDomainCode
Format: maxLength: 4
minLength: 1

2.93 Family <Fmly>

Presence: [1..1]
Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.
Type: *This message item is composed of the following **BankTransactionCodeStructure3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.94		Code	<Cd>	[1..1]	Code
2.95		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.94 Code <Cd>

Presence: [1..1]
Definition: Specifies the family within a domain.
Data Type: ExternalBankTransactionFamilyCode
Format: maxLength: 4
minLength: 1

2.95 SubFamilyCode <SubFmlyCd>

Presence: [1..1]
Definition: Specifies the sub-product family within a specific family.
Data Type: ExternalBankTransactionSubFamilyCode
Format: maxLength: 4
minLength: 1

2.96 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary identification of the bank transaction code, as defined by the issuer.
Type: *This message item is composed of the following **ProprietaryBankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.97		Code	<Cd>	[1..1]	Text
2.98		Issuer	<Issr>	[0..1]	Text

2.97 Code <Cd>

Presence: [1..1]
Definition: Proprietary bank transaction code to identify the underlying transaction.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.98 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the proprietary bank transaction code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.99 CommissionWaiverIndicator <ComssnWvrInd>

Presence: [0..1]
Definition: Indicates whether the transaction is exempt from commission.
Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

2.100 AdditionalInformationIndicator <AddtlInfInd>

Presence: [0..1]
Definition: Indicates whether the underlying transaction details are provided through a separate message, eg in case of aggregate bookings.
Type: *This message item is composed of the following **MessageIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.101		MessageNameIdentification	<MsgNmId>	[0..1]	Text
2.102		MessageIdentification	<MsgId>	[0..1]	Text

2.101 MessageNameIdentification <MsgNmId>

Presence: [0..1]
Definition: Specifies the message name identifier of the message that will be used to provide additional details.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.102 MessageIdentification <MsgId>

Presence: [0..1]
Definition: Specifies the identification of the message that will be used to provide additional details.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.103 Batch <Btch>

Presence: [0..n]
Definition: Set of elements providing details on batched transactions.

Usage : this element can be repeated in case more than one batch is included in the entry, eg, in lockbox scenarios, to specify the ID and number of transactions included in each of the batches.

Type: *This message item is composed of the following **BatchInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.104		MessageIdentification	<MsgId>	[0..1]	Text
2.105		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text
2.106		NumberOfTransactions	<NbOfTxs>	[0..1]	Text

2.104 MessageIdentification <MsgId>

Presence: [0..1]
Definition: Point to point reference assigned by the sending party to unambiguously identify the batch of transactions.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.105 PaymentInformationIdentification <PmtInfId>

Presence: [0..1]
Definition: Reference assigned by a sending party to unambiguously identify a payment information block within a payment message.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.106 NumberOfTransactions <NbOfTxs>

Presence: [0..1]
Definition: Number of individual transactions included in the batch.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.107 AmountDetails <AmtDtls>

Presence: [0..1]

Definition: Set of elements providing information on the original amount.

Usage : This component (on entry level) should be used when a total original batch or aggregate amount has to be provided. (If required, the individual original amounts can be included in the same component on transaction details level).

Type: *This message item is composed of the following **AmountAndCurrencyExchange2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.108		InstructedAmount	<InstdAmt>	[0..1]	
2.111		TransactionAmount	<TxAmt>	[0..1]	
2.114		CounterValueAmount	<CntrValAmt>	[0..1]	
2.117		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]	
2.120		ProprietaryAmount	<PrtryAmt>	[0..n]	

2.108 InstructedAmount <InstdAmt>

Presence: [0..1]

Definition: Identifies the amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party and provides currency exchange info in case the instructed amount and/or currency is/are different from the entry amount and/or currency.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.109		Amount	<Amt>	[1..1]	Amount
2.110		CurrencyExchange	<CcyXchg>	[0..1]	+

2.109 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.110 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.111 TransactionAmount <TxAmt>

Presence: [0..1]

Definition: Amount of the underlying transaction.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.112		Amount	<Amt>	[1..1]	Amount
2.113		CurrencyExchange	<CcyXchg>	[0..1]	+

2.112 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.113 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.114 CounterValueAmount <CntrValAmt>

Presence: [0..1]

Definition: Identifies the countervalue amount and provides currency exchange information. Either the counter amount quoted in an FX deal, or the result of the currency information applied to an instructed amount, before deduction of charges.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.115		Amount	<Amt>	[1..1]	Amount
2.116		CurrencyExchange	<CcyXchg>	[0..1]	+

2.115 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.116 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.117 AnnouncedPostingAmount <AnncdPstngAmt>

Presence: [0..1]

Definition: Information on the amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.

Amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.
In those situations, this amount may alternatively be called entitled amount.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.118		Amount	<Amt>	[1..1]	Amount
2.119		CurrencyExchange	<CcyXchg>	[0..1]	+

2.118 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.119 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.120 ProprietaryAmount <PrtryAmt>

Presence: [0..n]
Definition: Provides proprietary amount information.
Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.121		Type	<Tp>	[1..1]	Text
2.122		Amount	<Amt>	[1..1]	Amount
2.123		CurrencyExchange	<CcyXchg>	[0..1]	+

2.121 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of amount.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.122 Amount <Amt>

Presence: [1..1]
Definition: Identifies the proprietary amount.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.123 CurrencyExchange <CcyXchg>

Presence: [0..1]
Definition: Reports on currency exchange information.
Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.124 Charges <Chrgs>

Presence: [0..n]
Definition: Provides information on the charges included in the entry amount.

Usage : this component is used on entry level in case of batch or aggregate bookings.

Type: *This message item is composed of the following **ChargesInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.125		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount
2.126		Amount	<Amt>	[1..1]	Amount
2.127		Type	<Tp>	[0..1]	
2.130		Rate	<Rate>	[0..1]	Rate
2.131		Bearer	 	[0..1]	Code
2.132		Party	<Pty>	[0..1]	+
2.133		Tax	<Tax>	[0..1]	

2.125 TotalChargesAndTaxAmount <TtlChrgsAndTaxAmt>

Presence: [0..1]
Definition: Total of all charges and taxes applied to the entry.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode

[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.126 Amount <Amt>

Presence: [1..1]

Definition: Transaction charges to be paid by the charge bearer.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.127 Type <Tp>

Presence: [0..1]

Definition: Identifies the type of charge.

Type: *This message item is composed of one of the following* ***ChargeTypeChoice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.128	{Or	Code	<Cd>	[1..1]	Code
2.129	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text

2.128 Code <Cd>

Presence: [1..1]

This message item is part of choice ***2.127*** *Type.*

Definition: Service for which a charge is asked or paid, eg, brokerage fees.

Data Type: Code

One of the following ***ChargeType1Code*** *values must be used:*

Code	Name	Definition
BRKF	BrokerageFee	Fee paid to a broker for services provided.
COMM	Commission	Fee paid for services provided.

2.129 ProprietaryCode <PrtryCd>

Presence: [1..1]

This message item is part of choice ***2.127*** *Type.*

Definition: Type of charge is a bilaterally agreed code.

Data Type: Max4AlphaNumericText

Format: [a-zA-Z0-9]{1,4}

2.130 Rate <Rate>

Presence: [0..1]
Definition: Rate used to calculate the amount of the charge or fee.
Data Type: PercentageRate
Format: fractionDigits: 10
totalDigits: 11

2.131 Bearer

Presence: [0..1]
Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.
Data Type: Code
*When this message item is present, one of the following **ChargeBearerType1Code** values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.132 Party <Pty>

Presence: [0..1]
Definition: Party that takes the transaction charges or to which the transaction charges are due.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.133 Tax <Tax>

Presence: [0..1]
Definition: Specifies tax details applied to charges.
Type: *This message item is composed of the following **TaxCharges1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.134		Identification	<Id>	[0..1]	Text
2.135		Rate	<Rate>	[0..1]	Rate
2.136		Amount	<Amt>	[0..1]	Amount

2.134 Identification <Id>

Presence: [0..1]

Definition: Reference identifying the nature of tax levied, eg, Value Added Tax (VAT).

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.135 Rate <Rate>

Presence: [0..1]

Definition: Rate used for calculation of the tax.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.136 Amount <Amt>

Presence: [0..1]

Definition: Amount of money resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.137 Interest <Intrst>

Presence: [0..n]

Definition: Set of elements providing details on the interest amount included in the entry amount.

Usage : This component is used on entry level in case of batch or aggregate bookings.

Type: *This message item is composed of the following* ***TransactionInterest1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.138		Amount	<Amt>	[1..1]	Amount
2.139		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.140		Type	<Tp>	[0..1]	
2.143		Rate	<Rate>	[0..n]	
2.148		FromToDate	<FrToDt>	[0..1]	+
2.149		Reason	<Rsn>	[0..1]	Text

2.138 Amount <Amt>

Presence: [1..1]
Definition: Identifies the amount of interest included in the entry amount.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.139 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Identifies whether the interest amount included in the entry amount is positive (CRDT) or negative (DBIT).
Data Type: Code
One of the following ***CreditDebitCode*** *values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.140 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of interest.
Type: *This message item is composed of one of the following* ***InterestType1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.141	{Or	Code	<Cd>	[1..1]	Code
2.142	Or}	Proprietary	<Prtry>	[1..1]	Text

2.141 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.140** Type.*

Definition: Specifies the type of interest.

Data Type: Code

*One of the following **InterestType1Code** values must be used:*

Code	Name	Definition
INDY	IntraDay	During or within a business day.
OVRN	OverNight	Period of time between the end of a business day and the start of the next business day (usually the day after).

2.142 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.140** Type.*

Definition: Specifies the type of interest in uncoded form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.143 Rate <Rate>

Presence: [0..n]

Definition: Set of elements qualifying the interest rate.

Type: *This message item is composed of the following **Rate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.144		Rate	<Rate>	[1..1]	
2.147		ValidityRange	<VldtyRg>	[0..1]	+

2.144 Rate <Rate>

Presence: [1..1]

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.
Example percentage rate : Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Example Textual rate : Rate is expressed as a text.

Type: *This message item is composed of one of the following **RateTypeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.145	{Or	PercentageRate	<PctgRate>	[1..1]	Rate
2.146	Or}	TextualRate	<TxtlRate>	[1..1]	Text

2.145 PercentageRate <PctgRate>

Presence: [1..1]

*This message item is part of choice **2.144** Rate.*

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.146 TextualRate <TxtlRate>

Presence: [1..1]

*This message item is part of choice **2.144** Rate.*

Definition: Rate is expressed as a text.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.147 ValidityRange <VldtyRg>

Presence: [0..1]

Definition: An amount range where the interest rate is applicable

Type: *This message item is composed of the following **CurrencyAndAmountRange** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Amount	<Amt>	[1..1]	
	CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
	Currency	<Ccy>	[1..1]	Code

For additional Type information, please refer to CurrencyAndAmountRange p.339 in 'Message Item Types' section.

2.148 FromToDate <FrToDt>

Presence: [0..1]

Definition: Range of time between a start date and an end date.

Type: *This message item is composed of the following **DateTimePeriodDetails** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDateTime	<FrDtTm>	[1..1]	DateTime
	ToDateTime	<ToDtTm>	[1..1]	DateTime

For additional Type information, please refer to DateTimePeriodDetails p.345 in 'Message Item Types' section.

2.149 Reason <Rsn>

Presence: [0..1]

Definition: Underlying reason for the interest, eg, yearly credit interest on a savings account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.150 TransactionDetails <TxDtls>

Presence: [0..n]
Definition: Set of elements providing information on the underlying transaction (s).
Type: *This message item is composed of the following **EntryTransaction1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.151		References	<Refs>	[0..1]	
2.163		AmountDetails	<AmtDtls>	[0..1]	
2.180		Availability	<Avlbty>	[0..n]	
2.186		BankTransactionCode	<BkTxCd>	[0..1]	
2.195		Charges	<Chrgs>	[0..n]	
2.208		Interest	<Intrst>	[0..n]	
2.221		RelatedParties	<RltdPties>	[0..1]	
2.233		RelatedAgents	<RltdAgts>	[0..1]	
2.246		Purpose	<Purp>	[0..1]	
2.249		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]	
2.256		RemittanceInformation	<RmtInf>	[0..1]	
2.281		RelatedDates	<RltdDts>	[0..1]	
2.292		RelatedPrice	<RltdPric>	[0..1]	
2.297		RelatedQuantities	<RltdQties>	[0..n]	
2.302		FinancialInstrumentIdentification	<FinInstrmId>	[0..1]	
2.307		Tax	<Tax>	[0..1]	+
2.308		ReturnInformation	<RtrInf>	[0..1]	
2.323		CorporateAction	<CorpActn>	[0..1]	
2.327		SafekeepingAccount	<SfkpgAcct>	[0..1]	+
2.328		AdditionalTransactionInformation	<AddtlTxInf>	[0..1]	Text

2.151 References <Refs>

Presence: [0..1]
Definition: Set of elements providing the identification of the underlying transaction.
Type: *This message item is composed of the following **TransactionReferences1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.152		MessageIdentification	<MsgId>	[0..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.153		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text
2.154		InstructionIdentification	<InstrId>	[0..1]	Text
2.155		EndToEndIdentification	<EndToEndId>	[0..1]	Text
2.156		TransactionIdentification	<TxId>	[0..1]	Text
2.157		MandateIdentification	<MndtId>	[0..1]	Text
2.158		ChequeNumber	<ChqNb>	[0..1]	Text
2.159		ClearingSystemReference	<ClrSysRef>	[0..1]	Text
2.160		Proprietary	<Prtry>	[0..1]	

2.152 MessageIdentification <MsgId>

Presence: [0..1]

Definition: Point to point reference assigned by the instructing party of the underlying message.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.153 AccountServicerReference <AcctSvcrRef>

Presence: [0..1]

Definition: The account servicing institution's reference for the transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.154 InstructionIdentification <InstrId>

Presence: [0..1]

Definition: Unique identification as assigned by an instructing party for an instructed party to unambiguously identify the instruction.

Usage: the instruction identification is a point to point reference that can be used between the instructing party and the instructed party to refer to the individual instruction. It can be included in several messages related to the instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.155 EndToEndIdentification <EndToEndId>

Presence: [0..1]

Definition: Unique identification assigned by the initiating party to unumbiguously identify the transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain.

Usage: The end-to-end identification can be used for reconciliation or to link tasks relating to the transaction. It can be included in several messages related to the transaction.

Usage: In case there are technical limitations to carry on multiple references, the end-to-end identification must be carried on throughout the entire end-to-end chain.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.156 TransactionIdentification <TxId>

Presence: [0..1]

Definition: Unique identification assigned by the first instructing agent to unambiguously identify the transaction and passed on, unchanged, throughout the entire interbank chain.

Usage: The transaction identification can be used for reconciliation, tracking or to link tasks relating to the transaction on the interbank level.
Usage: The instructing agent has to make sure the transaction identification is unique for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.157 MandateIdentification <MndtId>

Presence: [0..1]

Definition: Reference of the direct debit mandate that has been signed between by the debtor and the creditor.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.158 ChequeNumber <ChqNb>

Presence: [0..1]

Definition: Identifies the cheque number.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.159 ClearingSystemReference <ClrSysRef>

Presence: [0..1]

Definition: Unique and unambiguous identifier for a payment instruction, assigned by the clearing system.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.160 Proprietary <Prtry>

Presence: [0..1]

Definition: Proprietary reference of an underlying transaction.

Type: *This message item is composed of the following **ProprietaryReference1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.161		Type	<Tp>	[1..1]	Text
2.162		Reference	<Ref>	[1..1]	Text

2.161 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of reference reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.162 Reference <Ref>

Presence: [1..1]
Definition: Proprietary reference specification related to the underlying transaction.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.163 AmountDetails <AmtDtls>

Presence: [0..1]
Definition: Set of elements providing details information on the original amount.

Usage: This component (on transaction level) should be used in case booking is for a single transaction and the original amount is different from the entry amount. It can also be used in case individual original amounts are provided in case of a batch or aggregate booking.

Type: *This message item is composed of the following **AmountAndCurrencyExchange2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.164		InstructedAmount	<InstdAmt>	[0..1]	
2.167		TransactionAmount	<TxAmt>	[0..1]	
2.170		CounterValueAmount	<CntrValAmt>	[0..1]	
2.173		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]	
2.176		ProprietaryAmount	<PrtryAmt>	[0..n]	

2.164 InstructedAmount <InstdAmt>

Presence: [0..1]
Definition: Identifies the amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party and provides currency exchange info in case the instructed amount and/or currency is/are different from the entry amount and/or currency.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.165		Amount	<Amt>	[1..1]	Amount
2.166		CurrencyExchange	<CcyXchg>	[0..1]	+

2.165 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.166 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.167 TransactionAmount <TxAmt>

Presence: [0..1]

Definition: Amount of the underlying transaction.

Type: *This message item is composed of the following* ***AmountAndCurrencyExchangeDetails1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.168		Amount	<Amt>	[1..1]	Amount

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.169		CurrencyExchange	<CcyXchg>	[0..1]	+

2.168 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.169 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.170 CounterValueAmount <CntrValAmt>

Presence: [0..1]

Definition: Identifies the countervalue amount and provides currency exchange information. Either the counter amount quoted in an FX deal, or the result of the currency information applied to an instructed amount, before deduction of charges.

Type: *This message item is composed of the following* ***AmountAndCurrencyExchangeDetails1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.171		Amount	<Amt>	[1..1]	Amount

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.172		CurrencyExchange	<CcyXchg>	[0..1]	+

2.171 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.172 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.173 AnnouncedPostingAmount <AnncdPstngAmt>

Presence: [0..1]

Definition: Information on the amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.

Amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.
In those situations, this amount may alternatively be called entitled amount.

Type: *This message item is composed of the following* ***AmountAndCurrencyExchangeDetails1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.174		Amount	<Amt>	[1..1]	Amount
2.175		CurrencyExchange	<CcyXchg>	[0..1]	+

2.174 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.175 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.176 ProprietaryAmount <PrtryAmt>

Presence: [0..n]

Definition: Provides proprietary amount information.

Type: *This message item is composed of the following* ***AmountAndCurrencyExchangeDetails2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.177		Type	<Tp>	[1..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.178		Amount	<Amt>	[1..1]	Amount
2.179		CurrencyExchange	<CcyXchg>	[0..1]	+

2.177 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of amount.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.178 Amount <Amt>

Presence: [1..1]
Definition: Identifies the proprietary amount.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.179 CurrencyExchange <CcyXchg>

Presence: [0..1]
Definition: Reports on currency exchange information.
Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.180 Availability <Avlbty>

Presence: [0..n]

Definition: Set of elements used to indicate when the booked funds will become available, ie can be accessed and start generating interest.

Usage : this type of info is eg used in US, and is linked to particular instruments, such as cheques.
Example : When a cheque is deposited, it will be booked on the deposit day, but the funds will only be accessible as of the indicated availability day (according to national banking regulations).

Type: *This message item is composed of the following **CashBalanceAvailability1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.181		Date	<Dt>	[1..1]	
2.184		Amount	<Amt>	[1..1]	Amount
2.185		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

2.181 Date <Dt>

Presence: [1..1]
Definition: Indicates when the amount of money will become available.
Type: *This message item is composed of one of the following **CashBalanceAvailabilityDate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.182	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text
2.183	Or}	ActualDate	<ActlDt>	[1..1]	DateTime

2.182 NumberOfDays <NbOfDays>

Presence: [1..1]
*This message item is part of choice **2.181** Date.*
Definition: Indicates the number of float days attached to the balance.
Data Type: Max15PlusSignedNumericText
Format: [+]{0,1}[0-9]{1,15}

2.183 ActualDate <ActlDt>

Presence: [1..1]
*This message item is part of choice **2.181** Date.*
Definition: Identifies the actual availability date.
Data Type: ISODate

2.184 Amount <Amt>

Presence: [1..1]
Definition: Identifies the available amount.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0

totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.185 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]

Definition: Indicates whether the availability balance is a credit or a debit balance. A zero balance is considered to be a credit balance

Data Type: Code

*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.186 BankTransactionCode <BkTxCd>

Presence: [0..1]

Definition: Set of elements to fully identify the type of underlying transaction resulting in an entry.

Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.187		Domain	<Domn>	[0..1]	
2.192		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.187 Domain <Domn>

Presence: [0..1]

Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.

Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.188		Code	<Cd>	[1..1]	Code
2.189		Family	<Fmly>	[1..1]	

2.188 Code <Cd>

Presence: [1..1]
Definition: Specifies the business area of the underlying transaction.
Data Type: ExternalBankTransactionDomainCode
Format: maxLength: 4
minLength: 1

2.189 Family <Fmly>

Presence: [1..1]
Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.
Type: *This message item is composed of the following **BankTransactionCodeStructure3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.190		Code	<Cd>	[1..1]	Code
2.191		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.190 Code <Cd>

Presence: [1..1]
Definition: Specifies the family within a domain.
Data Type: ExternalBankTransactionFamilyCode
Format: maxLength: 4
minLength: 1

2.191 SubFamilyCode <SubFmlyCd>

Presence: [1..1]
Definition: Specifies the sub-product family within a specific family.
Data Type: ExternalBankTransactionSubFamilyCode
Format: maxLength: 4
minLength: 1

2.192 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary identification of the bank transaction code, as defined by the issuer.
Type: *This message item is composed of the following **ProprietaryBankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.193		Code	<Cd>	[1..1]	Text
2.194		Issuer	<Issr>	[0..1]	Text

2.193 Code <Cd>

Presence: [1..1]
Definition: Proprietary bank transaction code to identify the underlying transaction.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.194 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the proprietary bank transaction code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.195 Charges <Chrgs>

Presence: [0..n]
Definition: Provides information on the charges included in the entry amount.

Usage : This component (on transaction level) can be used in case the booking is for a single transaction, and charges are included in the entry amount. It can also be used in case individual charge amounts are applied to individual transactions in case of a batch or aggregate amount booking.

Type: *This message item is composed of the following **ChargesInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.196		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount
2.197		Amount	<Amt>	[1..1]	Amount
2.198		Type	<Tp>	[0..1]	
2.201		Rate	<Rate>	[0..1]	Rate
2.202		Bearer	 	[0..1]	Code
2.203		Party	<Pty>	[0..1]	+
2.204		Tax	<Tax>	[0..1]	

2.196 TotalChargesAndTaxAmount <TtlChrgsAndTaxAmt>

Presence: [0..1]
Definition: Total of all charges and taxes applied to the entry.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.197 Amount <Amt>

Presence: [1..1]

Definition: Transaction charges to be paid by the charge bearer.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.198 Type <Tp>

Presence: [0..1]

Definition: Identifies the type of charge.

Type: *This message item is composed of one of the following* ***ChargeTypeChoice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.199	{Or	Code	<Cd>	[1..1]	Code
2.200	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text

2.199 Code <Cd>

Presence: [1..1]

This message item is part of choice ***2.198*** *Type.*

Definition: Service for which a charge is asked or paid, eg, brokerage fees.

Data Type: Code

One of the following ***ChargeType1Code*** *values must be used:*

Code	Name	Definition
BRKF	BrokerageFee	Fee paid to a broker for services provided.
COMM	Commission	Fee paid for services provided.

2.200 ProprietaryCode <PrtryCd>

Presence: [1..1]
*This message item is part of choice **2.198** Type.*
Definition: Type of charge is a bilaterally agreed code.

Data Type: Max4AlphaNumericText
Format: [a-zA-Z0-9]{1,4}

2.201 Rate <Rate>

Presence: [0..1]
Definition: Rate used to calculate the amount of the charge or fee.
Data Type: PercentageRate
Format: fractionDigits: 10
totalDigits: 11

2.202 Bearer

Presence: [0..1]
Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.
Data Type: Code
*When this message item is present, one of the following **ChargeBearerType1Code** values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.203 Party <Pty>

Presence: [0..1]
Definition: Party that takes the transaction charges or to which the transaction charges are due.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.204 Tax <Tax>

Presence: [0..1]
Definition: Specifies tax details applied to charges.
Type: *This message item is composed of the following **TaxCharges1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.205		Identification	<Id>	[0..1]	Text
2.206		Rate	<Rate>	[0..1]	Rate
2.207		Amount	<Amt>	[0..1]	Amount

2.205 Identification <Id>

Presence: [0..1]
Definition: Reference identifying the nature of tax levied, eg, Value Added Tax (VAT).
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.206 Rate <Rate>

Presence: [0..1]
Definition: Rate used for calculation of the tax.
Data Type: PercentageRate
Format: fractionDigits: 10
totalDigits: 11

2.207 Amount <Amt>

Presence: [0..1]
Definition: Amount of money resulting from the calculation of the tax.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.208 Interest <Intrst>

Presence: [0..n]
Definition: Set of elements providing details on the interest amount included in the entry amount.

Usage : This component (on transaction level) can be used in case the booking is for a single transaction, and interest amount is included in the entry amount. It can also be used in case individual interest amounts are applied to individual transactions in case of a batch or aggregate amount booking.

Type: *This message item is composed of the following **TransactionInterest1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.209		Amount	<Amt>	[1..1]	Amount
2.210		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code
2.211		Type	<Tp>	[0..1]	
2.214		Rate	<Rate>	[0..n]	
2.219		FromToDate	<FrToDt>	[0..1]	+
2.220		Reason	<Rsn>	[0..1]	Text

2.209 Amount <Amt>

Presence: [1..1]

Definition: Identifies the amount of interest included in the entry amount.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.210 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]

Definition: Identifies whether the interest amount included in the entry amount is positive (CRDT) or negative (DBIT).

Data Type: Code

*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.211 Type <Tp>

Presence: [0..1]

Definition: Specifies the type of interest.

Type: *This message item is composed of one of the following **InterestType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.212	{Or	Code	<Cd>	[1..1]	Code
2.213	Or}	Proprietary	<Prtry>	[1..1]	Text

2.212 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.211** Type.*
Definition: Specifies the type of interest.
Data Type: Code
*One of the following **InterestType1Code** values must be used:*

Code	Name	Definition
INDY	IntraDay	During or within a business day.
OVRN	OverNight	Period of time between the end of a business day and the start of the next business day (usually the day after).

2.213 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.211** Type.*
Definition: Specifies the type of interest in uncoded form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.214 Rate <Rate>

Presence: [0..n]
Definition: Set of elements qualifying the interest rate.
Type: *This message item is composed of the following **Rate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.215		Rate	<Rate>	[1..1]	
2.218		ValidityRange	<VldtyRg>	[0..1]	+

2.215 Rate <Rate>

Presence: [1..1]
Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.
Example percentage rate : Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Example Textual rate : Rate is expressed as a text.
Type: *This message item is composed of one of the following **RateTypeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.216	{Or	PercentageRate	<PctgRate>	[1..1]	Rate
2.217	Or}	TextualRate	<TxtlRate>	[1..1]	Text

2.216 PercentageRate <PctgRate>

Presence: [1..1]

*This message item is part of choice **2.215** Rate.*

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.217 TextualRate <TxtlRate>

Presence: [1..1]

*This message item is part of choice **2.215** Rate.*

Definition: Rate is expressed as a text.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.218 ValidityRange <VldtyRg>

Presence: [0..1]

Definition: An amount range where the interest rate is applicable

Type: *This message item is composed of the following **CurrencyAndAmountRange** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Amount	<Amt>	[1..1]	
	CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
	Currency	<Ccy>	[1..1]	Code

For additional Type information, please refer to CurrencyAndAmountRange p.339 in 'Message Item Types' section.

2.219 FromToDate <FrToDt>

Presence: [0..1]

Definition: Range of time between a start date and an end date.

Type: *This message item is composed of the following **DateTimePeriodDetails** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDateTime	<FrDtTm>	[1..1]	DateTime

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	ToDateTime	<ToDtTm>	[1..1]	DateTime

For additional Type information, please refer to DateTimePeriodDetails p.345 in 'Message Item Types' section.

2.220 Reason <Rsn>

Presence: [0..1]
Definition: Underlying reason for the interest, eg, yearly credit interest on a savings account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.221 RelatedParties <RltdPties>

Presence: [0..1]
Definition: Set of elements identifying the parties related to the underlying transaction.
Type: *This message item is composed of the following **TransactionParty1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.222		InitiatingParty	<InitgPty>	[0..1]	+
2.223		Debtor	<Dbtr>	[0..1]	+
2.224		DebtorAccount	<DbtrAcct>	[0..1]	+
2.225		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.226		Creditor	<Cdtr>	[0..1]	+
2.227		CreditorAccount	<CdtrAcct>	[0..1]	+
2.228		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.229		TradingParty	<TradgPty>	[0..1]	+
2.230		Proprietary	<Prtry>	[0..n]	

2.222 InitiatingParty <InitgPty>

Presence: [0..1]
Definition: Party initiating the payment to an agent. In the payment context, this can either be the debtor (in a credit transfer), the creditor (in a direct debit), or a party that initiates the payment on behalf of the debtor or creditor. In the context of treasury, the party that instructs the trading party to execute a treasury deal on its behalf.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.223 Debtor <Dbtr>

Presence: [0..1]
Definition: Party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.224 DebtorAccount <DbtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the debtor.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.225 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.226 Creditor <Cdtr>

Presence: [0..1]
Definition: Party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.227 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor of the payment transaction.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.228 UltimateCreditor <UltmtCdtr>

Presence: [0..1]
Definition: Ultimate party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.229 TradingParty <TradgPty>

Presence: [0..1]

Definition: Party that plays an active role in planning and executing the transactions that create or liquidate investments of the investors assets, or that move the investor's assets from one investment to another. A trading party is a trade instructor, an investment decision-maker, a post trade administrator, or a trader. In the context of treasury, it is the party negotiates and executes the treasury transaction.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.230 Proprietary <Prtry>

Presence: [0..n]

Definition: Provides proprietary party information.

Type: *This message item is composed of the following **ProprietaryParty1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.231		Type	<Tp>	[1..1]	Text
2.232		Party	<Pty>	[1..1]	+

2.231 Type <Tp>

Presence: [1..1]

Definition: Identifies the type of proprietary party reported.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.232 Party <Pty>

Presence: [1..1]

Definition: Proprietary party.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.233 RelatedAgents <RltdAgts>

Presence: [0..1]
Definition: Set of elements identifying the agents related to the underlying transaction.
Type: *This message item is composed of the following **TransactionAgents1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.234		DebtorAgent	<DbtrAgt>	[0..1]	+
2.235		CreditorAgent	<CdtrAgt>	[0..1]	+
2.236		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+
2.237		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+
2.238		IntermediaryAgent3	<IntrmyAgt3>	[0..1]	+
2.239		ReceivingAgent	<RcvgAgt>	[0..1]	+
2.240		DeliveringAgent	<DlvrgAgt>	[0..1]	+
2.241		IssuingAgent	<IssgAgt>	[0..1]	+
2.242		SettlementPlace	<SttlmPlc>	[0..1]	+
2.243		Proprietary	<Prtry>	[0..n]	

2.234 DebtorAgent <DbtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.235 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.236 IntermediaryAgent1 <IntrmyAgt1>

Presence: [0..1]
Definition: Agent between the debtor agent and creditor agent.

Usage: If more than one intermediary agent is present, then IntermediaryAgent1 identifies the agent between the debtor agent and the intermediary agent 2.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.237 IntermediaryAgent2 <IntrmyAgt2>

Presence: [0..1]
Definition: Agent between the debtor agent and creditor agent.

Usage: If more than two intermediary agents are present, then IntermediaryAgent2 identifies the agent between the intermediary agent 1 and the intermediary agent 3.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.238 IntermediaryAgent3 <IntrmyAgt3>

Presence: [0..1]
Definition: Agent between the debtor agent and creditor agent.

Usage: If IntermediaryAgent3 is present, then it identifies the agent between the intermediary agent 2 and the creditor agent.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.239 ReceivingAgent <RcvgAgt>

Presence: [0..1]

Definition: Party that receives securities from the delivering agent at the place of settlement, eg, central securities depository.
Can also be used in the context of treasury operations.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.240 DeliveringAgent <DlvrgAgt>

Presence: [0..1]

Definition: Party that delivers securities to the receiving agent at the place of settlement, eg, central securities depository.
Can also be used in the context of treasury operations.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.241 IssuingAgent <IssgAgt>

Presence: [0..1]

Definition: Legal entity that has the right to issue securities.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.242 SettlementPlace <SttlmPlc>

Presence: [0..1]
Definition: Place where settlement of the securities takes place.

Note : this is typed by a financial institution identification - as this is the standard way of identifying eg securities settlement agent/central system.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.243 Proprietary <Prtry>

Presence: [0..n]
Definition: Proprietary agent related to the underlying transaction.
Type: *This message item is composed of the following **ProprietaryAgent1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.244		Type	<Tp>	[1..1]	Text
2.245		Agent	<Agt>	[1..1]	+

2.244 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of proprietary agent reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.245 Agent <Agt>

Presence: [1..1]
Definition: Proprietary agent.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.246 Purpose <Purp>

Presence: [0..1]

Definition: Underlying reason for the payment transaction, eg, a charity payment, or a commercial agreement between the creditor and the debtor.

Usage: purpose is used by the end-customers, ie originating party, initiating party, debtor, creditor, final party, to provide information concerning the nature of the payment transaction. Purpose is a content element, which is not used for processing by any of the agents involved in the payment chain.

Type: *This message item is composed of one of the following **Purpose1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.247	{Or	Code	<Cd>	[1..1]	Code
2.248	Or}	Proprietary	<Prtry>	[1..1]	Text

2.247 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.246** Purpose.*

Definition: Specifies the underlying reason for the payment transaction, as published in an external purpose code list.

Data Type: ExternalPurposeCode

Format: maxLength: 35
minLength: 1

2.248 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.246** Purpose.*

Definition: User community specific purpose.

Usage: When available, codes provided by local communities should be used.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.249 RelatedRemittanceInformation <RltdRmtInf>

Presence: [0..10]

Definition: Information related to the handling of the remittance information by any of the agents in the transaction processing chain.

Type: *This message item is composed of the following **RemittanceLocation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.250		RemittanceIdentification	<RmtId>	[0..1]	Text
2.251		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code
2.252		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text
2.253		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]	

2.250 RemittanceIdentification <RmtId>

Presence: [0..1]

Definition: Unique and unambiguous identification of the remittance information, e.g. a remittance advice, which is sent separately from the payment instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.251 RemittanceLocationMethod <RmtLctnMtd>

Presence: [0..1]

Definition: Specifies the method used to deliver the remittance advice information.

Data Type: Code

*When this message item is present, one of the following **RemittanceLocationMethod1Code** values must be used:*

Code	Name	Definition
EDIC	ElectronicDataInterchange	Remittance advice information must be sent through Electronic Data Interchange (EDI).
EMAL	EMail	Remittance advice information must be sent through e-mail.
FAXI	Fax	Remittance advice information must be faxed.
POST	Post	Remittance advice information must be sent through postal services.
URID	UniformResourceIdentifier	Remittance advice information needs to be sent to a Uniform Resource Identifier (URI). URI is a compact string of characters that uniquely identify an abstract or physical resource. URI's are the super-set of identifiers, such as URLs, email addresses, ftp sites, etc, and as such, provide the syntax for all of the identification schemes.

2.252 RemittanceLocationElectronicAddress <RmtLctnElctrncAdr>

Presence: [0..1]

Definition: Electronic address to which an agent is to send the remittance information.

Data Type: Max256Text

Format: maxLength: 256
minLength: 1

2.253 RemittanceLocationPostalAddress <RmtLctnPstlAdr>

Presence: [0..1]

Definition: Postal address to which an agent is to send the remittance information.

Type: *This message item is composed of the following **NameAndAddress3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.254		Name	<Nm>	[1..1]	Text
2.255		Address	<Adr>	[1..1]	+

2.254 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and is usually used to identify that identity.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.255 Address <Adr>

Presence: [1..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.369 in 'Message Item Types' section.

2.256 RemittanceInformation <RmtInf>

Presence: [0..1]
Definition: Information that enables the matching, ie, reconciliation, of a payment with the items that the payment is intended to settle, eg, commercial invoices in an account receivable system.
Type: *This message item is composed of the following **RemittanceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.257		Unstructured	<Ustrd>	[0..n]	Text
2.258		Structured	<Strd>	[0..n]	

2.257 Unstructured <Ustrd>

Presence: [0..n]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in an unstructured form.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

2.258 Structured <Strd>

Presence: [0..n]

Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in a structured form.

Type: *This message item is composed of the following **StructuredRemittanceInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.259		ReferredDocumentInformation	<RfrdDocInf>	[0..1]	
2.265		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime
2.266		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]	
2.272		CreditorReferenceInformation	<CdtrRefInf>	[0..1]	
2.278		Invoicer	<Invcr>	[0..1]	+
2.279		Invoicee	<Invcee>	[0..1]	+
2.280		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text

2.259 ReferredDocumentInformation <RfrdDocInf>

Presence: [0..1]

Definition: Reference information to allow the identification of the underlying reference documents.

Type: *This message item is composed of the following **ReferredDocumentInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.260		ReferredDocumentType	<RfrdDocTp>	[0..1]	
2.264		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text

2.260 ReferredDocumentType <RfrdDocTp>

Presence: [0..1]

Definition: Provides the type of the referred document.

Type: *This message item is composed of the following **ReferredDocumentType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.261	{Or	Code	<Cd>	[1..1]	Code
2.262	Or}	Proprietary	<Prtry>	[1..1]	Text
2.263		Issuer	<Issr>	[0..1]	Text

2.261 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.260** ReferredDocumentType.*

Definition: Document type in a coded form.

Data Type: Code

*One of the following **DocumentType2Code** values must be used:*

Code	Name	Definition
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.

2.262 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.260** ReferredDocumentType.*
Definition: Proprietary identification of the type of the remittance document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.263 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the reference document type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.264 ReferredDocumentNumber <RfrdDocNb>

Presence: [0..1]
Definition: Unique and unambiguous identification number of the referred document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.265 ReferredDocumentRelatedDate <RfrdDocRltdDt>

Presence: [0..1]

Definition: Date associated with the referred document, eg, date of issue.

Data Type: ISODate

2.266 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..n]

Definition: Amount of money and currency of a document referred to in the remittance section. The amount is typically either the original amount due and payable, or the amount actually remitted for the referred document.

Type: *This message item is composed of one of the following* ***ReferredDocumentAmount1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.267	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount
2.268	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount
2.269	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount
2.270	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount
2.271	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount

2.267 DuePayableAmount <DuePyblAmt>

Presence: [1..1]

This message item is part of choice ***2.266*** *ReferredDocumentAmount.*

Definition: Amount specified is the exact amount due and payable to the creditor.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.268 DiscountAppliedAmount <DscntApldAmt>

Presence: [1..1]

This message item is part of choice ***2.266*** *ReferredDocumentAmount.*

Definition: Amount of money resulting from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18

CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.269 RemittedAmount <RmtdAmt>

Presence: [1..1]

*This message item is part of choice **2.266** ReferredDocumentAmount.*

Definition: Amount of money remitted for the referred document.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.270 CreditNoteAmount <CdtNoteAmt>

Presence: [1..1]

*This message item is part of choice **2.266** ReferredDocumentAmount.*

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.271 TaxAmount <TaxAmt>

Presence: [1..1]

*This message item is part of choice **2.266** ReferredDocumentAmount.*

Definition: Quantity of cash resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.272 CreditorReferenceInformation <CdtrRefInf>

Presence: [0..1]
Definition: Reference information provided by the creditor to allow the identification of the underlying documents.
Type: *This message item is composed of the following **CreditorReferenceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.273		CreditorReferenceType	<CdtrRefTp>	[0..1]	
2.277		CreditorReference	<CdtrRef>	[0..1]	Text

2.273 CreditorReferenceType <CdtrRefTp>

Presence: [0..1]
Definition: Provides the type of the creditor reference.
Type: *This message item is composed of the following **CreditorReferenceType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.274	{Or	Code	<Cd>	[1..1]	Code
2.275	Or}	Proprietary	<Prtry>	[1..1]	Text
2.276		Issuer	<Issr>	[0..1]	Text

2.274 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.273** CreditorReferenceType.*
Definition: Coded creditor reference type.
Data Type: Code
*One of the following **DocumentType3Code** values must be used:*

Code	Name	Definition
DISP	DispatchAdvice	Document is a dispatch advice.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
PUOR	PurchaseOrder	Document is a purchase order.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SCOR	StructuredCommunicationReference	Document is a structured communication reference provided by the creditor to identify the referred transaction.

2.275 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.273** CreditorReferenceType.*
Definition: Creditor reference type not avilable in a coded format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.276 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the credit reference type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.277 CreditorReference <CdtrRef>

Presence: [0..1]
Definition: Unique and unambiguous reference assigned by the creditor to refer to the payment transaction.

Usage: if available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the cash.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.278 Invoicer <Invcr>

Presence: [0..1]
Definition: Identification of the organization issuing the invoice when different than the creditor or final party.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.279 Invoicee <Invcee>

Presence: [0..1]

Definition: Identification of the party to whom an invoice is issued, when different than the originator or debtor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.280 AdditionalRemittanceInformation <AddtlRmtInf>

Presence: [0..1]
Definition: Additional information, in free text form, to complement the structured remittance information.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

2.281 RelatedDates <RltdDts>

Presence: [0..1]
Definition: Set of elements identifying the dates related to the underlying transactions.
Type: *This message item is composed of the following **TransactionDates1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.282		AcceptanceDateTime	<AccptncDtTm>	[0..1]	DateTime
2.283		TradeDate	<TradDt>	[0..1]	DateTime
2.284		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime
2.285		StartDate	<StartDt>	[0..1]	DateTime
2.286		EndDate	<EndDt>	[0..1]	DateTime
2.287		TransactionDateTime	<TxDtTm>	[0..1]	DateTime
2.288		Proprietary	<Prtry>	[0..n]	

2.282 AcceptanceDateTime <AccptncDtTm>

Presence: [0..1]
Definition: Point in time when the payment order from the initiating party meets the processing conditions of the account servicing agent (debtor's agent in case of a credit transfer, creditor's agent in case of a direct debit). This means - amongst others - that the account servicing agent has received the payment order and has applied checks as eg, authorisation, availability of funds.
Data Type: ISODateTime

2.283 TradeDate <TradDt>

Presence: [0..1]

Definition: Date on which the trade was executed.
Data Type: ISODate

2.284 InterbankSettlementDate <IntrBkSttlmDt>

Presence: [0..1]
Definition: Date on which the amount of money ceases to be available to the agent that owes it and when the amount of money becomes available to the agent to which it is due.
Data Type: ISODate

2.285 StartDate <StartDt>

Presence: [0..1]
Definition: Start date of the underlying transaction, such as a treasury transaction, an investment plan.
Data Type: ISODate

2.286 EndDate <EndDt>

Presence: [0..1]
Definition: End date of the underlying transaction, such as a treasury transaction, an investment plan.
Data Type: ISODate

2.287 TransactionDateTime <TxDtTm>

Presence: [0..1]
Definition: Date and time of the underlying transaction.
Data Type: ISODateTime

2.288 Proprietary <Prtry>

Presence: [0..n]
Definition: Proprietary date related to the underlying transaction.
Type: *This message item is composed of the following **ProprietaryDate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.289		Type	<Tp>	[1..1]	Text
2.290	{Or	Date	<Dt>	[1..1]	DateTime
2.291	Or}	DateTime	<DtTm>	[1..1]	DateTime

2.289 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of date reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.290 Date <Dt>

Presence: [1..1]

*This message item is part of choice **2.288** Proprietary.*
Definition: Date in ISO format.
Data Type: ISODate

2.291 DateTime <DtTm>

Presence: [1..1]
*This message item is part of choice **2.288** Proprietary.*
Definition: Date and time in ISO format.
Data Type: ISODateTime

2.292 RelatedPrice <RltdPric>

Presence: [0..1]
Definition: Set of elements identifying the price information related to the underlying transaction.
Type: *This message item is composed of one of the following **TransactionPrice1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.293	{Or	DealPrice	<DealPric>	[1..1]	Amount
2.294	Or}	Proprietary	<Prtry>	[1..n]	

2.293 DealPrice <DealPric>

Presence: [1..1]
*This message item is part of choice **2.292** RelatedPrice.*
Definition: Specifies the price of the traded financial instrument.
This is the deal price of the individual trade transaction.
If there is only one trade transaction for the execution of the trade, then the deal price could equal the executed trade price (unless, for example, the price includes commissions or rounding, or some other factor has been applied to the deal price or the executed trade price, or both).
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.294 Proprietary <Prtry>

Presence: [1..n]
*This message item is part of choice **2.292** RelatedPrice.*
Definition: Proprietary price specification of the underlying transaction.
Type: *This message item is composed of the following **ProprietaryPrice1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.295		Type	<Tp>	[1..1]	Text
2.296		Price	<Pric>	[1..1]	Amount

2.295 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of price reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.296 Price <Pric>

Presence: [1..1]
Definition: Proprietary price specification related to the underlying transaction.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.297 RelatedQuantities <RltdQties>

Presence: [0..n]
Definition: Identifies related quantities (eg of securities) in the underlying transaction.
Type: *This message item is composed of one of the following* ***TransactionQuantities1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.298	{Or	Quantity	<Qty>	[1..1]	+
2.299	Or}	Proprietary	<Prtry>	[1..1]	

2.298 Quantity <Qty>

Presence: [1..1]
This message item is part of choice ***2.297*** *RelatedQuantities.*
Definition: Specifies the quantity (eg of securities) in the underlying transaction.
Type: *This message item is composed of one of the following* ***FinancialInstrumentQuantityChoice*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	Unit	<Unit>	[1..1]	Quantity

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
Or	FaceAmount	<FaceAmt>	[1..1]	Amount
Or}	AmortisedValue	<AmtsdVal>	[1..1]	Amount

For additional Type information, please refer to FinancialInstrumentQuantityChoice p.371 in 'Message Item Types' section.

2.299 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.297** RelatedQuantities.*
Definition: Proprietary quantities specification defined in the underlying transaction.
Type: *This message item is composed of the following **ProprietaryQuantity1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.300		Type	<Tp>	[1..1]	Text
2.301		Quantity	<Qty>	[1..1]	Text

2.300 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of proprietary quantity reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.301 Quantity <Qty>

Presence: [1..1]
Definition: Provides the proprietary quantity in free format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.302 FinancialInstrumentIdentification <FinInstrmId>

Presence: [0..1]
Definition: Identification of a security, as assigned under a formal or proprietary identification scheme.
Type: *This message item is composed of one of the following **SecurityIdentification4Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.303	{Or	ISIN	<ISIN>	[1..1]	Identifier
2.304	Or}	Proprietary	<Prtry>	[1..1]	

2.303 ISIN <ISIN>

Presence: [1..1]

*This message item is part of choice **2.302** FinancialInstrumentIdentification.*

Definition: International Securities Identification Number (ISIN). A numbering system designed by the United Nation's International Organisation for Standardisation (ISO). The ISIN is composed of a 2-character prefix representing the country of issue, followed by the national security number (if one exists), and a check digit. Each country has a national numbering agency that assigns ISIN numbers for securities in that country.

Data Type: ISINIdentifier

Format: [A-Z0-9]{12,12}

2.304 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.302** FinancialInstrumentIdentification.*

Definition: Proprietary identification of an underlying financial instrument.

Type: *This message item is composed of the following **AlternateSecurityIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.305		Type	<Tp>	[1..1]	Text
2.306		Identification	<Id>	[1..1]	Text

2.305 Type <Tp>

Presence: [1..1]

Definition: Identifies the type of financial instrument identifier type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.306 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identifier of a security.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.307 Tax <Tax>

Presence: [0..1]

Definition: Amount of money due to the government or tax authority, according to various pre-defined parameters such as thresholds or income.

Type: *This message item is composed of the following **TaxInformation2** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	CreditorTaxIdentification	<CdtrTaxId>	[0..1]	Text
	CreditorTaxType	<CdtrTaxTp>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	DebtorTaxIdentification	<DbtrTaxId>	[0..1]	Text
	TaxReferenceNumber	<TaxRefNb>	[0..1]	Text
	TotalTaxableBaseAmount	<TtlTaxblBaseAmt>	[0..1]	Amount
	TotalTaxAmount	<TtlTaxAmt>	[0..1]	Amount
	TaxDate	<TaxDt>	[0..1]	DateTime
	TaxTypeInformation	<TaxTpInf>	[0..n]	

For additional Type information, please refer to TaxInformation2 p.372 in 'Message Item Types' section.

2.308 ReturnInformation <RtrInf>

Presence: [0..1]
Definition: Set of elements specifying the return information.
Type: *This message item is composed of the following **ReturnReasonInformation5** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.309		OriginalBankTransactionCode	<OrgnlBkTxCd>	[0..1]	
2.318		ReturnOriginator	<RtrOrgtr>	[0..1]	+
2.319		ReturnReason	<RtrRsn>	[0..1]	
2.322		AdditionalReturnReasonInformation	<AddtlRtrRsnInf>	[0..n]	Text

Rule(s): ReturnReasonRule
If ReturnReason/Code is equal to 'NARR', then at least one occurrence of AdditionalReturnReasonInformation must be present.

2.309 OriginalBankTransactionCode <OrgnlBkTxCd>

Presence: [0..1]
Definition: Bank transaction code included in the original entry for the transaction.
Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.310		Domain	<Domn>	[0..1]	
2.315		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.310 Domain <Domn>

Presence: [0..1]

Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.

Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.311		Code	<Cd>	[1..1]	Code
2.312		Family	<Fmly>	[1..1]	

2.311 Code <Cd>

Presence: [1..1]

Definition: Specifies the business area of the underlying transaction.

Data Type: ExternalBankTransactionDomainCode

Format: maxLength: 4
minLength: 1

2.312 Family <Fmly>

Presence: [1..1]

Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.

Type: *This message item is composed of the following **BankTransactionCodeStructure3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.313		Code	<Cd>	[1..1]	Code
2.314		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.313 Code <Cd>

Presence: [1..1]

Definition: Specifies the family within a domain.

Data Type: ExternalBankTransactionFamilyCode

Format: maxLength: 4
minLength: 1

2.314 SubFamilyCode <SubFmlyCd>

Presence: [1..1]

Definition: Specifies the sub-product family within a specific family.

Data Type: ExternalBankTransactionSubFamilyCode

Format: maxLength: 4

minLength: 1

2.315 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary identification of the bank transaction code, as defined by the issuer.
Type: *This message item is composed of the following **ProprietaryBankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.316		Code	<Cd>	[1..1]	Text
2.317		Issuer	<Issr>	[0..1]	Text

2.316 Code <Cd>

Presence: [1..1]
Definition: Proprietary bank transaction code to identify the underlying transaction.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.317 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the proprietary bank transaction code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.318 ReturnOriginator <RtrOrgtr>

Presence: [0..1]
Definition: Party issuing the return.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.319 ReturnReason <RtrRsn>

Presence: [0..1]
Definition: Specifies the reason for the return.
Type: *This message item is composed of one of the following **ReturnReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.320	{Or	Code	<Cd>	[1..1]	Code
2.321	Or}	Proprietary	<Prtry>	[1..1]	Text

2.320 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.319** ReturnReason.*
Definition: Reason for the return in a coded form.
Data Type: Code
*One of the following **TransactionRejectReason2Code** values must be used:*

Code	Name	Definition
AC01	IncorrectAccountNumber	Format of the account number specified is not correct.
AC04	ClosedAccountNumber	Account number specified has been closed on the Receiver's books.
AC06	BlockedAccount	Account specified is blocked, prohibiting posting of transactions against it.
AG01	TransactionForbidden	Transaction forbidden on this type of account (formerly NoAgreement).
AG02	InvalidBankOperationCode	Bank Operation code specified in the message is not valid for receiver.
AM01	ZeroAmount	Specified message amount is equal to zero.
AM02	NotAllowedAmount	Specified transaction/message amount is greater than allowed maximum.
AM03	NotAllowedCurrency	Specified message amount is in an non processable currency outside of existing agreement.
AM04	InsufficientFunds	Amount of funds available to cover specified message amount is insufficient.
AM05	Duplication	This message appears to have been duplicated.
AM06	TooLowAmount	Specified transaction amount is less than agreed minimum.
AM07	BlockedAmount	Amount specified in message has been blocked by regulatory authorities.
AM09	WrongAmount	Amount received is not the amount agreed or expected.
AM10	InvalidControlSum	Sum of instructed amounts does not equal the control sum.
BE01	InconsistentWithEndCustomer	Identification of end customer is not consistent with associated account number. (formerly CreditorConsistency)
BE04	MissingCreditorAddress	Specification of creditor's address, which is required for payment, is missing/not correct (formerly IncorrectCreditorAddress).
BE05	UnrecognisedInitiatingParty	Party who initiated the message is not recognised by the end customer.

Code	Name	Definition
BE06	UnknownEndCustomer	End customer specified is not known at associated Sort/ National Bank Code or does no longer exist in the books.
BE07	MissingDebtorAddress	Specification of debtor's address, which is required for payment, is missing/not correct.
DT01	InvalidDate	Invalid date (eg, wrong settlement date).
ED01	CorrespondentBankNotPossible	Correspondent bank not possible.
ED03	BalanceInfoRequested	Balance of payments complementary info is requested.
ED05	SettlementFailed	Settlement of the transaction has failed.
MD01	NoMandate	Mandate is cancelled or invalid.
MD02	MissingMandatoryInformationInMandate	Mandate related information data required by the scheme is missing.
MD03	InvalidFileFormatForOtherReasonThanGroupingIndicator	File format incomplete or invalid.
MD04	InvalidFileFormatForGroupingIndicator	File format incorrect in terms of grouping indicator.
MD06	RefundRequestByEndCustomer	Return of funds requested by end customer.
MD07	EndCustomerDeceased	End customer is deceased.
MS02	NotSpecifiedReasonCustomerGenerated	Reason has not been specified by end customer.
MS03	NotSpecifiedReasonAgentGenerated	Reason has not been specified by agent.
NARR	Narrative	Reason is provided as narrative information in the additional reason information.
RC01	BankIdentifierIncorrect	Bank identifier code specified in the message has an incorrect format (formerly IncorrectFormatForRoutingCode).
RF01	NotUniqueTransactionReference	Transaction reference is not unique within the message.
TM01	CutOffTime	Associated message was received after agreed processing cut-off time.

2.321 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.319** ReturnReason.*

Definition: Reason for the return not catered for by the available codes.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.322 AdditionalReturnReasonInformation <AddtlRtrRsnInf>

Presence: [0..n]
Definition: Further details on the return reason.
Data Type: Max105Text
Format: maxLength: 105
minLength: 1

2.323 CorporateAction <CorpActn>

Presence: [0..1]
Definition: Set of elements identifying the underlying corporate action.
Type: *This message item is composed of the following **CorporateAction1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.324		Code	<Cd>	[0..1]	Text
2.325		Number	<Nb>	[0..1]	Text
2.326		Proprietary	<Prtry>	[0..1]	Text

2.324 Code <Cd>

Presence: [0..1]
Definition: Specifies the code of corporate action event, in free-text format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.325 Number <Nb>

Presence: [0..1]
Definition: Reference assigned by the account servicer to unambiguously identify a corporate action event.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.326 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary corporate action event information.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.327 SafekeepingAccount <SfkpgAcct>

Presence: [0..1]
Definition: Safekeeping or investment account. A safekeeping account is an account on which a securities entry is made. An investment account is an account between an investor(s) and a fund manager or a fund. The account can

contain holdings in any investment fund or investment fund class managed (or distributed) by the fund manager, within the same fund family.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.328 AdditionalTransactionInformation <AddtlTxInf>

Presence: [0..1]
Definition: Further details on the transaction details.
Data Type: Max500Text
Format: maxLength: 500
minLength: 1

2.329 AdditionalEntryInformation <AddtlNtryInf>

Presence: [0..1]
Definition: Further details on the entry details.
Data Type: Max500Text
Format: maxLength: 500
minLength: 1

2.330 AdditionalReportInformation <AddtlRptInf>

Presence: [0..1]
Definition: Further details on the account report.
Data Type: Max500Text
Format: maxLength: 500
minLength: 1

Business Example

Narrative

AAAA Banken has agreed to provide an intraday account report to its customer Finpetrol. Each business day, at 12.30 PM, AAAA Banken will provide Finpetrol with an overview of all booked and expected entries since the start of the business day. On 18 October, at 12.30 PM, AAAASESS sends such an intraday BankToCustomerAccountReport to Company Finpetrol. It contains two entries : one booked, and one expected item. It has been pre-agreed between account servicer and account owner that AAAA Banken will not include (expected) balance info in this intraday report.

Business Description

Element	*<XMLTag>*	*Content*

Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	AAAASESS-FP-ACCR001
CreationDateTime	<CreDtTm>	2007-10-18T12:30:00+01:00
MessagePagination	<MsgPgntn>	
PageNumber	<PgNb>	1
LastPageIndicator	<LastPgInd>	true
Report	**<Rpt>**	
Identification	<Id>	AAAASESS-FP-ACCR001
CreationDateTime	<CreDtTm>	2007-10-18T12:30:00+01:00
FromToDate	<FrToDt>	
FromDateTime	<FrmDtTm>	2007-10-18T08:00:00+01:00
ToDateTime	<ToDtTm>	2007-10-18T12:30:00+01:00
Account	<Acct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	
ID	<Id>	50000000054910000003
Owner	<Ownr>	
Name	<Nm>	FINPETROL
Servicer	<Svcr>	
FinancialInstitutionIdentification	<FinInstnId>	
NameAndPostalAddress	<NmAndAdr>	
Name	<Nm>	AAAA BANKEN
Country	<Ctry>	SE
Entry	<Ntry>	
Amount	<Amt Ccy=SEK>	200000
CreditDebitIndicator	<CdtDbtInd>	DBIT
Status	<Sts>	BOOK
BookingDate	<BookgDt>	
DateTime	<DtTm>	2007-10-18T10:15:00+01:00
ValueDate	<ValDt>	
Date	<Dt>	2007-10-18
AccountServicerReference	<AcctSvcrRef>	AAAASESS-FP-ACCR-01
BankTransactionCode	<BkTxCd>	
Domain	<Domn>	
Code	<Cd>	PAYM
Family	<Fmly>	
Code	<Cd>	0001

SubFamilyCode	<SbFmlyCd>	0003
Batch	<Btch	
MessageIdentification	<MsgId>	FINP-0055
PaymentInformationIdentification	<PmtInfID>	FINP-0055–001
NumberOfTransactions	<NbOfTxs>	20
Entry	<Ntry>	
Amount	<Amt Ccy=SEK>	30000
CreditDebitIndicator	<CdtDbtInd>	CRED
Status	<Sts>	PDNG
ValueDate	<ValDt>	
Date	<Dt>	2007-10-18
AccountServicerReference	<AcctSvcrRef>	AAAASESS-FP-CONF-FX
BankTransactionCode	<BkTxCd>	
Domain	<Domn>	
Code	<Cd>	TREA
Family	<Fmly>	
Code	<Cd>	0002
SubFamilyCode	<SbFmlyCd>	0000
TransactionDetails	<TxDtls>	
References	<Refs>	
InstructionID	<InstrId>	FP-004567-FX
EndToEndId	<End2EndID>	AAAASS1085FINPSS
AmountDetails	<AmtDtls>	
CountervalueAmount	<CntrValAmt>	
Amount	<Amt Ccy=EUR>	3255.5694
CurrencyExchange	<CcyXchg>	
SourceCurrency	<SrcCcy>	EUR
ExchangeRate	<XchRate>	0.1085

XML Instance


```
<?xml version = "1.0" encoding = "UTF-8"?>
<Document xmlns = "urn:iso:std:iso:20022:tech:xsd:camt.052.001.01" xmlns:xsi = "http://www.w3.org/2001/
XMLSchema-instance">
  <BkToCstmrAcctRptV01>
    <GrpHdr>
      <MsgId>AAAASESS-FP-ACCR001</MsgId>
      <CreDtTm>2007-10-18T12:30:00+01:00</CreDtTm>
      <MsgPgntn>
        <PgNb>1</PgNb>
        <LastPgInd>true</LastPgInd>
```

```
    </MsgPgntn>
  </GrpHdr>
  <Rpt>
    <Id>AAAASESS-FP-ACCR001</Id>
    <CreDtTm>2007-10-18T12:30:00+01:00</CreDtTm>
    <FrToDt>
      <FrDtTm>2007-10-18T08:00:00+01:00</FrDtTm>
      <ToDtTm>2007-10-18T12:30:00+01:00</ToDtTm>
    </FrToDt>
    <Acct>
      <Id>
        <PrtryAcct>
          <Id>50000000054910000003</Id>
        </PrtryAcct>
      </Id>
      <Ownr>
        <Nm>FINPETROL</Nm>
      </Ownr>
      <Svcr>
        <FinInstnId>
          <NmAndAdr>
            <Nm>AAAA BANKEN</Nm>
            <PstlAdr>
              <Ctry>SE</Ctry>
            </PstlAdr>
          </NmAndAdr>
        </FinInstnId>
      </Svcr>
    </Acct>
    <Ntry>
      <Amt Ccy = "SEK">200000</Amt>
      <CdtDbtInd>DBIT</CdtDbtInd>
      <Sts>BOOK</Sts>
      <BookgDt>
        <DtTm>2007-10-18T10:15:00+01:00</DtTm>
      </BookgDt>
      <ValDt>
        <Dt>2007-10-18</Dt>
      </ValDt>
      <AcctSvcrRef>AAAASESS-FP-ACCR-01</AcctSvcrRef>
      <BkTxCd>
        <Domn>
          <Cd>PAYM</Cd>
          <Fmly>
            <Cd>0001</Cd>
            <SubFmlyCd>0003</SubFmlyCd>
          </Fmly>
        </Domn>
      </BkTxCd>
      <Btch>
        <MsgId>FINP-0055</MsgId>
        <PmtInfId>FINP-0055-001</PmtInfId>
```

```
            <NbOfTxs>20</NbOfTxs>
          </Btch>
        </Ntry>
        <Ntry>
          <Amt Ccy = "SEK">30000</Amt>
          <CdtDbtInd>CRDT</CdtDbtInd>
          <Sts>PDNG</Sts>
          <ValDt>
            <Dt>2007-10-18</Dt>
          </ValDt>
          <AcctSvcrRef>AAAASESS-FP-CONF-FX</AcctSvcrRef>
          <BkTxCd>
            <Domn>
              <Cd>TREA</Cd>
              <Fmly>
                <Cd>0002</Cd>
                <SubFmlyCd>0000</SubFmlyCd>
              </Fmly>
            </Domn>
          </BkTxCd>
          <TxDtls>
            <Refs>
              <InstrId>FP-004567-FX</InstrId>
              <EndToEndId>AAAASS1085FINPSS</EndToEndId>
            </Refs>
            <AmtDtls>
              <CntrValAmt>
                <Amt Ccy = "EUR">3255.5694</Amt>
                <CcyXchg>
                  <SrcCcy>EUR</SrcCcy>
                  <XchgRate>0.1085</XchgRate>
                </CcyXchg>
              </CntrValAmt>
            </AmtDtls>
          </TxDtls>
        </Ntry>
      </Rpt>
    </BkToCstmrAcctRptV01>
  </Document>
```

MX camt.053.001.01 BankToCustomerStatementV01

Message Scope and Usage

Scope

The Bank-to-Customer Statement message is sent by the account servicer to an account owner or to a party authorised by the account owner to receive the message. It is used to inform the account owner, or authorised party, of the entries booked to the account, and to provide the owner with balance information on the account at a given point in time.

Usage

The Bank-to-Customer Statement message can contain reports for more than 1 account. It provides information for cash management and/or reconciliation.
It contains information on booked entries only.
It can include underlying details of transactions that have been included in the entry.
The message is exchanged as defined between the account servicer and the account owner. It provides information on items that have been booked to the account (and therefore are 'binding') and also balance information. Depending on services agreed between banks and their customers, 'binding' statements can be generated and exchanged intraday.
Depending on legal requirements in local jurisdictions, 'end-of-day' statements may need to be mandatorily generated and exchanged.
It is possible that the receiver of the message is not the account owner, but a party entitled through arrangement with the account owner to receive the account information (also known as recipient).

Outline

The Bank-to-Customer Statement message is composed of 2 building blocks:
A. Group Header
This building block is mandatory and present once. It contains elements such as Message Identification and CreationDateTime.
B. Statement
This building block is mandatory and repetitive. It should be repeated for each account on which a statement is provided. The report contains components such as Balance and Entry information.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<BkToCstmrStmtV01>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.3		MessageRecipient	<MsgRcpt>	[0..1]	+	
1.4		MessagePagination	<MsgPgntn>	[0..1]		
1.5		PageNumber	<PgNb>	[1..1]	Text	
1.6		LastPageIndicator	<LastPgInd>	[1..1]	Indicator	
1.7		AdditionalInformation	<AddtlInf>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		Statement	<Stmt>	[1..n]		
2.1		Identification	<Id>	[1..1]	Text	
2.2		ElectronicSequenceNumber	<ElctrncSeqNb>	[0..1]	Quantity	
2.3		LegalSequenceNumber	<LglSeqNb>	[0..1]	Quantity	
2.4		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
2.5		FromToDate	<FrToDt>	[0..1]	+	
2.6		CopyDuplicateIndicator	<CpyDplctInd>	[0..1]	Code	
2.7		Account	<Acct>	[1..1]		
2.8		Identification	<Id>	[1..1]	+	
2.9		Type	<Tp>	[0..1]		
2.10	{Or	Code	<Cd>	[1..1]	Code	
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.12		Currency	<Ccy>	[0..1]	Code	
2.13		Name	<Nm>	[0..1]	Text	
2.14		Owner	<Ownr>	[0..1]	+	
2.15		Servicer	<Svcr>	[0..1]	+	
2.16		RelatedAccount	<RltdAcct>	[0..1]	+	
2.17		Interest	<Intrst>	[0..n]		
2.18		Type	<Tp>	[0..1]		
2.19	{Or	Code	<Cd>	[1..1]	Code	
2.20	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.21		Rate	<Rate>	[0..n]		
2.22		Rate	<Rate>	[1..1]		
2.23	{Or	PercentageRate	<PctgRate>	[1..1]	Rate	
2.24	Or}	TextualRate	<TxtlRate>	[1..1]	Text	
2.25		ValidityRange	<VldtyRg>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.26		FromToDate	<FrToDt>	[0..1]	±	
2.27		Reason	<Rsn>	[0..1]	Text	
2.28		Balance	<Bal>	[1..n]		
2.29		Type	<Tp>	[1..1]		
2.30	{Or	Code	<Cd>	[1..1]	Code	
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.32		CreditLine	<CdtLine>	[0..1]		
2.33		Included	<Incl>	[1..1]	Indicator	
2.34		Amount	<Amt>	[0..1]	Amount	
2.35		Amount	<Amt>	[1..1]	Amount	
2.36		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.37		Date	<Dt>	[1..1]	±	
2.38		Availability	<Avlbty>	[0..n]		
2.39		Date	<Dt>	[1..1]		
2.40	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text	
2.41	Or}	ActualDate	<ActlDt>	[1..1]	DateTime	
2.42		Amount	<Amt>	[1..1]	Amount	
2.43		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.44		TransactionsSummary	<TxsSummry>	[0..1]		
2.45		TotalEntries	<TtlNtries>	[0..1]		
2.46		NumberOfEntries	<NbOfNtries>	[0..1]	Text	
2.47		Sum	<Sum>	[0..1]	Quantity	
2.48		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity	
2.49		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code	
2.50		TotalCreditEntries	<TtlCdtNtries>	[0..1]		
2.51		NumberOfEntries	<NbOfNtries>	[0..1]	Text	
2.52		Sum	<Sum>	[0..1]	Quantity	
2.53		TotalDebitEntries	<TtlDbtNtries>	[0..1]		
2.54		NumberOfEntries	<NbOfNtries>	[0..1]	Text	
2.55		Sum	<Sum>	[0..1]	Quantity	
2.56		TotalEntriesPerBankTransactionCode	<TtlNtriesPerBkTxCd>	[0..n]		
2.57		NumberOfEntries	<NbOfNtries>	[0..1]	Text	
2.58		Sum	<Sum>	[0..1]	Quantity	
2.59		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.60		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code	
2.61		BankTransactionCode	<BkTxCd>	[1..1]		
2.62		Domain	<Domn>	[0..1]		
2.63		Code	<Cd>	[1..1]	Code	
2.64		Family	<Fmly>	[1..1]		
2.65		Code	<Cd>	[1..1]	Code	
2.66		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.67		Proprietary	<Prtry>	[0..1]		
2.68		Code	<Cd>	[1..1]	Text	
2.69		Issuer	<Issr>	[0..1]	Text	
2.70		Availability	<Avlbty>	[0..n]		
2.71		Date	<Dt>	[1..1]		
2.72	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text	
2.73	Or}	ActualDate	<ActlDt>	[1..1]	DateTime	
2.74		Amount	<Amt>	[1..1]	Amount	
2.75		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.76		Entry	<Ntry>	[0..n]		
2.77		Amount	<Amt>	[1..1]	Amount	
2.78		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.79		ReversalIndicator	<RvslInd>	[0..1]	Indicator	
2.80		Status	<Sts>	[1..1]	Code	
2.81		BookingDate	<BookgDt>	[0..1]	+	
2.82		ValueDate	<ValDt>	[0..1]	+	
2.83		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text	
2.84		Availability	<Avlbty>	[0..n]		
2.85		Date	<Dt>	[1..1]		
2.86	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text	
2.87	Or}	ActualDate	<ActlDt>	[1..1]	DateTime	
2.88		Amount	<Amt>	[1..1]	Amount	
2.89		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.90		BankTransactionCode	<BkTxCd>	[1..1]		
2.91		Domain	<Domn>	[0..1]		
2.92		Code	<Cd>	[1..1]	Code	
2.93		Family	<Fmly>	[1..1]		
2.94		Code	<Cd>	[1..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.95		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.96		Proprietary	<Prtry>	[0..1]		
2.97		Code	<Cd>	[1..1]	Text	
2.98		Issuer	<Issr>	[0..1]	Text	
2.99		CommissionWaiverIndicator	<ComssnWvrInd>	[0..1]	Indicator	
2.100		AdditionalInformationIndicator	<AddtlInfInd>	[0..1]		
2.101		MessageNameIdentification	<MsgNmId>	[0..1]	Text	
2.102		MessageIdentification	<MsgId>	[0..1]	Text	
2.103		Batch	<Btch>	[0..n]		
2.104		MessageIdentification	<MsgId>	[0..1]	Text	
2.105		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text	
2.106		NumberOfTransactions	<NbOfTxs>	[0..1]	Text	
2.107		AmountDetails	<AmtDtls>	[0..1]		
2.108		InstructedAmount	<InstdAmt>	[0..1]		
2.109		Amount	<Amt>	[1..1]	Amount	
2.110		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.111		TransactionAmount	<TxAmt>	[0..1]		
2.112		Amount	<Amt>	[1..1]	Amount	
2.113		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.114		CounterValueAmount	<CntrValAmt>	[0..1]		
2.115		Amount	<Amt>	[1..1]	Amount	
2.116		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.117		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]		
2.118		Amount	<Amt>	[1..1]	Amount	
2.119		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.120		ProprietaryAmount	<PrtryAmt>	[0..n]		
2.121		Type	<Tp>	[1..1]	Text	
2.122		Amount	<Amt>	[1..1]	Amount	
2.123		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.124		Charges	<Chrgs>	[0..n]		
2.125		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount	
2.126		Amount	<Amt>	[1..1]	Amount	
2.127		Type	<Tp>	[0..1]		
2.128	{Or	Code	<Cd>	[1..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.129	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text	
2.130		Rate	<Rate>	[0..1]	Rate	
2.131		Bearer	 	[0..1]	Code	
2.132		Party	<Pty>	[0..1]	+	
2.133		Tax	<Tax>	[0..1]		
2.134		Identification	<Id>	[0..1]	Text	
2.135		Rate	<Rate>	[0..1]	Rate	
2.136		Amount	<Amt>	[0..1]	Amount	
2.137		Interest	<Intrst>	[0..n]		
2.138		Amount	<Amt>	[1..1]	Amount	
2.139		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.140		Type	<Tp>	[0..1]		
2.141	{Or	Code	<Cd>	[1..1]	Code	
2.142	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.143		Rate	<Rate>	[0..n]		
2.144		Rate	<Rate>	[1..1]		
2.145	{Or	PercentageRate	<PctgRate>	[1..1]	Rate	
2.146	Or}	TextualRate	<TxtlRate>	[1..1]	Text	
2.147		ValidityRange	<VldtyRg>	[0..1]	+	
2.148		FromToDate	<FrToDt>	[0..1]	+	
2.149		Reason	<Rsn>	[0..1]	Text	
2.150		TransactionDetails	<TxDtls>	[0..n]		
2.151		References	<Refs>	[0..1]		
2.152		MessageIdentification	<MsgId>	[0..1]	Text	
2.153		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text	
2.154		InstructionIdentification	<InstrId>	[0..1]	Text	
2.155		EndToEndIdentification	<EndToEndId>	[0..1]	Text	
2.156		TransactionIdentification	<TxId>	[0..1]	Text	
2.157		MandateIdentification	<MndtId>	[0..1]	Text	
2.158		ChequeNumber	<ChqNb>	[0..1]	Text	
2.159		ClearingSystemReference	<ClrSysRef>	[0..1]	Text	
2.160		Proprietary	<Prtry>	[0..1]		
2.161		Type	<Tp>	[1..1]	Text	
2.162		Reference	<Ref>	[1..1]	Text	
2.163		AmountDetails	<AmtDtls>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.164		InstructedAmount	<InstdAmt>	[0..1]		
2.165		Amount	<Amt>	[1..1]	Amount	
2.166		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.167		TransactionAmount	<TxAmt>	[0..1]		
2.168		Amount	<Amt>	[1..1]	Amount	
2.169		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.170		CounterValueAmount	<CntrValAmt>	[0..1]		
2.171		Amount	<Amt>	[1..1]	Amount	
2.172		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.173		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]		
2.174		Amount	<Amt>	[1..1]	Amount	
2.175		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.176		ProprietaryAmount	<PrtryAmt>	[0..n]		
2.177		Type	<Tp>	[1..1]	Text	
2.178		Amount	<Amt>	[1..1]	Amount	
2.179		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.180		Availability	<Avlbty>	[0..n]		
2.181		Date	<Dt>	[1..1]		
2.182	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text	
2.183	Or}	ActualDate	<ActlDt>	[1..1]	DateTime	
2.184		Amount	<Amt>	[1..1]	Amount	
2.185		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.186		BankTransactionCode	<BkTxCd>	[0..1]		
2.187		Domain	<Domn>	[0..1]		
2.188		Code	<Cd>	[1..1]	Code	
2.189		Family	<Fmly>	[1..1]		
2.190		Code	<Cd>	[1..1]	Code	
2.191		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.192		Proprietary	<Prtry>	[0..1]		
2.193		Code	<Cd>	[1..1]	Text	
2.194		Issuer	<Issr>	[0..1]	Text	
2.195		Charges	<Chrgs>	[0..n]		
2.196		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount	
2.197		Amount	<Amt>	[1..1]	Amount	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.198		Type	<Tp>	[0..1]		
2.199	{Or	Code	<Cd>	[1..1]	Code	
2.200	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text	
2.201		Rate	<Rate>	[0..1]	Rate	
2.202		Bearer	 	[0..1]	Code	
2.203		Party	<Pty>	[0..1]	+	
2.204		Tax	<Tax>	[0..1]		
2.205		Identification	<Id>	[0..1]	Text	
2.206		Rate	<Rate>	[0..1]	Rate	
2.207		Amount	<Amt>	[0..1]	Amount	
2.208		Interest	<Intrst>	[0..n]		
2.209		Amount	<Amt>	[1..1]	Amount	
2.210		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.211		Type	<Tp>	[0..1]		
2.212	{Or	Code	<Cd>	[1..1]	Code	
2.213	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.214		Rate	<Rate>	[0..n]		
2.215		Rate	<Rate>	[1..1]		
2.216	{Or	PercentageRate	<PctgRate>	[1..1]	Rate	
2.217	Or}	TextualRate	<TxtlRate>	[1..1]	Text	
2.218		ValidityRange	<VldtyRg>	[0..1]	+	
2.219		FromToDate	<FrToDt>	[0..1]	+	
2.220		Reason	<Rsn>	[0..1]	Text	
2.221		RelatedParties	<RltdPties>	[0..1]		
2.222		InitiatingParty	<InitgPty>	[0..1]	+	
2.223		Debtor	<Dbtr>	[0..1]	+	
2.224		DebtorAccount	<DbtrAcct>	[0..1]	+	
2.225		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.226		Creditor	<Cdtr>	[0..1]	+	
2.227		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.228		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.229		TradingParty	<TradgPty>	[0..1]	+	
2.230		Proprietary	<Prtry>	[0..n]		
2.231		Type	<Tp>	[1..1]	Text	
2.232		Party	<Pty>	[1..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.233		RelatedAgents	<RltdAgts>	[0..1]		
2.234		DebtorAgent	<DbtrAgt>	[0..1]	+	
2.235		CreditorAgent	<CdtrAgt>	[0..1]	+	
2.236		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+	
2.237		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+	
2.238		IntermediaryAgent3	<IntrmyAgt3>	[0..1]	+	
2.239		ReceivingAgent	<RcvgAgt>	[0..1]	+	
2.240		DeliveringAgent	<DlvrgAgt>	[0..1]	+	
2.241		IssuingAgent	<IssgAgt>	[0..1]	+	
2.242		SettlementPlace	<SttlmPlc>	[0..1]	+	
2.243		Proprietary	<Prtry>	[0..n]		
2.244		Type	<Tp>	[1..1]	Text	
2.245		Agent	<Agt>	[1..1]	+	
2.246		Purpose	<Purp>	[0..1]		
2.247	{Or	Code	<Cd>	[1..1]	Code	
2.248	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.249		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]		
2.250		RemittanceIdentification	<RmtId>	[0..1]	Text	
2.251		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code	
2.252		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text	
2.253		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]		
2.254		Name	<Nm>	[1..1]	Text	
2.255		Address	<Adr>	[1..1]	+	
2.256		RemittanceInformation	<RmtInf>	[0..1]		
2.257		Unstructured	<Ustrd>	[0..n]	Text	
2.258		Structured	<Strd>	[0..n]		
2.259		ReferredDocumentInformation	<RfrdDocInf>	[0..1]		
2.260		ReferredDocumentType	<RfrdDocTp>	[0..1]		
2.261	{Or	Code	<Cd>	[1..1]	Code	
2.262	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.263		Issuer	<Issr>	[0..1]	Text	
2.264		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text	
2.265		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime	
2.266		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.267	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount	
2.268	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount	
2.269	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount	
2.270	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount	
2.271	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount	
2.272		CreditorReferenceInformation	<CdtrRefInf>	[0..1]		
2.273		CreditorReferenceType	<CdtrRefTp>	[0..1]		
2.274	{Or	Code	<Cd>	[1..1]	Code	
2.275	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.276		Issuer	<Issr>	[0..1]	Text	
2.277		CreditorReference	<CdtrRef>	[0..1]	Text	
2.278		Invoicer	<Invcr>	[0..1]	+	
2.279		Invoicee	<Invcee>	[0..1]	+	
2.280		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text	
2.281		RelatedDates	<RltdDts>	[0..1]		
2.282		AcceptanceDateTime	<AccptncDtTm>	[0..1]	DateTime	
2.283		TradeDate	<TradDt>	[0..1]	DateTime	
2.284		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime	
2.285		StartDate	<StartDt>	[0..1]	DateTime	
2.286		EndDate	<EndDt>	[0..1]	DateTime	
2.287		TransactionDateTime	<TxDtTm>	[0..1]	DateTime	
2.288		Proprietary	<Prtry>	[0..n]		
2.289		Type	<Tp>	[1..1]	Text	
2.290	{Or	Date	<Dt>	[1..1]	DateTime	
2.291	Or}	DateTime	<DtTm>	[1..1]	DateTime	
2.292		RelatedPrice	<RltdPric>	[0..1]		
2.293	{Or	DealPrice	<DealPric>	[1..1]	Amount	
2.294	Or}	Proprietary	<Prtry>	[1..n]		
2.295		Type	<Tp>	[1..1]	Text	
2.296		Price	<Pric>	[1..1]	Amount	
2.297		RelatedQuantities	<RltdQties>	[0..n]		
2.298	{Or	Quantity	<Qty>	[1..1]	+	
2.299	Or}	Proprietary	<Prtry>	[1..1]		
2.300		Type	<Tp>	[1..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.301		Quantity	<Qty>	[1..1]	Text	
2.302		FinancialInstrumentIdentification	<FinInstrmId>	[0..1]		
2.303	{Or	ISIN	<ISIN>	[1..1]	Identifier	
2.304	Or}	Proprietary	<Prtry>	[1..1]		
2.305		Type	<Tp>	[1..1]	Text	
2.306		Identification	<Id>	[1..1]	Text	
2.307		Tax	<Tax>	[0..1]	+	
2.308		ReturnInformation	<RtrInf>	[0..1]		
2.309		OriginalBankTransactionCode	<OrgnlBkTxCd>	[0..1]		
2.310		Domain	<Domn>	[0..1]		
2.311		Code	<Cd>	[1..1]	Code	
2.312		Family	<Fmly>	[1..1]		
2.313		Code	<Cd>	[1..1]	Code	
2.314		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.315		Proprietary	<Prtry>	[0..1]		
2.316		Code	<Cd>	[1..1]	Text	
2.317		Issuer	<Issr>	[0..1]	Text	
2.318		ReturnOriginator	<RtrOrgtr>	[0..1]	+	
2.319		ReturnReason	<RtrRsn>	[0..1]		
2.320	{Or	Code	<Cd>	[1..1]	Code	
2.321	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.322		AdditionalReturnReasonInformation	<AddtlRtrRsnInf>	[0..n]	Text	
2.323		CorporateAction	<CorpActn>	[0..1]		
2.324		Code	<Cd>	[0..1]	Text	
2.325		Number	<Nb>	[0..1]	Text	
2.326		Proprietary	<Prtry>	[0..1]	Text	
2.327		SafekeepingAccount	<SfkpgAcct>	[0..1]	+	
2.328		AdditionalTransactionInformation	<AddtlTxInf>	[0..1]	Text	
2.329		AdditionalEntryInformation	<AddtlNtryInf>	[0..1]	Text	
2.330		AdditionalStatementInformation	<AddtlStmtInf>	[0..1]	Text	

Message Items Description

*The following section identifies the elements of the **BankToCustomerStatementV01** message.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]
Definition: Common information for the message.
Type: *The **GroupHeader** block is composed of the following **GroupHeader23** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		MessageRecipient	<MsgRcpt>	[0..1]	+
1.4		MessagePagination	<MsgPgntn>	[0..1]	
1.7		AdditionalInformation	<AddtlInf>	[0..1]	Text

1.1 MessageIdentification <MsgId>

Presence: [1..1]
Definition: Point to point reference assigned by the account servicing institution and sent to the account owner to unambiguously identify the message.

Usage: The account servicing institution has to make sure that 'MessageIdentification' is unique per instructed party for a pre-agreed period.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]
Definition: Date and time at which the message was created by the account servicer.
Data Type: ISODateTime

1.3 MessageRecipient <MsgRcpt>

Presence: [0..1]
Definition: Party that is entitled by the account owner to receive information about movements in the account.

Guideline : MessageRecipient should only be identified when different from the account owner.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

1.4 MessagePagination <MsgPgntn>

Presence: [0..1]
Definition: Pagination of the message.

Usage: the pagination of the message is only allowed when agreed between the parties.

Type: *This message item is composed of the following **Pagination** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.5		PageNumber	<PgNb>	[1..1]	Text
1.6		LastPageIndicator	<LastPgInd>	[1..1]	Indicator

1.5 PageNumber <PgNb>

Presence: [1..1]
Definition: Page number.
Data Type: Max5NumericText
Format: [0-9]{1,5}

1.6 LastPageIndicator <LastPgInd>

Presence: [1..1]
Definition: Indicates the last page.
Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

1.7 AdditionalInformation <AddtlInf>

Presence: [0..1]
Definition: Further details on the message.
Data Type: Max500Text
Format: maxLength: 500
minLength: 1

2.0 Statement <Stmt>

Presence: [1..n]
Definition: Reports on booked entries and balances for a cash account.
Type: *The **Statement** block is composed of the following **AccountStatement1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		Identification	<Id>	[1..1]	Text
2.2		ElectronicSequenceNumber	<ElctrncSeqNb>	[0..1]	Quantity
2.3		LegalSequenceNumber	<LglSeqNb>	[0..1]	Quantity
2.4		CreationDateTime	<CreDtTm>	[1..1]	DateTime
2.5		FromToDate	<FrToDt>	[0..1]	+

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.6		CopyDuplicateIndicator	<CpyDplctInd>	[0..1]	Code
2.7		Account	<Acct>	[1..1]	
2.16		RelatedAccount	<RltdAcct>	[0..1]	+
2.17		Interest	<Intrst>	[0..n]	
2.28		Balance	<Bal>	[1..n]	
2.44		TransactionsSummary	<TxsSummry>	[0..1]	
2.76		Entry	<Ntry>	[0..n]	
2.330		AdditionalStatementInformation	<AddtlStmtInf>	[0..1]	Text

2.1 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of the account report, assigned by the account servicer.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.2 ElectronicSequenceNumber <ElctrncSeqNb>

Presence: [0..1]

Definition: Sequential number of the report, assigned by the account servicer. It is increased incrementally for each report sent electronically.

Data Type: Number

Format: fractionDigits: 0
totalDigits: 18

2.3 LegalSequenceNumber <LglSeqNb>

Presence: [0..1]

Definition: Legal sequential number of the report, assigned by the account servicer. It is increased incrementally for each report sent.

Usage : in those scenarios where eg a paper statement is a legal requirement, the paper statement may have a different numbering than the electronic sequential number. Paper statements can for instance only be sent if movement on the account has taken place, whereas electronic statements can be sent eg each day, regardless of whether movements have taken place or not.

Data Type: Number

Format: fractionDigits: 0
totalDigits: 18

2.4 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the report was created.

Data Type: ISODateTime

2.5 FromToDate <FrToDt>

Presence: [0..1]
Definition: Range of time between the start date and the end date for which the account statement is issued.
Type: *This message item is composed of the following **DateTimePeriodDetails** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDateTime	<FrDtTm>	[1..1]	DateTime
	ToDateTime	<ToDtTm>	[1..1]	DateTime

For additional Type information, please refer to DateTimePeriodDetails p.345 in 'Message Item Types' section.

2.6 CopyDuplicateIndicator <CpyDplctInd>

Presence: [0..1]
Definition: Specifies if this document is a copy, a duplicate, or a duplicate of a copy.
Data Type: Code
*When this message item is present, one of the following **CopyDuplicate1Code** values must be used:*

Code	Name	Definition
CODU	CopyDuplicate	Message is being sent as a copy to a party other than the account owner, for information purposes and the message is a duplicate of a message previously sent.
COPY	Copy	Message is being sent as a copy to a party other than the account owner, for information purposes.
DUPL	Duplicate	Message is for information/confirmation purposes. It is a duplicate of a message previously sent.

2.7 Account <Acct>

Presence: [1..1]
Definition: Business relationship between two entities; one entity is the account owner, the other entity is the account servicer.
Type: *This message item is composed of the following **CashAccount13** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.8		Identification	<Id>	[1..1]	+
2.9		Type	<Tp>	[0..1]	
2.12		Currency	<Ccy>	[0..1]	Code
2.13		Name	<Nm>	[0..1]	Text
2.14		Owner	<Ownr>	[0..1]	+
2.15		Servicer	<Svcr>	[0..1]	+

2.8 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following* ***AccountIdentification3Choice*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier
Or}	ProprietaryAccount	<PrtryAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification3Choice p.333 in 'Message Item Types' section.

2.9 Type <Tp>

Presence: [0..1]
Definition: Nature, or use, of the account.
Type: *This message item is composed of one of the following* ***CashAccountType2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.10	{Or	Code	<Cd>	[1..1]	Code
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text

2.10 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.9*** *Type.*
Definition: Nature or use of the account in a coded form.
Data Type: Code
One of the following ***CashAccountType4Code*** *values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
CISH	CashIncome	Account used for payment of income if different from the current cash account.
COMM	Commission	Account used for commission if different from the account for payment.
LOAN	Loan	Account used for loans.
MGLD	MarginalLending	Account used for a marginal lending facility.

Code	Name	Definition
MOMA	MoneyMarket	Account used for money markets if different from the cash account.
NREX	NonResidentExternal	Account used for non-resident external.
ODFT	Overdraft	Account is used for overdrafts.
ONDP	OverNightDeposit	Account used for overnight deposits.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SLRY	Salary	Accounts used for salary payments.
SVGS	Savings	Account used for savings.
TAXE	Tax	Account used for taxes if different from the account for payment.
TRAS	CashTrading	Account used for trading if different from the current cash account.

2.11 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.9** Type.*
Definition: Proprietary nature or use of the account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.12 Currency <Ccy>

Presence: [0..1]
Definition: Identification of the currency in which the account is held.
Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

2.13 Name <Nm>

Presence: [0..1]
Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.14 Owner <Ownr>

Presence: [0..1]
Definition: Party that legally owns the account.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.15 Servicer <Svcr>

Presence: [0..1]
Definition: Party that manages the account on behalf of the account owner, ie, manages the registration and booking of entries on the account, calculates balances on the account and provides information about the account.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.16 RelatedAccount <RltdAcct>

Presence: [0..1]
Definition: Identifies the parent account of the reported account.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.17 Interest <Intrst>

Presence: [0..n]

Definition: Provides general interest information that applies to the account at a particular moment in time.
Type: *This message item is composed of the following **AccountInterest1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.18		Type	<Tp>	[0..1]	
2.21		Rate	<Rate>	[0..n]	
2.26		FromToDate	<FrToDt>	[0..1]	+
2.27		Reason	<Rsn>	[0..1]	Text

2.18 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of interest.
Type: *This message item is composed of one of the following **InterestType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.19	{Or	Code	<Cd>	[1..1]	Code
2.20	Or}	Proprietary	<Prtry>	[1..1]	Text

2.19 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.18** Type.*
Definition: Specifies the type of interest.
Data Type: Code
*One of the following **InterestType1Code** values must be used:*

Code	Name	Definition
INDY	IntraDay	During or within a business day.
OVRN	OverNight	Period of time between the end of a business day and the start of the next business day (usually the day after).

2.20 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.18** Type.*
Definition: Specifies the type of interest in uncoded form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.21 Rate <Rate>

Presence: [0..n]
Definition: Set of elements qualifying the interest rate.

Type: *This message item is composed of the following **Rate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.22		Rate	<Rate>	[1..1]	
2.25		ValidityRange	<VldtyRg>	[0..1]	+

2.22 Rate <Rate>

Presence: [1..1]

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.
Example percentage rate : Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Example Textual rate : Rate is expressed as a text.

Type: *This message item is composed of one of the following **RateTypeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.23	{Or	PercentageRate	<PctgRate>	[1..1]	Rate
2.24	Or}	TextualRate	<TxtlRate>	[1..1]	Text

2.23 PercentageRate <PctgRate>

Presence: [1..1]

*This message item is part of choice **2.22** Rate.*

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.24 TextualRate <TxtlRate>

Presence: [1..1]

*This message item is part of choice **2.22** Rate.*

Definition: Rate is expressed as a text.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.25 ValidityRange <VldtyRg>

Presence: [0..1]

Definition: An amount range where the interest rate is applicable

Type: *This message item is composed of the following **CurrencyAndAmountRange** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Amount	<Amt>	[1..1]	
	CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
	Currency	<Ccy>	[1..1]	Code

For additional Type information, please refer to CurrencyAndAmountRange p.339 in 'Message Item Types' section.

2.26 FromToDate <FrToDt>

Presence: [0..1]
Definition: Range of time between a start date and an end date for the calculation of the interest.
Type: *This message item is composed of the following **DateTimePeriodDetails** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDateTime	<FrDtTm>	[1..1]	DateTime
	ToDateTime	<ToDtTm>	[1..1]	DateTime

For additional Type information, please refer to DateTimePeriodDetails p.345 in 'Message Item Types' section.

2.27 Reason <Rsn>

Presence: [0..1]
Definition: Underlying reason for the interest, eg, yearly credit interest on a savings account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.28 Balance <Bal>

Presence: [1..n]
Definition: Set of elements defining the balance(s).
Type: *This message item is composed of the following **CashBalance2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.29		Type	<Tp>	[1..1]	
2.32		CreditLine	<CdtLine>	[0..1]	
2.35		Amount	<Amt>	[1..1]	Amount
2.36		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code
2.37		Date	<Dt>	[1..1]	+
2.38		Availability	<Avlbty>	[0..n]	

Rule(s): AvailabilityAndTypeRule
If Type is equal to ForwardAvailable, Availability is not allowed.

2.29 Type <Tp>

Presence: [1..1]
Definition: Specifies the nature of a balance, eg, opening booked balance.
Type: *This message item is composed of one of the following* ***BalanceType2Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.30	{Or	Code	<Cd>	[1..1]	Code
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text

2.30 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.29*** *Type.*
Definition: Specifies the code for the type of a balance, eg, opening booked balance.
Data Type: Code
One of the following ***BalanceType9Code*** *values must be used:*

Code	Name	Definition
CCLA	CollectionClosingAvailable	Collection closing balance of amount of money that is at the disposal of the account owner on the date specified.
CCLB	CollectionClosingBooked	Collection balance of the account at the end of the pre-agreed account reporting period. It is the sum of the opening booked balance at the beginning of the period and all entries booked to the account during the pre-agreed account reporting period.
CFWA	CollectionForwardAvailable	Collection forward available balance of money that is at the disposal of the account owner on the date specified.
CITA	CollectionInterimAvailable	Collection available balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
CITB	CollectionInterimBooked	Collection balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
CLAV	ClosingAvailable	Closing balance of amount of money that is at the disposal of the account owner on the date specified.
CLBD	ClosingBooked	Balance of the account at the end of the pre-agreed account reporting period. It is the sum of the opening booked balance at the beginning of the period and all entries booked to the account during the pre-agreed account reporting period.
COPA	CollectionOpeningAvailable	Collection opening balance of amount of money that is at the disposal of the account owner on the date specified.

Code	Name	Definition
COPB	CollectionOpeningBooked	Collection book balance of the account at the beginning of the account reporting period. It always equals the closing book balance from the previous report.
DCLA	DisbursementClosingAvailable	Disbursement closing balance of amount of money that is at the disposal of the account owner on the date specified.
DCLB	DisbursementClosingBooked	Disbursement balance of the account at the end of the pre-agreed account reporting period. It is the sum of the opening booked balance at the beginning of the period and all entries booked to the account during the pre-agreed account reporting period.
DFWA	DisbursementForwardAvailable	Disbursement forward available balance of money that is at the disposal of the account owner on the date specified.
DITA	DisbursementInterimAvailable	Disbursement available balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
DITB	DisbursementInterimBooked	Disbursement balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
DOPA	DisbursementOpeningAvailable	Disbursement opening balance of amount of money that is at the disposal of the account owner on the date specified.
DOPB	DisbursementOpeningBooked	Disbursement book balance of the account at the beginning of the account reporting period. It always equals the closing book balance from the previous report.
FWAV	ForwardAvailable	Forward available balance of money that is at the disposal of the account owner on the date specified.
ICLA	InvestmentClosingAvailable	Investment closing balance of an amount of money that is at the disposal of the account owner on the date specified.
ICLB	InvestmentClosingBooked	Investment (mutual funds) balance of the account at the end of the pre-agreed account reporting period. It is the sum of the opening booked balance at the beginning of the period and all entries booked to the account during the pre-agreed account reporting period.
IFWA	InvestmentForwardAvailable	Investment forward available balance of money that is at the disposal of the account owner on the date specified.
IITA	InvestmentInterimAvailable	Investment available balance for calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.

Code	Name	Definition
IITB	InvestmentInterimBooked	Investment balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
IOPA	InvestmentOpeningAvailable	Investment opening balance of amount of money that is at the disposal of the account owner on the date specified.
IOPB	InvestmentOpeningBooked	Investment book balance of the account at the beginning of the account reporting period. It always equals the closing book balance from the previous report.
ITAV	InterimAvailable	Available balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
ITBD	InterimBooked	Balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.
OPAV	OpeningAvailable	Opening balance of amount of money that is at the disposal of the account owner on the date specified.
OPBD	OpeningBooked	Book balance of the account at the beginning of the account reporting period. It always equals the closing book balance from the previous report.
PRCD	PreviouslyClosedBooked	Balance of the account at the previously closed account reporting period. The opening booked balance for the new period has to be equal to this balance. Usage: the previously booked closing balance should equal (inclusive date) the booked closing balance of the date it references and equal the actual booked opening balance of the current date.

2.31 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.29** Type.*

Definition: Specifies a proprietary code for the balance type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.32 CreditLine <CdtLine>

Presence: [0..1]
Definition: Provides further details on the credit line information.
Type: *This message item is composed of the following **CreditLine1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.33		Included	<Incl>	[1..1]	Indicator
2.34		Amount	<Amt>	[0..1]	Amount

2.33 Included <Incl>

Presence: [1..1]
Definition: Indicates whether the credit line is included or not.

Usage : if not present, credit line is not included in the balance amount.

Data Type: *One of the following **TrueFalseIndicator** values must be used:*
MeaningWhenTrue: True
MeaningWhenFalse: False

2.34 Amount <Amt>

Presence: [0..1]
Definition: Amount of money of the credit line.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.35 Amount <Amt>

Presence: [1..1]
Definition: Currency and amount of money of the cash balance.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.36 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Indicates whether the balance is a credit or a debit balance. A zero balance is considered to be a credit balance
Data Type: Code
*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.37 Date <Dt>

Presence: [1..1]
Definition: Specifies the date (and time) of the balance.
Type: *This message item is composed of one of the following **DateAndDateTimeChoice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	Date	<Dt>	[1..1]	DateTime
Or}	DateTime	<DtTm>	[1..1]	DateTime

For additional Type information, please refer to DateAndDateTimeChoice p.345 in 'Message Item Types' section.

2.38 Availability <Avlbty>

Presence: [0..n]
Definition: Set of elements used to indicate when the booked funds will become available, ie can be accessed and start generating interest.

Usage : this type of info is eg used in US, and is linked to particular instruments, such as cheques.
Example : When a cheque is deposited, it will be booked on the deposit day, but the funds will only be accessible as of the indicated availability day (according to national banking regulations).

Type: *This message item is composed of the following **CashBalanceAvailability1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.39		Date	<Dt>	[1..1]	
2.42		Amount	<Amt>	[1..1]	Amount
2.43		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

2.39 Date <Dt>

Presence: [1..1]
Definition: Indicates when the amount of money will become available.
Type: *This message item is composed of one of the following **CashBalanceAvailabilityDate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.40	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text
2.41	Or}	ActualDate	<ActlDt>	[1..1]	DateTime

2.40 NumberOfDays <NbOfDays>

Presence: [1..1]
*This message item is part of choice **2.39** Date.*
Definition: Indicates the number of float days attached to the balance.
Data Type: Max15PlusSignedNumericText
Format: [+]{0,1}[0-9]{1,15}

2.41 ActualDate <ActlDt>

Presence: [1..1]
*This message item is part of choice **2.39** Date.*
Definition: Identifies the actual availability date.
Data Type: ISODate

2.42 Amount <Amt>

Presence: [1..1]
Definition: Identifies the available amount.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.43 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Indicates whether the availability balance is a credit or a debit balance. A zero balance is considered to be a credit balance
Data Type: Code
*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.44 TransactionsSummary <TxsSummry>

Presence: [0..1]
Definition: Set of element providing summary information on entries.
Type: *This message item is composed of the following **TotalTransactions1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.45		TotalEntries	<TtlNtries>	[0..1]	
2.50		TotalCreditEntries	<TtlCdtNtries>	[0..1]	
2.53		TotalDebitEntries	<TtlDbtNtries>	[0..1]	
2.56		TotalEntriesPerBankTransactionCode	<TtlNtriesPerBkTxCd>	[0..n]	

2.45 TotalEntries <TtlNtries>

Presence: [0..1]
Definition: Indicates the total number and sum of debit and credit entries.
Type: *This message item is composed of the following **NumberAndSumOfTransactions2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.46		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.47		Sum	<Sum>	[0..1]	Quantity
2.48		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity
2.49		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code

Guideline(s): DebitCreditIndicatorGuideline
DebitCreditIndicator should be present when TotalNetEntryAmount is present.

2.46 NumberOfEntries <NbOfNtries>

Presence: [0..1]
Definition: Number of individual entries included in the report.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.47 Sum <Sum>

Presence: [0..1]
Definition: Total of all individual entries included in the report.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.48 TotalNetEntryAmount <TtlNetNtryAmt>

Presence: [0..1]
Definition: Resulting amount of the netted amounts for all debit and credit entries.

Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.49 CreditDebitIndicator <CdtDbtInd>

Presence: [0..1]
Definition: Indicates whether the total net entry amount is a credit or a debit amount.
Data Type: Code
*When this message item is present, one of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.50 TotalCreditEntries <TtlCdtNtries>

Presence: [0..1]
Definition: Indicates the total number and sum of credit entries.
Type: *This message item is composed of the following **NumberAndSumOfTransactions1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.51		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.52		Sum	<Sum>	[0..1]	Quantity

2.51 NumberOfEntries <NbOfNtries>

Presence: [0..1]
Definition: Number of individual entries included in the report.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.52 Sum <Sum>

Presence: [0..1]
Definition: Total of all individual entries included in the report.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.53 TotalDebitEntries <TtlDbtNtries>

Presence: [0..1]
Definition: Indicates the total number and sum of debit entries.
Type: *This message item is composed of the following **NumberAndSumOfTransactions1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.54		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.55		Sum	<Sum>	[0..1]	Quantity

2.54 NumberOfEntries <NbOfNtries>

Presence: [0..1]
Definition: Number of individual entries included in the report.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.55 Sum <Sum>

Presence: [0..1]
Definition: Total of all individual entries included in the report.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.56 TotalEntriesPerBankTransactionCode <TtlNtriesPerBkTxCd>

Presence: [0..n]
Definition: Indicates the total number and sum of entries per bank transaction code.
Type: *This message item is composed of the following* ***NumberAndSumOfTransactionsPerBankTransactionCode1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.57		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.58		Sum	<Sum>	[0..1]	Quantity
2.59		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity
2.60		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
2.61		BankTransactionCode	<BkTxCd>	[1..1]	
2.70		Availability	<Avlbty>	[0..n]	

Guideline(s): DebitCreditIndicatorGuideline
DebitCreditIndicator should be present when TotalNetEntryAmount is present.

2.57 NumberOfEntries <NbOfNtries>

Presence: [0..1]
Definition: Number of individual entries contained in the report.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.58 Sum <Sum>

Presence: [0..1]
Definition: Total of all individual entries included in the report.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.59 TotalNetEntryAmount <TtlNetNtryAmt>

Presence: [0..1]
Definition: Resulting amount of the netted amounts for all debit and credit entries per bank transaction code.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.60 CreditDebitIndicator <CdtDbtInd>

Presence: [0..1]
Definition: Indicates whether the total net entry amount is a credit or a debit amount.
Data Type: Code
*When this message item is present, one of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.61 BankTransactionCode <BkTxCd>

Presence: [1..1]
Definition: Set of elements to fully identify the type of underlying transaction resulting in an entry.
Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.62		Domain	<Domn>	[0..1]	
2.67		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.62 Domain <Domn>

Presence: [0..1]

Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.

Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.63		Code	<Cd>	[1..1]	Code
2.64		Family	<Fmly>	[1..1]	

2.63 Code <Cd>

Presence: [1..1]

Definition: Specifies the business area of the underlying transaction.

Data Type: ExternalBankTransactionDomainCode

Format: maxLength: 4
minLength: 1

2.64 Family <Fmly>

Presence: [1..1]

Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.

Type: *This message item is composed of the following **BankTransactionCodeStructure3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.65		Code	<Cd>	[1..1]	Code
2.66		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.65 Code <Cd>

Presence: [1..1]

Definition: Specifies the family within a domain.

Data Type: ExternalBankTransactionFamilyCode

Format: maxLength: 4
minLength: 1

2.66 SubFamilyCode <SubFmlyCd>

Presence: [1..1]

Definition: Specifies the sub-product family within a specific family.

Data Type: ExternalBankTransactionSubFamilyCode

Format: maxLength: 4
minLength: 1

2.67 Proprietary <Prtry>

Presence: [0..1]

Definition: Proprietary identification of the bank transaction code, as defined by the issuer.

Type: *This message item is composed of the following **ProprietaryBankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.68		Code	<Cd>	[1..1]	Text
2.69		Issuer	<Issr>	[0..1]	Text

2.68 Code <Cd>

Presence: [1..1]

Definition: Proprietary bank transaction code to identify the underlying transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.69 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the proprietary bank transaction code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.70 Availability <Avlbty>

Presence: [0..n]

Definition: Set of elements used to indicate when the booked amount of money will become available, ie can be accessed and start generating interest.

Type: *This message item is composed of the following **CashBalanceAvailability1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.71		Date	<Dt>	[1..1]	
2.74		Amount	<Amt>	[1..1]	Amount
2.75		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

2.71 Date <Dt>

Presence: [1..1]

Definition: Indicates when the amount of money will become available.

Type: *This message item is composed of one of the following **CashBalanceAvailabilityDate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.72	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.73	Or}	ActualDate	<ActlDt>	[1..1]	DateTime

2.72 NumberOfDays <NbOfDays>

Presence: [1..1]
*This message item is part of choice **2.71** Date.*
Definition: Indicates the number of float days attached to the balance.
Data Type: Max15PlusSignedNumericText
Format: [+]{0,1}[0-9]{1,15}

2.73 ActualDate <ActlDt>

Presence: [1..1]
*This message item is part of choice **2.71** Date.*
Definition: Identifies the actual availability date.
Data Type: ISODate

2.74 Amount <Amt>

Presence: [1..1]
Definition: Identifies the available amount.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.75 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Indicates whether the availability balance is a credit or a debit balance. A zero balance is considered to be a credit balance
Data Type: Code
*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.76 Entry <Ntry>

Presence: [0..n]

Definition: Specifies the elements of an entry in the statement.

Usage: At least one reference must be provided to identify the entry and its underlying transaction(s).

Type: *This message item is composed of the following **StatementEntry1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.77		Amount	<Amt>	[1..1]	Amount
2.78		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code
2.79		ReversalIndicator	<RvslInd>	[0..1]	Indicator
2.80		Status	<Sts>	[1..1]	Code
2.81		BookingDate	<BookgDt>	[0..1]	+
2.82		ValueDate	<ValDt>	[0..1]	+
2.83		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text
2.84		Availability	<Avlbty>	[0..n]	
2.90		BankTransactionCode	<BkTxCd>	[1..1]	
2.99		CommissionWaiverIndicator	<ComssnWvrInd>	[0..1]	Indicator
2.100		AdditionalInformationIndicator	<AddtlInfInd>	[0..1]	
2.103		Batch	<Btch>	[0..n]	
2.107		AmountDetails	<AmtDtls>	[0..1]	
2.124		Charges	<Chrgs>	[0..n]	
2.137		Interest	<Intrst>	[0..n]	
2.150		TransactionDetails	<TxDtls>	[0..n]	
2.329		AdditionalEntryInformation	<AddtlNtryInf>	[0..1]	Text

Rule(s): StatusAndBookingDateRule
If Status is pending, BookingDate must is not allowed.

Guideline(s): ReferenceGuideline
At least one reference should present to identify the underlying transaction(s).

2.77 Amount <Amt>

Presence: [1..1]

Definition: Amount of money in the cash entry.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.78 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Specifies if an entry is a credit or a debit.
Data Type: Code
*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.79 ReversalIndicator <RvslInd>

Presence: [0..1]
Definition: Indicates whether the entry is the result of a reversal operation.

Usage : this element should only be present if the entry is the result of a reversal operation.
If the CreditDebitIndicator is CRDT and ReversalIndicator is Yes, the original operation was a debit entry.
If the CreditDebitIndicator is DBIT and ReversalIndicator is Yes, the original operation was a credit entry.

Data Type: *One of the following **TrueFalseIndicator** values must be used:*
MeaningWhenTrue: True
MeaningWhenFalse: False

2.80 Status <Sts>

Presence: [1..1]
Definition: Status of an entry on the books of the account servicer.
Data Type: Code
*One of the following **EntryStatus3Code** values must be used:*

Code	Name	Definition
BOOK	Booked	Booked means that the transfer of money has been completed between account servicer and account owner Usage : Status Booked does not necessarily imply finality of money as this depends on other factors such as the payment system used, the completion of the end-to-end transaction and the terms agreed between account servicer and owner. Status Booked is the only status that can be reversed.

2.81 BookingDate <BookgDt>

Presence: [0..1]
Definition: Date and time when an entry is posted to an account on the account servicer's books.
Type: *This message item is composed of one of the following **DateAndDateTimeChoice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	Date	<Dt>	[1..1]	DateTime

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
Or}	DateTime	<DtTm>	[1..1]	DateTime

For additional Type information, please refer to DateAndDateTimeChoice p.345 in 'Message Item Types' section.

2.82 ValueDate <ValDt>

Presence: [0..1]

Definition: Date and time assets become available to the account owner (in a credit entry), or cease to be available to the account owner (in a debit entry).

Usage : For entries which are subject to availability/float (and for which availability information is present), value date must not be used, as the availability component identifies the number of availability days.

Type: *This message item is composed of one of the following **DateAndDateTimeChoice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	Date	<Dt>	[1..1]	DateTime
Or}	DateTime	<DtTm>	[1..1]	DateTime

For additional Type information, please refer to DateAndDateTimeChoice p.345 in 'Message Item Types' section.

2.83 AccountServicerReference <AcctSvcrRef>

Presence: [0..1]

Definition: Account servicing institution's reference for the underlying transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.84 Availability <Avlbty>

Presence: [0..n]

Definition: Set of elements used to indicate when the booked funds will become available, ie can be accessed and start generating interest.

Usage : this type of info is eg used in US, and is linked to particular instruments, such as cheques.
Example : When a cheque is deposited, it will be booked on the deposit day, but the funds will only be accessible as of the indicated availability day (according to national banking regulations).

Type: *This message item is composed of the following **CashBalanceAvailability1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.85		Date	<Dt>	[1..1]	
2.88		Amount	<Amt>	[1..1]	Amount
2.89		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

2.85 Date <Dt>

Presence: [1..1]
Definition: Indicates when the amount of money will become available.
Type: *This message item is composed of one of the following **CashBalanceAvailabilityDate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.86	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text
2.87	Or}	ActualDate	<ActlDt>	[1..1]	DateTime

2.86 NumberOfDays <NbOfDays>

Presence: [1..1]
*This message item is part of choice **2.85** Date.*
Definition: Indicates the number of float days attached to the balance.
Data Type: Max15PlusSignedNumericText
Format: [+]{0,1}[0-9]{1,15}

2.87 ActualDate <ActlDt>

Presence: [1..1]
*This message item is part of choice **2.85** Date.*
Definition: Identifies the actual availability date.
Data Type: ISODate

2.88 Amount <Amt>

Presence: [1..1]
Definition: Identifies the available amount.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.89 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Indicates whether the availability balance is a credit or a debit balance. A zero balance is considered to be a credit balance
Data Type: Code
*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.90 BankTransactionCode <BkTxCd>

Presence: [1..1]
Definition: Set of elements to fully identify the type of underlying transaction resulting in an entry.
Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.91		Domain	<Domn>	[0..1]	
2.96		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.91 Domain <Domn>

Presence: [0..1]
Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.
Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.92		Code	<Cd>	[1..1]	Code
2.93		Family	<Fmly>	[1..1]	

2.92 Code <Cd>

Presence: [1..1]
Definition: Specifies the business area of the underlying transaction.
Data Type: ExternalBankTransactionDomainCode
Format: maxLength: 4
minLength: 1

2.93 Family <Fmly>

Presence: [1..1]

Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.

Type: *This message item is composed of the following* ***BankTransactionCodeStructure3*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.94		Code	<Cd>	[1..1]	Code
2.95		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.94 Code <Cd>

Presence: [1..1]

Definition: Specifies the family within a domain.

Data Type: ExternalBankTransactionFamilyCode

Format: maxLength: 4
minLength: 1

2.95 SubFamilyCode <SubFmlyCd>

Presence: [1..1]

Definition: Specifies the sub-product family within a specific family.

Data Type: ExternalBankTransactionSubFamilyCode

Format: maxLength: 4
minLength: 1

2.96 Proprietary <Prtry>

Presence: [0..1]

Definition: Proprietary identification of the bank transaction code, as defined by the issuer.

Type: *This message item is composed of the following* ***ProprietaryBankTransactionCodeStructure1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.97		Code	<Cd>	[1..1]	Text
2.98		Issuer	<Issr>	[0..1]	Text

2.97 Code <Cd>

Presence: [1..1]

Definition: Proprietary bank transaction code to identify the underlying transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.98 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the proprietary bank transaction code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.99 CommissionWaiverIndicator <ComssnWvrInd>

Presence: [0..1]

Definition: Indicates whether the transaction is exempt from commission.

Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

2.100 AdditionalInformationIndicator <AddtlInfInd>

Presence: [0..1]

Definition: Indicates whether the underlying transaction details are provided through a separate message, eg in case of aggregate bookings.

Type: *This message item is composed of the following **MessageIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.101		MessageNameIdentification	<MsgNmId>	[0..1]	Text
2.102		MessageIdentification	<MsgId>	[0..1]	Text

2.101 MessageNameIdentification <MsgNmId>

Presence: [0..1]

Definition: Specifies the message name identifier of the message that will be used to provide additional details.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.102 MessageIdentification <MsgId>

Presence: [0..1]

Definition: Specifies the identification of the message that will be used to provide additional details.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.103 Batch <Btch>

Presence: [0..n]

Definition: Set of elements providing details on batched transactions.

Usage : this element can be repeated in case more than one batch is included in the entry, eg, in lockbox scenarios, to specify the ID and number of transactions included in each of the batches.

Type: *This message item is composed of the following **BatchInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.104		MessageIdentification	<MsgId>	[0..1]	Text
2.105		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text
2.106		NumberOfTransactions	<NbOfTxs>	[0..1]	Text

2.104 MessageIdentification <MsgId>

Presence: [0..1]

Definition: Point to point reference assigned by the sending party to unambiguously identify the batch of transactions.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.105 PaymentInformationIdentification <PmtInfId>

Presence: [0..1]

Definition: Reference assigned by a sending party to unambiguously identify a payment information block within a payment message.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.106 NumberOfTransactions <NbOfTxs>

Presence: [0..1]

Definition: Number of individual transactions included in the batch.

Data Type: Max15NumericText

Format: [0-9]{1,15}

2.107 AmountDetails <AmtDtls>

Presence: [0..1]

Definition: Set of elements providing information on the original amount.

Usage : This component (on entry level) should be used when a total original batch or aggregate amount has to be provided. (If required, the original amounts for each individual transaction can be included in the same component on transaction details level.)

Type: *This message item is composed of the following* ***AmountAndCurrencyExchange2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.108		InstructedAmount	<InstdAmt>	[0..1]	
2.111		TransactionAmount	<TxAmt>	[0..1]	
2.114		CounterValueAmount	<CntrValAmt>	[0..1]	
2.117		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]	
2.120		ProprietaryAmount	<PrtryAmt>	[0..n]	

2.108 InstructedAmount <InstdAmt>

Presence: [0..1]

Definition: Identifies the amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party and provides currency exchange info in case the instructed amount and/or currency is/are different from the entry amount and/or currency.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.109		Amount	<Amt>	[1..1]	Amount
2.110		CurrencyExchange	<CcyXchg>	[0..1]	+

2.109 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.110 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.111 TransactionAmount <TxAmt>

Presence: [0..1]
Definition: Amount of the underlying transaction.
Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.112		Amount	<Amt>	[1..1]	Amount
2.113		CurrencyExchange	<CcyXchg>	[0..1]	+

2.112 Amount <Amt>

Presence: [1..1]
Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.113 CurrencyExchange <CcyXchg>

Presence: [0..1]
Definition: Reports on currency exchange information.
Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.114 CounterValueAmount <CntrValAmt>

Presence: [0..1]

Definition: Identifies the countervalue amount and provides currency exchange information. Either the counter amount quoted in an FX deal, or the result of the currency information applied to an instructed amount, before deduction of charges.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.115		Amount	<Amt>	[1..1]	Amount
2.116		CurrencyExchange	<CcyXchg>	[0..1]	+

2.115 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.116 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.117 AnnouncedPostingAmount <AnncdPstngAmt>

Presence: [0..1]

Definition: Information on the amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.

Amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.
In those situations, this amount may alternatively be called entitled amount.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.118		Amount	<Amt>	[1..1]	Amount
2.119		CurrencyExchange	<CcyXchg>	[0..1]	+

2.118 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.119 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.120 ProprietaryAmount <PrtryAmt>

Presence: [0..n]

Definition: Provides proprietary amount information.

Type: *This message item is composed of the following* ***AmountAndCurrencyExchangeDetails2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.121		Type	<Tp>	[1..1]	Text
2.122		Amount	<Amt>	[1..1]	Amount
2.123		CurrencyExchange	<CcyXchg>	[0..1]	+

2.121 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of amount.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.122 Amount <Amt>

Presence: [1..1]
Definition: Identifies the proprietary amount.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.123 CurrencyExchange <CcyXchg>

Presence: [0..1]
Definition: Reports on currency exchange information.
Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.124 Charges <Chrgs>

Presence: [0..n]
Definition: Provides information on the charges included in the entry amount.

Usage : this component is used in case of batch or aggregate bookings.

Type: *This message item is composed of the following **ChargesInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.125		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount
2.126		Amount	<Amt>	[1..1]	Amount
2.127		Type	<Tp>	[0..1]	
2.130		Rate	<Rate>	[0..1]	Rate
2.131		Bearer	 	[0..1]	Code
2.132		Party	<Pty>	[0..1]	+
2.133		Tax	<Tax>	[0..1]	

2.125 TotalChargesAndTaxAmount <TtlChrgsAndTaxAmt>

Presence: [0..1]
Definition: Total of all charges and taxes applied to the entry.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.126 Amount <Amt>

Presence: [1..1]
Definition: Transaction charges to be paid by the charge bearer.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.127 Type <Tp>

Presence: [0..1]
Definition: Identifies the type of charge.
Type: *This message item is composed of one of the following **ChargeTypeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.128	{Or	Code	<Cd>	[1..1]	Code
2.129	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text

2.128 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.127** Type.*
Definition: Service for which a charge is asked or paid, eg, brokerage fees.
Data Type: Code
*One of the following **ChargeType1Code** values must be used:*

Code	Name	Definition
BRKF	BrokerageFee	Fee paid to a broker for services provided.
COMM	Commission	Fee paid for services provided.

2.129 ProprietaryCode <PrtryCd>

Presence: [1..1]
*This message item is part of choice **2.127** Type.*
Definition: Type of charge is a bilaterally agreed code.

Data Type: Max4AlphaNumericText
Format: [a-zA-Z0-9]{1,4}

2.130 Rate <Rate>

Presence: [0..1]
Definition: Rate used to calculate the amount of the charge or fee.
Data Type: PercentageRate
Format: fractionDigits: 10
totalDigits: 11

2.131 Bearer

Presence: [0..1]
Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.
Data Type: Code
*When this message item is present, one of the following **ChargeBearerType1Code** values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.

Code	Name	Definition
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.132 Party <Pty>

Presence: [0..1]
Definition: Party that takes the transaction charges or to which the transaction charges are due.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.133 Tax <Tax>

Presence: [0..1]
Definition: Specifies tax details applied to charges.
Type: *This message item is composed of the following **TaxCharges1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.134		Identification	<Id>	[0..1]	Text
2.135		Rate	<Rate>	[0..1]	Rate
2.136		Amount	<Amt>	[0..1]	Amount

2.134 Identification <Id>

Presence: [0..1]
Definition: Reference identifying the nature of tax levied, eg, Value Added Tax (VAT).
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.135 Rate <Rate>

Presence: [0..1]

Definition: Rate used for calculation of the tax.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.136 Amount <Amt>

Presence: [0..1]

Definition: Amount of money resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.137 Interest <Intrst>

Presence: [0..n]

Definition: Set of elements providing details on the interest amount included in the entry amount.

Usage : it is used in case of batch or aggregate bookings.

Type: *This message item is composed of the following* ***TransactionInterest1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.138		Amount	<Amt>	[1..1]	Amount
2.139		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code
2.140		Type	<Tp>	[0..1]	
2.143		Rate	<Rate>	[0..n]	
2.148		FromToDate	<FrToDt>	[0..1]	+
2.149		Reason	<Rsn>	[0..1]	Text

2.138 Amount <Amt>

Presence: [1..1]

Definition: Identifies the amount of interest included in the entry amount.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode

[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.139 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]

Definition: Identifies whether the interest amount included in the entry amount is positive (CRDT) or negative (DBIT).

Data Type: Code

*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.140 Type <Tp>

Presence: [0..1]

Definition: Specifies the type of interest.

Type: *This message item is composed of one of the following **InterestType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.141	{Or	Code	<Cd>	[1..1]	Code
2.142	Or}	Proprietary	<Prtry>	[1..1]	Text

2.141 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.140** Type.*

Definition: Specifies the type of interest.

Data Type: Code

*One of the following **InterestType1Code** values must be used:*

Code	Name	Definition
INDY	IntraDay	During or within a business day.
OVRN	OverNight	Period of time between the end of a business day and the start of the next business day (usually the day after).

2.142 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.140** Type.*

Definition: Specifies the type of interest in uncoded form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.143 Rate <Rate>

Presence: [0..n]

Definition: Set of elements qualifying the interest rate.

Type: *This message item is composed of the following **Rate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.144		Rate	<Rate>	[1..1]	
2.147		ValidityRange	<VldtyRg>	[0..1]	+

2.144 Rate <Rate>

Presence: [1..1]

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.
Example percentage rate : Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Example Textual rate : Rate is expressed as a text.

Type: *This message item is composed of one of the following **RateTypeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.145	{Or	PercentageRate	<PctgRate>	[1..1]	Rate
2.146	Or}	TextualRate	<TxtlRate>	[1..1]	Text

2.145 PercentageRate <PctgRate>

Presence: [1..1]

*This message item is part of choice **2.144** Rate.*

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.146 TextualRate <TxtlRate>

Presence: [1..1]

*This message item is part of choice **2.144** Rate.*

Definition: Rate is expressed as a text.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.147 ValidityRange <VldtyRg>

Presence: [0..1]
Definition: An amount range where the interest rate is applicable
Type: *This message item is composed of the following **CurrencyAndAmountRange** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Amount	<Amt>	[1..1]	
	CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
	Currency	<Ccy>	[1..1]	Code

For additional Type information, please refer to CurrencyAndAmountRange p.339 in 'Message Item Types' section.

2.148 FromToDate <FrToDt>

Presence: [0..1]
Definition: Range of time between a start date and an end date.
Type: *This message item is composed of the following **DateTimePeriodDetails** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDateTime	<FrDtTm>	[1..1]	DateTime
	ToDateTime	<ToDtTm>	[1..1]	DateTime

For additional Type information, please refer to DateTimePeriodDetails p.345 in 'Message Item Types' section.

2.149 Reason <Rsn>

Presence: [0..1]
Definition: Underlying reason for the interest, eg, yearly credit interest on a savings account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.150 TransactionDetails <TxDtls>

Presence: [0..n]
Definition: Set of elements providing information on the underlying transaction (s).
Type: *This message item is composed of the following **EntryTransaction1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.151		References	<Refs>	[0..1]	
2.163		AmountDetails	<AmtDtls>	[0..1]	
2.180		Availability	<Avlbty>	[0..n]	
2.186		BankTransactionCode	<BkTxCd>	[0..1]	
2.195		Charges	<Chrgs>	[0..n]	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.208		Interest	<Intrst>	[0..n]	
2.221		RelatedParties	<RltdPties>	[0..1]	
2.233		RelatedAgents	<RltdAgts>	[0..1]	
2.246		Purpose	<Purp>	[0..1]	
2.249		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]	
2.256		RemittanceInformation	<RmtInf>	[0..1]	
2.281		RelatedDates	<RltdDts>	[0..1]	
2.292		RelatedPrice	<RltdPric>	[0..1]	
2.297		RelatedQuantities	<RltdQties>	[0..n]	
2.302		FinancialInstrumentIdentification	<FinInstrmId>	[0..1]	
2.307		Tax	<Tax>	[0..1]	+
2.308		ReturnInformation	<RtrInf>	[0..1]	
2.323		CorporateAction	<CorpActn>	[0..1]	
2.327		SafekeepingAccount	<SfkpgAcct>	[0..1]	+
2.328		AdditionalTransactionInformation	<AddtlTxInf>	[0..1]	Text

2.151 References <Refs>

Presence: [0..1]
Definition: Set of elements providing the identification of the underlying transaction.
Type: *This message item is composed of the following **TransactionReferences1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.152		MessageIdentification	<MsgId>	[0..1]	Text
2.153		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text
2.154		InstructionIdentification	<InstrId>	[0..1]	Text
2.155		EndToEndIdentification	<EndToEndId>	[0..1]	Text
2.156		TransactionIdentification	<TxId>	[0..1]	Text
2.157		MandateIdentification	<MndtId>	[0..1]	Text
2.158		ChequeNumber	<ChqNb>	[0..1]	Text
2.159		ClearingSystemReference	<ClrSysRef>	[0..1]	Text
2.160		Proprietary	<Prtry>	[0..1]	

2.152 MessageIdentification <MsgId>

Presence: [0..1]
Definition: Point to point reference assigned by the instructing party of the underlying message.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.153 AccountServicerReference <AcctSvcrRef>

Presence: [0..1]

Definition: The account servicing institution's reference for the transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.154 InstructionIdentification <InstrId>

Presence: [0..1]

Definition: Unique identification as assigned by an instructing party for an instructed party to unambiguously identify the instruction.

Usage: the instruction identification is a point to point reference that can be used between the instructing party and the instructed party to refer to the individual instruction. It can be included in several messages related to the instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.155 EndToEndIdentification <EndToEndId>

Presence: [0..1]

Definition: Unique identification assigned by the initiating party to unumbiguously identify the transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain.

Usage: The end-to-end identification can be used for reconciliation or to link tasks relating to the transaction. It can be included in several messages related to the transaction.

Usage: In case there are technical limitations to carry on multiple references, the end-to-end identification must be carried on throughout the entire end-to-end chain.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.156 TransactionIdentification <TxId>

Presence: [0..1]

Definition: Unique identification assigned by the first instructing agent to unambiguously identify the transaction and passed on, unchanged, throughout the entire interbank chain.

Usage: The transaction identification can be used for reconciliation, tracking or to link tasks relating to the transaction on the interbank level.
Usage: The instructing agent has to make sure the transaction identification is unique for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.157 MandateIdentification <MndtId>

Presence: [0..1]
Definition: Reference of the direct debit mandate that has been signed between by the debtor and the creditor.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.158 ChequeNumber <ChqNb>

Presence: [0..1]
Definition: Identifies the cheque number.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.159 ClearingSystemReference <ClrSysRef>

Presence: [0..1]
Definition: Unique and unambiguous identifier for a payment instruction, assigned by the clearing system.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.160 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary reference of an underlying transaction.
Type: *This message item is composed of the following **ProprietaryReference1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.161		Type	<Tp>	[1..1]	Text
2.162		Reference	<Ref>	[1..1]	Text

2.161 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of reference reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.162 Reference <Ref>

Presence: [1..1]
Definition: Proprietary reference specification related to the underlying transaction.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.163 AmountDetails <AmtDtls>

Presence: [0..1]

Definition: Set of elements providing details information on the original amount.

Usage: This component (on transaction level) should be used in case booking is for a single transaction and the original amount is different from the entry amount. It can also be used in case individual original amounts are provided in case of a batch or aggregate booking.

Type: *This message item is composed of the following **AmountAndCurrencyExchange2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.164		InstructedAmount	<InstdAmt>	[0..1]	
2.167		TransactionAmount	<TxAmt>	[0..1]	
2.170		CounterValueAmount	<CntrValAmt>	[0..1]	
2.173		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]	
2.176		ProprietaryAmount	<PrtryAmt>	[0..n]	

2.164 InstructedAmount <InstdAmt>

Presence: [0..1]

Definition: Identifies the amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party and provides currency exchange info in case the instructed amount and/or currency is/are different from the entry amount and/or currency.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.165		Amount	<Amt>	[1..1]	Amount
2.166		CurrencyExchange	<CcyXchg>	[0..1]	+

2.165 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.166 CurrencyExchange <CcyXchg>

Presence: [0..1]
Definition: Reports on currency exchange information.
Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.167 TransactionAmount <TxAmt>

Presence: [0..1]
Definition: Amount of the underlying transaction.
Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.168		Amount	<Amt>	[1..1]	Amount
2.169		CurrencyExchange	<CcyXchg>	[0..1]	+

2.168 Amount <Amt>

Presence: [1..1]
Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.169 CurrencyExchange <CcyXchg>

Presence: [0..1]
Definition: Reports on currency exchange information.

Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.170 CounterValueAmount <CntrValAmt>

Presence: [0..1]

Definition: Identifies the countervalue amount and provides currency exchange information. Either the counter amount quoted in an FX deal, or the result of the currency information applied to an instructed amount, before deduction of charges.

Type: *This message item is composed of the following* ***AmountAndCurrencyExchangeDetails1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.171		Amount	<Amt>	[1..1]	Amount
2.172		CurrencyExchange	<CcyXchg>	[0..1]	+

2.171 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.172 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.173 AnnouncedPostingAmount <AnncdPstngAmt>

Presence: [0..1]

Definition: Information on the amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.

Amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.
In those situations, this amount may alternatively be called entitled amount.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.174		Amount	<Amt>	[1..1]	Amount
2.175		CurrencyExchange	<CcyXchg>	[0..1]	+

2.174 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.175 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.176 ProprietaryAmount <PrtryAmt>

Presence: [0..n]
Definition: Provides proprietary amount information.
Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.177		Type	<Tp>	[1..1]	Text
2.178		Amount	<Amt>	[1..1]	Amount
2.179		CurrencyExchange	<CcyXchg>	[0..1]	+

2.177 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of amount.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.178 Amount <Amt>

Presence: [1..1]
Definition: Identifies the proprietary amount.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.179 CurrencyExchange <CcyXchg>

Presence: [0..1]
Definition: Reports on currency exchange information.
Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.180 Availability <Avlbty>

Presence: [0..n]
Definition: Set of elements used to indicate when the booked funds will become available, ie can be accessed and start generating interest.

Usage : this type of info is eg used in US, and is linked to particular instruments, such as cheques.
Example : When a cheque is deposited, it will be booked on the deposit day, but the funds will only be accessible as of the indicated availability day (according to national banking regulations).

Type: *This message item is composed of the following **CashBalanceAvailability1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.181		Date	<Dt>	[1..1]	
2.184		Amount	<Amt>	[1..1]	Amount
2.185		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

2.181 Date <Dt>

Presence: [1..1]
Definition: Indicates when the amount of money will become available.
Type: *This message item is composed of one of the following **CashBalanceAvailabilityDate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.182	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text
2.183	Or}	ActualDate	<ActlDt>	[1..1]	DateTime

2.182 NumberOfDays <NbOfDays>

Presence: [1..1]
*This message item is part of choice **2.181** Date.*
Definition: Indicates the number of float days attached to the balance.
Data Type: Max15PlusSignedNumericText
Format: [+]{0,1}[0-9]{1,15}

2.183 ActualDate <ActlDt>

Presence: [1..1]
*This message item is part of choice **2.181** Date.*
Definition: Identifies the actual availability date.
Data Type: ISODate

2.184 Amount <Amt>

Presence: [1..1]
Definition: Identifies the available amount.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.185 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Indicates whether the availability balance is a credit or a debit balance. A zero balance is considered to be a credit balance
Data Type: Code
*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.186 BankTransactionCode <BkTxCd>

Presence: [0..1]
Definition: Set of elements to fully identify the type of underlying transaction resulting in an entry.
Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.187		Domain	<Domn>	[0..1]	
2.192		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.187 Domain <Domn>

Presence: [0..1]

Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.

Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.188		Code	<Cd>	[1..1]	Code
2.189		Family	<Fmly>	[1..1]	

2.188 Code <Cd>

Presence: [1..1]

Definition: Specifies the business area of the underlying transaction.

Data Type: ExternalBankTransactionDomainCode

Format: maxLength: 4
minLength: 1

2.189 Family <Fmly>

Presence: [1..1]

Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.

Type: *This message item is composed of the following **BankTransactionCodeStructure3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.190		Code	<Cd>	[1..1]	Code
2.191		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.190 Code <Cd>

Presence: [1..1]
Definition: Specifies the family within a domain.
Data Type: ExternalBankTransactionFamilyCode
Format: maxLength: 4
minLength: 1

2.191 SubFamilyCode <SubFmlyCd>

Presence: [1..1]
Definition: Specifies the sub-product family within a specific family.
Data Type: ExternalBankTransactionSubFamilyCode
Format: maxLength: 4
minLength: 1

2.192 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary identification of the bank transaction code, as defined by the issuer.
Type: *This message item is composed of the following **ProprietaryBankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.193		Code	<Cd>	[1..1]	Text
2.194		Issuer	<Issr>	[0..1]	Text

2.193 Code <Cd>

Presence: [1..1]
Definition: Proprietary bank transaction code to identify the underlying transaction.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.194 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the proprietary bank transaction code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.195 Charges <Chrgs>

Presence: [0..n]
Definition: Provides information on the charges included in the entry amount.

Usage : This component (on transaction level) can be used in case the booking is for a single transaction, and charges are included in the entry amount. It can also be used in case individual charge amounts are applied to individual transactions in case of a batch or aggregate amount booking.

Type: *This message item is composed of the following* ***ChargesInformation3*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.196		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount
2.197		Amount	<Amt>	[1..1]	Amount
2.198		Type	<Tp>	[0..1]	
2.201		Rate	<Rate>	[0..1]	Rate
2.202		Bearer	 	[0..1]	Code
2.203		Party	<Pty>	[0..1]	+
2.204		Tax	<Tax>	[0..1]	

2.196 TotalChargesAndTaxAmount <TtlChrgsAndTaxAmt>

Presence: [0..1]
Definition: Total of all charges and taxes applied to the entry.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.197 Amount <Amt>

Presence: [1..1]
Definition: Transaction charges to be paid by the charge bearer.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.198 Type <Tp>

Presence: [0..1]
Definition: Identifies the type of charge.
Type: *This message item is composed of one of the following* ***ChargeTypeChoice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.199	{Or	Code	<Cd>	[1..1]	Code
2.200	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text

2.199 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.198** Type.*
Definition: Service for which a charge is asked or paid, eg, brokerage fees.
Data Type: Code
*One of the following **ChargeType1Code** values must be used:*

Code	Name	Definition
BRKF	BrokerageFee	Fee paid to a broker for services provided.
COMM	Commission	Fee paid for services provided.

2.200 ProprietaryCode <PrtryCd>

Presence: [1..1]
*This message item is part of choice **2.198** Type.*
Definition: Type of charge is a bilaterally agreed code.

Data Type: Max4AlphaNumericText
Format: [a-zA-Z0-9]{1,4}

2.201 Rate <Rate>

Presence: [0..1]
Definition: Rate used to calculate the amount of the charge or fee.
Data Type: PercentageRate
Format: fractionDigits: 10
totalDigits: 11

2.202 Bearer

Presence: [0..1]
Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.
Data Type: Code
*When this message item is present, one of the following **ChargeBearerType1Code** values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on

Code	Name	Definition
		the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.203 Party <Pty>

Presence: [0..1]
Definition: Party that takes the transaction charges or to which the transaction charges are due.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.204 Tax <Tax>

Presence: [0..1]
Definition: Specifies tax details applied to charges.
Type: *This message item is composed of the following **TaxCharges1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.205		Identification	<Id>	[0..1]	Text
2.206		Rate	<Rate>	[0..1]	Rate
2.207		Amount	<Amt>	[0..1]	Amount

2.205 Identification <Id>

Presence: [0..1]
Definition: Reference identifying the nature of tax levied, eg, Value Added Tax (VAT).
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.206 Rate <Rate>

Presence: [0..1]
Definition: Rate used for calculation of the tax.
Data Type: PercentageRate
Format: fractionDigits: 10
totalDigits: 11

2.207 Amount <Amt>

Presence: [0..1]

Definition: Amount of money resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.208 Interest <Intrst>

Presence: [0..n]

Definition: Set of elements providing details on the interest amount included in the entry amount.

Usage : This component (on transaction level) can be used in case the booking is for a single transaction, and interest amount is included in the entry amount. It can also be used in case individual interest amounts are applied to individual transactions in case of a batch or aggregate amount booking.

Type: *This message item is composed of the following* ***TransactionInterest1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.209		Amount	<Amt>	[1..1]	Amount
2.210		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code
2.211		Type	<Tp>	[0..1]	
2.214		Rate	<Rate>	[0..n]	
2.219		FromToDate	<FrToDt>	[0..1]	+
2.220		Reason	<Rsn>	[0..1]	Text

2.209 Amount <Amt>

Presence: [1..1]

Definition: Identifies the amount of interest included in the entry amount.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.210 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Identifies whether the interest amount included in the entry amount is positive (CRDT) or negative (DBIT).
Data Type: Code
*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.211 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of interest.
Type: *This message item is composed of one of the following **InterestType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.212	{Or	Code	<Cd>	[1..1]	Code
2.213	Or}	Proprietary	<Prtry>	[1..1]	Text

2.212 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.211** Type.*
Definition: Specifies the type of interest.
Data Type: Code
*One of the following **InterestType1Code** values must be used:*

Code	Name	Definition
INDY	IntraDay	During or within a business day.
OVRN	OverNight	Period of time between the end of a business day and the start of the next business day (usually the day after).

2.213 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.211** Type.*
Definition: Specifies the type of interest in uncoded form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.214 Rate <Rate>

Presence: [0..n]
Definition: Set of elements qualifying the interest rate.

Type: *This message item is composed of the following **Rate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.215		Rate	<Rate>	[1..1]	
2.218		ValidityRange	<VldtyRg>	[0..1]	+

2.215 Rate <Rate>

Presence: [1..1]

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.
Example percentage rate : Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Example Textual rate : Rate is expressed as a text.

Type: *This message item is composed of one of the following **RateTypeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.216	{Or	PercentageRate	<PctgRate>	[1..1]	Rate
2.217	Or}	TextualRate	<TxtlRate>	[1..1]	Text

2.216 PercentageRate <PctgRate>

Presence: [1..1]

*This message item is part of choice **2.215** Rate.*

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.217 TextualRate <TxtlRate>

Presence: [1..1]

*This message item is part of choice **2.215** Rate.*

Definition: Rate is expressed as a text.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.218 ValidityRange <VldtyRg>

Presence: [0..1]

Definition: An amount range where the interest rate is applicable

Type: *This message item is composed of the following **CurrencyAndAmountRange** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Amount	<Amt>	[1..1]	
	CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
	Currency	<Ccy>	[1..1]	Code

For additional Type information, please refer to CurrencyAndAmountRange p.339 in 'Message Item Types' section.

2.219 FromToDate <FrToDt>

Presence: [0..1]
Definition: Range of time between a start date and an end date.
Type: *This message item is composed of the following **DateTimePeriodDetails** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDateTime	<FrDtTm>	[1..1]	DateTime
	ToDateTime	<ToDtTm>	[1..1]	DateTime

For additional Type information, please refer to DateTimePeriodDetails p.345 in 'Message Item Types' section.

2.220 Reason <Rsn>

Presence: [0..1]
Definition: Underlying reason for the interest, eg, yearly credit interest on a savings account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.221 RelatedParties <RltdPties>

Presence: [0..1]
Definition: Set of elements identifying the parties related to the underlying transaction.
Type: *This message item is composed of the following **TransactionParty1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.222		InitiatingParty	<InitgPty>	[0..1]	+
2.223		Debtor	<Dbtr>	[0..1]	+
2.224		DebtorAccount	<DbtrAcct>	[0..1]	+
2.225		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.226		Creditor	<Cdtr>	[0..1]	+
2.227		CreditorAccount	<CdtrAcct>	[0..1]	+
2.228		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.229		TradingParty	<TradgPty>	[0..1]	+
2.230		Proprietary	<Prtry>	[0..n]	

2.222 InitiatingParty <InitgPty>

Presence: [0..1]

Definition: Party initiating the payment to an agent. In the payment context, this can either be the debtor (in a credit transfer), the creditor (in a direct debit), or a party that initiates the payment on behalf of the debtor or creditor. In the context of treasury, the party that instructs the trading party to execute a treasury deal on its behalf.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.223 Debtor <Dbtr>

Presence: [0..1]

Definition: Party that owes an amount of money to the (ultimate) creditor.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.224 DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.225 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.226 Creditor <Cdtr>

Presence: [0..1]
Definition: Party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.227 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor of the payment transaction.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.228 UltimateCreditor <UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.229 TradingParty <TradgPty>

Presence: [0..1]

Definition: Party that plays an active role in planning and executing the transactions that create or liquidate investments of the investors assets, or that move the investor's assets from one investment to another. A trading party is a trade instructor, an investment decision-maker, a post trade administrator, or a trader. In the context of treasury, it is the party negotiates and executes the treasury transaction.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.230 Proprietary <Prtry>

Presence: [0..n]

Definition: Provides proprietary party information.

Type: *This message item is composed of the following **ProprietaryParty1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.231		Type	<Tp>	[1..1]	Text
2.232		Party	<Pty>	[1..1]	+

2.231 Type <Tp>

Presence: [1..1]

Definition: Identifies the type of proprietary party reported.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.232 Party <Pty>

Presence: [1..1]
Definition: Proprietary party.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.233 RelatedAgents <RltdAgts>

Presence: [0..1]
Definition: Set of elements identifying the agents related to the underlying transaction.
Type: *This message item is composed of the following **TransactionAgents1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.234		DebtorAgent	<DbtrAgt>	[0..1]	+
2.235		CreditorAgent	<CdtrAgt>	[0..1]	+
2.236		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+
2.237		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+
2.238		IntermediaryAgent3	<IntrmyAgt3>	[0..1]	+
2.239		ReceivingAgent	<RcvgAgt>	[0..1]	+
2.240		DeliveringAgent	<DlvrgAgt>	[0..1]	+
2.241		IssuingAgent	<IssgAgt>	[0..1]	+
2.242		SettlementPlace	<SttlmPlc>	[0..1]	+
2.243		Proprietary	<Prtry>	[0..n]	

2.234 DebtorAgent <DbtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.235 CreditorAgent <CdtrAgt>

Presence: [0..1]

Definition: Financial institution servicing an account for the creditor.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.236 IntermediaryAgent1 <IntrmyAgt1>

Presence: [0..1]

Definition: Agent between the debtor agent and creditor agent.

Usage: If more than one intermediary agent is present, then IntermediaryAgent1 identifies the agent between the debtor agent and the intermediary agent 2.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.237 IntermediaryAgent2 <IntrmyAgt2>

Presence: [0..1]

Definition: Agent between the debtor agent and creditor agent.

Usage: If more than two intermediary agents are present, then IntermediaryAgent2 identifies the agent between the intermediary agent 1 and the intermediary agent 3.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.238 IntermediaryAgent3 <IntrmyAgt3>

Presence: [0..1]

Definition: Agent between the debtor agent and creditor agent.

Usage: If IntermediaryAgent3 is present, then it identifies the agent between the intermediary agent 2 and the creditor agent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.239 ReceivingAgent <RcvgAgt>

Presence: [0..1]

Definition: Party that receives securities from the delivering agent at the place of settlement, eg, central securities depository.
Can also be used in the context of treasury operations.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.240 DeliveringAgent <DlvrgAgt>

Presence: [0..1]

Definition: Party that delivers securities to the receiving agent at the place of settlement, eg, central securities depository.
Can also be used in the context of treasury operations.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.241 IssuingAgent <IssgAgt>

Presence: [0..1]
Definition: Legal entity that has the right to issue securities.
Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.242 SettlementPlace <SttlmPlc>

Presence: [0..1]
Definition: Place where settlement of the securities takes place.

Note : this is typed by a financial institution identification - as this is the standard way of identifying eg securities settlement agent/central system.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.243 Proprietary <Prtry>

Presence: [0..n]
Definition: Proprietary agent related to the underlying transaction.
Type: *This message item is composed of the following* ***ProprietaryAgent1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.244		Type	<Tp>	[1..1]	Text
2.245		Agent	<Agt>	[1..1]	+

2.244 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of proprietary agent reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.245 Agent <Agt>

Presence: [1..1]
Definition: Proprietary agent.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.246 Purpose <Purp>

Presence: [0..1]
Definition: Underlying reason for the payment transaction, eg, a charity payment, or a commercial agreement between the creditor and the debtor.

Usage: purpose is used by the end-customers, ie originating party, initiating party, debtor, creditor, final party, to provide information concerning the nature of the payment transaction. Purpose is a content element, which is not used for processing by any of the agents involved in the payment chain.

Type: *This message item is composed of one of the following **Purpose1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.247	{Or	Code	<Cd>	[1..1]	Code
2.248	Or}	Proprietary	<Prtry>	[1..1]	Text

2.247 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.246** Purpose.*
Definition: Specifies the underlying reason for the payment transaction, as published in an external purpose code list.
Data Type: ExternalPurposeCode
Format: maxLength: 35
minLength: 1

2.248 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.246** Purpose.*
Definition: User community specific purpose.

Usage: When available, codes provided by local communities should be used.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.249 RelatedRemittanceInformation <RltdRmtInf>

Presence: [0..10]

Definition: Information related to the handling of the remittance information by any of the agents in the transaction processing chain.

Type: *This message item is composed of the following **RemittanceLocation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.250		RemittanceIdentification	<RmtId>	[0..1]	Text
2.251		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code
2.252		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text
2.253		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]	

2.250 RemittanceIdentification <RmtId>

Presence: [0..1]

Definition: Unique and unambiguous identification of the remittance information, e.g. a remittance advice, which is sent separately from the payment instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.251 RemittanceLocationMethod <RmtLctnMtd>

Presence: [0..1]

Definition: Specifies the method used to deliver the remittance advice information.

Data Type: Code

*When this message item is present, one of the following **RemittanceLocationMethod1Code** values must be used:*

Code	Name	Definition
EDIC	ElectronicDataInterchange	Remittance advice information must be sent through Electronic Data Interchange (EDI).
EMAL	EMail	Remittance advice information must be sent through e-mail.
FAXI	Fax	Remittance advice information must be faxed.
POST	Post	Remittance advice information must be sent through postal services.
URID	UniformResourceIdentifier	Remittance advice information needs to be sent to a Uniform Resource Identifier (URI). URI is a compact string of characters that uniquely identify an abstract or physical resource. URI's are the super-set of identifiers, such as URLs, email addresses, ftp sites, etc, and as such, provide the syntax for all of the identification schemes.

2.252 RemittanceLocationElectronicAddress <RmtLctnElctrncAdr>

Presence: [0..1]

Definition: Electronic address to which an agent is to send the remittance information.
Data Type: Max256Text
Format: maxLength: 256
minLength: 1

2.253 RemittanceLocationPostalAddress <RmtLctnPstlAdr>

Presence: [0..1]
Definition: Postal address to which an agent is to send the remittance information.
Type: *This message item is composed of the following **NameAndAddress3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.254		Name	<Nm>	[1..1]	Text
2.255		Address	<Adr>	[1..1]	+

2.254 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and is usually used to identify that identity.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.255 Address <Adr>

Presence: [1..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.369 in 'Message Item Types' section.

2.256 RemittanceInformation <RmtInf>

Presence: [0..1]
Definition: Information that enables the matching, ie, reconciliation, of a payment with the items that the payment is intended to settle, eg, commercial invoices in an account receivable system.

Type: *This message item is composed of the following* ***RemittanceInformation1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.257		Unstructured	<Ustrd>	[0..n]	Text
2.258		Structured	<Strd>	[0..n]	

2.257 Unstructured <Ustrd>

Presence: [0..n]

Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in an unstructured form.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.258 Structured <Strd>

Presence: [0..n]

Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in a structured form.

Type: *This message item is composed of the following* ***StructuredRemittanceInformation6*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.259		ReferredDocumentInformation	<RfrdDocInf>	[0..1]	
2.265		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime
2.266		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]	
2.272		CreditorReferenceInformation	<CdtrRefInf>	[0..1]	
2.278		Invoicer	<Invcr>	[0..1]	+
2.279		Invoicee	<Invcee>	[0..1]	+
2.280		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text

2.259 ReferredDocumentInformation <RfrdDocInf>

Presence: [0..1]

Definition: Reference information to allow the identification of the underlying reference documents.

Type: *This message item is composed of the following* ***ReferredDocumentInformation1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.260		ReferredDocumentType	<RfrdDocTp>	[0..1]	
2.264		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text

2.260 ReferredDocumentType <RfrdDocTp>

Presence: [0..1]

Definition: Provides the type of the referred document.

Type: *This message item is composed of the following **ReferredDocumentType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.261	{Or	Code	<Cd>	[1..1]	Code
2.262	Or}	Proprietary	<Prtry>	[1..1]	Text
2.263		Issuer	<Issr>	[0..1]	Text

2.261 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.260** ReferredDocumentType.*

Definition: Document type in a coded form.

Data Type: Code

*One of the following **DocumentType2Code** values must be used:*

Code	Name	Definition
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.

2.262 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.260** ReferredDocumentType.*

Definition: Proprietary identification of the type of the remittance document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.263 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the reference document type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.264 ReferredDocumentNumber <RfrdDocNb>

Presence: [0..1]
Definition: Unique and unambiguous identification number of the referred document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.265 ReferredDocumentRelatedDate <RfrdDocRltdDt>

Presence: [0..1]
Definition: Date associated with the referred document, eg, date of issue.
Data Type: ISODate

2.266 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..n]
Definition: Amount of money and currency of a document referred to in the remittance section. The amount is typically either the original amount due and payable, or the amount actually remitted for the referred document.
Type: *This message item is composed of one of the following **ReferredDocumentAmount1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.267	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount
2.268	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount
2.269	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount
2.270	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount
2.271	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount

2.267 DuePayableAmount <DuePyblAmt>

Presence: [1..1]
*This message item is part of choice **2.266** ReferredDocumentAmount.*
Definition: Amount specified is the exact amount due and payable to the creditor.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode

[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.268 DiscountAppliedAmount <DscntApldAmt>

Presence: [1..1]

*This message item is part of choice **2.266** ReferredDocumentAmount.*

Definition: Amount of money resulting from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.269 RemittedAmount <RmtdAmt>

Presence: [1..1]

*This message item is part of choice **2.266** ReferredDocumentAmount.*

Definition: Amount of money remitted for the referred document.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.270 CreditNoteAmount <CdtNoteAmt>

Presence: [1..1]

*This message item is part of choice **2.266** ReferredDocumentAmount.*

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.271 TaxAmount <TaxAmt>

Presence: [1..1]
*This message item is part of choice **2.266** ReferredDocumentAmount.*
Definition: Quantity of cash resulting from the calculation of the tax.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): CurrencyCode
ValidationByTable

2.272 CreditorReferenceInformation <CdtrRefInf>

Presence: [0..1]
Definition: Reference information provided by the creditor to allow the identification of the underlying documents.
Type: *This message item is composed of the following **CreditorReferenceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.273		CreditorReferenceType	<CdtrRefTp>	[0..1]	
2.277		CreditorReference	<CdtrRef>	[0..1]	Text

2.273 CreditorReferenceType <CdtrRefTp>

Presence: [0..1]
Definition: Provides the type of the creditor reference.
Type: *This message item is composed of the following **CreditorReferenceType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.274	{Or	Code	<Cd>	[1..1]	Code
2.275	Or}	Proprietary	<Prtry>	[1..1]	Text
2.276		Issuer	<Issr>	[0..1]	Text

2.274 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.273** CreditorReferenceType.*
Definition: Coded creditor reference type.
Data Type: Code
*One of the following **DocumentType3Code** values must be used:*

Code	Name	Definition
DISP	DispatchAdvice	Document is a dispatch advice.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
PUOR	PurchaseOrder	Document is a purchase order.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SCOR	StructuredCommunicationReference	Document is a structured communication reference provided by the creditor to identify the referred transaction.

2.275 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.273** CreditorReferenceType.*

Definition: Creditor reference type not avilable in a coded format.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.276 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the credit reference type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.277 CreditorReference <CdtrRef>

Presence: [0..1]

Definition: Unique and unambiguous reference assigned by the creditor to refer to the payment transaction.

Usage: if available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the cash.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.278 Invoicer <Invcr>

Presence: [0..1]

Definition: Identification of the organization issuing the invoice when different than the creditor or final party.

Type: *This message item is composed of the following* ***PartyIdentification8*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.279 Invoicee <Invcee>

Presence: [0..1]
Definition: Identification of the party to whom an invoice is issued, when different than the originator or debtor.
Type: *This message item is composed of the following* ***PartyIdentification8*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.280 AdditionalRemittanceInformation <AddtlRmtInf>

Presence: [0..1]
Definition: Additional information, in free text form, to complement the structured remittance information.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

2.281 RelatedDates <RltdDts>

Presence: [0..1]
Definition: Set of elements identifying the dates related to the underlying transactions.
Type: *This message item is composed of the following* ***TransactionDates1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.282		AcceptanceDateTime	<AccptncDtTm>	[0..1]	DateTime
2.283		TradeDate	<TradDt>	[0..1]	DateTime
2.284		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime
2.285		StartDate	<StartDt>	[0..1]	DateTime
2.286		EndDate	<EndDt>	[0..1]	DateTime

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.287		TransactionDateTime	<TxDtTm>	[0..1]	DateTime
2.288		Proprietary	<Prtry>	[0..n]	

2.282 AcceptanceDateTime <AccptncDtTm>

Presence: [0..1]

Definition: Point in time when the payment order from the initiating party meets the processing conditions of the account servicing agent (debtor's agent in case of a credit transfer, creditor's agent in case of a direct debit). This means - amongst others - that the account servicing agent has received the payment order and has applied checks as eg, authorisation, availability of funds.

Data Type: ISODateTime

2.283 TradeDate <TradDt>

Presence: [0..1]

Definition: Date on which the trade was executed.

Data Type: ISODate

2.284 InterbankSettlementDate <IntrBkSttlmDt>

Presence: [0..1]

Definition: Date on which the amount of money ceases to be available to the agent that owes it and when the amount of money becomes available to the agent to which it is due.

Data Type: ISODate

2.285 StartDate <StartDt>

Presence: [0..1]

Definition: Start date of the underlying transaction, such as a treasury transaction, an investment plan.

Data Type: ISODate

2.286 EndDate <EndDt>

Presence: [0..1]

Definition: End date of the underlying transaction, such as a treasury transaction, an investment plan.

Data Type: ISODate

2.287 TransactionDateTime <TxDtTm>

Presence: [0..1]

Definition: Date and time of the underlying transaction.

Data Type: ISODateTime

2.288 Proprietary <Prtry>

Presence: [0..n]

Definition: Proprietary date related to the underlying transaction.

Type: *This message item is composed of the following **ProprietaryDate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.289		Type	<Tp>	[1..1]	Text
2.290	{Or	Date	<Dt>	[1..1]	DateTime
2.291	Or}	DateTime	<DtTm>	[1..1]	DateTime

2.289 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of date reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.290 Date <Dt>

Presence: [1..1]
*This message item is part of choice **2.288** Proprietary.*
Definition: Date in ISO format.
Data Type: ISODate

2.291 DateTime <DtTm>

Presence: [1..1]
*This message item is part of choice **2.288** Proprietary.*
Definition: Date and time in ISO format.
Data Type: ISODateTime

2.292 RelatedPrice <RltdPric>

Presence: [0..1]
Definition: Set of elements identifying the price information related to the underlying transaction.
Type: *This message item is composed of one of the following **TransactionPrice1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.293	{Or	DealPrice	<DealPric>	[1..1]	Amount
2.294	Or}	Proprietary	<Prtry>	[1..n]	

2.293 DealPrice <DealPric>

Presence: [1..1]
*This message item is part of choice **2.292** RelatedPrice.*
Definition: Specifies the price of the traded financial instrument.
This is the deal price of the individual trade transaction.
If there is only one trade transaction for the execution of the trade, then the deal price could equal the executed trade price (unless, for example, the price includes commissions or rounding, or some other factor has been applied to the deal price or the executed trade price, or both).
Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.294 Proprietary <Prtry>

Presence: [1..n]

This message item is part of choice ***2.292*** *RelatedPrice.*

Definition: Proprietary price specification of the underlying transaction.

Type: *This message item is composed of the following* ***ProprietaryPrice1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.295		Type	<Tp>	[1..1]	Text
2.296		Price	<Pric>	[1..1]	Amount

2.295 Type <Tp>

Presence: [1..1]

Definition: Identifies the type of price reported.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.296 Price <Pric>

Presence: [1..1]

Definition: Proprietary price specification related to the underlying transaction.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.297 RelatedQuantities <RltdQties>

Presence: [0..n]

Definition: Identifies related quantities (eg of securities) in the underlying transaction.

Type: *This message item is composed of one of the following* ***TransactionQuantities1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.298	{Or	Quantity	<Qty>	[1..1]	+
2.299	Or}	Proprietary	<Prtry>	[1..1]	

2.298 Quantity <Qty>

Presence: [1..1]
*This message item is part of choice **2.297** RelatedQuantities.*
Definition: Specifies the quantity (eg of securities) in the underlying transaction.
Type: *This message item is composed of one of the following **FinancialInstrumentQuantityChoice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	Unit	<Unit>	[1..1]	Quantity
Or	FaceAmount	<FaceAmt>	[1..1]	Amount
Or}	AmortisedValue	<AmtsdVal>	[1..1]	Amount

For additional Type information, please refer to FinancialInstrumentQuantityChoice p.371 in 'Message Item Types' section.

2.299 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.297** RelatedQuantities.*
Definition: Proprietary quantities specification defined in the underlying transaction.
Type: *This message item is composed of the following **ProprietaryQuantity1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.300		Type	<Tp>	[1..1]	Text
2.301		Quantity	<Qty>	[1..1]	Text

2.300 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of proprietary quantity reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.301 Quantity <Qty>

Presence: [1..1]
Definition: Provides the proprietary quantity in free format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.302 FinancialInstrumentIdentification <FinInstrmId>

Presence: [0..1]

Definition: Identification of a security, as assigned under a formal or proprietary identification scheme.

Type: *This message item is composed of one of the following **SecurityIdentification4Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.303	{Or	ISIN	<ISIN>	[1..1]	Identifier
2.304	Or}	Proprietary	<Prtry>	[1..1]	

2.303 ISIN <ISIN>

Presence: [1..1]

*This message item is part of choice **2.302** FinancialInstrumentIdentification.*

Definition: International Securities Identification Number (ISIN). A numbering system designed by the United Nation's International Organisation for Standardisation (ISO). The ISIN is composed of a 2-character prefix representing the country of issue, followed by the national security number (if one exists), and a check digit. Each country has a national numbering agency that assigns ISIN numbers for securities in that country.

Data Type: ISINIdentifier

Format: [A-Z0-9]{12,12}

2.304 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.302** FinancialInstrumentIdentification.*

Definition: Proprietary identification of an underlying financial instrument.

Type: *This message item is composed of the following **AlternateSecurityIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.305		Type	<Tp>	[1..1]	Text
2.306		Identification	<Id>	[1..1]	Text

2.305 Type <Tp>

Presence: [1..1]

Definition: Identifies the type of financial instrument identifier type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.306 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identifier of a security.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.307 Tax <Tax>

Presence: [0..1]

Definition: Amount of money due to the government or tax authority, according to various pre-defined parameters such as thresholds or income.

Type: *This message item is composed of the following **TaxInformation2** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	CreditorTaxIdentification	<CdtrTaxId>	[0..1]	Text
	CreditorTaxType	<CdtrTaxTp>	[0..1]	Text
	DebtorTaxIdentification	<DbtrTaxId>	[0..1]	Text
	TaxReferenceNumber	<TaxRefNb>	[0..1]	Text
	TotalTaxableBaseAmount	<TtlTaxblBaseAmt>	[0..1]	Amount
	TotalTaxAmount	<TtlTaxAmt>	[0..1]	Amount
	TaxDate	<TaxDt>	[0..1]	DateTime
	TaxTypeInformation	<TaxTpInf>	[0..n]	

For additional Type information, please refer to TaxInformation2 p.372 in 'Message Item Types' section.

2.308 ReturnInformation <RtrInf>

Presence: [0..1]

Definition: Set of elements specifying the return information.

Type: *This message item is composed of the following **ReturnReasonInformation5** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.309		OriginalBankTransactionCode	<OrgnlBkTxCd>	[0..1]	
2.318		ReturnOriginator	<RtrOrgtr>	[0..1]	+
2.319		ReturnReason	<RtrRsn>	[0..1]	
2.322		AdditionalReturnReasonInformation	<AddtlRtrRsnInf>	[0..n]	Text

Rule(s): ReturnReasonRule
If ReturnReason/Code is equal to 'NARR', then at least one occurrence of AdditionalReturnReasonInformation must be present.

2.309 OriginalBankTransactionCode <OrgnlBkTxCd>

Presence: [0..1]

Definition: Bank transaction code included in the original entry for the transaction.

Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.310		Domain	<Domn>	[0..1]	
2.315		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.310 Domain <Domn>

Presence: [0..1]

Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.

Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.311		Code	<Cd>	[1..1]	Code
2.312		Family	<Fmly>	[1..1]	

2.311 Code <Cd>

Presence: [1..1]

Definition: Specifies the business area of the underlying transaction.

Data Type: ExternalBankTransactionDomainCode

Format: maxLength: 4
minLength: 1

2.312 Family <Fmly>

Presence: [1..1]

Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.

Type: *This message item is composed of the following **BankTransactionCodeStructure3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.313		Code	<Cd>	[1..1]	Code
2.314		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.313 Code <Cd>

Presence: [1..1]

Definition: Specifies the family within a domain.

Data Type: ExternalBankTransactionFamilyCode

Format: maxLength: 4

minLength: 1

2.314 SubFamilyCode <SubFmlyCd>

Presence: [1..1]
Definition: Specifies the sub-product family within a specific family.
Data Type: ExternalBankTransactionSubFamilyCode
Format: maxLength: 4
minLength: 1

2.315 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary identification of the bank transaction code, as defined by the issuer.
Type: *This message item is composed of the following **ProprietaryBankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.316		Code	<Cd>	[1..1]	Text
2.317		Issuer	<Issr>	[0..1]	Text

2.316 Code <Cd>

Presence: [1..1]
Definition: Proprietary bank transaction code to identify the underlying transaction.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.317 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the proprietary bank transaction code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.318 ReturnOriginator <RtrOrgtr>

Presence: [0..1]
Definition: Party issuing the return.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.319 ReturnReason <RtrRsn>

Presence: [0..1]
Definition: Specifies the reason for the return.
Type: *This message item is composed of one of the following **ReturnReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.320	{Or	Code	<Cd>	[1..1]	Code
2.321	Or}	Proprietary	<Prtry>	[1..1]	Text

2.320 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.319** ReturnReason.*
Definition: Reason for the return in a coded form.
Data Type: Code
*One of the following **TransactionRejectReason2Code** values must be used:*

Code	Name	Definition
AC01	IncorrectAccountNumber	Format of the account number specified is not correct.
AC04	ClosedAccountNumber	Account number specified has been closed on the Receiver's books.
AC06	BlockedAccount	Account specified is blocked, prohibiting posting of transactions against it.
AG01	TransactionForbidden	Transaction forbidden on this type of account (formerly NoAgreement).
AG02	InvalidBankOperationCode	Bank Operation code specified in the message is not valid for receiver.
AM01	ZeroAmount	Specified message amount is equal to zero.
AM02	NotAllowedAmount	Specified transaction/message amount is greater than allowed maximum.
AM03	NotAllowedCurrency	Specified message amount is in an non processable currency outside of existing agreement.
AM04	InsufficientFunds	Amount of funds available to cover specified message amount is insufficient.
AM05	Duplication	This message appears to have been duplicated.
AM06	TooLowAmount	Specified transaction amount is less than agreed minimum.
AM07	BlockedAmount	Amount specified in message has been blocked by regulatory authorities.
AM09	WrongAmount	Amount received is not the amount agreed or expected.
AM10	InvalidControlSum	Sum of instructed amounts does not equal the control sum.

Code	Name	Definition
BE01	InconsistentWithEndCustomer	Identification of end customer is not consistent with associated account number. (formerly CreditorConsistency)
BE04	MissingCreditorAddress	Specification of creditor's address, which is required for payment, is missing/not correct (formerly IncorrectCreditorAddress).
BE05	UnrecognisedInitiatingParty	Party who initiated the message is not recognised by the end customer.
BE06	UnknownEndCustomer	End customer specified is not known at associated Sort/ National Bank Code or does no longer exist in the books.
BE07	MissingDebtorAddress	Specification of debtor's address, which is required for payment, is missing/not correct.
DT01	InvalidDate	Invalid date (eg, wrong settlement date).
ED01	CorrespondentBankNotPossible	Correspondent bank not possible.
ED03	BalanceInfoRequested	Balance of payments complementary info is requested.
ED05	SettlementFailed	Settlement of the transaction has failed.
MD01	NoMandate	Mandate is cancelled or invalid.
MD02	MissingMandatoryInformationInMandate	Mandate related information data required by the scheme is missing.
MD03	InvalidFileFormatForOtherReasonThanGroupingIndicator	File format incomplete or invalid.
MD04	InvalidFileFormatForGroupingIndicator	File format incorrect in terms of grouping indicator.
MD06	RefundRequestByEndCustomer	Return of funds requested by end customer.
MD07	EndCustomerDeceased	End customer is deceased.
MS02	NotSpecifiedReasonCustomerGenerated	Reason has not been specified by end customer.
MS03	NotSpecifiedReasonAgentGenerated	Reason has not been specified by agent.
NARR	Narrative	Reason is provided as narrative information in the additional reason information.
RC01	BankIdentifierIncorrect	Bank identifier code specified in the message has an incorrect format (formerly IncorrectFormatForRoutingCode).
RF01	NotUniqueTransactionReference	Transaction reference is not unique within the message.
TM01	CutOffTime	Associated message was received after agreed processing cut-off time.

2.321 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.319** ReturnReason.*
Definition: Reason for the return not catered for by the available codes.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.322 AdditionalReturnReasonInformation <AddtlRtrRsnInf>

Presence: [0..n]
Definition: Further details on the return reason.
Data Type: Max105Text
Format: maxLength: 105
minLength: 1

2.323 CorporateAction <CorpActn>

Presence: [0..1]
Definition: Set of elements identifying the underlying corporate action.
Type: *This message item is composed of the following **CorporateAction1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.324		Code	<Cd>	[0..1]	Text
2.325		Number	<Nb>	[0..1]	Text
2.326		Proprietary	<Prtry>	[0..1]	Text

2.324 Code <Cd>

Presence: [0..1]
Definition: Specifies the code of corporate action event, in free-text format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.325 Number <Nb>

Presence: [0..1]
Definition: Reference assigned by the account servicer to unambiguously identify a corporate action event.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.326 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary corporate action event information.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.327 SafekeepingAccount <SfkpgAcct>

Presence: [0..1]

Definition: Safekeeping or investment account. A safekeeping account is an account on which a securities entry is made. An investment account is an account between an investor(s) and a fund manager or a fund. The account can contain holdings in any investment fund or investment fund class managed (or distributed) by the fund manager, within the same fund family.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.328 AdditionalTransactionInformation <AddtlTxInf>

Presence: [0..1]

Definition: Further details on the transaction details.

Data Type: Max500Text

Format: maxLength: 500
minLength: 1

2.329 AdditionalEntryInformation <AddtlNtryInf>

Presence: [0..1]

Definition: Further details on the entry details.

Data Type: Max500Text

Format: maxLength: 500
minLength: 1

2.330 AdditionalStatementInformation <AddtlStmtInf>

Presence: [0..1]

Definition: Further details on the account statement.

Data Type: Max500Text

Format: maxLength: 500
minLength: 1

Business Example

Narrative

On 18 October, at 5.00 PM, AAAASESS sends an end-of-day BankToCustomerStatement to Company Finpetrol. It contains all booked items during the business day.

Business Description

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	AAAASESS-FP-STAT001
CreationDateTime	<CreDtTm>	2007-10-18T17:00:00+01:00
MessagePagination	<MsgPgntn>	
PageNumber	<PgNb>	1
LastPageIndicator	<LastPgInd>	True
Statement	**<Stmt>**	
Identification	<Id>	AAAASESS-FP-STAT001
CreationDateTime	<CreDtTm>	2007-10-18T17:00:00+01:00
FromToDate	<FrToDt>	
FromDateTime	<FrmDtTm>	2007-10-18T08:00:00+01:00
ToDateTime	<ToDtTm>	2007-10-18T17:00:00+01:00
Account	<Acct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	
ID	<Id>	50000000054910000003
Owner	<Ownr>	
Name	<Nm>	FINPETROL
Servicer	<Svcr>	
FinancialInstitutionIdentification	<FinInstnId>	
NameAndPostalAddress	<NmAndAdr>	
Name	<Nm>	AAAA BANKEN
Country	<Ctry>	SE
Balance	<Bal>	
Type	<Tp>	OPBD
Amount	<Amt Ccy=SEK>	500000
CreditDebitIndicator	<CdtDbtInd>	CRDT
Date	<Dt>	2007-10-17
Balance	<Bal>	
Type	<Tp>	CLBD
Amount	<Amt Ccy=SEK>	435678,50
CreditDebitIndicator	<CdtDbtInd>	CRDT
Date	<Dt>	2007-10-18
Entry	<Ntry>	

Amount	<Amt Ccy=SEK>	105678.50
CreditDebitIndicator	<CdtDbtInd>	CRDT
Status	<Sts>	BOOK
BookingDate	<BookgDt>	
DateTime	<DtTm>	2007-10-18T13:15:00+01:00
ValueDate	<ValDt>	
Date	<Dt>	2007-10-18
AccountServicerReference	<AcctSvcrRef>	AAAASESS-FP-CN-98765/01
BankTransactionCode	<BkTxCd>	
Domain	<Domn>	
Code	<Cd>	PAYM
Family	<Fmly>	
Code	<Cd>	0001
SubFamilyCode	<SbFmlyCd>	0005
TransactionDetails	<TxDtls>	
References	<Refs>	
EndToEndIdentification	<EndToEndId>FIN	MUELL/FINP/RA12345
RelatedParties	<RltdPties>	
Debtor	<Dbtr>	
Name	<Nm>	MUELLER
Entry	<Ntry>	
Amount	<Amt Ccy=SEK>	200000
CreditDebitIndicator	<CdtDbtInd>	DBIT
Status	<Sts>	BOOK
BookingDate	<BookgDt>	
DateTime	<DtTm>	2007-10-18T10:15:00+01:00
ValueDate	<ValDt>	
Date	<Dt>	2007-10-18
AccountServicerReference	<AcctSvcrRef>	AAAASESS-FP-ACCR-01
BankTransactionCode	<BkTxCd>	
Domain	<Domn>	
Code	<Cd>	PAYM
Family	<Fmly>	
Code	<Cd>	0001
SubFamilyCode	<SbFmlyCd>	0003
Batch	<Btch	
MessageIdentification	<MsgId>	FINP-0055

PaymentInformationIdentification	<PmtInfID>	FINP-0055–001
NumberOfTransactions	<NbOfTxs>	20
Entry	<Ntry>	
Amount	<Amt Ccy=SEK>	30000
CreditDebitIndicator	<CdtDbtInd>	CRED
Status	<Sts>	BOOK
BookingDate	<BookgDt>	
DateTime	<DtTm>	2007-10-18T15:15:00+01:00
ValueDate	<ValDt>	
Date	<Dt>	2007-10-18
AccountServicerReference	<AcctSvcrRef>	AAAASESS-FP-CONF-FX
BankTransactionCode	<BkTxCd>	
Domain	<Domn>	
Code	<Cd>	TREA
Family	<Fmly>	
Code	<Cd>	0002
SubFamilyCode	<SbFmlyCd>	0000
TransactionDetails	<TxDtls>	
References	<Refs>	
InstructionID	<InstrId>	FP-004567-FX
EndToEndId	<End2EndID>	AAAASS1085FINPSS
AmountDetails	<AmtDtls>	
CountervalueAmount	<CntrValAmt>	
Amount	<Amt Ccy=EUR>	3255.5694
CurrencyExchange	<CcyXchg>	
SourceCurrency	<SrcCcy>	EUR
ExchangeRate	<XchRate>	0.1085

XML Instance


```
<?xml version = "1.0" encoding = "UTF-8"?>
<Document xmlns = "urn:iso:std:iso:20022:tech:xsd:camt.053.001.01" xmlns:xsi = "http://www.w3.org/2001/
XMLSchema-instance">
  <BkToCstmrStmtV01>
    <GrpHdr>
      <MsgId>AAAASESS-FP-STAT001</MsgId>
      <CreDtTm>2007-10-18T17:00:00+01:00</CreDtTm>
      <MsgPgntn>
        <PgNb>1</PgNb>
        <LastPgInd>true</LastPgInd>
      </MsgPgntn>
```

```
</GrpHdr>
<Stmt>
  <Id>AAAASESS-FP-STAT001</Id>
  <CreDtTm>2007-10-18T17:00:00+01:00</CreDtTm>
  <FrToDt>
    <FrDtTm>2007-10-18T08:00:00+01:00</FrDtTm>
    <ToDtTm>2007-10-18T17:00:00+01:00</ToDtTm>
  </FrToDt>
  <Acct>
    <Id>
      <PrtryAcct>
        <Id>50000000054910000003</Id>
      </PrtryAcct>
    </Id>
    <Ownr>
      <Nm>FINPETROL</Nm>
    </Ownr>
    <Svcr>
      <FinInstnId>
        <NmAndAdr>
          <Nm>AAAA BANKEN</Nm>
          <PstlAdr>
            <Ctry>SE</Ctry>
          </PstlAdr>
        </NmAndAdr>
      </FinInstnId>
    </Svcr>
  </Acct>
  <Bal>
    <Tp>
      <Cd>OPBD</Cd>
    </Tp>
    <Amt Ccy = "SEK">500000</Amt>
    <CdtDbtInd>CRDT</CdtDbtInd>
    <Dt>
      <Dt>2007-10-17</Dt>
    </Dt>
  </Bal>
  <Bal>
    <Tp>
      <Cd>CLBD</Cd>
    </Tp>
    <Amt Ccy = "SEK">435678.50</Amt>
    <CdtDbtInd>CRDT</CdtDbtInd>
    <Dt>
      <Dt>2007-10-18</Dt>
    </Dt>
  </Bal>
  <Ntry>
    <Amt Ccy = "SEK">105678.50</Amt>
    <CdtDbtInd>CRDT</CdtDbtInd>
    <Sts>BOOK</Sts>
```

```
      <BookgDt>
        <DtTm>2007-10-18T13:15:00+01:00</DtTm>
      </BookgDt>
      <ValDt>
        <Dt>2007-10-18</Dt>
      </ValDt>
      <AcctSvcrRef>AAAASESS-FP-CN-98765/01</AcctSvcrRef>
      <BkTxCd>
        <Domn>
          <Cd>PAYM</Cd>
          <Fmly>
            <Cd>0001</Cd>
            <SubFmlyCd>0005</SubFmlyCd>
          </Fmly>
        </Domn>
      </BkTxCd>
      <TxDtls>
        <Refs>
          <EndToEndId>MUELL/FINP/RA12345</EndToEndId>
        </Refs>
        <RltdPties>
          <Dbtr>
            <Nm>MUELLER</Nm>
          </Dbtr>
        </RltdPties>
      </TxDtls>
    </Ntry>
    <Ntry>
      <Amt Ccy = "SEK">2000000</Amt>
      <CdtDbtInd>DBIT</CdtDbtInd>
      <Sts>BOOK</Sts>
      <BookgDt>
        <DtTm>2007-10-18T10:15:00+01:00</DtTm>
      </BookgDt>
      <ValDt>
        <Dt> 2007-10-18</Dt>
      </ValDt>
      <AcctSvcrRef> AAAASESS-FP-ACCR-01</AcctSvcrRef>
      <BkTxCd>
        <Domn>
          <Cd>PAYM</Cd>
          <Fmly>
            <Cd>0001</Cd>
            <SubFmlyCd>0003</SubFmlyCd>
          </Fmly>
        </Domn>
      </BkTxCd>
      <Btch>
        <MsgId>FINP-0055</MsgId>
        <PmtInfId>FINP-0055-001</PmtInfId>
        <NbOfTxs>20</NbOfTxs>
      </Btch>
```

```
        </Ntry>
        <Ntry>
          <Amt Ccy = "SEK">30000</Amt>
          <CdtDbtInd>CRDT</CdtDbtInd>
          <Sts>BOOK</Sts>
          <BookgDt>
            <DtTm>2007-10-18T15:15:00+01:00</DtTm>
          </BookgDt>
          <ValDt>
            <Dt>2007-10-18</Dt>
          </ValDt>
          <AcctSvcrRef>AAAASESS-FP-CONF-FX</AcctSvcrRef>
          <BkTxCd>
            <Domn>
              <Cd>TREA</Cd>
              <Fmly>
                <Cd>0002</Cd>
                <SubFmlyCd>0000</SubFmlyCd>
              </Fmly>
            </Domn>
          </BkTxCd>
          <TxDtls>
            <Refs>
              <InstrId>FP-004567-FX</InstrId>
              <EndToEndId>AAAASS1085FINPSS</EndToEndId>
            </Refs>
            <AmtDtls>
              <CntrValAmt>
                <Amt Ccy = "EUR">3255.5694</Amt>
                <CcyXchg>
                  <SrcCcy>EUR</SrcCcy>
                  <XchgRate>0.1085</XchgRate>
                </CcyXchg>
              </CntrValAmt>
            </AmtDtls>
          </TxDtls>
        </Ntry>
      </Stmt>
    </BkToCstmrStmtV01>
</Document>
```

MX camt.054.001.01 BankToCustomerDebitCreditNotificationV01

Message Scope and Usage

Scope

The Bank-to-Customer Debit/Credit Notification message is sent by the account servicer to an account owner or to a party authorised by the account owner to receive the message. It can be used to inform the account owner, or authorised party, of single or multiple debit and/or credit entries reported to the account.

Usage

The Bank-to-Customer Debit/Credit Notification message can contain reports for more than 1 account. It provides information for cash management and/or reconciliation.
It can be used to :
- report pending and booked items;
- notify one or more debit entries;
- notify one or more credit entries;
- notify a combination of debit and credit entries

It can include underlying details of transactions that have been included in the entry.
It is possible that the receiver of the message is not the account owner, but a party entitled by the account owner to receive the account information (also known as recipient).
It does not contain balance information.

Outline

The Bank-to-Customer DebitCreditNotification message is composed of 2 building blocks:
A. Group Header
This building block is mandatory and present once. It contains elements such as Message Identification and CreationDateTime.
B. Notification
This building block is mandatory and repetitive. It should be repeated for each account on which a notification is provided. The notification contains information on the booked and pending debit and/or credit entries.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<BkToCstmrDbtCdtNtfctnV01>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		MessageRecipient	<MsgRcpt>	[0..1]	+	
1.4		MessagePagination	<MsgPgntn>	[0..1]		
1.5		PageNumber	<PgNb>	[1..1]	Text	
1.6		LastPageIndicator	<LastPgInd>	[1..1]	Indicator	
1.7		AdditionalInformation	<AddtlInf>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		Notification	<Ntfctn>	[1..n]		
2.1		Identification	<Id>	[1..1]	Text	
2.2		ElectronicSequenceNumber	<ElctrncSeqNb>	[0..1]	Quantity	
2.3		LegalSequenceNumber	<LglSeqNb>	[0..1]	Quantity	
2.4		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
2.5		FromToDate	<FrToDt>	[0..1]	+	
2.6		CopyDuplicateIndicator	<CpyDplctInd>	[0..1]	Code	
2.7		Account	<Acct>	[1..1]		
2.8		Identification	<Id>	[1..1]	+	
2.9		Type	<Tp>	[0..1]		
2.10	{Or	Code	<Cd>	[1..1]	Code	
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.12		Currency	<Ccy>	[0..1]	Code	
2.13		Name	<Nm>	[0..1]	Text	
2.14		Owner	<Ownr>	[0..1]	+	
2.15		Servicer	<Svcr>	[0..1]	+	
2.16		RelatedAccount	<RltdAcct>	[0..1]	+	
2.17		TransactionsSummary	<TxsSummry>	[0..1]		
2.18		TotalEntries	<TtlNtries>	[0..1]		
2.19		NumberOfEntries	<NbOfNtries>	[0..1]	Text	
2.20		Sum	<Sum>	[0..1]	Quantity	
2.21		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity	
2.22		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code	
2.23		TotalCreditEntries	<TtlCdtNtries>	[0..1]		
2.24		NumberOfEntries	<NbOfNtries>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.25		Sum	<Sum>	[0..1]	Quantity	
2.26		TotalDebitEntries	<TtlDbtNtries>	[0..1]		
2.27		NumberOfEntries	<NbOfNtries>	[0..1]	Text	
2.28		Sum	<Sum>	[0..1]	Quantity	
2.29		TotalEntriesPerBankTransactionCode	<TtlNtriesPerBkTxCd>	[0..n]		
2.30		NumberOfEntries	<NbOfNtries>	[0..1]	Text	
2.31		Sum	<Sum>	[0..1]	Quantity	
2.32		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity	
2.33		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code	
2.34		BankTransactionCode	<BkTxCd>	[1..1]		
2.35		Domain	<Domn>	[0..1]		
2.36		Code	<Cd>	[1..1]	Code	
2.37		Family	<Fmly>	[1..1]		
2.38		Code	<Cd>	[1..1]	Code	
2.39		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.40		Proprietary	<Prtry>	[0..1]		
2.41		Code	<Cd>	[1..1]	Text	
2.42		Issuer	<Issr>	[0..1]	Text	
2.43		Availability	<Avlbty>	[0..n]		
2.44		Date	<Dt>	[1..1]		
2.45	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text	
2.46	Or}	ActualDate	<ActlDt>	[1..1]	DateTime	
2.47		Amount	<Amt>	[1..1]	Amount	
2.48		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.49		Entry	<Ntry>	[0..n]		
2.50		Amount	<Amt>	[1..1]	Amount	
2.51		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.52		ReversalIndicator	<RvslInd>	[0..1]	Indicator	
2.53		Status	<Sts>	[1..1]	Code	
2.54		BookingDate	<BookgDt>	[0..1]	+	
2.55		ValueDate	<ValDt>	[0..1]	+	
2.56		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text	
2.57		Availability	<Avlbty>	[0..n]		
2.58		Date	<Dt>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.59	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text	
2.60	Or}	ActualDate	<ActlDt>	[1..1]	DateTime	
2.61		Amount	<Amt>	[1..1]	Amount	
2.62		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.63		BankTransactionCode	<BkTxCd>	[1..1]		
2.64		Domain	<Domn>	[0..1]		
2.65		Code	<Cd>	[1..1]	Code	
2.66		Family	<Fmly>	[1..1]		
2.67		Code	<Cd>	[1..1]	Code	
2.68		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.69		Proprietary	<Prtry>	[0..1]		
2.70		Code	<Cd>	[1..1]	Text	
2.71		Issuer	<Issr>	[0..1]	Text	
2.72		CommissionWaiverIndicator	<ComssnWvrInd>	[0..1]	Indicator	
2.73		AdditionalInformationIndicator	<AddtlInfInd>	[0..1]		
2.74		MessageNameIdentification	<MsgNmId>	[0..1]	Text	
2.75		MessageIdentification	<MsgId>	[0..1]	Text	
2.76		Batch	<Btch>	[0..n]		
2.77		MessageIdentification	<MsgId>	[0..1]	Text	
2.78		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text	
2.79		NumberOfTransactions	<NbOfTxs>	[0..1]	Text	
2.80		AmountDetails	<AmtDtls>	[0..1]		
2.81		InstructedAmount	<InstdAmt>	[0..1]		
2.82		Amount	<Amt>	[1..1]	Amount	
2.83		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.84		TransactionAmount	<TxAmt>	[0..1]		
2.85		Amount	<Amt>	[1..1]	Amount	
2.86		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.87		CounterValueAmount	<CntrValAmt>	[0..1]		
2.88		Amount	<Amt>	[1..1]	Amount	
2.89		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.90		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]		
2.91		Amount	<Amt>	[1..1]	Amount	
2.92		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.93		ProprietaryAmount	<PrtryAmt>	[0..n]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.94		Type	<Tp>	[1..1]	Text	
2.95		Amount	<Amt>	[1..1]	Amount	
2.96		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.97		Charges	<Chrgs>	[0..n]		
2.98		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount	
2.99		Amount	<Amt>	[1..1]	Amount	
2.100		Type	<Tp>	[0..1]		
2.101	{Or	Code	<Cd>	[1..1]	Code	
2.102	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text	
2.103		Rate	<Rate>	[0..1]	Rate	
2.104		Bearer	 	[0..1]	Code	
2.105		Party	<Pty>	[0..1]	+	
2.106		Tax	<Tax>	[0..1]		
2.107		Identification	<Id>	[0..1]	Text	
2.108		Rate	<Rate>	[0..1]	Rate	
2.109		Amount	<Amt>	[0..1]	Amount	
2.110		Interest	<Intrst>	[0..n]		
2.111		Amount	<Amt>	[1..1]	Amount	
2.112		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.113		Type	<Tp>	[0..1]		
2.114	{Or	Code	<Cd>	[1..1]	Code	
2.115	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.116		Rate	<Rate>	[0..n]		
2.117		Rate	<Rate>	[1..1]		
2.118	{Or	PercentageRate	<PctgRate>	[1..1]	Rate	
2.119	Or}	TextualRate	<TxtlRate>	[1..1]	Text	
2.120		ValidityRange	<VldtyRg>	[0..1]	+	
2.121		FromToDate	<FrToDt>	[0..1]	+	
2.122		Reason	<Rsn>	[0..1]	Text	
2.123		TransactionDetails	<TxDtls>	[0..n]		
2.124		References	<Refs>	[0..1]		
2.125		MessageIdentification	<MsgId>	[0..1]	Text	
2.126		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text	
2.127		InstructionIdentification	<InstrId>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.128		EndToEndIdentification	<EndToEndId>	[0..1]	Text	
2.129		TransactionIdentification	<TxId>	[0..1]	Text	
2.130		MandateIdentification	<MndtId>	[0..1]	Text	
2.131		ChequeNumber	<ChqNb>	[0..1]	Text	
2.132		ClearingSystemReference	<ClrSysRef>	[0..1]	Text	
2.133		Proprietary	<Prtry>	[0..1]		
2.134		Type	<Tp>	[1..1]	Text	
2.135		Reference	<Ref>	[1..1]	Text	
2.136		AmountDetails	<AmtDtls>	[0..1]		
2.137		InstructedAmount	<InstdAmt>	[0..1]		
2.138		Amount	<Amt>	[1..1]	Amount	
2.139		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.140		TransactionAmount	<TxAmt>	[0..1]		
2.141		Amount	<Amt>	[1..1]	Amount	
2.142		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.143		CounterValueAmount	<CntrValAmt>	[0..1]		
2.144		Amount	<Amt>	[1..1]	Amount	
2.145		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.146		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]		
2.147		Amount	<Amt>	[1..1]	Amount	
2.148		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.149		ProprietaryAmount	<PrtryAmt>	[0..n]		
2.150		Type	<Tp>	[1..1]	Text	
2.151		Amount	<Amt>	[1..1]	Amount	
2.152		CurrencyExchange	<CcyXchg>	[0..1]	+	
2.153		Availability	<Avlbty>	[0..n]		
2.154		Date	<Dt>	[1..1]		
2.155	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text	
2.156	Or}	ActualDate	<ActlDt>	[1..1]	DateTime	
2.157		Amount	<Amt>	[1..1]	Amount	
2.158		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.159		BankTransactionCode	<BkTxCd>	[0..1]		
2.160		Domain	<Domn>	[0..1]		
2.161		Code	<Cd>	[1..1]	Code	
2.162		Family	<Fmly>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.163		Code	<Cd>	[1..1]	Code	
2.164		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.165		Proprietary	<Prtry>	[0..1]		
2.166		Code	<Cd>	[1..1]	Text	
2.167		Issuer	<Issr>	[0..1]	Text	
2.168		Charges	<Chrgs>	[0..n]		
2.169		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount	
2.170		Amount	<Amt>	[1..1]	Amount	
2.171		Type	<Tp>	[0..1]		
2.172	{Or	Code	<Cd>	[1..1]	Code	
2.173	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text	
2.174		Rate	<Rate>	[0..1]	Rate	
2.175		Bearer	 	[0..1]	Code	
2.176		Party	<Pty>	[0..1]	+	
2.177		Tax	<Tax>	[0..1]		
2.178		Identification	<Id>	[0..1]	Text	
2.179		Rate	<Rate>	[0..1]	Rate	
2.180		Amount	<Amt>	[0..1]	Amount	
2.181		Interest	<Intrst>	[0..n]		
2.182		Amount	<Amt>	[1..1]	Amount	
2.183		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code	
2.184		Type	<Tp>	[0..1]		
2.185	{Or	Code	<Cd>	[1..1]	Code	
2.186	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.187		Rate	<Rate>	[0..n]		
2.188		Rate	<Rate>	[1..1]		
2.189	{Or	PercentageRate	<PctgRate>	[1..1]	Rate	
2.190	Or}	TextualRate	<TxtlRate>	[1..1]	Text	
2.191		ValidityRange	<VldtyRg>	[0..1]	+	
2.192		FromToDate	<FrToDt>	[0..1]	+	
2.193		Reason	<Rsn>	[0..1]	Text	
2.194		RelatedParties	<RltdPties>	[0..1]		
2.195		InitiatingParty	<InitgPty>	[0..1]	+	
2.196		Debtor	<Dbtr>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.197		DebtorAccount	<DbtrAcct>	[0..1]	+	
2.198		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.199		Creditor	<Cdtr>	[0..1]	+	
2.200		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.201		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.202		TradingParty	<TradgPty>	[0..1]	+	
2.203		Proprietary	<Prtry>	[0..n]		
2.204		Type	<Tp>	[1..1]	Text	
2.205		Party	<Pty>	[1..1]	+	
2.206		RelatedAgents	<RltdAgts>	[0..1]		
2.207		DebtorAgent	<DbtrAgt>	[0..1]	+	
2.208		CreditorAgent	<CdtrAgt>	[0..1]	+	
2.209		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+	
2.210		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+	
2.211		IntermediaryAgent3	<IntrmyAgt3>	[0..1]	+	
2.212		ReceivingAgent	<RcvgAgt>	[0..1]	+	
2.213		DeliveringAgent	<DlvrgAgt>	[0..1]	+	
2.214		IssuingAgent	<IssgAgt>	[0..1]	+	
2.215		SettlementPlace	<SttlmPlc>	[0..1]	+	
2.216		Proprietary	<Prtry>	[0..n]		
2.217		Type	<Tp>	[1..1]	Text	
2.218		Agent	<Agt>	[1..1]	+	
2.219		Purpose	<Purp>	[0..1]		
2.220	{Or	Code	<Cd>	[1..1]	Code	
2.221	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.222		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]		
2.223		RemittanceIdentification	<RmtId>	[0..1]	Text	
2.224		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code	
2.225		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text	
2.226		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]		
2.227		Name	<Nm>	[1..1]	Text	
2.228		Address	<Adr>	[1..1]	+	
2.229		RemittanceInformation	<RmtInf>	[0..1]		
2.230		Unstructured	<Ustrd>	[0..n]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.231		Structured	<Strd>	[0..n]		
2.232		ReferredDocumentInformation	<RfrdDocInf>	[0..1]		
2.233		ReferredDocumentType	<RfrdDocTp>	[0..1]		
2.234	{Or	Code	<Cd>	[1..1]	Code	
2.235	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.236		Issuer	<Issr>	[0..1]	Text	
2.237		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text	
2.238		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime	
2.239		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]		
2.240	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount	
2.241	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount	
2.242	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount	
2.243	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount	
2.244	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount	
2.245		CreditorReferenceInformation	<CdtrRefInf>	[0..1]		
2.246		CreditorReferenceType	<CdtrRefTp>	[0..1]		
2.247	{Or	Code	<Cd>	[1..1]	Code	
2.248	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.249		Issuer	<Issr>	[0..1]	Text	
2.250		CreditorReference	<CdtrRef>	[0..1]	Text	
2.251		Invoicer	<Invcr>	[0..1]	+	
2.252		Invoicee	<Invcee>	[0..1]	+	
2.253		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text	
2.254		RelatedDates	<RltdDts>	[0..1]		
2.255		AcceptanceDateTime	<AccptncDtTm>	[0..1]	DateTime	
2.256		TradeDate	<TradDt>	[0..1]	DateTime	
2.257		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime	
2.258		StartDate	<StartDt>	[0..1]	DateTime	
2.259		EndDate	<EndDt>	[0..1]	DateTime	
2.260		TransactionDateTime	<TxDtTm>	[0..1]	DateTime	
2.261		Proprietary	<Prtry>	[0..n]		
2.262		Type	<Tp>	[1..1]	Text	
2.263	{Or	Date	<Dt>	[1..1]	DateTime	
2.264	Or}	DateTime	<DtTm>	[1..1]	DateTime	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.265		RelatedPrice	<RltdPric>	[0..1]		
2.266	{Or	DealPrice	<DealPric>	[1..1]	Amount	
2.267	Or}	Proprietary	<Prtry>	[1..n]		
2.268		Type	<Tp>	[1..1]	Text	
2.269		Price	<Pric>	[1..1]	Amount	
2.270		RelatedQuantities	<RltdQties>	[0..n]		
2.271	{Or	Quantity	<Qty>	[1..1]	+	
2.272	Or}	Proprietary	<Prtry>	[1..1]		
2.273		Type	<Tp>	[1..1]	Text	
2.274		Quantity	<Qty>	[1..1]	Text	
2.275		FinancialInstrumentIdentification	<FinInstrmId>	[0..1]		
2.276	{Or	ISIN	<ISIN>	[1..1]	Identifier	
2.277	Or}	Proprietary	<Prtry>	[1..1]		
2.278		Type	<Tp>	[1..1]	Text	
2.279		Identification	<Id>	[1..1]	Text	
2.280		Tax	<Tax>	[0..1]	+	
2.281		ReturnInformation	<RtrInf>	[0..1]		
2.282		OriginalBankTransactionCode	<OrgnlBkTxCd>	[0..1]		
2.283		Domain	<Domn>	[0..1]		
2.284		Code	<Cd>	[1..1]	Code	
2.285		Family	<Fmly>	[1..1]		
2.286		Code	<Cd>	[1..1]	Code	
2.287		SubFamilyCode	<SubFmlyCd>	[1..1]	Code	
2.288		Proprietary	<Prtry>	[0..1]		
2.289		Code	<Cd>	[1..1]	Text	
2.290		Issuer	<Issr>	[0..1]	Text	
2.291		ReturnOriginator	<RtrOrgtr>	[0..1]	+	
2.292		ReturnReason	<RtrRsn>	[0..1]		
2.293	{Or	Code	<Cd>	[1..1]	Code	
2.294	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.295		AdditionalReturnReasonInformation	<AddtlRtrRsnInf>	[0..n]	Text	
2.296		CorporateAction	<CorpActn>	[0..1]		
2.297		Code	<Cd>	[0..1]	Text	
2.298		Number	<Nb>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.299		Proprietary	<Prtry>	[0..1]	Text	
2.300		SafekeepingAccount	<SfkpgAcct>	[0..1]	+	
2.301		AdditionalTransactionInformation	<AddtlTxInf>	[0..1]	Text	
2.302		AdditionalEntryInformation	<AddtlNtryInf>	[0..1]	Text	
2.303		AdditionalNotificationInformation	<AddtlNtfctnInf>	[0..1]	Text	

Message Items Description

*The following section identifies the elements of the **BankToCustomerDebitCreditNotificationV01** message.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]
Definition: Common information for the message.
Type: *The **GroupHeader** block is composed of the following **GroupHeader23** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		MessageRecipient	<MsgRcpt>	[0..1]	+
1.4		MessagePagination	<MsgPgntn>	[0..1]	
1.7		AdditionalInformation	<AddtlInf>	[0..1]	Text

1.1 MessageIdentification <MsgId>

Presence: [1..1]
Definition: Point to point reference assigned by the account servicing institution and sent to the account owner to unambiguously identify the message.

Usage: The account servicing institution has to make sure that 'MessageIdentification' is unique per instructed party for a pre-agreed period.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]
Definition: Date and time at which the message was created by the account servicer.
Data Type: ISODateTime

1.3 MessageRecipient <MsgRcpt>

Presence: [0..1]

Definition: Party that is entitled by the account owner to receive information about movements in the account.

Guideline : MessageRecipient should only be identified when different from the account owner.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

1.4 MessagePagination <MsgPgntn>

Presence: [0..1]
Definition: Pagination of the message.

Usage: the pagination of the message is only allowed when agreed between the parties.

Type: *This message item is composed of the following **Pagination** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.5		PageNumber	<PgNb>	[1..1]	Text
1.6		LastPageIndicator	<LastPgInd>	[1..1]	Indicator

1.5 PageNumber <PgNb>

Presence: [1..1]
Definition: Page number.
Data Type: Max5NumericText
Format: [0-9]{1,5}

1.6 LastPageIndicator <LastPgInd>

Presence: [1..1]
Definition: Indicates the last page.
Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

1.7 AdditionalInformation <AddtlInf>

Presence: [0..1]
Definition: Further details on the message.
Data Type: Max500Text
Format: maxLength: 500
minLength: 1

2.0 Notification <Ntfctn>

Presence: [1..n]

Definition: Notifies debit and credit entries for the account.

Type: *The **Notification** block is composed of the following **AccountNotification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		Identification	<Id>	[1..1]	Text
2.2		ElectronicSequenceNumber	<ElctrncSeqNb>	[0..1]	Quantity
2.3		LegalSequenceNumber	<LglSeqNb>	[0..1]	Quantity
2.4		CreationDateTime	<CreDtTm>	[1..1]	DateTime
2.5		FromToDate	<FrToDt>	[0..1]	+
2.6		CopyDuplicateIndicator	<CpyDplctInd>	[0..1]	Code
2.7		Account	<Acct>	[1..1]	
2.16		RelatedAccount	<RltdAcct>	[0..1]	+
2.17		TransactionsSummary	<TxsSummry>	[0..1]	
2.49		Entry	<Ntry>	[0..n]	
2.303		AdditionalNotificationInformation	<AddtlNtfctnInf>	[0..1]	Text

2.1 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of the account report, assigned by the account servicer.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.2 ElectronicSequenceNumber <ElctrncSeqNb>

Presence: [0..1]

Definition: Sequential number of the report, assigned by the account servicer. It is increased incrementally for each report sent electronically.

Data Type: Number

Format: fractionDigits: 0
totalDigits: 18

2.3 LegalSequenceNumber <LglSeqNb>

Presence: [0..1]

Definition: Legal sequential number of the report, assigned by the account servicer. It is increased incrementally for each report sent.

Usage : in those scenarios where eg a paper statement is a legal requirement, the paper statement may have a different numbering than the electronic sequential number. Paper statements can for instance only be sent if movement on the account has taken place, whereas electronic statements can be sent eg each day, regardless of whether movements have taken place or not.

Data Type: Number
Format: fractionDigits: 0
totalDigits: 18

2.4 CreationDateTime <CreDtTm>

Presence: [1..1]
Definition: Date and time at which the report was created.
Data Type: ISODateTime

2.5 FromToDate <FrToDt>

Presence: [0..1]
Definition: Range of time between the start date and the end date for which the account notification is issued.
Type: *This message item is composed of the following **DateTimePeriodDetails** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDateTime	<FrDtTm>	[1..1]	DateTime
	ToDateTime	<ToDtTm>	[1..1]	DateTime

For additional Type information, please refer to DateTimePeriodDetails p.345 in 'Message Item Types' section.

2.6 CopyDuplicateIndicator <CpyDplctInd>

Presence: [0..1]
Definition: Specifies if this document is a copy, a duplicate, or a duplicate of a copy.
Data Type: Code
*When this message item is present, one of the following **CopyDuplicate1Code** values must be used:*

Code	Name	Definition
CODU	CopyDuplicate	Message is being sent as a copy to a party other than the account owner, for information purposes and the message is a duplicate of a message previously sent.
COPY	Copy	Message is being sent as a copy to a party other than the account owner, for information purposes.
DUPL	Duplicate	Message is for information/confirmation purposes. It is a duplicate of a message previously sent.

2.7 Account <Acct>

Presence: [1..1]
Definition: Business relationship between two entities; one entity is the account owner, the other entity is the account servicer.
Type: *This message item is composed of the following **CashAccount13** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.8		Identification	<Id>	[1..1]	+

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.9		Type	<Tp>	[0..1]	
2.12		Currency	<Ccy>	[0..1]	Code
2.13		Name	<Nm>	[0..1]	Text
2.14		Owner	<Ownr>	[0..1]	+
2.15		Servicer	<Svcr>	[0..1]	+

2.8 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following **AccountIdentification3Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier
Or}	ProprietaryAccount	<PrtryAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification3Choice p.333 in 'Message Item Types' section.

2.9 Type <Tp>

Presence: [0..1]
Definition: Nature, or use, of the account.
Type: *This message item is composed of one of the following **CashAccountType2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.10	{Or	Code	<Cd>	[1..1]	Code
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text

2.10 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.9** Type.*
Definition: Nature or use of the account in a coded form.
Data Type: Code
*One of the following **CashAccountType4Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.

Code	Name	Definition
CHAR	Charges	Account used for charges if different from the account for payment.
CISH	CashIncome	Account used for payment of income if different from the current cash account.
COMM	Commission	Account used for commission if different from the account for payment.
LOAN	Loan	Account used for loans.
MGLD	MarginalLending	Account used for a marginal lending facility.
MOMA	MoneyMarket	Account used for money markets if different from the cash account.
NREX	NonResidentExternal	Account used for non-resident external.
ODFT	Overdraft	Account is used for overdrafts.
ONDP	OverNightDeposit	Account used for overnight deposits.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SLRY	Salary	Accounts used for salary payments.
SVGS	Savings	Account used for savings.
TAXE	Tax	Account used for taxes if different from the account for payment.
TRAS	CashTrading	Account used for trading if different from the current cash account.

2.11 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.9** Type.*
Definition: Proprietary nature or use of the account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.12 Currency <Ccy>

Presence: [0..1]
Definition: Identification of the currency in which the account is held.
Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

2.13 Name <Nm>

Presence: [0..1]
Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.14 Owner <Ownr>

Presence: [0..1]

Definition: Party that legally owns the account.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.15 Servicer <Svcr>

Presence: [0..1]

Definition: Party that manages the account on behalf of the account owner, ie, manages the registration and booking of entries on the account, calculates balances on the account and provides information about the account.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.16 RelatedAccount <RltdAcct>

Presence: [0..1]

Definition: Identifies the parent account of the reported account.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.17 TransactionsSummary <TxsSummry>

Presence: [0..1]
Definition: Set of element providing summary information on entries.
Type: *This message item is composed of the following **TotalTransactions1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.18		TotalEntries	<TtlNtries>	[0..1]	
2.23		TotalCreditEntries	<TtlCdtNtries>	[0..1]	
2.26		TotalDebitEntries	<TtlDbtNtries>	[0..1]	
2.29		TotalEntriesPerBankTransactionCode	<TtlNtriesPerBkTxCd>	[0..n]	

2.18 TotalEntries <TtlNtries>

Presence: [0..1]
Definition: Indicates the total number and sum of debit and credit entries.
Type: *This message item is composed of the following **NumberAndSumOfTransactions2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.19		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.20		Sum	<Sum>	[0..1]	Quantity
2.21		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity
2.22		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code

Guideline(s): DebitCreditIndicatorGuideline
DebitCreditIndicator should be present when TotalNetEntryAmount is present.

2.19 NumberOfEntries <NbOfNtries>

Presence: [0..1]
Definition: Number of individual entries included in the report.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.20 Sum <Sum>

Presence: [0..1]
Definition: Total of all individual entries included in the report.
Data Type: DecimalNumber
Format: fractionDigits: 17

totalDigits: 18

2.21 TotalNetEntryAmount <TtlNetNtryAmt>

Presence: [0..1]
Definition: Resulting amount of the netted amounts for all debit and credit entries.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.22 CreditDebitIndicator <CdtDbtInd>

Presence: [0..1]
Definition: Indicates whether the total net entry amount is a credit or a debit amount.
Data Type: Code
*When this message item is present, one of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.23 TotalCreditEntries <TtlCdtNtries>

Presence: [0..1]
Definition: Indicates the total number and sum of credit entries.
Type: *This message item is composed of the following **NumberAndSumOfTransactions1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.24		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.25		Sum	<Sum>	[0..1]	Quantity

2.24 NumberOfEntries <NbOfNtries>

Presence: [0..1]
Definition: Number of individual entries included in the report.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.25 Sum <Sum>

Presence: [0..1]
Definition: Total of all individual entries included in the report.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.26 TotalDebitEntries <TtlDbtNtries>

Presence: [0..1]

Definition: Indicates the total number and sum of debit entries.

Type: *This message item is composed of the following* ***NumberAndSumOfTransactions1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.27		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.28		Sum	<Sum>	[0..1]	Quantity

2.27 NumberOfEntries <NbOfNtries>

Presence: [0..1]

Definition: Number of individual entries included in the report.

Data Type: Max15NumericText

Format: [0-9]{1,15}

2.28 Sum <Sum>

Presence: [0..1]

Definition: Total of all individual entries included in the report.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

2.29 TotalEntriesPerBankTransactionCode <TtlNtriesPerBkTxCd>

Presence: [0..n]

Definition: Indicates the total number and sum of entries per bank transaction code.

Type: *This message item is composed of the following* ***NumberAndSumOfTransactionsPerBankTransactionCode1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.30		NumberOfEntries	<NbOfNtries>	[0..1]	Text
2.31		Sum	<Sum>	[0..1]	Quantity
2.32		TotalNetEntryAmount	<TtlNetNtryAmt>	[0..1]	Quantity
2.33		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
2.34		BankTransactionCode	<BkTxCd>	[1..1]	
2.43		Availability	<Avlbty>	[0..n]	

Guideline(s): DebitCreditIndicatorGuideline
DebitCreditIndicator should be present when TotalNetEntryAmount is present.

2.30 NumberOfEntries <NbOfNtries>

Presence: [0..1]

Definition: Number of individual entries contained in the report.

Data Type: Max15NumericText

Format: [0-9]{1,15}

2.31 Sum <Sum>

Presence: [0..1]
Definition: Total of all individual entries included in the report.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.32 TotalNetEntryAmount <TtlNetNtryAmt>

Presence: [0..1]
Definition: Resulting amount of the netted amounts for all debit and credit entries per bank transaction code.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.33 CreditDebitIndicator <CdtDbtInd>

Presence: [0..1]
Definition: Indicates whether the total net entry amount is a credit or a debit amount.
Data Type: Code
*When this message item is present, one of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.34 BankTransactionCode <BkTxCd>

Presence: [1..1]
Definition: Set of elements to fully identify the type of underlying transaction resulting in an entry.
Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.35		Domain	<Domn>	[0..1]	
2.40		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.35 Domain <Domn>

Presence: [0..1]

Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.

Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.36		Code	<Cd>	[1..1]	Code
2.37		Family	<Fmly>	[1..1]	

2.36 Code <Cd>

Presence: [1..1]

Definition: Specifies the business area of the underlying transaction.

Data Type: ExternalBankTransactionDomainCode

Format: maxLength: 4
minLength: 1

2.37 Family <Fmly>

Presence: [1..1]

Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.

Type: *This message item is composed of the following **BankTransactionCodeStructure3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.38		Code	<Cd>	[1..1]	Code
2.39		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.38 Code <Cd>

Presence: [1..1]

Definition: Specifies the family within a domain.

Data Type: ExternalBankTransactionFamilyCode

Format: maxLength: 4
minLength: 1

2.39 SubFamilyCode <SubFmlyCd>

Presence: [1..1]

Definition: Specifies the sub-product family within a specific family.

Data Type: ExternalBankTransactionSubFamilyCode

Format: maxLength: 4
minLength: 1

2.40 Proprietary <Prtry>

Presence: [0..1]

Definition: Proprietary identification of the bank transaction code, as defined by the issuer.

Type: *This message item is composed of the following* ***ProprietaryBankTransactionCodeStructure1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.41		Code	<Cd>	[1..1]	Text
2.42		Issuer	<Issr>	[0..1]	Text

2.41 Code <Cd>

Presence: [1..1]

Definition: Proprietary bank transaction code to identify the underlying transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.42 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the proprietary bank transaction code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.43 Availability <Avlbty>

Presence: [0..n]

Definition: Set of elements used to indicate when the booked amount of money will become available, ie can be accessed and start generating interest.

Type: *This message item is composed of the following* ***CashBalanceAvailability1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.44		Date	<Dt>	[1..1]	
2.47		Amount	<Amt>	[1..1]	Amount
2.48		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

2.44 Date <Dt>

Presence: [1..1]

Definition: Indicates when the amount of money will become available.

Type: *This message item is composed of one of the following* ***CashBalanceAvailabilityDate1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.45	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.46	Or}	ActualDate	<ActlDt>	[1..1]	DateTime

2.45 NumberOfDays <NbOfDays>

Presence: [1..1]
*This message item is part of choice **2.44** Date.*
Definition: Indicates the number of float days attached to the balance.
Data Type: Max15PlusSignedNumericText
Format: [+]{0,1}[0-9]{1,15}

2.46 ActualDate <ActlDt>

Presence: [1..1]
*This message item is part of choice **2.44** Date.*
Definition: Identifies the actual availability date.
Data Type: ISODate

2.47 Amount <Amt>

Presence: [1..1]
Definition: Identifies the available amount.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.48 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Indicates whether the availability balance is a credit or a debit balance. A zero balance is considered to be a credit balance
Data Type: Code
*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.49 Entry <Ntry>

Presence: [0..n]

Definition: Specifies the elements of an entry in the report.

Usage: At least one reference must be provided to identify the entry and its underlying transaction(s).

Type: *This message item is composed of the following **NotificationEntry1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.50		Amount	<Amt>	[1..1]	Amount
2.51		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code
2.52		ReversalIndicator	<RvslInd>	[0..1]	Indicator
2.53		Status	<Sts>	[1..1]	Code
2.54		BookingDate	<BookgDt>	[0..1]	+
2.55		ValueDate	<ValDt>	[0..1]	+
2.56		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text
2.57		Availability	<Avlbty>	[0..n]	
2.63		BankTransactionCode	<BkTxCd>	[1..1]	
2.72		CommissionWaiverIndicator	<ComssnWvrInd>	[0..1]	Indicator
2.73		AdditionalInformationIndicator	<AddtlInfInd>	[0..1]	
2.76		Batch	<Btch>	[0..n]	
2.80		AmountDetails	<AmtDtls>	[0..1]	
2.97		Charges	<Chrgs>	[0..n]	
2.110		Interest	<Intrst>	[0..n]	
2.123		TransactionDetails	<TxDtls>	[0..n]	
2.302		AdditionalEntryInformation	<AddtlNtryInf>	[0..1]	Text

Rule(s): StatusAndBookingDateRule
If Status is pending, BookingDate is not allowed.

Guideline(s): ReferenceGuideline
At least one reference should present to identify the underlying transaction(s).

2.50 Amount <Amt>

Presence: [1..1]

Definition: Amount of money in the cash entry.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.51 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Specifies if an entry is a credit or a debit.
Data Type: Code
*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.52 ReversalIndicator <RvslInd>

Presence: [0..1]
Definition: Indicates whether the entry is the result of a reversal operation.

Usage : this element should only be present if the entry is the result of a reversal operation.
If the CreditDebitIndicator is CRDT and ReversalIndicator is Yes, the original operation was a debit entry.
If the CreditDebitIndicator is DBIT and ReversalIndicator is Yes, the original operation was a credit entry.

Data Type: *One of the following **TrueFalseIndicator** values must be used:*
MeaningWhenTrue: True
MeaningWhenFalse: False

2.53 Status <Sts>

Presence: [1..1]
Definition: Status of an entry on the books of the account servicer.
Data Type: Code
*One of the following **EntryStatus4Code** values must be used:*

Code	Name	Definition
BOOK	Booked	Booked means that the transfer of money has been completed between account servicer and account owner Usage : Status Booked does not necessarily imply finality of money as this depends on other factors such as the payment system used, the completion of the end-to-end transaction and the terms agreed between account servicer and owner. Status Booked is the only status that can be reversed.
PDNG	Pending	Booking on the account owner's account in the account servicer's ledger has not been completed. Usage : this can be used for expected items, or for items for which some conditions still need to be fulfilled before they can be booked. If booking takes place, the entry will be included with status Booked in subsequent account report or statement. Status Pending cannot be reversed.

2.54 BookingDate <BookgDt>

Presence: [0..1]

Definition: Date and time when an entry is posted to an account on the account servicer's books.

Usage : Booking date is only present if Status is booked.

Type: *This message item is composed of one of the following **DateAndDateTimeChoice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	Date	<Dt>	[1..1]	DateTime
Or}	DateTime	<DtTm>	[1..1]	DateTime

For additional Type information, please refer to DateAndDateTimeChoice p.345 in 'Message Item Types' section.

2.55 ValueDate <ValDt>

Presence: [0..1]

Definition: Date and time assets become available to the account owner (in a credit entry), or cease to be available to the account owner (in a debit entry).

Usage : When entry status is pending , and value date is present, value date refers to an expected/requested value date.
For entries which are subject to availability/float (and for which availability information is present), value date must not be used, as the availability component identifies the number of availability days.

Type: *This message item is composed of one of the following **DateAndDateTimeChoice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	Date	<Dt>	[1..1]	DateTime
Or}	DateTime	<DtTm>	[1..1]	DateTime

For additional Type information, please refer to DateAndDateTimeChoice p.345 in 'Message Item Types' section.

2.56 AccountServicerReference <AcctSvcrRef>

Presence: [0..1]

Definition: Account servicing institution's reference for the entry.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.57 Availability <Avlbty>

Presence: [0..n]

Definition: Set of elements used to indicate when the booked amount of money will become available, ie can be accessed and start generating interest.

Usage : this type of info is eg used in US, and is linked to particular instruments, such as cheques.

Example : When a cheque is deposited, it will be booked on the deposit day, but the funds will only be accessible as of the indicated availability day (according to national banking regulations).

Type: *This message item is composed of the following* ***CashBalanceAvailability1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.58		Date	<Dt>	[1..1]	
2.61		Amount	<Amt>	[1..1]	Amount
2.62		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

2.58 Date <Dt>

Presence: [1..1]

Definition: Indicates when the amount of money will become available.

Type: *This message item is composed of one of the following* ***CashBalanceAvailabilityDate1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.59	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text
2.60	Or}	ActualDate	<ActlDt>	[1..1]	DateTime

2.59 NumberOfDays <NbOfDays>

Presence: [1..1]

This message item is part of choice ***2.58*** *Date.*

Definition: Indicates the number of float days attached to the balance.

Data Type: Max15PlusSignedNumericText

Format: [+]{0,1}[0-9]{1,15}

2.60 ActualDate <ActlDt>

Presence: [1..1]

This message item is part of choice ***2.58*** *Date.*

Definition: Identifies the actual availability date.

Data Type: ISODate

2.61 Amount <Amt>

Presence: [1..1]

Definition: Identifies the available amount.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**

ValidationByTable

2.62 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]

Definition: Indicates whether the availability balance is a credit or a debit balance. A zero balance is considered to be a credit balance

Data Type: Code

*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.63 BankTransactionCode <BkTxCd>

Presence: [1..1]

Definition: Set of elements to fully identify the type of underlying transaction resulting in the entry.

Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.64		Domain	<Domn>	[0..1]	
2.69		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.64 Domain <Domn>

Presence: [0..1]

Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.

Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.65		Code	<Cd>	[1..1]	Code
2.66		Family	<Fmly>	[1..1]	

2.65 Code <Cd>

Presence: [1..1]
Definition: Specifies the business area of the underlying transaction.
Data Type: ExternalBankTransactionDomainCode
Format: maxLength: 4
minLength: 1

2.66 Family <Fmly>

Presence: [1..1]
Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.
Type: *This message item is composed of the following **BankTransactionCodeStructure3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.67		Code	<Cd>	[1..1]	Code
2.68		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.67 Code <Cd>

Presence: [1..1]
Definition: Specifies the family within a domain.
Data Type: ExternalBankTransactionFamilyCode
Format: maxLength: 4
minLength: 1

2.68 SubFamilyCode <SubFmlyCd>

Presence: [1..1]
Definition: Specifies the sub-product family within a specific family.
Data Type: ExternalBankTransactionSubFamilyCode
Format: maxLength: 4
minLength: 1

2.69 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary identification of the bank transaction code, as defined by the issuer.
Type: *This message item is composed of the following **ProprietaryBankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.70		Code	<Cd>	[1..1]	Text
2.71		Issuer	<Issr>	[0..1]	Text

2.70 Code <Cd>

Presence: [1..1]

Definition: Proprietary bank transaction code to identify the underlying transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.71 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the proprietary bank transaction code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.72 CommissionWaiverIndicator <ComssnWvrInd>

Presence: [0..1]

Definition: Indicates whether the transaction is exempt from commission.

Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

2.73 AdditionalInformationIndicator <AddtlInfInd>

Presence: [0..1]

Definition: Indicates whether the underlying transaction details are provided through a separate message, eg in case of aggregate bookings.

Type: *This message item is composed of the following **MessageIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.74		MessageNameIdentification	<MsgNmId>	[0..1]	Text
2.75		MessageIdentification	<MsgId>	[0..1]	Text

2.74 MessageNameIdentification <MsgNmId>

Presence: [0..1]

Definition: Specifies the message name identifier of the message that will be used to provide additional details.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.75 MessageIdentification <MsgId>

Presence: [0..1]

Definition: Specifies the identification of the message that will be used to provide additional details.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.76 Batch <Btch>

Presence: [0..n]

Definition: Set of elements providing details on batched transactions.

Usage : this element can be repeated in case more than one batch is included in the entry, eg, in lockbox scenarios, to specify the ID and number of transactions included in each of the batches.

Type: *This message item is composed of the following **BatchInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.77		MessageIdentification	<MsgId>	[0..1]	Text
2.78		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text
2.79		NumberOfTransactions	<NbOfTxs>	[0..1]	Text

2.77 MessageIdentification <MsgId>

Presence: [0..1]

Definition: Point to point reference assigned by the sending party to unambiguously identify the batch of transactions.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.78 PaymentInformationIdentification <PmtInfId>

Presence: [0..1]

Definition: Reference assigned by a sending party to unambiguously identify a payment information block within a payment message.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.79 NumberOfTransactions <NbOfTxs>

Presence: [0..1]

Definition: Number of individual transactions included in the batch.

Data Type: Max15NumericText

Format: [0-9]{1,15}

2.80 AmountDetails <AmtDtls>

Presence: [0..1]

Definition: Set of elements providing information on the original amount.

Usage : This component (on entry level) should be used when a total original batch or aggregate amount has to be provided. (If required, the individual original amounts can be included in the same component on transaction details level).

Type: *This message item is composed of the following **AmountAndCurrencyExchange2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.81		InstructedAmount	<InstdAmt>	[0..1]	
2.84		TransactionAmount	<TxAmt>	[0..1]	
2.87		CounterValueAmount	<CntrValAmt>	[0..1]	
2.90		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]	
2.93		ProprietaryAmount	<PrtryAmt>	[0..n]	

2.81 InstructedAmount <InstdAmt>

Presence: [0..1]

Definition: Identifies the amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party and provides currency exchange info in case the instructed amount and/or currency is/are different from the entry amount and/or currency.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.82		Amount	<Amt>	[1..1]	Amount
2.83		CurrencyExchange	<CcyXchg>	[0..1]	+

2.82 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.83 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.84 TransactionAmount <TxAmt>

Presence: [0..1]

Definition: Amount of the underlying transaction.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.85		Amount	<Amt>	[1..1]	Amount
2.86		CurrencyExchange	<CcyXchg>	[0..1]	+

2.85 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.86 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.87 CounterValueAmount <CntrValAmt>

Presence: [0..1]

Definition: Identifies the countervalue amount and provides currency exchange information. Either the counter amount quoted in an FX deal, or the result of the currency information applied to an instructed amount, before deduction of charges.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.88		Amount	<Amt>	[1..1]	Amount
2.89		CurrencyExchange	<CcyXchg>	[0..1]	+

2.88 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.89 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.90 AnnouncedPostingAmount <AnncdPstngAmt>

Presence: [0..1]

Definition: Information on the amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.

Amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.
In those situations, this amount may alternatively be called entitled amount.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.91		Amount	<Amt>	[1..1]	Amount
2.92		CurrencyExchange	<CcyXchg>	[0..1]	+

2.91 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.92 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.93 ProprietaryAmount <PrtryAmt>

Presence: [0..n]
Definition: Provides proprietary amount information.
Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.94		Type	<Tp>	[1..1]	Text
2.95		Amount	<Amt>	[1..1]	Amount
2.96		CurrencyExchange	<CcyXchg>	[0..1]	+

2.94 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of amount.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.95 Amount <Amt>

Presence: [1..1]
Definition: Identifies the proprietary amount.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.96 CurrencyExchange <CcyXchg>

Presence: [0..1]
Definition: Reports on currency exchange information.
Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.97 Charges <Chrgs>

Presence: [0..n]
Definition: Provides information on the charges included in the entry amount.

Usage : this component is used on entry level in case of batch or aggregate bookings.

Type: *This message item is composed of the following **ChargesInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.98		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount
2.99		Amount	<Amt>	[1..1]	Amount
2.100		Type	<Tp>	[0..1]	
2.103		Rate	<Rate>	[0..1]	Rate
2.104		Bearer	 	[0..1]	Code
2.105		Party	<Pty>	[0..1]	+
2.106		Tax	<Tax>	[0..1]	

2.98 TotalChargesAndTaxAmount <TtlChrgsAndTaxAmt>

Presence: [0..1]
Definition: Total of all charges and taxes applied to the entry.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode

[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.99 Amount <Amt>

Presence: [1..1]

Definition: Transaction charges to be paid by the charge bearer.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.100 Type <Tp>

Presence: [0..1]

Definition: Identifies the type of charge.

Type: *This message item is composed of one of the following* ***ChargeTypeChoice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.101	{Or	Code	<Cd>	[1..1]	Code
2.102	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text

2.101 Code <Cd>

Presence: [1..1]

This message item is part of choice ***2.100*** *Type.*

Definition: Service for which a charge is asked or paid, eg, brokerage fees.

Data Type: Code

One of the following ***ChargeType1Code*** *values must be used:*

Code	Name	Definition
BRKF	BrokerageFee	Fee paid to a broker for services provided.
COMM	Commission	Fee paid for services provided.

2.102 ProprietaryCode <PrtryCd>

Presence: [1..1]

This message item is part of choice ***2.100*** *Type.*

Definition: Type of charge is a bilaterally agreed code.

Data Type: Max4AlphaNumericText

Format: [a-zA-Z0-9]{1,4}

2.103 Rate <Rate>

Presence: [0..1]
Definition: Rate used to calculate the amount of the charge or fee.
Data Type: PercentageRate
Format: fractionDigits: 10
totalDigits: 11

2.104 Bearer

Presence: [0..1]
Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.
Data Type: Code
*When this message item is present, one of the following **ChargeBearerType1Code** values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.105 Party <Pty>

Presence: [0..1]
Definition: Party that takes the transaction charges or to which the transaction charges are due.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.106 Tax <Tax>

Presence: [0..1]
Definition: Specifies tax details applied to charges.
Type: *This message item is composed of the following **TaxCharges1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.107		Identification	<Id>	[0..1]	Text
2.108		Rate	<Rate>	[0..1]	Rate
2.109		Amount	<Amt>	[0..1]	Amount

2.107 Identification <Id>

Presence: [0..1]

Definition: Reference identifying the nature of tax levied, eg, Value Added Tax (VAT).

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.108 Rate <Rate>

Presence: [0..1]

Definition: Rate used for calculation of the tax.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.109 Amount <Amt>

Presence: [0..1]

Definition: Amount of money resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.110 Interest <Intrst>

Presence: [0..n]

Definition: Set of elements providing details on the interest amount included in the entry amount.

Usage : This component is used on entry level in case of batch or aggregate bookings.

Type: *This message item is composed of the following* ***TransactionInterest1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.111		Amount	<Amt>	[1..1]	Amount
2.112		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.113		Type	<Tp>	[0..1]	
2.116		Rate	<Rate>	[0..n]	
2.121		FromToDate	<FrToDt>	[0..1]	+
2.122		Reason	<Rsn>	[0..1]	Text

2.111 Amount <Amt>

Presence: [1..1]
Definition: Identifies the amount of interest included in the entry amount.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.112 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]
Definition: Identifies whether the interest amount included in the entry amount is positive (CRDT) or negative (DBIT).
Data Type: Code
One of the following ***CreditDebitCode*** *values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.113 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of interest.
Type: *This message item is composed of one of the following* ***InterestType1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.114	{Or	Code	<Cd>	[1..1]	Code
2.115	Or}	Proprietary	<Prtry>	[1..1]	Text

2.114 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.113** Type.*

Definition: Specifies the type of interest.

Data Type: Code

*One of the following **InterestType1Code** values must be used:*

Code	Name	Definition
INDY	IntraDay	During or within a business day.
OVRN	OverNight	Period of time between the end of a business day and the start of the next business day (usually the day after).

2.115 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.113** Type.*

Definition: Specifies the type of interest in uncoded form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.116 Rate <Rate>

Presence: [0..n]

Definition: Set of elements qualifying the interest rate.

Type: *This message item is composed of the following **Rate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.117		Rate	<Rate>	[1..1]	
2.120		ValidityRange	<VldtyRg>	[0..1]	+

2.117 Rate <Rate>

Presence: [1..1]

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.
Example percentage rate : Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Example Textual rate : Rate is expressed as a text.

Type: *This message item is composed of one of the following **RateTypeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.118	{Or	PercentageRate	<PctgRate>	[1..1]	Rate
2.119	Or}	TextualRate	<TxtlRate>	[1..1]	Text

2.118 PercentageRate <PctgRate>

Presence: [1..1]

*This message item is part of choice **2.117** Rate.*

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.119 TextualRate <TxtlRate>

Presence: [1..1]

*This message item is part of choice **2.117** Rate.*

Definition: Rate is expressed as a text.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.120 ValidityRange <VldtyRg>

Presence: [0..1]

Definition: An amount range where the interest rate is applicable

Type: *This message item is composed of the following **CurrencyAndAmountRange** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Amount	<Amt>	[1..1]	
	CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
	Currency	<Ccy>	[1..1]	Code

For additional Type information, please refer to CurrencyAndAmountRange p.339 in 'Message Item Types' section.

2.121 FromToDate <FrToDt>

Presence: [0..1]

Definition: Range of time between a start date and an end date.

Type: *This message item is composed of the following **DateTimePeriodDetails** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDateTime	<FrDtTm>	[1..1]	DateTime
	ToDateTime	<ToDtTm>	[1..1]	DateTime

For additional Type information, please refer to DateTimePeriodDetails p.345 in 'Message Item Types' section.

2.122 Reason <Rsn>

Presence: [0..1]

Definition: Underlying reason for the interest, eg, yearly credit interest on a savings account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.123 TransactionDetails <TxDtls>

Presence: [0..n]
Definition: Set of elements providing information on the underlying transaction (s).
Type: *This message item is composed of the following **EntryTransaction1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.124		References	<Refs>	[0..1]	
2.136		AmountDetails	<AmtDtls>	[0..1]	
2.153		Availability	<Avlbty>	[0..n]	
2.159		BankTransactionCode	<BkTxCd>	[0..1]	
2.168		Charges	<Chrgs>	[0..n]	
2.181		Interest	<Intrst>	[0..n]	
2.194		RelatedParties	<RltdPties>	[0..1]	
2.206		RelatedAgents	<RltdAgts>	[0..1]	
2.219		Purpose	<Purp>	[0..1]	
2.222		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]	
2.229		RemittanceInformation	<RmtInf>	[0..1]	
2.254		RelatedDates	<RltdDts>	[0..1]	
2.265		RelatedPrice	<RltdPric>	[0..1]	
2.270		RelatedQuantities	<RltdQties>	[0..n]	
2.275		FinancialInstrumentIdentification	<FinInstrmId>	[0..1]	
2.280		Tax	<Tax>	[0..1]	+
2.281		ReturnInformation	<RtrInf>	[0..1]	
2.296		CorporateAction	<CorpActn>	[0..1]	
2.300		SafekeepingAccount	<SfkpgAcct>	[0..1]	+
2.301		AdditionalTransactionInformation	<AddtlTxInf>	[0..1]	Text

2.124 References <Refs>

Presence: [0..1]
Definition: Set of elements providing the identification of the underlying transaction.
Type: *This message item is composed of the following **TransactionReferences1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.125		MessageIdentification	<MsgId>	[0..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.126		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text
2.127		InstructionIdentification	<InstrId>	[0..1]	Text
2.128		EndToEndIdentification	<EndToEndId>	[0..1]	Text
2.129		TransactionIdentification	<TxId>	[0..1]	Text
2.130		MandateIdentification	<MndtId>	[0..1]	Text
2.131		ChequeNumber	<ChqNb>	[0..1]	Text
2.132		ClearingSystemReference	<ClrSysRef>	[0..1]	Text
2.133		Proprietary	<Prtry>	[0..1]	

2.125 MessageIdentification <MsgId>

Presence: [0..1]

Definition: Point to point reference assigned by the instructing party of the underlying message.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.126 AccountServicerReference <AcctSvcrRef>

Presence: [0..1]

Definition: The account servicing institution's reference for the transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.127 InstructionIdentification <InstrId>

Presence: [0..1]

Definition: Unique identification as assigned by an instructing party for an instructed party to unambiguously identify the instruction.

Usage: the instruction identification is a point to point reference that can be used between the instructing party and the instructed party to refer to the individual instruction. It can be included in several messages related to the instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.128 EndToEndIdentification <EndToEndId>

Presence: [0..1]

Definition: Unique identification assigned by the initiating party to unumbiguously identify the transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain.

Usage: The end-to-end identification can be used for reconciliation or to link tasks relating to the transaction. It can be included in several messages related to the transaction.

Usage: In case there are technical limitations to carry on multiple references, the end-to-end identification must be carried on throughout the entire end-to-end chain.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.129 TransactionIdentification <TxId>

Presence: [0..1]

Definition: Unique identification assigned by the first instructing agent to unambiguously identify the transaction and passed on, unchanged, throughout the entire interbank chain.

Usage: The transaction identification can be used for reconciliation, tracking or to link tasks relating to the transaction on the interbank level.
Usage: The instructing agent has to make sure the transaction identification is unique for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.130 MandateIdentification <MndtId>

Presence: [0..1]

Definition: Reference of the direct debit mandate that has been signed between by the debtor and the creditor.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.131 ChequeNumber <ChqNb>

Presence: [0..1]

Definition: Identifies the cheque number.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.132 ClearingSystemReference <ClrSysRef>

Presence: [0..1]

Definition: Unique and unambiguous identifier for a payment instruction, assigned by the clearing system.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.133 Proprietary <Prtry>

Presence: [0..1]

Definition: Proprietary reference of an underlying transaction.

Type: *This message item is composed of the following **ProprietaryReference1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.134		Type	<Tp>	[1..1]	Text
2.135		Reference	<Ref>	[1..1]	Text

2.134 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of reference reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.135 Reference <Ref>

Presence: [1..1]
Definition: Proprietary reference specification related to the underlying transaction.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.136 AmountDetails <AmtDtls>

Presence: [0..1]
Definition: Set of elements providing details information on the original amount.

Usage: This component (on transaction level) should be used in case booking is for a single transaction and the original amount is different from the entry amount. It can also be used in case individual original amounts are provided in case of a batch or aggregate booking.

Type: *This message item is composed of the following **AmountAndCurrencyExchange2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.137		InstructedAmount	<InstdAmt>	[0..1]	
2.140		TransactionAmount	<TxAmt>	[0..1]	
2.143		CounterValueAmount	<CntrValAmt>	[0..1]	
2.146		AnnouncedPostingAmount	<AnncdPstngAmt>	[0..1]	
2.149		ProprietaryAmount	<PrtryAmt>	[0..n]	

2.137 InstructedAmount <InstdAmt>

Presence: [0..1]
Definition: Identifies the amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party and provides currency exchange info in case the instructed amount and/or currency is/are different from the entry amount and/or currency.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.138		Amount	<Amt>	[1..1]	Amount
2.139		CurrencyExchange	<CcyXchg>	[0..1]	+

2.138 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.139 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.140 TransactionAmount <TxAmt>

Presence: [0..1]

Definition: Amount of the underlying transaction.

Type: *This message item is composed of the following* ***AmountAndCurrencyExchangeDetails1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.141		Amount	<Amt>	[1..1]	Amount

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.142		CurrencyExchange	<CcyXchg>	[0..1]	+

2.141 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.142 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following **CurrencyExchange3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.143 CounterValueAmount <CntrValAmt>

Presence: [0..1]

Definition: Identifies the countervalue amount and provides currency exchange information. Either the counter amount quoted in an FX deal, or the result of the currency information applied to an instructed amount, before deduction of charges.

Type: *This message item is composed of the following **AmountAndCurrencyExchangeDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.144		Amount	<Amt>	[1..1]	Amount

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.145		CurrencyExchange	<CcyXchg>	[0..1]	+

2.144 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.145 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.146 AnnouncedPostingAmount <AnncdPstngAmt>

Presence: [0..1]

Definition: Information on the amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.

Amount of money, based on terms of corporate action event and balance of underlying securities, entitled to/from the account owner.
In those situations, this amount may alternatively be called entitled amount.

Type: *This message item is composed of the following* ***AmountAndCurrencyExchangeDetails1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.147		Amount	<Amt>	[1..1]	Amount
2.148		CurrencyExchange	<CcyXchg>	[0..1]	+

2.147 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.148 CurrencyExchange <CcyXchg>

Presence: [0..1]

Definition: Reports on currency exchange information.

Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.149 ProprietaryAmount <PrtryAmt>

Presence: [0..n]

Definition: Provides proprietary amount information.

Type: *This message item is composed of the following* ***AmountAndCurrencyExchangeDetails2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.150		Type	<Tp>	[1..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.151		Amount	<Amt>	[1..1]	Amount
2.152		CurrencyExchange	<CcyXchg>	[0..1]	+

2.150 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of amount.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.151 Amount <Amt>

Presence: [1..1]
Definition: Identifies the proprietary amount.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.152 CurrencyExchange <CcyXchg>

Presence: [0..1]
Definition: Reports on currency exchange information.
Type: *This message item is composed of the following* ***CurrencyExchange3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	SourceCurrency	<SrcCcy>	[1..1]	Code
	TargetCurrency	<TrgtCcy>	[0..1]	Code
	UnitCurrency	<UnitCcy>	[0..1]	Code
	ExchangeRate	<XchgRate>	[1..1]	Rate
	ContractIdentification	<CtrctId>	[0..1]	Text
	QuotationDate	<QtnDt>	[0..1]	DateTime

For additional Type information, please refer to CurrencyExchange3 p.343 in 'Message Item Types' section.

2.153 Availability <Avlbty>

Presence: [0..n]

Definition: Set of elements used to indicate when the booked funds will become available, ie can be accessed and start generating interest.

Usage : this type of info is eg used in US, and is linked to particular instruments, such as cheques.
Example : When a cheque is deposited, it will be booked on the deposit day, but the funds will only be accessible as of the indicated availability day (according to national banking regulations).

Type: *This message item is composed of the following **CashBalanceAvailability1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.154		Date	<Dt>	[1..1]	
2.157		Amount	<Amt>	[1..1]	Amount
2.158		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code

2.154 Date <Dt>

Presence: [1..1]
Definition: Indicates when the amount of money will become available.
Type: *This message item is composed of one of the following **CashBalanceAvailabilityDate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.155	{Or	NumberOfDays	<NbOfDays>	[1..1]	Text
2.156	Or}	ActualDate	<ActlDt>	[1..1]	DateTime

2.155 NumberOfDays <NbOfDays>

Presence: [1..1]
*This message item is part of choice **2.154** Date.*
Definition: Indicates the number of float days attached to the balance.
Data Type: Max15PlusSignedNumericText
Format: [+]{0,1}[0-9]{1,15}

2.156 ActualDate <ActlDt>

Presence: [1..1]
*This message item is part of choice **2.154** Date.*
Definition: Identifies the actual availability date.
Data Type: ISODate

2.157 Amount <Amt>

Presence: [1..1]
Definition: Identifies the available amount.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0

totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.158 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]

Definition: Indicates whether the availability balance is a credit or a debit balance. A zero balance is considered to be a credit balance

Data Type: Code

*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.159 BankTransactionCode <BkTxCd>

Presence: [0..1]

Definition: Set of elements to fully identify the type of underlying transaction resulting in an entry.

Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.160		Domain	<Domn>	[0..1]	
2.165		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.160 Domain <Domn>

Presence: [0..1]

Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.

Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.161		Code	<Cd>	[1..1]	Code
2.162		Family	<Fmly>	[1..1]	

2.161 Code <Cd>

Presence: [1..1]
Definition: Specifies the business area of the underlying transaction.
Data Type: ExternalBankTransactionDomainCode
Format: maxLength: 4
minLength: 1

2.162 Family <Fmly>

Presence: [1..1]
Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.
Type: *This message item is composed of the following **BankTransactionCodeStructure3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.163		Code	<Cd>	[1..1]	Code
2.164		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.163 Code <Cd>

Presence: [1..1]
Definition: Specifies the family within a domain.
Data Type: ExternalBankTransactionFamilyCode
Format: maxLength: 4
minLength: 1

2.164 SubFamilyCode <SubFmlyCd>

Presence: [1..1]
Definition: Specifies the sub-product family within a specific family.
Data Type: ExternalBankTransactionSubFamilyCode
Format: maxLength: 4
minLength: 1

2.165 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary identification of the bank transaction code, as defined by the issuer.
Type: *This message item is composed of the following **ProprietaryBankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.166		Code	<Cd>	[1..1]	Text
2.167		Issuer	<Issr>	[0..1]	Text

2.166 Code <Cd>

Presence: [1..1]
Definition: Proprietary bank transaction code to identify the underlying transaction.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.167 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the proprietary bank transaction code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.168 Charges <Chrgs>

Presence: [0..n]
Definition: Provides information on the charges included in the entry amount.

Usage : This component (on transaction level) can be used in case the booking is for a single transaction, and charges are included in the entry amount. It can also be used in case individual charge amounts are applied to individual transactions in case of a batch or aggregate amount booking.

Type: *This message item is composed of the following **ChargesInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.169		TotalChargesAndTaxAmount	<TtlChrgsAndTaxAmt>	[0..1]	Amount
2.170		Amount	<Amt>	[1..1]	Amount
2.171		Type	<Tp>	[0..1]	
2.174		Rate	<Rate>	[0..1]	Rate
2.175		Bearer	 	[0..1]	Code
2.176		Party	<Pty>	[0..1]	+
2.177		Tax	<Tax>	[0..1]	

2.169 TotalChargesAndTaxAmount <TtlChrgsAndTaxAmt>

Presence: [0..1]
Definition: Total of all charges and taxes applied to the entry.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.170 Amount <Amt>

Presence: [1..1]

Definition: Transaction charges to be paid by the charge bearer.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.171 Type <Tp>

Presence: [0..1]

Definition: Identifies the type of charge.

Type: *This message item is composed of one of the following* ***ChargeTypeChoice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.172	{Or	Code	<Cd>	[1..1]	Code
2.173	Or}	ProprietaryCode	<PrtryCd>	[1..1]	Text

2.172 Code <Cd>

Presence: [1..1]

This message item is part of choice ***2.171*** *Type.*

Definition: Service for which a charge is asked or paid, eg, brokerage fees.

Data Type: Code

One of the following ***ChargeType1Code*** *values must be used:*

Code	Name	Definition
BRKF	BrokerageFee	Fee paid to a broker for services provided.
COMM	Commission	Fee paid for services provided.

2.173 ProprietaryCode <PrtryCd>

Presence: [1..1]
*This message item is part of choice **2.171** Type.*
Definition: Type of charge is a bilaterally agreed code.

Data Type: Max4AlphaNumericText
Format: [a-zA-Z0-9]{1,4}

2.174 Rate <Rate>

Presence: [0..1]
Definition: Rate used to calculate the amount of the charge or fee.
Data Type: PercentageRate
Format: fractionDigits: 10
totalDigits: 11

2.175 Bearer

Presence: [0..1]
Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.
Data Type: Code
*When this message item is present, one of the following **ChargeBearerType1Code** values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.176 Party <Pty>

Presence: [0..1]
Definition: Party that takes the transaction charges or to which the transaction charges are due.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.177 Tax <Tax>

Presence: [0..1]
Definition: Specifies tax details applied to charges.
Type: *This message item is composed of the following **TaxCharges1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.178		Identification	<Id>	[0..1]	Text
2.179		Rate	<Rate>	[0..1]	Rate
2.180		Amount	<Amt>	[0..1]	Amount

2.178 Identification <Id>

Presence: [0..1]
Definition: Reference identifying the nature of tax levied, eg, Value Added Tax (VAT).
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.179 Rate <Rate>

Presence: [0..1]
Definition: Rate used for calculation of the tax.
Data Type: PercentageRate
Format: fractionDigits: 10
totalDigits: 11

2.180 Amount <Amt>

Presence: [0..1]
Definition: Amount of money resulting from the calculation of the tax.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.181 Interest <Intrst>

Presence: [0..n]
Definition: Set of elements providing details on the interest amount included in the entry amount.

Usage : This component (on transaction level) can be used in case the booking is for a single transaction, and interest amount is included in the entry amount. It can also be used in case individual interest amounts are applied to individual transactions in case of a batch or aggregate amount booking.

Type: *This message item is composed of the following **TransactionInterest1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.182		Amount	<Amt>	[1..1]	Amount
2.183		CreditDebitIndicator	<CdtDbtInd>	[1..1]	Code
2.184		Type	<Tp>	[0..1]	
2.187		Rate	<Rate>	[0..n]	
2.192		FromToDate	<FrToDt>	[0..1]	+
2.193		Reason	<Rsn>	[0..1]	Text

2.182 Amount <Amt>

Presence: [1..1]

Definition: Identifies the amount of interest included in the entry amount.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.183 CreditDebitIndicator <CdtDbtInd>

Presence: [1..1]

Definition: Identifies whether the interest amount included in the entry amount is positive (CRDT) or negative (DBIT).

Data Type: Code

*One of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.184 Type <Tp>

Presence: [0..1]

Definition: Specifies the type of interest.

Type: *This message item is composed of one of the following **InterestType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.185	{Or	Code	<Cd>	[1..1]	Code
2.186	Or}	Proprietary	<Prtry>	[1..1]	Text

2.185 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.184** Type.*
Definition: Specifies the type of interest.
Data Type: Code
*One of the following **InterestType1Code** values must be used:*

Code	Name	Definition
INDY	IntraDay	During or within a business day.
OVRN	OverNight	Period of time between the end of a business day and the start of the next business day (usually the day after).

2.186 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.184** Type.*
Definition: Specifies the type of interest in uncoded form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.187 Rate <Rate>

Presence: [0..n]
Definition: Set of elements qualifying the interest rate.
Type: *This message item is composed of the following **Rate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.188		Rate	<Rate>	[1..1]	
2.191		ValidityRange	<VldtyRg>	[0..1]	+

2.188 Rate <Rate>

Presence: [1..1]
Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.
Example percentage rate : Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Example Textual rate : Rate is expressed as a text.
Type: *This message item is composed of one of the following **RateTypeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.189	{Or	PercentageRate	<PctgRate>	[1..1]	Rate
2.190	Or}	TextualRate	<TxtlRate>	[1..1]	Text

2.189 PercentageRate <PctgRate>

Presence: [1..1]

*This message item is part of choice **2.188** Rate.*

Definition: Percentage charged for the use of an amount of money, usually expressed at an annual rate. The interest rate is the ratio of the amount of interest paid during a certain period of time compared to the principal amount of the interest bearing financial instrument.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.190 TextualRate <TxtlRate>

Presence: [1..1]

*This message item is part of choice **2.188** Rate.*

Definition: Rate is expressed as a text.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.191 ValidityRange <VldtyRg>

Presence: [0..1]

Definition: An amount range where the interest rate is applicable

Type: *This message item is composed of the following **CurrencyAndAmountRange** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Amount	<Amt>	[1..1]	
	CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
	Currency	<Ccy>	[1..1]	Code

For additional Type information, please refer to CurrencyAndAmountRange p.339 in 'Message Item Types' section.

2.192 FromToDate <FrToDt>

Presence: [0..1]

Definition: Range of time between a start date and an end date.

Type: *This message item is composed of the following **DateTimePeriodDetails** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDateTime	<FrDtTm>	[1..1]	DateTime

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	ToDateTime	<ToDtTm>	[1..1]	DateTime

For additional Type information, please refer to DateTimePeriodDetails p.345 in 'Message Item Types' section.

2.193 Reason <Rsn>

Presence: [0..1]
Definition: Underlying reason for the interest, eg, yearly credit interest on a savings account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.194 RelatedParties <RltdPties>

Presence: [0..1]
Definition: Set of elements identifying the parties related to the underlying transaction.
Type: *This message item is composed of the following **TransactionParty1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.195		InitiatingParty	<InitgPty>	[0..1]	+
2.196		Debtor	<Dbtr>	[0..1]	+
2.197		DebtorAccount	<DbtrAcct>	[0..1]	+
2.198		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.199		Creditor	<Cdtr>	[0..1]	+
2.200		CreditorAccount	<CdtrAcct>	[0..1]	+
2.201		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.202		TradingParty	<TradgPty>	[0..1]	+
2.203		Proprietary	<Prtry>	[0..n]	

2.195 InitiatingParty <InitgPty>

Presence: [0..1]
Definition: Party initiating the payment to an agent. In the payment context, this can either be the debtor (in a credit transfer), the creditor (in a direct debit), or a party that initiates the payment on behalf of the debtor or creditor. In the context of treasury, the party that instructs the trading party to execute a treasury deal on its behalf.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.196 Debtor <Dbtr>

Presence: [0..1]
Definition: Party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.197 DebtorAccount <DbtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the debtor.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.198 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.199 Creditor <Cdtr>

Presence: [0..1]
Definition: Party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.200 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor of the payment transaction.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.201 UltimateCreditor <UltmtCdtr>

Presence: [0..1]
Definition: Ultimate party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.202 TradingParty <TradgPty>

Presence: [0..1]

Definition: Party that plays an active role in planning and executing the transactions that create or liquidate investments of the investors assets, or that move the investor's assets from one investment to another. A trading party is a trade instructor, an investment decision-maker, a post trade administrator, or a trader. In the context of treasury, it is the party negotiates and executes the treasury transaction.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.203 Proprietary <Prtry>

Presence: [0..n]

Definition: Provides proprietary party information.

Type: *This message item is composed of the following **ProprietaryParty1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.204		Type	<Tp>	[1..1]	Text
2.205		Party	<Pty>	[1..1]	+

2.204 Type <Tp>

Presence: [1..1]

Definition: Identifies the type of proprietary party reported.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.205 Party <Pty>

Presence: [1..1]

Definition: Proprietary party.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.206 RelatedAgents <RltdAgts>

Presence: [0..1]
Definition: Set of elements identifying the agents related to the underlying transaction.
Type: *This message item is composed of the following **TransactionAgents1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.207		DebtorAgent	<DbtrAgt>	[0..1]	+
2.208		CreditorAgent	<CdtrAgt>	[0..1]	+
2.209		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+
2.210		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+
2.211		IntermediaryAgent3	<IntrmyAgt3>	[0..1]	+
2.212		ReceivingAgent	<RcvgAgt>	[0..1]	+
2.213		DeliveringAgent	<DlvrgAgt>	[0..1]	+
2.214		IssuingAgent	<IssgAgt>	[0..1]	+
2.215		SettlementPlace	<SttlmPlc>	[0..1]	+
2.216		Proprietary	<Prtry>	[0..n]	

2.207 DebtorAgent <DbtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.208 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.209 IntermediaryAgent1 <IntrmyAgt1>

Presence: [0..1]
Definition: Agent between the debtor agent and creditor agent.

Usage: If more than one intermediary agent is present, then IntermediaryAgent1 identifies the agent between the debtor agent and the intermediary agent 2.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.210 IntermediaryAgent2 <IntrmyAgt2>

Presence: [0..1]
Definition: Agent between the debtor agent and creditor agent.

Usage: If more than two intermediary agents are present, then IntermediaryAgent2 identifies the agent between the intermediary agent 1 and the intermediary agent 3.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.211 IntermediaryAgent3 <IntrmyAgt3>

Presence: [0..1]
Definition: Agent between the debtor agent and creditor agent.

Usage: If IntermediaryAgent3 is present, then it identifies the agent between the intermediary agent 2 and the creditor agent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.212 ReceivingAgent <RcvgAgt>

Presence: [0..1]

Definition: Party that receives securities from the delivering agent at the place of settlement, eg, central securities depository.
Can also be used in the context of treasury operations.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.213 DeliveringAgent <DlvrgAgt>

Presence: [0..1]

Definition: Party that delivers securities to the receiving agent at the place of settlement, eg, central securities depository.
Can also be used in the context of treasury operations.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.214 IssuingAgent <IssgAgt>

Presence: [0..1]

Definition: Legal entity that has the right to issue securities.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.215 SettlementPlace <SttlmPlc>

Presence: [0..1]
Definition: Place where settlement of the securities takes place.

Note : this is typed by a financial institution identification - as this is the standard way of identifying eg securities settlement agent/central system.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.216 Proprietary <Prtry>

Presence: [0..n]
Definition: Proprietary agent related to the underlying transaction.
Type: *This message item is composed of the following **ProprietaryAgent1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.217		Type	<Tp>	[1..1]	Text
2.218		Agent	<Agt>	[1..1]	+

2.217 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of proprietary agent reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.218 Agent <Agt>

Presence: [1..1]
Definition: Proprietary agent.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.346 in 'Message Item Types' section.

2.219 Purpose <Purp>

Presence: [0..1]

Definition: Underlying reason for the payment transaction, eg, a charity payment, or a commercial agreement between the creditor and the debtor.

Usage: purpose is used by the end-customers, ie originating party, initiating party, debtor, creditor, final party, to provide information concerning the nature of the payment transaction. Purpose is a content element, which is not used for processing by any of the agents involved in the payment chain.

Type: *This message item is composed of one of the following **Purpose1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.220	{Or	Code	<Cd>	[1..1]	Code
2.221	Or}	Proprietary	<Prtry>	[1..1]	Text

2.220 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.219** Purpose.*

Definition: Specifies the underlying reason for the payment transaction, as published in an external purpose code list.

Data Type: ExternalPurposeCode

Format: maxLength: 35
minLength: 1

2.221 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.219** Purpose.*

Definition: User community specific purpose.

Usage: When available, codes provided by local communities should be used.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.222 RelatedRemittanceInformation <RltdRmtInf>

Presence: [0..10]

Definition: Information related to the handling of the remittance information by any of the agents in the transaction processing chain.

Type: *This message item is composed of the following **RemittanceLocation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.223		RemittanceIdentification	<RmtId>	[0..1]	Text
2.224		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code
2.225		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text
2.226		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]	

2.223 RemittanceIdentification <RmtId>

Presence: [0..1]

Definition: Unique and unambiguous identification of the remittance information, e.g. a remittance advice, which is sent separately from the payment instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.224 RemittanceLocationMethod <RmtLctnMtd>

Presence: [0..1]

Definition: Specifies the method used to deliver the remittance advice information.

Data Type: Code

*When this message item is present, one of the following **RemittanceLocationMethod1Code** values must be used:*

Code	Name	Definition
EDIC	ElectronicDataInterchange	Remittance advice information must be sent through Electronic Data Interchange (EDI).
EMAL	EMail	Remittance advice information must be sent through e-mail.
FAXI	Fax	Remittance advice information must be faxed.
POST	Post	Remittance advice information must be sent through postal services.
URID	UniformResourceIdentifier	Remittance advice information needs to be sent to a Uniform Resource Identifier (URI). URI is a compact string of characters that uniquely identify an abstract or physical resource. URI's are the super-set of identifiers, such as URLs, email addresses, ftp sites, etc, and as such, provide the syntax for all of the identification schemes.

2.225 RemittanceLocationElectronicAddress <RmtLctnElctrncAdr>

Presence: [0..1]

Definition: Electronic address to which an agent is to send the remittance information.

Data Type: Max256Text

Format: maxLength: 256
minLength: 1

2.226 RemittanceLocationPostalAddress <RmtLctnPstlAdr>

Presence: [0..1]

Definition: Postal address to which an agent is to send the remittance information.

Type: *This message item is composed of the following **NameAndAddress3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.227		Name	<Nm>	[1..1]	Text
2.228		Address	<Adr>	[1..1]	+

2.227 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and is usually used to identify that identity.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.228 Address <Adr>

Presence: [1..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.369 in 'Message Item Types' section.

2.229 RemittanceInformation <RmtInf>

Presence: [0..1]
Definition: Information that enables the matching, ie, reconciliation, of a payment with the items that the payment is intended to settle, eg, commercial invoices in an account receivable system.
Type: *This message item is composed of the following **RemittanceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.230		Unstructured	<Ustrd>	[0..n]	Text
2.231		Structured	<Strd>	[0..n]	

2.230 Unstructured <Ustrd>

Presence: [0..n]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in an unstructured form.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

2.231 Structured <Strd>

Presence: [0..n]

Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in a structured form.

Type: *This message item is composed of the following **StructuredRemittanceInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.232		ReferredDocumentInformation	<RfrdDocInf>	[0..1]	
2.238		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime
2.239		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]	
2.245		CreditorReferenceInformation	<CdtrRefInf>	[0..1]	
2.251		Invoicer	<Invcr>	[0..1]	+
2.252		Invoicee	<Invcee>	[0..1]	+
2.253		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text

2.232 ReferredDocumentInformation <RfrdDocInf>

Presence: [0..1]

Definition: Reference information to allow the identification of the underlying reference documents.

Type: *This message item is composed of the following **ReferredDocumentInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.233		ReferredDocumentType	<RfrdDocTp>	[0..1]	
2.237		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text

2.233 ReferredDocumentType <RfrdDocTp>

Presence: [0..1]

Definition: Provides the type of the referred document.

Type: *This message item is composed of the following **ReferredDocumentType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.234	{Or	Code	<Cd>	[1..1]	Code
2.235	Or}	Proprietary	<Prtry>	[1..1]	Text
2.236		Issuer	<Issr>	[0..1]	Text

2.234 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.233** ReferredDocumentType.*

Definition: Document type in a coded form.

Data Type: Code

*One of the following **DocumentType2Code** values must be used:*

Code	Name	Definition
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.

2.235 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.233** ReferredDocumentType.*
Definition: Proprietary identification of the type of the remittance document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.236 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the reference document type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.237 ReferredDocumentNumber <RfrdDocNb>

Presence: [0..1]
Definition: Unique and unambiguous identification number of the referred document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.238 ReferredDocumentRelatedDate <RfrdDocRltdDt>

Presence: [0..1]

Definition: Date associated with the referred document, eg, date of issue.

Data Type: ISODate

2.239 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..n]

Definition: Amount of money and currency of a document referred to in the remittance section. The amount is typically either the original amount due and payable, or the amount actually remitted for the referred document.

Type: *This message item is composed of one of the following **ReferredDocumentAmount1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.240	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount
2.241	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount
2.242	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount
2.243	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount
2.244	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount

2.240 DuePayableAmount <DuePyblAmt>

Presence: [1..1]

*This message item is part of choice **2.239** ReferredDocumentAmount.*

Definition: Amount specified is the exact amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.241 DiscountAppliedAmount <DscntApldAmt>

Presence: [1..1]

*This message item is part of choice **2.239** ReferredDocumentAmount.*

Definition: Amount of money resulting from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18

CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.242 RemittedAmount <RmtdAmt>

Presence: [1..1]

*This message item is part of choice **2.239** ReferredDocumentAmount.*

Definition: Amount of money remitted for the referred document.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.243 CreditNoteAmount <CdtNoteAmt>

Presence: [1..1]

*This message item is part of choice **2.239** ReferredDocumentAmount.*

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.244 TaxAmount <TaxAmt>

Presence: [1..1]

*This message item is part of choice **2.239** ReferredDocumentAmount.*

Definition: Quantity of cash resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.245 CreditorReferenceInformation <CdtrRefInf>

Presence: [0..1]
Definition: Reference information provided by the creditor to allow the identification of the underlying documents.
Type: *This message item is composed of the following **CreditorReferenceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.246		CreditorReferenceType	<CdtrRefTp>	[0..1]	
2.250		CreditorReference	<CdtrRef>	[0..1]	Text

2.246 CreditorReferenceType <CdtrRefTp>

Presence: [0..1]
Definition: Provides the type of the creditor reference.
Type: *This message item is composed of the following **CreditorReferenceType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.247	{Or	Code	<Cd>	[1..1]	Code
2.248	Or}	Proprietary	<Prtry>	[1..1]	Text
2.249		Issuer	<Issr>	[0..1]	Text

2.247 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.246** CreditorReferenceType.*
Definition: Coded creditor reference type.
Data Type: Code
*One of the following **DocumentType3Code** values must be used:*

Code	Name	Definition
DISP	DispatchAdvice	Document is a dispatch advice.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
PUOR	PurchaseOrder	Document is a purchase order.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SCOR	StructuredCommunicationReference	Document is a structured communication reference provided by the creditor to identify the referred transaction.

2.248 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.246** CreditorReferenceType.*
Definition: Creditor reference type not avilable in a coded format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.249 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the credit reference type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.250 CreditorReference <CdtrRef>

Presence: [0..1]
Definition: Unique and unambiguous reference assigned by the creditor to refer to the payment transaction.

Usage: if available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the cash.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.251 Invoicer <Invcr>

Presence: [0..1]
Definition: Identification of the organization issuing the invoice when different than the creditor or final party.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.252 Invoicee <Invcee>

Presence: [0..1]

Definition: Identification of the party to whom an invoice is issued, when different than the originator or debtor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.253 AdditionalRemittanceInformation <AddtlRmtInf>

Presence: [0..1]
Definition: Additional information, in free text form, to complement the structured remittance information.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

2.254 RelatedDates <RltdDts>

Presence: [0..1]
Definition: Set of elements identifying the dates related to the underlying transactions.
Type: *This message item is composed of the following **TransactionDates1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.255		AcceptanceDateTime	<AccptncDtTm>	[0..1]	DateTime
2.256		TradeDate	<TradDt>	[0..1]	DateTime
2.257		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime
2.258		StartDate	<StartDt>	[0..1]	DateTime
2.259		EndDate	<EndDt>	[0..1]	DateTime
2.260		TransactionDateTime	<TxDtTm>	[0..1]	DateTime
2.261		Proprietary	<Prtry>	[0..n]	

2.255 AcceptanceDateTime <AccptncDtTm>

Presence: [0..1]
Definition: Point in time when the payment order from the initiating party meets the processing conditions of the account servicing agent (debtor's agent in case of a credit transfer, creditor's agent in case of a direct debit). This means - amongst others - that the account servicing agent has received the payment order and has applied checks as eg, authorisation, availability of funds.
Data Type: ISODateTime

2.256 TradeDate <TradDt>

Presence: [0..1]

Definition: Date on which the trade was executed.
Data Type: ISODate

2.257 InterbankSettlementDate <IntrBkSttlmDt>

Presence: [0..1]
Definition: Date on which the amount of money ceases to be available to the agent that owes it and when the amount of money becomes available to the agent to which it is due.
Data Type: ISODate

2.258 StartDate <StartDt>

Presence: [0..1]
Definition: Start date of the underlying transaction, such as a treasury transaction, an investment plan.
Data Type: ISODate

2.259 EndDate <EndDt>

Presence: [0..1]
Definition: End date of the underlying transaction, such as a treasury transaction, an investment plan.
Data Type: ISODate

2.260 TransactionDateTime <TxDtTm>

Presence: [0..1]
Definition: Date and time of the underlying transaction.
Data Type: ISODateTime

2.261 Proprietary <Prtry>

Presence: [0..n]
Definition: Proprietary date related to the underlying transaction.
Type: *This message item is composed of the following **ProprietaryDate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.262		Type	<Tp>	[1..1]	Text
2.263	{Or	Date	<Dt>	[1..1]	DateTime
2.264	Or}	DateTime	<DtTm>	[1..1]	DateTime

2.262 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of date reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.263 Date <Dt>

Presence: [1..1]

*This message item is part of choice **2.261** Proprietary.*
Definition: Date in ISO format.
Data Type: ISODate

2.264 DateTime <DtTm>

Presence: [1..1]
*This message item is part of choice **2.261** Proprietary.*
Definition: Date and time in ISO format.
Data Type: ISODateTime

2.265 RelatedPrice <RltdPric>

Presence: [0..1]
Definition: Set of elements identifying the price information related to the underlying transaction.
Type: *This message item is composed of one of the following **TransactionPrice1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.266	{Or	DealPrice	<DealPric>	[1..1]	Amount
2.267	Or}	Proprietary	<Prtry>	[1..n]	

2.266 DealPrice <DealPric>

Presence: [1..1]
*This message item is part of choice **2.265** RelatedPrice.*
Definition: Specifies the price of the traded financial instrument.
This is the deal price of the individual trade transaction.
If there is only one trade transaction for the execution of the trade, then the deal price could equal the executed trade price (unless, for example, the price includes commissions or rounding, or some other factor has been applied to the deal price or the executed trade price, or both).
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.267 Proprietary <Prtry>

Presence: [1..n]
*This message item is part of choice **2.265** RelatedPrice.*
Definition: Proprietary price specification of the underlying transaction.
Type: *This message item is composed of the following **ProprietaryPrice1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.268		Type	<Tp>	[1..1]	Text
2.269		Price	<Pric>	[1..1]	Amount

2.268 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of price reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.269 Price <Pric>

Presence: [1..1]
Definition: Proprietary price specification related to the underlying transaction.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.270 RelatedQuantities <RltdQties>

Presence: [0..n]
Definition: Identifies related quantities (eg of securities) in the underlying transaction.
Type: *This message item is composed of one of the following* ***TransactionQuantities1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.271	{Or	Quantity	<Qty>	[1..1]	+
2.272	Or}	Proprietary	<Prtry>	[1..1]	

2.271 Quantity <Qty>

Presence: [1..1]
This message item is part of choice ***2.270*** *RelatedQuantities.*
Definition: Specifies the quantity (eg of securities) in the underlying transaction.
Type: *This message item is composed of one of the following* ***FinancialInstrumentQuantityChoice*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	Unit	<Unit>	[1..1]	Quantity

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
Or	FaceAmount	<FaceAmt>	[1..1]	Amount
Or}	AmortisedValue	<AmtsdVal>	[1..1]	Amount

For additional Type information, please refer to FinancialInstrumentQuantityChoice p.371 in 'Message Item Types' section.

2.272 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.270** RelatedQuantities.*
Definition: Proprietary quantities specification defined in the underlying transaction.
Type: *This message item is composed of the following **ProprietaryQuantity1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.273		Type	<Tp>	[1..1]	Text
2.274		Quantity	<Qty>	[1..1]	Text

2.273 Type <Tp>

Presence: [1..1]
Definition: Identifies the type of proprietary quantity reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.274 Quantity <Qty>

Presence: [1..1]
Definition: Provides the proprietary quantity in free format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.275 FinancialInstrumentIdentification <FinInstrmId>

Presence: [0..1]
Definition: Identification of a security, as assigned under a formal or proprietary identification scheme.
Type: *This message item is composed of one of the following **SecurityIdentification4Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.276	{Or	ISIN	<ISIN>	[1..1]	Identifier
2.277	Or}	Proprietary	<Prtry>	[1..1]	

2.276 ISIN <ISIN>

Presence: [1..1]

*This message item is part of choice **2.275** FinancialInstrumentIdentification.*

Definition: International Securities Identification Number (ISIN). A numbering system designed by the United Nation's International Organisation for Standardisation (ISO). The ISIN is composed of a 2-character prefix representing the country of issue, followed by the national security number (if one exists), and a check digit. Each country has a national numbering agency that assigns ISIN numbers for securities in that country.

Data Type: ISINIdentifier

Format: [A-Z0-9]{12,12}

2.277 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.275** FinancialInstrumentIdentification.*

Definition: Proprietary identification of an underlying financial instrument.

Type: *This message item is composed of the following **AlternateSecurityIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.278		Type	<Tp>	[1..1]	Text
2.279		Identification	<Id>	[1..1]	Text

2.278 Type <Tp>

Presence: [1..1]

Definition: Identifies the type of financial instrument identifier type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.279 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identifier of a security.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.280 Tax <Tax>

Presence: [0..1]

Definition: Amount of money due to the government or tax authority, according to various pre-defined parameters such as thresholds or income.

Type: *This message item is composed of the following **TaxInformation2** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	CreditorTaxIdentification	<CdtrTaxId>	[0..1]	Text
	CreditorTaxType	<CdtrTaxTp>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	DebtorTaxIdentification	<DbtrTaxId>	[0..1]	Text
	TaxReferenceNumber	<TaxRefNb>	[0..1]	Text
	TotalTaxableBaseAmount	<TtlTaxblBaseAmt>	[0..1]	Amount
	TotalTaxAmount	<TtlTaxAmt>	[0..1]	Amount
	TaxDate	<TaxDt>	[0..1]	DateTime
	TaxTypeInformation	<TaxTpInf>	[0..n]	

For additional Type information, please refer to TaxInformation2 p.372 in 'Message Item Types' section.

2.281 ReturnInformation <RtrInf>

Presence: [0..1]
Definition: Set of elements specifying the return information.
Type: *This message item is composed of the following **ReturnReasonInformation5** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.282		OriginalBankTransactionCode	<OrgnlBkTxCd>	[0..1]	
2.291		ReturnOriginator	<RtrOrgtr>	[0..1]	+
2.292		ReturnReason	<RtrRsn>	[0..1]	
2.295		AdditionalReturnReasonInformation	<AddtlRtrRsnInf>	[0..n]	Text

Rule(s): ReturnReasonRule
If ReturnReason/Code is equal to 'NARR', then at least one occurrence of AdditionalReturnReasonInformation must be present.

2.282 OriginalBankTransactionCode <OrgnlBkTxCd>

Presence: [0..1]
Definition: Bank transaction code included in the original entry for the transaction.
Type: *This message item is composed of the following **BankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.283		Domain	<Domn>	[0..1]	
2.288		Proprietary	<Prtry>	[0..1]	

Rule(s): DomainAndProprietary1Rule
If Domain is absent, then Proprietary must be present.

DomainAndProprietary2Rule
If Proprietary is absent, then Domain must be present.

FamilyAndSubFamilyRule
A specific (non-generic) SubFamily code may only be provided if a specific (non-generic) Family code is present.

2.283 Domain <Domn>

Presence: [0..1]

Definition: Specifies the domain, the family and the sub-family of the bank transaction code, in a structured and hierarchical format.

Usage: If a specific family or subfamily code cannot be provided, the generic family code defined for the domain or the generic subfamily code defined for the family should be provided.

Type: *This message item is composed of the following **BankTransactionCodeStructure2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.284		Code	<Cd>	[1..1]	Code
2.285		Family	<Fmly>	[1..1]	

2.284 Code <Cd>

Presence: [1..1]

Definition: Specifies the business area of the underlying transaction.

Data Type: ExternalBankTransactionDomainCode

Format: maxLength: 4
minLength: 1

2.285 Family <Fmly>

Presence: [1..1]

Definition: Specifies the family and the sub-family of the bank transaction code, within a specific domain, in a structured and hierarchical format.

Type: *This message item is composed of the following **BankTransactionCodeStructure3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.286		Code	<Cd>	[1..1]	Code
2.287		SubFamilyCode	<SubFmlyCd>	[1..1]	Code

2.286 Code <Cd>

Presence: [1..1]

Definition: Specifies the family within a domain.

Data Type: ExternalBankTransactionFamilyCode

Format: maxLength: 4
minLength: 1

2.287 SubFamilyCode <SubFmlyCd>

Presence: [1..1]

Definition: Specifies the sub-product family within a specific family.

Data Type: ExternalBankTransactionSubFamilyCode

Format: maxLength: 4

minLength: 1

2.288 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary identification of the bank transaction code, as defined by the issuer.
Type: *This message item is composed of the following **ProprietaryBankTransactionCodeStructure1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.289		Code	<Cd>	[1..1]	Text
2.290		Issuer	<Issr>	[0..1]	Text

2.289 Code <Cd>

Presence: [1..1]
Definition: Proprietary bank transaction code to identify the underlying transaction.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.290 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the proprietary bank transaction code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.291 ReturnOriginator <RtrOrgtr>

Presence: [0..1]
Definition: Party issuing the return.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.358 in 'Message Item Types' section.

2.292 ReturnReason <RtrRsn>

Presence: [0..1]
Definition: Specifies the reason for the return.
Type: *This message item is composed of one of the following **ReturnReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.293	{Or	Code	<Cd>	[1..1]	Code
2.294	Or}	Proprietary	<Prtry>	[1..1]	Text

2.293 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.292** ReturnReason.*
Definition: Reason for the return in a coded form.
Data Type: Code
*One of the following **TransactionRejectReason2Code** values must be used:*

Code	Name	Definition
AC01	IncorrectAccountNumber	Format of the account number specified is not correct.
AC04	ClosedAccountNumber	Account number specified has been closed on the Receiver's books.
AC06	BlockedAccount	Account specified is blocked, prohibiting posting of transactions against it.
AG01	TransactionForbidden	Transaction forbidden on this type of account (formerly NoAgreement).
AG02	InvalidBankOperationCode	Bank Operation code specified in the message is not valid for receiver.
AM01	ZeroAmount	Specified message amount is equal to zero.
AM02	NotAllowedAmount	Specified transaction/message amount is greater than allowed maximum.
AM03	NotAllowedCurrency	Specified message amount is in an non processable currency outside of existing agreement.
AM04	InsufficientFunds	Amount of funds available to cover specified message amount is insufficient.
AM05	Duplication	This message appears to have been duplicated.
AM06	TooLowAmount	Specified transaction amount is less than agreed minimum.
AM07	BlockedAmount	Amount specified in message has been blocked by regulatory authorities.
AM09	WrongAmount	Amount received is not the amount agreed or expected.
AM10	InvalidControlSum	Sum of instructed amounts does not equal the control sum.
BE01	InconsistentWithEndCustomer	Identification of end customer is not consistent with associated account number. (formerly CreditorConsistency)
BE04	MissingCreditorAddress	Specification of creditor's address, which is required for payment, is missing/not correct (formerly IncorrectCreditorAddress).
BE05	UnrecognisedInitiatingParty	Party who initiated the message is not recognised by the end customer.

Code	Name	Definition
BE06	UnknownEndCustomer	End customer specified is not known at associated Sort/ National Bank Code or does no longer exist in the books.
BE07	MissingDebtorAddress	Specification of debtor's address, which is required for payment, is missing/not correct.
DT01	InvalidDate	Invalid date (eg, wrong settlement date).
ED01	CorrespondentBankNotPossible	Correspondent bank not possible.
ED03	BalanceInfoRequested	Balance of payments complementary info is requested.
ED05	SettlementFailed	Settlement of the transaction has failed.
MD01	NoMandate	Mandate is cancelled or invalid.
MD02	MissingMandatoryInformationInMandate	Mandate related information data required by the scheme is missing.
MD03	InvalidFileFormatForOtherReasonThanGroupingIndicator	File format incomplete or invalid.
MD04	InvalidFileFormatForGroupingIndicator	File format incorrect in terms of grouping indicator.
MD06	RefundRequestByEndCustomer	Return of funds requested by end customer.
MD07	EndCustomerDeceased	End customer is deceased.
MS02	NotSpecifiedReasonCustomerGenerated	Reason has not been specified by end customer.
MS03	NotSpecifiedReasonAgentGenerated	Reason has not been specified by agent.
NARR	Narrative	Reason is provided as narrative information in the additional reason information.
RC01	BankIdentifierIncorrect	Bank identifier code specified in the message has an incorrect format (formerly IncorrectFormatForRoutingCode).
RF01	NotUniqueTransactionReference	Transaction reference is not unique within the message.
TM01	CutOffTime	Associated message was received after agreed processing cut-off time.

2.294 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.292** ReturnReason.*

Definition: Reason for the return not catered for by the available codes.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.295 AdditionalReturnReasonInformation <AddtlRtrRsnInf>

Presence: [0..n]
Definition: Further details on the return reason.
Data Type: Max105Text
Format: maxLength: 105
minLength: 1

2.296 CorporateAction <CorpActn>

Presence: [0..1]
Definition: Set of elements identifying the underlying corporate action.
Type: *This message item is composed of the following **CorporateAction1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.297		Code	<Cd>	[0..1]	Text
2.298		Number	<Nb>	[0..1]	Text
2.299		Proprietary	<Prtry>	[0..1]	Text

2.297 Code <Cd>

Presence: [0..1]
Definition: Specifies the code of corporate action event, in free-text format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.298 Number <Nb>

Presence: [0..1]
Definition: Reference assigned by the account servicer to unambiguously identify a corporate action event.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.299 Proprietary <Prtry>

Presence: [0..1]
Definition: Proprietary corporate action event information.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.300 SafekeepingAccount <SfkpgAcct>

Presence: [0..1]
Definition: Safekeeping or investment account. A safekeeping account is an account on which a securities entry is made. An investment account is an account between an investor(s) and a fund manager or a fund. The account can

contain holdings in any investment fund or investment fund class managed (or distributed) by the fund manager, within the same fund family.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.335 in 'Message Item Types' section.

2.301 AdditionalTransactionInformation <AddtlTxInf>

Presence: [0..1]
Definition: Further details on the transaction details.
Data Type: Max500Text
Format: maxLength: 500
minLength: 1

2.302 AdditionalEntryInformation <AddtlNtryInf>

Presence: [0..1]
Definition: Further details on the entry details.
Data Type: Max500Text
Format: maxLength: 500
minLength: 1

2.303 AdditionalNotificationInformation <AddtlNtfctnInf>

Presence: [0..1]
Definition: Further details on the account notification.
Data Type: Max500Text
Format: maxLength: 500
minLength: 1

Business Example

Narrative

Besides providing an intraday AccountReport at 12.30 PM (see example with AccountReport), AAAA Banken and Finpetrol have agreed on a credit notification service, for all incoming credits above a certain threshold. On 18 October, at 1.20 PM, AAAASESS sends a DebitCreditNotification to Company Finpetrol, to advise Finpetrol of an incoming credit on its account.

Business Description

Element	*<XMLTag>*	*Content*

Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	AAAASESS-FP-00001
CreationDateTime	<CreDtTm>	2007-10-18T13:20:00+01:00
Notification	**<Ntfctn>**	
Identification	<Id>	AAAASESS-FP-CN-98765
CreationDateTime	<CreDtTm>	2007-10-18T13:20:00+01:00
Account	<Acct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	
ID	<Id>	50000000054910000003
Owner	<Ownr>	
Name	<Nm>	FINPETROL
Servicer	<Svcr>	
FinancialInstitutionIdentification	<FinInstnId>	
NameAndPostalAddress	<NmAndAdr>	
Name	<Nm>	AAAA BANKEN
Country	<Ctry>	SE
Entry	<Ntry>	
Amount	<Amt Ccy=SEK>	105678.50
CreditDebitIndicator	<CdtDbtInd>	CRDT
Status	<Sts>	BOOK
BookingDate	<BookgDt>	
DateTime	<DtTm>	2007-10-18T13:15:00+01:00
ValueDate	<ValDt>	
Date	<Dt>	2007-10-18
AccountServicerReference	<AcctSvcrRef>	AAAASESS-FP-CN-98765/01
BankTransactionCode	<BkTxCd>	
Domain	<Domn>	
Code	<Cd>	PAYM
Family	<Fmly>	
Code	<Cd>	0001
SubFamilyCode	<SbFmlyCd>	0005
TransactionDetails	<TxDtls>	
References	<Refs>	
EndToEndIdentification	<EndToEndId>FIN	MUELL/FINP/RA12345
RelatedParties	<RltdPties>	
Debtor	<Dbtr>	

Name	<Nm>	MUELLER

XML Instance


```xml
<?xml version = "1.0" encoding = "UTF-8"?>
<Document xmlns = "urn:iso:std:iso:20022:tech:xsd:camt.054.001.01" xmlns:xsi = "http://www.w3.org/2001/
XMLSchema-instance">
  <BkToCstmrDbtCdtNtfctnV01>
    <GrpHdr>
      <MsgId>AAAASESS-FP-00001</MsgId>
      <CreDtTm>2007-10-18T13:20:00+01:00</CreDtTm>
    </GrpHdr>
    <Ntfctn>
      <Id>AAAASESS-FP-CN-98765</Id>
      <CreDtTm>2007-10-18T13:20:00+01:00</CreDtTm>
      <Acct>
        <Id>
          <PrtryAcct>
            <Id>50000000054910000003</Id>
          </PrtryAcct>
        </Id>
        <Ownr>
          <Nm>FINPETROL</Nm>
        </Ownr>
        <Svcr>
          <FinInstnId>
            <NmAndAdr>
              <Nm>AAAA BANKEN</Nm>
              <PstlAdr>
                <Ctry>SE</Ctry>
              </PstlAdr>
            </NmAndAdr>
          </FinInstnId>
        </Svcr>
      </Acct>
      <Ntry>
        <Amt Ccy = "SEK">105678.50</Amt>
        <CdtDbtInd>CRDT</CdtDbtInd>
        <Sts>BOOK</Sts>
        <BookgDt>
          <DtTm> 2007-10-18T13:15:00+01:00</DtTm>
        </BookgDt>
        <ValDt>
          <Dt>2007-10-18</Dt>
        </ValDt>
        <AcctSvcrRef>AAAASESS-FP-CN-98765/01</AcctSvcrRef>
        <BkTxCd>
          <Domn>
            <Cd>PAYM</Cd>
            <Fmly>
              <Cd>0001</Cd>
```

```
                <SubFmlyCd>0005</SubFmlyCd>
              </Fmly>
            </Domn>
          </BkTxCd>
          <TxDtls>
            <Refs>
              <EndToEndId>MUELL/FINP/RA12345</EndToEndId>
            </Refs>
            <RltdPties>
              <Dbtr>
                <Nm>MUELLER</Nm>
                <PstlAdr>
                  <Ctry>DE</Ctry>
                </PstlAdr>
              </Dbtr>
            </RltdPties>
          </TxDtls>
        </Ntry>
      </Ntfctn>
    </BkToCstmrDbtCdtNtfctnV01>
</Document>
```

Message Item Types

Data Types

Data Types Index

1 Amount

1.1 CurrencyAndAmount
1.2 ImpliedCurrencyAndAmount

2 Date Time

2.1 ISODate
2.2 ISODateTime
2.3 ISOTime
2.4 ISOYear

3 Identifier

3.1 AustrianBankleitzahlIdentifier
3.2 BBANIdentifier
3.3 BEIIdentifier
3.4 BICIdentifier
3.5 BelgianIdentifier
3.6 BloombergIdentifier
3.7 CHIPSParticipantIdentifier
3.8 CHIPSUniversalIdentifier
3.9 CUSIPIdentifier
3.10 CanadianPaymentsARNIdentifier
3.11 ConsolidatedTapeAssociationIdentifier
3.12 CountryCode
3.13 CurrencyCode
3.14 DunsIdentifier
3.15 DutchIdentifier
3.16 EANGLNIdentifier
3.17 EuroclearClearstreamIdentifier
3.18 ExtensiveBranchNetworkIdentifier
3.19 ExternalBankTransactionDomainCode
3.20 ExternalBankTransactionFamilyCode
3.21 ExternalBankTransactionSubFamilyCode
3.22 ExternalClearingSystemMemberCode
3.23 ExternalPurposeCode
3.24 FedwireRoutingNumberIdentifier
3.25 GermanBankleitzahlIdentifier
3.26 HellenicBankIdentificationCodeIdentifier
3.27 HongKongBankIdentifier
3.28 IBANIdentifier
3.29 IBEIIdentifier
3.30 ISINIdentifier
3.31 IndianFinancialSystemCodeIdentifier
3.32 IrishNSCIdentifier
3.33 ItalianDomesticIdentifier

3.34 LanguageCode
3.35 MICIdentifier
3.36 NationalityCode
3.37 NewZealandNCCIdentifier
3.38 PolishNationalClearingCodeIdentifier
3.39 PortugueseNCCIdentifier
3.40 QUICKIdentifier
3.41 RICIdentifier
3.42 RussianCentralBankIdentificationCodeIdentifier
3.43 SEDOLIdentifier
3.44 SicovamIdentifier
3.45 SmallNetworkIdentifier
3.46 SouthAfricanNCCIdentifier
3.47 SpanishDomesticInterbankingIdentifier
3.48 SwissBCIdentifier
3.49 SwissSICIdentifier
3.50 TickerIdentifier
3.51 UKDomesticSortCodeIdentifier
3.52 UPICIdentifier
3.53 ValorenIdentifier
3.54 WertpapierIdentifier

4 Quantity: Number and Decimal Number

4.1 DecimalNumber
4.2 Number

5 Rate

5.1 BaseOneRate
5.2 PercentageRate

6 Text

6.1 Max1025Text
6.2 Max105Text
6.3 Max128Text
6.4 Max140Text
6.5 Max15NumericText
6.6 Max15PlusSignedNumericText
6.7 Max16Text
6.8 Max256Text
6.9 Max34Text
6.10 Max350Text
6.11 Max35Text
6.12 Max3NumericText
6.13 Max4AlphaNumericText
6.14 Max500Text
6.15 Max5NumericText
6.16 Max6Text
6.17 Max70Text

Data Types Description

1 Amount

1.1 CurrencyAndAmount

Definition:	Number of monetary units specified in a currency, where the unit of currency is explicit and compliant with ISO 4217. The decimal separator is a dot. Note: A zero amount is considered a positive amount.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***CurrencyCode****.*
Format:	**CurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **CurrencyCode** [A-Z]{3,3}
Rule(s):	**CurrencyCode** ValidationByTable
Example:	100000 (Ccy='EUR')

1.2 ImpliedCurrencyAndAmount

Definition:	Number of monetary units specified in a currency where the unit of currency is implied by the context and compliant with ISO 4217. The decimal separator is a dot. Note: a zero amount is considered a positive amount.
Format:	fractionDigits: 5 minInclusive: 0 totalDigits: 18
Example:	500000

2 Date Time

2.1 ISODate

Definition:	A particular point in the progression of time in a calendar year expressed in the YYYY-MM-DD format. This representation is defined in "XML Schema Part 2: Datatypes Second Edition - W3C Recommendation 28 October 2004" which is aligned with ISO 8601.
Example:	2002-02-25

2.2 ISODateTime

Definition:	A particular point in the progression of time defined by a mandatory date and a mandatory time component, expressed in either UTC time format (YYYY-MM-DDThh:mm:ss.sssZ), local time with UTC offset format (YYYY-MM-DDThh:mm:ss.sss+/-hh:mm), or local time format (YYYY-MM-DDThh:mm:ss.sss). These representations are defined in "XML Schema Part 2: Datatypes Second Edition - W3C Recommendation 28 October 2004" which is aligned with ISO 8601. Note on the time format: 1) beginning / end of calendar day 00:00:00 = the beginning of a calendar day

	24:00:00 = the end of a calendar day 2) fractions of second in time format Decimal fractions of seconds may be included. In this case, the involved parties shall agree on the maximum number of digits that are allowed.
Example:	2002-07-21T08:35:30

2.3 ISOTime

Definition:	A particular point in the progression of time in a calendar day expressed in either UTC time format (hh:mm:ss.sssZ), local time with UTC offset format (hh:mm:ss.sss+/-hh:mm), or local time format (hh:mm:ss.sss). These representations are defined in "XML Schema Part 2: Datatypes Second Edition - W3C Recommendation 28 October 2004" which is aligned with ISO 8601. Note on the time format: 1) beginning / end of calendar day 00:00:00 = the beginning of a calendar day 24:00:00 = the end of a calendar day 2) fractions of second in time format Decimal fractions of seconds may be included. In this case, the involved parties shall agree on the maximum number of digits that are allowed.
Example:	16:34:44

2.4 ISOYear

Definition:	Year represented by YYYY (ISO 8601)
Example:	2000

3 Identifier

3.1 AustrianBankleitzahlIdentifier

Definition:	Austrian Bankleitzahl. Identifies Austrian financial institutions on the Austrian national clearing system.
Format:	AT[0-9]{5,5}
Example:	AT12345

3.2 BBANIdentifier

Definition:	Basic Bank Account Number (BBAN). Identifier used nationally by financial institutions, ie, in individual countries, generally as part of a National Account Numbering Scheme(s), which uniquely identifies the account of a customer.
Format:	[a-zA-Z0-9]{1,30}
Example:	BARC12345612345678

3.3 BEIIdentifier

Definition:	Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BEI Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.
Example:	USINFRPP

3.4 BICIdentifier

Definition:	Bank Identifier Code. code allocated to a financial institution by a Registration Authority under an international identification scheme, as described in the latest edition of the international standard ISO 9362 "Banking - Banking telecommunication messages - Bank identifier codes".
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BIC Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.
Example:	CHASUS33

3.5 BelgianIdentifier

Definition:	Identifier for Belgian securities.
Example:	359203

3.6 BloombergIdentifier

Definition:	An identifier of a security assigned by the Bloomberg organisation.
Format:	maxLength: 35 minLength: 1
Example:	GGF.FP

3.7 CHIPSParticipantIdentifier

Definition:	(United States) Clearing House Interbank Payment System (CHIPS) Participant Identifier (ID). Identifies financial institutions participating on CHIPS. The CHIPS Participant ID is assigned by the New York Clearing House.
Format:	CP[0-9]{4,4}
Example:	CP1234

3.8 CHIPSUniversalIdentifier

Definition:	(United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID). Identifies entities that own accounts at CHIPS participating financial

	institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.
Format:	CH[0-9]{6,6}
Example:	CH123456

3.9 CUSIPIdentifier

Definition:	Committee on Uniform Securities and Identification Procedures (CUSIP). The standards body that created and maintains the securities classification system in the US. Non-US securities have a similar number called the CINS number.
Example:	3134A33L8

3.10 CanadianPaymentsARNIdentifier

Definition:	Canadian Payments Association Routing Number. Identifies Canadian financial institutions on the Canadian national clearing system.
Format:	CA[0-9]{9,9}
Example:	CA123456789

3.11 ConsolidatedTapeAssociationIdentifier

Definition:	Identifier of a security assigned by the Consolidated Tape Association.
Format:	maxLength: 35 minLength: 1
Example:	483894

3.12 CountryCode

Definition:	Code to identify a country, a dependency, or another area of particular geopolitical interest, on the basis of country names obtained from the United Nations (ISO 3166, Alpha-2 code).
Format:	[A-Z]{2,2}
Rule(s):	Country The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).
Example:	BE

3.13 CurrencyCode

Definition:	Code allocated to a currency, by a maintenance agency, under an international identification scheme as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds". Valid currency codes are registered with the ISO 4217 Maintenance Agency, and consist of three contiguous letters.
Format:	[A-Z]{3,3}
Rule(s):	ValidationByTable
Example:	AWG

3.14 DunsIdentifier

Definition:	Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.
Format:	[0-9]{9,9}
Example:	578942538

3.15 DutchIdentifier

Definition:	Identifier for Dutch securities.
Example:	234123

3.16 EANGLNIdentifier

Definition:	Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve the detailed information linked to it.
Format:	[0-9]{13,13}
Example:	7265658971233

3.17 EuroclearClearstreamIdentifier

Definition:	Identifier of securities issued in Luxembourg. The common code is a 9-digit code that replaces the CEDEL (Clearstream) and Euroclear codes.
Format:	maxLength: 12 minLength: 1
Example:	12197

3.18 ExtensiveBranchNetworkIdentifier

Definition:	The extensive branch network list of the Australian Bank State Branch (BSB) Code. The codes are used for identifying Australian financial institutions, as assigned by the Australian Payments Clearing Association (APCA).
Format:	AU[0-9]{6,6}
Example:	AU123456

3.19 ExternalBankTransactionDomainCode

Definition:	Specifies the external domain code of the bank transaction code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	D001

3.20 ExternalBankTransactionFamilyCode

Definition:	Specifies the external family code of the bank transaction code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately, and is a sub-list of the bank transaction domain list.
Format:	maxLength: 4 minLength: 1
Example:	F001

3.21 ExternalBankTransactionSubFamilyCode

Definition:	Specifies the external sub-family code of the bank transaction code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately, and is a sub-list of the bank transaction family code list.
Format:	maxLength: 4 minLength: 1
Example:	S001

3.22 ExternalClearingSystemMemberCode

Definition:	Specifies the external clearing system member code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 35 minLength: 1
Example:	External Member Code 1

3.23 ExternalPurposeCode

Definition:	Specifies the external purpose code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 35 minLength: 1
Example:	External Purpose Code 1

3.24 FedwireRoutingNumberIdentifier

Definition:	Fedwire Routing Number. Identifies financial institutions, in the US, on the FedWire system. The routing number is assigned by the American Bankers Association (ABA).
Format:	FW[0-9]{9,9}
Example:	FW123456789

3.25 GermanBankleitzahlIdentifier

Definition:	German Bankleitzahl. Identifies German financial institutions on the German national clearing systems.
Format:	BL[0-9]{8,8}
Example:	BL12345678

3.26 HellenicBankIdentificationCodeIdentifier

Definition:	Hellenic Bank Identification Code Identifier. Identifies Greek financial institutions on the greek national clearing system.
Format:	GR[0-9]{7,7}
Example:	GR1234567

3.27 HongKongBankIdentifier

Definition:	Hong Kong Bank Code. Identifies Hong Kong financial institutions on the Hong Kong local clearing system.
Format:	HK[0-9]{3,3}
Example:	HK123

3.28 IBANIdentifier

Definition:	An identifier used internationally by financial institutions to uniquely identify the account of a customer at a financial institution, as described in the latest edition of the international standard ISO 13616. "Banking and related financial services - International Bank Account Number (IBAN)".
Format:	[a-zA-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
Rule(s):	IBAN A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.
Example:	AT611904300234573201

3.29 IBEIdentifier

Definition:	International Business Entity Identifier to uniquely identify business entities playing a role in the lifecycle of and events related to a financial instrument. (tentative - to be confirmed).
Format:	[A-Z]{2,2}[B-DF-HJ-NP-TV-XZ0-9]{7,7}[0-9]{1,1}
Example:	DEXBC823N0

3.30 ISINIdentifier

Definition:	International Securities Identification Number (ISIN). A numbering system designed by the United Nation's International Organisation for Standardisation (ISO). The ISIN is composed of a 2-character prefix representing the country of issue, followed by the national security number (if one exists), and a check digit. Each country has a national numbering agency that assigns ISIN numbers for securities in that country.
Format:	[A-Z0-9]{12,12}

Example:	US3134A33L82

3.31 IndianFinancialSystemCodeIdentifier

Definition:	Indian Financial System Code Identifier. Identifies Indian financial institutions on the Indian national clearing system.
Format:	IN[a-zA-Z0-9]{11,11}
Example:	IN12azBX12345

3.32 IrishNSCIdentifier

Definition:	Irish National Sorting Code. Identifies Irish financial institutions on the Irish national clearing system.
Format:	IE[0-9]{6,6}
Example:	IE123456

3.33 ItalianDomesticIdentifier

Definition:	Italian Domestic Identification Code. Identifies Italian financial institutions on the Italian national clearing system. The code is assigned by the Associazione Bancaria Italiana (ABI).
Format:	IT[0-9]{10,10}
Example:	IT1234567890

3.34 LanguageCode

Definition:	Specifies a language.
Rule(s):	ValidationByTable
Example:	ENG

3.35 MICIdentifier

Definition:	Market Identifier Code. The identification of a financial market, as stipulated in the norm ISO 10383 'Codes for exchanges and market identifications'.
Format:	[A-Z0-9]{4,4}
Example:	XTKS

3.36 NationalityCode

Definition:	Specifies the country where a person was born or is naturalised.
Rule(s):	ValidationByTable
Example:	US

3.37 NewZealandNCCIdentifier

Definition:	New Zealand Bank/Branch Code. Identifies New Zealand institutions on the New Zealand national clearing system. The code is assigned by the New Zealand Bankers' Association (NZBA).
Format:	NZ[0-9]{6,6}

Example:	NZ123456

3.38 PolishNationalClearingCodeIdentifier

Definition:	Polish National Clearing Code Identifier. Identifies Polish financial institutions on the Polish national clearing system.
Format:	PL[0-9]{8,8}
Example:	PL12345678

3.39 PortugueseNCCIdentifier

Definition:	Portuguese National Clearing Code. Identifies Portuguese financial institutions on the Portuguese national clearing system.
Format:	PT[0-9]{8,8}
Example:	PT12345678

3.40 QUICKIdentifier

Definition:	Identifier of a security assigned by the Japanese QUICK identification scheme for financial instruments.
Example:	97334

3.41 RICIdentifier

Definition:	Reuters Identification Code (RIC). A numbering system used within the Reuters system to identify instruments worldwide. The RIC contains an X-character market specific code (can be the CUSIP or EPIC codes) followed by a full stop, then the two-digit ISO country code, eg, IBM in UK is IBM.UK.
Format:	maxLength: 35 minLength: 1
Example:	TDVd.CR

3.42 RussianCentralBankIdentificationCodeIdentifier

Definition:	Russian Central Bank Identification Code. Identifies Russian financial institutions on the Russian national clearing system.
Format:	RU[0-9]{9,9}
Example:	RU123456789

3.43 SEDOLIdentifier

Definition:	Stock Exchange Daily Official List (SEDOL) number. A code used by the London Stock Exchange to identify foreign stocks, especially those that aren't actively traded in the US and don't have a CUSIP number.
Example:	5719210

3.44 SicovamIdentifier

Definition:	Identifier for French securities assigned by the Societe Interprofessionnelle Pour La Compensation des Valeurs Mobilieres in France. The Sicovam is composed of 5-digits.

Example:	12777

3.45 SmallNetworkIdentifier

Definition:	The small network list of the Australian Bank State Branch (BSB) Code. The codes are used for identifying Australian financial institutions, as assigned by the Australian Payments Clearing Association (APCA).
Format:	AU[0-9]{6,6}
Example:	AU123456

3.46 SouthAfricanNCCIdentifier

Definition:	South African National Clearing Code (NCC). Identifies South African financial institutions on the South African national clearing system. The code is assigned by the South African Bankers Services Company Ltd. (BankServ).
Format:	ZA[0-9]{6,6}
Example:	ZA123456

3.47 SpanishDomesticInterbankingIdentifier

Definition:	Spanish Domestic Interbanking Code. Identifies Spanish financial institutions on the Spanish national clearing system. The code is assigned by the Centro de Cooperacion Interbancaria (CCI).
Format:	ES[0-9]{8,9}
Example:	ES12345678

3.48 SwissBCIdentifier

Definition:	Swiss Bank Code. Identifies Swiss institutions on the Swiss national clearing system.
Format:	SW[0-9]{3,5}
Example:	SW123

3.49 SwissSICIdentifier

Definition:	Swiss Interbank Clearing (SIC) Code. Identifies Swiss financial institutions domestically, on the Swiss national clearing system.
Format:	SW[0-9]{6,6}
Example:	SW123456

3.50 TickerIdentifier

Definition:	Letters that identify a stock traded on a stock exchange. The Ticker Symbol is a short and convenient way of identifying a stock, eg, RTR.L for Reuters quoted in London.
Format:	maxLength: 35 minLength: 1
Example:	SOL

3.51 UKDomesticSortCodeIdentifier

Definition:	United Kingdom (UK) Sort Code. Identifies British financial institutions on the British national clearing systems. The sort code is assigned by the Association for Payments and Clearing Services (APACS).
Format:	SC[0-9]{6,6}
Example:	SC123456

3.52 UPICIdentifier

Definition:	Universal Payment Identification Code (UPIC). Identifier used by the New York Clearing House to mask confidential data, such as bank accounts and bank routing numbers. UPIC numbers remain with business customers, regardless of banking relationship changes.
Format:	[0-9]{8,17}
Example:	12345678

3.53 ValorenIdentifier

Definition:	Identifier for Swiss securities assigned by Telekurs Financial, the Swiss numbering agency.
Example:	832614

3.54 WertpapierIdentifier

Definition:	Wertpapier Kenn-nummer. A number issued in Germany by the Wertpapier Mitteilungen.The Wertpapier Kenn-nummer, sometimes called WPK, contains 6-digits, but no check digit. There are different ranges of numbers representing different classes of securities.
Example:	911958

4 Quantity: Number and Decimal Number

4.1 DecimalNumber

Definition:	Number of objects represented as a decimal number, eg, 0.75 or 45.6.
Format:	fractionDigits: 17 totalDigits: 18
Example:	123456789.123456789

4.2 Number

Definition:	Number of objects represented as an integer.
Format:	fractionDigits: 0 totalDigits: 18
Example:	123456789012345678

5 Rate

5.1 BaseOneRate

Definition:	Rate expressed as a decimal, eg, 0.7 is 7/10 and 70%.

Format:	fractionDigits: 10 totalDigits: 11
Example:	0.60

5.2 PercentageRate

Definition:	Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Format:	fractionDigits: 10 totalDigits: 11
Example:	35

6 Text

6.1 Max1025Text

Definition:	Specifies a character string with a maximum length of 1025 characters.
Format:	maxLength: 1025 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789

6.2 Max105Text

Definition:	Specifies a character string with a maximum length of 105 characters.
Format:	maxLength: 105 minLength: 1
Example:	azefgvgldfpgtvcvlmgovl;v ; :B;lgkdfwxcvljfqsifj

6.3 Max128Text

Definition:	Specifies a character string with a maximum length of 128 characters.
Format:	maxLength: 128 minLength: 1
Example:	A string value of maximum 128 characters.

6.4 Max140Text

Definition:	Specifies a character string with a maximum length of 140 characters.
Format:	maxLength: 140 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.5 Max15NumericText

Definition:	Specifies a numeric string with a maximum length of 15 digits.
Format:	[0-9]{1,15}
Example:	458793625148975

6.6 Max15PlusSignedNumericText

Definition:	Specifies a numeric string with a maximum length of 15 digits and may be prefixed with a plus sign.
Format:	[+]{0,1}[0-9]{1,15}
Example:	+2450

6.7 Max16Text

Definition:	Specifies a character string with a maximum length of 16 characters.
Format:	maxLength: 16 minLength: 1
Example:	ABCdEFghIJKLMNO?

6.8 Max256Text

Definition:	Specifies a character string with a maximum length of 256 characters.
Format:	maxLength: 256 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST1234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.9 Max34Text

Definition:	Specifies a character string with a maximum length of 34 characters.
Format:	maxLength: 34 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234

6.10 Max350Text

Definition:	Specifies a character string with a maximum length of 350 characters.
Format:	maxLength: 350 minLength: 1
Example:	1234567890

6.11 Max35Text

Definition:	Specifies a character string with a maximum length of 35 characters.
Format:	maxLength: 35 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST123456789012345

6.12 Max3NumericText

Definition:	Specifies a numeric string with a maximum length of 3 digits.
Format:	[0-9]{1,3}
Example:	003

6.13 Max4AlphaNumericText

Definition:	Specifies an alphanumeric string with a maximum length of 4 characters.
Format:	[a-zA-Z0-9]{1,4}
Example:	aBc9

6.14 Max500Text

Definition:	Specifies a character string with a maximum length of 350 characters.
Format:	maxLength: 500 minLength: 1
Example:	1234567890

6.15 Max5NumericText

Definition:	Specifies a numeric string with a maximum length of 5 digits.
Format:	[0-9]{1,5}
Example:	1

6.16 Max6Text

Definition:	Specifies a character string with a maximum length of 6 characters.
Format:	maxLength: 6 minLength: 1
Example:	ABCDEF

6.17 Max70Text

Definition:	Specifies a character string with a maximum length of 70characters.
Format:	maxLength: 70 minLength: 1
Example:	A string value of maximum 70 characters.

End Points

End Points Index

1 Account identification

1.1 AccountIdentification3Choice
1.2 CashAccount7

2 Amount range

2.1 CurrencyAndAmountRange

3 CurrencyExchange

3.1 CurrencyExchange3

4 Date time

4.1 DateAndDateTimeChoice

5 Date time period

5.1 DateTimePeriodDetails

6 Financial institution identification

6.1 BranchAndFinancialInstitutionIdentification3

7 Party identification

7.1 PartyIdentification8

8 Postal address

8.1 PostalAddress1

9 Securities quantity

9.1 FinancialInstrumentQuantityChoice

10 Tax

10.1 TaxInformation2

End Points Description

1 Account identification

1.1 AccountIdentification3Choice

AccountIdentification3Choice *is used in message* ***BankToCustomerAccountReportV01*** *p.7, message* ***BankToCustomerDebitCreditNotificationV01*** *p.222, message* ***BankToCustomerStatementV01*** *p.114.*

Definition: Unique identifier of an account as assigned by the account servicer.

Type: *One of the following* ***AccountIdentification3Choice*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.0	{Or	IBAN	<IBAN>	[1..1]	Identifier
1.1.1	Or	BBAN	<BBAN>	[1..1]	Identifier
1.1.2	Or	UPIC	<UPIC>	[1..1]	Identifier
1.1.3	Or}	ProprietaryAccount	<PrtryAcct>	[1..1]	
1.1.4		Identification	<Id>	[1..1]	Text

1.1.0 IBAN <IBAN>

Presence: [1..1]

*This message item is part of choice **1.1** AccountIdentification3Choice.*

Definition: International Bank Account Number (IBAN) - identifier used internationally by financial institutions to uniquely identify the account of a customer. Further specifications of the format and content of the IBAN can be found in the standard ISO 13616 "Banking and related financial services - International Bank Account Number (IBAN)" version 1997-10-01, or later revisions.

Data Type: IBANIdentifier

Format: [a-zA-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}

Rule(s): IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

1.1.1 BBAN <BBAN>

Presence: [1..1]

*This message item is part of choice **1.1** AccountIdentification3Choice.*

Definition: Basic Bank Account Number (BBAN) - identifier used nationally by financial institutions, ie, in individual countries, generally as part of a National Account Numbering Scheme(s), to uniquely identify the account of a customer.

Data Type: BBANIdentifier

Format: [a-zA-Z0-9]{1,30}

1.1.2 UPIC <UPIC>

Presence: [1..1]

*This message item is part of choice **1.1** AccountIdentification3Choice.*

Definition: Universal Payment Identification Code (UPIC) - identifier used by the New York Clearing House to mask confidential data, such as bank accounts and bank routing numbers. UPIC numbers remain with business customers, regardless of banking relationship changes.

Data Type: UPICIdentifier

Format: [0-9]{8,17}

1.1.3 ProprietaryAccount <PrtryAcct>

Presence: [1..1]

*This message item is part of choice **1.1** AccountIdentification3Choice.*

Definition: Account number used by financial institutions in individual countries to identify an account of a customer, but not necessarily the bank and branch of the financial institution in which the account is held.

Type: *This message item is composed of the following* ***SimpleIdentificationInformation2*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.4		Identification	<Id>	[1..1]	Text

1.1.4 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max34Text
Format: maxLength: 34
minLength: 1

1.2 CashAccount7

CashAccount7 *is used in message* ***BankToCustomerAccountReportV01*** *p.7, p.13, p.13, p.16, message* ***BankToCustomerDebitCreditNotificationV01*** *p.222, p.228, p.228, p.231, message* ***BankToCustomerStatementV01*** *p.114, p.120, p.120, p.123.*

Definition: Information used for identifying an account.
Type: *The following* ***CashAccount7*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.2.0		Identification	<Id>	[1..1]	
1.2.1	{Or	IBAN	<IBAN>	[1..1]	Identifier
1.2.2	Or	BBAN	<BBAN>	[1..1]	Identifier
1.2.3	Or	UPIC	<UPIC>	[1..1]	Identifier
1.2.4	Or}	ProprietaryAccount	<PrtryAcct>	[1..1]	
1.2.5		Identification	<Id>	[1..1]	Text
1.2.6		Type	<Tp>	[0..1]	
1.2.7	{Or	Code	<Cd>	[1..1]	Code
1.2.8	Or}	Proprietary	<Prtry>	[1..1]	Text
1.2.9		Currency	<Ccy>	[0..1]	Code
1.2.10		Name	<Nm>	[0..1]	Text

1.2.0 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following* ***AccountIdentification3Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.2.1	{Or	IBAN	<IBAN>	[1..1]	Identifier

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.2.2	Or	BBAN	<BBAN>	[1..1]	Identifier
1.2.3	Or	UPIC	<UPIC>	[1..1]	Identifier
1.2.4	Or}	ProprietaryAccount	<PrtryAcct>	[1..1]	

1.2.1 IBAN <IBAN>

Presence: [1..1]

*This message item is part of choice **1.2.0** Identification.*

Definition: International Bank Account Number (IBAN) - identifier used internationally by financial institutions to uniquely identify the account of a customer. Further specifications of the format and content of the IBAN can be found in the standard ISO 13616 "Banking and related financial services - International Bank Account Number (IBAN)" version 1997-10-01, or later revisions.

Data Type: IBANIdentifier

Format: [a-zA-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}

Rule(s): IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

1.2.2 BBAN <BBAN>

Presence: [1..1]

*This message item is part of choice **1.2.0** Identification.*

Definition: Basic Bank Account Number (BBAN) - identifier used nationally by financial institutions, ie, in individual countries, generally as part of a National Account Numbering Scheme(s), to uniquely identify the account of a customer.

Data Type: BBANIdentifier

Format: [a-zA-Z0-9]{1,30}

1.2.3 UPIC <UPIC>

Presence: [1..1]

*This message item is part of choice **1.2.0** Identification.*

Definition: Universal Payment Identification Code (UPIC) - identifier used by the New York Clearing House to mask confidential data, such as bank accounts and bank routing numbers. UPIC numbers remain with business customers, regardless of banking relationship changes.

Data Type: UPICIdentifier

Format: [0-9]{8,17}

1.2.4 ProprietaryAccount <PrtryAcct>

Presence: [1..1]

*This message item is part of choice **1.2.0** Identification.*

Definition: Account number used by financial institutions in individual countries to identify an account of a customer, but not necessarily the bank and branch of the financial institution in which the account is held.

Type: *This message item is composed of the following **SimpleIdentificationInformation2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.2.5		Identification	<Id>	[1..1]	Text

1.2.5 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max34Text
Format: maxLength: 34
minLength: 1

1.2.6 Type <Tp>

Presence: [0..1]
Definition: Nature, or use, of the account.
Type: *This message item is composed of one of the following **CashAccountType2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.2.7	{Or	Code	<Cd>	[1..1]	Code
1.2.8	Or}	Proprietary	<Prtry>	[1..1]	Text

1.2.7 Code <Cd>

Presence: [1..1]
*This message item is part of choice **1.2.6** Type.*
Definition: Nature or use of the account in a coded form.
Data Type: Code
*One of the following **CashAccountType4Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
CISH	CashIncome	Account used for payment of income if different from the current cash account.
COMM	Commission	Account used for commission if different from the account for payment.
LOAN	Loan	Account used for loans.
MGLD	MarginalLending	Account used for a marginal lending facility.
MOMA	MoneyMarket	Account used for money markets if different from the cash account.
NREX	NonResidentExternal	Account used for non-resident external.

Code	Name	Definition
ODFT	Overdraft	Account is used for overdrafts.
ONDP	OverNightDeposit	Account used for overnight deposits.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SLRY	Salary	Accounts used for salary payments.
SVGS	Savings	Account used for savings.
TAXE	Tax	Account used for taxes if different from the account for payment.
TRAS	CashTrading	Account used for trading if different from the current cash account.

1.2.8 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **1.2.6** Type.*
Definition: Proprietary nature or use of the account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.2.9 Currency <Ccy>

Presence: [0..1]
Definition: Identification of the currency in which the account is held.

Usage: Currency should only be used in case one and the same account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.
Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

1.2.10 Name <Nm>

Presence: [0..1]
Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2 Amount range

2.1 CurrencyAndAmountRange

CurrencyAndAmountRange *is used in message* ***BankToCustomerAccountReportV01*** *p.7, p.11, p.13, message* ***BankToCustomerDebitCreditNotificationV01*** *p.225, p.227, message* ***BankToCustomerStatementV01*** *p.114, p.118, p.120.*

Definition: Range of amount values.

Type: *The following* ***CurrencyAndAmountRange*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.0		Amount	<Amt>	[1..1]	
2.1.1	{Or	FromAmount	<FrAmt>	[1..1]	
2.1.2		BoundaryAmount	<BdryAmt>	[1..1]	Amount
2.1.3		Included	<Incl>	[1..1]	Indicator
2.1.4	Or	ToAmount	<ToAmt>	[1..1]	
2.1.5		BoundaryAmount	<BdryAmt>	[1..1]	Amount
2.1.6		Included	<Incl>	[1..1]	Indicator
2.1.7	Or	FromToAmount	<FrToAmt>	[1..1]	
2.1.8		FromAmount	<FrAmt>	[1..1]	
2.1.9		BoundaryAmount	<BdryAmt>	[1..1]	Amount
2.1.10		Included	<Incl>	[1..1]	Indicator
2.1.11		ToAmount	<ToAmt>	[1..1]	
2.1.12		BoundaryAmount	<BdryAmt>	[1..1]	Amount
2.1.13		Included	<Incl>	[1..1]	Indicator
2.1.14	Or	EqualAmount	<EQAmt>	[1..1]	Amount
2.1.15	Or}	NotEqualAmount	<NEQAmt>	[1..1]	Amount
2.1.16		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
2.1.17		Currency	<Ccy>	[1..1]	Code

2.1.0 Amount <Amt>

Presence: [1..1]

Definition: Specified amount or amount range.

Type: *This message item is composed of one of the following* ***ImpliedCurrencyAmountRangeChoice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.1	{Or	FromAmount	<FrAmt>	[1..1]	
2.1.4	Or	ToAmount	<ToAmt>	[1..1]	
2.1.7	Or	FromToAmount	<FrToAmt>	[1..1]	

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.14	Or	EqualAmount	<EQAmt>	[1..1]	Amount
2.1.15	Or}	NotEqualAmount	<NEQAmt>	[1..1]	Amount

2.1.1 FromAmount <FrAmt>

Presence: [1..1]
*This message item is part of choice **2.1.0** Amount.*
Definition: Lower boundary of a range of amount values.
Type: *This message item is composed of the following **AmountRangeBoundary1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.2		BoundaryAmount	<BdryAmt>	[1..1]	Amount
2.1.3		Included	<Incl>	[1..1]	Indicator

2.1.2 BoundaryAmount <BdryAmt>

Presence: [1..1]
Definition: Amount value of the range limit.
Data Type: ImpliedCurrencyAndAmount
Format: fractionDigits: 5
minInclusive: 0
totalDigits: 18

2.1.3 Included <Incl>

Presence: [1..1]
Definition: Indicates whether the boundary amount is included in the range of amount values.
Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

2.1.4 ToAmount <ToAmt>

Presence: [1..1]
*This message item is part of choice **2.1.0** Amount.*
Definition: Upper boundary of a range of amount values.
Type: *This message item is composed of the following **AmountRangeBoundary1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.5		BoundaryAmount	<BdryAmt>	[1..1]	Amount
2.1.6		Included	<Incl>	[1..1]	Indicator

2.1.5 BoundaryAmount <BdryAmt>

Presence: [1..1]
Definition: Amount value of the range limit.
Data Type: ImpliedCurrencyAndAmount
Format: fractionDigits: 5
minInclusive: 0
totalDigits: 18

2.1.6 Included <Incl>

Presence: [1..1]
Definition: Indicates whether the boundary amount is included in the range of amount values.
Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

2.1.7 FromToAmount <FrToAmt>

Presence: [1..1]
*This message item is part of choice **2.1.0** Amount.*
Definition: Range of valid amount values.
Type: *This message item is composed of the following **FromToAmountRange** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.8		FromAmount	<FrAmt>	[1..1]	
2.1.11		ToAmount	<ToAmt>	[1..1]	

2.1.8 FromAmount <FrAmt>

Presence: [1..1]
Definition: Lower boundary of a range of amount values.
Type: *This message item is composed of the following **AmountRangeBoundary1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.9		BoundaryAmount	<BdryAmt>	[1..1]	Amount
2.1.10		Included	<Incl>	[1..1]	Indicator

2.1.9 BoundaryAmount <BdryAmt>

Presence: [1..1]
Definition: Amount value of the range limit.
Data Type: ImpliedCurrencyAndAmount
Format: fractionDigits: 5
minInclusive: 0
totalDigits: 18

2.1.10 Included <Incl>

Presence: [1..1]
Definition: Indicates whether the boundary amount is included in the range of amount values.
Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

2.1.11 ToAmount <ToAmt>

Presence: [1..1]
Definition: Upper boundary of a range of amount values.
Type: *This message item is composed of the following **AmountRangeBoundary1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.12		BoundaryAmount	<BdryAmt>	[1..1]	Amount
2.1.13		Included	<Incl>	[1..1]	Indicator

2.1.12 BoundaryAmount <BdryAmt>

Presence: [1..1]
Definition: Amount value of the range limit.
Data Type: ImpliedCurrencyAndAmount
Format: fractionDigits: 5
minInclusive: 0
totalDigits: 18

2.1.13 Included <Incl>

Presence: [1..1]
Definition: Indicates whether the boundary amount is included in the range of amount values.
Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

2.1.14 EqualAmount <EQAmt>

Presence: [1..1]
*This message item is part of choice **2.1.0** Amount.*
Definition: Exact value an amount must match to be considered valid.
Data Type: ImpliedCurrencyAndAmount
Format: fractionDigits: 5
minInclusive: 0
totalDigits: 18

2.1.15 NotEqualAmount <NEQAmt>

Presence: [1..1]
*This message item is part of choice **2.1.0** Amount.*
Definition: Value that an amount must not match to be considered valid.

Data Type: ImpliedCurrencyAndAmount
Format: fractionDigits: 5
minInclusive: 0
totalDigits: 18

2.1.16 CreditDebitIndicator <CdtDbtInd>

Presence: [0..1]
Definition: Indicates whether the amount is a credited or debited amount.
Data Type: Code
*When this message item is present, one of the following **CreditDebitCode** values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.1.17 Currency <Ccy>

Presence: [1..1]
Definition: Medium of exchange of value, used to qualify an amount.
Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

3 CurrencyExchange

3.1 CurrencyExchange3

***CurrencyExchange3** is used in message **BankToCustomerAccountReportV01** p.10, p.10, p.10, p.10, p.10, p.12, p.12, p.12, p.12, p.12, message **BankToCustomerDebitCreditNotificationV01** p.224, p.224, p.224, p.224, p.225, p.226, p.226, p.226, p.226, p.226, message **BankToCustomerStatementV01** p.117, p.117, p.117, p.117, p.117, p.119, p.119, p.119, p.119, p.119.*

Definition: Information needed to process a currency exchange or conversion.
Type: *The following **CurrencyExchange3** element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.0		SourceCurrency	<SrcCcy>	[1..1]	Code
3.1.1		TargetCurrency	<TrgtCcy>	[0..1]	Code
3.1.2		UnitCurrency	<UnitCcy>	[0..1]	Code
3.1.3		ExchangeRate	<XchgRate>	[1..1]	Rate
3.1.4		ContractIdentification	<CtrctId>	[0..1]	Text
3.1.5		QuotationDate	<QtnDt>	[0..1]	DateTime

3.1.0 SourceCurrency <SrcCcy>

Presence: [1..1]

Definition: Currency of the amount to be converted in a currency conversion.
Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

3.1.1 TargetCurrency <TrgtCcy>

Presence: [0..1]
Definition: Currency into which an amount is to be converted in a currency conversion.
Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

3.1.2 UnitCurrency <UnitCcy>

Presence: [0..1]
Definition: Currency in which the rate of exchange is expressed in a currency exchange. In the example 1GBP = xxxCUR, the unit currency is GBP.
Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

3.1.3 ExchangeRate <XchgRate>

Synonym(s): :92A::EXCH (ISO 15022)
Presence: [1..1]
Definition: Factor used for the conversion of an amount from one currency into another. This reflects the price at which one currency was bought with another currency.

Usage: ExchangeRate expresses the ratio between UnitCurrency and QuotedCurrency (ExchangeRate = UnitCurrency/QuotedCurrency).
Data Type: BaseOneRate
Format: fractionDigits: 10
totalDigits: 11

3.1.4 ContractIdentification <CtrctId>

Presence: [0..1]
Definition: Unique and unambiguous identifier of the foreign exchange contract.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.5 QuotationDate <QtnDt>

Presence: [0..1]
Definition: Date and time at which an exchange rate is quoted.
Data Type: ISODateTime

4 Date time

4.1 DateAndDateTimeChoice

DateAndDateTimeChoice *is used in message* ***BankToCustomerAccountReportV01*** *p.8, p.9, p.9, message* ***BankToCustomerDebitCreditNotificationV01*** *p.223, p.223, message* ***BankToCustomerStatementV01*** *p.115, p.116, p.116.*

Definition: Choice between a date or a date and time format.
Type: *One of the following* ***DateAndDateTimeChoice*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.0	{Or	Date	<Dt>	[1..1]	DateTime
4.1.1	Or}	DateTime	<DtTm>	[1..1]	DateTime

4.1.0 Date <Dt>

Presence: [1..1]
This message item is part of choice ***4.1*** *DateAndDateTimeChoice.*
Definition: Specified date.
Data Type: ISODate

4.1.1 DateTime <DtTm>

Presence: [1..1]
This message item is part of choice ***4.1*** *DateAndDateTimeChoice.*
Definition: Specified date and time.
Data Type: ISODateTime

5 Date time period

5.1 DateTimePeriodDetails

DateTimePeriodDetails *is used in message* ***BankToCustomerAccountReportV01*** *p.7, p.7, p.11, p.13, message* ***BankToCustomerDebitCreditNotificationV01*** *p.222, p.225, p.227, message* ***BankToCustomerStatementV01*** *p.114, p.115, p.118, p.120.*

Definition: Time span defined by a start date and time, and an end date and time.
Type: *The following* ***DateTimePeriodDetails*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.0		FromDateTime	<FrDtTm>	[1..1]	DateTime
5.1.1		ToDateTime	<ToDtTm>	[1..1]	DateTime

5.1.0 FromDateTime <FrDtTm>

Presence: [1..1]
Definition: Date and time at which the range starts.

Data Type: ISODateTime

5.1.1 ToDateTime <ToDtTm>

Presence: [1..1]
Definition: Date and time at which the range ends.
Data Type: ISODateTime

6 Financial institution identification

6.1 BranchAndFinancialInstitutionIdentification3

BranchAndFinancialInstitutionIdentification3 *is used in message* ***BankToCustomerAccountReportV01*** *p.7, p.11, p.13, p.13, p.14, p.14, p.14, p.14, p.14, p.14, p.14, p.14, p.14, message* ***BankToCustomerDebitCreditNotificationV01*** *p.222, p.225, p.227, p.228, p.228, p.228, p.228, p.228, p.228, p.228, p.228, p.228, p.228, message* ***BankToCustomerStatementV01*** *p.114, p.118, p.120, p.121, p.121, p.121, p.121, p.121, p.121, p.121, p.121, p.121, p.121.*

Definition: Unique and unambiguous identifier of a financial institution or a branch of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *The following* ***BranchAndFinancialInstitutionIdentification3*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.0		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
6.1.1	{Or	BIC	<BIC>	[1..1]	Identifier
6.1.2	Or	ClearingSystemMemberIdentification	<ClrSysMmbId>	[1..1]	
6.1.3	{{Or	Identification	<Id>	[1..1]	Code
6.1.4	Or}}	Proprietary	<Prtry>	[1..1]	Text
6.1.5	Or	NameAndAddress	<NmAndAdr>	[1..1]	
6.1.6		Name	<Nm>	[1..1]	Text
6.1.7		PostalAddress	<PstlAdr>	[1..1]	
6.1.8		AddressType	<AdrTp>	[0..1]	Code
6.1.9		AddressLine	<AdrLine>	[0..5]	Text
6.1.10		StreetName	<StrtNm>	[0..1]	Text
6.1.11		BuildingNumber	<BldgNb>	[0..1]	Text
6.1.12		PostCode	<PstCd>	[0..1]	Text
6.1.13		TownName	<TwnNm>	[0..1]	Text
6.1.14		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
6.1.15		Country	<Ctry>	[1..1]	Code
6.1.16	Or	ProprietaryIdentification	<PrtryId>	[1..1]	
6.1.17		Identification	<Id>	[1..1]	Text
6.1.18		Issuer	<Issr>	[0..1]	Text
6.1.19	Or}	CombinedIdentification	<CmbndId>	[1..1]	

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.20		BIC	<BIC>	[0..1]	Identifier
6.1.21		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
6.1.22	{{Or	Identification	<Id>	[1..1]	Code
6.1.23	Or}}	Proprietary	<Prtry>	[1..1]	Text
6.1.24		Name	<Nm>	[0..1]	Text
6.1.25		PostalAddress	<PstlAdr>	[0..1]	
6.1.26		AddressType	<AdrTp>	[0..1]	Code
6.1.27		AddressLine	<AdrLine>	[0..5]	Text
6.1.28		StreetName	<StrtNm>	[0..1]	Text
6.1.29		BuildingNumber	<BldgNb>	[0..1]	Text
6.1.30		PostCode	<PstCd>	[0..1]	Text
6.1.31		TownName	<TwnNm>	[0..1]	Text
6.1.32		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
6.1.33		Country	<Ctry>	[1..1]	Code
6.1.34		ProprietaryIdentification	<PrtryId>	[0..1]	
6.1.35		Identification	<Id>	[1..1]	Text
6.1.36		Issuer	<Issr>	[0..1]	Text
6.1.37		BranchIdentification	<BrnchId>	[0..1]	
6.1.38		Identification	<Id>	[0..1]	Text
6.1.39		Name	<Nm>	[0..1]	Text
6.1.40		PostalAddress	<PstlAdr>	[0..1]	
6.1.41		AddressType	<AdrTp>	[0..1]	Code
6.1.42		AddressLine	<AdrLine>	[0..5]	Text
6.1.43		StreetName	<StrtNm>	[0..1]	Text
6.1.44		BuildingNumber	<BldgNb>	[0..1]	Text
6.1.45		PostCode	<PstCd>	[0..1]	Text
6.1.46		TownName	<TwnNm>	[0..1]	Text
6.1.47		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
6.1.48		Country	<Ctry>	[1..1]	Code

6.1.0 FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identifier of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *This message item is composed of one of the following* ***FinancialInstitutionIdentification5Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.1	{Or	BIC	<BIC>	[1..1]	Identifier
6.1.2	Or	ClearingSystemMemberIdentification	<ClrSysMmbId>	[1..1]	
6.1.5	Or	NameAndAddress	<NmAndAdr>	[1..1]	
6.1.16	Or	ProprietaryIdentification	<PrtryId>	[1..1]	
6.1.19	Or}	CombinedIdentification	<CmbndId>	[1..1]	

6.1.1 BIC <BIC>

Presence: [1..1]

*This message item is part of choice **6.1.0** FinancialInstitutionIdentification.*

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

6.1.2 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [1..1]

*This message item is part of choice **6.1.0** FinancialInstitutionIdentification.*

Definition: Unique and unambiguous identifier of a clearing system member, as assigned by the system or system administrator.

Type: *This message item is composed of one of the following **ClearingSystemMemberIdentification3Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.3	{Or	Identification	<Id>	[1..1]	Code
6.1.4	Or}	Proprietary	<Prtry>	[1..1]	Text

6.1.3 Identification <Id>

Presence: [1..1]

*This message item is part of choice **6.1.2** ClearingSystemMemberIdentification.*

Definition: Identification for a clearing system member, identified in the list of clearing system member identifications published externally.

Data Type: ExternalClearingSystemMemberCode

Format: maxLength: 35
minLength: 1

6.1.4 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **6.1.2** ClearingSystemMemberIdentification.*
Definition: Identification Code for a clearing system, that has not yet been identified in the list of clearing systems.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.5 NameAndAddress <NmAndAdr>

Presence: [1..1]
*This message item is part of choice **6.1.0** FinancialInstitutionIdentification.*
Definition: Identifies the name and address of a financial institution.
Type: *This message item is composed of the following **NameAndAddress7** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.6		Name	<Nm>	[1..1]	Text
6.1.7		PostalAddress	<PstlAdr>	[1..1]	

6.1.6 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

6.1.7 PostalAddress <PstlAdr>

Presence: [1..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.8		AddressType	<AdrTp>	[0..1]	Code
6.1.9		AddressLine	<AdrLine>	[0..5]	Text
6.1.10		StreetName	<StrtNm>	[0..1]	Text
6.1.11		BuildingNumber	<BldgNb>	[0..1]	Text
6.1.12		PostCode	<PstCd>	[0..1]	Text
6.1.13		TownName	<TwnNm>	[0..1]	Text
6.1.14		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
6.1.15		Country	<Ctry>	[1..1]	Code

6.1.8 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

6.1.9 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

6.1.10 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

6.1.11 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

6.1.12 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

6.1.13 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.14 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country eg, state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.15 Country <Ctry>

Presence: [1..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

6.1.16 ProprietaryIdentification <PrtryId>

Presence: [1..1]
*This message item is part of choice **6.1.0** FinancialInstitutionIdentification.*
Definition: Unique and unambiguous identifier, as assigned to a financial institution using a proprietary identification scheme.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.17		Identification	<Id>	[1..1]	Text
6.1.18		Issuer	<Issr>	[0..1]	Text

6.1.17 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.18 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

6.1.19 CombinedIdentification <CmbndId>

Presence: [1..1]

*This message item is part of choice **6.1.0** FinancialInstitutionIdentification.*

Definition: Unique and unambiguous identification of a financial institution, through a combimation of globally recognised or proprietary identification scheme.

Type: *This message item is composed of the following **FinancialInstitutionIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.20		BIC	<BIC>	[0..1]	Identifier
6.1.21		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
6.1.24		Name	<Nm>	[0..1]	Text
6.1.25		PostalAddress	<PstlAdr>	[0..1]	
6.1.34		ProprietaryIdentification	<PrtryId>	[0..1]	

6.1.20 BIC <BIC>

Presence: [0..1]

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

6.1.21 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [0..1]

Definition: Unique and unambiguous identifier of a clearing system member, as assigned by the system or system administrator.

Type: *This message item is composed of one of the following **ClearingSystemMemberIdentification3Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.22	{Or	Identification	<Id>	[1..1]	Code

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.23	Or}	Proprietary	<Prtry>	[1..1]	Text

6.1.22 Identification <Id>

Presence: [1..1]

*This message item is part of choice **6.1.21** ClearingSystemMemberIdentification.*

Definition: Identification for a clearing system member, identified in the list of clearing system member identifications published externally.

Data Type: ExternalClearingSystemMemberCode

Format: maxLength: 35
minLength: 1

6.1.23 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **6.1.21** ClearingSystemMemberIdentification.*

Definition: Identification Code for a clearing system, that has not yet been identified in the list of clearing systems.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

6.1.24 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

6.1.25 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.26		AddressType	<AdrTp>	[0..1]	Code
6.1.27		AddressLine	<AdrLine>	[0..5]	Text
6.1.28		StreetName	<StrtNm>	[0..1]	Text
6.1.29		BuildingNumber	<BldgNb>	[0..1]	Text
6.1.30		PostCode	<PstCd>	[0..1]	Text
6.1.31		TownName	<TwnNm>	[0..1]	Text
6.1.32		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
6.1.33		Country	<Ctry>	[1..1]	Code

6.1.26 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

6.1.27 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

6.1.28 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

6.1.29 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

6.1.30 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

6.1.31 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.32 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country eg, state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.33 Country <Ctry>

Presence: [1..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

6.1.34 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier, as assigned to a financial institution using a proprietary identification scheme.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.35		Identification	<Id>	[1..1]	Text
6.1.36		Issuer	<Issr>	[0..1]	Text

6.1.35 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.36 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.37 BranchIdentification <BrnchId>

Presence: [0..1]
Definition: Information identifying a specific branch of a financial institution.

Usage : this component should be used in case the identification information in the financial institution component does not provide identification up to branch level.

Type: *This message item is composed of the following **BranchData** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.38		Identification	<Id>	[0..1]	Text
6.1.39		Name	<Nm>	[0..1]	Text
6.1.40		PostalAddress	<PstlAdr>	[0..1]	

6.1.38 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a branch of a financial institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.39 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.40 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.41		AddressType	<AdrTp>	[0..1]	Code
6.1.42		AddressLine	<AdrLine>	[0..5]	Text
6.1.43		StreetName	<StrtNm>	[0..1]	Text
6.1.44		BuildingNumber	<BldgNb>	[0..1]	Text
6.1.45		PostCode	<PstCd>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.46		TownName	<TwnNm>	[0..1]	Text
6.1.47		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
6.1.48		Country	<Ctry>	[1..1]	Code

6.1.41 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

6.1.42 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

6.1.43 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

6.1.44 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

6.1.45 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

6.1.46 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

6.1.47 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country eg, state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

6.1.48 Country <Ctry>

Presence: [1..1]

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

7 Party identification

7.1 PartyIdentification8

PartyIdentification8 *is used in message* ***BankToCustomerAccountReportV01*** *p.6, p.7, p.13, p.13, p.13, p.13, p.13, p.13, p.13, p.15, p.15, p.16, message* ***BankToCustomerDebitCreditNotificationV01*** *p.222, p.222, p.227, p.227, p.228, p.228, p.228, p.228, p.228, p.229, p.229, p.230, message* ***BankToCustomerStatementV01*** *p.114, p.114, p.120, p.120, p.120, p.120, p.120, p.120, p.120, p.122, p.122, p.123.*

Definition: Identification of a person, a financial institution or a non-financial institution.

Type: *The following* ***PartyIdentification8*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.0		Name	<Nm>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.1		PostalAddress	<PstlAdr>	[0..1]	
7.1.2		AddressType	<AdrTp>	[0..1]	Code
7.1.3		AddressLine	<AdrLine>	[0..5]	Text
7.1.4		StreetName	<StrtNm>	[0..1]	Text
7.1.5		BuildingNumber	<BldgNb>	[0..1]	Text
7.1.6		PostCode	<PstCd>	[0..1]	Text
7.1.7		TownName	<TwnNm>	[0..1]	Text
7.1.8		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
7.1.9		Country	<Ctry>	[1..1]	Code
7.1.10		Identification	<Id>	[0..1]	
7.1.11	{Or	OrganisationIdentification	<OrgId>	[1..1]	
7.1.12		BIC	<BIC>	[0..1]	Identifier
7.1.13		IBEI	<IBEI>	[0..1]	Identifier
7.1.14		BEI	<BEI>	[0..1]	Identifier
7.1.15		EANGLN	<EANGLN>	[0..1]	Identifier
7.1.16		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
7.1.17		DUNS	<DUNS>	[0..1]	Identifier
7.1.18		BankPartyIdentification	<BkPtyId>	[0..1]	Text
7.1.19		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
7.1.20		ProprietaryIdentification	<PrtryId>	[0..1]	
7.1.21		Identification	<Id>	[1..1]	Text
7.1.22		Issuer	<Issr>	[0..1]	Text
7.1.23	Or}	PrivateIdentification	<PrvtId>	[1..4]	
7.1.24	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
7.1.25	Or	CustomerNumber	<CstmrNb>	[1..1]	Text
7.1.26	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
7.1.27	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
7.1.28	Or	PassportNumber	<PsptNb>	[1..1]	Text
7.1.29	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
7.1.30	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
7.1.31	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
7.1.32	Or	DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[1..1]	
7.1.33		BirthDate	<BirthDt>	[1..1]	DateTime
7.1.34		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
7.1.35		CityOfBirth	<CityOfBirth>	[1..1]	Text
7.1.36		CountryOfBirth	<CtryOfBirth>	[1..1]	Code

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.37	Or}}	OtherIdentification	<OthrId>	[1..1]	
7.1.38		Identification	<Id>	[1..1]	Text
7.1.39		IdentificationType	<IdTp>	[1..1]	Text
7.1.40		Issuer	<Issr>	[0..1]	Text
7.1.41		CountryOfResidence	<CtryOfRes>	[0..1]	Code

7.1.0 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

7.1.1 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.2		AddressType	<AdrTp>	[0..1]	Code
7.1.3		AddressLine	<AdrLine>	[0..5]	Text
7.1.4		StreetName	<StrtNm>	[0..1]	Text
7.1.5		BuildingNumber	<BldgNb>	[0..1]	Text
7.1.6		PostCode	<PstCd>	[0..1]	Text
7.1.7		TownName	<TwnNm>	[0..1]	Text
7.1.8		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
7.1.9		Country	<Ctry>	[1..1]	Code

7.1.2 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.

Code	Name	Definition
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

7.1.3 AddressLine <AdrLine>

Presence: [0..5]

Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

7.1.4 StreetName <StrtNm>

Presence: [0..1]

Definition: Name of a street or thoroughfare.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

7.1.5 BuildingNumber <BldgNb>

Presence: [0..1]

Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

7.1.6 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

7.1.7 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.8 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country eg, state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.9 Country <Ctry>

Presence: [1..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

7.1.10 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous way of identifying an organisation or an individual person.
Type: *This message item is composed of one of the following **Party2Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.11	{Or	OrganisationIdentification	<OrgId>	[1..1]	
7.1.23	Or}	PrivateIdentification	<PrvtId>	[1..4]	

7.1.11 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **7.1.10** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **OrganisationIdentification2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.12		BIC	<BIC>	[0..1]	Identifier
7.1.13		IBEI	<IBEI>	[0..1]	Identifier
7.1.14		BEI	<BEI>	[0..1]	Identifier
7.1.15		EANGLN	<EANGLN>	[0..1]	Identifier
7.1.16		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
7.1.17		DUNS	<DUNS>	[0..1]	Identifier
7.1.18		BankPartyIdentification	<BkPtyId>	[0..1]	Text
7.1.19		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
7.1.20		ProprietaryIdentification	<PrtryId>	[0..1]	

7.1.12 BIC <BIC>

Presence: [0..1]

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

7.1.13 IBEI <IBEI>

Presence: [0..1]

Definition: International Business Entity Identifier to uniquely identify business entities playing a role in the lifecycle of and events related to a financial instrument. (tentative - to be confirmed)

Data Type: IBEIIdentifier

Format: [A-Z]{2,2}[B-DF-HJ-NP-TV-XZ0-9]{7,7}[0-9]{1,1}

7.1.14 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

7.1.15 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities, or physical entities according to the European Association for Numbering (EAN) numbering scheme rules.The number is used to retrieve detailed information that is linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

7.1.16 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

7.1.17 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

7.1.18 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.19 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.20 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.

Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.21		Identification	<Id>	[1..1]	Text
7.1.22		Issuer	<Issr>	[0..1]	Text

7.1.21 Identification <Id>

Presence: [1..1]

Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.22 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.23 PrivateIdentification <PrvtId>

Presence: [1..4]
*This message item is part of choice **7.1.10** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.24	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
7.1.25	Or	CustomerNumber	<CstmrNb>	[1..1]	Text
7.1.26	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
7.1.27	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
7.1.28	Or	PassportNumber	<PsptNb>	[1..1]	Text
7.1.29	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
7.1.30	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
7.1.31	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
7.1.32	Or	DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[1..1]	
7.1.37	Or}	OtherIdentification	<OthrId>	[1..1]	
7.1.40		Issuer	<Issr>	[0..1]	Text

7.1.24 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **7.1.23** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.25 CustomerNumber <CstmrNb>

Presence: [1..1]
*This message item is part of choice **7.1.23** PrivateIdentification.*
Definition: Number assigned by an agent to identify its customer.
Data Type: Max35Text
Format: maxLength: 35

minLength: 1

7.1.26 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **7.1.23** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.27 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **7.1.23** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.28 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **7.1.23** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.29 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **7.1.23** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.30 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **7.1.23** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.31 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **7.1.23** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.32 DateAndPlaceOfBirth <DtAndPlcOfBirth>

Presence: [1..1]
*This message item is part of choice **7.1.23** PrivateIdentification.*
Definition: Date and place of birth of a person.
Type: *This message item is composed of the following **DateAndPlaceOfBirth** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.33		BirthDate	<BirthDt>	[1..1]	DateTime
7.1.34		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
7.1.35		CityOfBirth	<CityOfBirth>	[1..1]	Text
7.1.36		CountryOfBirth	<CtryOfBirth>	[1..1]	Code

7.1.33 BirthDate <BirthDt>

Presence: [1..1]
Definition: Date on which a person is born.
Data Type: ISODate

7.1.34 ProvinceOfBirth <PrvcOfBirth>

Presence: [0..1]
Definition: Province where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.35 CityOfBirth <CityOfBirth>

Presence: [1..1]
Definition: City where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.36 CountryOfBirth <CtryOfBirth>

Presence: [1..1]
Definition: Country where a person was born.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

7.1.37 OtherIdentification <OthrId>

Presence: [1..1]

*This message item is part of choice **7.1.23** PrivateIdentification.*

Definition: Identifier issued to a person for which no specific identifier has been defined.

Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.38		Identification	<Id>	[1..1]	Text
7.1.39		IdentificationType	<IdTp>	[1..1]	Text

7.1.38 Identification <Id>

Presence: [1..1]

Definition: Identifier issued to a person for which no specific identifier has been defined.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.39 IdentificationType <IdTp>

Presence: [1..1]

Definition: Specifies the nature of the identifier.
Usage: IdentificationType is used to specify what kind of identifier is used. It should be used in case the identifier is different from the identifiers listed in the pre-defined identifier list.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.40 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identifier.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.41 CountryOfResidence <CtryOfRes>

Presence: [0..1]

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

8 Postal address

8.1 PostalAddress1

PostalAddress1 *is used in message* ***BankToCustomerAccountReportV01*** *p.14, message* ***BankToCustomerDebitCreditNotificationV01*** *p.228, message* ***BankToCustomerStatementV01*** *p.121.*

Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *The following* ***PostalAddress1*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
8.1.0		AddressType	<AdrTp>	[0..1]	Code
8.1.1		AddressLine	<AdrLine>	[0..5]	Text
8.1.2		StreetName	<StrtNm>	[0..1]	Text
8.1.3		BuildingNumber	<BldgNb>	[0..1]	Text
8.1.4		PostCode	<PstCd>	[0..1]	Text
8.1.5		TownName	<TwnNm>	[0..1]	Text
8.1.6		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
8.1.7		Country	<Ctry>	[1..1]	Code

8.1.0 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
When this message item is present, one of the following ***AddressType2Code*** *values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

8.1.1 AddressLine <AdrLine>

Presence: [0..5]

Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

8.1.2 StreetName <StrtNm>

Presence: [0..1]

Definition: Name of a street or thoroughfare.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

8.1.3 BuildingNumber <BldgNb>

Presence: [0..1]

Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

8.1.4 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

8.1.5 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

8.1.6 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country eg, state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

8.1.7 Country <Ctry>

Presence: [1..1]

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

9 Securities quantity

9.1 FinancialInstrumentQuantityChoice

FinancialInstrumentQuantityChoice *is used in message* ***BankToCustomerAccountReportV01*** *p.15, message* ***BankToCustomerDebitCreditNotificationV01*** *p.230, message* ***BankToCustomerStatementV01*** *p.122.*

Definition: Choice between formats for the quantity of security.

Type: *One of the following* ***FinancialInstrumentQuantityChoice*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
9.1.0	{Or	Unit	<Unit>	[1..1]	Quantity
9.1.1	Or	FaceAmount	<FaceAmt>	[1..1]	Amount
9.1.2	Or}	AmortisedValue	<AmtsdVal>	[1..1]	Amount

9.1.0 Unit <Unit>

Synonym(s): UNIT (ISO 15022)

Presence: [1..1]

This message item is part of choice ***9.1*** *FinancialInstrumentQuantityChoice.*

Definition: Quantity expressed as a number, eg, a number of shares.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

9.1.1 FaceAmount <FaceAmt>

Presence: [1..1]

This message item is part of choice ***9.1*** *FinancialInstrumentQuantityChoice.*

Definition: Quantity expressed as an amount representing the face amount, ie, the principal, of a debt instrument.

Data Type: ImpliedCurrencyAndAmount

Format: fractionDigits: 5
minInclusive: 0
totalDigits: 18

9.1.2 AmortisedValue <AmtsdVal>

Presence: [1..1]

This message item is part of choice ***9.1*** *FinancialInstrumentQuantityChoice.*

Definition: Quantity expressed as an amount representing the current amortised face amount of a bond, eg, a periodic reduction of a bond's principal amount.

Data Type: ImpliedCurrencyAndAmount

Format: fractionDigits: 5

minInclusive: 0
totalDigits: 18

10 Tax

10.1 TaxInformation2

TaxInformation2 *is used in message* ***BankToCustomerAccountReportV01*** *p.16, message* ***BankToCustomerDebitCreditNotificationV01*** *p.230, message* ***BankToCustomerStatementV01*** *p.123.*

Definition: Details about tax paid, or to be paid, to the government in accordance with the law, including pre-defined parameters such as thresholds and type of account.

Type: *The following* ***TaxInformation2*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
10.1.0		CreditorTaxIdentification	<CdtrTaxId>	[0..1]	Text
10.1.1		CreditorTaxType	<CdtrTaxTp>	[0..1]	Text
10.1.2		DebtorTaxIdentification	<DbtrTaxId>	[0..1]	Text
10.1.3		TaxReferenceNumber	<TaxRefNb>	[0..1]	Text
10.1.4		TotalTaxableBaseAmount	<TtlTaxblBaseAmt>	[0..1]	Amount
10.1.5		TotalTaxAmount	<TtlTaxAmt>	[0..1]	Amount
10.1.6		TaxDate	<TaxDt>	[0..1]	DateTime
10.1.7		TaxTypeInformation	<TaxTpInf>	[0..n]	
10.1.8		CertificateIdentification	<CertId>	[0..1]	Text
10.1.9		TaxType	<TaxTp>	[0..1]	
10.1.10		CategoryDescription	<CtgyDesc>	[0..1]	Text
10.1.11		Rate	<Rate>	[0..1]	Rate
10.1.12		TaxableBaseAmount	<TaxblBaseAmt>	[0..1]	Amount
10.1.13		Amount	<Amt>	[0..1]	Amount

10.1.0 CreditorTaxIdentification <CdtrTaxId>

Presence: [0..1]

Definition: Tax Identification Number of the creditor.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

10.1.1 CreditorTaxType <CdtrTaxTp>

Presence: [0..1]

Definition: Type of tax payer (creditor).

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

10.1.2 DebtorTaxIdentification <DbtrTaxId>

Presence: [0..1]
Definition: Tax Identification Number of the debtor.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

10.1.3 TaxReferenceNumber <TaxRefNb>

Presence: [0..1]
Definition: Tax reference information that is specific to a taxing agency.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

10.1.4 TotalTaxableBaseAmount <TtlTaxblBaseAmt>

Presence: [0..1]
Definition: Total amount of money on which the tax is based.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

10.1.5 TotalTaxAmount <TtlTaxAmt>

Presence: [0..1]
Definition: Amount of money resulting from the calculation of the tax.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

10.1.6 TaxDate <TaxDt>

Presence: [0..1]
Definition: Date by which tax is due.
Data Type: ISODate

10.1.7 TaxTypeInformation <TaxTpInf>

Presence: [0..n]
Definition: Set of characteristics defining the type of tax.
Type: *This message item is composed of the following **TaxDetails** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
10.1.8		CertificateIdentification	<CertId>	[0..1]	Text
10.1.9		TaxType	<TaxTp>	[0..1]	

Rule(s): CertificateIdentificationAndOrTaxTypeRule
If CertificateIdentification is not present, then TaxType is mandatory.
If CertificateIdentification is present, then TaxType is optional.

10.1.8 CertificateIdentification <CertId>

Presence: [0..1]
Definition: Document issued by first agent on behalf of debtor to report withholding tax to taxing authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

10.1.9 TaxType <TaxTp>

Presence: [0..1]
Definition: Information on the type of tax.
Type: *This message item is composed of the following **TaxType** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
10.1.10		CategoryDescription	<CtgyDesc>	[0..1]	Text
10.1.11		Rate	<Rate>	[0..1]	Rate
10.1.12		TaxableBaseAmount	<TaxblBaseAmt>	[0..1]	Amount
10.1.13		Amount	<Amt>	[0..1]	Amount

10.1.10 CategoryDescription <CtgyDesc>

Presence: [0..1]
Definition: Description of the tax that is being paid, including specific representation required by taxing authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

10.1.11 Rate <Rate>

Presence: [0..1]
Definition: Rate used for calculation of the tax.
Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

10.1.12 TaxableBaseAmount <TaxblBaseAmt>

Presence: [0..1]

Definition: Amount of money on which the tax is based.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

10.1.13 Amount <Amt>

Presence: [0..1]

Definition: Amount of money resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

Indexes

Index of Message Items

A

AcceptanceDateTime: <AccptncDtTm>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

Account: <Acct>
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

AccountServicerReference: <AcctSvcrRef>
Message BankToCustomerAccountReportV01 9, 11
Message BankToCustomerStatementV01 116, 118
Message BankToCustomerDebitCreditNotificationV01 223, 225

ActualDate: <ActlDt>
Message BankToCustomerAccountReportV01 8, 9, 9, 12
Message BankToCustomerStatementV01 115, 116, 116, 119
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226

AdditionalEntryInformation: <AddtlNtryInf>
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 231

AdditionalInformation: <AddtlInf>
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

AdditionalInformationIndicator: <AddtlInfInd>
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

AdditionalNotificationInformation: <AddtlNtfctnInf>
Message BankToCustomerDebitCreditNotificationV01 231

AdditionalRemittanceInformation: <AddtlRmtInf>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

AdditionalReportInformation: <AddtlRptInf>
Message BankToCustomerAccountReportV01 16

AdditionalReturnReasonInformation: <AddtlRtrRsnInf>
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

AdditionalStatementInformation: <AddtlStmtInf>
Message BankToCustomerStatementV01 123

AdditionalTransactionInformation: <AddtlTxInf>
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 231

Address: <Adr>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

AddressLine: <AdrLine>
346, 347, 347, 359, 369

AddressType: <AdrTp>
346, 347, 347, 359, 369

Agent: <Agt>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

AlienRegistrationNumber: <AlnRegnNb>
359

AmortisedValue: <AmtsdVal>
371

Amount: <Amt>
339, 372
Message BankToCustomerAccountReportV01 8, 8, 8, 9, 9, 9, 10, 10, 10, 10, 10, 10, 11, 11, 11, 12, 12, 12, 12, 12, 12, 13, 13
Message BankToCustomerStatementV01 115, 115, 115, 116, 116, 116, 117, 117, 117, 117, 117, 117, 118, 118, 119, 119, 119, 119, 119, 119, 119, 120, 120
Message BankToCustomerDebitCreditNotificationV01 223, 223, 224, 224, 224, 224, 224, 225, 225, 225, 225, 226, 226, 226, 226, 226, 226, 227, 227, 227

AmountDetails: <AmtDtls>
Message BankToCustomerAccountReportV01 10, 11
Message BankToCustomerStatementV01 117, 118
Message BankToCustomerDebitCreditNotificationV01 224, 226

AnnouncedPostingAmount: <AnncdPstngAmt>
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119

Message BankToCustomerDebitCreditNotificationV01 224, 226

Availability: <Avlbty>
Message BankToCustomerAccountReportV01 8, 9, 9, 12
Message BankToCustomerStatementV01 115, 116, 116, 119
Message BankToCustomerDebitCreditNotificationV01 223, 223, 226

B

Balance: <Bal>
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115

BankPartyIdentification: <BkPtyId>
359

BankTransactionCode: <BkTxCd>
Message BankToCustomerAccountReportV01 8, 9, 12
Message BankToCustomerStatementV01 116, 116, 119
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226

Batch: <Btch>
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

BBAN: <BBAN>
334, 335

Bearer:
Message BankToCustomerAccountReportV01 11, 13
Message BankToCustomerStatementV01 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

BEI: <BEI>
359

BIC: <BIC>
346, 347, 359

BirthDate: <BirthDt>
359

BookingDate: <BookgDt>
Message BankToCustomerAccountReportV01 9
Message BankToCustomerStatementV01 116
Message BankToCustomerDebitCreditNotificationV01 223

BoundaryAmount: <BdryAmt>
339, 339, 339, 339

BranchIdentification: <BrnchId>

347

BuildingNumber: <BldgNb>
346, 347, 347, 359, 369

C

CategoryDescription: <CtgyDesc>
372

CertificateIdentification: <CertId>
372

Charges: <Chrgs>
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 225, 227

ChequeNumber: <ChqNb>
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

CHIPSUniversalIdentification: <USCHU>
359

CityOfBirth: <CityOfBirth>
359

ClearingSystemMemberIdentification: <ClrSysMmbId>
346, 347

ClearingSystemReference: <ClrSysRef>
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

Code: <Cd>
335
Message BankToCustomerAccountReportV01 7, 7, 8, 9, 9, 9, 9, 9, 10, 10, 11, 12, 12, 12, 12, 13, 14, 14, 15, 16, 16, 16, 16, 16
Message BankToCustomerStatementV01 114, 114, 115, 116, 116, 116, 116, 116, 117, 117, 118, 119, 119, 119, 120, 120, 121, 121, 122, 123, 123, 123, 123, 123
Message BankToCustomerDebitCreditNotificationV01 222, 223, 223, 223, 224, 224, 224, 225, 225, 226, 227, 227, 227, 227, 228, 229, 229, 230, 230, 230, 230, 230

CombinedIdentification: <CmbndId>
346

CommissionWaiverIndicator: <ComssnWvrInd>
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117

Message BankToCustomerDebitCreditNotificationV01 224

ContractIdentification: <CtrctId>
343

CopyDuplicateIndicator: <CpyDplctInd>
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

CorporateAction: <CorpActn>
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

CounterValueAmount: <CntrValAmt>
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 224, 226

Country: <Ctry>
346, 347, 347, 359, 369

CountryOfBirth: <CtryOfBirth>
359

CountryOfResidence: <CtryOfRes>
360

CountrySubDivision: <CtrySubDvsn>
346, 347, 347, 359, 369

CreationDateTime: <CreDtTm>
Message BankToCustomerAccountReportV01 6, 7
Message BankToCustomerStatementV01 113, 114
Message BankToCustomerDebitCreditNotificationV01 222, 222

CreditDebitIndicator: <CdtDbtInd>
339
Message BankToCustomerAccountReportV01 8, 8, 8, 8, 9, 9, 9, 11, 12, 13
Message BankToCustomerStatementV01 115, 115, 115, 116, 116, 116, 116, 118, 119, 120
Message BankToCustomerDebitCreditNotificationV01 222, 223, 223, 223, 224, 225, 226, 227

CreditLine: <CdtLine>
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115

CreditNoteAmount: <CdtNoteAmt>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

Creditor: <Cdtr>
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 228

CreditorAccount: <CdtrAcct>
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 228

CreditorAgent: <CdtrAgt>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

CreditorReference: <CdtrRef>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

CreditorReferenceInformation: <CdtrRefInf>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

CreditorReferenceType: <CdtrRefTp>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

CreditorTaxIdentification: <CdtrTaxId>
372

CreditorTaxType: <CdtrTaxTp>
372

Currency: <Ccy>
335, 339
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

CurrencyExchange: <CcyXchg>
Message BankToCustomerAccountReportV01 10, 10, 10, 10, 10, 12, 12, 12, 12, 12
Message BankToCustomerStatementV01 117, 117, 117, 117, 117, 119, 119, 119, 119, 119
Message BankToCustomerDebitCreditNotificationV01 224, 224, 224, 224, 225, 226, 226, 226, 226, 226

CustomerNumber: <CstmrNb>
359

D

Date: <Dt>
345
Message BankToCustomerAccountReportV01 8, 8, 9, 9, 12, 15
Message BankToCustomerStatementV01 115, 115, 116, 116, 119, 122
Message BankToCustomerDebitCreditNotificationV01 223, 223, 226, 229

DateAndPlaceOfBirth: <DtAndPlcOfBirth>
359

DateTime: <DtTm>
345
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

DealPrice: <DealPric>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

Debtor: <Dbtr>
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 227

DebtorAccount: <DbtrAcct>
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 228

DebtorAgent: <DbtrAgt>
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

DebtorTaxIdentification: <DbtrTaxId>
372

DeliveringAgent: <DlvrgAgt>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

DiscountAppliedAmount: <DscntApldAmt>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

Domain: <Domn>
Message BankToCustomerAccountReportV01 9, 9, 12, 16

Message BankToCustomerStatementV01 116, 116, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226, 230

DriversLicenseNumber: <DrvrsLicNb>
359

DuePayableAmount: <DuePyblAmt>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

DUNS: <DUNS>
359

E

EANGLN: <EANGLN>
359

ElectronicSequenceNumber: <ElctrncSeqNb>
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

EmployerIdentificationNumber: <MplyrIdNb>
359

EndDate: <EndDt>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

EndToEndIdentification: <EndToEndId>
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

Entry: <Ntry>
Message BankToCustomerAccountReportV01 9
Message BankToCustomerStatementV01 116
Message BankToCustomerDebitCreditNotificationV01 223

EqualAmount: <EQAmt>
339

ExchangeRate: <XchgRate>
343

F

FaceAmount: <FaceAmt>

371

Family: <Fmly>
Message BankToCustomerAccountReportV01 9, 9, 12, 16
Message BankToCustomerStatementV01 116, 116, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226, 230

FinancialInstitutionIdentification: <FinInstnId>
346

FinancialInstrumentIdentification: <FinInstrmId>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

FromAmount: <FrAmt>
339, 339

FromDateTime: <FrDtTm>
345

FromToAmount: <FrToAmt>
339

FromToDate: <FrToDt>
Message BankToCustomerAccountReportV01 7, 7, 11, 13
Message BankToCustomerStatementV01 114, 115, 118, 120
Message BankToCustomerDebitCreditNotificationV01 222, 225, 227

G

GroupHeader: <GrpHdr>
Message BankToCustomerAccountReportV01 6
Message BankToCustomerStatementV01 113
Message BankToCustomerDebitCreditNotificationV01 221

I

IBAN: <IBAN>
334, 335

IBEI: <IBEI>
359

Identification: <Id>
334, 335, 335, 346, 346, 347, 347, 347, 359, 359, 360
Message BankToCustomerAccountReportV01 7, 7, 11, 13, 16
Message BankToCustomerStatementV01 114, 114, 118, 120, 123
Message BankToCustomerDebitCreditNotificationV01 222, 222, 225, 227, 230

IdentificationType: <IdTp>

360

IdentityCardNumber: <IdntyCardNb>
359

Included: <Incl>
339, 339, 339, 339
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115

InitiatingParty: <InitgPty>
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 227

InstructedAmount: <InstdAmt>
Message BankToCustomerAccountReportV01 10, 11
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 224, 226

InstructionIdentification: <InstrId>
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 225

InterbankSettlementDate: <IntrBkSttlmDt>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

Interest: <Intrst>
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

IntermediaryAgent1: <IntrmyAgt1>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

IntermediaryAgent2: <IntrmyAgt2>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

IntermediaryAgent3: <IntrmyAgt3>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

Invoicee: <Invcee>
Message BankToCustomerAccountReportV01 15

Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

Invoicer: <Invcr>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

ISIN: <ISIN>
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

Issuer: <Issr>
346, 347, 359, 360
Message BankToCustomerAccountReportV01 9, 10, 12, 14, 15, 16
Message BankToCustomerStatementV01 116, 117, 119, 121, 122, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 227, 229, 229, 230

IssuingAgent: <IssgAgt>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

L

LastPageIndicator: <LastPgInd>
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

LegalSequenceNumber: <LglSeqNb>
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

M

MandateIdentification: <MndtId>
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

MessageIdentification: <MsgId>
Message BankToCustomerAccountReportV01 6, 10, 10, 11
Message BankToCustomerStatementV01 113, 117, 117, 118
Message BankToCustomerDebitCreditNotificationV01 221, 224, 224, 225

MessageNameIdentification: <MsgNmId>
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117

Message BankToCustomerDebitCreditNotificationV01 224

MessagePagination: <MsgPgntn>
Message BankToCustomerAccountReportV01 6
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

MessageRecipient: <MsgRcpt>
Message BankToCustomerAccountReportV01 6
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

N

Name: <Nm>
335, 346, 347, 347, 358
Message BankToCustomerAccountReportV01 7, 14
Message BankToCustomerStatementV01 114, 121
Message BankToCustomerDebitCreditNotificationV01 222, 228

NameAndAddress: <NmAndAdr>
346

NotEqualAmount: <NEQAmt>
339

Notification: <Ntfctn>
Message BankToCustomerDebitCreditNotificationV01 222

Number: <Nb>
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

NumberOfDays: <NbOfDays>
Message BankToCustomerAccountReportV01 8, 9, 9, 12
Message BankToCustomerStatementV01 115, 116, 116, 119
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226

NumberOfEntries: <NbOfNtries>
Message BankToCustomerAccountReportV01 8, 8, 8, 8
Message BankToCustomerStatementV01 115, 115, 115, 115
Message BankToCustomerDebitCreditNotificationV01 222, 222, 223, 223

NumberOfTransactions: <NbOfTxs>
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

O

OrganisationIdentification: <OrgId>
359

OriginalBankTransactionCode: <OrgnlBkTxCd>
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

OtherIdentification: <OthrId>
360

Owner: <Ownr>
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

P

PageNumber: <PgNb>
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

Party: <Pty>
Message BankToCustomerAccountReportV01 11, 13, 13
Message BankToCustomerStatementV01 118, 120, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227, 228

PassportNumber: <PsptNb>
359

PaymentInformationIdentification: <PmtInfId>
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

PercentageRate: <PctgRate>
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

PostalAddress: <PstlAdr>
346, 347, 347, 359

PostCode: <PstCd>
346, 347, 347, 359, 369

Price: <Pric>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122

Message BankToCustomerDebitCreditNotificationV01 230

PrivateIdentification: <PrvtId>
359

Proprietary: <Prtry>
335, 346, 347
Message BankToCustomerAccountReportV01 7, 7, 8, 9, 9, 11, 11, 12, 13, 13, 14, 14, 14, 15, 15, 15, 15, 16, 16, 16, 16
Message BankToCustomerStatementV01 114, 114, 115, 116, 117, 118, 118, 119, 120, 120, 121, 121, 121, 122, 122, 122, 122, 123, 123, 123, 123
Message BankToCustomerDebitCreditNotificationV01 222, 223, 224, 225, 226, 227, 227, 228, 228, 228, 229, 229, 229, 230, 230, 230, 230, 230, 231

ProprietaryAccount: <PrtryAcct>
334, 335

ProprietaryAmount: <PrtryAmt>
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 224, 226

ProprietaryCode: <PrtryCd>
Message BankToCustomerAccountReportV01 10, 13
Message BankToCustomerStatementV01 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

ProprietaryIdentification: <PrtryId>
346, 347, 359

ProvinceOfBirth: <PrvcOfBirth>
359

Purpose: <Purp>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

Q

Quantity: <Qty>
Message BankToCustomerAccountReportV01 15, 15
Message BankToCustomerStatementV01 122, 123
Message BankToCustomerDebitCreditNotificationV01 230, 230

QuotationDate: <QtnDt>
343

R

Rate: <Rate>

372
Message BankToCustomerAccountReportV01 7, 7, 10, 11, 11, 11, 13, 13, 13, 13
Message BankToCustomerStatementV01 114, 114, 118, 118, 118, 118, 120, 120, 120, 120
Message BankToCustomerDebitCreditNotificationV01 225, 225, 225, 225, 227, 227, 227, 227

Reason: <Rsn>
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 115, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

ReceivingAgent: <RcvgAgt>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

Reference: <Ref>
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

References: <Refs>
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 225

ReferredDocumentAmount: <RfrdDocAmt>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

ReferredDocumentInformation: <RfrdDocInf>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

ReferredDocumentNumber: <RfrdDocNb>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

ReferredDocumentRelatedDate: <RfrdDocRltdDt>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

ReferredDocumentType: <RfrdDocTp>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

RelatedAccount: <RltdAcct>
Message BankToCustomerAccountReportV01 7

Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

RelatedAgents: <RltdAgts>
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

RelatedDates: <RltdDts>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

RelatedParties: <RltdPties>
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 227

RelatedPrice: <RltdPric>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

RelatedQuantities: <RltdQties>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

RelatedRemittanceInformation: <RltdRmtInf>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

RemittanceIdentification: <RmtId>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

RemittanceInformation: <RmtInf>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

RemittanceLocationElectronicAddress: <RmtLctnElctrncAdr>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

RemittanceLocationMethod: <RmtLctnMtd>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

RemittanceLocationPostalAddress: <RmtLctnPstlAdr>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

RemittedAmount: <RmtdAmt>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

Report: <Rpt>
Message BankToCustomerAccountReportV01 7

ReturnInformation: <RtrInf>
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

ReturnOriginator: <RtrOrgtr>
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

ReturnReason: <RtrRsn>
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

ReversalIndicator: <RvslInd>
Message BankToCustomerAccountReportV01 9
Message BankToCustomerStatementV01 116
Message BankToCustomerDebitCreditNotificationV01 223

S

SafekeepingAccount: <SfkpgAcct>
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 231

Servicer: <Svcr>
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

SettlementPlace: <SttlmPlc>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

SocialSecurityNumber: <SclSctyNb>

359

SourceCurrency: <SrcCcy>
343

StartDate: <StartDt>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

Statement: <Stmt>
Message BankToCustomerStatementV01 114

Status: <Sts>
Message BankToCustomerAccountReportV01 9
Message BankToCustomerStatementV01 116
Message BankToCustomerDebitCreditNotificationV01 223

StreetName: <StrtNm>
346, 347, 347, 359, 369

Structured: <Strd>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

SubFamilyCode: <SubFmlyCd>
Message BankToCustomerAccountReportV01 9, 9, 12, 16
Message BankToCustomerStatementV01 116, 117, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 227, 230

Sum: <Sum>
Message BankToCustomerAccountReportV01 8, 8, 8, 8
Message BankToCustomerStatementV01 115, 115, 115, 115
Message BankToCustomerDebitCreditNotificationV01 222, 223, 223, 223

T

TargetCurrency: <TrgtCcy>
343

Tax: <Tax>
Message BankToCustomerAccountReportV01 11, 13, 16
Message BankToCustomerStatementV01 118, 120, 123
Message BankToCustomerDebitCreditNotificationV01 225, 227, 230

TaxableBaseAmount: <TaxblBaseAmt>
372

TaxAmount: <TaxAmt>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122

Message BankToCustomerDebitCreditNotificationV01 229

TaxDate: <TaxDt>
372

TaxIdentificationNumber: <TaxIdNb>
359, 359

TaxReferenceNumber: <TaxRefNb>
372

TaxType: <TaxTp>
372

TaxTypeInformation: <TaxTpInf>
372

TextualRate: <TxtlRate>
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

ToAmount: <ToAmt>
339, 339

ToDateTime: <ToDtTm>
345

TotalChargesAndTaxAmount: <TtlChrgsAndTaxAmt>
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 225, 227

TotalCreditEntries: <TtlCdtNtries>
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 222

TotalDebitEntries: <TtlDbtNtries>
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 223

TotalEntries: <TtlNtries>
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 222

TotalEntriesPerBankTransactionCode: <TtlNtriesPerBkTxCd>
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 223

TotalNetEntryAmount: <TtlNetNtryAmt>
Message BankToCustomerAccountReportV01 8, 8
Message BankToCustomerStatementV01 115, 115
Message BankToCustomerDebitCreditNotificationV01 222, 223

TotalTaxableBaseAmount: <TtlTaxblBaseAmt>
372

TotalTaxAmount: <TtlTaxAmt>
372

TownName: <TwnNm>
346, 347, 347, 359, 369

TradeDate: <TradDt>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

TradingParty: <TradgPty>
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 228

TransactionAmount: <TxAmt>
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 224, 226

TransactionDateTime: <TxDtTm>
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

TransactionDetails: <TxDtls>
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 225

TransactionIdentification: <TxId>
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

TransactionsSummary: <TxsSummry>
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 222

Type: <Tp>
335

Message BankToCustomerAccountReportV01 7, 7, 8, 10, 10, 11, 11, 12, 12, 13, 13, 14, 15, 15, 15, 16
Message BankToCustomerStatementV01 114, 114, 115, 117, 117, 118, 118, 119, 120, 120, 120, 121, 122, 122, 122, 123
Message BankToCustomerDebitCreditNotificationV01 222, 225, 225, 225, 226, 226, 227, 227, 228, 228, 229, 230, 230, 230

U

UltimateCreditor: <UltmtCdtr>
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 228

UltimateDebtor: <UltmtDbtr>
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 228

Unit: <Unit>
371

UnitCurrency: <UnitCcy>
343

Unstructured: <Ustrd>
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

UPIC: <UPIC>
334, 335

V

ValidityRange: <VldtyRg>
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

ValueDate: <ValDt>
Message BankToCustomerAccountReportV01 9
Message BankToCustomerStatementV01 116
Message BankToCustomerDebitCreditNotificationV01 223

Index of XML tags

A

<AccptncDtTm>: AcceptanceDateTime
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122

Message BankToCustomerDebitCreditNotificationV01 229

<Acct>: Account
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

<AcctSvcrRef>: AccountServicerReference
Message BankToCustomerAccountReportV01 9, 11
Message BankToCustomerStatementV01 116, 118
Message BankToCustomerDebitCreditNotificationV01 223, 225

<ActlDt>: ActualDate
Message BankToCustomerAccountReportV01 8, 9, 9, 12
Message BankToCustomerStatementV01 115, 116, 116, 119
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226

<AddtlInf>: AdditionalInformation
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

<AddtlInfInd>: AdditionalInformationIndicator
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

<AddtlNtfctnInf>: AdditionalNotificationInformation
Message BankToCustomerDebitCreditNotificationV01 231

<AddtlNtryInf>: AdditionalEntryInformation
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 231

<AddtlRmtInf>: AdditionalRemittanceInformation
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<AddtlRptInf>: AdditionalReportInformation
Message BankToCustomerAccountReportV01 16

<AddtlRtrRsnInf>: AdditionalReturnReasonInformation
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

<AddtlStmtInf>: AdditionalStatementInformation
Message BankToCustomerStatementV01 123

<AddtlTxInf>: AdditionalTransactionInformation

Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 231

<Adr>: Address
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<AdrLine>: AddressLine
346, 347, 347, 359, 369

<AdrTp>: AddressType
346, 347, 347, 359, 369

<Agt>: Agent
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<AlnRegnNb>: AlienRegistrationNumber
359

<Amt>: Amount
339, 372
Message BankToCustomerAccountReportV01 8, 8, 8, 9, 9, 9, 10, 10, 10, 10, 10, 10, 11, 11, 11, 12, 12, 12, 12, 12, 12, 13, 13
Message BankToCustomerStatementV01 115, 115, 115, 116, 116, 116, 117, 117, 117, 117, 117, 117, 118, 118, 119, 119, 119, 119, 119, 119, 119, 120, 120
Message BankToCustomerDebitCreditNotificationV01 223, 223, 224, 224, 224, 224, 224, 225, 225, 225, 225, 226, 226, 226, 226, 226, 226, 227, 227, 227

<AmtDtls>: AmountDetails
Message BankToCustomerAccountReportV01 10, 11
Message BankToCustomerStatementV01 117, 118
Message BankToCustomerDebitCreditNotificationV01 224, 226

<AmtsdVal>: AmortisedValue
371

<AnncdPstngAmt>: AnnouncedPostingAmount
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 224, 226

<Avlbty>: Availability
Message BankToCustomerAccountReportV01 8, 9, 9, 12
Message BankToCustomerStatementV01 115, 116, 116, 119
Message BankToCustomerDebitCreditNotificationV01 223, 223, 226

B

<Bal>: Balance
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115

<BBAN>: BBAN
334, 335

<BdryAmt>: BoundaryAmount
339, 339, 339, 339

<BEI>: BEI
359

<BIC>: BIC
346, 347, 359

<BirthDt>: BirthDate
359

<BkPtyId>: BankPartyIdentification
359

<BkTxCd>: BankTransactionCode
Message BankToCustomerAccountReportV01 8, 9, 12
Message BankToCustomerStatementV01 116, 116, 119
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226

<BldgNb>: BuildingNumber
346, 347, 347, 359, 369

<BookgDt>: BookingDate
Message BankToCustomerAccountReportV01 9
Message BankToCustomerStatementV01 116
Message BankToCustomerDebitCreditNotificationV01 223

: Bearer
Message BankToCustomerAccountReportV01 11, 13
Message BankToCustomerStatementV01 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

<BrnchId>: BranchIdentification
347

<Btch>: Batch
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

C

<Ccy>: Currency
335, 339
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

<CcyXchg>: CurrencyExchange
Message BankToCustomerAccountReportV01 10, 10, 10, 10, 10, 12, 12, 12, 12, 12
Message BankToCustomerStatementV01 117, 117, 117, 117, 117, 119, 119, 119, 119, 119
Message BankToCustomerDebitCreditNotificationV01 224, 224, 224, 224, 225, 226, 226, 226, 226, 226

<Cd>: Code
335
Message BankToCustomerAccountReportV01 7, 7, 8, 9, 9, 9, 9, 9, 10, 10, 11, 12, 12, 12, 12, 13, 14, 14, 15, 16, 16, 16, 16, 16
Message BankToCustomerStatementV01 114, 114, 115, 116, 116, 116, 116, 116, 117, 117, 118, 119, 119, 119, 120, 120, 121, 121, 122, 123, 123, 123, 123, 123
Message BankToCustomerDebitCreditNotificationV01 222, 223, 223, 223, 224, 224, 224, 225, 225, 226, 227, 227, 227, 227, 228, 229, 229, 230, 230, 230, 230, 230

<CdtDbtInd>: CreditDebitIndicator
339
Message BankToCustomerAccountReportV01 8, 8, 8, 8, 9, 9, 9, 11, 12, 13
Message BankToCustomerStatementV01 115, 115, 115, 116, 116, 116, 116, 118, 119, 120
Message BankToCustomerDebitCreditNotificationV01 222, 223, 223, 223, 224, 225, 226, 227

<CdtLine>: CreditLine
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115

<CdtNoteAmt>: CreditNoteAmount
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<Cdtr>: Creditor
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 228

<CdtrAcct>: CreditorAccount
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 228

<CdtrAgt>: CreditorAgent
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<CdtrRef>: CreditorReference
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<CdtrRefInf>: CreditorReferenceInformation
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<CdtrRefTp>: CreditorReferenceType
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<CdtrTaxId>: CreditorTaxIdentification
372

<CdtrTaxTp>: CreditorTaxType
372

<CertId>: CertificateIdentification
372

<ChqNb>: ChequeNumber
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

<Chrgs>: Charges
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 225, 227

<CityOfBirth>: CityOfBirth
359

<ClrSysMmbId>: ClearingSystemMemberIdentification
346, 347

<ClrSysRef>: ClearingSystemReference
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

<CmbndId>: CombinedIdentification
346

<CntrValAmt>: CounterValueAmount
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 224, 226

<ComssnWvrInd>: CommissionWaiverIndicator
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

<CorpActn>: CorporateAction
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

<CpyDplctInd>: CopyDuplicateIndicator
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

<CreDtTm>: CreationDateTime
Message BankToCustomerAccountReportV01 6, 7
Message BankToCustomerStatementV01 113, 114
Message BankToCustomerDebitCreditNotificationV01 222, 222

<CstmrNb>: CustomerNumber
359

<CtgyDesc>: CategoryDescription
372

<CtrctId>: ContractIdentification
343

<Ctry>: Country
346, 347, 347, 359, 369

<CtryOfBirth>: CountryOfBirth
359

<CtryOfRes>: CountryOfResidence
360

<CtrySubDvsn>: CountrySubDivision
346, 347, 347, 359, 369

D

<Dbtr>: Debtor
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 227

<DbtrAcct>: DebtorAccount
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120

Message BankToCustomerDebitCreditNotificationV01 228

<DbtrAgt>: DebtorAgent
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<DbtrTaxId>: DebtorTaxIdentification
372

<DealPric>: DealPrice
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

<DlvrgAgt>: DeliveringAgent
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<Domn>: Domain
Message BankToCustomerAccountReportV01 9, 9, 12, 16
Message BankToCustomerStatementV01 116, 116, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226, 230

<DrvrsLicNb>: DriversLicenseNumber
359

<DscntApldAmt>: DiscountAppliedAmount
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<Dt>: Date
345
Message BankToCustomerAccountReportV01 8, 8, 9, 9, 12, 15
Message BankToCustomerStatementV01 115, 115, 116, 116, 119, 122
Message BankToCustomerDebitCreditNotificationV01 223, 223, 226, 229

<DtAndPlcOfBirth>: DateAndPlaceOfBirth
359

<DtTm>: DateTime
345
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<DuePyblAmt>: DuePayableAmount
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<DUNS>: DUNS
359

E

<EANGLN>: EANGLN
359

<ElctrncSeqNb>: ElectronicSequenceNumber
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

<EndDt>: EndDate
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<EndToEndId>: EndToEndIdentification
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

<EQAmt>: EqualAmount
339

F

<FaceAmt>: FaceAmount
371

<FinInstnId>: FinancialInstitutionIdentification
346

<FinInstrmId>: FinancialInstrumentIdentification
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

<Fmly>: Family
Message BankToCustomerAccountReportV01 9, 9, 12, 16
Message BankToCustomerStatementV01 116, 116, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226, 230

<FrAmt>: FromAmount
339, 339

<FrDtTm>: FromDateTime
345

<FrToAmt>: FromToAmount
339

<FrToDt>: FromToDate
Message BankToCustomerAccountReportV01 7, 7, 11, 13
Message BankToCustomerStatementV01 114, 115, 118, 120
Message BankToCustomerDebitCreditNotificationV01 222, 225, 227

G

<GrpHdr>: GroupHeader
Message BankToCustomerAccountReportV01 6
Message BankToCustomerStatementV01 113
Message BankToCustomerDebitCreditNotificationV01 221

I

<IBAN>: IBAN
334, 335

<IBEI>: IBEI
359

<Id>: Identification
334, 335, 335, 346, 346, 347, 347, 347, 359, 359, 360
Message BankToCustomerAccountReportV01 7, 7, 11, 13, 16
Message BankToCustomerStatementV01 114, 114, 118, 120, 123
Message BankToCustomerDebitCreditNotificationV01 222, 222, 225, 227, 230

<IdntyCardNb>: IdentityCardNumber
359

<IdTp>: IdentificationType
360

<Incl>: Included
339, 339, 339, 339
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115

<InitgPty>: InitiatingParty
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 227

<InstdAmt>: InstructedAmount
Message BankToCustomerAccountReportV01 10, 11
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 224, 226

<InstrId>: InstructionIdentification

Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 225

<IntrBkSttlmDt>: InterbankSettlementDate
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<IntrmyAgt1>: IntermediaryAgent1
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<IntrmyAgt2>: IntermediaryAgent2
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<IntrmyAgt3>: IntermediaryAgent3
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<Intrst>: Interest
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

<Invcee>: Invoicee
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<Invcr>: Invoicer
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<ISIN>: ISIN
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

<IssgAgt>: IssuingAgent
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<Issr>: Issuer
346, 347, 359, 360
Message BankToCustomerAccountReportV01 9, 10, 12, 14, 15, 16

Message BankToCustomerStatementV01 116, 117, 119, 121, 122, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 227, 229, 229, 230

L

<LastPgInd>: LastPageIndicator
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

<LglSeqNb>: LegalSequenceNumber
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

M

<MndtId>: MandateIdentification
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

<MplyrIdNb>: EmployerIdentificationNumber
359

<MsgId>: MessageIdentification
Message BankToCustomerAccountReportV01 6, 10, 10, 11
Message BankToCustomerStatementV01 113, 117, 117, 118
Message BankToCustomerDebitCreditNotificationV01 221, 224, 224, 225

<MsgNmId>: MessageNameIdentification
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

<MsgPgntn>: MessagePagination
Message BankToCustomerAccountReportV01 6
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

<MsgRcpt>: MessageRecipient
Message BankToCustomerAccountReportV01 6
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

N

<Nb>: Number
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

<NbOfDays>: NumberOfDays
Message BankToCustomerAccountReportV01 8, 9, 9, 12
Message BankToCustomerStatementV01 115, 116, 116, 119
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226

<NbOfNtries>: NumberOfEntries
Message BankToCustomerAccountReportV01 8, 8, 8, 8
Message BankToCustomerStatementV01 115, 115, 115, 115
Message BankToCustomerDebitCreditNotificationV01 222, 222, 223, 223

<NbOfTxs>: NumberOfTransactions
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

<NEQAmt>: NotEqualAmount
339

<Nm>: Name
335, 346, 347, 347, 358
Message BankToCustomerAccountReportV01 7, 14
Message BankToCustomerStatementV01 114, 121
Message BankToCustomerDebitCreditNotificationV01 222, 228

<NmAndAdr>: NameAndAddress
346

<Ntfctn>: Notification
Message BankToCustomerDebitCreditNotificationV01 222

<Ntry>: Entry
Message BankToCustomerAccountReportV01 9
Message BankToCustomerStatementV01 116
Message BankToCustomerDebitCreditNotificationV01 223

O

<OrgId>: OrganisationIdentification
359

<OrgnlBkTxCd>: OriginalBankTransactionCode
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

<OthrId>: OtherIdentification
360

<Ownr>: Owner
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114

Message BankToCustomerDebitCreditNotificationV01 222

P

<PctgRate>: PercentageRate
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

<PgNb>: PageNumber
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

<PmtInfId>: PaymentInformationIdentification
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

<Pric>: Price
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

<Prtry>: Proprietary
335, 346, 347
Message BankToCustomerAccountReportV01 7, 7, 8, 9, 9, 11, 11, 12, 13, 13, 14, 14, 14, 15, 15, 15, 15, 16, 16, 16, 16
Message BankToCustomerStatementV01 114, 114, 115, 116, 117, 118, 118, 119, 120, 120, 121, 121, 121, 122, 122, 122, 122, 123, 123, 123, 123
Message BankToCustomerDebitCreditNotificationV01 222, 223, 224, 225, 226, 227, 227, 228, 228, 228, 229, 229, 229, 230, 230, 230, 230, 230, 231

<PrtryAcct>: ProprietaryAccount
334, 335

<PrtryAmt>: ProprietaryAmount
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 224, 226

<PrtryCd>: ProprietaryCode
Message BankToCustomerAccountReportV01 10, 13
Message BankToCustomerStatementV01 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

<PrtryId>: ProprietaryIdentification
346, 347, 359

<PrvcOfBirth>: ProvinceOfBirth
359

<PrvtId>: PrivateIdentification
359

<PsptNb>: PassportNumber
359

<PstCd>: PostCode
346, 347, 347, 359, 369

<PstlAdr>: PostalAddress
346, 347, 347, 359

<Pty>: Party
Message BankToCustomerAccountReportV01 11, 13, 13
Message BankToCustomerStatementV01 118, 120, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227, 228

<Purp>: Purpose
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

Q

<QtnDt>: QuotationDate
343

<Qty>: Quantity
Message BankToCustomerAccountReportV01 15, 15
Message BankToCustomerStatementV01 122, 123
Message BankToCustomerDebitCreditNotificationV01 230, 230

R

<Rate>: Rate
372
Message BankToCustomerAccountReportV01 7, 7, 10, 11, 11, 11, 13, 13, 13, 13
Message BankToCustomerStatementV01 114, 114, 118, 118, 118, 118, 120, 120, 120, 120
Message BankToCustomerDebitCreditNotificationV01 225, 225, 225, 225, 227, 227, 227, 227

<RcvgAgt>: ReceivingAgent
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<Ref>: Reference
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

<Refs>: References

Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 225

<RfrdDocAmt>: ReferredDocumentAmount
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

<RfrdDocInf>: ReferredDocumentInformation
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

<RfrdDocNb>: ReferredDocumentNumber
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

<RfrdDocRltdDt>: ReferredDocumentRelatedDate
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

<RfrdDocTp>: ReferredDocumentType
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

<RltdAcct>: RelatedAccount
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

<RltdAgts>: RelatedAgents
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<RltdDts>: RelatedDates
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<RltdPric>: RelatedPrice
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

<RltdPties>: RelatedParties
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120

Message BankToCustomerDebitCreditNotificationV01 227

<RltdQties>: RelatedQuantities
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

<RltdRmtInf>: RelatedRemittanceInformation
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<RmtdAmt>: RemittedAmount
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<RmtId>: RemittanceIdentification
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<RmtInf>: RemittanceInformation
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<RmtLctnElctrncAdr>: RemittanceLocationElectronicAddress
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<RmtLctnMtd>: RemittanceLocationMethod
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<RmtLctnPstlAdr>: RemittanceLocationPostalAddress
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<Rpt>: Report
Message BankToCustomerAccountReportV01 7

<Rsn>: Reason
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 115, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

<RtrInf>: ReturnInformation
Message BankToCustomerAccountReportV01 16

Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

<RtrOrgtr>: ReturnOriginator
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

<RtrRsn>: ReturnReason
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

<RvslInd>: ReversalIndicator
Message BankToCustomerAccountReportV01 9
Message BankToCustomerStatementV01 116
Message BankToCustomerDebitCreditNotificationV01 223

S

<SclSctyNb>: SocialSecurityNumber
359

<SfkpgAcct>: SafekeepingAccount
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 231

<SrcCcy>: SourceCurrency
343

<StartDt>: StartDate
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<Stmt>: Statement
Message BankToCustomerStatementV01 114

<Strd>: Structured
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

<StrtNm>: StreetName
346, 347, 347, 359, 369

<Sts>: Status
Message BankToCustomerAccountReportV01 9
Message BankToCustomerStatementV01 116
Message BankToCustomerDebitCreditNotificationV01 223

<SttlmPlc>: SettlementPlace
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

<SubFmlyCd>: SubFamilyCode
Message BankToCustomerAccountReportV01 9, 9, 12, 16
Message BankToCustomerStatementV01 116, 117, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 227, 230

<Sum>: Sum
Message BankToCustomerAccountReportV01 8, 8, 8, 8
Message BankToCustomerStatementV01 115, 115, 115, 115
Message BankToCustomerDebitCreditNotificationV01 222, 223, 223, 223

<Svcr>: Servicer
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

T

<Tax>: Tax
Message BankToCustomerAccountReportV01 11, 13, 16
Message BankToCustomerStatementV01 118, 120, 123
Message BankToCustomerDebitCreditNotificationV01 225, 227, 230

<TaxAmt>: TaxAmount
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<TaxblBaseAmt>: TaxableBaseAmount
372

<TaxDt>: TaxDate
372

<TaxIdNb>: TaxIdentificationNumber
359, 359

<TaxRefNb>: TaxReferenceNumber
372

<TaxTp>: TaxType
372

<TaxTpInf>: TaxTypeInformation
372

<ToAmt>: ToAmount
339, 339

<ToDtTm>: ToDateTime
345

<Tp>: Type
335
Message BankToCustomerAccountReportV01 7, 7, 8, 10, 10, 11, 11, 12, 12, 13, 13, 14, 15, 15, 15, 16
Message BankToCustomerStatementV01 114, 114, 115, 117, 117, 118, 118, 119, 120, 120, 120, 121, 122, 122, 122, 123
Message BankToCustomerDebitCreditNotificationV01 222, 225, 225, 225, 226, 226, 227, 227, 228, 228, 229, 230, 230, 230

<TradDt>: TradeDate
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<TradgPty>: TradingParty
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 228

<TrgtCcy>: TargetCurrency
343

<TtlCdtNtries>: TotalCreditEntries
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 222

<TtlChrgsAndTaxAmt>: TotalChargesAndTaxAmount
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 225, 227

<TtlDbtNtries>: TotalDebitEntries
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 223

<TtlNetNtryAmt>: TotalNetEntryAmount
Message BankToCustomerAccountReportV01 8, 8
Message BankToCustomerStatementV01 115, 115
Message BankToCustomerDebitCreditNotificationV01 222, 223

<TtlNtries>: TotalEntries
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 222

<TtlNtriesPerBkTxCd>: TotalEntriesPerBankTransactionCode
Message BankToCustomerAccountReportV01 8

Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 223

<TtlTaxAmt>: TotalTaxAmount
372

<TtlTaxblBaseAmt>: TotalTaxableBaseAmount
372

<TwnNm>: TownName
346, 347, 347, 359, 369

<TxAmt>: TransactionAmount
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 224, 226

<TxDtls>: TransactionDetails
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 225

<TxDtTm>: TransactionDateTime
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

<TxId>: TransactionIdentification
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

<TxsSummry>: TransactionsSummary
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 222

<TxtlRate>: TextualRate
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

U

<UltmtCdtr>: UltimateCreditor
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 228

<UltmtDbtr>: UltimateDebtor
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120

Message BankToCustomerDebitCreditNotificationV01 228

<Unit>: Unit
371

<UnitCcy>: UnitCurrency
343

<UPIC>: UPIC
334, 335

<USCHU>: CHIPSUniversalIdentification
359

<Ustrd>: Unstructured
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

V

<ValDt>: ValueDate
Message BankToCustomerAccountReportV01 9
Message BankToCustomerStatementV01 116
Message BankToCustomerDebitCreditNotificationV01 223

<VldtyRg>: ValidityRange
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

X

<XchgRate>: ExchangeRate
343

Index of Message Item Types

A

AccountIdentification3Choice
333, 335
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

AccountInterest1
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114

AccountNotification1

Message BankToCustomerDebitCreditNotificationV01 222

AccountReport9
Message BankToCustomerAccountReportV01 7

AccountStatement1
Message BankToCustomerStatementV01 114

AddressType2Code
346, 347, 347, 359, 369

AlternateSecurityIdentification2
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

AmountAndCurrencyExchange2
Message BankToCustomerAccountReportV01 10, 11
Message BankToCustomerStatementV01 117, 118
Message BankToCustomerDebitCreditNotificationV01 224, 226

AmountAndCurrencyExchangeDetails1
Message BankToCustomerAccountReportV01 10, 10, 10, 10, 11, 12, 12, 12
Message BankToCustomerStatementV01 117, 117, 117, 117, 119, 119, 119, 119
Message BankToCustomerDebitCreditNotificationV01 224, 224, 224, 224, 226, 226, 226, 226

AmountAndCurrencyExchangeDetails2
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 224, 226

AmountRangeBoundary1
339, 339, 339, 339

AustrianBankleitzahlIdentifier
320

B

BalanceType1Choice
Message BankToCustomerAccountReportV01 8

BalanceType2Choice
Message BankToCustomerStatementV01 115

BalanceType8Code
Message BankToCustomerAccountReportV01 8

BalanceType9Code
Message BankToCustomerStatementV01 115

BankTransactionCodeStructure1

Message BankToCustomerAccountReportV01 8, 9, 12, 16
Message BankToCustomerStatementV01 116, 116, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226, 230

BankTransactionCodeStructure2
Message BankToCustomerAccountReportV01 9, 9, 12, 16
Message BankToCustomerStatementV01 116, 116, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226, 230

BankTransactionCodeStructure3
Message BankToCustomerAccountReportV01 9, 9, 12, 16
Message BankToCustomerStatementV01 116, 116, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226, 230

BaseOneRate
329, 343

BatchInformation1
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

BBANIdentifier
320, 334, 335

BEIIdentifier
320, 359

BelgianIdentifier
321

BICIdentifier
321, 346, 347, 359

BloombergIdentifier
321

BranchAndFinancialInstitutionIdentification3
346
Message BankToCustomerAccountReportV01 7, 11, 13, 13, 14, 14, 14, 14, 14, 14, 14, 14, 14
Message BankToCustomerStatementV01 114, 118, 120, 121, 121, 121, 121, 121, 121, 121, 121, 121, 121
Message BankToCustomerDebitCreditNotificationV01 222, 225, 227, 228, 228, 228, 228, 228, 228, 228, 228, 228, 228

BranchData
347

C

CanadianPaymentsARNIdentifier
322

CashAccount13
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

CashAccount7
335
Message BankToCustomerAccountReportV01 7, 13, 13, 16
Message BankToCustomerStatementV01 114, 120, 120, 123
Message BankToCustomerDebitCreditNotificationV01 222, 228, 228, 231

CashAccountType2
335
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

CashAccountType4Code
335
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

CashBalance1
Message BankToCustomerAccountReportV01 8

CashBalance2
Message BankToCustomerStatementV01 115

CashBalanceAvailability1
Message BankToCustomerAccountReportV01 8, 9, 9, 12
Message BankToCustomerStatementV01 115, 116, 116, 119
Message BankToCustomerDebitCreditNotificationV01 223, 223, 226

CashBalanceAvailabilityDate1
Message BankToCustomerAccountReportV01 8, 9, 9, 12
Message BankToCustomerStatementV01 115, 116, 116, 119
Message BankToCustomerDebitCreditNotificationV01 223, 223, 226

ChargeBearerType1Code
Message BankToCustomerAccountReportV01 11, 13
Message BankToCustomerStatementV01 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

ChargesInformation3
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 119
Message BankToCustomerDebitCreditNotificationV01 225, 227

ChargeType1Code
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 120

Message BankToCustomerDebitCreditNotificationV01 225, 227

ChargeTypeChoice
Message BankToCustomerAccountReportV01 10, 12
Message BankToCustomerStatementV01 117, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

CHIPSParticipantIdentifier
321

CHIPSUniversalIdentifier
321, 359

ClearingSystemMemberIdentification3Choice
346, 347

ConsolidatedTapeAssociationIdentifier
322

CopyDuplicate1Code
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

CorporateAction1
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

CountryCode
322, 346, 347, 347, 359, 359, 360, 369

CreditDebitCode
339
Message BankToCustomerAccountReportV01 8, 8, 8, 8, 9, 9, 9, 11, 12, 13
Message BankToCustomerStatementV01 115, 115, 115, 116, 116, 116, 116, 118, 119, 120
Message BankToCustomerDebitCreditNotificationV01 222, 223, 223, 223, 224, 225, 226, 227

CreditLine1
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115

CreditorReferenceInformation1
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

CreditorReferenceType1
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

CurrencyAndAmount
319, 372, 372, 372, 372
Message BankToCustomerAccountReportV01 8, 8, 8, 9, 9, 9, 10, 10, 10, 10, 10, 10, 10, 11, 11, 11, 12, 12, 12, 12, 12, 12, 12, 13, 13, 14, 14, 15, 15, 15, 15, 15
Message BankToCustomerStatementV01 115, 115, 115, 116, 116, 116, 117, 117, 117, 117, 117, 117, 117, 118, 118, 119, 119, 119, 119, 119, 119, 119, 119, 120, 120, 122, 122, 122, 122, 122, 122, 122
Message BankToCustomerDebitCreditNotificationV01 223, 223, 224, 224, 224, 224, 224, 225, 225, 225, 225, 225, 226, 226, 226, 226, 226, 226, 227, 227, 227, 227, 229, 229, 229, 229, 229, 230, 230

CurrencyAndAmountRange
339
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

CurrencyCode
322, 335, 339, 343, 343, 343, 372, 372, 372, 372
Message BankToCustomerAccountReportV01 7, 8, 8, 8, 9, 9, 9, 10, 10, 10, 10, 10, 10, 10, 11, 11, 11, 12, 12, 12, 12, 12, 12, 12, 13, 13, 14, 14, 15, 15, 15, 15, 15
Message BankToCustomerStatementV01 114, 115, 115, 115, 116, 116, 116, 117, 117, 117, 117, 117, 117, 117, 118, 118, 119, 119, 119, 119, 119, 119, 119, 119, 120, 120, 122, 122, 122, 122, 122, 122, 122
Message BankToCustomerDebitCreditNotificationV01 222, 223, 223, 224, 224, 224, 224, 224, 225, 225, 225, 225, 225, 226, 226, 226, 226, 226, 226, 227, 227, 227, 227, 229, 229, 229, 229, 229, 230, 230

CurrencyExchange3
343
Message BankToCustomerAccountReportV01 10, 10, 10, 10, 10, 12, 12, 12, 12, 12
Message BankToCustomerStatementV01 117, 117, 117, 117, 117, 119, 119, 119, 119, 119
Message BankToCustomerDebitCreditNotificationV01 224, 224, 224, 224, 225, 226, 226, 226, 226, 226

CUSIPIdentifier
322

D

DateAndDateTimeChoice
345
Message BankToCustomerAccountReportV01 8, 9, 9
Message BankToCustomerStatementV01 115, 116, 116
Message BankToCustomerDebitCreditNotificationV01 223, 223

DateAndPlaceOfBirth
359

DateTimePeriodDetails
345
Message BankToCustomerAccountReportV01 7, 7, 11, 13
Message BankToCustomerStatementV01 114, 115, 118, 120
Message BankToCustomerDebitCreditNotificationV01 222, 225, 227

DecimalNumber
329, 371

Message BankToCustomerAccountReportV01 8, 8, 8, 8, 8, 8
Message BankToCustomerStatementV01 115, 115, 115, 115, 115, 115
Message BankToCustomerDebitCreditNotificationV01 222, 222, 223, 223, 223, 223

DocumentType2Code
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

DocumentType3Code
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

DunsIdentifier
323, 359

DutchIdentifier
323

E

EANGLNIdentifier
323, 359

EntryStatus2Code
Message BankToCustomerAccountReportV01 9

EntryStatus3Code
Message BankToCustomerStatementV01 116

EntryStatus4Code
Message BankToCustomerDebitCreditNotificationV01 223

EntryTransaction1
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 225

EuroclearClearstreamIdentifier
323

ExtensiveBranchNetworkIdentifier
323

ExternalBankTransactionDomainCode
323
Message BankToCustomerAccountReportV01 9, 9, 12, 16
Message BankToCustomerStatementV01 116, 116, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226, 230

ExternalBankTransactionFamilyCode

324
Message BankToCustomerAccountReportV01 9, 9, 12, 16
Message BankToCustomerStatementV01 116, 116, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 227, 230

ExternalBankTransactionSubFamilyCode
324
Message BankToCustomerAccountReportV01 9, 9, 12, 16
Message BankToCustomerStatementV01 116, 117, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 227, 230

ExternalClearingSystemMemberCode
324, 346, 347

ExternalPurposeCode
324
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

F

FedwireRoutingNumberIdentifier
324

FinancialInstitutionIdentification3
346

FinancialInstitutionIdentification5Choice
346

FinancialInstrumentQuantityChoice
371
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

FromToAmountRange
339

G

GenericIdentification3
346, 347, 359

GenericIdentification4
360

GermanBankleitzahlIdentifier
325

GroupHeader23
Message BankToCustomerAccountReportV01 6
Message BankToCustomerStatementV01 113
Message BankToCustomerDebitCreditNotificationV01 221

H

HellenicBankIdentificationCodeIdentifier
325

HongKongBankIdentifier
325

I

IBANIdentifier
325, 334, 335

IBEIIdentifier
325, 359

ImpliedCurrencyAmountRangeChoice
339

ImpliedCurrencyAndAmount
319, 339, 339, 339, 339, 339, 339, 371, 371

IndianFinancialSystemCodeIdentifier
326

InterestType1Choice
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

InterestType1Code
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

IrishNSCIdentifier
326

ISINIdentifier
325
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

ISODate
319, 345, 359, 372

Message BankToCustomerAccountReportV01 8, 9, 9, 12, 14, 15, 15, 15, 15, 15
Message BankToCustomerStatementV01 115, 116, 116, 119, 121, 122, 122, 122, 122, 122
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226, 229, 229, 229, 229, 229, 229

ISODateTime
319, 343, 345, 345, 345
Message BankToCustomerAccountReportV01 6, 7, 15, 15, 15
Message BankToCustomerStatementV01 113, 114, 122, 122, 122
Message BankToCustomerDebitCreditNotificationV01 222, 222, 229, 229, 229

ISOTime
320

ISOYear
320

ItalianDomesticIdentifier
326

L

LanguageCode
326

M

Max1025Text
330

Max105Text
330
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

Max128Text
330

Max140Text
330, 372
Message BankToCustomerAccountReportV01 14, 15
Message BankToCustomerStatementV01 121, 122
Message BankToCustomerDebitCreditNotificationV01 228, 229

Max15NumericText
330
Message BankToCustomerAccountReportV01 8, 8, 8, 8, 10
Message BankToCustomerStatementV01 115, 115, 115, 115, 117
Message BankToCustomerDebitCreditNotificationV01 222, 222, 223, 223, 224

Max15PlusSignedNumericText

331
Message BankToCustomerAccountReportV01 8, 9, 9, 12
Message BankToCustomerStatementV01 115, 116, 116, 119
Message BankToCustomerDebitCreditNotificationV01 223, 224, 226

Max16Text
331, 346, 346, 347, 347, 347, 347, 359, 359, 369, 369

Max256Text
331
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

Max34Text
331, 334, 335

Max350Text
331

Max35Text
331, 335, 343, 346, 346, 346, 346, 346, 347, 347, 347, 347, 347, 347, 347, 347, 347, 359, 359, 359, 359, 359, 359, 359, 359, 359, 359, 359, 359, 359, 359, 359, 360, 360, 360, 369, 369, 372, 372, 372, 372, 372
Message BankToCustomerAccountReportV01 6, 7, 7, 7, 7, 7, 8, 9, 9, 9, 10, 10, 10, 10, 10, 10, 10, 11, 11, 11, 11, 11, 11, 11, 11, 11, 11, 11, 11, 11, 11, 12, 12, 12, 13, 13, 13, 13, 13, 14, 14, 14, 14, 14, 14, 15, 15, 15, 15, 15, 15, 15, 16, 16, 16, 16, 16, 16, 16, 16
Message BankToCustomerStatementV01 113, 114, 114, 114, 114, 115, 115, 116, 116, 116, 117, 117, 117, 117, 117, 117, 117, 118, 118, 118, 118, 118, 118, 118, 118, 118, 118, 118, 118, 118, 118, 119, 119, 119, 120, 120, 120, 120, 120, 121, 121, 121, 121, 121, 121, 122, 122, 122, 122, 122, 122, 123, 123, 123, 123, 123, 123, 123, 123, 123
Message BankToCustomerDebitCreditNotificationV01 221, 222, 222, 223, 223, 223, 224, 224, 224, 224, 224, 224, 225, 225, 225, 225, 225, 225, 225, 225, 226, 226, 226, 226, 226, 226, 226, 226, 227, 227, 227, 227, 227, 227, 228, 228, 228, 228, 229, 229, 229, 229, 229, 229, 229, 230, 230, 230, 230, 230, 230, 230, 230, 230, 230, 231

Max3NumericText
332

Max4AlphaNumericText
332
Message BankToCustomerAccountReportV01 10, 13
Message BankToCustomerStatementV01 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

Max500Text
332
Message BankToCustomerAccountReportV01 7, 16, 16, 16
Message BankToCustomerStatementV01 114, 123, 123, 123
Message BankToCustomerDebitCreditNotificationV01 222, 231, 231, 231

Max5NumericText
332
Message BankToCustomerAccountReportV01 7
Message BankToCustomerStatementV01 114

Message BankToCustomerDebitCreditNotificationV01 222

Max6Text
332

Max70Text
332, 335, 346, 346, 346, 347, 347, 347, 347, 347, 358, 359, 359, 369, 369
Message BankToCustomerAccountReportV01 7, 14
Message BankToCustomerStatementV01 114, 121
Message BankToCustomerDebitCreditNotificationV01 222, 228

MessageIdentification2
Message BankToCustomerAccountReportV01 10
Message BankToCustomerStatementV01 117
Message BankToCustomerDebitCreditNotificationV01 224

MICIdentifier
326

N

NameAndAddress3
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

NameAndAddress7
346

NationalityCode
326

NewZealandNCCIdentifier
326

NotificationEntry1
Message BankToCustomerDebitCreditNotificationV01 223

Number
329
Message BankToCustomerAccountReportV01 7, 7
Message BankToCustomerStatementV01 114, 114
Message BankToCustomerDebitCreditNotificationV01 222, 222

NumberAndSumOfTransactions1
Message BankToCustomerAccountReportV01 8, 8
Message BankToCustomerStatementV01 115, 115
Message BankToCustomerDebitCreditNotificationV01 222, 223

NumberAndSumOfTransactions2
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115

Message BankToCustomerDebitCreditNotificationV01 222

NumberAndSumOfTransactionsPerBankTransactionCode1
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 223

O

OrganisationIdentification2
359

P

Pagination
Message BankToCustomerAccountReportV01 6
Message BankToCustomerStatementV01 114
Message BankToCustomerDebitCreditNotificationV01 222

Party2Choice
359

PartyIdentification8
358
Message BankToCustomerAccountReportV01 6, 7, 13, 13, 13, 13, 13, 13, 13, 15, 15, 16
Message BankToCustomerStatementV01 114, 114, 120, 120, 120, 120, 120, 120, 120, 122, 122, 123
Message BankToCustomerDebitCreditNotificationV01 222, 222, 227, 227, 228, 228, 228, 228, 228, 229, 229, 230

PercentageRate
330, 372
Message BankToCustomerAccountReportV01 7, 10, 11, 11, 13, 13, 13
Message BankToCustomerStatementV01 114, 118, 118, 118, 120, 120, 120
Message BankToCustomerDebitCreditNotificationV01 225, 225, 225, 227, 227, 227

PersonIdentification3
359

PolishNationalClearingCodeIdentifier
327

PortugueseNCCIdentifier
327

PostalAddress1
346, 347, 347, 359, 369
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

ProprietaryAgent1
Message BankToCustomerAccountReportV01 14

Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

ProprietaryBankTransactionCodeStructure1
Message BankToCustomerAccountReportV01 9, 9, 12, 16
Message BankToCustomerStatementV01 116, 117, 119, 123
Message BankToCustomerDebitCreditNotificationV01 223, 224, 227, 230

ProprietaryDate1
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

ProprietaryParty1
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 228

ProprietaryPrice1
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

ProprietaryQuantity1
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

ProprietaryReference1
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 226

Purpose1Choice
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

Q

QUICKIdentifier
327

R

Rate1
Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

RateTypeChoice

Message BankToCustomerAccountReportV01 7, 11, 13
Message BankToCustomerStatementV01 114, 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

ReferredDocumentAmount1Choice
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

ReferredDocumentInformation1
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

ReferredDocumentType1
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

RemittanceInformation1
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

RemittanceLocation1
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

RemittanceLocationMethod1Code
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

ReportEntry1
Message BankToCustomerAccountReportV01 9

ReturnReason1Choice
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

ReturnReasonInformation5
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

RICIdentifier
327

RussianCentralBankIdentificationCodeIdentifier
327

S

SecurityIdentification4Choice
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

SEDOLIdentifier
327

SicovamIdentifier
327

SimpleIdentificationInformation2
334, 335

SmallNetworkIdentifier
328

SouthAfricanNCCIdentifier
328

SpanishDomesticInterbankingIdentifier
328

StatementEntry1
Message BankToCustomerStatementV01 116

StructuredRemittanceInformation6
Message BankToCustomerAccountReportV01 14
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 229

SwissBCIdentifier
328

SwissSICIdentifier
328

T

TaxCharges1
Message BankToCustomerAccountReportV01 11, 13
Message BankToCustomerStatementV01 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

TaxDetails
372

TaxInformation2

372
Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

TaxType
372

TickerIdentifier
328

TotalTransactions1
Message BankToCustomerAccountReportV01 8
Message BankToCustomerStatementV01 115
Message BankToCustomerDebitCreditNotificationV01 222

TransactionAgents1
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 121
Message BankToCustomerDebitCreditNotificationV01 228

TransactionDates1
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 229

TransactionInterest1
Message BankToCustomerAccountReportV01 11, 13
Message BankToCustomerStatementV01 118, 120
Message BankToCustomerDebitCreditNotificationV01 225, 227

TransactionParty1
Message BankToCustomerAccountReportV01 13
Message BankToCustomerStatementV01 120
Message BankToCustomerDebitCreditNotificationV01 227

TransactionPrice1Choice
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

TransactionQuantities1Choice
Message BankToCustomerAccountReportV01 15
Message BankToCustomerStatementV01 122
Message BankToCustomerDebitCreditNotificationV01 230

TransactionReferences1
Message BankToCustomerAccountReportV01 11
Message BankToCustomerStatementV01 118
Message BankToCustomerDebitCreditNotificationV01 225

TransactionRejectReason2Code

Message BankToCustomerAccountReportV01 16
Message BankToCustomerStatementV01 123
Message BankToCustomerDebitCreditNotificationV01 230

TrueFalseIndicator
Message BankToCustomerAccountReportV01 8, 9
Message BankToCustomerStatementV01 115, 116
Message BankToCustomerDebitCreditNotificationV01 223

U

UKDomesticSortCodeIdentifier
329

UPICIdentifier
329, 334, 335

V

ValorenIdentifier
329

W

WertpapierIdentifier
329

Y

YesNoIndicator
339, 339, 339, 339
Message BankToCustomerAccountReportV01 7, 10
Message BankToCustomerStatementV01 114, 117
Message BankToCustomerDebitCreditNotificationV01 222, 224

Revision Record

Revision	Date	Author	Description	Sections affected
1.0	20/04/2007	ISO 20022 RA	Initial version	All