ISO 20022

Creditor Payment Activation Request

Approved by the Payments SEG on 27 September 2010

Message Definition Report

Edition October 2010

Table Of Contents

Overview **1**
Scope 1
How to read 1
Message Flows **2**
Creditor Payment Activation Request 2
pain.013.001.01 CreditorPaymentActivationRequestV01 ..... **7**
Message Functionality 7
Structure 7
Rules and Guidelines 11
Message Items Description 14
pain.014.001.01 CreditorPaymentActivationRequestStatusReportV01 ..... **52**
Message Functionality 52
Structure 52
Rules and Guidelines 57
Message Items Description 62
Message Item Types **108**
Data Types 108
End Points 121
Indexes **169**
Index of Message Items 169
Index of XML tags 183
Index of Message Item Types 197
Revision Record **209**

Overview

Scope

This document describes a set of ISO 20022 message definitions developed by CBI and approved by the Payments Standards Evaluation Group as ISO 20022 messages on 27 September 2010.
The set of Creditor Payment Activation Request (CPAR) messages is around the Payment Initiation in the Customer-to-Bank area. The set of messages covers the means to issue, manage and monitor a credit transfer request including payment and remittance information details submitted by the Creditor and by Financial institutions on behalf of the Creditor.
The Payment Information component is repetitive in order to contain one or more Debtors (e.g.: Debtor receiving party acting on behalf of multiple Debtors).
The Credit Transfer Transaction Information component is repetitive in order to contain one or more Creditors (e.g.: Initiating Party acting on behalf of multiple Creditors).

This set includes the following message definitions:

1. **CreditorPaymentActivationRequestV01**
This message is sent by the Creditor sending party to the Debtor receiving party, directly or through agents. It is used to initiate a creditor payment activation request.
2. **CreditorPaymentActivationRequestStatusReportV01**
This message is sent by a party to the next party in the creditor payment activation request chain. It is used to inform the latter about the positive or negative status of a creditor payment activation request (either single or file).

How to read

In compliance with ISO 20022, UML (Unified Modelling Language) is used to depict business and logical models. As knowledge of UML is not a requirement to discuss the business standards, the data format for the messages is presented in a user-friendlier way. This way of representation is automatically generated from the models, thereby ensuring absolute consistency between the model information and the published standard.

Message Flows

Creditor Payment Activation Request

Introduction

The following scenarios describe the creditor payment activation request activities flows for which messages have been designed.
The following actors are involved in those scenarios:

- **Creditor:** Party to which an amount of money is due.
- **Creditor sending party:** Initiating Party of the Creditor Payment Activation Request on behalf of the Creditor. He may be different from the Creditor himself.
- **Creditor Agent:** Financial institution servicing an account for the Creditor.
- **Debtor:** Party that owes an amount of money to the (ultimate) Creditor.
- **Debtor Agent:** Financial institution servicing an account for the Debtor.
- **Ultimate Creditor:** Ultimate party to which an amount of money is due.
- **Ultimate Debtor:** Ultimate party that owes an amount of money to the (ultimate) creditor.
- **Debtor receiving party:** The Debtor himself or a party receiving the Creditor Payment Activation Request on behalf of the Debtor.
- **Debtor's portal:** Web site offering services on behalf of the Debtor.
- **Creditor's portal:** Web site offering services on behalf of the creditor.

Scenario 1: Creditor Payment Activation Request sent by the Creditor sending party to the Debtor receiving party THROUGH AGENTS

The Creditor Payment Activation Request message is sent by the Creditor sending party (only) to the Creditor Agent, which checks the message. According to the results, the Creditor Agent forwards the message to the Debtor Agent that extends the message to the Debtor receiving party.
On receipt from Debtor Agent, the Creditor Agent may forward a Creditor Payment Activation Request Status Report, with the aim to inform the Creditor sending party (Creditor) about the status of the CPAR.
The Creditor Payment Activation Request Status Report Message can be used two fold :

1. to provide information about the formal status (e.g. rejection, acceptance) of a request message. In this case the status message is the result of a technical validation performed by Debtor Agent on the request message received (can be performed in advance by the Creditor Agent or Creditor himself) ;
2. to inform the Creditor about the business status of the received payment proposal (e.g.: accepted, accepted with changes, refused).

The acceptance could be worth a "commitment to pay" (this is part of the bilateral agreements between the two counterparts).
The Payment initiation and execution are out of scope of the CPAR messages.

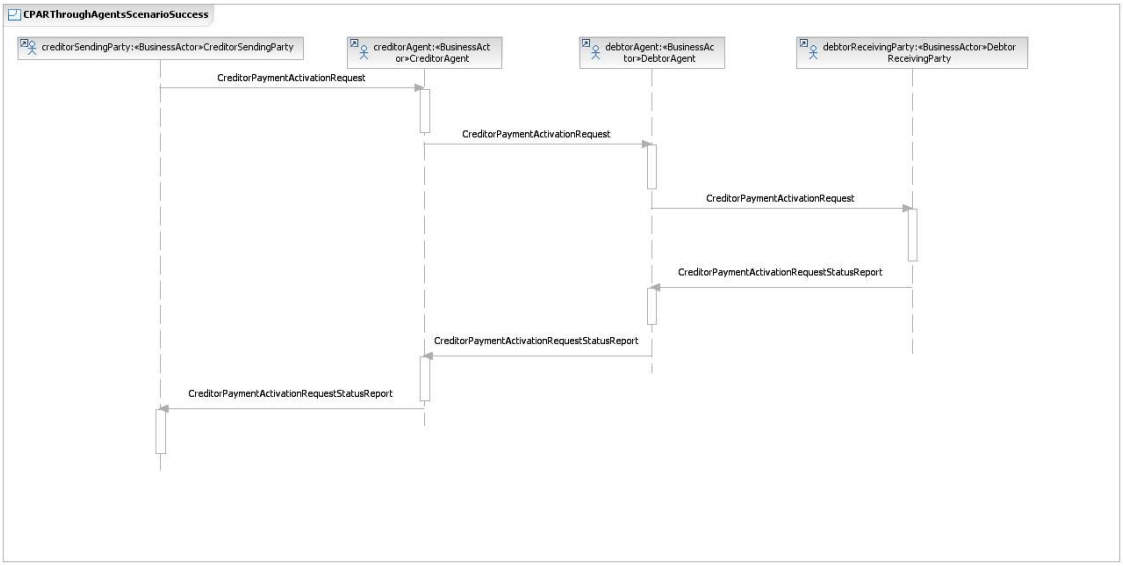

Scenario 2: Creditor Payment Activation Request sent directly by the Creditor sending party to the Debtor receiving party THROUGH CREDITOR'S PORTAL

The Creditor's portal generates the Creditor Payment Activation Request message - including complete remittance information - on behalf of the Creditor and extends it to the Debtor (Debtor receiving party). The Debtor downloads and checks the message. The Debtor (Debtor receiving party) :

1. uploads a CreditorPaymentActivationRequestStatusReport to inform the Creditor about the status of the CPAR (acceptance/ reject/ acceptance with changes). (optional, depending on service bilateral agreements, e.g. data entry or upload) ;
2. in case of acceptance will automatically map data of the CPAR into the pain.001 message to initiate the payment by the date agreed in the CPAR message, including the remittance information specified by the Creditor.

The acceptance could be worth a "commitment to pay" (this is part of the bilateral agreements between the two counterparts).

The Payment initiation and execution are out of scope.

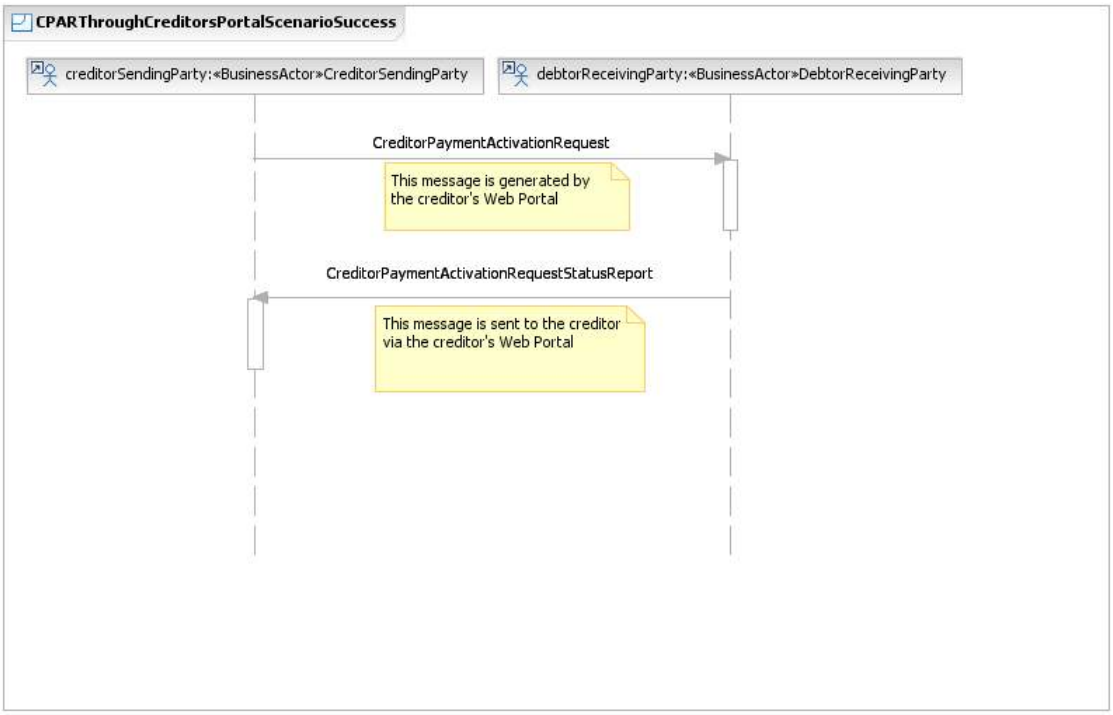

Scenario 3: Creditor Payment Activation uploaded directly by the Creditor sending party to the Debtor receiving party THROUGH DEBTOR'S PORTAL

The Creditor Payment Activation Request message is uploaded by the Creditor directly into the Debtor's portal (e.g. as a structured "Pay me" reminder) to support the Debtor in the creation of the payment messages. The Debtor's portal checks the request message received and, in case of positive outcome (both technical and business) :

1. extends a CreditorPaymentActivationRequestStatusReport to inform the Creditor (Creditor sending party) about the positive status of the CPAR (optional, depending on service bilateral agreements, e.g. download and/or screen shot only) ;
2. will automatically map data of the CPAR into the pain.001 message to initiate the payment by the date agreed in the CPAR message, including the remittance information specified by the Creditor.

The acceptance could be worth a "commitment to pay" (this is part of the bilateral agreements between the two counterparts).

The Payment initiation and execution are out of scope.

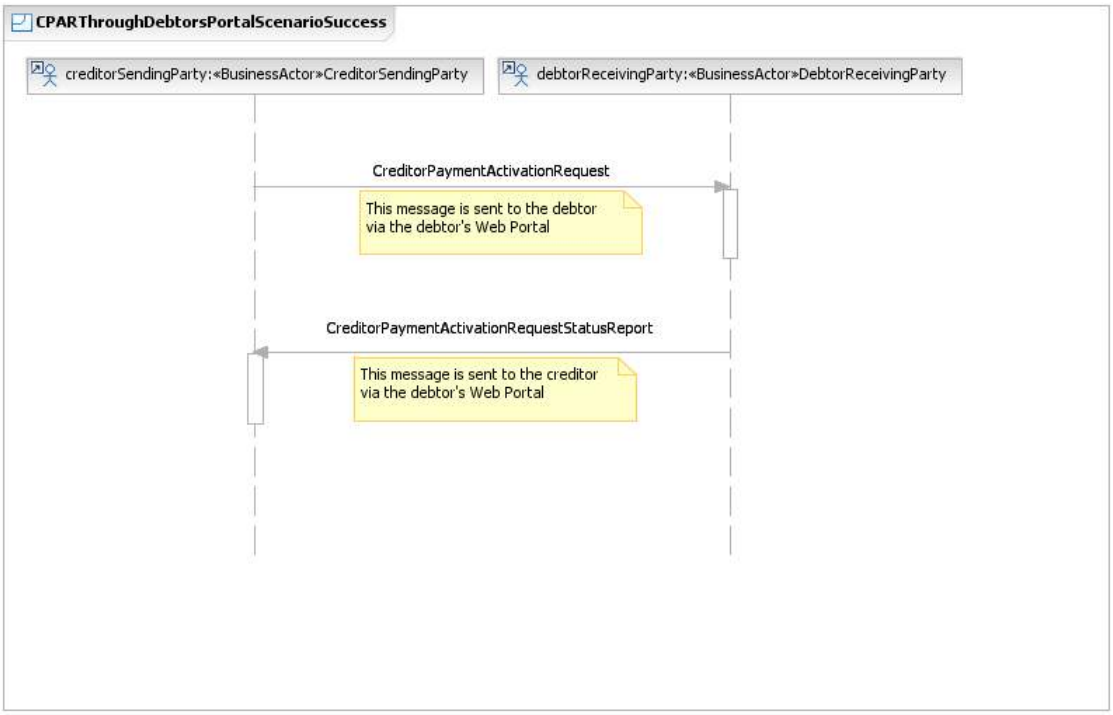

Scenario 4: Creditor Payment Activation Request exchanged directly between Creditor (Creditor sending party) and Debtor (Debtor receiving party)

The Creditor generates the Creditor Payment Activation Request message - including complete remittance information - and extends it to the Debtor. The Debtor (Debtor receiving party) checks the message. The Debtor (Debtor receiving party) :

1. sends back a CreditorPaymentActivationRequestStatusReport to inform the Creditor about the 1) formal and 2) business status of the CPAR (acceptance/ reject/ acceptance with changes) ;
2. in case of (business) acceptance will automatically map data of the CPAR into the pain.001 message to initiate the payment by the date agreed in the CPAR message, including the remittance information specified by the Creditor.

The acceptance could be worth a "commitment to pay" (this is part of the bilateral agreements between the two counterparts).

The Payment initiation and execution are out of scope.

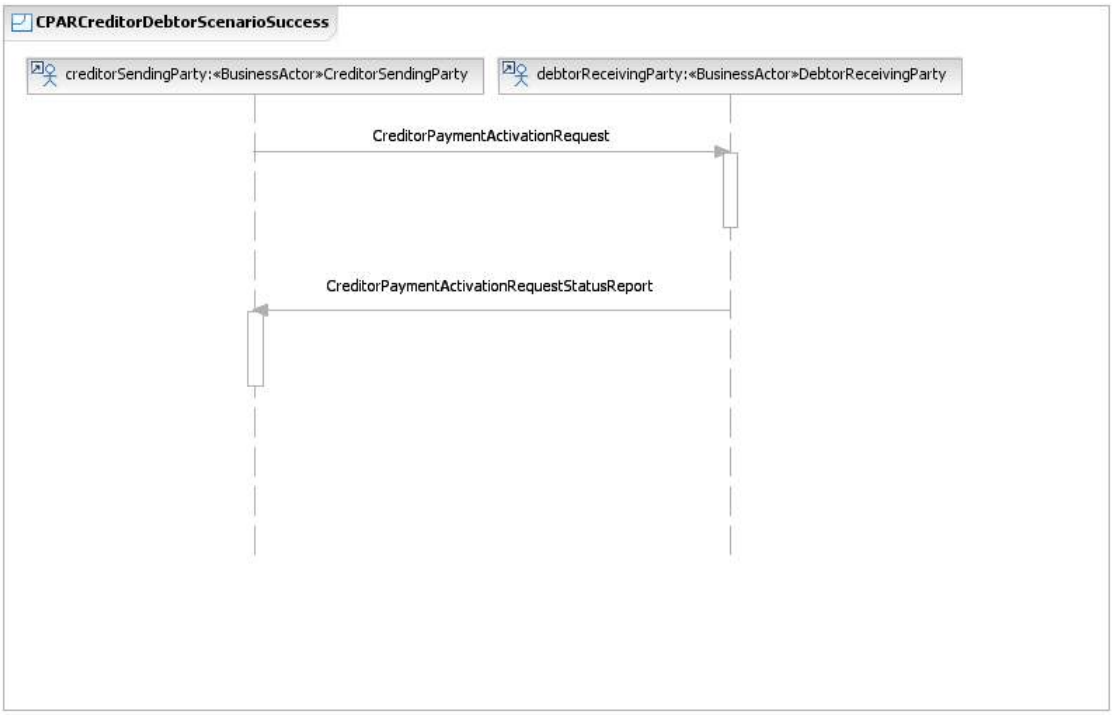
CPARCreditorDebtorScenarioSuccess
creditorSendingParty:«BusinessActor»CreditorSendingParty
debtorReceivingParty:«BusinessActor»DebtorReceivingParty
CreditorPaymentActivationRequest
CreditorPaymentActivationRequestStatusReport

pain.013.001.01 CreditorPaymentActivationRequestV01

Message Functionality

Scope

This message is sent by the Creditor sending party to the Debtor receiving party, directly or through agents.
It is used to initiate a creditor payment activation request.

Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<CdtrPmtActvtnReq>	[1..1]		R1, R2

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		NumberOfTransactions	<NbOfTxs>	[1..1]	Text	
1.4		ControlSum	<CtrlSum>	[0..1]	Quantity	
1.5		InitiatingParty	<InitgPty>	[1..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		PaymentInformation	<PmtInf>	[1..*]		R10, R11, R12, R13, R14, R5, R6, R7, R8, R9
2.1		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text	
2.2		PaymentMethod	<PmtMtd>	[1..1]	Code	
2.3		PaymentTypeInformation	<PmtTpInf>	[0..1]		
2.4		InstructionPriority	<InstrPrty>	[0..1]	Code	
2.5		ServiceLevel	<SvcLvl>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.6	{Or	Code	<Cd>	[1..1]	Code	
2.7	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.8		LocalInstrument	<LclInstrm>	[0..1]		
2.9	{Or	Code	<Cd>	[1..1]	Code	
2.10	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.11		CategoryPurpose	<CtgyPurp>	[0..1]		
2.12	{Or	Code	<Cd>	[1..1]	Code	
2.13	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.14		RequestedExecutionDate	<ReqdExctnDt>	[1..1]	DateTime	
2.15		Debtor	<Dbtr>	[1..1]	+	
2.16		DebtorAccount	<DbtrAcct>	[0..1]	+	
2.17		DebtorAgent	<DbtrAgt>	[1..1]	+	
2.18		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.19		ChargeBearer	<ChrgBr>	[0..1]	Code	
2.20		CreditTransferTransaction	<CdtTrfTx>	[1..*]		G1, G2
2.21		PaymentIdentification	<PmtId>	[1..1]		
2.22		InstructionIdentification	<InstrId>	[0..1]	Text	
2.23		EndToEndIdentification	<EndToEndId>	[1..1]	Text	
2.24		PaymentTypeInformation	<PmtTpInf>	[0..1]		
2.25		InstructionPriority	<InstrPrty>	[0..1]	Code	
2.26		ServiceLevel	<SvcLvl>	[0..1]		
2.27	{Or	Code	<Cd>	[1..1]	Code	
2.28	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.29		LocalInstrument	<LclInstrm>	[0..1]		
2.30	{Or	Code	<Cd>	[1..1]	Code	
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.32		CategoryPurpose	<CtgyPurp>	[0..1]		
2.33	{Or	Code	<Cd>	[1..1]	Code	
2.34	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.35		Amount	<Amt>	[1..1]		
2.36	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount	R21, R22
2.37	Or}	EquivalentAmount	<EqvtAmt>	[1..1]		
2.38		Amount	<Amt>	[1..1]	Amount	R21, R22

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.39		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code	R22
2.40		ChargeBearer	<ChrgBr>	[1..1]	Code	
2.41		ChequeInstruction	<ChqInstr>	[0..1]		
2.42		ChequeType	<ChqTp>	[0..1]	Code	
2.43		ChequeNumber	<ChqNb>	[0..1]	Text	
2.44		ChequeFrom	<ChqFr>	[0..1]		
2.45		Name	<Nm>	[1..1]	Text	
2.46		Address	<Adr>	[1..1]	+	
2.47		DeliveryMethod	<DlvryMtd>	[0..1]		
2.48	{Or	Code	<Cd>	[1..1]	Code	
2.49	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.50		DeliverTo	<DlvrTo>	[0..1]		
2.51		Name	<Nm>	[1..1]	Text	
2.52		Address	<Adr>	[1..1]	+	
2.53		InstructionPriority	<InstrPrty>	[0..1]	Code	
2.54		ChequeMaturityDate	<ChqMtrtyDt>	[0..1]	DateTime	R23
2.55		FormsCode	<FrmsCd>	[0..1]	Text	
2.56		MemoField	<MemoFld>	[0..2]	Text	
2.57		RegionalClearingZone	<RgnlClrZone>	[0..1]	Text	
2.58		PrintLocation	<PrtLctn>	[0..1]	Text	
2.59		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.60		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+	R18
2.61		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+	R19
2.62		IntermediaryAgent3	<IntrmyAgt3>	[0..1]	+	
2.63		CreditorAgent	<CdtrAgt>	[1..1]	+	
2.64		Creditor	<Cdtr>	[1..1]	+	
2.65		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.66		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.67		InstructionForCreditorAgent	<InstrForCdtrAgt>	[0..*]		
2.68		Code	<Cd>	[0..1]	Code	R20
2.69		InstructionInformation	<InstrInf>	[0..1]	Text	
2.70		Purpose	<Purp>	[0..1]		
2.71	{Or	Code	<Cd>	[1..1]	Code	
2.72	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.73		RegulatoryReporting	<RgltryRptg>	[0..10]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.74		Tax	<Tax>	[0..1]	+	
2.75		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]		
2.76		RemittanceIdentification	<RmtId>	[0..1]	Text	
2.77		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code	
2.78		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text	
2.79		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]		
2.80		Name	<Nm>	[1..1]	Text	
2.81		Address	<Adr>	[1..1]	+	
2.82		RemittanceInformation	<RmtInf>	[0..1]		
2.83		Unstructured	<Ustrd>	[0..*]	Text	
2.84		Structured	<Strd>	[0..*]		
2.85		ReferredDocumentInformation	<RfrdDocInf>	[0..*]		
2.86		Type	<Tp>	[0..1]		
2.87		CodeOrProprietary	<CdOrPrtry>	[1..1]		
2.88	{Or	Code	<Cd>	[1..1]	Code	
2.89	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.90		Issuer	<Issr>	[0..1]	Text	
2.91		Number	<Nb>	[0..1]	Text	
2.92		RelatedDate	<RltdDt>	[0..1]	DateTime	
2.93		ReferredDocumentAmount	<RfrdDocAmt>	[0..1]		
2.94		DuePayableAmount	<DuePyblAmt>	[0..1]	Amount	R21, R22
2.95		DiscountAppliedAmount	<DscntApldAmt>	[0..1]	Amount	R21, R22
2.96		CreditNoteAmount	<CdtNoteAmt>	[0..1]	Amount	R21, R22
2.97		TaxAmount	<TaxAmt>	[0..1]	Amount	R21, R22
2.98		AdjustmentAmountAndReason	<AdjstmntAmtAndRsn>	[0..*]		
2.99		Amount	<Amt>	[1..1]	Amount	R21, R22
2.100		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code	
2.101		Reason	<Rsn>	[0..1]	Text	
2.102		AdditionalInformation	<AddtlInf>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.103		RemittedAmount	<RmtdAmt>	[0..1]	Amount	R21, R22
2.104		CreditorReferenceInformation	<CdtrRefInf>	[0..1]		
2.105		Type	<Tp>	[0..1]		
2.106		CodeOrProprietary	<CdOrPrtry>	[1..1]		
2.107	{Or	Code	<Cd>	[1..1]	Code	
2.108	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.109		Issuer	<Issr>	[0..1]	Text	
2.110		Reference	<Ref>	[0..1]	Text	
2.111		Invoicer	<Invcr>	[0..1]	+	
2.112		Invoicee	<Invcee>	[0..1]	+	
2.113		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..3]	Text	

Rules and Guidelines

Rules

R1 Grouping1Rule
If GroupHeader/Grouping is present and equals GRPD, then one and only one occurrence of PaymentInformation must be present.

R2 Grouping2Rule
If GroupHeader/Grouping is present and equals SNGL, then each occurrence of PaymentInformation must contain one and only one occurrence of PaymentInformation/CreditTransferTransactionInformation.

R3 Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.139 for additional information.*

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.130 for additional information.*

*This Rule also impacts **PostalAddress6** Type. Please refer to 'Message Item Types' section p.150 for additional information.*

*This Rule also impacts **RegulatoryReporting3** Type. Please refer to 'Message Item Types' section p.152 for additional information.*

R4 AnyBIC
Only a valid Business identifier code is allowed. Business identifier codes for financial or non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.139 for additional information.*

R5 PaymentTypeInformationRule
If PaymentTypeInformation is present, then CreditTransferTransaction/PaymentTypeInformation is not allowed.

R6 ChequeInstructionRule
If PaymentMethod is CHK, then CreditTransferTransaction/ChequeInstruction is optional.
If PaymentMethod is different from CHK, then CreditTransferTransaction/ChequeInstruction is not allowed.

Rule rationale: ChequeInstructionDetails may be present if the payment method is Cheque. It must not be present if the payment method is 'Transfer'.

R7 CreditorAndOrCreditorAgentRule
If PaymentMethod is CHK, then CreditTransferTransaction/CreditorAccount is not allowed.

If PaymentMethod is different from CHK and if CreditTransferTransaction/Creditor is not present, then CreditTransferTransaction/CreditorAccount is mandatory.

If PaymentMethod is different from CHK and if CreditTransferTransaction/Creditor is present, then CreditTransferTransaction/CreditorAccount is optional.

R8 CreditorAgentRule
If PaymentMethod is CHK and if CreditTransferTransaction/ ChequeInstruction/DeliveryMethod is present and is equal to MLFA, CRFA, RGFA or PUFA, then CreditTransferTransaction/CreditorAgent is mandatory.

If PaymentMethod is CHK and if CreditTransferTransaction/ ChequeInstruction/DeliveryMethod is not present or is not equal to MLFA, CRFA, RGFA or PUFA, then CreditTransferTransaction/CreditorAgent is not allowed.

R9 UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

R10 ChequeInstructionDeliverToDebtorGuideline
If CreditTransferTransaction/ChequeInstruction/DeliveryMethod is present and if CreditTransferTransaction/ ChequeInstruction/DeliveryMethod/Code is CRDB or MLDB or PUDB or RGDB, then CreditTransferTransaction/ChequeInstruction/DeliverTo may only be present if different than Debtor.

R11 ChequeInstructionDeliverToCreditorGuideline
If CreditTransferTransaction/ChequeInstruction/DeliveryMethod is present and is CRCD or MLCD or PUCD or RGCD, then CreditTransferTransaction/ChequeInstruction/DeliverTo may only be present if different from CreditTransferTransaction/Creditor.

R12 ChequeInstructionDeliverToCreditorAgentGuideline
If CreditTransferTransaction/ChequeInstruction/DeliveryMethod is present and is CRFA or MLFA or PUFA or RGFA, then CreditTransferTransaction/ChequeInstruction/DeliverTo may only be present if different than CreditTransferTransaction/Creditor.

R13 ChequeFromGuideline
CreditTransferTransaction/ChequeInstruction/ChequeFrom may only be present if different from CreditTransferTransaction/UltimateDebtor or Debtor.

R14 ChargeBearerRule
If ChargeBearer is present, then CreditTransferTransaction/ChargeBearer is not allowed.
If CreditTransferTransaction/ChargeBearer is present, then ChargeBearer is not allowed.
CreditTransferTransaction/ChargeBearer and ChargeBearer may both be absent.

R15 IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

*This Rule also impacts **CashAccount7** Type. Please refer to 'Message Item Types' section p.126 for additional information.*

R16 ValidationByTable

*This Rule also impacts **CashAccount7** Type. Please refer to 'Message Item Types' section p.126 for additional information.*

R17 BICFI
Valid BICs for financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.130 for additional information.*

R18 IntermediaryAgent2Rule
If IntermediaryAgent2 is present, then IntermediaryAgent1 must be present.
On Condition
/IntermediaryAgent2 is present
Following Must be True
/IntermediaryAgent1 Must be present

R19 IntermediaryAgent3Rule
If IntermediaryAgent3 is present, then IntermediaryAgent2 must be present.
On Condition
/IntermediaryAgent3 is present
Following Must be True
/IntermediaryAgent2 Must be present

R20 InstructionForCreditorAgentRule
If InstructionForCreditorAgent/Code contains CHQB, then CreditorAccount is not allowed.
On Condition
/CreditorAccount is present
And
/InstructionForCreditorAgent[1] is present
Following Must be True
/InstructionForCreditorAgent[*]/Code Must be within DataType <<Code>> PartialInstruction3Code

R21 CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

*This Rule also impacts **RegulatoryReporting3** Type. Please refer to 'Message Item Types' section p.152 for additional information.*

*This Rule also impacts **TaxInformation3** Type. Please refer to 'Message Item Types' section p.155 for additional information.*

R22 ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

*This Rule also impacts **CashAccount16** Type. Please refer to 'Message Item Types' section p.122 for additional information.*

*This Rule also impacts **RegulatoryReporting3** Type. Please refer to 'Message Item Types' section p.152 for additional information.*

*This Rule also impacts **TaxInformation3** Type. Please refer to 'Message Item Types' section p.155 for additional information.*

R23 ChequeMaturityDateRule
If ChequeMaturityDate is present, then ChequeType must be present and equal to DRFT or ELDR.
On Condition
/ChequeType is present
And
/ChequeType is within DataType <<Code>> ChequeType3Code
Following Must be True
/ChequeMaturityDate Must be absent

R24 IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

*This Rule also impacts **CashAccount16** Type. Please refer to 'Message Item Types' section p.122 for additional information.*

Guidelines

G1 UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

G2 UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

Message Items Description

*The following section identifies the elements of the **CreditorPaymentActivationRequestV01** message definition.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the message.

Type: *The **GroupHeader** block is composed of the following **GroupHeader45** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		NumberOfTransactions	<NbOfTxs>	[1..1]	Text
1.4		ControlSum	<CtrlSum>	[0..1]	Quantity
1.5		InitiatingParty	<InitgPty>	[1..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the instructing party and sent to the next party in the chain to unambiguously identify the message.

Usage: The instructing party has to make sure that 'MessageIdentification' is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]
Definition: Date and time at which a (group of) payment instruction(s) was created by the instructing party.
Data Type: ISODateTime

1.3 NumberOfTransactions <NbOfTxs>

Presence: [1..1]
Definition: Number of individual transactions contained in the message.
Data Type: Max15NumericText
Format: [0-9]{1,15}

1.4 ControlSum <CtrlSum>

Presence: [0..1]
Definition: Total of all individual amounts included in the message, irrespective of currencies.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

1.5 InitiatingParty <InitgPty>

Presence: [1..1]
Definition: Party initiating the creditor payment activation request. This can either be the creditor himself or the party that initiates the request on behalf of the creditor.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

2.0 PaymentInformation <PmtInf>

Presence: [1..*]
Impacted by: R10, R11, R12, R13, R14, R5, R6, R7, R8, R9
Definition: Set of characteristics that applies to the debit side of the payment transactions included in the creditor payment initiation.
Type: *The **PaymentInformation** block is composed of the following **PaymentInstruction5** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.2		PaymentMethod	<PmtMtd>	[1..1]	Code
2.3		PaymentTypeInformation	<PmtTpInf>	[0..1]	
2.14		RequestedExecutionDate	<ReqdExctnDt>	[1..1]	DateTime
2.15		Debtor	<Dbtr>	[1..1]	+
2.16		DebtorAccount	<DbtrAcct>	[0..1]	+
2.17		DebtorAgent	<DbtrAgt>	[1..1]	+
2.18		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.19		ChargeBearer	<ChrgBr>	[0..1]	Code
2.20		CreditTransferTransaction	<CdtTrfTx>	[1..*]	

Rule(s): ChargeBearerRule
If ChargeBearer is present, then CreditTransferTransaction/ChargeBearer is not allowed.
If CreditTransferTransaction/ChargeBearer is present, then ChargeBearer is not allowed.
CreditTransferTransaction/ChargeBearer and ChargeBearer may both be absent.

ChequeFromGuideline
CreditTransferTransaction/ChequeInstruction/ChequeFrom may only be present if different from CreditTransferTransaction/UltimateDebtor or Debtor.

ChequeInstructionDeliverToCreditorAgentGuideline
If CreditTransferTransaction/ChequeInstruction/DeliveryMethod is present and is CRFA or MLFA or PUFA or RGFA, then CreditTransferTransaction/ChequeInstruction/DeliverTo may only be present if different than CreditTransferTransaction/Creditor.

ChequeInstructionDeliverToCreditorGuideline
If CreditTransferTransaction/ChequeInstruction/DeliveryMethod is present and is CRCD or MLCD or PUCD or RGCD, then CreditTransferTransaction/ChequeInstruction/DeliverTo may only be present if different from CreditTransferTransaction/Creditor.

ChequeInstructionDeliverToDebtorGuideline
If CreditTransferTransaction/ChequeInstruction/DeliveryMethod is present and if CreditTransferTransaction/ ChequeInstruction/DeliveryMethod/Code is CRDB or MLDB or PUDB or RGDB, then CreditTransferTransaction/ChequeInstruction/DeliverTo may only be present if different than Debtor.

ChequeInstructionRule
If PaymentMethod is CHK, then CreditTransferTransaction/ChequeInstruction is optional.
If PaymentMethod is different from CHK, then CreditTransferTransaction/ChequeInstruction is not allowed.

Rule rationale: ChequeInstructionDetails may be present if the payment method is Cheque. It must not be present if the payment method is 'Transfer'.

CreditorAgentRule
If PaymentMethod is CHK and if CreditTransferTransaction/ ChequeInstruction/DeliveryMethod is present and is equal to MLFA, CRFA, RGFA or PUFA, then CreditTransferTransaction/CreditorAgent is mandatory.

If PaymentMethod is CHK and if CreditTransferTransaction/ ChequeInstruction/DeliveryMethod is not present or is not equal to MLFA, CRFA, RGFA or PUFA, then CreditTransferTransaction/CreditorAgent is not allowed.

CreditorAndOrCreditorAgentRule
If PaymentMethod is CHK, then CreditTransferTransaction/CreditorAccount is not allowed.

If PaymentMethod is different from CHK and if CreditTransferTransaction/Creditor is not present, then CreditTransferTransaction/CreditorAccount is mandatory.

If PaymentMethod is different from CHK and if CreditTransferTransaction/Creditor is present, then CreditTransferTransaction/CreditorAccount is optional.

PaymentTypeInformationRule
If PaymentTypeInformation is present, then CreditTransferTransaction/PaymentTypeInformation is not allowed.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.1 PaymentInformationIdentification <PmtInfId>

Presence: [0..1]

Definition: Reference assigned by a sending party to unambiguously identify the payment information block within the message.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.2 PaymentMethod <PmtMtd>

Presence: [1..1]

Definition: Specifies the means of payment that will be used to move the amount of money.

Data Type: Code

*One of the following **PaymentMethod7Code** values must be used:*

Code	Name	Definition
CHK	Cheque	Written order to a bank to pay a certain amount of money from one person to another person.
TRF	CreditTransfer	Transfer of an amount of money in the books of the account servicer.

2.3 PaymentTypeInformation <PmtTpInf>

Presence: [0..1]

Definition: Set of elements used to further specify the type of transaction.

Type: *This message item is composed of the following **PaymentTypeInformation19** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.4		InstructionPriority	<InstrPrty>	[0..1]	Code
2.5		ServiceLevel	<SvcLvl>	[0..1]	
2.8		LocalInstrument	<LclInstrm>	[0..1]	
2.11		CategoryPurpose	<CtgyPurp>	[0..1]	

2.4 InstructionPriority <InstrPrty>

Presence: [0..1]

Definition: Indicator of the urgency or order of importance that the instructing party would like the instructed party to apply to the processing of the instruction.

Data Type: Code

*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.5 ServiceLevel <SvcLvl>

Presence: [0..1]

Definition: Agreement under which or rules under which the transaction should be processed.

Type: *This message item is composed of one of the following* ***ServiceLevel8Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.6	{Or	Code	<Cd>	[1..1]	Code
2.7	Or}	Proprietary	<Prtry>	[1..1]	Text

2.6 Code <Cd>

Presence: [1..1]

This message item is part of choice ***2.5 ServiceLevel****.*

Definition: Specifies a pre-agreed service or level of service between the parties, as published in an external service level code list.

Data Type: ExternalServiceLevel1Code

Format: maxLength: 4
minLength: 1

2.7 Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice ***2.5 ServiceLevel****.*

Definition: Specifies a pre-agreed service or level of service between the parties, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.8 LocalInstrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.

Usage: This element is used to specify a local instrument, local clearing option and/or further qualify the service or service level.

Type: *This message item is composed of one of the following* ***LocalInstrument2Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.9	{Or	Code	<Cd>	[1..1]	Code
2.10	Or}	Proprietary	<Prtry>	[1..1]	Text

2.9 Code <Cd>

Presence: [1..1]

This message item is part of choice ***2.8 LocalInstrument****.*

Definition: Specifies the local instrument, as published in an external local instrument code list.

Data Type: ExternalLocalInstrument1Code
Format: maxLength: 35
minLength: 1

2.10 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.8 LocalInstrument**.*
Definition: Specifies the local instrument, as a proprietary code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.11 CategoryPurpose <CtgyPurp>

Presence: [0..1]
Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.
Usage: This is used by the initiating party to provide information concerning the processing of the payment. It is likely to trigger special processing by any of the agents involved in the payment chain.
Type: *This message item is composed of one of the following **CategoryPurpose1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.12	{Or	Code	<Cd>	[1..1]	Code
2.13	Or}	Proprietary	<Prtry>	[1..1]	Text

2.12 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.11 CategoryPurpose**.*
Definition: Category purpose, as published in an external category purpose code list.
Data Type: ExternalCategoryPurpose1Code
Format: maxLength: 4
minLength: 1

2.13 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.11 CategoryPurpose**.*
Definition: Category purpose, in a proprietary form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.14 RequestedExecutionDate <ReqdExctnDt>

Presence: [1..1]

Definition: Date at which the initiating party requests the clearing agent to process the payment. If payment by cheque, the date when the cheque must be generated by the bank.

Usage: This is the date on which the debtor's account(s) is (are) to be debited.

Data Type: ISODate

2.15 Debtor <Dbtr>

Presence: [1..1]
Definition: Party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

2.16 DebtorAccount <DbtrAcct>

Presence: [0..1]
Definition: Account used to process charges associated with a transaction.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount7** p.126 in 'Message Item Types' section.*

2.17 DebtorAgent <DbtrAgt>

Presence: [1..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

2.18 UltimateDebtor <UltmtDbtr>

Presence: [0..1]

Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

2.19 ChargeBearer <ChrgBr>

Presence: [0..1]

Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.

Data Type: Code

*When this message item is present, one of the following **ChargeBearerType1Code** values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.20 CreditTransferTransaction <CdtTrfTx>

Presence: [1..*]

Impacted by: G1, G2

Definition: Payment processes required to transfer cash from the debtor to the creditor.

Type: *This message item is composed of the following **CreditTransferTransactionInformation14** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.21		PaymentIdentification	<PmtId>	[1..1]	
2.24		PaymentTypeInformation	<PmtTpInf>	[0..1]	
2.35		Amount	<Amt>	[1..1]	
2.40		ChargeBearer	<ChrgBr>	[1..1]	Code
2.41		ChequeInstruction	<ChqInstr>	[0..1]	
2.59		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.60		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+
2.61		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+
2.62		IntermediaryAgent3	<IntrmyAgt3>	[0..1]	+
2.63		CreditorAgent	<CdtrAgt>	[1..1]	+
2.64		Creditor	<Cdtr>	[1..1]	+
2.65		CreditorAccount	<CdtrAcct>	[0..1]	+
2.66		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.67		InstructionForCreditorAgent	<InstrForCdtrAgt>	[0..*]	
2.70		Purpose	<Purp>	[0..1]	
2.73		RegulatoryReporting	<RgltryRptg>	[0..10]	+
2.74		Tax	<Tax>	[0..1]	+
2.75		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]	
2.82		RemittanceInformation	<RmtInf>	[0..1]	

Rule(s): InstructionForCreditorAgentRule
If InstructionForCreditorAgent/Code contains CHQB, then CreditorAccount is not allowed.

IntermediaryAgent2Rule
If IntermediaryAgent2 is present, then IntermediaryAgent1 must be present.

IntermediaryAgent3Rule
If IntermediaryAgent3 is present, then IntermediaryAgent2 must be present.

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.21 PaymentIdentification <PmtId>

Presence: [1..1]

Definition: Set of elements used to reference a payment instruction.

Type: *This message item is composed of the following **PaymentIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.22		InstructionIdentification	<InstrId>	[0..1]	Text
2.23		EndToEndIdentification	<EndToEndId>	[1..1]	Text

2.22 InstructionIdentification <InstrId>

Presence: [0..1]

Definition: Unique identification as assigned by an instructing party for an instructed party to unambiguously identify the instruction.

Usage: the instruction identification is a point to point reference that can be used between the instructing party and the instructed party to refer to the individual instruction. It can be included in several messages related to the instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.23 EndToEndIdentification <EndToEndId>

Presence: [1..1]

Definition: Unique identification assigned by the initiating party to unumbiguously identify the transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain.

Usage: The end-to-end identification can be used for reconciliation or to link tasks relating to the transaction. It can be included in several messages related to the transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.24 PaymentTypeInformation <PmtTpInf>

Presence: [0..1]

Definition: Set of elements used to further specify the type of transaction.

Type: *This message item is composed of the following **PaymentTypeInformation19** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.25		InstructionPriority	<InstrPrty>	[0..1]	Code
2.26		ServiceLevel	<SvcLvl>	[0..1]	
2.29		LocalInstrument	<LclInstrm>	[0..1]	
2.32		CategoryPurpose	<CtgyPurp>	[0..1]	

2.25 InstructionPriority <InstrPrty>

Presence: [0..1]

Definition: Indicator of the urgency or order of importance that the instructing party would like the instructed party to apply to the processing of the instruction.

Data Type: Code
*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.26 ServiceLevel <SvcLvl>

Presence: [0..1]
Definition: Agreement under which or rules under which the transaction should be processed.
Type: *This message item is composed of one of the following **ServiceLevel8Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.27	{Or	Code	<Cd>	[1..1]	Code
2.28	Or}	Proprietary	<Prtry>	[1..1]	Text

2.27 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.26 ServiceLevel**.*
Definition: Specifies a pre-agreed service or level of service between the parties, as published in an external service level code list.
Data Type: ExternalServiceLevel1Code
Format: maxLength: 4
minLength: 1

2.28 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.26 ServiceLevel**.*
Definition: Specifies a pre-agreed service or level of service between the parties, as a proprietary code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.29 LocalInstrument <LclInstrm>

Presence: [0..1]
Definition: User community specific instrument.

Usage: This element is used to specify a local instrument, local clearing option and/or further qualify the service or service level.

Type: *This message item is composed of one of the following **LocalInstrument2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.30	{Or	Code	<Cd>	[1..1]	Code

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text

2.30 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.29 LocalInstrument**.*

Definition: Specifies the local instrument, as published in an external local instrument code list.

Data Type: ExternalLocalInstrument1Code

Format: maxLength: 35
minLength: 1

2.31 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.29 LocalInstrument**.*

Definition: Specifies the local instrument, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.32 CategoryPurpose <CtgyPurp>

Presence: [0..1]

Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.
Usage: This is used by the initiating party to provide information concerning the processing of the payment. It is likely to trigger special processing by any of the agents involved in the payment chain.

Type: *This message item is composed of one of the following **CategoryPurpose1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.33	{Or	Code	<Cd>	[1..1]	Code
2.34	Or}	Proprietary	<Prtry>	[1..1]	Text

2.33 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.32 CategoryPurpose**.*

Definition: Category purpose, as published in an external category purpose code list.

Data Type: ExternalCategoryPurpose1Code

Format: maxLength: 4
minLength: 1

2.34 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.32 CategoryPurpose**.*

Definition: Category purpose, in a proprietary form.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.35 Amount <Amt>

Presence: [1..1]
Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.
Type: *This message item is composed of one of the following **AmountType3Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.36	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount
2.37	Or}	EquivalentAmount	<EqvtAmt>	[1..1]	

2.36 InstructedAmount <InstdAmt>

Presence: [1..1]
Impacted by: R21, R22
*This message item is part of choice **2.35 Amount**.*
Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.
Data Type: ActiveOrHistoricCurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveOrHistoricCurrencyCode**.*
Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}
Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.37 EquivalentAmount <EqvtAmt>

Presence: [1..1]
*This message item is part of choice **2.35 Amount**.*
Definition: Amount of money to be moved between the debtor and creditor, expressed in the currency of the debtor's account, and the currency in which the amount is to be moved.
Type: *This message item is composed of the following **EquivalentAmount2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.38		Amount	<Amt>	[1..1]	Amount
2.39		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code

2.38 Amount <Amt>

Presence: [1..1]

Impacted by: R21, R22

Definition: Amount of money to be moved between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be moved in a different currency.
Usage: The first agent will convert the equivalent amount into the amount to be moved.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.39 CurrencyOfTransfer <CcyOfTrf>

Presence: [1..1]

Impacted by: R22

Definition: Specifies the currency of the to be transferred amount, which is different from the currency of the debtor's account.

Data Type: ActiveOrHistoricCurrencyCode

Format: [A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.40 ChargeBearer <ChrgBr>

Presence: [1..1]

Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.

Data Type: Code
*One of the following **ChargeBearerType1Code** values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.41 ChequeInstruction <ChqInstr>

Presence: [0..1]
Definition: Set of elements needed to issue a cheque.
Type: *This message item is composed of the following **Cheque6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.42		ChequeType	<ChqTp>	[0..1]	Code
2.43		ChequeNumber	<ChqNb>	[0..1]	Text
2.44		ChequeFrom	<ChqFr>	[0..1]	
2.47		DeliveryMethod	<DlvryMtd>	[0..1]	
2.50		DeliverTo	<DlvrTo>	[0..1]	
2.53		InstructionPriority	<InstrPrty>	[0..1]	Code
2.54		ChequeMaturityDate	<ChqMtrtyDt>	[0..1]	DateTime
2.55		FormsCode	<FrmsCd>	[0..1]	Text
2.56		MemoField	<MemoFld>	[0..2]	Text
2.57		RegionalClearingZone	<RgnlClrZone>	[0..1]	Text
2.58		PrintLocation	<PrtLctn>	[0..1]	Text

Rule(s): ChequeMaturityDateRule
If ChequeMaturityDate is present, then ChequeType must be present and equal to DRFT or ELDR.

2.42 ChequeType <ChqTp>

Presence: [0..1]
Definition: Specifies the type of cheque to be issued.
Data Type: Code
*When this message item is present, one of the following **ChequeType2Code** values must be used:*

Code	Name	Definition
BCHQ	BankCheque	Cheque drawn on the account of the debtor's financial institution, which is debited on the debtor's account when the cheque is issued.These cheques are printed by the debtor's financial institution and payment is guaranteed by the financial institution. Synonym is 'cashier's cheque'.
CCCH	CertifiedCustomerCheque	Cheque drawn on the account of the debtor, and debited on the debtor's account when the cheque is cashed. The financial institution prints and certifies the cheque, guaranteeing the payment.
CCHQ	CustomerCheque	Cheque drawn on the account of the debtor, and debited on the debtor's account when the cheque is cashed. Synonym is 'corporate cheque'.
DRFT	Draft	A guaranteed bank cheque with a future value date (do not pay before], which in commercial terms is a 'negotiatable instrument': the beneficiary can receive early payment from any bank under subtraction of a discount. The ordering customer's account is debited on value date.
ELDR	ElectronicDraft	An instrument with a future value date (do not pay before], which in commercial terms is a 'negotiatable instrument': the beneficiary can receive early payment from any bank under subtraction of a discount. The ordering customer's account is debited on value date.

2.43 ChequeNumber <ChqNb>

Presence: [0..1]
Definition: Unique and unambiguous identifier for a cheque as assigned by the agent.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.44 ChequeFrom <ChqFr>

Presence: [0..1]
Definition: Identifies the party that ordered the issuance of the cheque.
Type: *This message item is composed of the following **NameAndAddress10** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.45		Name	<Nm>	[1..1]	Text
2.46		Address	<Adr>	[1..1]	+

2.45 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and is usually used to identify that identity.
Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.46 Address <Adr>

Presence: [1..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	Department	<Dept>	[0..1]	Text
	SubDepartment	<SubDept>	[0..1]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[0..1]	Code
	AddressLine	<AdrLine>	[0..7]	Text

*For additional Type information, please refer to **PostalAddress6** p.150 in 'Message Item Types' section.*

2.47 DeliveryMethod <DlvryMtd>

Presence: [0..1]
Definition: Specifies the delivery method of the cheque by the debtor's agent.
Type: *This message item is composed of one of the following **ChequeDeliveryMethod1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.48	{Or	Code	<Cd>	[1..1]	Code
2.49	Or}	Proprietary	<Prtry>	[1..1]	Text

2.48 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.47 DeliveryMethod**.*
Definition: Specifies the delivery method of the cheque by the debtor's agent.
Data Type: Code
*One of the following **ChequeDelivery1Code** values must be used:*

Code	Name	Definition
CRCD	CourierToCreditor	Cheque is to be sent through courier services to creditor.
CRDB	CourierToDebtor	Cheque is to be sent through courier services to debtor.

Code	Name	Definition
CRFA	CourierToFinalAgent	Cheque is to be sent through courier services to creditor agent.
MLCD	MailToCreditor	Cheque is to be sent through mail services to creditor.
MLDB	MailToDebtor	Cheque is to be sent through mail services to debtor.
MLFA	MailToFinalAgent	Cheque is to be sent through mail services to creditor agent.
PUCD	PickUpByCreditor	Cheque will be picked up by the creditor
PUDB	PickUpByDebtor	Cheque will be picked up by the debtor.
PUFA	PickUpByFinalAgent	Cheque will be picked up by the creditor agent.
RGCD	RegisteredMailToCreditor	Cheque is to be sent through registered mail services to creditor.
RGDB	RegisteredMailToDebtor	Cheque is to be sent through registered mail services to debtor
RGFA	RegisteredMailToFinalAgent	Cheque is to be sent through registered mail services to creditor agent.

2.49 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.47 DeliveryMethod**.*

Definition: Specifies a proprietary delivery method of the cheque by the debtor's agent.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.50 DeliverTo <DlvrTo>

Presence: [0..1]

Definition: Party to whom the debtor's agent needs to send the cheque.

Type: *This message item is composed of the following **NameAndAddress10** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.51		Name	<Nm>	[1..1]	Text
2.52		Address	<Adr>	[1..1]	+

2.51 Name <Nm>

Presence: [1..1]

Definition: Name by which a party is known and is usually used to identify that identity.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.52 Address <Adr>

Presence: [1..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	Department	<Dept>	[0..1]	Text
	SubDepartment	<SubDept>	[0..1]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[0..1]	Code
	AddressLine	<AdrLine>	[0..7]	Text

*For additional Type information, please refer to **PostalAddress6** p.150 in 'Message Item Types' section.*

2.53 InstructionPriority <InstrPrty>

Presence: [0..1]
Definition: Urgency or order of importance that the originator would like the recipient of the payment instruction to apply to the processing of the payment instruction.
Data Type: Code
*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.54 ChequeMaturityDate <ChqMtrtyDt>

Presence: [0..1]
Impacted by: R23
Definition: Date when the draft becomes payable and the debtor's account is debited.
Data Type: ISODate

2.55 FormsCode <FrmsCd>

Presence: [0..1]
Definition: Identifies, in a coded form, the cheque layout, company logo and digitised signature to be used to print the cheque, as agreed between the initiating party and the debtor's agent.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.56 MemoField <MemoFld>

Presence: [0..2]

Definition: Information that needs to be printed on a cheque, used by the payer to add miscellaneous information.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.57 RegionalClearingZone <RgnlClrZone>

Presence: [0..1]

Definition: Regional area in which the cheque can be cleared, when a country has no nation-wide cheque clearing organisation.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.58 PrintLocation <PrtLctn>

Presence: [0..1]

Definition: Specifies the print location of the cheque.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.59 UltimateDebtor <UltmtDbtr>

Presence: [0..1]

Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

2.60 IntermediaryAgent1 <IntrmyAgt1>

Presence: [0..1]

Impacted by: R18

Definition: Agent between the debtor's agent and the creditor's agent.

Usage: If more than one intermediary agent is present, then IntermediaryAgent1 identifies the agent between the DebtorAgent and the IntermediaryAgent2.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

2.61 IntermediaryAgent2 <IntrmyAgt2>

Presence: [0..1]
Impacted by: R19
Definition: Agent between the debtor's agent and the creditor's agent.

Usage: If more than two intermediary agents are present, then IntermediaryAgent2 identifies the agent between the IntermediaryAgent1 and the IntermediaryAgent3.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

2.62 IntermediaryAgent3 <IntrmyAgt3>

Presence: [0..1]
Definition: Agent between the debtor's agent and the creditor's agent.

Usage: If IntermediaryAgent3 is present, then it identifies the agent between the IntermediaryAgent 2 and the CreditorAgent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

2.63 CreditorAgent <CdtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the creditor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

2.64 Creditor <Cdtr>

Presence: [1..1]

Definition: Party to which an amount of money is due.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

2.65 CreditorAccount <CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.122 in 'Message Item Types' section.*

2.66 UltimateCreditor <UltmtCdtr>

Presence: [0..1]
Definition: Ultimate party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

2.67 InstructionForCreditorAgent <InstrForCdtrAgt>

Presence: [0..*]
Definition: Further information related to the processing of the payment instruction, provided by the initiating party, and intended for the creditor agent.
Type: *This message item is composed of the following **InstructionForCreditorAgent1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.68		Code	<Cd>	[0..1]	Code
2.69		InstructionInformation	<InstrInf>	[0..1]	Text

2.68 Code <Cd>

Presence: [0..1]
Impacted by: R20
Definition: Coded information related to the processing of the payment instruction, provided by the initiating party, and intended for the creditor's agent.
Data Type: Code
*When this message item is present, one of the following **Instruction3Code** values must be used:*

Code	Name	Definition
CHQB	PayCreditorByCheque	(Ultimate) creditor must be paid by cheque.
HOLD	HoldCashForCreditor	Amount of money must be held for the (ultimate) creditor, who will call. Pay on identification.
PHOB	PhoneBeneficiary	Please advise/contact (ultimate) creditor/claimant by phone
TELB	Telecom	Please advise/contact (ultimate) creditor/claimant by the most efficient means of telecommunication.

2.69 InstructionInformation <InstrInf>

Presence: [0..1]

Definition: Further information complementing the coded instruction or instruction to the creditor's agent that is bilaterally agreed or specific to a user community.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.70 Purpose <Purp>

Presence: [0..1]

Definition: Underlying reason for the payment transaction.
Usage: Purpose is used by the end-customers, that is initiating party, (ultimate) debtor, (ultimate) creditor to provide information concerning the nature of the payment. Purpose is a content element, which is not used for processing by any of the agents involved in the payment chain.

Type: *This message item is composed of one of the following **Purpose2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.71	{Or	Code	<Cd>	[1..1]	Code
2.72	Or}	Proprietary	<Prtry>	[1..1]	Text

2.71 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.70 Purpose**.*

Definition: Underlying reason for the payment transaction, as published in an external purpose code list.

Data Type: ExternalPurpose1Code

Format: maxLength: 4
minLength: 1

2.72 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.70 Purpose**.*

Definition: Purpose, in a proprietary form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.73 RegulatoryReporting <RgltryRptg>

Presence: [0..10]

Definition: Information needed due to regulatory and statutory requirements.

Type: *This message item is composed of the following **RegulatoryReporting3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	DebitCreditReportingIndicator	<DbtCdtRptgInd>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Authority	<Authrty>	[0..1]	
	Details	<Dtls>	[0..*]	

*For additional Type information, please refer to **RegulatoryReporting3** p.152 in 'Message Item Types' section.*

2.74 Tax <Tax>

Presence: [0..1]
Definition: Set of elements used to provide details on the tax.
Type: *This message item is composed of the following **TaxInformation3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Creditor	<Cdtr>	[0..1]	
	Debtor	<Dbtr>	[0..1]	
	AdministrationZone	<AdmstnZn>	[0..1]	Text
	ReferenceNumber	<RefNb>	[0..1]	Text
	Method	<Mtd>	[0..1]	Text
	TotalTaxableBaseAmount	<TtlTaxblBaseAmt>	[0..1]	Amount
	TotalTaxAmount	<TtlTaxAmt>	[0..1]	Amount
	Date	<Dt>	[0..1]	DateTime
	SequenceNumber	<SeqNb>	[0..1]	Quantity
	Record	<Rcrd>	[0..*]	

*For additional Type information, please refer to **TaxInformation3** p.155 in 'Message Item Types' section.*

2.75 RelatedRemittanceInformation <RltdRmtInf>

Presence: [0..10]
Definition: Set of elements used to provide information related to the handling of the remittance information by any of the agents in the transaction processing chain.
Type: *This message item is composed of the following **RemittanceLocation2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.76		RemittanceIdentification	<RmtId>	[0..1]	Text
2.77		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code
2.78		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text
2.79		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]	

2.76 RemittanceIdentification <RmtId>

Presence: [0..1]

Definition: Unique identification, as assigned by the initiating party, to unambiguously identify the remittance information sent separately from the payment instruction, such as a remittance advice.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.77 RemittanceLocationMethod <RmtLctnMtd>

Presence: [0..1]

Definition: Method used to deliver the remittance advice information.

Data Type: Code

*When this message item is present, one of the following **RemittanceLocationMethod2Code** values must be used:*

Code	Name	Definition
EDIC	ElectronicDataInterchange	Remittance advice information must be sent through Electronic Data Interchange (EDI).
EMAL	EMail	Remittance advice information must be sent through e-mail.
FAXI	Fax	Remittance advice information must be faxed.
POST	Post	Remittance advice information must be sent through postal services.
SMSM	SMS	Remittance advice information must be sent through by phone as a short message service (SMS).
URID	UniformResourceIdentifier	Remittance advice information needs to be sent to a Uniform Resource Identifier (URI). URI is a compact string of characters that uniquely identify an abstract or physical resource. URI's are the super-set of identifiers, such as URLs, email addresses, ftp sites, etc, and as such, provide the syntax for all of the identification schemes.

2.78 RemittanceLocationElectronicAddress <RmtLctnElctrncAdr>

Presence: [0..1]

Definition: Electronic address to which an agent is to send the remittance information.

Data Type: Max2048Text

Format: maxLength: 2048
minLength: 1

2.79 RemittanceLocationPostalAddress <RmtLctnPstlAdr>

Presence: [0..1]

Definition: Postal address to which an agent is to send the remittance information.

Type: *This message item is composed of the following **NameAndAddress10** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.80		Name	<Nm>	[1..1]	Text
2.81		Address	<Adr>	[1..1]	+

2.80 Name <Nm>

Presence: [1..1]

Definition: Name by which a party is known and is usually used to identify that identity.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.81 Address <Adr>

Presence: [1..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress6** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	Department	<Dept>	[0..1]	Text
	SubDepartment	<SubDept>	[0..1]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[0..1]	Code
	AddressLine	<AdrLine>	[0..7]	Text

*For additional Type information, please refer to **PostalAddress6** p.150 in 'Message Item Types' section.*

2.82 RemittanceInformation <RmtInf>

Presence: [0..1]

Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, such as commercial invoices in an accounts' receivable system.

Type: *This message item is composed of the following **RemittanceInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.83		Unstructured	<Ustrd>	[0..*]	Text
2.84		Structured	<Strd>	[0..*]	

2.83 Unstructured <Ustrd>

Presence: [0..*]

Definition: Information supplied to enable the matching/reconciliation of an entry with the items that the payment is intended to settle, such as commercial invoices in an accounts' receivable system, in an unstructured form.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.84 Structured <Strd>

Presence: [0..*]

Definition: Information supplied to enable the matching/reconciliation of an entry with the items that the payment is intended to settle, such as commercial invoices in an accounts' receivable system, in a structured form.

Type: *This message item is composed of the following **StructuredRemittanceInformation8** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.85		ReferredDocumentInformation	<RfrdDocInf>	[0..*]	
2.93		ReferredDocumentAmount	<RfrdDocAmt>	[0..1]	
2.104		CreditorReferenceInformation	<CdtrRefInf>	[0..1]	
2.111		Invoicer	<Invcr>	[0..1]	+
2.112		Invoicee	<Invcee>	[0..1]	+
2.113		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..3]	Text

2.85 ReferredDocumentInformation <RfrdDocInf>

Presence: [0..*]

Definition: Set of elements used to identify the documents referred to in the remittance information.

Type: *This message item is composed of the following **ReferredDocumentInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.86		Type	<Tp>	[0..1]	
2.91		Number	<Nb>	[0..1]	Text
2.92		RelatedDate	<RltdDt>	[0..1]	DateTime

2.86 Type <Tp>

Presence: [0..1]

Definition: Specifies the type of referred document.

Type: *This message item is composed of the following **ReferredDocumentType2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.87		CodeOrProprietary	<CdOrPrtry>	[1..1]	
2.90		Issuer	<Issr>	[0..1]	Text

2.87 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]

Definition: Provides the type details of the referred document.

Type: *This message item is composed of one of the following **ReferredDocumentType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.88	{Or	Code	<Cd>	[1..1]	Code
2.89	Or}	Proprietary	<Prtry>	[1..1]	Text

2.88 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.87 CodeOrProprietary**.*
Definition: Document type in a coded form.
Data Type: Code
*One of the following **DocumentType5Code** values must be used:*

Code	Name	Definition
AROI	AccountReceivableOpenItem	Document is a payment that applies to a specific source document.
BOLD	BillOfLading	Document is a shipping notice.
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.
TSUT	TradeServicesUtilityTransaction	Document is a transaction identifier as assigned by the Trade Services Utility.
VCHR	Voucher	Document is an electronic payment document.

2.89 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.87 CodeOrProprietary**.*

Definition: Proprietary identification of the type of the remittance document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.90 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the reference document type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.91 Number <Nb>

Presence: [0..1]
Definition: Unique and unambiguous identification of the referred document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.92 RelatedDate <RltdDt>

Presence: [0..1]
Definition: Date associated with the referred document.
Data Type: ISODate

2.93 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..1]
Definition: Set of elements used to provide details on the amounts of the referred document.
Type: *This message item is composed of the following **RemittanceAmount1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.94		DuePayableAmount	<DuePyblAmt>	[0..1]	Amount
2.95		DiscountAppliedAmount	<DscntApldAmt>	[0..1]	Amount
2.96		CreditNoteAmount	<CdtNoteAmt>	[0..1]	Amount
2.97		TaxAmount	<TaxAmt>	[0..1]	Amount
2.98		AdjustmentAmountAndReason	<AdjstmntAmtAndRsn>	[0..*]	
2.103		RemittedAmount	<RmtdAmt>	[0..1]	Amount

2.94 DuePayableAmount <DuePyblAmt>

Presence: [0..1]
Impacted by: R21, R22
Definition: Amount specified is the exact amount due and payable to the creditor.
Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: ActiveOrHistoricCurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrencyAndAmount
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.95 DiscountAppliedAmount <DscntApldAmt>

Presence: [0..1]

Impacted by: R21, R22

Definition: Amount of money that results from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: ActiveOrHistoricCurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrencyAndAmount
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.96 CreditNoteAmount <CdtNoteAmt>

Presence: [0..1]

Impacted by: R21, R22

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: ActiveOrHistoricCurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrencyAndAmount
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.97 TaxAmount <TaxAmt>

Presence: [0..1]

Impacted by: R21, R22

Definition: Quantity of cash resulting from the calculation of the tax.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: ActiveOrHistoricCurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrencyAndAmount
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.98 AdjustmentAmountAndReason <AdjstmntAmtAndRsn>

Presence: [0..*]

Definition: Set of elements used to provide information on the amount and reason of the document adjustment.

Type: *This message item is composed of the following* ***DocumentAdjustment1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.99		Amount	<Amt>	[1..1]	Amount
2.100		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
2.101		Reason	<Rsn>	[0..1]	Text
2.102		AdditionalInformation	<AddtlInf>	[0..1]	Text

2.99 Amount <Amt>

Presence: [1..1]
Impacted by: R21, R22
Definition: Amount of money of the document adjustment.
Data Type: ActiveOrHistoricCurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*
Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}
Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.100 CreditDebitIndicator <CdtDbtInd>

Presence: [0..1]
Definition: Specifies whether the adjustment must be substracted or added to the total amount.
Data Type: Code
When this message item is present, one of the following ***CreditDebitCode*** *values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

2.101 Reason <Rsn>

Presence: [0..1]
Definition: Specifies the reason for the adjustment.
Data Type: Max4Text

Format: maxLength: 4
minLength: 1

2.102 AdditionalInformation <AddtlInf>

Presence: [0..1]

Definition: Provides further details on the document adjustment.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.103 RemittedAmount <RmtdAmt>

Presence: [0..1]

Impacted by: R21, R22

Definition: Amount of money remitted for the referred document.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.104 CreditorReferenceInformation <CdtrRefInf>

Presence: [0..1]

Definition: Reference information provided by the creditor to allow the identification of the underlying documents.

Type: *This message item is composed of the following* ***CreditorReferenceInformation2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.105		Type	<Tp>	[0..1]	
2.110		Reference	<Ref>	[0..1]	Text

2.105 Type <Tp>

Presence: [0..1]

Definition: Specifies the type of creditor reference.

Type: *This message item is composed of the following* ***CreditorReferenceType2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.106		CodeOrProprietary	<CdOrPrtry>	[1..1]	
2.109		Issuer	<Issr>	[0..1]	Text

2.106 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]
Definition: Coded or proprietary format creditor reference type.
Type: *This message item is composed of one of the following* ***CreditorReferenceType1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.107	{Or	Code	<Cd>	[1..1]	Code
2.108	Or}	Proprietary	<Prtry>	[1..1]	Text

2.107 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.106 CodeOrProprietary****.*
Definition: Type of creditor reference, in a coded form.
Data Type: Code
One of the following ***DocumentType3Code*** *values must be used:*

Code	Name	Definition
DISP	DispatchAdvice	Document is a dispatch advice.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
PUOR	PurchaseOrder	Document is a purchase order.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SCOR	StructuredCommunicationReference	Document is a structured communication reference provided by the creditor to identify the referred transaction.

2.108 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***2.106 CodeOrProprietary****.*
Definition: Creditor reference type, in a proprietary form.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.109 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the credit reference type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.110 Reference <Ref>

Presence: [0..1]

Definition: Unique reference, as assigned by the creditor, to unambiguously refer to the payment transaction.

Usage: If available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the amount of money.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.111 Invoicer <Invcr>

Presence: [0..1]

Definition: Identification of the organisation issuing the invoice, when it is different from the creditor or ultimate creditor.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

2.112 Invoicee <Invcee>

Presence: [0..1]

Definition: Identification of the party to whom an invoice is issued, when it is different from the debtor or ultimate debtor.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

2.113 AdditionalRemittanceInformation <AddtlRmtInf>

Presence: [0..3]

Definition: Additional information, in free text form, to complement the structured remittance information.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

pain.014.001.01 CreditorPaymentActivationRequestStatusReportV01

Message Functionality

Scope

This message is sent by a party to the next party in the creditor payment activation request chain.
It is used to inform the latter about the positive or negative status of a creditor payment activation request (either single or file).

Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<CdtrPmtActvtnReqStsRpt>	[1..1]		R1, R2, R3, R4

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		InitiatingParty	<InitgPty>	[1..1]	+	
1.4		DebtorAgent	<DbtrAgt>	[0..1]	+	
1.5		CreditorAgent	<CdtrAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		OriginalGroupInformationAndStatus	<OrgnlGrpInfAndSts>	[1..1]		G1
2.1		OriginalMessageIdentification	<OrgnlMsgId>	[1..1]	Text	
2.2		OriginalMessageNameIdentification	<OrgnlMsgNmId>	[1..1]	Text	
2.3		OriginalCreationDateTime	<OrgnlCreDtTm>	[0..1]	DateTime	
2.4		OriginalNumberOfTransactions	<OrgnlNbOfTxs>	[0..1]	Text	
2.5		OriginalControlSum	<OrgnlCtrlSum>	[0..1]	Quantity	
2.6		GroupStatus	<GrpSts>	[0..1]	Code	R8
2.7		StatusReasonInformation	<StsRsnInf>	[0..*]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.8		Originator	<Orgtr>	[0..1]	+	
2.9		Reason	<Rsn>	[0..1]		
2.10	{Or	Code	<Cd>	[1..1]	Code	
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.12		AdditionalInformation	<AddtlInf>	[0..*]	Text	R9
2.13		NumberOfTransactionsPerStatus	<NbOfTxsPerSts>	[0..*]		
2.14		DetailedNumberOfTransactions	<DtldNbOfTxs>	[1..1]	Text	
2.15		DetailedStatus	<DtldSts>	[1..1]	Code	
2.16		DetailedControlSum	<DtldCtrlSum>	[0..1]	Quantity	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.0		OriginalPaymentInformationAndStatus	<OrgnlPmtInfAndSts>	[0..*]		
3.1		OriginalPaymentInformationIdentification	<OrgnlPmtInfId>	[1..1]	Text	
3.2		OriginalNumberOfTransactions	<OrgnlNbOfTxs>	[0..1]	Text	
3.3		OriginalControlSum	<OrgnlCtrlSum>	[0..1]	Quantity	
3.4		PaymentInformationStatus	<PmtInfSts>	[0..1]	Code	
3.5		StatusReasonInformation	<StsRsnInf>	[0..*]		
3.6		Originator	<Orgtr>	[0..1]	+	
3.7		Reason	<Rsn>	[0..1]		
3.8	{Or	Code	<Cd>	[1..1]	Code	
3.9	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.10		AdditionalInformation	<AddtlInf>	[0..*]	Text	R9
3.11		NumberOfTransactionsPerStatus	<NbOfTxsPerSts>	[0..*]		
3.12		DetailedNumberOfTransactions	<DtldNbOfTxs>	[1..1]	Text	
3.13		DetailedStatus	<DtldSts>	[1..1]	Code	
3.14		DetailedControlSum	<DtldCtrlSum>	[0..1]	Quantity	
3.15		TransactionInformationAndStatus	<TxInfAndSts>	[0..*]		
3.16		StatusIdentification	<StsId>	[0..1]	Text	
3.17		OriginalInstructionIdentification	<OrgnlInstrId>	[0..1]	Text	
3.18		OriginalEndToEndIdentification	<OrgnlEndToEndId>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.19		TransactionStatus	<TxSts>	[0..1]	Code	R10, R11, R12, R13
3.20		StatusReasonInformation	<StsRsnInf>	[0..*]		
3.21		Originator	<Orgtr>	[0..1]	+	
3.22		Reason	<Rsn>	[0..1]		
3.23	{Or	Code	<Cd>	[1..1]	Code	
3.24	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.25		AdditionalInformation	<AddtlInf>	[0..*]	Text	R9
3.26		ChargesInformation	<ChrgsInf>	[0..*]		
3.27		Amount	<Amt>	[1..1]	Amount	R14, R15
3.28		Party	<Pty>	[1..1]	+	
3.29		AcceptanceDateTime	<AccptncDtTm>	[0..1]	DateTime	
3.30		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text	
3.31		ClearingSystemReference	<ClrSysRef>	[0..1]	Text	
3.32		OriginalTransactionReference	<OrgnlTxRef>	[0..1]		
3.33		InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount	R14, R15
3.34		Amount	<Amt>	[0..1]		
3.35	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount	R14, R15
3.36	Or}	EquivalentAmount	<EqvtAmt>	[1..1]		
3.37		Amount	<Amt>	[1..1]	Amount	R14, R15
3.38		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code	R15
3.39		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime	
3.40		RequestedCollectionDate	<ReqdColltnDt>	[0..1]	DateTime	
3.41		RequestedExecutionDate	<ReqdExctnDt>	[0..1]	DateTime	
3.42		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
3.43		SettlementInformation	<SttlmInf>	[0..1]		
3.44		SettlementMethod	<SttlmMtd>	[1..1]	Code	
3.45		SettlementAccount	<SttlmAcct>	[0..1]	+	R18, R20
3.46		ClearingSystem	<ClrSys>	[0..1]		R17, R18

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.47	{Or	Code	<Cd>	[1..1]	Code	
3.48	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.49		InstructingReimbursementAgent	<InstgRmbrsmntAgt>	[0..1]	+	R16, R17, R19, R20
3.50		InstructingReimbursementAgentAccount	<InstgRmbrsmntAgtAcct>	[0..1]	+	R21
3.51		InstructedReimbursementAgent	<InstdRmbrsmntAgt>	[0..1]	+	R16, R17, R19, R20
3.52		InstructedReimbursementAgentAccount	<InstdRmbrsmntAgtAcct>	[0..1]	+	R22
3.53		ThirdReimbursementAgent	<ThrdRmbrsmntAgt>	[0..1]	+	R17, R20
3.54		ThirdReimbursementAgentAccount	<ThrdRmbrsmntAgtAcct>	[0..1]	+	R23
3.55		PaymentTypeInformation	<PmtTpInf>	[0..1]		
3.56		InstructionPriority	<InstrPrty>	[0..1]	Code	
3.57		ClearingChannel	<ClrChanl>	[0..1]	Code	
3.58		ServiceLevel	<SvcLvl>	[0..1]		
3.59	{Or	Code	<Cd>	[1..1]	Code	
3.60	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.61		LocalInstrument	<LclInstrm>	[0..1]		
3.62	{Or	Code	<Cd>	[1..1]	Code	
3.63	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.64		SequenceType	<SeqTp>	[0..1]	Code	
3.65		CategoryPurpose	<CtgyPurp>	[0..1]		
3.66	{Or	Code	<Cd>	[1..1]	Code	
3.67	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.68		PaymentMethod	<PmtMtd>	[0..1]	Code	
3.69		MandateRelatedInformation	<MndtRltdInf>	[0..1]		
3.70		MandateIdentification	<MndtId>	[0..1]	Text	
3.71		DateOfSignature	<DtOfSgntr>	[0..1]	DateTime	
3.72		AmendmentIndicator	<AmdmntInd>	[0..1]	Indicator	
3.73		AmendmentInformationDetails	<AmdmntInfDtls>	[0..1]		R25, R26

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.74		OriginalMandateIdentification	<OrgnlMndtId>	[0..1]	Text	
3.75		OriginalCreditorSchemeIdentification	<OrgnlCdtrSchmeId>	[0..1]	+	
3.76		OriginalCreditorAgent	<OrgnlCdtrAgt>	[0..1]	+	
3.77		OriginalDebtor	<OrgnlDbtr>	[0..1]	+	
3.78		OriginalDebtorAccount	<OrgnlDbtrAcct>	[0..1]	+	
3.79		OriginalDebtorAgent	<OrgnlDbtrAgt>	[0..1]	+	
3.80		OriginalFinalCollectionDate	<OrgnlFnlColltnDt>	[0..1]	DateTime	
3.81		OriginalFrequency	<OrgnlFrqcy>	[0..1]	Code	
3.82		ElectronicSignature	<ElctrncSgntr>	[0..1]	Text	
3.83		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	
3.84		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
3.85		Frequency	<Frqcy>	[0..1]	Code	
3.86		RemittanceInformation	<RmtInf>	[0..1]		
3.87		Unstructured	<Ustrd>	[0..*]	Text	
3.88		Structured	<Strd>	[0..*]		
3.89		ReferredDocumentInformation	<RfrdDocInf>	[0..*]		
3.90		Type	<Tp>	[0..1]		
3.91		CodeOrProprietary	<CdOrPrtry>	[1..1]		
3.92	{Or	Code	<Cd>	[1..1]	Code	
3.93	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.94		Issuer	<Issr>	[0..1]	Text	
3.95		Number	<Nb>	[0..1]	Text	
3.96		RelatedDate	<RltdDt>	[0..1]	DateTime	
3.97		ReferredDocumentAmount	<RfrdDocAmt>	[0..1]		
3.98		DuePayableAmount	<DuePyblAmt>	[0..1]	Amount	R14, R15
3.99		DiscountAppliedAmount	<DscntApldAmt>	[0..1]	Amount	R14, R15
3.100		CreditNoteAmount	<CdtNoteAmt>	[0..1]	Amount	R14, R15
3.101		TaxAmount	<TaxAmt>	[0..1]	Amount	R14, R15
3.102		AdjustmentAmountAndReason	<AdjstmntAmtAndRsn>	[0..*]		
3.103		Amount	<Amt>	[1..1]	Amount	R14, R15

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.104		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code	
3.105		Reason	<Rsn>	[0..1]	Text	
3.106		AdditionalInformation	<AddtlInf>	[0..1]	Text	
3.107		RemittedAmount	<RmtdAmt>	[0..1]	Amount	R14, R15
3.108		CreditorReferenceInformation	<CdtrRefInf>	[0..1]		
3.109		Type	<Tp>	[0..1]		
3.110		CodeOrProprietary	<CdOrPrtry>	[1..1]		
3.111	{Or	Code	<Cd>	[1..1]	Code	
3.112	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.113		Issuer	<Issr>	[0..1]	Text	
3.114		Reference	<Ref>	[0..1]	Text	
3.115		Invoicer	<Invcr>	[0..1]	+	
3.116		Invoicee	<Invcee>	[0..1]	+	
3.117		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..3]	Text	
3.118		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
3.119		Debtor	<Dbtr>	[0..1]	+	
3.120		DebtorAccount	<DbtrAcct>	[0..1]	+	
3.121		DebtorAgent	<DbtrAgt>	[0..1]	+	
3.122		CreditorAgent	<CdtrAgt>	[1..1]	+	
3.123		Creditor	<Cdtr>	[1..1]	+	
3.124		CreditorAccount	<CdtrAcct>	[0..1]	+	
3.125		UltimateCreditor	<UltmtCdtr>	[0..1]	+	

Rules and Guidelines

Rules

R1 GroupAndTransactionStatus1Rule
If OriginalGroupInformationAndStatus/GroupStatus is present and is equal to ACTC, ACCP, ACSP or ACSC, ACCR or ACWC, then TransactionInformationAndStatus/TransactionStatus must be different from RJCT.

R2 GroupAndTransactionStatus2Rule
If OriginalGroupInformationAndStatus/GroupStatus is present and is equal to PDNG, then TransactionInformationAndStatus/TransactionStatus must be different from RJCT.

R3 GroupAndTransactionStatus3Rule
If OriginalGroupInformationAndStatus/GroupStatus is present and is equal to RJCT, then TransactionInformationAndStatus/TransactionStatus must be different from ACTC, ACCP, ACSP, ACSC, ACCR, ACWC or PDNG.

R4 GroupAndTransactionStatus4Rule
If OriginalGroupInformationAndStatus/GroupStatus is present and is equal to RCVD, then TransactionInformationAndStatus/TransactionStatus is not allowed.

R5 Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.139 for additional information.*

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.130 for additional information.*

R6 AnyBIC
Only a valid Business identifier code is allowed. Business identifier codes for financial or non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.139 for additional information.*

R7 BICFI
Valid BICs for financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.130 for additional information.*

R8 StatusReasonInformationRule
If GroupStatus is present and is different from RJCT or PDNG then StatusReasonInformation/AdditionalInformation must be absent.
On Condition
/StatusReasonInformation[1] is present
And
/StatusReasonInformation[*]/AdditionalInformation[*] is present
And
/GroupStatus is present
Following Must be True
/GroupStatus Must be equal to value 'Pending'
Or
/GroupStatus Must be equal to value 'Rejected'

R9 StatusReasonRule
If Reason/Code is equal to NARR, then AdditionalInformation must be present.
On Condition
/Reason/Code is equal to value 'Narrative'
And
/Reason is present
And
/Reason/Code is present
Following Must be True
/AdditionalInformation[1] Must be present

R10 PaymentInformationStatusAcceptedRule
If OriginalPaymentInformationAndStatus/PaymentInformationStatus is present and is equal to ACTC, ACCP, ACSP, ACSC or ACWC, then TransactionInformationAndStatus/TransactionStatus must be different from RJCT.
On Condition
/PaymentInformationStatus is present
And
/PaymentInformationStatus is within DataType <<Code>> ValidationGroupStatus1Code
And
/TransactionInformationAndStatus[1]/TransactionStatus is present
Following Must be True
/TransactionInformationAndStatus[*]/TransactionStatus Must be different from value 'Rejected'

R11 PaymentInformationStatusPendingRule
If OriginalPaymentInformationAndStatus/PaymentInformationStatus is present and is equal to PDNG, then TransactionInformationAndStatus/TransactionStatus must be different from RJCT.
On Condition
/PaymentInformationStatus is present
And
/PaymentInformationStatus is equal to value 'Pending'
Following Must be True
/TransactionInformationAndStatus[*]/TransactionStatus Must be different from value 'Rejected'

R12 PaymentInformationStatusRejectedRule
If OriginalPaymentInformationAndStatus/PaymentInformationStatus is present and is equal to RJCT, then TransactionInformationAndStatus/TransactionStatus, if present, must be equal to RJCT.
On Condition
/PaymentInformationStatus is present
And
/PaymentInformationStatus is equal to value 'Rejected'
And
/TransactionInformationAndStatus[1]/TransactionStatus is present
Following Must be True
/TransactionInformationAndStatus[*]/TransactionStatus Must not be within DataType <<Code>> ValidationGroupStatus2Code

R13 PaymentInformationStatusReceivedRule
If OriginalPaymentInformationAndStatus/PaymentInformationStatus is present and is equal to RCVD, then TransactionInformationAndStatus/TransactionStatus is not allowed.
On Condition
/PaymentInformationStatus is present
And
/PaymentInformationStatus is equal to value 'Received'
And
/TransactionInformationAndStatus[1] is present
Following Must be True
/TransactionInformationAndStatus[*]/TransactionStatus Must be absent

R14 CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

R15 ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

*This Rule also impacts **CashAccount16** Type. Please refer to 'Message Item Types' section p.122 for additional information.*

R16 ThirdReimbursementAgentRule
If ThirdReimbursementAgent is present, then InstructingReimbursementAgent and InstructedReimbursementAgent must both be present.
On Condition
/ThirdReimbursementAgent is present
Following Must be True
/InstructingReimbursementAgent Must be present
And
/InstructedReimbursementAgent Must be present

R17 SettlementMethodAgentRule
If SettlementMethod is equal to INDA or INGA, then ReimbursementAgent(s) and ClearingSystem are not allowed.
On Condition
/SettlementMethod is equal to value 'InstructingAgent'
Or
/SettlementMethod is equal to value 'InstructedAgent'
Following Must be True
/ClearingSystem Must be absent
And
/InstructingReimbursementAgent Must be absent
And
/InstructedReimbursementAgent Must be absent
And
/ThirdReimbursementAgent Must be absent

R18 SettlementMethodCoverRule
If SettlementMethod is equal to COVE, then SettlementAccount and ClearingSystem are not allowed.
On Condition
/SettlementMethod is equal to value 'CoverMethod'
Following Must be True
/SettlementAccount Must be absent
And
/ClearingSystem Must be absent

R19 SettlementMethodCoverAgentRule
If SettlementMethod is equal to COVE, then InstructedReimbursementAgent or InstructingReimbursementAgent must be present.
On Condition
/SettlementMethod is equal to value 'CoverMethod'
Following Must be True
/InstructingReimbursementAgent Must be present
Or
/InstructedReimbursementAgent Must be present

R20 SettlementMethodClearingRule
If SettlementMethod is equal to CLRG, then SettlementAccount and ReimbursementAgent(s) are not allowed.
On Condition
/SettlementMethod is equal to value 'ClearingSystem'
Following Must be True
/SettlementAccount Must be absent
And
/InstructingReimbursementAgent Must be absent
And
/InstructedReimbursementAgent Must be absent
And
/ThirdReimbursementAgent Must be absent

R21 InstructingReimbursementAgentAccountRule
If InstructingReimbursementAgentAccount is present, then InstructingReimbursementAgent must be present.
On Condition
/InstructingReimbursementAgent is absent
Following Must be True
/InstructingReimbursementAgentAccount Must be absent

R22 InstructedReimbursementAgentAccountRule
If InstructedReimbursementAgentAccount is present, then InstructedReimbursementAgent must be present.
On Condition
/InstructedReimbursementAgent is absent
Following Must be True
/InstructedReimbursementAgentAccount Must be absent

R23 ThirdReimbursementAgentAccountRule
If ThirdReimbursementAgentAccount is present, then ThirdReimbursementAgent must be present.
On Condition
/ThirdReimbursementAgent is absent
Following Must be True
/ThirdReimbursementAgentAccount Must be absent

R24 IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

*This Rule also impacts **CashAccount16** Type. Please refer to 'Message Item Types' section p.122 for additional information.*

R25 AmendmentIndicatorTrueRule
If AmendmentIndicator is true, then AmendementInformationDetails must be present.
On Condition
/AmendmentIndicator is equal to value 'true'
Following Must be True
/AmendmentInformationDetails Must be present

R26 AmendmentIndicatorFalseRule
If AmendmentIndicator is false, then AmendmentInformationDetails is not allowed.
On Condition
/AmendmentIndicator is equal to value 'false'
Following Must be True
/AmendmentInformationDetails Must be absent

Guidelines

G1 NumberOfTransactionPerStatusGuideline
OriginalGroupInformationAndStatus/NumberOfTransactionsPerStatus should only be present if GroupStatus equals 'PART'.

Message Items Description

*The following section identifies the elements of the **CreditorPaymentActivationRequestStatusReportV01** message definition.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]
Definition: Set of characteristics shared by all individual transactions included in the message.
Type: *The **GroupHeader** block is composed of the following **GroupHeader46** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		InitiatingParty	<InitgPty>	[1..1]	+
1.4		DebtorAgent	<DbtrAgt>	[0..1]	+
1.5		CreditorAgent	<CdtrAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]
Definition: Point to point reference assigned by the instructing party and sent to the next party in the chain to unambiguously identify the message.

Usage: The instructing party has to make sure that 'MessageIdentification' is unique per instructed party for a pre-agreed period.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]
Definition: Date and time at which the status report was created by the instructing party.
Data Type: ISODateTime

1.3 InitiatingParty <InitgPty>

Presence: [1..1]
Definition: Party initiating the creditor payment activation request. This can either be the creditor himself or the party that initiates the request on behalf of the creditor.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

1.4 DebtorAgent <DbtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

1.5 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

2.0 OriginalGroupInformationAndStatus <OrgnlGrpInfAndSts>

Presence: [1..1]
Impacted by: G1
Definition: Original group information concerning the group of transactions, to which the status report message refers to.
Type: *The **OriginalGroupInformationAndStatus** block is composed of the following **OriginalGroupInformation25** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		OriginalMessageIdentification	<OrgnlMsgId>	[1..1]	Text
2.2		OriginalMessageNameIdentification	<OrgnlMsgNmId>	[1..1]	Text
2.3		OriginalCreationDateTime	<OrgnlCreDtTm>	[0..1]	DateTime
2.4		OriginalNumberOfTransactions	<OrgnlNbOfTxs>	[0..1]	Text
2.5		OriginalControlSum	<OrgnlCtrlSum>	[0..1]	Quantity
2.6		GroupStatus	<GrpSts>	[0..1]	Code
2.7		StatusReasonInformation	<StsRsnInf>	[0..*]	
2.13		NumberOfTransactionsPerStatus	<NbOfTxsPerSts>	[0..*]	

Rule(s): StatusReasonInformationRule
If GroupStatus is present and is different from RJCT or PDNG then StatusReasonInformation/ AdditionalInformation must be absent.

Guideline(s): NumberOfTransactionPerStatusGuideline
OriginalGroupInformationAndStatus/NumberOfTransactionsPerStatus should only be present if GroupStatus equals 'PART'.

2.1 OriginalMessageIdentification <OrgnlMsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the original instructing party, to unambiguously identify the original message.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.2 OriginalMessageNameIdentification <OrgnlMsgNmId>

Presence: [1..1]

Definition: Specifies the original message name identifier to which the message refers.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.3 OriginalCreationDateTime <OrgnlCreDtTm>

Presence: [0..1]

Definition: Date and time at which the original message was created.

Data Type: ISODateTime

2.4 OriginalNumberOfTransactions <OrgnlNbOfTxs>

Presence: [0..1]

Definition: Number of individual transactions contained in the original message.

Data Type: Max15NumericText

Format: [0-9]{1,15}

2.5 OriginalControlSum <OrgnlCtrlSum>

Presence: [0..1]
Definition: Total of all individual amounts included in the original message, irrespective of currencies.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

2.6 GroupStatus <GrpSts>

Presence: [0..1]
Impacted by: R8
Definition: Specifies the status of a group of transactions.
Data Type: Code
*When this message item is present, one of the following **TransactionGroupStatus3Code** values must be used:*

Code	Name	Definition
ACCP	AcceptedCustomerProfile	Preceding check of technical validation was successful. Customer profile check was also successful.
ACSC	AcceptedSettlementCompleted	Settlement on the debtor's account has been completed. Usage : this can be used by the first agent to report to the debtor that the transaction has been completed. Warning : this status is provided for transaction status reasons, not for financial information. It can only be used after bilateral agreement
ACSP	AcceptedSettlementInProcess	All preceding checks such as technical validation and customer profile were successful and therefore the payment initiation has been accepted for execution.
ACTC	AcceptedTechnicalValidation	Authentication and syntactical and semantical validation are successful.
ACWC	AcceptedWithChange	Instruction is accepted but a change will be made, such as date or remittance not sent.
PART	PartiallyAccepted	A number of transactions have been accepted, whereas another number of transactions have not yet achieved 'accepted' status.
PDNG	Pending	Payment initiation or individual transaction included in the payment initiation is pending. Further checks and status update will be performed.
RCVD	Received	Payment initiation has been received by the receiving agent.
RJCT	Rejected	Payment initiation or individual transaction included in the payment initiation has been rejected.

2.7 StatusReasonInformation <StsRsnInf>

Presence: [0..*]
Definition: Set of elements used to provide detailed information on the status reason.

Type: *This message item is composed of the following* ***StatusReasonInformation9*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.8		Originator	<Orgtr>	[0..1]	+
2.9		Reason	<Rsn>	[0..1]	
2.12		AdditionalInformation	<AddtlInf>	[0..*]	Text

Rule(s): StatusReasonRule
If Reason/Code is equal to NARR, then AdditionalInformation must be present.

2.8 Originator <Orgtr>

Presence: [0..1]
Definition: Party that issues the status.
Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

For additional Type information, please refer to ***PartyIdentification43*** *p.139 in 'Message Item Types' section.*

2.9 Reason <Rsn>

Presence: [0..1]
Definition: Specifies the reason for the status report.
Type: *This message item is composed of one of the following* ***StatusReason6Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.10	{Or	Code	<Cd>	[1..1]	Code
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text

2.10 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.9 Reason****.*
Definition: Reason for the status, as published in an external reason code list.
Data Type: ExternalStatusReason1Code
Format: maxLength: 4
minLength: 1

2.11 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.9 Reason**.*
Definition: Reason for the status, in a proprietary form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.12 AdditionalInformation <AddtlInf>

Presence: [0..*]
Impacted by: R9
Definition: Further details on the status reason.

Usage: Additional information can be used for several purposes such as the reporting of repaired information.

Data Type: Max105Text
Format: maxLength: 105
minLength: 1

2.13 NumberOfTransactionsPerStatus <NbOfTxsPerSts>

Presence: [0..*]
Definition: Detailed information on the number of transactions for each identical transaction status.
Type: *This message item is composed of the following **NumberOfTransactionsPerStatus3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.14		DetailedNumberOfTransactions	<DtldNbOfTxs>	[1..1]	Text
2.15		DetailedStatus	<DtldSts>	[1..1]	Code
2.16		DetailedControlSum	<DtldCtrlSum>	[0..1]	Quantity

2.14 DetailedNumberOfTransactions <DtldNbOfTxs>

Presence: [1..1]
Definition: Number of individual transactions contained in the message, detailed per status.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.15 DetailedStatus <DtldSts>

Presence: [1..1]
Definition: Common transaction status for all individual transactions reported.
Data Type: Code
*One of the following **TransactionIndividualStatus3Code** values must be used:*

Code	Name	Definition
ACCP	AcceptedCustomerProfile	Preceding check of technical validation was successful. Customer profile check was also successful.
ACSC	AcceptedSettlementCompleted	Settlement on the debtor's account has been completed. Usage : this can be used by the first agent to report to the debtor that the transaction has been completed. Warning : this status is provided for transaction status reasons, not for financial information. It can only be used after bilateral agreement
ACSP	AcceptedSettlementInProcess	All preceding checks such as technical validation and customer profile were successful and therefore the payment initiation has been accepted for execution.
ACTC	AcceptedTechnicalValidation	Authentication and syntactical and semantical validation are successful.
ACWC	AcceptedWithChange	Instruction is accepted but a change will be made, such as date or remittance not sent.
PDNG	Pending	Payment initiation or individual transaction included in the payment initiation is pending. Further checks and status update will be performed.
RJCT	Rejected	Payment initiation or individual transaction included in the payment initiation has been rejected.

2.16 DetailedControlSum <DtldCtrlSum>

Presence: [0..1]

Definition: Total of all individual amounts included in the message, irrespective of currencies, detailed per status.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

3.0 OriginalPaymentInformationAndStatus <OrgnlPmtInfAndSts>

Presence: [0..*]

Definition: Information concerning the original payment information, to which the status report message refers.

Type: *The **OriginalPaymentInformationAndStatus** block is composed of the following **OriginalPaymentInformation5** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1		OriginalPaymentInformationIdentification	<OrgnlPmtInfId>	[1..1]	Text
3.2		OriginalNumberOfTransactions	<OrgnlNbOfTxs>	[0..1]	Text
3.3		OriginalControlSum	<OrgnlCtrlSum>	[0..1]	Quantity
3.4		PaymentInformationStatus	<PmtInfSts>	[0..1]	Code
3.5		StatusReasonInformation	<StsRsnInf>	[0..*]	
3.11		NumberOfTransactionsPerStatus	<NbOfTxsPerSts>	[0..*]	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.15		TransactionInformationAndStatus	<TxInfAndSts>	[0..*]	

Rule(s): PaymentInformationStatusAcceptedRule
If OriginalPaymentInformationAndStatus/PaymentInformationStatus is present and is equal to ACTC, ACCP, ACSP, ACSC or ACWC, then TransactionInformationAndStatus/TransactionStatus must be different from RJCT.

PaymentInformationStatusPendingRule
If OriginalPaymentInformationAndStatus/PaymentInformationStatus is present and is equal to PDNG, then TransactionInformationAndStatus/TransactionStatus must be different from RJCT.

PaymentInformationStatusReceivedRule
If OriginalPaymentInformationAndStatus/PaymentInformationStatus is present and is equal to RCVD, then TransactionInformationAndStatus/TransactionStatus is not allowed.

PaymentInformationStatusRejectedRule
If OriginalPaymentInformationAndStatus/PaymentInformationStatus is present and is equal to RJCT, then TransactionInformationAndStatus/TransactionStatus, if present, must be equal to RJCT.

3.1 OriginalPaymentInformationIdentification <OrgnlPmtInfId>

Presence: [1..1]
Definition: Unique identification, as assigned by the original sending party, to unambiguously identify the original payment information group.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.2 OriginalNumberOfTransactions <OrgnlNbOfTxs>

Presence: [0..1]
Definition: Number of individual transactions contained in the original payment information group.
Data Type: Max15NumericText
Format: [0-9]{1,15}

3.3 OriginalControlSum <OrgnlCtrlSum>

Presence: [0..1]
Definition: Total of all individual amounts included in the original payment information group, irrespective of currencies.
Data Type: DecimalNumber
Format: fractionDigits: 17
totalDigits: 18

3.4 PaymentInformationStatus <PmtInfSts>

Presence: [0..1]
Definition: Specifies the status of the payment information group.
Data Type: Code

*When this message item is present, one of the following **TransactionGroupStatus3Code** values must be used:*

Code	Name	Definition
ACCP	AcceptedCustomerProfile	Preceding check of technical validation was successful. Customer profile check was also successful.
ACSC	AcceptedSettlementCompleted	Settlement on the debtor's account has been completed. Usage : this can be used by the first agent to report to the debtor that the transaction has been completed. Warning : this status is provided for transaction status reasons, not for financial information. It can only be used after bilateral agreement
ACSP	AcceptedSettlementInProcess	All preceding checks such as technical validation and customer profile were successful and therefore the payment initiation has been accepted for execution.
ACTC	AcceptedTechnicalValidation	Authentication and syntactical and semantical validation are successful.
ACWC	AcceptedWithChange	Instruction is accepted but a change will be made, such as date or remittance not sent.
PART	PartiallyAccepted	A number of transactions have been accepted, whereas another number of transactions have not yet achieved 'accepted' status.
PDNG	Pending	Payment initiation or individual transaction included in the payment initiation is pending. Further checks and status update will be performed.
RCVD	Received	Payment initiation has been received by the receiving agent.
RJCT	Rejected	Payment initiation or individual transaction included in the payment initiation has been rejected.

3.5 StatusReasonInformation <StsRsnInf>

Presence: [0..*]
Definition: Set of elements used to provide detailed information on the status reason.
Type: *This message item is composed of the following **StatusReasonInformation9** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.6		Originator	<Orgtr>	[0..1]	+
3.7		Reason	<Rsn>	[0..1]	
3.10		AdditionalInformation	<AddtlInf>	[0..*]	Text

Rule(s): StatusReasonRule
If Reason/Code is equal to NARR, then AdditionalInformation must be present.

3.6 Originator <Orgtr>

Presence: [0..1]
Definition: Party that issues the status.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

3.7 Reason <Rsn>

Presence: [0..1]
Definition: Specifies the reason for the status report.
Type: *This message item is composed of one of the following **StatusReason6Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.8	{Or	Code	<Cd>	[1..1]	Code
3.9	Or}	Proprietary	<Prtry>	[1..1]	Text

3.8 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.7 Reason**.*
Definition: Reason for the status, as published in an external reason code list.
Data Type: ExternalStatusReason1Code
Format: maxLength: 4
minLength: 1

3.9 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.7 Reason**.*
Definition: Reason for the status, in a proprietary form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.10 AdditionalInformation <AddtlInf>

Presence: [0..*]

Impacted by: R9
Definition: Further details on the status reason.

Usage: Additional information can be used for several purposes such as the reporting of repaired information.

Data Type: Max105Text
Format: maxLength: 105
minLength: 1

3.11 NumberOfTransactionsPerStatus <NbOfTxsPerSts>

Presence: [0..*]
Definition: Detailed information on the number of transactions for each identical transaction status.
Type: *This message item is composed of the following **NumberOfTransactionsPerStatus3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.12		DetailedNumberOfTransactions	<DtldNbOfTxs>	[1..1]	Text
3.13		DetailedStatus	<DtldSts>	[1..1]	Code
3.14		DetailedControlSum	<DtldCtrlSum>	[0..1]	Quantity

3.12 DetailedNumberOfTransactions <DtldNbOfTxs>

Presence: [1..1]
Definition: Number of individual transactions contained in the message, detailed per status.
Data Type: Max15NumericText
Format: [0-9]{1,15}

3.13 DetailedStatus <DtldSts>

Presence: [1..1]
Definition: Common transaction status for all individual transactions reported.
Data Type: Code
*One of the following **TransactionIndividualStatus3Code** values must be used:*

Code	Name	Definition
ACCP	AcceptedCustomerProfile	Preceding check of technical validation was successful. Customer profile check was also successful.
ACSC	AcceptedSettlementCompleted	Settlement on the debtor's account has been completed. Usage : this can be used by the first agent to report to the debtor that the transaction has been completed. Warning : this status is provided for transaction status reasons, not for financial information. It can only be used after bilateral agreement
ACSP	AcceptedSettlementInProcess	All preceding checks such as technical validation and customer profile were successful and therefore the payment initiation has been accepted for execution.

Code	Name	Definition
ACTC	AcceptedTechnicalValidation	Authentication and syntactical and semantical validation are successful.
ACWC	AcceptedWithChange	Instruction is accepted but a change will be made, such as date or remittance not sent.
PDNG	Pending	Payment initiation or individual transaction included in the payment initiation is pending. Further checks and status update will be performed.
RJCT	Rejected	Payment initiation or individual transaction included in the payment initiation has been rejected.

3.14 DetailedControlSum <DtldCtrlSum>

Presence: [0..1]

Definition: Total of all individual amounts included in the message, irrespective of currencies, detailed per status.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

3.15 TransactionInformationAndStatus <TxInfAndSts>

Presence: [0..*]

Definition: Set of elements used to provide information on the original transactions to which the status report message refers.

Type: *This message item is composed of the following **PaymentTransactionInformation34** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.16		StatusIdentification	<StsId>	[0..1]	Text
3.17		OriginalInstructionIdentification	<OrgnlInstrId>	[0..1]	Text
3.18		OriginalEndToEndIdentification	<OrgnlEndToEndId>	[0..1]	Text
3.19		TransactionStatus	<TxSts>	[0..1]	Code
3.20		StatusReasonInformation	<StsRsnInf>	[0..*]	
3.26		ChargesInformation	<ChrgsInf>	[0..*]	
3.29		AcceptanceDateTime	<AccptncDtTm>	[0..1]	DateTime
3.30		AccountServicerReference	<AcctSvcrRef>	[0..1]	Text
3.31		ClearingSystemReference	<ClrSysRef>	[0..1]	Text
3.32		OriginalTransactionReference	<OrgnlTxRef>	[0..1]	

3.16 StatusIdentification <StsId>

Presence: [0..1]

Definition: Unique identification, as assigned by an instructing party for an instructed party, to unambiguously identify the reported status.
Usage: The instructing party is the party sending the status message and not the party that sent the original instruction that is being reported on.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.17 OriginalInstructionIdentification <OrgnlInstrId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original instructing party for the original instructed party, to unambiguously identify the original instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.18 OriginalEndToEndIdentification <OrgnlEndToEndId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original initiating party, to unambiguously identify the original transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.19 TransactionStatus <TxSts>

Presence: [0..1]

Impacted by: R10, R11, R12, R13

Definition: Specifies the status of a transaction, in a coded form.

Data Type: Code

*When this message item is present, one of the following **TransactionIndividualStatus3Code** values must be used:*

Code	Name	Definition
ACCP	AcceptedCustomerProfile	Preceding check of technical validation was successful. Customer profile check was also successful.
ACSC	AcceptedSettlementCompleted	Settlement on the debtor's account has been completed. Usage : this can be used by the first agent to report to the debtor that the transaction has been completed. Warning : this status is provided for transaction status reasons, not for financial information. It can only be used after bilateral agreement
ACSP	AcceptedSettlementInProcess	All preceding checks such as technical validation and customer profile were successful and therefore the payment initiation has been accepted for execution.
ACTC	AcceptedTechnicalValidation	Authentication and syntactical and semantical validation are successful.

Code	Name	Definition
ACWC	AcceptedWithChange	Instruction is accepted but a change will be made, such as date or remittance not sent.
PDNG	Pending	Payment initiation or individual transaction included in the payment initiation is pending. Further checks and status update will be performed.
RJCT	Rejected	Payment initiation or individual transaction included in the payment initiation has been rejected.

Example:
<TxSts>RJCT</TxSts>

3.20 StatusReasonInformation <StsRsnInf>

Presence: [0..*]
Definition: Set of elements used to provide detailed information on the status reason.
Type: *This message item is composed of the following **StatusReasonInformation9** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.21		Originator	<Orgtr>	[0..1]	+
3.22		Reason	<Rsn>	[0..1]	
3.25		AdditionalInformation	<AddtlInf>	[0..*]	Text

Rule(s): StatusReasonRule
If Reason/Code is equal to NARR, then AddititionalInformation must be present.

3.21 Originator <Orgtr>

Presence: [0..1]
Definition: Party that issues the status.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

3.22 Reason <Rsn>

Presence: [0..1]
Definition: Specifies the reason for the status report.

Type: *This message item is composed of one of the following* ***StatusReason6Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.23	{Or	Code	<Cd>	[1..1]	Code
3.24	Or}	Proprietary	<Prtry>	[1..1]	Text

3.23 Code <Cd>

Presence: [1..1]
This message item is part of choice ***3.22 Reason****.*
Definition: Reason for the status, as published in an external reason code list.
Data Type: ExternalStatusReason1Code
Format: maxLength: 4
minLength: 1

3.24 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***3.22 Reason****.*
Definition: Reason for the status, in a proprietary form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.25 AdditionalInformation <AddtlInf>

Presence: [0..*]
Impacted by: R9
Definition: Further details on the status reason.

Usage: Additional information can be used for several purposes such as the reporting of repaired information.

Data Type: Max105Text
Format: maxLength: 105
minLength: 1

3.26 ChargesInformation <ChrgsInf>

Presence: [0..*]
Definition: Provides information on the charges related to the processing of the rejection of the instruction.
Usage: This is passed on for information purposes only. Settlement of the charges will be done separately.
Type: *This message item is composed of the following* ***ChargesInformation7*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.27		Amount	<Amt>	[1..1]	Amount
3.28		Party	<Pty>	[1..1]	+

3.27 Amount <Amt>

Presence: [1..1]

Impacted by: R14, R15

Definition: Transaction charges to be paid by the charge bearer.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

Example:
<Amt Ccy='EUR'>1.0</Amt>

3.28 Party <Pty>

Presence: [1..1]

Definition: Party that takes the transaction charges or to which the transaction charges are due.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification5*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to ***BranchAndFinancialInstitutionIdentification5*** *p.130 in 'Message Item Types' section.*

3.29 AcceptanceDateTime <AccptncDtTm>

Presence: [0..1]

Definition: Point in time when the payment order from the initiating party meets the processing conditions of the account servicing agent. This means that the account servicing agent has received the payment order and has applied checks such as authorisation, availability of funds.

Data Type: ISODateTime

3.30 AccountServicerReference <AcctSvcrRef>

Presence: [0..1]

Definition: Unique reference, as assigned by the account servicing institution, to unambiguously identify the instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.31 ClearingSystemReference <ClrSysRef>

Presence: [0..1]

Definition: Unique reference, as assigned by a clearing system, to unambiguously identify the instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.32 OriginalTransactionReference <OrgnlTxRef>

Presence: [0..1]

Definition: Set of key elements used to identify the original transaction that is being referred to.

Type: *This message item is composed of the following **OriginalTransactionReference15** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.33		InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount
3.34		Amount	<Amt>	[0..1]	
3.39		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime
3.40		RequestedCollectionDate	<ReqdColltnDt>	[0..1]	DateTime
3.41		RequestedExecutionDate	<ReqdExctnDt>	[0..1]	DateTime
3.42		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
3.43		SettlementInformation	<SttlmInf>	[0..1]	
3.55		PaymentTypeInformation	<PmtTpInf>	[0..1]	
3.68		PaymentMethod	<PmtMtd>	[0..1]	Code
3.69		MandateRelatedInformation	<MndtRltdInf>	[0..1]	
3.86		RemittanceInformation	<RmtInf>	[0..1]	
3.118		UltimateDebtor	<UltmtDbtr>	[0..1]	+
3.119		Debtor	<Dbtr>	[0..1]	+
3.120		DebtorAccount	<DbtrAcct>	[0..1]	+
3.121		DebtorAgent	<DbtrAgt>	[0..1]	+
3.122		CreditorAgent	<CdtrAgt>	[1..1]	+
3.123		Creditor	<Cdtr>	[1..1]	+
3.124		CreditorAccount	<CdtrAcct>	[0..1]	+
3.125		UltimateCreditor	<UltmtCdtr>	[0..1]	+

3.33 InterbankSettlementAmount <IntrBkSttlmAmt>

Presence: [0..1]

Impacted by: R14, R15

Definition: Amount of money moved between the instructing agent and the instructed agent.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

3.34 Amount <Amt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Type: *This message item is composed of one of the following* ***AmountType3Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.35	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount
3.36	Or}	EquivalentAmount	<EqvtAmt>	[1..1]	

3.35 InstructedAmount <InstdAmt>

Presence: [1..1]

Impacted by: R14, R15

This message item is part of choice ***3.34 Amount****.*

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

3.36 EquivalentAmount <EqvtAmt>

Presence: [1..1]

*This message item is part of choice **3.34 Amount**.*

Definition: Amount of money to be moved between the debtor and creditor, expressed in the currency of the debtor's account, and the currency in which the amount is to be moved.

Type: *This message item is composed of the following **EquivalentAmount2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.37		Amount	<Amt>	[1..1]	Amount
3.38		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code

3.37 Amount <Amt>

Presence: [1..1]

Impacted by: R14, R15

Definition: Amount of money to be moved between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be moved in a different currency.
Usage: The first agent will convert the equivalent amount into the amount to be moved.

Data Type: ActiveOrHistoricCurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveOrHistoricCurrencyCode**.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

3.38 CurrencyOfTransfer <CcyOfTrf>

Presence: [1..1]

Impacted by: R15

Definition: Specifies the currency of the to be transferred amount, which is different from the currency of the debtor's account.

Data Type: ActiveOrHistoricCurrencyCode

Format: [A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

3.39 InterbankSettlementDate <IntrBkSttlmDt>

Presence: [0..1]

Definition: Date on which the amount of money ceases to be available to the agent that owes it and when the amount of money becomes available to the agent to which it is due.

Data Type: ISODate

3.40 RequestedCollectionDate <ReqdColltnDt>

Presence: [0..1]

Definition: Date and time at which the creditor requests that the amount of money is to be collected from the debtor.

Data Type: ISODate

3.41 RequestedExecutionDate <ReqdExctnDt>

Presence: [0..1]

Definition: Date at which the initiating party requests the clearing agent to process the payment.
Usage: This is the date on which the debtor's account is to be debited. If payment by cheque, the date when the cheque must be generated by the bank.

Data Type: ISODate

3.42 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]

Definition: Credit party that signs the mandate.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

3.43 SettlementInformation <SttlmInf>

Presence: [0..1]

Definition: Specifies the details on how the settlement of the original transaction(s) between the instructing agent and the instructed agent was completed.

Type: *This message item is composed of the following **SettlementInformation16** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.44		SettlementMethod	<SttlmMtd>	[1..1]	Code
3.45		SettlementAccount	<SttlmAcct>	[0..1]	+
3.46		ClearingSystem	<ClrSys>	[0..1]	
3.49		InstructingReimbursementAgent	<InstgRmbrsmntAgt>	[0..1]	+
3.50		InstructingReimbursementAgentAccount	<InstgRmbrsmntAgtAcct>	[0..1]	+
3.51		InstructedReimbursementAgent	<InstdRmbrsmntAgt>	[0..1]	+
3.52		InstructedReimbursementAgentAccount	<InstdRmbrsmntAgtAcct>	[0..1]	+
3.53		ThirdReimbursementAgent	<ThrdRmbrsmntAgt>	[0..1]	+
3.54		ThirdReimbursementAgentAccount	<ThrdRmbrsmntAgtAcct>	[0..1]	+

Rule(s): InstructedReimbursementAgentAccountRule
If InstructedReimbursementAgentAccount is present, then InstructedReimbursementAgent must be present.

InstructingReimbursementAgentAccountRule
If InstructingReimbursementAgentAccount is present, then InstructingReimbursementAgent must be present.

SettlementMethodAgentRule
If SettlementMethod is equal to INDA or INGA, then ReimbursementAgent(s) and ClearingSystem are not allowed.

SettlementMethodClearingRule
If SettlementMethod is equal to CLRG, then SettlementAccount and ReimbursementAgent(s) are not allowed.

SettlementMethodCoverAgentRule
If SettlementMethod is equal to COVE, then InstructedReimbursementAgent or InstructingReimbursementAgent must be present.

SettlementMethodCoverRule
If SettlementMethod is equal to COVE, then SettlementAccount and ClearingSystem are not allowed.

ThirdReimbursementAgentAccountRule
If ThirdReimbursementAgentAccount is present, then ThirdReimbursementAgent must be present.

ThirdReimbursementAgentRule
If ThirdReimbursementAgent is present, then InstructingReimbursementAgent and InstructedReimbursementAgent must both be present.

3.44 SettlementMethod <SttlmMtd>

Presence: [1..1]
Definition: Method used to settle the (batch of) payment instructions.
Data Type: Code
*One of the following **SettlementMethod1Code** values must be used:*

Code	Name	Definition
CLRG	ClearingSystem	Settlement is done through a payment clearing system.
COVE	CoverMethod	Settlement is done through a cover payment.
INDA	InstructedAgent	Settlement is done by the agent instructed to execute a payment instruction.
INGA	InstructingAgent	Settlement is done by the agent instructing and forwarding the payment to the next party in the payment chain.

Example:
<SttlmMtd>INGA</SttlmMtd>

3.45 SettlementAccount <SttlmAcct>

Presence: [0..1]
Impacted by: R18, R20

Definition: A specific purpose account used to post debit and credit entries as a result of the transaction.

Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.122 in 'Message Item Types' section.*

3.46 ClearingSystem <ClrSys>

Presence: [0..1]

Impacted by: R17, R18

Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.

Type: *This message item is composed of one of the following **ClearingSystemIdentification3Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.47	{Or	Code	<Cd>	[1..1]	Code
3.48	Or}	Proprietary	<Prtry>	[1..1]	Text

3.47 Code <Cd>

Presence: [1..1]

*This message item is part of choice **3.46 ClearingSystem**.*

Definition: Infrastructure through which the payment instruction is processed, as published in an external clearing system identification code list.

Data Type: ExternalCashClearingSystem1Code

Format: maxLength: 3
minLength: 1

3.48 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.46 ClearingSystem**.*

Definition: Clearing system identification in a proprietary form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.49 InstructingReimbursementAgent <InstgRmbrsmntAgt>

Presence: [0..1]

Impacted by: R16, R17, R19, R20

Definition: Agent through which the instructing agent will reimburse the instructed agent.

Usage: If InstructingAgent and InstructedAgent have the same reimbursement agent, then only InstructingReimbursementAgent must be used.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

3.50 InstructingReimbursementAgentAccount <InstgRmbrsmntAgtAcct>

Presence: [0..1]

Impacted by: R21

Definition: Unambiguous identification of the account of the instructing reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.122 in 'Message Item Types' section.*

3.51 InstructedReimbursementAgent <InstdRmbrsmntAgt>

Presence: [0..1]

Impacted by: R16, R17, R19, R20

Definition: Agent at which the instructed agent will be reimbursed.
Usage: If InstructedReimbursementAgent contains a branch of the InstructedAgent, then the party in InstructedAgent will claim reimbursement from that branch/will be paid by that branch.
Usage: If InstructingAgent and InstructedAgent have the same reimbursement agent, then only InstructingReimbursementAgent must be used.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

3.52 InstructedReimbursementAgentAccount <InstdRmbrsmntAgtAcct>

Presence: [0..1]

Impacted by: R22

Definition: Unambiguous identification of the account of the instructed reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.122 in 'Message Item Types' section.*

3.53 ThirdReimbursementAgent <ThrdRmbrsmntAgt>

Presence: [0..1]

Impacted by: R17, R20

Definition: Agent at which the instructed agent will be reimbursed.
Usage: If ThirdReimbursementAgent contains a branch of the InstructedAgent, then the party in InstructedAgent will claim reimbursement from that branch/will be paid by that branch.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

3.54 ThirdReimbursementAgentAccount <ThrdRmbrsmntAgtAcct>

Presence: [0..1]

Impacted by: R23

Definition: Unambiguous identification of the account of the third reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.122 in 'Message Item Types' section.*

3.55 PaymentTypeInformation <PmtTpInf>

Presence: [0..1]
Definition: Set of elements used to further specify the type of transaction.
Type: *This message item is composed of the following **PaymentTypeInformation22** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.56		InstructionPriority	<InstrPrty>	[0..1]	Code
3.57		ClearingChannel	<ClrChanl>	[0..1]	Code
3.58		ServiceLevel	<SvcLvl>	[0..1]	
3.61		LocalInstrument	<LclInstrm>	[0..1]	
3.64		SequenceType	<SeqTp>	[0..1]	Code
3.65		CategoryPurpose	<CtgyPurp>	[0..1]	

3.56 InstructionPriority <InstrPrty>

Presence: [0..1]
Definition: Indicator of the urgency or order of importance that the instructing party would like the instructed party to apply to the processing of the instruction.
Data Type: Code
*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

3.57 ClearingChannel <ClrChanl>

Presence: [0..1]
Definition: Specifies the clearing channel to be used to process the payment instruction.
Data Type: Code
*When this message item is present, one of the following **ClearingChannel2Code** values must be used:*

Code	Name	Definition
BOOK	BookTransfer	Payment through internal book transfer.
MPNS	MassPaymentNetSystem	Clearing channel is a mass payment net settlement system.
RTGS	RealTimeGrossSettlementSystem	Clearing channel is a real-time gross settlement system.

Code	Name	Definition
RTNS	RealTimeNetSettlementSystem	Clearing channel is a real-time net settlement system.

3.58 ServiceLevel <SvcLvl>

Presence: [0..1]

Definition: Agreement under which or rules under which the transaction should be processed.

Type: *This message item is composed of one of the following **ServiceLevel8Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.59	{Or	Code	<Cd>	[1..1]	Code
3.60	Or}	Proprietary	<Prtry>	[1..1]	Text

3.59 Code <Cd>

Presence: [1..1]

*This message item is part of choice **3.58 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as published in an external service level code list.

Data Type: ExternalServiceLevel1Code

Format: maxLength: 4
minLength: 1

3.60 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.58 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.61 LocalInstrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.

Usage: This element is used to specify a local instrument, local clearing option and/or further qualify the service or service level.

Type: *This message item is composed of one of the following **LocalInstrument2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.62	{Or	Code	<Cd>	[1..1]	Code
3.63	Or}	Proprietary	<Prtry>	[1..1]	Text

3.62 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.61 LocalInstrument**.*
Definition: Specifies the local instrument, as published in an external local instrument code list.
Data Type: ExternalLocalInstrument1Code
Format: maxLength: 35
minLength: 1

3.63 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.61 LocalInstrument**.*
Definition: Specifies the local instrument, as a proprietary code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.64 SequenceType <SeqTp>

Presence: [0..1]
Definition: Identifies the direct debit sequence, such as first, recurrent, final or one-off.
Data Type: Code
*When this message item is present, one of the following **SequenceType1Code** values must be used:*

Code	Name	Definition
FNAL	Final	Final collection of a series of direct debit instructions.
FRST	First	First collection of a series of direct debit instructions.
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

3.65 CategoryPurpose <CtgyPurp>

Presence: [0..1]
Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.
Usage: This is used by the initiating party to provide information concerning the processing of the payment. It is likely to trigger special processing by any of the agents involved in the payment chain.
Type: *This message item is composed of one of the following **CategoryPurpose1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.66	{Or	Code	<Cd>	[1..1]	Code
3.67	Or}	Proprietary	<Prtry>	[1..1]	Text

3.66 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.65 CategoryPurpose**.*
Definition: Category purpose, as published in an external category purpose code list.
Data Type: ExternalCategoryPurpose1Code
Format: maxLength: 4
minLength: 1

3.67 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.65 CategoryPurpose**.*
Definition: Category purpose, in a proprietary form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.68 PaymentMethod <PmtMtd>

Presence: [0..1]
Definition: Specifies the means of payment that will be used to move the amount of money.
Data Type: Code
*When this message item is present, one of the following **PaymentMethod4Code** values must be used:*

Code	Name	Definition
CHK	Cheque	Written order to a bank to pay a certain amount of money from one person to another person.
DD	DirectDebit	Collection of an amount of money from the debtor's bank account by the creditor. The amount of money and dates of collections may vary.
TRA	TransferAdvice	Transfer of an amount of money in the books of the account servicer. An advice should be sent back to the account owner.
TRF	CreditTransfer	Transfer of an amount of money in the books of the account servicer.

3.69 MandateRelatedInformation <MndtRltdInf>

Presence: [0..1]
Definition: Set of elements used to provide further details of the mandate signed between the creditor and the debtor.
Type: *This message item is composed of the following **MandateRelatedInformation7** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.70		MandateIdentification	<MndtId>	[0..1]	Text
3.71		DateOfSignature	<DtOfSgntr>	[0..1]	DateTime
3.72		AmendmentIndicator	<AmdmntInd>	[0..1]	Indicator

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.73		AmendmentInformationDetails	<AmdmntInfDtls>	[0..1]	
3.82		ElectronicSignature	<ElctrncSgntr>	[0..1]	Text
3.83		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
3.84		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime
3.85		Frequency	<Frqcy>	[0..1]	Code

Rule(s): AmendmentIndicatorFalseRule
If AmendmentIndicator is false, then AmendmentInformationDetails is not allowed.

AmendmentIndicatorTrueRule
If AmendmentIndicator is true, then AmendementInformationDetails must be present.

3.70 MandateIdentification <MndtId>

Presence: [0..1]
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.71 DateOfSignature <DtOfSgntr>

Presence: [0..1]
Definition: Date on which the direct debit mandate has been signed by the debtor.
Data Type: ISODate

3.72 AmendmentIndicator <AmdmntInd>

Presence: [0..1]
Definition: Indicator notifying whether the underlying mandate is amended or not.
Data Type: *One of the following **TrueFalseIndicator** values must be used:*
MeaningWhenTrue: True
MeaningWhenFalse: False
Example:
<AmdmntInd>false</AmdmntInd>

3.73 AmendmentInformationDetails <AmdmntInfDtls>

Presence: [0..1]
Impacted by: R25, R26
Definition: List of mandate elements that have been modified.
Type: *This message item is composed of the following **AmendmentInformationDetails7** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.74		OriginalMandateIdentification	<OrgnlMndtId>	[0..1]	Text
3.75		OriginalCreditorSchemeIdentification	<OrgnlCdtrSchmeId>	[0..1]	+

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.76		OriginalCreditorAgent	<OrgnlCdtrAgt>	[0..1]	+
3.77		OriginalDebtor	<OrgnlDbtr>	[0..1]	+
3.78		OriginalDebtorAccount	<OrgnlDbtrAcct>	[0..1]	+
3.79		OriginalDebtorAgent	<OrgnlDbtrAgt>	[0..1]	+
3.80		OriginalFinalCollectionDate	<OrgnlFnlColltnDt>	[0..1]	DateTime
3.81		OriginalFrequency	<OrgnlFrqcy>	[0..1]	Code

3.74 OriginalMandateIdentification <OrgnlMndtId>

Presence: [0..1]
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the original mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.75 OriginalCreditorSchemeIdentification <OrgnlCdtrSchmeId>

Presence: [0..1]
Definition: Original creditor scheme identification that has been modified.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

3.76 OriginalCreditorAgent <OrgnlCdtrAgt>

Presence: [0..1]
Definition: Original creditor agent that has been modified.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

3.77 OriginalDebtor <OrgnlDbtr>

Presence: [0..1]
Definition: Original debtor that has been modified.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

3.78 OriginalDebtorAccount <OrgnlDbtrAcct>

Presence: [0..1]
Definition: Original debtor account that has been modified.
Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.122 in 'Message Item Types' section.*

3.79 OriginalDebtorAgent <OrgnlDbtrAgt>

Presence: [0..1]
Definition: Original debtor agent that has been modified.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

3.80 OriginalFinalCollectionDate <OrgnlFnlColltnDt>

Presence: [0..1]

Definition: Original final collection date that has been modified.
Data Type: ISODate

3.81 OriginalFrequency <OrgnlFrqcy>

Presence: [0..1]
Definition: Original frequency that has been modified.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

3.82 ElectronicSignature <ElctrncSgntr>

Presence: [0..1]
Definition: Additional security provisions, such as a digital signature, as provided by the debtor.
Data Type: Max1025Text
Format: maxLength: 1025
minLength: 1

3.83 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.
Data Type: ISODate

3.84 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.
Data Type: ISODate

3.85 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which direct debit instructions are to be created and processed.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

3.86 RemittanceInformation <RmtInf>

Presence: [0..1]

Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, such as commercial invoices in an accounts' receivable system.

Type: *This message item is composed of the following **RemittanceInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.87		Unstructured	<Ustrd>	[0..*]	Text
3.88		Structured	<Strd>	[0..*]	

3.87 Unstructured <Ustrd>

Presence: [0..*]

Definition: Information supplied to enable the matching/reconciliation of an entry with the items that the payment is intended to settle, such as commercial invoices in an accounts' receivable system, in an unstructured form.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

3.88 Structured <Strd>

Presence: [0..*]

Definition: Information supplied to enable the matching/reconciliation of an entry with the items that the payment is intended to settle, such as commercial invoices in an accounts' receivable system, in a structured form.

Type: *This message item is composed of the following **StructuredRemittanceInformation8** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.89		ReferredDocumentInformation	<RfrdDocInf>	[0..*]	
3.97		ReferredDocumentAmount	<RfrdDocAmt>	[0..1]	
3.108		CreditorReferenceInformation	<CdtrRefInf>	[0..1]	
3.115		Invoicer	<Invcr>	[0..1]	+
3.116		Invoicee	<Invcee>	[0..1]	+

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.117		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..3]	Text

3.89 ReferredDocumentInformation <RfrdDocInf>

Presence: [0..*]
Definition: Set of elements used to identify the documents referred to in the remittance information.
Type: *This message item is composed of the following **ReferredDocumentInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.90		Type	<Tp>	[0..1]	
3.95		Number	<Nb>	[0..1]	Text
3.96		RelatedDate	<RltdDt>	[0..1]	DateTime

3.90 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of referred document.
Type: *This message item is composed of the following **ReferredDocumentType2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.91		CodeOrProprietary	<CdOrPrtry>	[1..1]	
3.94		Issuer	<Issr>	[0..1]	Text

3.91 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]
Definition: Provides the type details of the referred document.
Type: *This message item is composed of one of the following **ReferredDocumentType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.92	{Or	Code	<Cd>	[1..1]	Code
3.93	Or}	Proprietary	<Prtry>	[1..1]	Text

3.92 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.91 CodeOrProprietary**.*
Definition: Document type in a coded form.
Data Type: Code
*One of the following **DocumentType5Code** values must be used:*

Code	Name	Definition
AROI	AccountReceivableOpenItem	Document is a payment that applies to a specific source document.
BOLD	BillOfLading	Document is a shipping notice.
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.
TSUT	TradeServicesUtilityTransaction	Document is a transaction identifier as assigned by the Trade Services Utility.
VCHR	Voucher	Document is an electronic payment document.

3.93 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.91 CodeOrProprietary**.*

Definition: Proprietary identification of the type of the remittance document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.94 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the reference document type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.95 Number <Nb>

Presence: [0..1]
Definition: Unique and unambiguous identification of the referred document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.96 RelatedDate <RltdDt>

Presence: [0..1]
Definition: Date associated with the referred document.
Data Type: ISODate

3.97 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..1]
Definition: Set of elements used to provide details on the amounts of the referred document.
Type: *This message item is composed of the following **RemittanceAmount1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.98		DuePayableAmount	<DuePyblAmt>	[0..1]	Amount
3.99		DiscountAppliedAmount	<DscntApldAmt>	[0..1]	Amount
3.100		CreditNoteAmount	<CdtNoteAmt>	[0..1]	Amount
3.101		TaxAmount	<TaxAmt>	[0..1]	Amount
3.102		AdjustmentAmountAndReason	<AdjstmntAmtAndRsn>	[0..*]	
3.107		RemittedAmount	<RmtdAmt>	[0..1]	Amount

3.98 DuePayableAmount <DuePyblAmt>

Presence: [0..1]
Impacted by: R14, R15
Definition: Amount specified is the exact amount due and payable to the creditor.
Data Type: ActiveOrHistoricCurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveOrHistoricCurrencyCode**.*
Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrencyAndAmount
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

3.99 DiscountAppliedAmount <DscntApldAmt>

Presence: [0..1]

Impacted by: R14, R15

Definition: Amount of money that results from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: ActiveOrHistoricCurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrencyAndAmount
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

3.100 CreditNoteAmount <CdtNoteAmt>

Presence: [0..1]

Impacted by: R14, R15

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: ActiveOrHistoricCurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrencyAndAmount
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

3.101 TaxAmount <TaxAmt>

Presence: [0..1]

Impacted by: R14, R15

Definition: Quantity of cash resulting from the calculation of the tax.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: ActiveOrHistoricCurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrencyAndAmount
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

3.102 AdjustmentAmountAndReason <AdjstmntAmtAndRsn>

Presence: [0..*]

Definition: Set of elements used to provide information on the amount and reason of the document adjustment.

Type: *This message item is composed of the following* ***DocumentAdjustment1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.103		Amount	<Amt>	[1..1]	Amount
3.104		CreditDebitIndicator	<CdtDbtInd>	[0..1]	Code
3.105		Reason	<Rsn>	[0..1]	Text
3.106		AdditionalInformation	<AddtlInf>	[0..1]	Text

3.103 Amount <Amt>

Presence: [1..1]

Impacted by: R14, R15

Definition: Amount of money of the document adjustment.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

3.104 CreditDebitIndicator <CdtDbtInd>

Presence: [0..1]

Definition: Specifies whether the adjustment must be substracted or added to the total amount.

Data Type: Code

When this message item is present, one of the following ***CreditDebitCode*** *values must be used:*

Code	Name	Definition
CRDT	Credit	Operation is an increase.
DBIT	Debit	Operation is a decrease.

3.105 Reason <Rsn>

Presence: [0..1]

Definition: Specifies the reason for the adjustment.

Data Type: Max4Text

Format: maxLength: 4
minLength: 1

3.106 AdditionalInformation <AddtlInf>

Presence: [0..1]

Definition: Provides further details on the document adjustment.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

3.107 RemittedAmount <RmtdAmt>

Presence: [0..1]

Impacted by: R14, R15

Definition: Amount of money remitted for the referred document.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

3.108 CreditorReferenceInformation <CdtrRefInf>

Presence: [0..1]

Definition: Reference information provided by the creditor to allow the identification of the underlying documents.

Type: *This message item is composed of the following* ***CreditorReferenceInformation2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.109		Type	<Tp>	[0..1]	
3.114		Reference	<Ref>	[0..1]	Text

3.109 Type <Tp>

Presence: [0..1]

Definition: Specifies the type of creditor reference.

Type: *This message item is composed of the following* ***CreditorReferenceType2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.110		CodeOrProprietary	<CdOrPrtry>	[1..1]	
3.113		Issuer	<Issr>	[0..1]	Text

3.110 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]
Definition: Coded or proprietary format creditor reference type.
Type: *This message item is composed of one of the following* ***CreditorReferenceType1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.111	{Or	Code	<Cd>	[1..1]	Code
3.112	Or}	Proprietary	<Prtry>	[1..1]	Text

3.111 Code <Cd>

Presence: [1..1]
This message item is part of choice ***3.110 CodeOrProprietary****.*
Definition: Type of creditor reference, in a coded form.
Data Type: Code
One of the following ***DocumentType3Code*** *values must be used:*

Code	Name	Definition
DISP	DispatchAdvice	Document is a dispatch advice.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
PUOR	PurchaseOrder	Document is a purchase order.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SCOR	StructuredCommunicationReference	Document is a structured communication reference provided by the creditor to identify the referred transaction.

3.112 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***3.110 CodeOrProprietary****.*
Definition: Creditor reference type, in a proprietary form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.113 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the credit reference type.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.114 Reference <Ref>

Presence: [0..1]
Definition: Unique reference, as assigned by the creditor, to unambiguously refer to the payment transaction.

Usage: If available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the amount of money.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.115 Invoicer <Invcr>

Presence: [0..1]
Definition: Identification of the organisation issuing the invoice, when it is different from the creditor or ultimate creditor.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

3.116 Invoicee <Invcee>

Presence: [0..1]
Definition: Identification of the party to whom an invoice is issued, when it is different from the debtor or ultimate debtor.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

3.117 AdditionalRemittanceInformation <AddtlRmtInf>

Presence: [0..3]
Definition: Additional information, in free text form, to complement the structured remittance information.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.118 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

3.119 Debtor <Dbtr>

Presence: [0..1]
Definition: Party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

3.120 DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor to which a debit entry will be made as a result of the transaction.

Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.122 in 'Message Item Types' section.*

3.121 DebtorAgent <DbtrAgt>

Presence: [0..1]

Definition: Financial institution servicing an account for the debtor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

3.122 CreditorAgent <CdtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the creditor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.130 in 'Message Item Types' section.*

3.123 Creditor <Cdtr>

Presence: [1..1]

Definition: Party to which an amount of money is due.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

3.124 CreditorAccount <CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.122 in 'Message Item Types' section.*

3.125 UltimateCreditor <UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.139 in 'Message Item Types' section.*

Message Item Types

Data Types

Data Types Index

1 Amount

1.1 ActiveCurrencyAndAmount
1.2 ActiveOrHistoricCurrencyAndAmount
1.3 CurrencyAndAmount
1.4 ImpliedCurrencyAndAmount

2 Date Time

2.1 ISODate
2.2 ISODateTime
2.3 ISOTime

3 Identifier

3.1 ActiveCurrencyCode
3.2 ActiveOrHistoricCurrencyCode
3.3 AnyBICIdentifier
3.4 BBANIdentifier
3.5 BICFIIdentifier
3.6 BICNonFIIdentifier
3.7 CHIPSUniversalIdentifier
3.8 CountryCode
3.9 CurrencyCode
3.10 DunsIdentifier
3.11 EANGLNIdentifier
3.12 ExternalAccountIdentification1Code
3.13 ExternalCashClearingSystem1Code
3.14 ExternalCategoryPurpose1Code
3.15 ExternalClearingSystemIdentification1Code
3.16 ExternalCode
3.17 ExternalFinancialInstitutionIdentification1Code
3.18 ExternalLocalInstrument1Code
3.19 ExternalOrganisationIdentification1Code
3.20 ExternalPersonIdentification1Code
3.21 ExternalPurpose1Code
3.22 ExternalServiceLevel1Code
3.23 ExternalStatusReason1Code
3.24 IBAN2007Identifier
3.25 IBANIdentifier
3.26 LanguageCode
3.27 MICIdentifier
3.28 NationalityCode
3.29 UPICIdentifier

4 Quantity: Number and Decimal Number

4.1 DecimalNumber

4.2 Number

5 Rate

5.1 PercentageRate

6 Text

6.1 Max1025Text
6.2 Max105Text
6.3 Max10Text
6.4 Max128Text
6.5 Max140Text
6.6 Max15NumericText
6.7 Max15PlusSignedNumericText
6.8 Max16Text
6.9 Max2048Text
6.10 Max256Text
6.11 Max34Text
6.12 Max350Text
6.13 Max35Text
6.14 Max4AlphaNumericText
6.15 Max4Text
6.16 Max5NumericText
6.17 Max70Text
6.18 PhoneNumber

Data Types Description

1 Amount

1.1 ActiveCurrencyAndAmount

Definition:	A number of monetary units specified in an active currency where the unit of currency is explicit and compliant with ISO 4217.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***ActiveCurrencyCode****.*
Format:	**ActiveCurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **ActiveCurrencyCode** [A-Z]{3,3}

Rule(s):	**ActiveCurrencyAndAmount** CurrencyAmount The number of fractional digits (or minor unit of currency) must comply with ISO 4217. Note: The decimal separator is a dot. **ActiveCurrencyCode** ActiveCurrency The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.
Example:	6545.56 (Ccy='USD')

1.2 ActiveOrHistoricCurrencyAndAmount

Definition:	A number of monetary units specified in an active or a historic currency where the unit of currency is explicit and compliant with ISO 4217.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***ActiveOrHistoricCurrencyCode****.*
Format:	**ActiveOrHistoricCurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **ActiveOrHistoricCurrencyCode** [A-Z]{3,3}
Rule(s):	**ActiveOrHistoricCurrencyAndAmount** CurrencyAmount The number of fractional digits (or minor unit of currency) must comply with ISO 4217. Note: The decimal separator is a dot. **ActiveOrHistoricCurrencyCode** ActiveOrHistoricCurrency The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.
Example:	6284534 (Ccy='EUR')

1.3 CurrencyAndAmount

Definition:	Number of monetary units specified in a currency, where the unit of currency is explicit and compliant with ISO 4217. The decimal separator is a dot. Note: A zero amount is considered a positive amount.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***CurrencyCode****.*
Format:	**CurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **CurrencyCode** [A-Z]{3,3}

Rule(s):	**CurrencyCode** ValidationByTable
Example:	100000 (Ccy='EUR')

1.4 ImpliedCurrencyAndAmount

Definition:	Number of monetary units specified in a currency where the unit of currency is implied by the context and compliant with ISO 4217. The decimal separator is a dot. Note: a zero amount is considered a positive amount.
Format:	fractionDigits: 5 minInclusive: 0 totalDigits: 18
Example:	500000

2 Date Time

2.1 ISODate

Definition:	A particular point in the progression of time in a calendar year expressed in the YYYY-MM-DD format. This representation is defined in "XML Schema Part 2: Datatypes Second Edition - W3C Recommendation 28 October 2004" which is aligned with ISO 8601.
Example:	2002-02-25

2.2 ISODateTime

Definition:	A particular point in the progression of time defined by a mandatory date and a mandatory time component, expressed in either UTC time format (YYYY-MM-DDThh:mm:ss.sssZ), local time with UTC offset format (YYYY-MM-DDThh:mm:ss.sss +/-hh:mm), or local time format (YYYY-MM-DDThh:mm:ss.sss). These representations are defined in "XML Schema Part 2: Datatypes Second Edition - W3C Recommendation 28 October 2004" which is aligned with ISO 8601. Note on the time format: 1) beginning / end of calendar day 00:00:00 = the beginning of a calendar day 24:00:00 = the end of a calendar day 2) fractions of second in time format Decimal fractions of seconds may be included. In this case, the involved parties shall agree on the maximum number of digits that are allowed.
Example:	2002-07-21T08:35:30

2.3 ISOTime

Definition:	A particular point in the progression of time in a calendar day expressed in either UTC time format (hh:mm:ss.sssZ), local time with UTC offset format (hh:mm:ss.sss+/-hh:mm), or local time format (hh:mm:ss.sss). These representations are defined in "XML Schema Part 2: Datatypes Second Edition - W3C Recommendation 28 October 2004" which is aligned with ISO 8601. Note on the time format: 1) beginning / end of calendar day 00:00:00 = the beginning of a calendar day 24:00:00 = the end of a calendar day 2) fractions of second in time format Decimal fractions of seconds may be included. In this case, the involved parties shall agree on the maximum number of digits that are allowed.
Example:	16:34:44

3 Identifier

3.1 ActiveCurrencyCode

Definition:	A code allocated to a currency by a Maintenance Agency under an international identification scheme as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds".
Format:	[A-Z]{3,3}
Rule(s):	ActiveCurrency The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.
Example:	EUR

3.2 ActiveOrHistoricCurrencyCode

Definition:	A code allocated to a currency by a Maintenance Agency under an international identification scheme, as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds".
Format:	[A-Z]{3,3}
Rule(s):	ActiveOrHistoricCurrency The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.
Example:	USD

3.3 AnyBICIdentifier

Definition:	Code allocated to a financial or non-financial institution by the ISO 9362 Registration Authority, as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)".

Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	AnyBIC Only a valid Business identifier code is allowed. Business identifier codes for financial or non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.
Example:	CHASUS33

3.4 BBANIdentifier

Definition:	Basic Bank Account Number (BBAN). Identifier used nationally by financial institutions, ie, in individual countries, generally as part of a National Account Numbering Scheme(s), which uniquely identifies the account of a customer.
Format:	[a-zA-Z0-9]{1,30}
Example:	BARC12345612345678

3.5 BICFIIdentifier

Definition:	Code allocated to a financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)".
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BICFI Valid BICs for financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.
Example:	CHASUS33

3.6 BICNonFIIdentifier

Definition:	Code allocated to a non-financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)".
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BICNonFI Valid BICs for non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.
Example:	USINFRPP

3.7 CHIPSUniversalIdentifier

Definition:	(United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID). Identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.
Format:	CH[0-9]{6,6}
Example:	CH123456

3.8 CountryCode

Definition:	Code to identify a country, a dependency, or another area of particular geopolitical interest, on the basis of country names obtained from the United Nations (ISO 3166, Alpha-2 code).
Format:	[A-Z]{2,2}
Rule(s):	Country The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).
Example:	BE

3.9 CurrencyCode

Definition:	Code allocated to a currency, by a maintenance agency, under an international identification scheme as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds". Valid currency codes are registered with the ISO 4217 Maintenance Agency, and consist of three contiguous letters.
Format:	[A-Z]{3,3}
Rule(s):	ValidationByTable
Example:	AWG

3.10 DunsIdentifier

Definition:	Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.
Format:	[0-9]{9,9}
Example:	578942538

3.11 EANGLNIdentifier

Definition:	Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve the detailed information linked to it.
Format:	[0-9]{13,13}
Example:	7265658971233

3.12 ExternalAccountIdentification1Code

Definition:	Specifies the external account identification scheme name code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	BBAN

3.13 ExternalCashClearingSystem1Code

Definition:	Specifies the cash clearing system, as published in an external cash clearing system code list.
Format:	maxLength: 3 minLength: 1
Example:	CAD

3.14 ExternalCategoryPurpose1Code

Definition:	Specifies the category purpose, as published in an external category purpose code list.
Format:	maxLength: 4 minLength: 1
Example:	CORT

3.15 ExternalClearingSystemIdentification1Code

Definition:	Specifies the clearing system identification code, as published in an external clearing system identification code list.
Format:	maxLength: 5 minLength: 1
Example:	AUBSB

3.16 ExternalCode

Definition:	Specifies an external code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 35 minLength: 1
Example:	External Code 1

3.17 ExternalFinancialInstitutionIdentification1Code

Definition:	Specifies the external financial institution identification scheme name code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	EXC1

3.18 ExternalLocalInstrument1Code

Definition:	Specifies the external local instrument code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 35 minLength: 1
Example:	LOC1

3.19 ExternalOrganisationIdentification1Code

Definition:	Specifies the external organisation identification scheme name code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	CUST

3.20 ExternalPersonIdentification1Code

Definition:	Specifies the external person identification scheme name code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	ARNU

3.21 ExternalPurpose1Code

Definition:	Specifies the external purpose code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	ACCT

3.22 ExternalServiceLevel1Code

Definition:	Specifies the external service level code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	SEPA

3.23 ExternalStatusReason1Code

Definition:	Specifies the status reason, as published in an external status reason code list.

Format:	maxLength: 4 minLength: 1
Example:	AC01

3.24 IBAN2007Identifier

Definition:	An identifier used internationally by financial institutions to uniquely identify the account of a customer at a financial institution, as described in the latest edition of the international standard ISO 13616:2007 - "Banking and related financial services - International Bank Account Number (IBAN)".
Format:	[A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
Rule(s):	IBAN A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.
Example:	AT611904300234573201

3.25 IBANIdentifier

Definition:	An identifier used internationally by financial institutions to uniquely identify the account of a customer at a financial institution, as described in the latest edition of the international standard ISO 13616. "Banking and related financial services - International Bank Account Number (IBAN)".
Format:	[a-zA-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
Rule(s):	IBAN A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.
Example:	AT611904300234573201

3.26 LanguageCode

Definition:	Specifies a language.
Rule(s):	ValidationByTable
Example:	ENG

3.27 MICIdentifier

Definition:	Market Identifier Code. The identification of a financial market, as stipulated in the norm ISO 10383 'Codes for exchanges and market identifications'.
Format:	[A-Z0-9]{4,4}
Example:	XTKS

3.28 NationalityCode

Definition:	Specifies the country where a person was born or is naturalised.
Rule(s):	ValidationByTable
Example:	US

3.29 UPICIdentifier

Definition:	Universal Payment Identification Code (UPIC). Identifier used by the New York Clearing House to mask confidential data, such as bank accounts and bank routing numbers. UPIC numbers remain with business customers, regardless of banking relationship changes.
Format:	[0-9]{8,17}
Example:	12345678

4 Quantity: Number and Decimal Number

4.1 DecimalNumber

Definition:	Number of objects represented as a decimal number, eg, 0.75 or 45.6.
Format:	fractionDigits: 17 totalDigits: 18
Example:	123456789.123456789

4.2 Number

Definition:	Number of objects represented as an integer.
Format:	fractionDigits: 0 totalDigits: 18
Example:	123456789012345678

5 Rate

5.1 PercentageRate

Definition:	Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Format:	fractionDigits: 10 totalDigits: 11
Example:	35

6 Text

6.1 Max1025Text

Definition:	Specifies a character string with a maximum length of 1025 characters.
Format:	maxLength: 1025 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789

6.2 Max105Text

Definition:	Specifies a character string with a maximum length of 105 characters.
Format:	maxLength: 105 minLength: 1

Example:	azefgvgldfpgtvcvlmgovl;v ; :B;lgkdfwxcvljfqsifj

6.3 Max10Text

Definition:	Specifies a character string with a maximum length of 10 characters.
Format:	maxLength: 10 minLength: 1
Example:	AZERTGFDXC

6.4 Max128Text

Definition:	Specifies a character string with a maximum length of 128 characters.
Format:	maxLength: 128 minLength: 1
Example:	A string value of maximum 128 characters.

6.5 Max140Text

Definition:	Specifies a character string with a maximum length of 140 characters.
Format:	maxLength: 140 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.6 Max15NumericText

Definition:	Specifies a numeric string with a maximum length of 15 digits.
Format:	[0-9]{1,15}
Example:	458793625148975

6.7 Max15PlusSignedNumericText

Definition:	Specifies a numeric string with a maximum length of 15 digits and may be prefixed with a plus sign.
Format:	[+]{0,1}[0-9]{1,15}
Example:	+2450

6.8 Max16Text

Definition:	Specifies a character string with a maximum length of 16 characters.
Format:	maxLength: 16 minLength: 1
Example:	ABCdEFghIJKLMNO?

6.9 Max2048Text

Definition:	Specifies a character string with a maximum length of 2048 characters.

Format:	maxLength: 2048 minLength: 1
Example:	Sample1

6.10 Max256Text

Definition:	Specifies a character string with a maximum length of 256 characters.
Format:	maxLength: 256 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.11 Max34Text

Definition:	Specifies a character string with a maximum length of 34 characters.
Format:	maxLength: 34 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234

6.12 Max350Text

Definition:	Specifies a character string with a maximum length of 350 characters.
Format:	maxLength: 350 minLength: 1
Example:	1234567890

6.13 Max35Text

Definition:	Specifies a character string with a maximum length of 35 characters.
Format:	maxLength: 35 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST123456789012345

6.14 Max4AlphaNumericText

Definition:	Specifies an alphanumeric string with a maximum length of 4 characters.
Format:	[a-zA-Z0-9]{1,4} maxLength: 4 minLength: 1
Example:	aBc9

6.15 Max4Text

Definition:	Specifies a character string with a maximum length of 4 characters.

Format:	maxLength: 4 minLength: 1
Example:	MAX4

6.16 Max5NumericText

Definition:	Specifies a numeric string with a maximum length of 5 digits.
Format:	[0-9]{1,5}
Example:	1

6.17 Max70Text

Definition:	Specifies a character string with a maximum length of 70characters.
Format:	maxLength: 70 minLength: 1
Example:	A string value of maximum 70 characters.

6.18 PhoneNumber

Definition:	The collection of information which identifies a specific phone or FAX number as defined by telecom services. It consists of a "+" followed by the country code (from 1 to 3 characters) then a "-" and finally, any combination of numbers, "(", ")", "+" and "-" (up to 30 characters).
Format:	\+[0-9]{1,3}-[0-9()+\-]{1,30}
Example:	+1-(465)432-123

End Points

End Points Index

1 Account

1.1 CashAccount16

2 Account identification

2.1 CashAccount7

3 Financial institution identification

3.1 BranchAndFinancialInstitutionIdentification5

4 Organisation identification

4.1 PartyIdentification43

5 Postal address

5.1 PostalAddress6

6 Regularoty Reporting

6.1 RegulatoryReporting3

7 Tax

7.1 TaxInformation3

End Points Description

1 Account

1.1 CashAccount16

CashAccount16 *is used in message definition* ***CreditorPaymentActivationRequestStatusReportV01*** *p.54, p.55, p.55, p.55, p.56, p.57, p.57, message definition* ***CreditorPaymentActivationRequestV01*** *p.9.*

Definition: Set of elements used to identify an account.

Type: *The following* ***CashAccount16*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.0		Identification	<Id>	[1..1]	
1.1.1	{Or	IBAN	<IBAN>	[1..1]	Identifier
1.1.2	Or}	Other	<Othr>	[1..1]	
1.1.3		Identification	<Id>	[1..1]	Text
1.1.4		SchemeName	<SchmeNm>	[0..1]	
1.1.5	{{Or	Code	<Cd>	[1..1]	Code
1.1.6	Or}}	Proprietary	<Prtry>	[1..1]	Text
1.1.7		Issuer	<Issr>	[0..1]	Text
1.1.8		Type	<Tp>	[0..1]	
1.1.9	{Or	Code	<Cd>	[1..1]	Code
1.1.10	Or}	Proprietary	<Prtry>	[1..1]	Text
1.1.11		Currency	<Ccy>	[0..1]	Code
1.1.12		Name	<Nm>	[0..1]	Text

1.1.0 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Type: *This message item is composed of one of the following* ***AccountIdentification4Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.1	{Or	IBAN	<IBAN>	[1..1]	Identifier
1.1.2	Or}	Other	<Othr>	[1..1]	

1.1.1 IBAN <IBAN>

Presence: [1..1]

*This message item is part of choice **1.1.0 Identification**.*

*Impacted by **R24** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R24** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.61, p.14 for additional information.*

Definition: International Bank Account Number (IBAN) - identifier used internationally by financial institutions to uniquely identify the account of a customer. Further specifications of the format and content of the IBAN can be found in the standard ISO 13616 "Banking and related financial services - International Bank Account Number (IBAN)" version 1997-10-01, or later revisions.

Data Type: IBAN2007Identifier

Format: [A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}

Rule(s): IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

1.1.2 Other <Othr>

Presence: [1..1]

*This message item is part of choice **1.1.0 Identification**.*

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Type: *This message item is composed of the following **GenericAccountIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.3		Identification	<Id>	[1..1]	Text
1.1.4		SchemeName	<SchmeNm>	[0..1]	
1.1.7		Issuer	<Issr>	[0..1]	Text

1.1.3 Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Data Type: Max34Text

Format: maxLength: 34
minLength: 1

1.1.4 SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme

Type: *This message item is composed of one of the following **AccountSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.5	{Or	Code	<Cd>	[1..1]	Code
1.1.6	Or}	Proprietary	<Prtry>	[1..1]	Text

1.1.5 Code <Cd>

Presence: [1..1]
*This message item is part of choice **1.1.4 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalAccountIdentification1Code
Format: maxLength: 4
minLength: 1

1.1.6 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **1.1.4 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.1.7 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.1.8 Type <Tp>

Presence: [0..1]
Definition: Specifies the nature, or use of the account.
Type: *This message item is composed of one of the following **CashAccountType2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.9	{Or	Code	<Cd>	[1..1]	Code
1.1.10	Or}	Proprietary	<Prtry>	[1..1]	Text

1.1.9 Code <Cd>

Presence: [1..1]
*This message item is part of choice **1.1.8 Type**.*
Definition: Account type, in a coded form.
Data Type: Code
*One of the following **CashAccountType4Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.

Code	Name	Definition
CHAR	Charges	Account used for charges if different from the account for payment.
CISH	CashIncome	Account used for payment of income if different from the current cash account.
COMM	Commission	Account used for commission if different from the account for payment.
LOAN	Loan	Account used for loans.
MGLD	MarginalLending	Account used for a marginal lending facility.
MOMA	MoneyMarket	Account used for money markets if different from the cash account.
NREX	NonResidentExternal	Account used for non-resident external.
ODFT	Overdraft	Account is used for overdrafts.
ONDP	OverNightDeposit	Account used for overnight deposits.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SLRY	Salary	Accounts used for salary payments.
SVGS	Savings	Account used for savings.
TAXE	Tax	Account used for taxes if different from the account for payment.
TRAS	CashTrading	Account used for trading if different from the current cash account.

1.1.10 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **1.1.8 Type**.*
Definition: Nature or use of the account in a proprietary form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.1.11 Currency <Ccy>

Presence: [0..1]
*Impacted by **R15** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R22** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.59, p.13 for additional information.*

Definition: Identification of the currency in which the account is held.

Usage: Currency should only be used in case one and the same account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.
Data Type: ActiveOrHistoricCurrencyCode
Format: [A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

1.1.12 Name <Nm>

Presence: [0..1]

Definition: Name of the account, as assigned by the account servicing institution, in agreement with the account owner in order to provide an additional means of identification of the account.

Usage: The account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2 Account identification

2.1 CashAccount7

CashAccount7 *is used in message definition* ***CreditorPaymentActivationRequestV01*** *p.8.*

Definition: Information used for identifying an account.

Type: *The following* ***CashAccount7*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.0		Identification	<Id>	[1..1]	
2.1.1	{Or	IBAN	<IBAN>	[1..1]	Identifier
2.1.2	Or	BBAN	<BBAN>	[1..1]	Identifier
2.1.3	Or	UPIC	<UPIC>	[1..1]	Identifier
2.1.4	Or}	ProprietaryAccount	<PrtryAcct>	[1..1]	
2.1.5		Identification	<Id>	[1..1]	Text
2.1.6		Type	<Tp>	[0..1]	
2.1.7	{Or	Code	<Cd>	[1..1]	Code
2.1.8	Or}	Proprietary	<Prtry>	[1..1]	Text
2.1.9		Currency	<Ccy>	[0..1]	Code
2.1.10		Name	<Nm>	[0..1]	Text

2.1.0 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.

Type: *This message item is composed of one of the following* ***AccountIdentification3Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.1	{Or	IBAN	<IBAN>	[1..1]	Identifier
2.1.2	Or	BBAN	<BBAN>	[1..1]	Identifier
2.1.3	Or	UPIC	<UPIC>	[1..1]	Identifier
2.1.4	Or}	ProprietaryAccount	<PrtryAcct>	[1..1]	

2.1.1 IBAN <IBAN>

Presence: [1..1]

*This message item is part of choice **2.1.0 Identification**.*

*Impacted by **R15** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.12 for additional information.*

Definition: International Bank Account Number (IBAN) - identifier used internationally by financial institutions to uniquely identify the account of a customer. Further specifications of the format and content of the IBAN can be found in the standard ISO 13616 "Banking and related financial services - International Bank Account Number (IBAN)" version 1997-10-01, or later revisions.

Data Type: IBANIdentifier

Format: [a-zA-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}

Rule(s): IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

2.1.2 BBAN <BBAN>

Presence: [1..1]

*This message item is part of choice **2.1.0 Identification**.*

Definition: Basic Bank Account Number (BBAN) - identifier used nationally by financial institutions, ie, in individual countries, generally as part of a National Account Numbering Scheme(s), to uniquely identify the account of a customer.

Data Type: BBANIdentifier

Format: [a-zA-Z0-9]{1,30}

2.1.3 UPIC <UPIC>

Presence: [1..1]

*This message item is part of choice **2.1.0 Identification**.*

Definition: Universal Payment Identification Code (UPIC) - identifier used by the New York Clearing House to mask confidential data, such as bank accounts and bank routing numbers. UPIC numbers remain with business customers, regardless of banking relationship changes.

Data Type: UPICIdentifier

Format: [0-9]{8,17}

2.1.4 ProprietaryAccount <PrtryAcct>

Presence: [1..1]

*This message item is part of choice **2.1.0 Identification**.*

Definition: Account number used by financial institutions in individual countries to identify an account of a customer, but not necessarily the bank and branch of the financial institution in which the account is held.

Type: *This message item is composed of the following* ***SimpleIdentificationInformation2*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.5		Identification	<Id>	[1..1]	Text

2.1.5 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max34Text
Format: maxLength: 34
minLength: 1

2.1.6 Type <Tp>

Presence: [0..1]
Definition: Nature, or use, of the account.
Type: *This message item is composed of one of the following* ***CashAccountType2*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.7	{Or	Code	<Cd>	[1..1]	Code
2.1.8	Or}	Proprietary	<Prtry>	[1..1]	Text

2.1.7 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.1.6 Type****.*
Definition: Account type, in a coded form.
Data Type: Code
One of the following ***CashAccountType4Code*** *values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
CISH	CashIncome	Account used for payment of income if different from the current cash account.
COMM	Commission	Account used for commission if different from the account for payment.
LOAN	Loan	Account used for loans.
MGLD	MarginalLending	Account used for a marginal lending facility.
MOMA	MoneyMarket	Account used for money markets if different from the cash account.

Code	Name	Definition
NREX	NonResidentExternal	Account used for non-resident external.
ODFT	Overdraft	Account is used for overdrafts.
ONDP	OverNightDeposit	Account used for overnight deposits.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SLRY	Salary	Accounts used for salary payments.
SVGS	Savings	Account used for savings.
TAXE	Tax	Account used for taxes if different from the account for payment.
TRAS	CashTrading	Account used for trading if different from the current cash account.

2.1.8 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.1.6 Type**.*

Definition: Nature or use of the account in a proprietary form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.1.9 Currency <Ccy>

Presence: [0..1]

*Impacted by **R16** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.12 for additional information.*

Definition: Identification of the currency in which the account is held.

Usage: Currency should only be used in case one and the same account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

2.1.10 Name <Nm>

Presence: [0..1]

Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

3 Financial institution identification

3.1 BranchAndFinancialInstitutionIdentification5

BranchAndFinancialInstitutionIdentification5 *is used in message definition* ***CreditorPaymentActivationRequestStatusReportV01*** *p.52, p.52, p.54, p.55, p.55, p.55, p.56, p.56, p.57, p.57, message definition* ***CreditorPaymentActivationRequestV01*** *p.8, p.9, p.9, p.9, p.9.*

Definition: Set of elements used to uniquely and unambiguously identify a financial institution or a branch of a financial institution.

Type: *The following* ***BranchAndFinancialInstitutionIdentification5*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.0		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
3.1.1		BICFI	<BICFI>	[0..1]	Identifier
3.1.2		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
3.1.3		ClearingSystemIdentification	<ClrSysId>	[0..1]	
3.1.4	{Or	Code	<Cd>	[1..1]	Code
3.1.5	Or}	Proprietary	<Prtry>	[1..1]	Text
3.1.6		MemberIdentification	<MmbId>	[1..1]	Text
3.1.7		Name	<Nm>	[0..1]	Text
3.1.8		PostalAddress	<PstlAdr>	[0..1]	
3.1.9		AddressType	<AdrTp>	[0..1]	Code
3.1.10		Department	<Dept>	[0..1]	Text
3.1.11		SubDepartment	<SubDept>	[0..1]	Text
3.1.12		StreetName	<StrtNm>	[0..1]	Text
3.1.13		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.14		PostCode	<PstCd>	[0..1]	Text
3.1.15		TownName	<TwnNm>	[0..1]	Text
3.1.16		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.17		Country	<Ctry>	[0..1]	Code
3.1.18		AddressLine	<AdrLine>	[0..7]	Text
3.1.19		Other	<Othr>	[0..1]	
3.1.20		Identification	<Id>	[1..1]	Text
3.1.21		SchemeName	<SchmeNm>	[0..1]	
3.1.22	{Or	Code	<Cd>	[1..1]	Code
3.1.23	Or}	Proprietary	<Prtry>	[1..1]	Text
3.1.24		Issuer	<Issr>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.25		BranchIdentification	<BrnchId>	[0..1]	
3.1.26		Identification	<Id>	[0..1]	Text
3.1.27		Name	<Nm>	[0..1]	Text
3.1.28		PostalAddress	<PstlAdr>	[0..1]	
3.1.29		AddressType	<AdrTp>	[0..1]	Code
3.1.30		Department	<Dept>	[0..1]	Text
3.1.31		SubDepartment	<SubDept>	[0..1]	Text
3.1.32		StreetName	<StrtNm>	[0..1]	Text
3.1.33		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.34		PostCode	<PstCd>	[0..1]	Text
3.1.35		TownName	<TwnNm>	[0..1]	Text
3.1.36		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.37		Country	<Ctry>	[0..1]	Code
3.1.38		AddressLine	<AdrLine>	[0..7]	Text

3.1.0 FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *This message item is composed of the following **FinancialInstitutionIdentification8** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.1		BICFI	<BICFI>	[0..1]	Identifier
3.1.2		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
3.1.7		Name	<Nm>	[0..1]	Text
3.1.8		PostalAddress	<PstlAdr>	[0..1]	
3.1.19		Other	<Othr>	[0..1]	

3.1.1 BICFI <BICFI>

Presence: [0..1]

*Impacted by **R7** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R17** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.58, p.13 for additional information.*

Definition: Code allocated to a financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)".

Data Type: BICFIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BICFI
Valid BICs for financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

3.1.2 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [0..1]

Definition: Information used to identify a member within a clearing system.

Type: *This message item is composed of the following **ClearingSystemMemberIdentification2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.3		ClearingSystemIdentification	<ClrSysId>	[0..1]	
3.1.6		MemberIdentification	<MmbId>	[1..1]	Text

3.1.3 ClearingSystemIdentification <ClrSysId>

Presence: [0..1]

Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.

Type: *This message item is composed of one of the following **ClearingSystemIdentification2Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.4	{Or	Code	<Cd>	[1..1]	Code
3.1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

3.1.4 Code <Cd>

Presence: [1..1]

*This message item is part of choice **3.1.3 ClearingSystemIdentification**.*

Definition: Identification of a clearing system, in a coded form as published in an external list.

Data Type: ExternalClearingSystemIdentification1Code

Format: maxLength: 5
minLength: 1

3.1.5 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.1.3 ClearingSystemIdentification**.*

Definition: Identification code for a clearing system, that has not yet been identified in the list of clearing systems.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.6 MemberIdentification <MmbId>

Presence: [1..1]
Definition: Identification of a member of a clearing system.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.7 Name <Nm>

Presence: [0..1]
Definition: Name by which an agent is known and which is usually used to identify that agent.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.1.8 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.9		AddressType	<AdrTp>	[0..1]	Code
3.1.10		Department	<Dept>	[0..1]	Text
3.1.11		SubDepartment	<SubDept>	[0..1]	Text
3.1.12		StreetName	<StrtNm>	[0..1]	Text
3.1.13		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.14		PostCode	<PstCd>	[0..1]	Text
3.1.15		TownName	<TwnNm>	[0..1]	Text
3.1.16		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.17		Country	<Ctry>	[0..1]	Code
3.1.18		AddressLine	<AdrLine>	[0..7]	Text

3.1.9 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.

Code	Name	Definition
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

3.1.10 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.11 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.12 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.13 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

3.1.14 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

3.1.15 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.16 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.17 Country <Ctry>

Presence: [0..1]
*Impacted by **R5** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R3** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.58, p.11 for additional information.*

Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

3.1.18 AddressLine <AdrLine>

Presence: [0..7]
Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.19 Other <Othr>

Presence: [0..1]
Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following **GenericFinancialIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.20		Identification	<Id>	[1..1]	Text
3.1.21		SchemeName	<SchmeNm>	[0..1]	
3.1.24		Issuer	<Issr>	[0..1]	Text

3.1.20 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.21 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following **FinancialIdentificationSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.22	{Or	Code	<Cd>	[1..1]	Code
3.1.23	Or}	Proprietary	<Prtry>	[1..1]	Text

3.1.22 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.1.21 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalFinancialInstitutionIdentification1Code
Format: maxLength: 4
minLength: 1

3.1.23 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.1.21 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.24 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.25 BranchIdentification <BrnchId>

Presence: [0..1]
Definition: Identifies a specific branch of a financial institution.

Usage: This component should be used in case the identification information in the financial institution component does not provide identification up to branch level.

Type: *This message item is composed of the following **BranchData2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.26		Identification	<Id>	[0..1]	Text
3.1.27		Name	<Nm>	[0..1]	Text
3.1.28		PostalAddress	<PstlAdr>	[0..1]	

3.1.26 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a branch of a financial institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.27 Name <Nm>

Presence: [0..1]
Definition: Name by which an agent is known and which is usually used to identify that agent.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.1.28 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.29		AddressType	<AdrTp>	[0..1]	Code
3.1.30		Department	<Dept>	[0..1]	Text
3.1.31		SubDepartment	<SubDept>	[0..1]	Text
3.1.32		StreetName	<StrtNm>	[0..1]	Text
3.1.33		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.34		PostCode	<PstCd>	[0..1]	Text
3.1.35		TownName	<TwnNm>	[0..1]	Text
3.1.36		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.37		Country	<Ctry>	[0..1]	Code
3.1.38		AddressLine	<AdrLine>	[0..7]	Text

3.1.29 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code

*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

3.1.30 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.31 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.32 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.33 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

3.1.34 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text

Format: maxLength: 16
minLength: 1

3.1.35 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.36 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country such as state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.37 Country <Ctry>

Presence: [0..1]

*Impacted by **R5** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R3** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.58, p.11 for additional information.*

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

3.1.38 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4 Organisation identification

4.1 PartyIdentification43

***PartyIdentification43** is used in message definition **CreditorPaymentActivationRequestStatusReportV01** p.52, p.53, p.53, p.54, p.54, p.56, p.56, p.57, p.57, p.57, p.57, p.57, p.57, message definition **CreditorPaymentActivationRequestV01** p.7, p.8, p.8, p.9, p.9, p.9, p.11, p.11.*

Definition: Set of elements used to identify a person or an organisation.

Type: *The following **PartyIdentification43** element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.0		Name	<Nm>	[0..1]	Text
4.1.1		PostalAddress	<PstlAdr>	[0..1]	
4.1.2		AddressType	<AdrTp>	[0..1]	Code
4.1.3		Department	<Dept>	[0..1]	Text
4.1.4		SubDepartment	<SubDept>	[0..1]	Text
4.1.5		StreetName	<StrtNm>	[0..1]	Text
4.1.6		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.7		PostCode	<PstCd>	[0..1]	Text
4.1.8		TownName	<TwnNm>	[0..1]	Text
4.1.9		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.10		Country	<Ctry>	[0..1]	Code
4.1.11		AddressLine	<AdrLine>	[0..7]	Text
4.1.12		Identification	<Id>	[0..1]	
4.1.13	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.14		AnyBIC	<AnyBIC>	[0..1]	Identifier
4.1.15		Other	<Othr>	[0..*]	
4.1.16		Identification	<Id>	[1..1]	Text
4.1.17		SchemeName	<SchmeNm>	[0..1]	
4.1.18	{{Or	Code	<Cd>	[1..1]	Code
4.1.19	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.20		Issuer	<Issr>	[0..1]	Text
4.1.21	Or}	PrivateIdentification	<PrvtId>	[1..1]	
4.1.22		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.23		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.24		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.25		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.26		CountryOfBirth	<CtryOfBirth>	[1..1]	Code
4.1.27		Other	<Othr>	[0..*]	
4.1.28		Identification	<Id>	[1..1]	Text
4.1.29		SchemeName	<SchmeNm>	[0..1]	
4.1.30	{{Or	Code	<Cd>	[1..1]	Code
4.1.31	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.32		Issuer	<Issr>	[0..1]	Text
4.1.33		CountryOfResidence	<CtryOfRes>	[0..1]	Code
4.1.34		ContactDetails	<CtctDtls>	[0..1]	
4.1.35		NamePrefix	<NmPrfx>	[0..1]	Code

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.36		Name	<Nm>	[0..1]	Text
4.1.37		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.38		MobileNumber	<MobNb>	[0..1]	Text
4.1.39		FaxNumber	<FaxNb>	[0..1]	Text
4.1.40		EmailAddress	<EmailAdr>	[0..1]	Text
4.1.41		Other	<Othr>	[0..1]	Text

4.1.0 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.1 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.2		AddressType	<AdrTp>	[0..1]	Code
4.1.3		Department	<Dept>	[0..1]	Text
4.1.4		SubDepartment	<SubDept>	[0..1]	Text
4.1.5		StreetName	<StrtNm>	[0..1]	Text
4.1.6		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.7		PostCode	<PstCd>	[0..1]	Text
4.1.8		TownName	<TwnNm>	[0..1]	Text
4.1.9		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.10		Country	<Ctry>	[0..1]	Code
4.1.11		AddressLine	<AdrLine>	[0..7]	Text

4.1.2 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.3 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.4 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.5 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.6 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.7 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.8 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.9 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country such as state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.10 Country <Ctry>

Presence: [0..1]

*Impacted by **R5** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R3** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.58, p.11 for additional information.*

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.11 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.12 Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Type: *This message item is composed of one of the following **Party11Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.13	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.21	Or}	PrivateIdentification	<PrvtId>	[1..1]	

4.1.13 OrganisationIdentification <OrgId>

Presence: [1..1]

*This message item is part of choice **4.1.12 Identification**.*

Definition: Unique and unambiguous way to identify an organisation.

Type: *This message item is composed of the following **OrganisationIdentification8** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.14		AnyBIC	<AnyBIC>	[0..1]	Identifier
4.1.15		Other	<Othr>	[0..*]	

4.1.14 AnyBIC <AnyBIC>

Presence: [0..1]

*Impacted by **R6** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R4** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.58, p.11 for additional information.*

Definition: Code allocated to a financial institution or non financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)".

Data Type: AnyBICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): AnyBIC
Only a valid Business identifier code is allowed. Business identifier codes for financial or non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

4.1.15 Other <Othr>

Presence: [0..*]

Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme.

Type: *This message item is composed of the following **GenericOrganisationIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.16		Identification	<Id>	[1..1]	Text
4.1.17		SchemeName	<SchmeNm>	[0..1]	
4.1.20		Issuer	<Issr>	[0..1]	Text

4.1.16 Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.17 SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

Type: *This message item is composed of one of the following* ***OrganisationIdentificationSchemeName1Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.18	{Or	Code	<Cd>	[1..1]	Code
4.1.19	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.18 Code <Cd>

Presence: [1..1]

This message item is part of choice ***4.1.17 SchemeName****.*

Definition: Name of the identification scheme, in a coded form as published in an external list.

Data Type: ExternalOrganisationIdentification1Code

Format: maxLength: 4
minLength: 1

4.1.19 Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice ***4.1.17 SchemeName****.*

Definition: Name of the identification scheme, in a free text form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.20 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.21 PrivateIdentification <PrvtId>

Presence: [1..1]

This message item is part of choice ***4.1.12 Identification****.*

Definition: Unique and unambiguous identification of a person, eg, passport.

Type: *This message item is composed of the following* ***PersonIdentification5*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.22		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.27		Other	<Othr>	[0..*]	

4.1.22 DateAndPlaceOfBirth <DtAndPlcOfBirth>

Presence: [0..1]
Definition: Date and place of birth of a person.
Type: *This message item is composed of the following **DateAndPlaceOfBirth** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.23		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.24		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.25		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.26		CountryOfBirth	<CtryOfBirth>	[1..1]	Code

4.1.23 BirthDate <BirthDt>

Presence: [1..1]
Definition: Date on which a person is born.
Data Type: ISODate

4.1.24 ProvinceOfBirth <PrvcOfBirth>

Presence: [0..1]
Definition: Province where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.25 CityOfBirth <CityOfBirth>

Presence: [1..1]
Definition: City where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.26 CountryOfBirth <CtryOfBirth>

Presence: [1..1]
*Impacted by **R5** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R3** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.58, p.11 for additional information.*

Definition: Country where a person was born.
Data Type: CountryCode

Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.27 Other <Othr>

Presence: [0..*]
Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following **GenericPersonIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.28		Identification	<Id>	[1..1]	Text
4.1.29		SchemeName	<SchmeNm>	[0..1]	
4.1.32		Issuer	<Issr>	[0..1]	Text

4.1.28 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.29 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following **PersonIdentificationSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.30	{Or	Code	<Cd>	[1..1]	Code
4.1.31	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.30 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.29 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalPersonIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.31 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.29 SchemeName**.*

Definition: Name of the identification scheme, in a free text form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.32 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.33 CountryOfResidence <CtryOfRes>

Presence: [0..1]

*Impacted by **R5** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R3** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.58, p.11 for additional information.*

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.34 ContactDetails <CtctDtls>

Presence: [0..1]

Definition: Set of elements used to indicate how to contact the party.

Type: *This message item is composed of the following **ContactDetails2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.35		NamePrefix	<NmPrfx>	[0..1]	Code
4.1.36		Name	<Nm>	[0..1]	Text
4.1.37		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.38		MobileNumber	<MobNb>	[0..1]	Text
4.1.39		FaxNumber	<FaxNb>	[0..1]	Text
4.1.40		EmailAddress	<EmailAdr>	[0..1]	Text
4.1.41		Other	<Othr>	[0..1]	Text

4.1.35 NamePrefix <NmPrfx>

Presence: [0..1]

Definition: Specifies the terms used to formally address a person.

Data Type: Code

*When this message item is present, one of the following **NamePrefix1Code** values must be used:*

Code	Name	Definition
DOCT	Doctor	Title of the person is Doctor or Dr.
MADM	Madam	Title of the person is Madam.
MISS	Miss	Title of the person is Miss.
MIST	Mister	Title of the person is Mister or Mr.

4.1.36 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.37 PhoneNumber <PhneNb>

Presence: [0..1]
Definition: Collection of information that identifies a phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.38 MobileNumber <MobNb>

Presence: [0..1]
Definition: Collection of information that identifies a mobile phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.39 FaxNumber <FaxNb>

Presence: [0..1]
Definition: Collection of information that identifies a FAX number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.40 EmailAddress <EmailAdr>

Presence: [0..1]
Definition: Address for electronic mail (e-mail).
Data Type: Max2048Text
Format: maxLength: 2048
minLength: 1

4.1.41 Other <Othr>

Presence: [0..1]
Definition: Contact details in an other form.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5 Postal address

5.1 PostalAddress6

PostalAddress6 *is used in message definition* ***CreditorPaymentActivationRequestV01*** *p.9, p.9, p.10.*

Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *The following* ***PostalAddress6*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.0		AddressType	<AdrTp>	[0..1]	Code
5.1.1		Department	<Dept>	[0..1]	Text
5.1.2		SubDepartment	<SubDept>	[0..1]	Text
5.1.3		StreetName	<StrtNm>	[0..1]	Text
5.1.4		BuildingNumber	<BldgNb>	[0..1]	Text
5.1.5		PostCode	<PstCd>	[0..1]	Text
5.1.6		TownName	<TwnNm>	[0..1]	Text
5.1.7		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
5.1.8		Country	<Ctry>	[0..1]	Code
5.1.9		AddressLine	<AdrLine>	[0..7]	Text

5.1.0 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
When this message item is present, one of the following ***AddressType2Code*** *values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

5.1.1 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text

Format: maxLength: 70
minLength: 1

5.1.2 SubDepartment <SubDept>

Presence: [0..1]

Definition: Identification of a sub-division of a large organisation or building.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

5.1.3 StreetName <StrtNm>

Presence: [0..1]

Definition: Name of a street or thoroughfare.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

5.1.4 BuildingNumber <BldgNb>

Presence: [0..1]

Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

5.1.5 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

5.1.6 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.7 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country such as state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.8 Country <Ctry>

Presence: [0..1]

*Impacted by **R5** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R3** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.58, p.11 for additional information.*

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

5.1.9 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

6 Regularoty Reporting

6.1 RegulatoryReporting3

***RegulatoryReporting3** is used in message definition **CreditorPaymentActivationRequestV01** p.9.*

Definition: Information needed due to regulatory and/or statutory requirements.

Type: *The following **RegulatoryReporting3** element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.0		DebitCreditReportingIndicator	<DbtCdtRptgInd>	[0..1]	Code
6.1.1		Authority	<Authrty>	[0..1]	
6.1.2		Name	<Nm>	[0..1]	Text
6.1.3		Country	<Ctry>	[0..1]	Code
6.1.4		Details	<Dtls>	[0..*]	
6.1.5		Type	<Tp>	[0..1]	Text
6.1.6		Date	<Dt>	[0..1]	DateTime
6.1.7		Country	<Ctry>	[0..1]	Code
6.1.8		Code	<Cd>	[0..1]	Text
6.1.9		Amount	<Amt>	[0..1]	Amount
6.1.10		Information	<Inf>	[0..*]	Text

6.1.0 DebitCreditReportingIndicator <DbtCdtRptgInd>

Presence: [0..1]

Definition: Identifies whether the regulatory reporting information applies to the debit side, to the credit side or to both debit and credit sides of the transaction.

Data Type: Code

*When this message item is present, one of the following **RegulatoryReportingType1Code** values must be used:*

Code	Name	Definition
BOTH	Both	Regulatory information applies to both credit and debit sides.
CRED	Credit	Regulatory information applies to the credit side.
DEBT	Debit	Regulatory information applies to the debit side.

6.1.1 Authority <Authrty>

Presence: [0..1]

Definition: Entity requiring the regulatory reporting information.

Type: *This message item is composed of the following **RegulatoryAuthority2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.2		Name	<Nm>	[0..1]	Text
6.1.3		Country	<Ctry>	[0..1]	Code

6.1.2 Name <Nm>

Presence: [0..1]

Definition: Name of the entity requiring the regulatory reporting information.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

6.1.3 Country <Ctry>

Presence: [0..1]

*Impacted by **R5** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R3** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.58, p.11 for additional information.*

Definition: Country of the entity that requires the regulatory reporting information.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

6.1.4 Details <Dtls>

Presence: [0..*]

Definition: Set of elements used to provide details on the regulatory reporting information.
Type: *This message item is composed of the following **StructuredRegulatoryReporting3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.5		Type	<Tp>	[0..1]	Text
6.1.6		Date	<Dt>	[0..1]	DateTime
6.1.7		Country	<Ctry>	[0..1]	Code
6.1.8		Code	<Cd>	[0..1]	Text
6.1.9		Amount	<Amt>	[0..1]	Amount
6.1.10		Information	<Inf>	[0..*]	Text

6.1.5 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of the information supplied in the regulatory reporting details.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.6 Date <Dt>

Presence: [0..1]
Definition: Date related to the specified type of regulatory reporting details.
Data Type: ISODate

6.1.7 Country <Ctry>

Presence: [0..1]
*Impacted by **R5** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R3** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.58, p.11 for additional information.*

Definition: Country related to the specified type of regulatory reporting details.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

6.1.8 Code <Cd>

Presence: [0..1]
Definition: Specifies the nature, purpose, and reason for the transaction to be reported for regulatory and statutory requirements in a coded form.
Data Type: Max10Text
Format: maxLength: 10
minLength: 1

6.1.9 Amount <Amt>

Presence: [0..1]

*Impacted by **R14** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R15** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R21** in message definition **CreditorPaymentActivationRequestV01**, **R22** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.59, p.59, p.13, p.13 for additional information.*

Definition: Amount of money to be reported for regulatory and statutory requirements.

Data Type: ActiveOrHistoricCurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveOrHistoricCurrencyCode**.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

6.1.10 Information <Inf>

Presence: [0..*]

Definition: Additional details that cater for specific domestic regulatory requirements.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7 Tax

7.1 TaxInformation3

***TaxInformation3** is used in message definition **CreditorPaymentActivationRequestV01** p.10.*

Definition: Details about tax paid, or to be paid, to the government in accordance with the law, including pre-defined parameters such as thresholds and type of account.

Type: *The following **TaxInformation3** element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.0		Creditor	<Cdtr>	[0..1]	
7.1.1		TaxIdentification	<TaxId>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.2		RegistrationIdentification	<RegnId>	[0..1]	Text
7.1.3		TaxType	<TaxTp>	[0..1]	Text
7.1.4		Debtor	<Dbtr>	[0..1]	
7.1.5		TaxIdentification	<TaxId>	[0..1]	Text
7.1.6		RegistrationIdentification	<RegnId>	[0..1]	Text
7.1.7		TaxType	<TaxTp>	[0..1]	Text
7.1.8		Authorisation	<Authstn>	[0..1]	
7.1.9		Title	<Titl>	[0..1]	Text
7.1.10		Name	<Nm>	[0..1]	Text
7.1.11		AdministrationZone	<AdmstnZn>	[0..1]	Text
7.1.12		ReferenceNumber	<RefNb>	[0..1]	Text
7.1.13		Method	<Mtd>	[0..1]	Text
7.1.14		TotalTaxableBaseAmount	<TtlTaxblBaseAmt>	[0..1]	Amount
7.1.15		TotalTaxAmount	<TtlTaxAmt>	[0..1]	Amount
7.1.16		Date	<Dt>	[0..1]	DateTime
7.1.17		SequenceNumber	<SeqNb>	[0..1]	Quantity
7.1.18		Record	<Rcrd>	[0..*]	
7.1.19		Type	<Tp>	[0..1]	Text
7.1.20		Category	<Ctgy>	[0..1]	Text
7.1.21		CategoryDetails	<CtgyDtls>	[0..1]	Text
7.1.22		DebtorStatus	<DbtrSts>	[0..1]	Text
7.1.23		CertificateIdentification	<CertId>	[0..1]	Text
7.1.24		FormsCode	<FrmsCd>	[0..1]	Text
7.1.25		Period	<Prd>	[0..1]	
7.1.26		Year	<Yr>	[0..1]	DateTime
7.1.27		Type	<Tp>	[0..1]	Code
7.1.28		FromToDate	<FrToDt>	[0..1]	
7.1.29		FromDate	<FrDt>	[1..1]	DateTime
7.1.30		ToDate	<ToDt>	[1..1]	DateTime
7.1.31		TaxAmount	<TaxAmt>	[0..1]	
7.1.32		Rate	<Rate>	[0..1]	Rate
7.1.33		TaxableBaseAmount	<TaxblBaseAmt>	[0..1]	Amount
7.1.34		TotalAmount	<TtlAmt>	[0..1]	Amount
7.1.35		Details	<Dtls>	[0..*]	
7.1.36		Period	<Prd>	[0..1]	
7.1.37		Year	<Yr>	[0..1]	DateTime

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.38		Type	<Tp>	[0..1]	Code
7.1.39		FromToDate	<FrToDt>	[0..1]	
7.1.40		FromDate	<FrDt>	[1..1]	DateTime
7.1.41		ToDate	<ToDt>	[1..1]	DateTime
7.1.42		Amount	<Amt>	[1..1]	Amount
7.1.43		AdditionalInformation	<AddtlInf>	[0..1]	Text

7.1.0 Creditor <Cdtr>

Presence: [0..1]
Definition: Party on the credit side of the transaction to which the tax applies.
Type: *This message item is composed of the following **TaxParty1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.1		TaxIdentification	<TaxId>	[0..1]	Text
7.1.2		RegistrationIdentification	<RegnId>	[0..1]	Text
7.1.3		TaxType	<TaxTp>	[0..1]	Text

7.1.1 TaxIdentification <TaxId>

Presence: [0..1]
Definition: Tax identification number of the creditor.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.2 RegistrationIdentification <RegnId>

Presence: [0..1]
Definition: Unique identification, as assigned by an organisation, to unambiguously identify a party.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.3 TaxType <TaxTp>

Presence: [0..1]
Definition: Type of tax payer.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.4 Debtor <Dbtr>

Presence: [0..1]

Definition: Set of elements used to identify the party on the debit side of the transaction to which the tax applies.
Type: *This message item is composed of the following **TaxParty2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.5		TaxIdentification	<TaxId>	[0..1]	Text
7.1.6		RegistrationIdentification	<RegnId>	[0..1]	Text
7.1.7		TaxType	<TaxTp>	[0..1]	Text
7.1.8		Authorisation	<Authstn>	[0..1]	

7.1.5 TaxIdentification <TaxId>

Presence: [0..1]
Definition: Tax identification number of the debtor.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.6 RegistrationIdentification <RegnId>

Presence: [0..1]
Definition: Unique identification, as assigned by an organisation, to unambiguously identify a party.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.7 TaxType <TaxTp>

Presence: [0..1]
Definition: Type of tax payer.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.8 Authorisation <Authstn>

Presence: [0..1]
Definition: Details of the authorised tax paying party.
Type: *This message item is composed of the following **TaxAuthorisation1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.9		Title	<Titl>	[0..1]	Text
7.1.10		Name	<Nm>	[0..1]	Text

7.1.9 Title <Titl>

Presence: [0..1]
Definition: Title or position of debtor or the debtor's authorised representative.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.10 Name <Nm>

Presence: [0..1]
Definition: Name of the debtor or the debtor's authorised representative.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

7.1.11 AdministrationZone <AdmstnZn>

Presence: [0..1]
Definition: Territorial part of a country to which the tax payment is related.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.12 ReferenceNumber <RefNb>

Presence: [0..1]
Definition: Tax reference information that is specific to a taxing agency.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

7.1.13 Method <Mtd>

Presence: [0..1]
Definition: Method used to indicate the underlying business or how the tax is paid.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.14 TotalTaxableBaseAmount <TtlTaxblBaseAmt>

Presence: [0..1]
*Impacted by **R14** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R15** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R21** in message definition **CreditorPaymentActivationRequestV01**, **R22** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.59, p.59, p.13, p.13 for additional information.*

Definition: Total amount of money on which the tax is based.
Data Type: ActiveOrHistoricCurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveOrHistoricCurrencyCode**.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

7.1.15 TotalTaxAmount <TtlTaxAmt>

Presence: [0..1]

*Impacted by **R14** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R15** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R21** in message definition **CreditorPaymentActivationRequestV01**, **R22** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.59, p.59, p.13, p.13 for additional information.*

Definition: Total amount of money as result of the calculation of the tax.

Data Type: ActiveOrHistoricCurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveOrHistoricCurrencyCode**.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

7.1.16 Date <Dt>

Presence: [0..1]

Definition: Date by which tax is due.

Data Type: ISODate

7.1.17 SequenceNumber <SeqNb>

Presence: [0..1]
Definition: Sequential number of the tax report.
Data Type: Number
Format: fractionDigits: 0
totalDigits: 18

7.1.18 Record <Rcrd>

Presence: [0..*]
Definition: Record of tax details.
Type: *This message item is composed of the following **TaxRecord1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.19		Type	<Tp>	[0..1]	Text
7.1.20		Category	<Ctgy>	[0..1]	Text
7.1.21		CategoryDetails	<CtgyDtls>	[0..1]	Text
7.1.22		DebtorStatus	<DbtrSts>	[0..1]	Text
7.1.23		CertificateIdentification	<CertId>	[0..1]	Text
7.1.24		FormsCode	<FrmsCd>	[0..1]	Text
7.1.25		Period	<Prd>	[0..1]	
7.1.31		TaxAmount	<TaxAmt>	[0..1]	
7.1.43		AdditionalInformation	<AddtlInf>	[0..1]	Text

7.1.19 Type <Tp>

Presence: [0..1]
Definition: High level code to identify the type of tax details.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.20 Category <Ctgy>

Presence: [0..1]
Definition: Specifies the tax code as published by the tax authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.21 CategoryDetails <CtgyDtls>

Presence: [0..1]
Definition: Provides further details of the category tax code.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.22 DebtorStatus <DbtrSts>

Presence: [0..1]

Definition: Code provided by local authority to identify the status of the party that has drawn up the settlement document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.23 CertificateIdentification <CertId>

Presence: [0..1]

Definition: Identification number of the tax report as assigned by the taxing authority.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.24 FormsCode <FrmsCd>

Presence: [0..1]

Definition: Identifies, in a coded form, on which template the tax report is to be provided.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.25 Period <Prd>

Presence: [0..1]

Definition: Set of elements used to provide details on the period of time related to the tax payment.

Type: *This message item is composed of the following **TaxPeriod1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.26		Year	<Yr>	[0..1]	DateTime
7.1.27		Type	<Tp>	[0..1]	Code
7.1.28		FromToDate	<FrToDt>	[0..1]	

7.1.26 Year <Yr>

Presence: [0..1]

Definition: Year related to the tax payment.

Data Type: ISODate

7.1.27 Type <Tp>

Presence: [0..1]

Definition: Identification of the period related to the tax payment.

Data Type: Code

*When this message item is present, one of the following **TaxRecordPeriod1Code** values must be used:*

Code	Name	Definition
HLF1	FirstHalf	Tax is related to the first half of the period.
HLF2	SecondHalf	Tax is related to the second half of the period.
MM01	FirstMonth	Tax is related to the second month of the period.
MM02	SecondMonth	Tax is related to the first month of the period.
MM03	ThirdMonth	Tax is related to the third month of the period.
MM04	FourthMonth	Tax is related to the fourth month of the period.
MM05	FifthMonth	Tax is related to the fifth month of the period.
MM06	SixthMonth	Tax is related to the sixth month of the period.
MM07	SeventhMonth	Tax is related to the seventh month of the period.
MM08	EigthMonth	Tax is related to the eigth month of the period.
MM09	NinthMonth	Tax is related to the ninth month of the period.
MM10	TenthMonth	Tax is related to the tenth month of the period.
MM11	EleventhMonth	Tax is related to the eleventh month of the period.
MM12	TwelvethMonth	Tax is related to the twelveth month of the period.
QTR1	FirstQuarter	Tax is related to the first quarter of the period.
QTR2	SecondQuarter	Tax is related to the second quarter of the period.
QTR3	ThirdQuarter	Tax is related to the third quarter of the period.
QTR4	FourthQuarter	Tax is related to the forth quarter of the period.

7.1.28 FromToDate <FrToDt>

Presence: [0..1]
Definition: Range of time between a start date and an end date for which the tax report is provided.
Type: *This message item is composed of the following **DatePeriodDetails** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.29		FromDate	<FrDt>	[1..1]	DateTime
7.1.30		ToDate	<ToDt>	[1..1]	DateTime

7.1.29 FromDate <FrDt>

Presence: [1..1]
Definition: Start date of the range.
Data Type: ISODate

7.1.30 ToDate <ToDt>

Presence: [1..1]
Definition: End date of the range.
Data Type: ISODate

7.1.31 TaxAmount <TaxAmt>

Presence: [0..1]
Definition: Set of elements used to provide information on the amount of the tax record.
Type: *This message item is composed of the following **TaxAmount1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.32		Rate	<Rate>	[0..1]	Rate
7.1.33		TaxableBaseAmount	<TaxblBaseAmt>	[0..1]	Amount
7.1.34		TotalAmount	<TtlAmt>	[0..1]	Amount
7.1.35		Details	<Dtls>	[0..*]	

7.1.32 Rate <Rate>

Presence: [0..1]
Definition: Rate used to calculate the tax.
Data Type: PercentageRate
Format: fractionDigits: 10
totalDigits: 11

7.1.33 TaxableBaseAmount <TaxblBaseAmt>

Presence: [0..1]
*Impacted by **R14** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R15** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R21** in message definition **CreditorPaymentActivationRequestV01**, **R22** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.59, p.59, p.13, p.13 for additional information.*

Definition: Amount of money on which the tax is based.
Data Type: ActiveOrHistoricCurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveOrHistoricCurrencyCode**.*
Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}
Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

7.1.34 TotalAmount <TtlAmt>

Presence: [0..1]

*Impacted by **R14** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R15** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R21** in message definition **CreditorPaymentActivationRequestV01**, **R22** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.59, p.59, p.13, p.13 for additional information.*

Definition: Total amount that is the result of the calculation of the tax for the record.

Data Type: ActiveOrHistoricCurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveOrHistoricCurrencyCode**.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

7.1.35 Details <Dtls>

Presence: [0..*]

Definition: Set of elements used to provide details on the tax period and amount.

Type: *This message item is composed of the following **TaxRecordDetails1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.36		Period	<Prd>	[0..1]	
7.1.42		Amount	<Amt>	[1..1]	Amount

7.1.36 Period <Prd>

Presence: [0..1]

Definition: Set of elements used to provide details on the period of time related to the tax payment.

Type: *This message item is composed of the following **TaxPeriod1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.37		Year	<Yr>	[0..1]	DateTime
7.1.38		Type	<Tp>	[0..1]	Code

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.39		FromToDate	<FrToDt>	[0..1]	

7.1.37 Year <Yr>

Presence: [0..1]
Definition: Year related to the tax payment.
Data Type: ISODate

7.1.38 Type <Tp>

Presence: [0..1]
Definition: Identification of the period related to the tax payment.
Data Type: Code
*When this message item is present, one of the following **TaxRecordPeriod1Code** values must be used:*

Code	Name	Definition
HLF1	FirstHalf	Tax is related to the first half of the period.
HLF2	SecondHalf	Tax is related to the second half of the period.
MM01	FirstMonth	Tax is related to the second month of the period.
MM02	SecondMonth	Tax is related to the first month of the period.
MM03	ThirdMonth	Tax is related to the third month of the period.
MM04	FourthMonth	Tax is related to the fourth month of the period.
MM05	FifthMonth	Tax is related to the fifth month of the period.
MM06	SixthMonth	Tax is related to the sixth month of the period.
MM07	SeventhMonth	Tax is related to the seventh month of the period.
MM08	EigthMonth	Tax is related to the eigth month of the period.
MM09	NinthMonth	Tax is related to the ninth month of the period.
MM10	TenthMonth	Tax is related to the tenth month of the period.
MM11	EleventhMonth	Tax is related to the eleventh month of the period.
MM12	TwelvethMonth	Tax is related to the twelveth month of the period.
QTR1	FirstQuarter	Tax is related to the first quarter of the period.
QTR2	SecondQuarter	Tax is related to the second quarter of the period.
QTR3	ThirdQuarter	Tax is related to the third quarter of the period.
QTR4	FourthQuarter	Tax is related to the forth quarter of the period.

7.1.39 FromToDate <FrToDt>

Presence: [0..1]
Definition: Range of time between a start date and an end date for which the tax report is provided.
Type: *This message item is composed of the following **DatePeriodDetails** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.40		FromDate	<FrDt>	[1..1]	DateTime
7.1.41		ToDate	<ToDt>	[1..1]	DateTime

7.1.40 FromDate <FrDt>

Presence: [1..1]
Definition: Start date of the range.
Data Type: ISODate

7.1.41 ToDate <ToDt>

Presence: [1..1]
Definition: End date of the range.
Data Type: ISODate

7.1.42 Amount <Amt>

Presence: [1..1]
*Impacted by **R14** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R15** in message definition **CreditorPaymentActivationRequestStatusReportV01**, **R21** in message definition **CreditorPaymentActivationRequestV01**, **R22** in message definition **CreditorPaymentActivationRequestV01**. Please refer to p.59, p.59, p.13, p.13 for additional information.*

Definition: Underlying tax amount related to the specified period.
Data Type: ActiveOrHistoricCurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveOrHistoricCurrencyCode**.*
Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}
Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

7.1.43 AdditionalInformation <AddtlInf>

Presence: [0..1]
Definition: Further details of the tax record.

Data Type: Max140Text
Format: maxLength: 140
minLength: 1

Indexes

Index of Message Items

A

AcceptanceDateTime: <AccptncDtTm>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

AccountServicerReference: <AcctSvcrRef>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

AdditionalInformation: <AddtlInf>
157
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54, 57

AdditionalRemittanceInformation: <AddtlRmtInf>
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

Address: <Adr>
Message Definition CreditorPaymentActivationRequestV01 9, 9, 10

AddressLine: <AdrLine>
130, 131, 140, 150

AddressType: <AdrTp>
130, 131, 140, 150

AdjustmentAmountAndReason: <AdjstmntAmtAndRsn>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

AdministrationZone: <AdmstnZn>
156

AmendmentIndicator: <AmdmntInd>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

AmendmentInformationDetails: <AmdmntInfDtls>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

Amount: <Amt>
152, 157
Message Definition CreditorPaymentActivationRequestV01 8, 8, 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 54, 54, 54, 56

AnyBIC: <AnyBIC>
140

Authorisation: <Authstn>

156

Authority: <Authrty>
152

B

BBAN: <BBAN>
126

BICFI: <BICFI>
130

BirthDate: <BirthDt>
140

BranchIdentification: <BrnchId>
131

BuildingNumber: <BldgNb>
130, 131, 140, 150

C

Category: <Ctgy>
156

CategoryDetails: <CtgyDtls>
156

CategoryPurpose: <CtgyPurp>
Message Definition CreditorPaymentActivationRequestV01 8, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

CertificateIdentification: <CertId>
156

ChargeBearer: <ChrgBr>
Message Definition CreditorPaymentActivationRequestV01 8, 9

ChargesInformation: <ChrgsInf>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

ChequeFrom: <ChqFr>
Message Definition CreditorPaymentActivationRequestV01 9

ChequeInstruction: <ChqInstr>
Message Definition CreditorPaymentActivationRequestV01 9

ChequeMaturityDate: <ChqMtrtyDt>
Message Definition CreditorPaymentActivationRequestV01 9

ChequeNumber: <ChqNb>
Message Definition CreditorPaymentActivationRequestV01 9

ChequeType: <ChqTp>
Message Definition CreditorPaymentActivationRequestV01 9

CityOfBirth: <CityOfBirth>
140

ClearingChannel: <ClrChanl>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

ClearingSystem: <ClrSys>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

ClearingSystemIdentification: <ClrSysId>
130

ClearingSystemMemberIdentification: <ClrSysMmbId>
130

ClearingSystemReference: <ClrSysRef>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

Code: <Cd>
122, 122, 126, 130, 130, 140, 140, 152
Message Definition CreditorPaymentActivationRequestV01 8, 8, 8, 8, 8, 8, 9, 9, 9, 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54, 55, 55, 55, 55, 56, 57

CodeOrProprietary: <CdOrPrtry>
Message Definition CreditorPaymentActivationRequestV01 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 56, 57

ContactDetails: <CtctDtls>
140

ControlSum: <CtrlSum>
Message Definition CreditorPaymentActivationRequestV01 7

Country: <Ctry>
130, 131, 140, 150, 152, 152

CountryOfBirth: <CtryOfBirth>
140

CountryOfResidence: <CtryOfRes>
140

CountrySubDivision: <CtrySubDvsn>
130, 131, 140, 150

CreationDateTime: <CreDtTm>
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

CreditDebitIndicator: <CdtDbtInd>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

CreditNoteAmount: <CdtNoteAmt>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

Creditor: <Cdtr>
155
Message Definition CreditorPaymentActivationRequestV01 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

CreditorAccount: <CdtrAcct>
Message Definition CreditorPaymentActivationRequestV01 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

CreditorAgent: <CdtrAgt>
Message Definition CreditorPaymentActivationRequestV01 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 57

CreditorReferenceInformation: <CdtrRefInf>
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

CreditorSchemeIdentification: <CdtrSchmeId>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

CreditTransferTransaction: <CdtTrfTx>
Message Definition CreditorPaymentActivationRequestV01 8

Currency: <Ccy>
122, 126

CurrencyOfTransfer: <CcyOfTrf>
Message Definition CreditorPaymentActivationRequestV01 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

D

Date: <Dt>
152, 156

DateAndPlaceOfBirth: <DtAndPlcOfBirth>
140

DateOfSignature: <DtOfSgntr>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

DebitCreditReportingIndicator: <DbtCdtRptgInd>
152

Debtor: <Dbtr>
156
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

DebtorAccount: <DbtrAcct>
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

DebtorAgent: <DbtrAgt>
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 57

DebtorStatus: <DbtrSts>
156

DeliverTo: <DlvrTo>
Message Definition CreditorPaymentActivationRequestV01 9

DeliveryMethod: <DlvryMtd>
Message Definition CreditorPaymentActivationRequestV01 9

Department: <Dept>
130, 131, 140, 150

DetailedControlSum: <DtldCtrlSum>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53

DetailedNumberOfTransactions: <DtldNbOfTxs>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53

DetailedStatus: <DtldSts>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53

Details: <Dtls>
152, 156

DiscountAppliedAmount: <DscntApldAmt>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

DuePayableAmount: <DuePyblAmt>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

E

ElectronicSignature: <ElctrncSgntr>

Message Definition CreditorPaymentActivationRequestStatusReportV01 56

EmailAddress: <EmailAdr>
141

EndToEndIdentification: <EndToEndId>
Message Definition CreditorPaymentActivationRequestV01 8

EquivalentAmount: <EqvtAmt>
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

F

FaxNumber: <FaxNb>
141

FinalCollectionDate: <FnlColltnDt>
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

FinancialInstitutionIdentification: <FinInstnId>
130

FirstCollectionDate: <FrstColltnDt>
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

FormsCode: <FrmsCd>
156
Message Definition CreditorPaymentActivationRequestV01 9

Frequency: <Frqcy>
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

FromDate: <FrDt>
156, 157

FromToDate: <FrToDt>
156, 157

G

GroupHeader: <GrpHdr>
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

GroupStatus: <GrpSts>
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

I

IBAN: <IBAN>

122, 126

Identification: <Id>
122, 122, 126, 126, 130, 131, 140, 140, 140

Information: <Inf>
152

InitiatingParty: <InitgPty>
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

InstructedAmount: <InstdAmt>
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

InstructedReimbursementAgent: <InstdRmbrsmntAgt>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

InstructedReimbursementAgentAccount: <InstdRmbrsmntAgtAcct>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

InstructingReimbursementAgent: <InstgRmbrsmntAgt>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

InstructingReimbursementAgentAccount: <InstgRmbrsmntAgtAcct>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

InstructionForCreditorAgent: <InstrForCdtrAgt>
Message Definition CreditorPaymentActivationRequestV01 9

InstructionIdentification: <InstrId>
Message Definition CreditorPaymentActivationRequestV01 8

InstructionInformation: <InstrInf>
Message Definition CreditorPaymentActivationRequestV01 9

InstructionPriority: <InstrPrty>
Message Definition CreditorPaymentActivationRequestV01 7, 8, 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

InterbankSettlementAmount: <IntrBkSttlmAmt>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

InterbankSettlementDate: <IntrBkSttlmDt>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

IntermediaryAgent1: <IntrmyAgt1>
Message Definition CreditorPaymentActivationRequestV01 9

IntermediaryAgent2: <IntrmyAgt2>
Message Definition CreditorPaymentActivationRequestV01 9

IntermediaryAgent3: <IntrmyAgt3>
Message Definition CreditorPaymentActivationRequestV01 9

Invoicee: <Invcee>
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

Invoicer: <Invcr>
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

Issuer: <Issr>
122, 130, 140, 140
Message Definition CreditorPaymentActivationRequestV01 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 56, 57

L

LocalInstrument: <LclInstrm>
Message Definition CreditorPaymentActivationRequestV01 8, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

M

MandateIdentification: <MndtId>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

MandateRelatedInformation: <MndtRltdInf>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

MemberIdentification: <MmbId>
130

MemoField: <MemoFld>
Message Definition CreditorPaymentActivationRequestV01 9

MessageIdentification: <MsgId>
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

Method: <Mtd>
156

MobileNumber: <MobNb>
141

N

Name: <Nm>
122, 126, 130, 131, 140, 141, 152, 156

Message Definition CreditorPaymentActivationRequestV01 9, 9, 10

NamePrefix: <NmPrfx>
140

Number: <Nb>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

NumberOfTransactions: <NbOfTxs>
Message Definition CreditorPaymentActivationRequestV01 7

NumberOfTransactionsPerStatus: <NbOfTxsPerSts>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53

O

OrganisationIdentification: <OrgId>
140

OriginalControlSum: <OrgnlCtrlSum>
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 53

OriginalCreationDateTime: <OrgnlCreDtTm>
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

OriginalCreditorAgent: <OrgnlCdtrAgt>
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

OriginalCreditorSchemeIdentification: <OrgnlCdtrSchmeId>
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

OriginalDebtor: <OrgnlDbtr>
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

OriginalDebtorAccount: <OrgnlDbtrAcct>
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

OriginalDebtorAgent: <OrgnlDbtrAgt>
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

OriginalEndToEndIdentification: <OrgnlEndToEndId>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

OriginalFinalCollectionDate: <OrgnlFnlColltnDt>
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

OriginalFrequency: <OrgnlFrqcy>
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

OriginalGroupInformationAndStatus: <OrgnlGrpInfAndSts>
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

OriginalInstructionIdentification: <OrgnlInstrId>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

OriginalMandateIdentification: <OrgnlMndtId>
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

OriginalMessageIdentification: <OrgnlMsgId>
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

OriginalMessageNameIdentification: <OrgnlMsgNmId>
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

OriginalNumberOfTransactions: <OrgnlNbOfTxs>
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 53

OriginalPaymentInformationAndStatus: <OrgnlPmtInfAndSts>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

OriginalPaymentInformationIdentification: <OrgnlPmtInfId>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

OriginalTransactionReference: <OrgnlTxRef>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

Originator: <Orgtr>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54

Other: <Othr>
122, 130, 140, 140, 141

P

Party: <Pty>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

PaymentIdentification: <PmtId>
Message Definition CreditorPaymentActivationRequestV01 8

PaymentInformation: <PmtInf>
Message Definition CreditorPaymentActivationRequestV01 7

PaymentInformationIdentification: <PmtInfId>
Message Definition CreditorPaymentActivationRequestV01 7

PaymentInformationStatus: <PmtInfSts>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

PaymentMethod: <PmtMtd>
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

PaymentTypeInformation: <PmtTpInf>
Message Definition CreditorPaymentActivationRequestV01 7, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

Period: <Prd>
156, 156

PhoneNumber: <PhneNb>
141

PostalAddress: <PstlAdr>
130, 131, 140

PostCode: <PstCd>
130, 131, 140, 150

PrintLocation: <PrtLctn>
Message Definition CreditorPaymentActivationRequestV01 9

PrivateIdentification: <PrvtId>
140

Proprietary: <Prtry>
122, 122, 126, 130, 130, 140, 140
Message Definition CreditorPaymentActivationRequestV01 8, 8, 8, 8, 8, 8, 9, 9, 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54, 55, 55, 55, 55, 56, 57

ProprietaryAccount: <PrtryAcct>
126

ProvinceOfBirth: <PrvcOfBirth>
140

Purpose: <Purp>
Message Definition CreditorPaymentActivationRequestV01 9

R

Rate: <Rate>
156

Reason: <Rsn>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54, 57

Record: <Rcrd>
156

Reference: <Ref>
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

ReferenceNumber: <RefNb>
156

ReferredDocumentAmount: <RfrdDocAmt>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

ReferredDocumentInformation: <RfrdDocInf>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

RegionalClearingZone: <RgnlClrZone>
Message Definition CreditorPaymentActivationRequestV01 9

RegistrationIdentification: <RegnId>
156, 156

RegulatoryReporting: <RgltryRptg>
Message Definition CreditorPaymentActivationRequestV01 9

RelatedDate: <RltdDt>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

RelatedRemittanceInformation: <RltdRmtInf>
Message Definition CreditorPaymentActivationRequestV01 10

RemittanceIdentification: <RmtId>
Message Definition CreditorPaymentActivationRequestV01 10

RemittanceInformation: <RmtInf>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

RemittanceLocationElectronicAddress: <RmtLctnElctrncAdr>
Message Definition CreditorPaymentActivationRequestV01 10

RemittanceLocationMethod: <RmtLctnMtd>
Message Definition CreditorPaymentActivationRequestV01 10

RemittanceLocationPostalAddress: <RmtLctnPstlAdr>
Message Definition CreditorPaymentActivationRequestV01 10

RemittedAmount: <RmtdAmt>
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

RequestedCollectionDate: <ReqdColltnDt>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

RequestedExecutionDate: <ReqdExctnDt>
Message Definition CreditorPaymentActivationRequestV01 8

Message Definition CreditorPaymentActivationRequestStatusReportV01 54

S

SchemeName: <SchmeNm>
122, 130, 140, 140

SequenceNumber: <SeqNb>
156

SequenceType: <SeqTp>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

ServiceLevel: <SvcLvl>
Message Definition CreditorPaymentActivationRequestV01 7, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

SettlementAccount: <SttlmAcct>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

SettlementInformation: <SttlmInf>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

SettlementMethod: <SttlmMtd>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

StatusIdentification: <StsId>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

StatusReasonInformation: <StsRsnInf>
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 53, 54

StreetName: <StrtNm>
130, 131, 140, 150

Structured: <Strd>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

SubDepartment: <SubDept>
130, 131, 140, 150

T

Tax: <Tax>
Message Definition CreditorPaymentActivationRequestV01 10

TaxableBaseAmount: <TaxblBaseAmt>
156

TaxAmount: <TaxAmt>

156
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

TaxIdentification: <TaxId>
155, 156

TaxType: <TaxTp>
156, 156

ThirdReimbursementAgent: <ThrdRmbrsmntAgt>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

ThirdReimbursementAgentAccount: <ThrdRmbrsmntAgtAcct>
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

Title: <Titl>
156

ToDate: <ToDt>
156, 157

TotalAmount: <TtlAmt>
156

TotalTaxableBaseAmount: <TtlTaxblBaseAmt>
156

TotalTaxAmount: <TtlTaxAmt>
156

TownName: <TwnNm>
130, 131, 140, 150

TransactionInformationAndStatus: <TxInfAndSts>
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

TransactionStatus: <TxSts>
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

Type: <Tp>
122, 126, 152, 156, 156, 157
Message Definition CreditorPaymentActivationRequestV01 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 56, 57

U

UltimateCreditor: <UltmtCdtr>
Message Definition CreditorPaymentActivationRequestV01 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

UltimateDebtor: <UltmtDbtr>

Message Definition CreditorPaymentActivationRequestV01 8, 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

Unstructured: <Ustrd>
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

UPIC: <UPIC>
126

Y

Year: <Yr>
156, 156

Index of XML tags

A

<AccptncDtTm>: AcceptanceDateTime
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<AcctSvcrRef>: AccountServicerReference
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<AddtlInf>: AdditionalInformation
157
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54, 57

<AddtlRmtInf>: AdditionalRemittanceInformation
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<AdjstmntAmtAndRsn>: AdjustmentAmountAndReason
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<AdmstnZn>: AdministrationZone
156

<Adr>: Address
Message Definition CreditorPaymentActivationRequestV01 9, 9, 10

<AdrLine>: AddressLine
130, 131, 140, 150

<AdrTp>: AddressType
130, 131, 140, 150

<AmdmntInd>: AmendmentIndicator

Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<AmdmntInfDtls>: AmendmentInformationDetails
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<Amt>: Amount
152, 157
Message Definition CreditorPaymentActivationRequestV01 8, 8, 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 54, 54, 54, 56

<AnyBIC>: AnyBIC
140

<Authrty>: Authority
152

<Authstn>: Authorisation
156

B

<BBAN>: BBAN
126

<BICFI>: BICFI
130

<BirthDt>: BirthDate
140

<BldgNb>: BuildingNumber
130, 131, 140, 150

<BrnchId>: BranchIdentification
131

C

<Ccy>: Currency
122, 126

<CcyOfTrf>: CurrencyOfTransfer
Message Definition CreditorPaymentActivationRequestV01 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<Cd>: Code
122, 122, 126, 130, 130, 140, 140, 152
Message Definition CreditorPaymentActivationRequestV01 8, 8, 8, 8, 8, 8, 9, 9, 9, 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54, 55, 55, 55, 55, 56, 57

<CdOrPrtry>: CodeOrProprietary

Message Definition CreditorPaymentActivationRequestV01 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 56, 57

<CdtDbtInd>: CreditDebitIndicator
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<CdtNoteAmt>: CreditNoteAmount
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<Cdtr>: Creditor
155
Message Definition CreditorPaymentActivationRequestV01 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<CdtrAcct>: CreditorAccount
Message Definition CreditorPaymentActivationRequestV01 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<CdtrAgt>: CreditorAgent
Message Definition CreditorPaymentActivationRequestV01 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 57

<CdtrRefInf>: CreditorReferenceInformation
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<CdtrSchmeId>: CreditorSchemeIdentification
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<CdtTrfTx>: CreditTransferTransaction
Message Definition CreditorPaymentActivationRequestV01 8

<CertId>: CertificateIdentification
156

<ChqFr>: ChequeFrom
Message Definition CreditorPaymentActivationRequestV01 9

<ChqInstr>: ChequeInstruction
Message Definition CreditorPaymentActivationRequestV01 9

<ChqMtrtyDt>: ChequeMaturityDate
Message Definition CreditorPaymentActivationRequestV01 9

<ChqNb>: ChequeNumber
Message Definition CreditorPaymentActivationRequestV01 9

<ChqTp>: ChequeType
Message Definition CreditorPaymentActivationRequestV01 9

<ChrgBr>: ChargeBearer
Message Definition CreditorPaymentActivationRequestV01 8, 9

<ChrgsInf>: ChargesInformation
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<CityOfBirth>: CityOfBirth
140

<ClrChanl>: ClearingChannel
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<ClrSys>: ClearingSystem
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<ClrSysId>: ClearingSystemIdentification
130

<ClrSysMmbId>: ClearingSystemMemberIdentification
130

<ClrSysRef>: ClearingSystemReference
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<CreDtTm>: CreationDateTime
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

<CtctDtls>: ContactDetails
140

<Ctgy>: Category
156

<CtgyDtls>: CategoryDetails
156

<CtgyPurp>: CategoryPurpose
Message Definition CreditorPaymentActivationRequestV01 8, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<CtrlSum>: ControlSum
Message Definition CreditorPaymentActivationRequestV01 7

<Ctry>: Country
130, 131, 140, 150, 152, 152

<CtryOfBirth>: CountryOfBirth
140

<CtryOfRes>: CountryOfResidence
140

<CtrySubDvsn>: CountrySubDivision
130, 131, 140, 150

D

<DbtCdtRptgInd>: DebitCreditReportingIndicator
152

<Dbtr>: Debtor
156
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<DbtrAcct>: DebtorAccount
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<DbtrAgt>: DebtorAgent
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 57

<DbtrSts>: DebtorStatus
156

<Dept>: Department
130, 131, 140, 150

<DlvrTo>: DeliverTo
Message Definition CreditorPaymentActivationRequestV01 9

<DlvryMtd>: DeliveryMethod
Message Definition CreditorPaymentActivationRequestV01 9

<DscntApldAmt>: DiscountAppliedAmount
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<Dt>: Date
152, 156

<DtAndPlcOfBirth>: DateAndPlaceOfBirth
140

<DtldCtrlSum>: DetailedControlSum
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53

<DtldNbOfTxs>: DetailedNumberOfTransactions
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53

<DtldSts>: DetailedStatus
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53

<Dtls>: Details
152, 156

<DtOfSgntr>: DateOfSignature
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<DuePyblAmt>: DuePayableAmount
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

E

<ElctrncSgntr>: ElectronicSignature
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<EmailAdr>: EmailAddress
141

<EndToEndId>: EndToEndIdentification
Message Definition CreditorPaymentActivationRequestV01 8

<EqvtAmt>: EquivalentAmount
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

F

<FaxNb>: FaxNumber
141

<FinInstnId>: FinancialInstitutionIdentification
130

<FnlColltnDt>: FinalCollectionDate
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<FrDt>: FromDate
156, 157

<FrmsCd>: FormsCode
156
Message Definition CreditorPaymentActivationRequestV01 9

<Frqcy>: Frequency
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<FrstColltnDt>: FirstCollectionDate
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<FrToDt>: FromToDate

156, 157

G

<GrpHdr>: GroupHeader
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

<GrpSts>: GroupStatus
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

I

<IBAN>: IBAN
122, 126

<Id>: Identification
122, 122, 126, 126, 130, 131, 140, 140, 140

<Inf>: Information
152

<InitgPty>: InitiatingParty
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

<InstdAmt>: InstructedAmount
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<InstdRmbrsmntAgt>: InstructedReimbursementAgent
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<InstdRmbrsmntAgtAcct>: InstructedReimbursementAgentAccount
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<InstgRmbrsmntAgt>: InstructingReimbursementAgent
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<InstgRmbrsmntAgtAcct>: InstructingReimbursementAgentAccount
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<InstrForCdtrAgt>: InstructionForCreditorAgent
Message Definition CreditorPaymentActivationRequestV01 9

<InstrId>: InstructionIdentification
Message Definition CreditorPaymentActivationRequestV01 8

<InstrInf>: InstructionInformation
Message Definition CreditorPaymentActivationRequestV01 9

<InstrPrty>: InstructionPriority
Message Definition CreditorPaymentActivationRequestV01 7, 8, 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<IntrBkSttlmAmt>: InterbankSettlementAmount
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<IntrBkSttlmDt>: InterbankSettlementDate
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<IntrmyAgt1>: IntermediaryAgent1
Message Definition CreditorPaymentActivationRequestV01 9

<IntrmyAgt2>: IntermediaryAgent2
Message Definition CreditorPaymentActivationRequestV01 9

<IntrmyAgt3>: IntermediaryAgent3
Message Definition CreditorPaymentActivationRequestV01 9

<Invcee>: Invoicee
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<Invcr>: Invoicer
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<Issr>: Issuer
122, 130, 140, 140
Message Definition CreditorPaymentActivationRequestV01 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 56, 57

L

<LclInstrm>: LocalInstrument
Message Definition CreditorPaymentActivationRequestV01 8, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

M

<MemoFld>: MemoField
Message Definition CreditorPaymentActivationRequestV01 9

<MmbId>: MemberIdentification
130

<MndtId>: MandateIdentification
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<MndtRltdInf>: MandateRelatedInformation
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<MobNb>: MobileNumber
141

<MsgId>: MessageIdentification
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

<Mtd>: Method
156

N

<Nb>: Number
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<NbOfTxs>: NumberOfTransactions
Message Definition CreditorPaymentActivationRequestV01 7

<NbOfTxsPerSts>: NumberOfTransactionsPerStatus
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53

<Nm>: Name
122, 126, 130, 131, 140, 141, 152, 156
Message Definition CreditorPaymentActivationRequestV01 9, 9, 10

<NmPrfx>: NamePrefix
140

O

<OrgId>: OrganisationIdentification
140

<OrgnlCdtrAgt>: OriginalCreditorAgent
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<OrgnlCdtrSchmeId>: OriginalCreditorSchemeIdentification
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<OrgnlCreDtTm>: OriginalCreationDateTime
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

<OrgnlCtrlSum>: OriginalControlSum
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 53

<OrgnlDbtr>: OriginalDebtor
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<OrgnlDbtrAcct>: OriginalDebtorAccount

Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<OrgnlDbtrAgt>: OriginalDebtorAgent
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<OrgnlEndToEndId>: OriginalEndToEndIdentification
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

<OrgnlFnlColltnDt>: OriginalFinalCollectionDate
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<OrgnlFrqcy>: OriginalFrequency
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<OrgnlGrpInfAndSts>: OriginalGroupInformationAndStatus
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

<OrgnlInstrId>: OriginalInstructionIdentification
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

<OrgnlMndtId>: OriginalMandateIdentification
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<OrgnlMsgId>: OriginalMessageIdentification
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

<OrgnlMsgNmId>: OriginalMessageNameIdentification
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

<OrgnlNbOfTxs>: OriginalNumberOfTransactions
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 53

<OrgnlPmtInfAndSts>: OriginalPaymentInformationAndStatus
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

<OrgnlPmtInfId>: OriginalPaymentInformationIdentification
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

<OrgnlTxRef>: OriginalTransactionReference
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<Orgtr>: Originator
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54

<Othr>: Other
122, 130, 140, 140, 141

P

<PhneNb>: PhoneNumber
141

<PmtId>: PaymentIdentification
Message Definition CreditorPaymentActivationRequestV01 8

<PmtInf>: PaymentInformation
Message Definition CreditorPaymentActivationRequestV01 7

<PmtInfId>: PaymentInformationIdentification
Message Definition CreditorPaymentActivationRequestV01 7

<PmtInfSts>: PaymentInformationStatus
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

<PmtMtd>: PaymentMethod
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<PmtTpInf>: PaymentTypeInformation
Message Definition CreditorPaymentActivationRequestV01 7, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<Prd>: Period
156, 156

<PrtLctn>: PrintLocation
Message Definition CreditorPaymentActivationRequestV01 9

<Prtry>: Proprietary
122, 122, 126, 130, 130, 140, 140
Message Definition CreditorPaymentActivationRequestV01 8, 8, 8, 8, 8, 8, 9, 9, 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54, 55, 55, 55, 55, 56, 57

<PrtryAcct>: ProprietaryAccount
126

<PrvcOfBirth>: ProvinceOfBirth
140

<PrvtId>: PrivateIdentification
140

<PstCd>: PostCode
130, 131, 140, 150

<PstlAdr>: PostalAddress
130, 131, 140

<Pty>: Party
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<Purp>: Purpose
Message Definition CreditorPaymentActivationRequestV01 9

R

<Rate>: Rate
156

<Rcrd>: Record
156

<Ref>: Reference
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<RefNb>: ReferenceNumber
156

<RegnId>: RegistrationIdentification
156, 156

<ReqdColltnDt>: RequestedCollectionDate
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<ReqdExctnDt>: RequestedExecutionDate
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<RfrdDocAmt>: ReferredDocumentAmount
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<RfrdDocInf>: ReferredDocumentInformation
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<RgltryRptg>: RegulatoryReporting
Message Definition CreditorPaymentActivationRequestV01 9

<RgnlClrZone>: RegionalClearingZone
Message Definition CreditorPaymentActivationRequestV01 9

<RltdDt>: RelatedDate
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<RltdRmtInf>: RelatedRemittanceInformation
Message Definition CreditorPaymentActivationRequestV01 10

<RmtdAmt>: RemittedAmount
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<RmtId>: RemittanceIdentification
Message Definition CreditorPaymentActivationRequestV01 10

<RmtInf>: RemittanceInformation
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<RmtLctnElctrncAdr>: RemittanceLocationElectronicAddress
Message Definition CreditorPaymentActivationRequestV01 10

<RmtLctnMtd>: RemittanceLocationMethod
Message Definition CreditorPaymentActivationRequestV01 10

<RmtLctnPstlAdr>: RemittanceLocationPostalAddress
Message Definition CreditorPaymentActivationRequestV01 10

<Rsn>: Reason
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54, 57

S

<SchmeNm>: SchemeName
122, 130, 140, 140

<SeqNb>: SequenceNumber
156

<SeqTp>: SequenceType
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<Strd>: Structured
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<StrtNm>: StreetName
130, 131, 140, 150

<StsId>: StatusIdentification
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

<StsRsnInf>: StatusReasonInformation
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 53, 54

<SttlmAcct>: SettlementAccount
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<SttlmInf>: SettlementInformation
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<SttlmMtd>: SettlementMethod
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

<SubDept>: SubDepartment

130, 131, 140, 150

<SvcLvl>: ServiceLevel
Message Definition CreditorPaymentActivationRequestV01 7, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

T

<Tax>: Tax
Message Definition CreditorPaymentActivationRequestV01 10

<TaxAmt>: TaxAmount
156
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

<TaxblBaseAmt>: TaxableBaseAmount
156

<TaxId>: TaxIdentification
155, 156

<TaxTp>: TaxType
156, 156

<ThrdRmbrsmntAgt>: ThirdReimbursementAgent
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<ThrdRmbrsmntAgtAcct>: ThirdReimbursementAgentAccount
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

<Titl>: Title
156

<ToDt>: ToDate
156, 157

<Tp>: Type
122, 126, 152, 156, 156, 157
Message Definition CreditorPaymentActivationRequestV01 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 56, 57

<TtlAmt>: TotalAmount
156

<TtlTaxAmt>: TotalTaxAmount
156

<TtlTaxblBaseAmt>: TotalTaxableBaseAmount
156

<TwnNm>: TownName

130, 131, 140, 150

<TxInfAndSts>: TransactionInformationAndStatus
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

<TxSts>: TransactionStatus
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

U

<UltmtCdtr>: UltimateCreditor
Message Definition CreditorPaymentActivationRequestV01 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<UltmtDbtr>: UltimateDebtor
Message Definition CreditorPaymentActivationRequestV01 8, 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

<UPIC>: UPIC
126

<Ustrd>: Unstructured
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

Y

<Yr>: Year
156, 156

Index of Message Item Types

A

AccountIdentification3Choice
126

AccountIdentification4Choice
122

AccountSchemeName1Choice
122

ActiveCurrencyAndAmount
109

ActiveCurrencyCode
112

ActiveOrHistoricCurrencyAndAmount
110, 152, 156, 156, 156, 156, 157

Message Definition CreditorPaymentActivationRequestV01 8, 8, 10, 10, 10, 10, 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 54, 54, 54, 54, 56, 56, 56, 56, 56, 57

ActiveOrHistoricCurrencyCode
112, 122, 152, 156, 156, 156, 156, 157
Message Definition CreditorPaymentActivationRequestV01 8, 8, 9, 10, 10, 10, 10, 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 54, 54, 54, 54, 54, 56, 56, 56, 56, 56, 57

AddressType2Code
130, 131, 140, 150

AmendmentInformationDetails7
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

AmountType3Choice
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

AnyBICIdentifier
112, 140

B

BBANIdentifier
113, 126

BICFIIdentifier
113, 130

BICNonFIIdentifier
113

BranchAndFinancialInstitutionIdentification5
130
Message Definition CreditorPaymentActivationRequestV01 8, 9, 9, 9, 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 52, 54, 55, 55, 55, 56, 56, 57, 57

BranchData2
131

C

CashAccount16
122
Message Definition CreditorPaymentActivationRequestV01 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 54, 55, 55, 55, 56, 57, 57

CashAccount7
126
Message Definition CreditorPaymentActivationRequestV01 8

CashAccountType2
122, 126

CashAccountType4Code
122, 126

CategoryPurpose1Choice
Message Definition CreditorPaymentActivationRequestV01 8, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

ChargeBearerType1Code
Message Definition CreditorPaymentActivationRequestV01 8, 9

ChargesInformation7
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

Cheque6
Message Definition CreditorPaymentActivationRequestV01 9

ChequeDelivery1Code
Message Definition CreditorPaymentActivationRequestV01 9

ChequeDeliveryMethod1Choice
Message Definition CreditorPaymentActivationRequestV01 9

ChequeType2Code
Message Definition CreditorPaymentActivationRequestV01 9

CHIPSUniversalIdentifier
114

ClearingChannel2Code
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

ClearingSystemIdentification2Choice
130

ClearingSystemIdentification3Choice
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

ClearingSystemMemberIdentification2
130

ContactDetails2
140

CountryCode
114, 130, 131, 140, 140, 140, 150, 152, 152

CreditDebitCode
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

CreditorReferenceInformation2
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

CreditorReferenceType1Choice
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

CreditorReferenceType2
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

CreditTransferTransactionInformation14
Message Definition CreditorPaymentActivationRequestV01 8

CurrencyAndAmount
110

CurrencyCode
114, 126

D

DateAndPlaceOfBirth
140

DatePeriodDetails
156, 157

DecimalNumber
118
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 53, 53, 53

DocumentAdjustment1
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

DocumentType3Code
Message Definition CreditorPaymentActivationRequestV01 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

DocumentType5Code
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

DunsIdentifier
114

E

EANGLNIdentifier
114

EquivalentAmount2
Message Definition CreditorPaymentActivationRequestV01 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

ExternalAccountIdentification1Code
115, 122

ExternalCashClearingSystem1Code
115
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

ExternalCategoryPurpose1Code
115
Message Definition CreditorPaymentActivationRequestV01 8, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

ExternalClearingSystemIdentification1Code
115, 130

ExternalCode
115

ExternalFinancialInstitutionIdentification1Code
115, 130

ExternalLocalInstrument1Code
116
Message Definition CreditorPaymentActivationRequestV01 8, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

ExternalOrganisationIdentification1Code
116, 140

ExternalPersonIdentification1Code
116, 140

ExternalPurpose1Code
116
Message Definition CreditorPaymentActivationRequestV01 9

ExternalServiceLevel1Code
116
Message Definition CreditorPaymentActivationRequestV01 8, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

ExternalStatusReason1Code
116

Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54

F

FinancialIdentificationSchemeName1Choice
130

FinancialInstitutionIdentification8
130

Frequency1Code
Message Definition CreditorPaymentActivationRequestStatusReportV01 56, 56

G

GenericAccountIdentification1
122

GenericFinancialIdentification1
130

GenericOrganisationIdentification1
140

GenericPersonIdentification1
140

GroupHeader45
Message Definition CreditorPaymentActivationRequestV01 7

GroupHeader46
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

I

IBAN2007Identifier
117, 122

IBANIdentifier
117, 126

ImpliedCurrencyAndAmount
111

Instruction3Code
Message Definition CreditorPaymentActivationRequestV01 9

InstructionForCreditorAgent1
Message Definition CreditorPaymentActivationRequestV01 9

ISODate

111, 140, 152, 156, 156, 156, 156, 156, 157, 157
Message Definition CreditorPaymentActivationRequestV01 8, 9, 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 54, 54, 54, 55, 56, 56, 56, 56

ISODateTime
111
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 52, 54

ISOTime
112

L

LanguageCode
117

LocalInstrument2Choice
Message Definition CreditorPaymentActivationRequestV01 8, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

M

MandateRelatedInformation7
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

Max1025Text
118
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

Max105Text
118
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54

Max10Text
119, 152

Max128Text
119

Max140Text
119, 130, 131, 140, 141, 152, 156, 156, 157
Message Definition CreditorPaymentActivationRequestV01 9, 9, 9, 10, 10, 10, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 56, 57, 57

Max15NumericText
119
Message Definition CreditorPaymentActivationRequestV01 7
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 53, 53, 53

Max15PlusSignedNumericText

119

Max16Text
119, 130, 130, 131, 131, 140, 140, 150, 150

Max2048Text
119, 141
Message Definition CreditorPaymentActivationRequestV01 10

Max256Text
120

Max34Text
120, 122, 126

Max350Text
120

Max35Text
120, 122, 122, 122, 126, 130, 130, 130, 130, 130, 130, 130, 131, 131, 131, 140, 140, 140, 140, 140, 140, 140, 140, 140, 140, 141, 150, 150, 152, 152, 155, 156, 156, 156, 156, 156, 156, 156, 156, 156, 156, 156, 156, 156, 156
Message Definition CreditorPaymentActivationRequestV01 7, 7, 8, 8, 8, 8, 8, 8, 8, 8, 9, 9, 9, 9, 9, 9, 9, 10, 10, 10, 10, 11, 11, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 52, 52, 53, 53, 53, 53, 53, 53, 54, 54, 54, 55, 55, 55, 55, 55, 56, 56, 56, 56, 57, 57, 57

Max4AlphaNumericText
120

Max4Text
120
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 57

Max5NumericText
121

Max70Text
121, 122, 126, 130, 130, 130, 130, 131, 131, 131, 131, 140, 140, 140, 140, 150, 150, 150, 150

MICIdentifier
117

N

NameAndAddress10
Message Definition CreditorPaymentActivationRequestV01 9, 9, 10

NamePrefix1Code
140

NationalityCode

117

Number
118, 156

NumberOfTransactionsPerStatus3
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53

O

OrganisationIdentification8
140

OrganisationIdentificationSchemeName1Choice
140

OriginalGroupInformation25
Message Definition CreditorPaymentActivationRequestStatusReportV01 52

OriginalPaymentInformation5
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

OriginalTransactionReference15
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

P

Party11Choice
140

PartyIdentification43
139
Message Definition CreditorPaymentActivationRequestV01 7, 8, 8, 9, 9, 9, 11, 11
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 53, 53, 54, 54, 56, 56, 57, 57, 57, 57, 57, 57

PaymentIdentification1
Message Definition CreditorPaymentActivationRequestV01 8

PaymentInstruction5
Message Definition CreditorPaymentActivationRequestV01 7

PaymentMethod4Code
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

PaymentMethod7Code
Message Definition CreditorPaymentActivationRequestV01 7

PaymentTransactionInformation34
Message Definition CreditorPaymentActivationRequestStatusReportV01 53

PaymentTypeInformation19
Message Definition CreditorPaymentActivationRequestV01 7, 8

PaymentTypeInformation22
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

PercentageRate
118, 156

PersonIdentification5
140

PersonIdentificationSchemeName1Choice
140

PhoneNumber
121, 141, 141, 141

PostalAddress6
130, 131, 140, 150
Message Definition CreditorPaymentActivationRequestV01 9, 9, 10

Priority2Code
Message Definition CreditorPaymentActivationRequestV01 7, 8, 9
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

Purpose2Choice
Message Definition CreditorPaymentActivationRequestV01 9

R

ReferredDocumentInformation3
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

ReferredDocumentType1Choice
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

ReferredDocumentType2
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

RegulatoryAuthority2
152

RegulatoryReporting3
152
Message Definition CreditorPaymentActivationRequestV01 9

RegulatoryReportingType1Code
152

RemittanceAmount1
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

RemittanceInformation6
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

RemittanceLocation2
Message Definition CreditorPaymentActivationRequestV01 10

RemittanceLocationMethod2Code
Message Definition CreditorPaymentActivationRequestV01 10

S

SequenceType1Code
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

ServiceLevel8Choice
Message Definition CreditorPaymentActivationRequestV01 7, 8
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

SettlementInformation16
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

SettlementMethod1Code
Message Definition CreditorPaymentActivationRequestStatusReportV01 54

SimpleIdentificationInformation2
126

StatusReason6Choice
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54

StatusReasonInformation9
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 53, 54

StructuredRegulatoryReporting3
152

StructuredRemittanceInformation8
Message Definition CreditorPaymentActivationRequestV01 10
Message Definition CreditorPaymentActivationRequestStatusReportV01 56

T

TaxAmount1
156

TaxAuthorisation1
156

TaxInformation3
155
Message Definition CreditorPaymentActivationRequestV01 10

TaxParty1
155

TaxParty2
156

TaxPeriod1
156, 156

TaxRecord1
156

TaxRecordDetails1
156

TaxRecordPeriod1Code
156, 157

TransactionGroupStatus3Code
Message Definition CreditorPaymentActivationRequestStatusReportV01 52, 53

TransactionIndividualStatus3Code
Message Definition CreditorPaymentActivationRequestStatusReportV01 53, 53, 54

TrueFalseIndicator
Message Definition CreditorPaymentActivationRequestStatusReportV01 55

U

UPICIdentifier
118, 126

Revision Record

Revision	Date	Author	Description	Sections affected
1.0	05/10/2010	ISO 20022 RA	Initial version	All

Disclaimer:
Although the Registration Authority has used all reasonable efforts to ensure accuracy of the contents of the iso20022.org website and the information published thereon, the Registration Authority assumes no liability whatsoever for any inadvertent errors or omissions that may appear thereon. Moreover, the information is provided on an "as is" basis. The Registration Authority disclaims all warranties and conditions, either express or implied, including but not limited to implied warranties of merchantability, title, non-infringement and fitness for a particular purpose. The Registration Authority shall not be liable for any direct, indirect, special or consequential damages arising out of the use of the information published on the iso20022.org website, even if the Registration Authority has been advised of the possibility of such damages.

Intellectual Property Rights:
The ISO 20022 Message Definitions described in this document were contributed by CBI Consortium. The ISO 20022 IPR policy is available at www.ISO20022.org > Intellectual Property Rights Policy.