UNIFI (ISO 20022) Message Definition Report

Customer to Bank Payment Initiation

Approved by UNIFI Payments SEG on 14 September 2005

Edition 14 September 2005

Table Of Contents

Overview **1**
Scope 1
Variants 1
Message Flow **2**
Credit Transfer Initiation 2
Relay Credit Transfer Initiation 5
Message: CoreCreditTransferInitiation <pain.001.001.01> **15**
Message Scope and Usage 15
Message Structure 16
Message Items Description 24
Business Example - 1 97
Business Example - 2 103
Message: EUSTPCreditTransferInitiation <pain.001.003.01> **110**
Message Scope and Usage 110
Message Structure 111
Message Items Description 116
Business Example 163
Message: PaymentInitiationStatus <pain.002.001.01> **169**
Message Scope and Usage 169
Message Structure 170
Message Items Description 173
Business Example 207
Message: STPCreditTransferInitiation <pain.001.002.01> **209**
Message Scope and Usage 209
Message Structure 210
Message Items Description 215
Business Example 262
Message Item Types **268**
Data Types 268
End Points 278
Indexes **302**
Index of Message Items 302
Index of XML tags 316
Index of Message Item Types 331

Revision Record **342**

Overview

Scope

The set of credit transfer initiation messages is exchanged between an initiating party and a forwarding agent or first agent. The set of messages covers the means to remit, manage and monitor credit transfer initiation orders from customers to their financial institutions. The messages are:

1. **CreditTransferInitiation:** used to initiate a credit transfer. It is sent by an initiating party to a forwarding agent or first agent. Three variants have been defined for the CreditTransferInitiation message: Core, STP and EU-STP.
2. **PaymentInitiationStatus**: used to report on the status of a credit transfer initiation. It is sent by a forwarding agent or first agent to an initiating party. Usage of this message is bilaterally agreed between the initiating party and the forwarding agent or first agent.

Variants

Three variants have been defined for the CreditTransferInitiation message: Core, STP and EU-STP. The main differences between the variants are listed below:

CoreCreditTransferInitiation	**STPCreditTransferInitiation**	**EU-STPCreditTransferInitiation**
PaymentMethodByFirstAgent includes Cheque or Transfer.	PaymentMethodByFirstAgent only includes Transfer.	PaymentMethodByFirstAgent only includes Transfer.
Includes OriginatingParty , besides Debtor. Includes FinalParty besides Creditor.	Includes neither OriginatingParty nor FinalParty.	Includes neither OriginatingParty nor FinalParty.
Includes maximum two IntermediaryAgents, as well as FinalAgentAccountInformation.	Includes neither IntermediaryAgent nor FinalAgentAccountInformation.	Includes neither IntermediaryAgent nor FinalAgentAccountInformation.
Includes RegulatoryReportingInformation.	Does not include RegulatoryReportingInformation.	Does not include RegulatoryReportingInformation
Includes instructions for FirstAgent and FinalAgent.	Does not include instructions for FirstAgent and FinalAgent.	Does not include instructions for FirstAgent and FinalAgent.
RemittanceInformation component can be repeated.	RemittanceInformation component is present once.	RemittanceInformation component is present once.
Agents can be identified with multiple options concurrently, including name and address.	Agents can be identified through a choice of options. Name and address are not included in the option choice.	Agents can be identified through BIC only.
Customer accounts can be identified by IBAN, BBAN, UPIC or ProprietaryIdentification. Creditor account is optional.	Customer accounts can be identified by IBAN, BBAN, UPIC or ProprietaryIdentification. Creditor account is mandatory.	Creditor account is mandatory and can be identified by IBAN only.

Message Flow

Credit Transfer Initiation

Scenario

The CreditTransferInitiation messages are sent from the initiating party to the first agent. Depending on the service level agreed between the first agent and initiating party, the first agent may send a PaymentInitiationStatus message to inform the initiating party of the status of the initiation.
A number of additional message flows have been included in the message flow diagram to illustrate the complete end-to-end execution of the payment initiation. However, please note that these messages are outside of the scope of this Message Definition Report. These message flows are:

- **Account information from first agent to initiating party**: depending on the service level agreed, the first agent may provide the initiating party with a debit advice and/or statement once the payment has been executed and the debit entry has been posted to the debtor's account.
- **Interbank clearing and settlement between first agent and final agent**: depending on the interbank clearing and settlement method chosen, a number of messages may be exchanged between the agent parties in the payment chain.
- **Account information from final agent to creditor**: depending on the service level agreed, the final agent may provide the creditor with a credit advice and/or statement information once the payment has been posted to the creditor's account.

The scenarios covered in this documentation show the different customer roles that can be played on the initiating side of the credit transfer initiation, and on the receiving side of the cash transfer.
On the initiating side, up to three customer roles can be specified: the initiating party, ie, the party sending the message, the debtor, ie, the debit account owner, and the originating party, ie, the party that owes the cash to the creditor as a result of receipt of goods or services. These three roles can be played by one and the same actor, or they can be played by different actors. The CoreCreditTransferInitiation message allows inclusion of the three different roles on the initiating side.
On the receiving side, up to two customer roles can be specified: the creditor, ie, the credit account owner, and the final party, ie, the party that is the ultimate beneficiary of the cash transfer. These two roles can be played by one and the same actor, or they can be played by different actors. The CoreCreditTransferInitiation message allows inclusion of the two different roles on the receiving side.
In scenario A, the message is sent by an initiating party to the first agent. The actor playing the role of initiating party is the same as the actor playing the role of debtor and originating party. The actor playing the role of creditor is the same as the actor playing the role of final party.
In scenario B, the message is sent by an initiating party to the first agent. The actor playing the role of initiating party is the same as the actor playing the role of debtor, but the role of the originating party is played by a different actor. In scenario C, the message is sent by an initiating party to the first agent. The actor playing the role of initiating party is different from the actor playing the role of debtor. The role of the originating party is played by yet another actor.

A. Scenario : One actor playing roles of initiating party, debtor and originating party and one actor playing roles of creditor and final party.

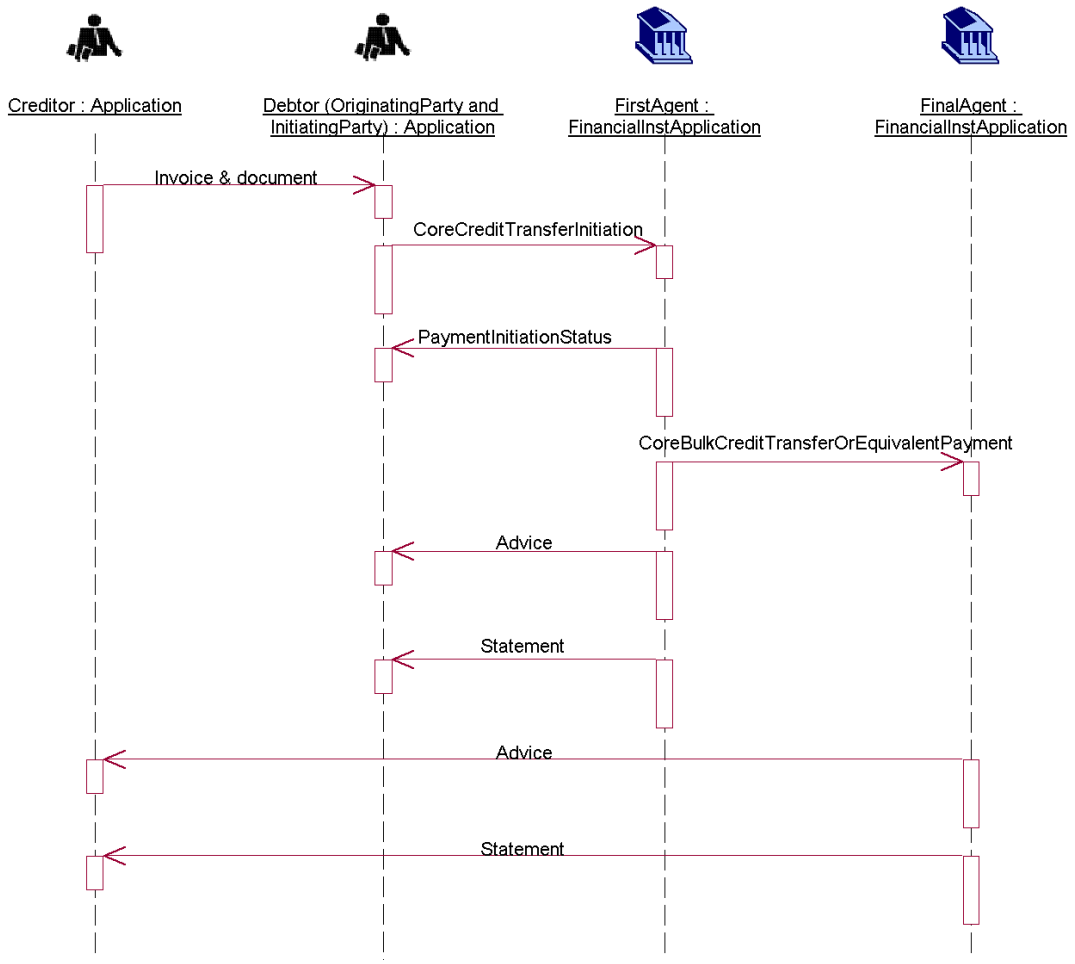

B. Scenario : One actor playing roles of initiating party and debtor, different actor for the role of originating party.

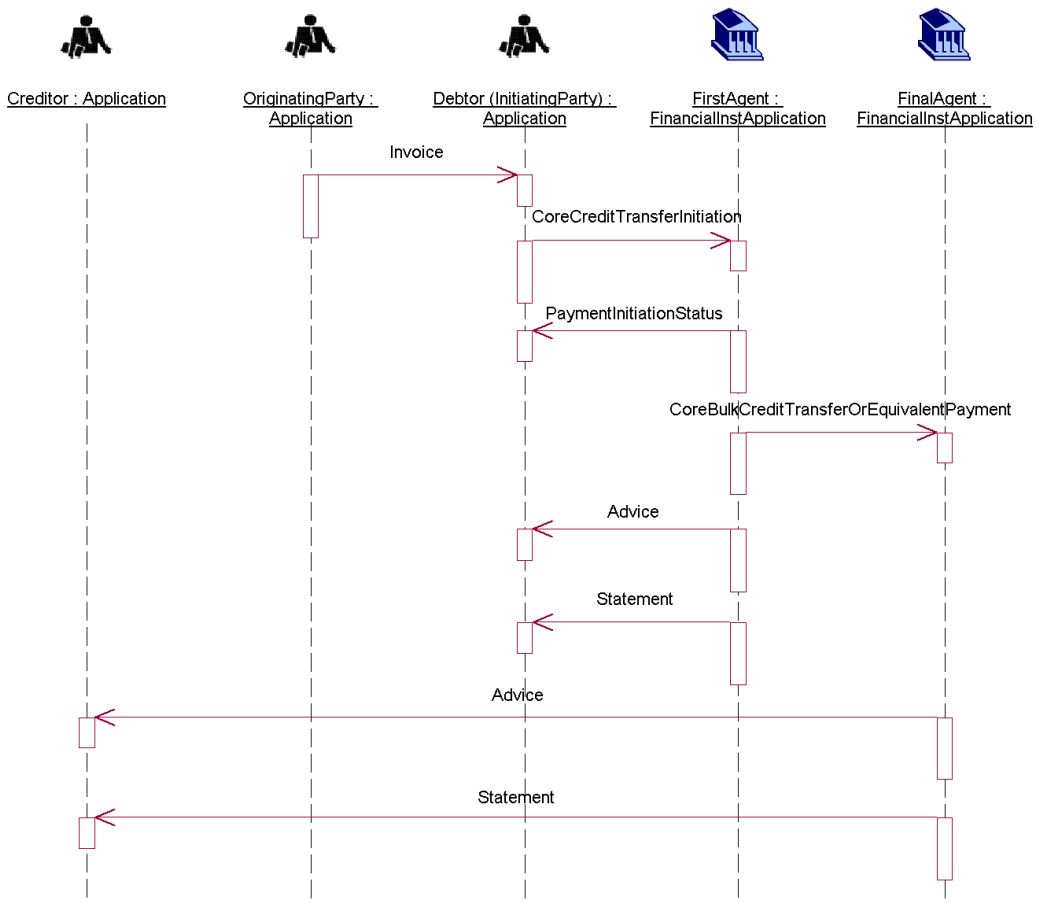

C. Scenario : Three different actors playing the roles of initiating party, debtor and originating party.

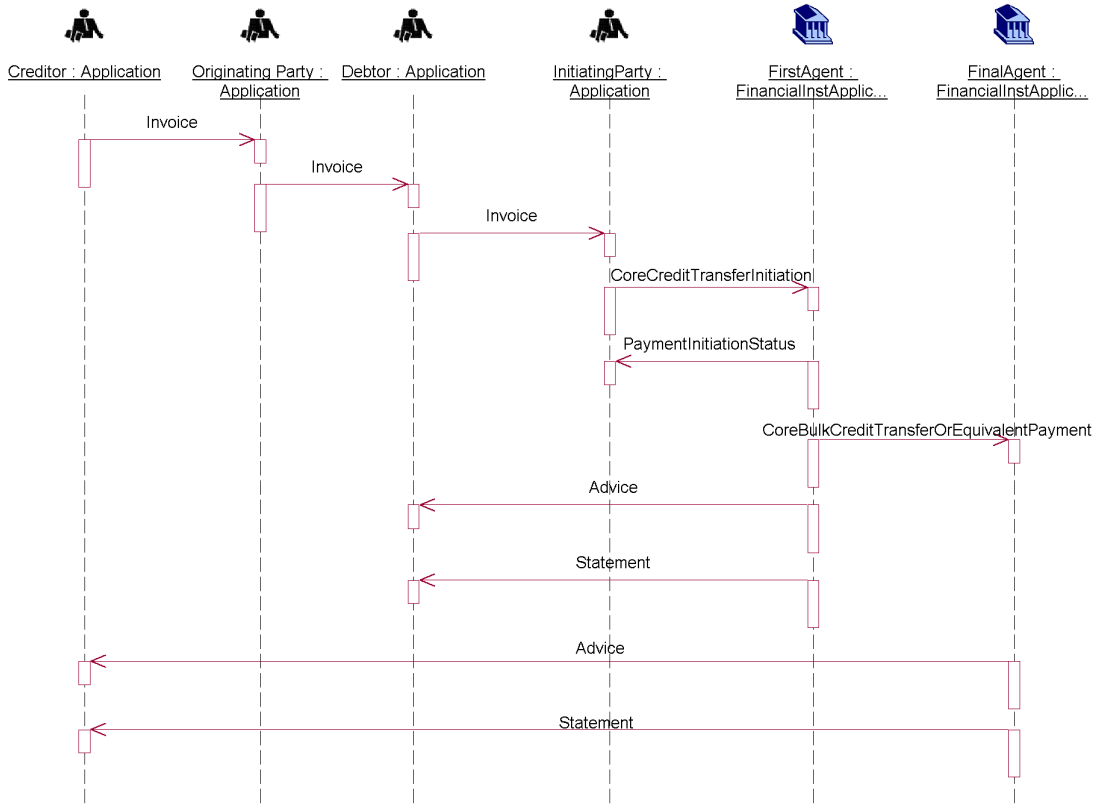

Relay Credit Transfer Initiation

Scenario

The CreditTransferInitiation messages are sent from the initiating party to the forwarding agent. Depending on the service level agreed between the forwarding agent and initiating party, the forwarding agent may send a PaymentInitiationStatus message to inform the initiating party of the status of the initiation.
After performing a series of checks, the forwarding agent will forward the CoreCreditTransferInitiation message to the relevant first agent, ie, the agent that will debit the debtor's account. A relay scenario always requires service level agreements between all parties involved, in which obligations and responsibilities for each party are stipulated.
A number of additional message flows have been included in the message flow diagram to illustrate the complete end-to-end execution of the payment initiation. However, please note that these messages are outside of the scope of this Message Definition Report. These message flows are:

- **Account information:** Depending on what has been agreed between the parties, the first agent may provide the initiating party with a debit advice and/or statement once the payment has been executed and the debit entry has been posted to the debtor's account. The first agent may send this information to the forwarding agent. The forwarding agent in its turn will forward the information to the initiating party.
- **Interbank clearing and settlement between first agent and final agent**: Depending on the interbank clearing and settlement method chosen, a number of messages may be exchanged between the first agent and the next (other?) agents in the payment chain.
- **Account information from final agent to creditor**: Depending on the service level agreed, the final agent may provide the creditor with a credit advice and/or statement information once the payment has been posted to the creditor's account.

The scenarios which we cover in this documentation show the different customer roles that can be played on the initiating side of the credit transfer initiation, and on the receiving side of the cash transfer.
On the initiating side, up to three customer roles can be specified: the initiating party, ie, the party sending the message, the debtor, ie, the debit account owner, and the originating party, ie, the party that owes the cash to the creditor, as a result of receipt of goods or services. These three roles can be played by one and the same actor, or they can be played by different actors. The CoreCreditTransferInitiation message allows inclusion of the three different roles on the initiating side.
On the receiving side, up to two customer roles can be specified: the creditor, ie, the credit account owner, and the final party, ie, the party that is the ultimate beneficiary of the cash transfer. These two roles can be played by one and the same actor, or they can be played by different actors. The CoreCreditTransferInitiation message allows inclusion of the two different roles on the receiving side.

In scenario A, the message is sent by an initiating party to the forwarding agent. The actor playing the role of initiating party is the same as the actor playing the role of debtor and originating party. This illustrates the scenario in which a company owns accounts abroad and uses a concentrator bank to initiate all its payments. The company plays the role of debtor, originating party and initiating party and asks the forwarding agent to request the execution of the payment at the first agent, ie, the account servicer of the debtor. After performing a series of checks, the forwarding agent will forward the message to the first agent.
In scenario B, the message is sent by an initiating party to the forwarding agent. The actor playing the role of initiating party is the same as the actor playing the role of debtor, but the role of the originating party is played by a different actor. This illustrates the scenario in which, for example, a company's head office concentrates all payments from its subsidiaries. The head office plays the role of debtor and initiating party, whilst the subsidiaries play the role of originating parties. After performing a series of checks, the forwarding agent will forward the message to the first agent.
In scenario C, the message is sent by an initiating party to the forwarding agent. The actor playing the role of initiating party is the same as the actor playing the role of originating party, but the role of the debtor is played by a different actor. This illustrates the scenario in which, for example, a head office initiates the payment, but has agreed with its subsidiary abroad to use the account of the subsidiary for certain payments. After performing a series of checks, the forwarding agent will forward the message to the first agent.
In scenario D, the message is sent by an initiating party to the forwarding agent. The actor playing the role of initiating party is different from the actor playing the role of debtor. The role of the originating party is played by yet another actor. After performing a series of checks, the forwarding agent will forward the message to the first agent.

A. Scenario : One actor playing roles of initiating party, debtor and originating party.

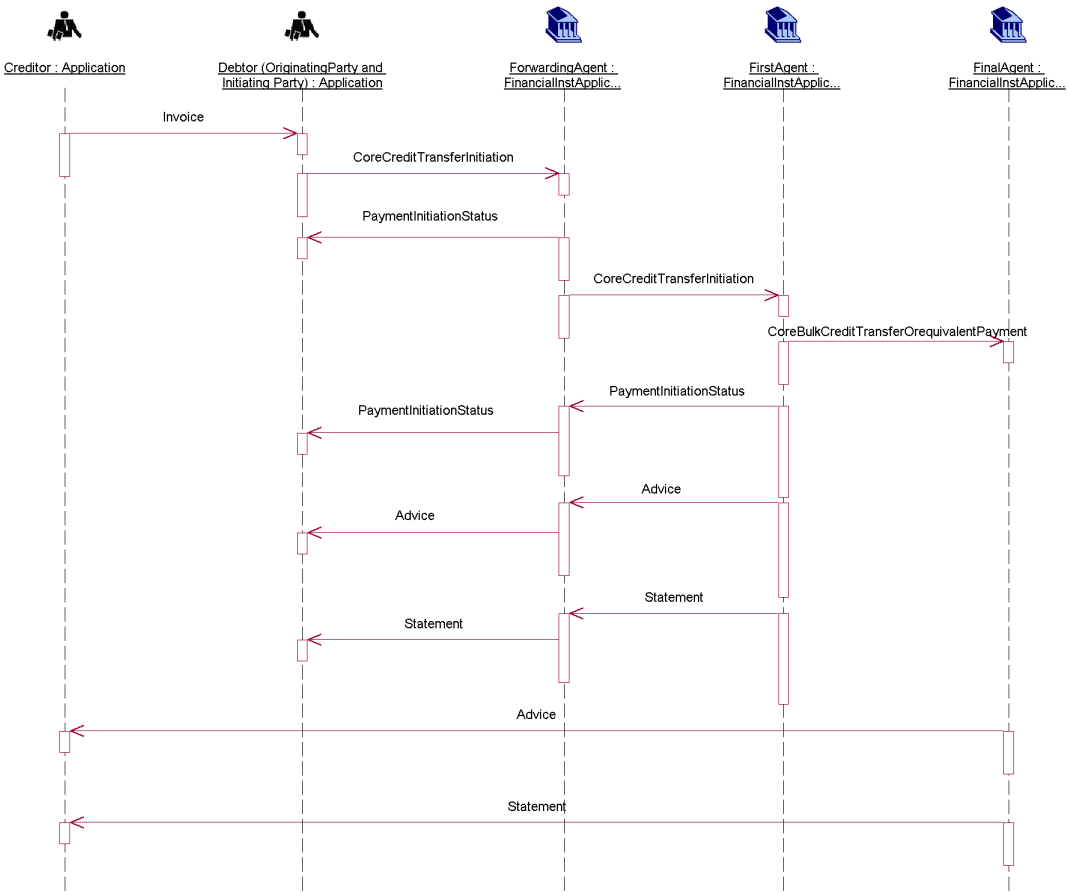

B. Scenario : One actor playing roles of initiating party and debtor, different actor for the role of originating party.

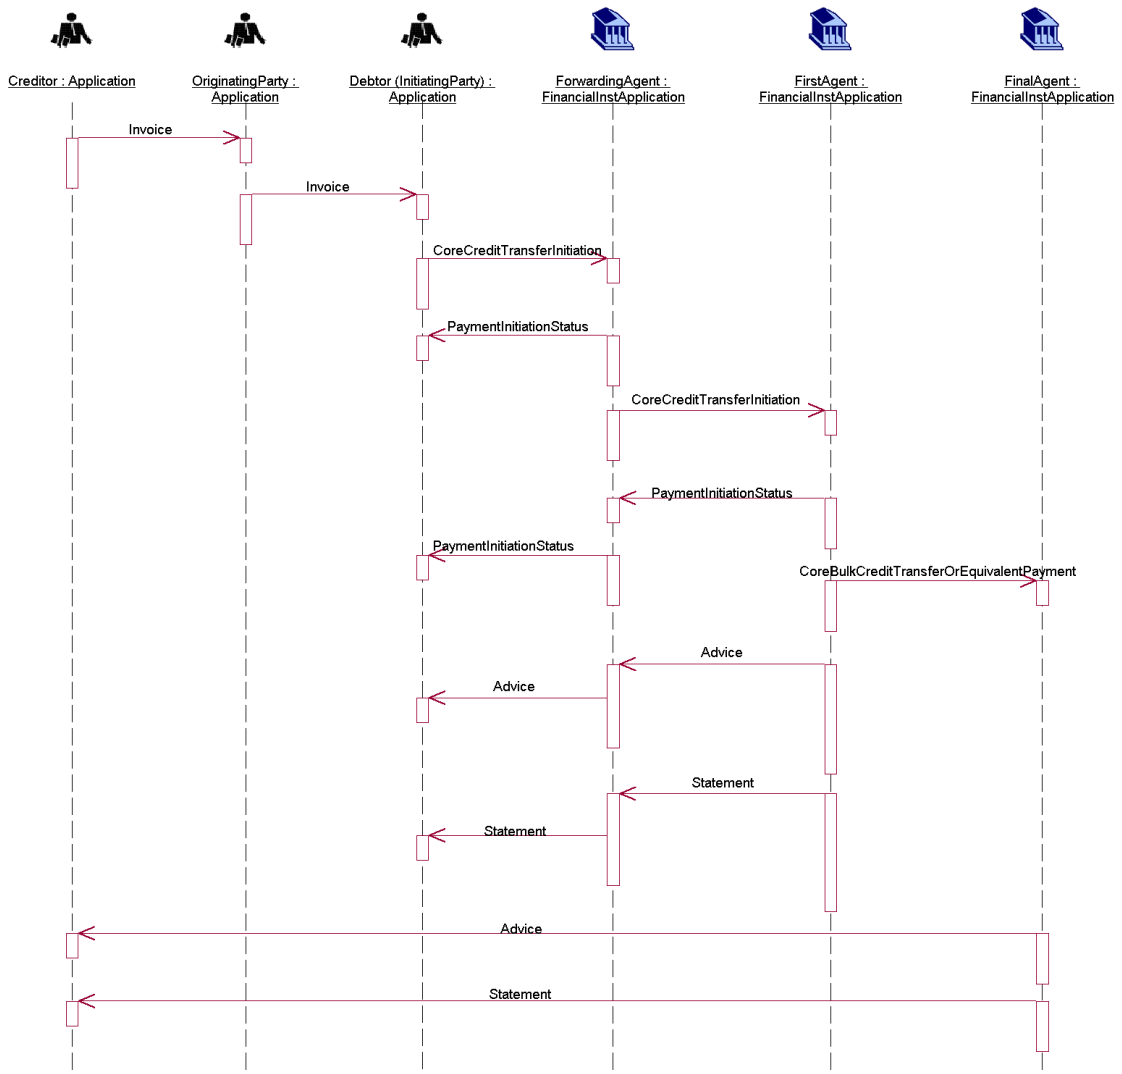

C. Scenario : One actor playing roles of initiating party and originating party, different actor for role of debtor.

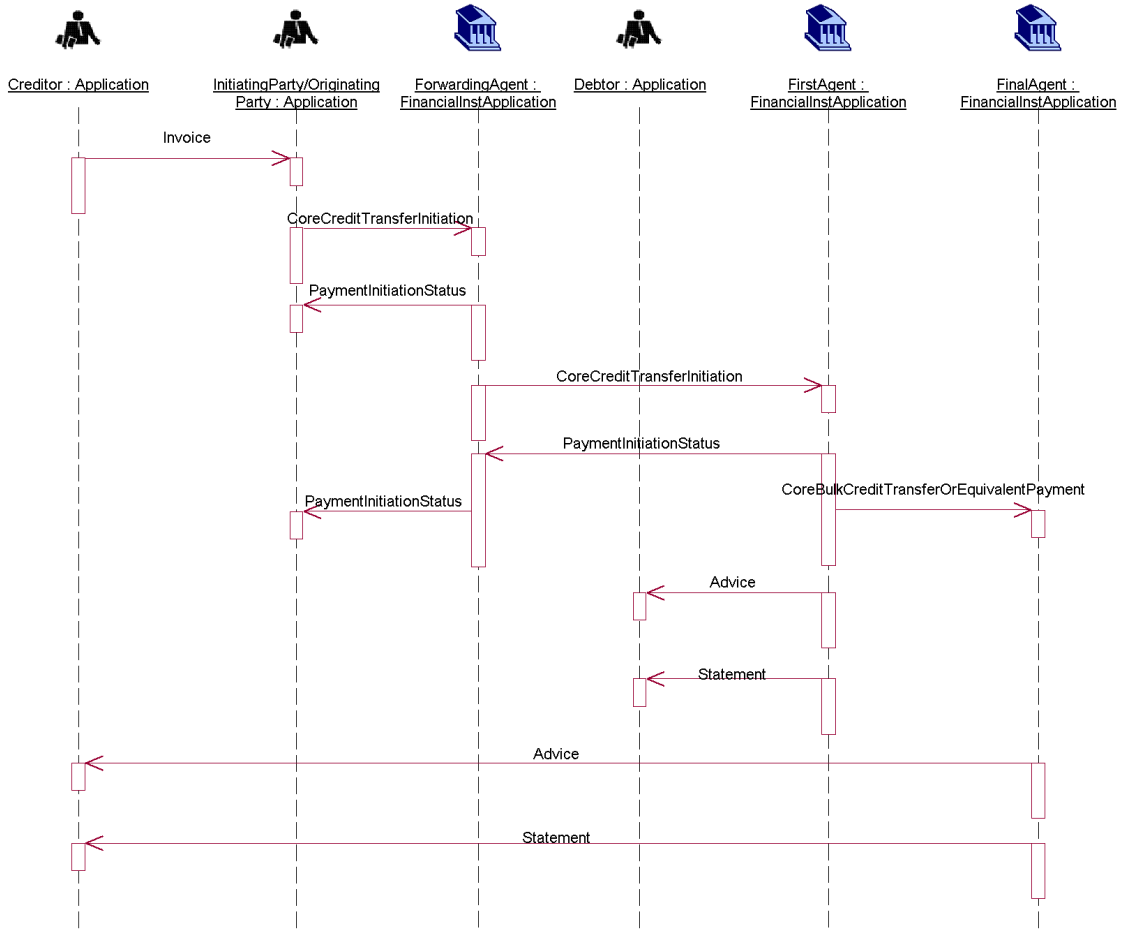

D. Scenario : Three different actors playing the roles of initiating party, debtor and originating party.

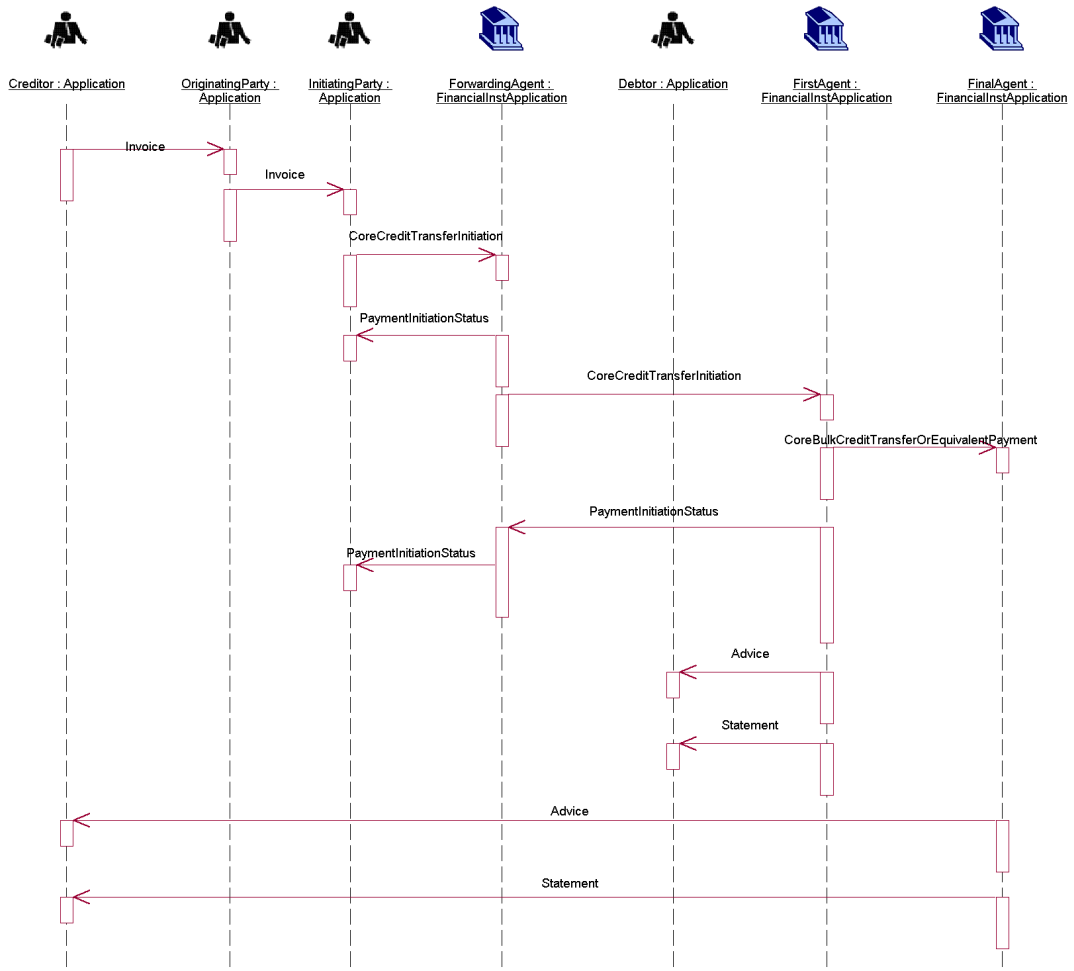

A. Scenario : One actor playing roles of initiating party, debtor and originating party.

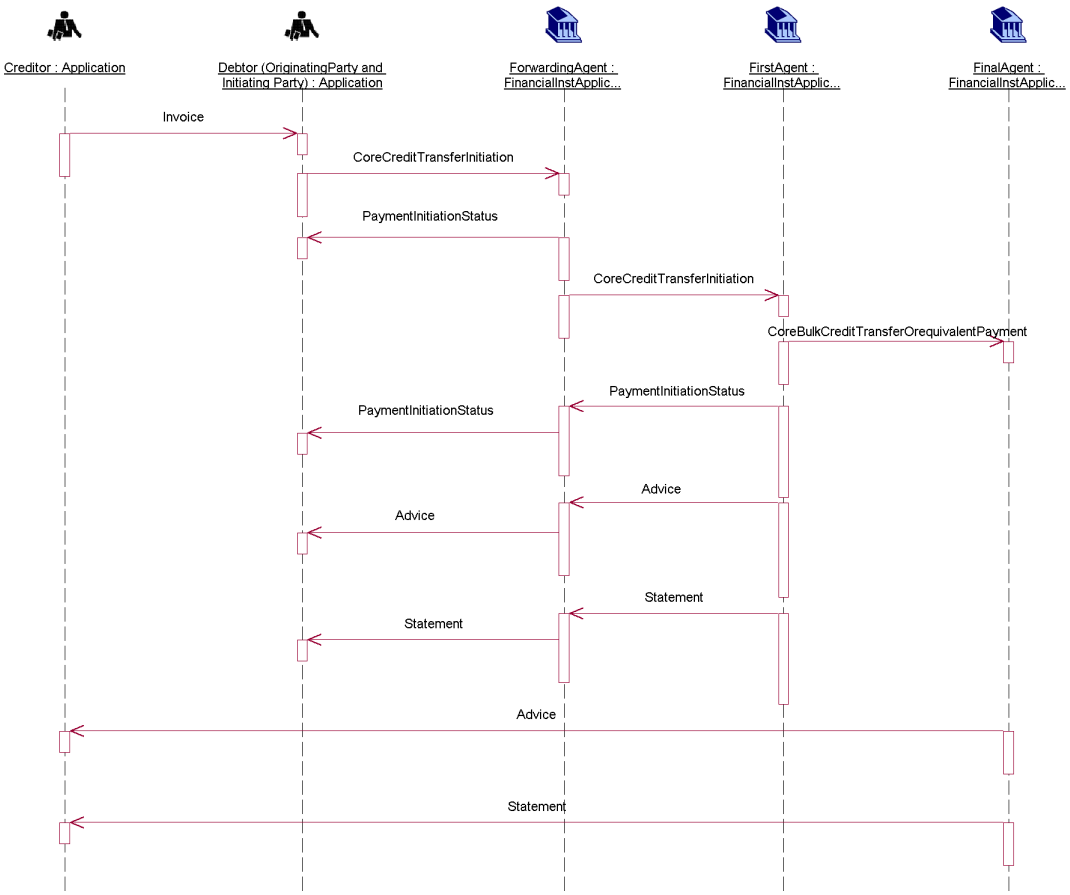

B. Scenario : One actor playing roles of initiating party and debtor, different actor for the role of originating party.

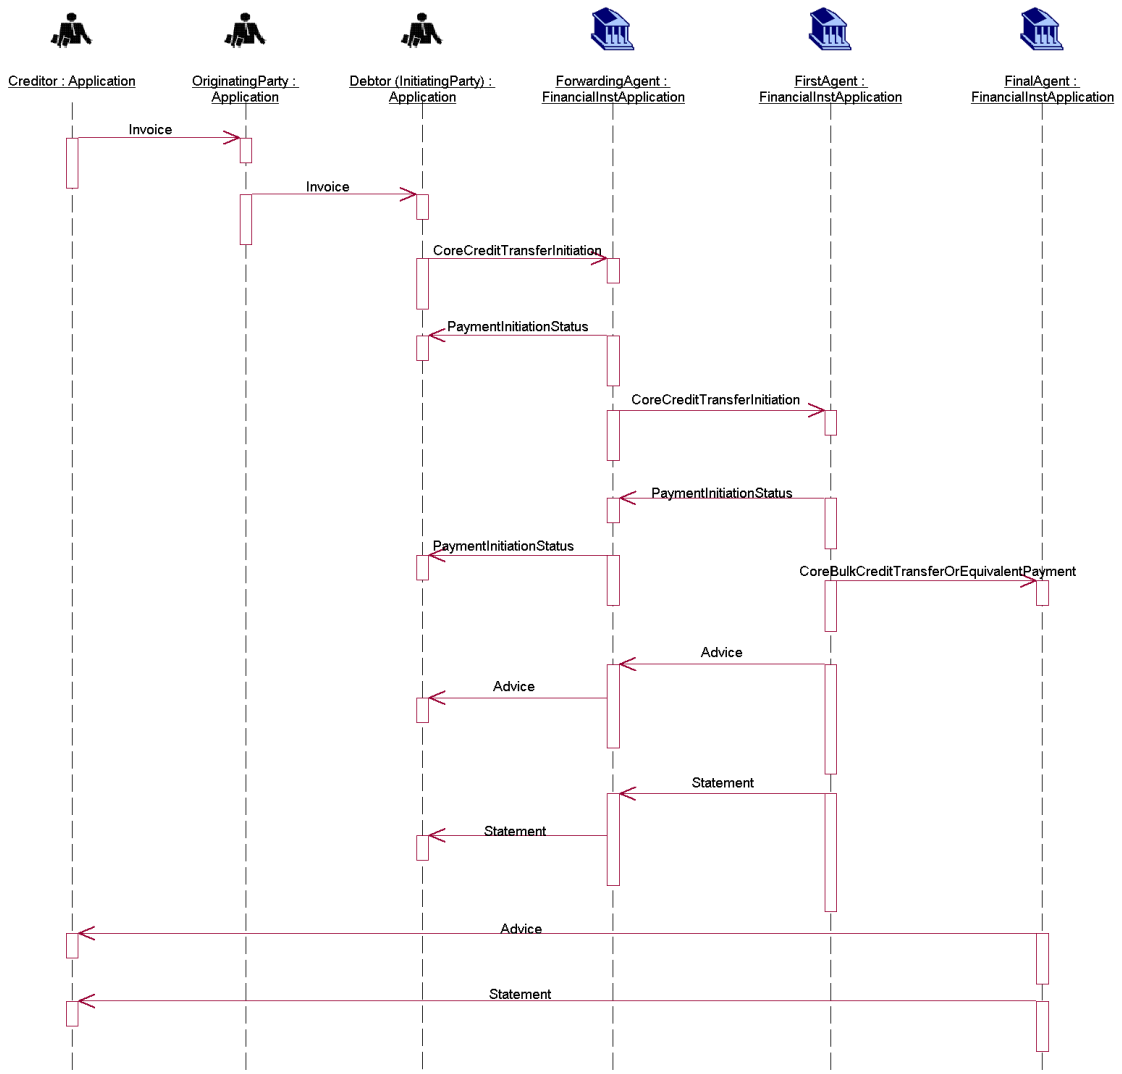

C. Scenario : One actor playing roles of initiating party and originating party, different actor for role of debtor.

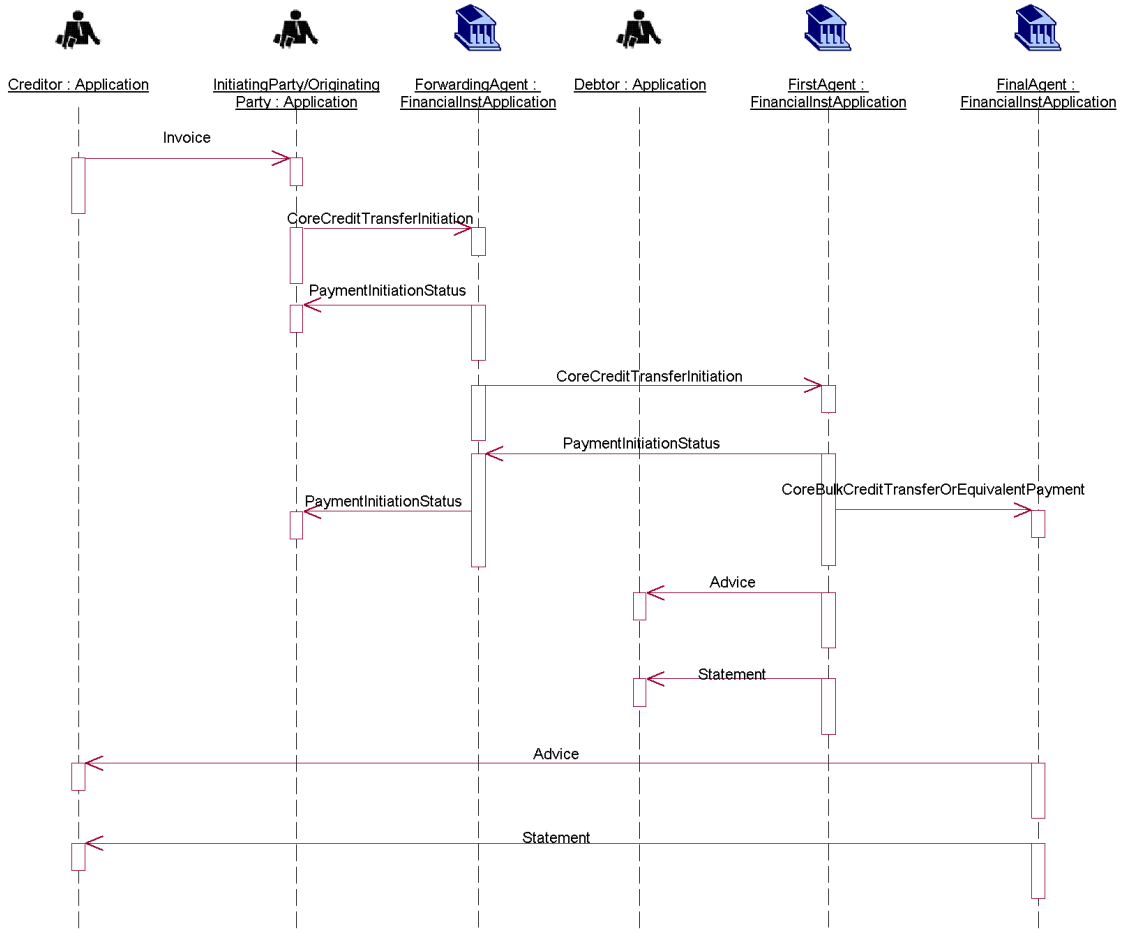

D. Scenario : Three different actors playing the roles of initiating party, debtor and originating party.

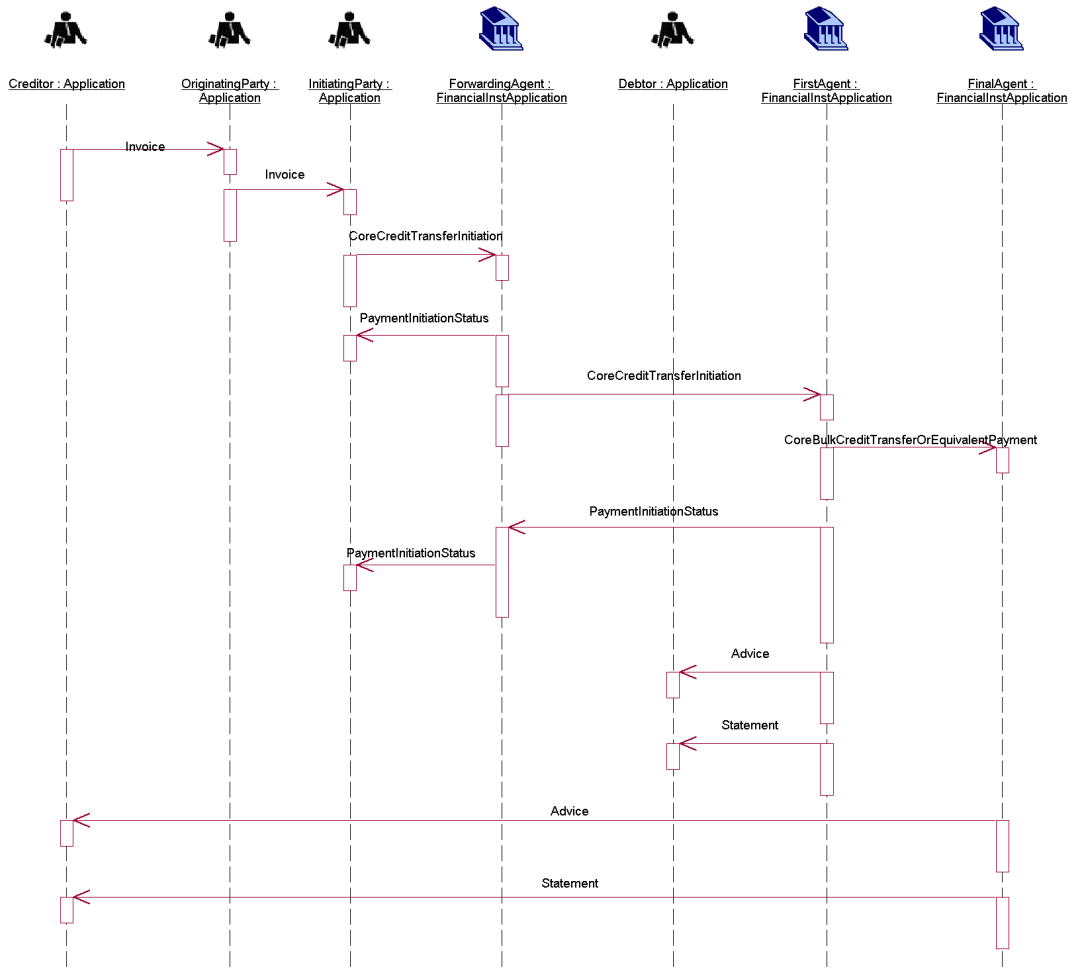

Message: CoreCreditTransferInitiation <pain.001.001.01>

Message Scope and Usage

Scope

The CoreCreditTransferInitiation message is sent by the initiating party to the forwarding agent or first agent.
This message is used to request movement of cash from a debtor's account to a creditor.

Usage

The CoreCreditTransferInitiation message can contain :
- one or more instances of a credit transfer initiation,
- payment transactions that result in book transfers at the first agent or payments to another financial institution,
- payment transactions that result in an electronic cash transfer to the creditor's account or in the emission of a cheque.

The message can be used in a direct or a relay scenario. In a direct scenario, the initiating party sends the CoreCreditTransferInitiation message directly to the first agent. The first agent is the account servicer of the debtor. In a relay scenario, the initiating aarty sends the CoreCreditTransferInitiation message to a forwarding agent. The forwarding agent acts as a concentrating financial institution. It will forward the CoreCreditTransferInitiation message to the first agent.
The message can also be used by an initiatingParty that has authority to send the message on behalf of the debtor. This caters for example for the scenario of a payments factory initiating all payments on behalf of a large corporate.
The CoreCreditTransferInitiation message can be used in domestic and cross-border scenarios.
The message can be used to group payments (in this case, the PaymentInformation component is present once) or can be used as a collection of individual payments (in this case the PaymentInformation component is present once per occurrence of PaymentTransaction component).

Main Characteristics

The CoreCreditTransferInitiation message has the following main characteristics:

Batch or single entry indication

The InitiatingParty can indicate whether it wants to have all transactions present in the CoreCreditTransferInitiation message booked as one entry or as individual entries on the Debtor's account.

Identification of customer parties

The CoreCreditTransferInitiation message caters for the identification of several customer parties. On the debit side of the payment transaction, the OriginatingParty, the Debtor and the InitiatingParty can be identified. On the credit side of the payment transaction, the Creditor and the FinalParty can be identified.

Remittance information

The CoreCreditTransferInitiation message can include basic remittance information. It also contains reference fields that can be used to refer to remittance information sent separately from the payment transaction.

Regulatory reporting

The CoreCreditTransferInitiation can include regulatory reporting information, for use in payments where this is necessary.

Outline

TheCoreCreditTransferInitiation message is composed of three main building blocks.

A. GroupHeader

This building block is mandatory. It contains elements such as a GroupIdentification and CreationDateTime.

B. PaymentInformation

This building block is mandatory and repetitive. It contains elements related to the debit side of the transaction. These elements include Debtor, DebtorAccountInformation and PaymentMethod. If there is an agreement between the InitiatingParty and the receiving agent to include the payment information details related to the debit side of the transaction only once, this block is only present once. If there is an agreement between the InitiatingParty and the receiving agent to repeat the debit information details for each transaction, this building block is present once per occurrence of the PaymentTransaction block.

C. PaymentTransaction

This building block is mandatory and repetitive. It contains elements related to the credit side of the transaction. These elements include Creditor, CreditorAccountInformation and references for the transaction.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		GroupIdentification	<GrpId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]	Text	
1.4		ControlSum	<CtrlSum>	[0..1]	Quantity	
1.5		BatchBooking	<BtchBookg>	[0..1]	Indicator	
1.6		NumberOfTransactions	<NbOfTxs>	[0..1]	Text	
1.7		Grouping	<Grpg>	[0..1]	Indicator	
1.8		InitiatingParty	<InitgPty>	[1..1]		
1.9		Name	<Nm>	[0..1]	Text	
1.10		PostalAddress	<PstlAdr>	[0..1]	+	
1.11		Identification	<Id>	[0..1]		
1.12	{Or	OrganisationIdentification	<OrgId>	[1..1]		
1.13		BEI	<BEI>	[0..1]	Identifier	
1.14		EANGLN	<EANGLN>	[0..1]	Identifier	
1.15		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
1.16		DUNS	<DUNS>	[0..1]	Identifier	
1.17		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
1.18		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
1.19		ProprietaryIdentification	<PrtryId>	[0..1]	+	
1.20	Or}	PrivateIdentification	<PrvtId>	[1..2]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.21	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
1.22	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
1.23	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
1.24	Or	PassportNumber	<PsptNb>	[1..1]	Text	
1.25	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
1.26	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
1.27	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
1.28	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
1.29		Issuer	<Issr>	[0..1]	Text	
1.30		ForwardingAgent	<FwdgAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		PaymentInformation	<PmtInf>	[1..n]		
2.1		RequestedExecutionDate	<ReqdExctnDt>	[1..1]	DateTime	
2.2		PaymentMethodByFirstAgent	<PmtMtdByFrstAgt>	[1..1]	Code	
2.3		CreditTransferTypeIdentification	<CdtTrfTpId>	[0..1]		
2.4	{Or	Code	<Cd>	[0..1]	Code	
2.5	Or}	LocalInstrument	<LclInstrm>	[0..1]	Text	
2.6		InstructionPriority	<InstrPrty>	[0..1]	Code	
2.7		SettlementPriority	<SttlmPrty>	[0..1]		
2.8	{Or	Priority	<Prty>	[1..1]	Code	
2.9	Or}	PaymentScheme	<PmtSchme>	[1..1]		
2.10	{{Or	Code	<Cd>	[1..1]	Code	
2.11	Or}}	ProprietaryInformation	<PrtryInf>	[1..1]	Text	
2.12		Debtor	<Dbtr>	[0..1]		
2.13		Name	<Nm>	[0..1]	Text	
2.14		PostalAddress	<PstlAdr>	[0..1]	+	
2.15		Identification	<Id>	[0..1]		
2.16	{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.17		BEI	<BEI>	[0..1]	Identifier	
2.18		EANGLN	<EANGLN>	[0..1]	Identifier	
2.19		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.20		DUNS	<DUNS>	[0..1]	Identifier	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.21		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.22		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.23		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.24	Or}	PrivateIdentification	<PrvtId>	[1..2]		
2.25	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.26	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.27	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.28	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.29	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.30	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.31	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.32	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
2.33		Issuer	<Issr>	[0..1]	Text	
2.34		DebtorCountryOfResidence	<DbtrCtryOfRes>	[0..1]	Code	
2.35		DebtorAccount	<DbtrAcct>	[1..1]		
2.36		Identification	<Id>	[1..1]	+	
2.37		Type	<Tp>	[0 ..1]	Code	
2.38		Currency	<Ccy>	[0..1]	Code	
2.39		Name	<Nm>	[0..1]	Text	
2.40		FirstAgent	<FrstAgt>	[1..1]	+	
2.41		ChargesAccount	<ChrgsAcct>	[0..1]		
2.42		Identification	<Id>	[1..1]	+	
2.43		Type	<Tp>	[0 ..1]	Code	
2.44		Currency	<Ccy>	[0..1]	Code	
2.45		Name	<Nm>	[0..1]	Text	
2.46		ChargesAccountAgent	<ChrgsAcctAgt>	[0..1]	+	
2.47		PaymentTransaction	<PmtTx>	[1..n]		
2.48		PaymentIdentification	<PmtId>	[1..1]		
2.49		InstructionIdentification	<InstrId>	[0..1]	Text	
2.50		EndToEndIdentification	<EndToEndId>	[1..1]	Text	
2.51		PaymentRemittanceIdentification	<PmtRmtId>	[0..1]	Text	
2.52		Purpose	<Purp>	[0..1]		
2.53	{Or	Proprietary	<Prtry>	[1..1]	Text	
2.54	Or}	Code	<Cd>	[1..1]	Code	
2.55		Amount	<Amt>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.56	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount	
2.57	Or}	EquivalentAmount	<EqvtAmt>	[1..1]		
2.58		Amount	<Amt>	[1..1]	Amount	
2.59		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code	
2.60		ChequeInstruction	<ChqInstr>	[0..1]		
2.61		ChequeType	<ChqTp>	[0..1]	Code	
2.62		ChequeNumber	<ChqNb>	[0..1]	Text	
2.63		ChequeFrom	<ChqFr>	[0..1]		
2.64		Name	<Nm>	[1..1]	Text	
2.65		Address	<Adr>	[1..1]	+	
2.66		DeliveryMethod	<DlvryMtd>	[0..1]	Code	
2.67		DeliverTo	<DlvrTo>	[0..1]		
2.68		Name	<Nm>	[1..1]	Text	
2.69		Address	<Adr>	[1..1]	+	
2.70		InstructionPriority	<InstrPrty>	[0..1]	Code	
2.71		ChequeMaturityDate	<ChqMtrtyDt>	[0..1]	DateTime	
2.72		FormsCode	<FrmsCd>	[0..1]	Text	
2.73		MemoField	<MemoFld>	[0..1]	Text	
2.74		RegionalClearingZone	<RgnlClrZone>	[0..1]	Text	
2.75		OriginatingParty	<OrgtgPty>	[0..1]		
2.76		Name	<Nm>	[0..1]	Text	
2.77		PostalAddress	<PstlAdr>	[0..1]	+	
2.78		Identification	<Id>	[0..1]		
2.79	{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.80		BEI	<BEI>	[0..1]	Identifier	
2.81		EANGLN	<EANGLN>	[0..1]	Identifier	
2.82		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.83		DUNS	<DUNS>	[0..1]	Identifier	
2.84		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.85		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.86		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.87	Or}	PrivateIdentification	<PrvtId>	[1..2]		
2.88	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.89	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.90	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.91	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.92	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.93	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.94	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.95	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
2.96		Issuer	<Issr>	[0..1]	Text	
2.97		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+	
2.98		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+	
2.99		Creditor	<Cdtr>	[0..1]		
2.100		Name	<Nm>	[0..1]	Text	
2.101		PostalAddress	<PstlAdr>	[0..1]	+	
2.102		Identification	<Id>	[0..1]		
2.103	{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.104		BEI	<BEI>	[0..1]	Identifier	
2.105		EANGLN	<EANGLN>	[0..1]	Identifier	
2.106		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.107		DUNS	<DUNS>	[0..1]	Identifier	
2.108		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.109		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.110		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.111	Or}	PrivateIdentification	<PrvtId>	[1..2]		
2.112	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.113	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.114	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.115	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.116	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.117	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.118	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.119	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
2.120		Issuer	<Issr>	[0..1]	Text	
2.121		CreditorAccount	<CdtrAcct>	[0..1]		
2.122		Identification	<Id>	[1..1]	+	
2.123		Type	<Tp>	[0 ..1]	Code	
2.124		Currency	<Ccy>	[0..1]	Code	
2.125		Name	<Nm>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.126		CreditorCountryOfResidence	<CdtrCtryOfRes>	[0..1]	Code	
2.127		FinalAgent	<FnlAgt>	[0..1]	+	
2.128		FinalAgentAccount	<FnlAgtAcct>	[0..1]	Text	
2.129		FinalParty	<FnlPty>	[0..1]		
2.130		Name	<Nm>	[0..1]	Text	
2.131		PostalAddress	<PstlAdr>	[0..1]	+	
2.132		Identification	<Id>	[0..1]		
2.133	{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.134		BEI	<BEI>	[0..1]	Identifier	
2.135		EANGLN	<EANGLN>	[0..1]	Identifier	
2.136		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.137		DUNS	<DUNS>	[0..1]	Identifier	
2.138		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.139		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.140		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.141	Or}	PrivateIdentification	<PrvtId>	[1..2]		
2.142	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.143	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.144	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.145	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.146	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.147	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.148	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.149	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
2.150		Issuer	<Issr>	[0..1]	Text	
2.151		ChargeBearer	<ChrgBr>	[1..1]	Code	
2.152		ExchangeContractReference	<XchgCtrctRef>	[0..1]	Text	
2.153		RegulatoryReporting	<RgltryRptg>	[0..3]		
2.154		Code	<Cd>	[0..1]	Text	
2.155		Amount	<Amt>	[0..1]	Amount	
2.156		Information	<Inf>	[0..1]	Text	
2.157		InstructionForFinalAgent	<InstrForFnlAgt>	[0..1]		
2.158		Code	<Cd>	[0..2]	Code	
2.159		Proprietary	<Prtry>	[0..1]	Text	
2.160		InstructionForFirstAgent	<InstrForFrstAgt>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.161		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code	
2.162		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text	
2.163		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]		
2.164		Name	<Nm>	[1..1]	Text	
2.165		Address	<Adr>	[1..1]	±	
2.166		DebitPurpose	<DbtPurp>	[0..1]	Text	
2.167		Proprietary	<Prtry>	[0..1]	Text	
2.168		Tax	<Tax>	[0..1]		
2.169		CreditorTaxIdentification	<CdtrTaxId>	[0..1]	Text	
2.170		CreditorTaxType	<CdtrTaxTp>	[0..1]	Text	
2.171		DebtorTaxIdentification	<DbtrTaxId>	[0..1]	Text	
2.172		TaxReferenceNumber	<TaxRefNb>	[0..1]	Text	
2.173		TotalTaxableBaseAmount	<TtlTaxblBaseAmt>	[0..1]	Amount	
2.174		TotalTaxAmount	<TtlTaxAmt>	[0..1]	Amount	
2.175		TaxTypeInformation	<TaxTpInf>	[0..n]		
2.176		CertificateIdentification	<CertId>	[0..1]	Text	
2.177		TaxType	<TaxTp>	[0..1]		
2.178		CategoryDescription	<CtgyDesc>	[0..1]	Text	
2.179		Rate	<Rate>	[0..1]	Rate	
2.180		TaxableBaseAmount	<TaxblBaseAmt>	[0..1]	Amount	
2.181		Amount	<Amt>	[0..1]	Amount	
2.182		RemittanceInformation	<RmtInf>	[0..n]		
2.183	{Or	Unstructured	<Ustrd>	[1..1]	Text	
2.184	Or}	Structured	<Strd>	[1..1]		
2.185		ReferredDocumentType	<RfrdDocTp>	[0..1]	Code	
2.186		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime	
2.187		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]		
2.188	{{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount	
2.189	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount	
2.190	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount	
2.191	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount	
2.192	Or}}	TaxAmount	<TaxAmt>	[1..1]	Amount	
2.193		DocumentReferenceNumber	<DocRefNb>	[0..1]	Text	
2.194		CreditorReference	<CdtrRef>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.195		Invoicer	<Invcr>	[0..1]		
2.196		Name	<Nm>	[0..1]	Text	
2.197		PostalAddress	<PstlAdr>	[0..1]	+	
2.198		Identification	<Id>	[0..1]		
2.199	{{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.200		BEI	<BEI>	[0..1]	Identifier	
2.201		EANGLN	<EANGLN>	[0..1]	Identifier	
2.202		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.203		DUNS	<DUNS>	[0..1]	Identifier	
2.204		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.205		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.206		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.207	Or}}	PrivateIdentification	<PrvtId>	[1..2]		
2.208	{{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.209	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.210	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.211	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.212	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.213	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.214	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.215	Or}}}	OtherIdentification	<OthrId>	[1..1]	+	
2.216		Issuer	<Issr>	[0..1]	Text	
2.217		Invoicee	<Invcee>	[0..1]		
2.218		Name	<Nm>	[0..1]	Text	
2.219		PostalAddress	<PstlAdr>	[0..1]	+	
2.220		Identification	<Id>	[0..1]		
2.221	{{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.222		BEI	<BEI>	[0..1]	Identifier	
2.223		EANGLN	<EANGLN>	[0..1]	Identifier	
2.224		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.225		DUNS	<DUNS>	[0..1]	Identifier	
2.226		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.227		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.228		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.229	Or}}	PrivateIdentification	<PrvtId>	[1..2]		
2.230	{{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.231	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.232	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.233	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.234	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.235	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.236	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.237	Or}}}	OtherIdentification	<OthrId>	[1..1]	+	
2.238		Issuer	<Issr>	[0..1]	Text	

Message Items Description

*The following section identifies the elements of the **CoreCreditTransferInitiation** message.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual payment transactions included in the payment initiation.

Type: *The **GroupHeader** block is composed of the following **GroupInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		GroupIdentification	<GrpId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	Text
1.4		ControlSum	<CtrlSum>	[0..1]	Quantity
1.5		BatchBooking	<BtchBookg>	[0..1]	Indicator
1.6		NumberOfTransactions	<NbOfTxs>	[0..1]	Text
1.7		Grouping	<Grpg>	[0..1]	Indicator
1.8		InitiatingParty	<InitgPty>	[1..1]	
1.30		ForwardingAgent	<FwdgAgt>	[0..1]	+

1.1 GroupIdentification <GrpId>

Presence: [1..1]

Definition: Reference assigned by a sending party to unambiguously identify the group of individual transfers being sent.

Usage: this reference is used between the initiating party and the forwarding or first agent to refer to the group of transactions sent. It can be used in status messages, statements and advices between the forwarding or first agent and the initiating party.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the credit transfer initiation was created by the initiating party.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user oriented key that allows to check if the initiating party is allowed to pay from the account specified in the initiation.

Usage: the content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios or payment initiations that are initiated on behalf of a different party than the initiating party.

Data Type: Max128Text

Format: maxLength: 128
minLength: 1

1.4 ControlSum <CtrlSum>

Presence: [0..1]

Definition: Total of all the individual instructed amounts included in the payment initiation.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

1.5 BatchBooking <BtchBookg>

Presence: [0..1]

Definition: Indicates that the initiating party requests a batch entry for the sum of the amounts of all transactions included in the payment initiation.

Data Type: *One of the following **BatchBookingIndicator** values must be used:*
MeaningWhenTrue: Identifies that the initiating party requests a batch entry for the sum of the amounts of all transactions in the initiation.
MeaningWhenFalse: Identifies that the initiating party requests a single entry for each of the transactions in the initiation.

1.6 NumberOfTransactions <NbOfTxs>

Presence: [0..1]

Definition: Number of individual transactions contained in the payment initiation, ie, the number of occurrences of payment transaction.

Data Type: Max15NumericText

Format: [0-9]{1,15}

1.7 Grouping <Grpg>

Presence: [0..1]

Definition: Indicates that the common debit information in the transaction is included once and not repeated for each transaction.

Data Type: *One of the following **GroupingIndicator** values must be used:*
MeaningWhenTrue: Indicates that there is only one occurrence of the PaymentInformation block and several occurrences of the PaymentTransaction block.
MeaningWhenFalse: Indicates that there is the same number of occurrences of the PaymentInformation block and of the PaymentTransaction block.

1.8 InitiatingParty <InitgPty>

Presence: [1..1]

Definition: Party initiating the payment to an agent. This can be either the debtor (in a credit transfer) or the creditor (in a direct debit), or a party that initiates the payment on behalf of the debtor or creditor.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.9		Name	<Nm>	[0..1]	Text
1.10		PostalAddress	<PstlAdr>	[0..1]	+
1.11		Identification	<Id>	[0..1]	

1.9 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

1.10 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

1.11 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.12	{Or	OrganisationIdentification	<OrgId>	[1..1]	
1.20	Or}	PrivateIdentification	<PrvtId>	[1..2]	

1.12 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **1.11** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.13		BEI	<BEI>	[0..1]	Identifier
1.14		EANGLN	<EANGLN>	[0..1]	Identifier
1.15		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
1.16		DUNS	<DUNS>	[0..1]	Identifier
1.17		BankPartyIdentification	<BkPtyId>	[0..1]	Text
1.18		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
1.19		ProprietaryIdentification	<PrtryId>	[0..1]	+

1.13 BEI <BEI>

Presence: [0..1]
Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).
Data Type: BEIIdentifier
Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s): BEI

Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

1.14 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

1.15 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

1.16 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

1.17 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.18 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.19 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

1.20 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **1.11** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.21	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
1.22	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
1.23	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
1.24	Or	PassportNumber	<PsptNb>	[1..1]	Text
1.25	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
1.26	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
1.27	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
1.28	Or}	OtherIdentification	<OthrId>	[1..1]	+
1.29		Issuer	<Issr>	[0..1]	Text

1.21 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.22 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.23 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.24 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.25 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.26 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.27 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35

minLength: 1

1.28 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

1.29 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.30 ForwardingAgent <FwdgAgt>

Presence: [0..1]
Definition: Financial Institution that receives the payment instruction from the initiating party and forwards it to the first agent in the payment chain.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification p.282 in 'Message Item Types' section

2.0 PaymentInformation <PmtInf>

Presence: [1..n]
Definition: Set of characteristics that applies to the debit side of the payment transactions included in the payment initiation.
Type: *The **PaymentInformation** block is composed of the following **PaymentInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		RequestedExecutionDate	<ReqdExctnDt>	[1..1]	DateTime
2.2		PaymentMethodByFirstAgent	<PmtMtdByFrstAgt>	[1..1]	Code

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.3		CreditTransferTypeIdentification	<CdtTrfTpId>	[0..1]	
2.12		Debtor	<Dbtr>	[0..1]	
2.34		DebtorCountryOfResidence	<DbtrCtryOfRes>	[0..1]	Code
2.35		DebtorAccount	<DbtrAcct>	[1..1]	
2.40		FirstAgent	<FrstAgt>	[1..1]	+
2.41		ChargesAccount	<ChrgsAcct>	[0..1]	
2.46		ChargesAccountAgent	<ChrgsAcctAgt>	[0..1]	+
2.47		PaymentTransaction	<PmtTx>	[1..n]	

Rule(s): ChargesAccount1Rule
If ChargesAccountAgent is present, then ChargesAccount is mandatory.
If ChargesAccountAgent is not present, then ChargesAccount is optional.

ChargesAccountAgentRule
If ChargesAccountAgent is present, it must contain a branch of the FirstAgent. It must not contain a completely different financial institution.

ChequeInstruction1Rule
If PaymentMethodByFirstAgent is CHK, then PaymentTransaction/ChequeInstruction is optional.
If PaymentMethodByFirstAgent is different from CHK, then PaymentTransaction/ChequeInstruction is not allowed.

Rule rationale: ChequeInstructionDetails may be present if the payment method is Cheque. It must not be present if the payment method is 'Transfer'.

CreditTransferTypeIdentification1Rule
If PaymentMethodByFirstAgent is TRF, then CreditTransferTypeIdentification is optional.
If PaymentMethodByFirstAgent is different from TRF, then CreditTransferTypeIdentification is not allowed.

Rule rationale: CreditTransferTypeIdentification details may be present if the payment method is Credit Transfer. It must not be present if the payment method is Cheque.

CreditorAndOrCreditorAccountRule
If PaymentMethodByFirstAgent is CHK, then PaymentTransaction/CreditorAccount is not allowed.
If PaymentMethodByFirstAgent is different from CHK and if PaymentTransaction/Creditor is not present, then PaymentTransaction/CreditorAccount is mandatory.
If PaymentMethodByFirstAgent is different from CHK and if PaymentTransaction/Creditor is present, then PaymentTransaction/CreditorAccount is optional.

FinalAgent1Rule
If PaymentMethodBy FirstAgent is CHK and if PaymentTransaction/ChequeInstruction/DeliveryMethod is present and is MLFA, CRFA, RGFA or PUFA, then PaymentTransaction/FinalAgent is mandatory.
If PaymentMethodBy FirstAgent is CHK and if PaymentTransaction/ChequeInstruction/DeliveryMethod is not present or is not MLFA, CRFA, RGFA or PUFA, then PaymentTransaction/FinalAgent is not allowed.

Guideline(s): OriginatingPartyGuideline
PaymentTransaction/OriginatingParty may only be present if different than Debtor.

2.1 RequestedExecutionDate <ReqdExctnDt>

Presence: [1..1]
Definition: Date at which the initiating party requests that the payment instruction be processed. If payment by cheque, the date when the cheque is required to be generated by the bank.

Usage: This is the date on which the debtor's account(s) is (are) to be debited.
Data Type: ISODate

2.2 PaymentMethodByFirstAgent <PmtMtdByFrstAgt>

Presence: [1..1]
Definition: Specifies the transfer method that will be used by the first agent to transfer the funds to the creditor.
Data Type: Code
*One of the following **PaymentMethod1Code** values must be used:*

Code	Name	Definition
CHK	Cheque	A written order to a bank to pay a certain sum of money from one person to another person.
TRF	CreditTransfer	A movement of cash in the books of the account servicer.

2.3 CreditTransferTypeIdentification <CdtTrfTpId>

Presence: [0..1]
Definition: Set of elements that further identifes the type of credit transfer being requested by the initiating party.
Type: *This message item is composed of the following **CreditTransferTypeIdentification** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.4	{Or	Code	<Cd>	[0..1]	Code
2.5	Or}	LocalInstrument	<LclInstrm>	[0..1]	Text
2.6		InstructionPriority	<InstrPrty>	[0..1]	Code
2.7		SettlementPriority	<SttlmPrty>	[0..1]	

2.4 Code <Cd>

Presence: [0..1]
*This message item is part of choice **2.3** CreditTransferTypeIdentification.*
Definition: Type of transaction that resulted in the payment initiation in coded form.
Data Type: Code
*When this message item is present, one of the following **CreditTransferType2Code** values must be used:*

Code	Name	Definition
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CORT	TradeSettlementPayment	Transaction is related to settlement of a trade, eg a foreign exchange deal or a securities transaction.
DIVI	Dividend	Transaction is the payment of dividends.

Code	Name	Definition
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to the payment of a hedging operation.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is the payment of interest.
LOAN	Loan	Transaction is related to the transfer of a loan to a borrower.
PENS	PensionPayment	Transaction is the payment of pension.
SALA	SalaryPayment	Transaction is the payment of salaries.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes.
TRAD	Trade	Transaction is related to the payment of a trade transaction.
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.

2.5 LocalInstrument <LclInstrm>

Presence: [0..1]

*This message item is part of choice **2.3** CreditTransferTypeIdentification.*

Definition: Credit transfer type that is specific to a user community and is required for use within that user community.

Usage : When available, codes provided by local authorities should be used in the Max35Text format.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.6 InstructionPriority <InstrPrty>

Presence: [0..1]

Definition: Urgency or order of importance that the originator would like the recipient of the payment instruction to apply to the processing of the payment instruction.
Usage: This priority relates to queue processing and queue management by forwarding or first agent.

Data Type: Code

*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.7 SettlementPriority <SttlmPrty>

Presence: [0..1]

Definition: Priority with which or the system through which the agents in the payment chain will clear and settle the payment transaction.

Type: *This message item is composed of one of the following **SettlementPriorityChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.8	{Or	Priority	<Prty>	[1..1]	Code
2.9	Or}	PaymentScheme	<PmtSchme>	[1..1]	

2.8 Priority <Prty>

Presence: [1..1]

*This message item is part of choice **2.7** SettlementPriority.*

Definition: Priority with which all agents in the payment chain must clear and settle the payment transaction

Data Type: Code

*One of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.9 PaymentScheme <PmtSchme>

Presence: [1..1]

*This message item is part of choice **2.7** SettlementPriority.*

Definition: Pre-agreed offering between clearing agents, or the channel through which the payment instruction is to be processed. This payment scheme can point to a specific rulebook governing the rules of clearing and settlement between two parties.

Type: *This message item is composed of one of the following **PaymentSchemeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.10	{Or	Code	<Cd>	[1..1]	Code
2.11	Or}	ProprietaryInformation	<PrtryInf>	[1..1]	Text

2.10 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.9** PaymentScheme.*

Definition: Specifies the channel through which the payment instruction is to be processed in coded form.

Data Type: Code

*One of the following **CashClearingSystem2Code** values must be used:*

Code	Name	Definition
ACH	ACH	Automated Clearing House. Payment system that clears cash transfers and settles the proceeds in a lump sum, usually on a multilateral netting basis.
CHI	CHIPS	CHIPS is the Clearing House Interbank Payment System.
FDN	FedNet	FedNet is a link to a Federal Bank account via the internet. FedNet enables checking of account balance, transactions, take print outs of account statement, transfer funds to third party accounts, E-shopping, BSNL Payments, Deposit opening, Deposit Renewal, Request for Demand Draft, Cheque Book etc.
RTG	RTGS	Real Time Gross Settlement System. Payment system that simultaneously clears individual transfers and settles them in central bank money.

2.11 ProprietaryInformation <PrtryInf>

Presence: [1..1]

*This message item is part of choice **2.9** PaymentScheme.*

Definition: Channel that is specific to a user community and is required for use within that user community.

Usage : if the channel is included in the list of codes provided for the payment scheme, the code element should be used instead of the proprietary element.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.12 Debtor <Dbtr>

Presence: [0..1]

Definition: Party that owes an amount of money to the creditor. In the context of the payment model, the debtor is also the debit account owner.

Usage : If required for legal reasons, this element must be present.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.13		Name	<Nm>	[0..1]	Text
2.14		PostalAddress	<PstlAdr>	[0..1]	+
2.15		Identification	<Id>	[0..1]	

2.13 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70

minLength: 1

2.14 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.15 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.16	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.24	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.16 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.15** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.17		BEI	<BEI>	[0..1]	Identifier
2.18		EANGLN	<EANGLN>	[0..1]	Identifier
2.19		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.20		DUNS	<DUNS>	[0..1]	Identifier
2.21		BankPartyIdentification	<BkPtyId>	[0..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.22		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.23		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.17 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.18 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.19 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.20 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.21 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.22 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.23 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.

Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.24 PrivateIdentification <PrvtId>

Presence: [1..2]

*This message item is part of choice **2.15** Identification.*

Definition: Unique and unambiguous identification of a person, eg, passport.

Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.25	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.26	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.27	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.28	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.29	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.30	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.31	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.32	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.33		Issuer	<Issr>	[0..1]	Text

2.25 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.24** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.26 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.24** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.27 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.24** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.28 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.24** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.29 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.24** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.30 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.24** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.31 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.24** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.32 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.24** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.33 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.34 DebtorCountryOfResidence <DbtrCtryOfRes>

Presence: [0..1]
Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country

The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

2.35 DebtorAccount <DbtrAcct>

Presence: [1..1]
Definition: Identification of the account of the debtor to which a debit entry will be made to execute the transfer.
Type: *This message item is composed of the following **CashAccount3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.36		Identification	<Id>	[1..1]	+
2.37		Type	<Tp>	[0 ..1]	Code
2.38		Currency	<Ccy>	[0..1]	Code
2.39		Name	<Nm>	[0..1]	Text

2.36 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following **AccountIdentification1Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier
Or}	DomesticAccount	<DmstAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification1Choice p.278 in 'Message Item Types' section

2.37 Type <Tp>

Presence: [0 ..1]
Definition: Nature, or use, of the account.
Data Type: Code
*When this message item is present, one of the following **CashAccountType3Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.

Code	Name	Definition
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SVGS	Savings	Account used for savings.

2.38 Currency <Ccy>

Presence: [0..1]

Definition: Identification of the currency in which the debtor's account is held.

Usage: Currency should only be used in case one and the same debtor's account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

2.39 Name <Nm>

Presence: [0..1]

Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.40 FirstAgent <FrstAgt>

Presence: [1..1]

Definition: Financial institution that receives the payment transaction from the account owner or other authorised party, and processes the instruction.

Usage : in a credit transfer context, the first agent is the account servicer of the debtor. In a direct debit context, the first agent is the account servicer of the creditor.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification p.282 in 'Message Item Types' section

2.41 ChargesAccount <ChrgsAcct>

Presence: [0..1]
Definition: Account used to process charges associated with a transaction.

Usage : charges account should be used when charges have to be booked to an account different from the account identified in debtor's account.

Type: *This message item is composed of the following **CashAccount3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.42		Identification	<Id>	[1..1]	+
2.43		Type	<Tp>	[0 ..1]	Code
2.44		Currency	<Ccy>	[0..1]	Code
2.45		Name	<Nm>	[0..1]	Text

2.42 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following **AccountIdentification1Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier
Or}	DomesticAccount	<DmstAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification1Choice p.278 in 'Message Item Types' section

2.43 Type <Tp>

Presence: [0 ..1]
Definition: Nature, or use, of the account.
Data Type: Code
*When this message item is present, one of the following **CashAccountType3Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.

Code	Name	Definition
SVGS	Savings	Account used for savings.

2.44 Currency <Ccy>

Presence: [0..1]

Definition: Identification of the currency in which the debtor's account is held.

Usage: Currency should only be used in case one and the same debtor's account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

2.45 Name <Nm>

Presence: [0..1]

Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.46 ChargesAccountAgent <ChrgsAcctAgt>

Presence: [0..1]

Definition: Agent that services a charges account.

Usage : charges account agent should only be used when the charges account agent is different from the first agent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification p.282 in 'Message Item Types' section

2.47 PaymentTransaction <PmtTx>

Presence: [1..n]

Definition: Payment processes required to transfer cash from the debtor to the creditor.

Type: *This message item is composed of the following **GenericPaymentTransaction3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.48		PaymentIdentification	<PmtId>	[1..1]	
2.52		Purpose	<Purp>	[0..1]	
2.55		Amount	<Amt>	[1..1]	
2.60		ChequeInstruction	<ChqInstr>	[0..1]	
2.75		OriginatingParty	<OrgtgPty>	[0..1]	
2.97		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+
2.98		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+
2.99		Creditor	<Cdtr>	[0..1]	
2.121		CreditorAccount	<CdtrAcct>	[0..1]	
2.126		CreditorCountryOfResidence	<CdtrCtryOfRes>	[0..1]	Code
2.127		FinalAgent	<FnlAgt>	[0..1]	+
2.128		FinalAgentAccount	<FnlAgtAcct>	[0..1]	Text
2.129		FinalParty	<FnlPty>	[0..1]	
2.151		ChargeBearer	<ChrgBr>	[1..1]	Code
2.152		ExchangeContractReference	<XchgCtrctRef>	[0..1]	Text
2.153		RegulatoryReporting	<RgltryRptg>	[0..3]	
2.157		InstructionForFinalAgent	<InstrForFnlAgt>	[0..1]	
2.160		InstructionForFirstAgent	<InstrForFrstAgt>	[0..1]	
2.182		RemittanceInformation	<RmtInf>	[0..n]	

Rule(s): IntermediaryAgent2Rule
If IntermediaryAgent1 is not present, then IntermediaryAgent2 is not allowed. If IntermediaryAgent1 is present, then IntermediaryAgent2 is optional.

Guideline(s): FinalPartyGuideline
FinalParty may only be present if different from Creditor.

OriginatingPartyGuideline
OriginatingParty may only be present if different from PaymentInformation/Debtor.

2.48 PaymentIdentification <PmtId>

Presence: [1..1]

Definition: Set of elements used to provide further means of referencing a payment transaction.

Type: *This message item is composed of the following **PaymentIdentification** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.49		InstructionIdentification	<InstrId>	[0..1]	Text
2.50		EndToEndIdentification	<EndToEndId>	[1..1]	Text
2.51		PaymentRemittanceIdentification	<PmtRmtId>	[0..1]	Text

2.49 InstructionIdentification <InstrId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for a payment instruction assigned by the initiating party.

Usage: the instruction identification can be used between the initiating party and the receiving agent to refer to the individual instruction. It can be used in several messages, eg, status messages, debit advices or account statement messages.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.50 EndToEndIdentification <EndToEndId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a payment transaction, as assigned by any of the parties on the initiating side, that will be passed on throughout the entire end-to-end chain.

Usage: the end-to-end identification can be used for reconciliation or to link tasks relating to the payment transaction and can be included in several related messages to the payment transaction between forwarding or first agent and debtor or initiating party, and between final agent and creditor.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.51 PaymentRemittanceIdentification <PmtRmtId>

Presence: [0..1]

Definition: Unique and unambiguous identification of remittance information which is sent separately from the payment initiation information.

Usage: the payment remittance identification is used to link separately sent remittance information to the payment transaction information included in the payment initiation.

If the business context requires the use of a creditor's reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.52 Purpose <Purp>

Presence: [0..1]

Definition: Underlying reason for the payment transaction, eg, a charity payment, or a commercial agreement between the creditor and the debtor.

Usage: purpose is used by the end-customers, ie originating party, initiating party, debtor, creditor, final party, to provide information concerning the nature of the payment transaction. Purpose is a content element, which is not used for processing by any of the agents involved in the payment chain.

Type: *This message item is composed of one of the following **PurposeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.53	{Or	Proprietary	<Prtry>	[1..1]	Text
2.54	Or}	Code	<Cd>	[1..1]	Code

2.53 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.52** Purpose.*

Definition: Payment transaction purpose that is specific to a user community and is required for use within that user community.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.54 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.52** Purpose.*

Definition: Specifies the type of transaction that resulted in the payment initiation in coded form

Data Type: Code

*One of the following **PaymentPurpose1Code** values must be used:*

Code	Name	Definition
ADVA	AdvancePayment	Transaction is an advance payment.
AGRT	AgriculturalTransfer	Transaction is related to the agricultural domain.
ALMY	AlimonyPayment	Transaction is the payment of alimony.
BECH	ChildBenefit	Transaction is related to a payment made to assist parent/ guardian to maintain child.
BENE	UnemploymentDisabilityBenefit	Transaction is related to a payment to a person who is unemployed/disabled.
BONU	BonusPayment.	Transaction is related to payment of a bonus.
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CBFF	CapitalBuilding	Transaction is related to capital building fringe fortune, ie capital building for retirement.
CHAR	CharityPayment	Transaction is a payment for charity reasons.
CMDT	CommodityTransfer	Transaction is payment of commodities.
COLL	CollectionPayment	Collection of funds initiated via a credit transfer.
COMC	CommercialCredit	Transaction is payment of commercial credit.
COMM	Commission	Transaction is payment of commission.
COMT	ConsumerThirdPartyConsolidatedPayment	Payment used by a third party who can collect funds to pay on behalf of consumers, ie credit counseling or bill payment companies.
COST	Costs	Transaction is related to payment of costs.

Code	Name	Definition
CPYR	Copyright	Transaction is payment of copyright.
DBTC	DebitCollectionPayment	Collection of funds initiated via a debit transfer.
DIVI	Dividend	Transaction is payment of dividends.
FREX	ForeignExchange	Transaction is related to a foreign exchange operation.
GDDS	PurchaseSaleOfGoods	Transaction is related to purchase and sale of goods.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to a hedging operation.
IHRP	InstalmentHirePurchaseAgreement	Transaction is payment for an installment/hire-purchase agreement.
INSU	InsurancePremium	Transaction is payment of an insurance premium.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is payment of interest.
LICF	LicenseFee	Transaction is payment of a license fee.
LOAN	Loan	Transaction is related to transfer of loan to borrower.
LOAR	LoanRepayment	Transaction is related to repayment of loan to lender.
NETT	Netting	Transaction is related to a netting operation.
PAYR	Payroll	Transaction is related to the payment of payroll.
PENS	PensionPayment	Transaction is the payment of pension.
REFU	Refund	Transaction is the payment of a refund.
RENT	Rent	Transaction is the payment of rent.
ROYA	Royalties	Transaction is the payment of royalties.
SALA	SalaryPayment	Transaction is the payment of salaries.
SCVE	PurchaseSaleOfServices	Transaction is related to purchase and sale of services.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUBS	Subscription	Transaction is the payment of a subscription.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.

2.55 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between the debtor and creditor, before charges.

Type: *This message item is composed of one of the following* ***AmountType1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.56	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount
2.57	Or}	EquivalentAmount	<EqvtAmt>	[1..1]	

2.56 InstructedAmount <InstdAmt>

Presence: [1..1]

*This message item is part of choice **2.55** Amount.*

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account or in another currency..

Usage : Currency of the amount is expressed in the currency (or one of the currencies) of the debtor's account or another currency, eg, pay 1000000 EUR (and debtor's account is is EUR) or pay 1000000 JPY (and debtor's account is in EUR).

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.57 EquivalentAmount <EqvtAmt>

Presence: [1..1]

*This message item is part of choice **2.55** Amount.*

Definition: Amount of money to be transferred between the debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred into a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Type: *This message item is composed of the following **EquivalentAmount** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.58		Amount	<Amt>	[1..1]	Amount
2.59		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code

2.58 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred in a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.59 CurrencyOfTransfer <CcyOfTrf>

Presence: [1..1]

Definition: Specifies the currency of the to be transferred amount, which is different from the currency of the debtor's account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

2.60 ChequeInstruction <ChqInstr>

Presence: [0..1]

Definition: Information related to a cheque instruction.

Type: *This message item is composed of the following* ***Cheque2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.61		ChequeType	<ChqTp>	[0..1]	Code
2.62		ChequeNumber	<ChqNb>	[0..1]	Text
2.63		ChequeFrom	<ChqFr>	[0..1]	
2.66		DeliveryMethod	<DlvryMtd>	[0..1]	Code
2.67		DeliverTo	<DlvrTo>	[0..1]	
2.70		InstructionPriority	<InstrPrty>	[0..1]	Code
2.71		ChequeMaturityDate	<ChqMtrtyDt>	[0..1]	DateTime
2.72		FormsCode	<FrmsCd>	[0..1]	Text
2.73		MemoField	<MemoFld>	[0..1]	Text
2.74		RegionalClearingZone	<RgnlClrZone>	[0..1]	Text

Rule(s): ChequeMaturityDateRule
If ChequeType is present and is DRFT or ELDR, then ChequeMaturityDate is optional. If ChequeType is not present or is different from DRFT or ELDR, then ChequeMaturityDate is not allowed.

Rule rationale: ChequeMaturityDate may be present only when ChequeType is DRFT or ELDR.

Guideline(s): ChequeFromGuideline
ChequeFrom may only be present if different from PaymentInformation/PaymentTransaction/OriginatingParty or PaymentInformation/Debtor.

DeliverToCreditorGuideline
If PaymentInformation/PaymentTransaction/ChequeInstruction/DeliveryMethod is present and is CRCD or MLCD or PUCD or RGCD, then DeliverTo may only be present if different than PaymentInformation/Creditor.

DeliverToDebtorGuideline
If PaymentInformation/PaymentTransaction/ChequeInstruction/DeliveryMethod is present and is CRDB or MLDB or PUDB or RGDB, then DeliverTo may only be present if different than PaymentInformation/Debtor.

DeliverToFinalAgentGuideline
If PaymentInformation/PaymentTransaction/ChequeInstruction/DeliveryMethod is present and is CRFA or MLFA or PUFA or RGFA, then DeliverTo may only be present if different than PaymentInformation/Creditor.

2.61 ChequeType <ChqTp>

Presence: [0..1]
Definition: Specifies the type of cheque to be issued by the first agent.
Data Type: Code
*When this message item is present, one of the following **ChequeType2Code** values must be used:*

Code	Name	Definition
BCHQ	BankCheque	Cheque drawn on the account of the debtor's financial institution, which is debited on the debtor's account when the cheque is issued.These cheques are printed by the debtor's financial institution and payment is guaranteed by the financial institution. Synonym is 'cashier's cheque'.
CCCH	CertifiedCustomerCheque	Cheque drawn on the account of the debtor, and debited on the debtor's account when the cheque is cashed. The financial institution prints and certifies the cheque, guaranteeing the payment.
CCHQ	CustomerCheque	Cheque drawn on the account of the debtor, and debited on the debtor's account when the cheque is cashed. Synonym is 'corporate cheque'.
DRFT	Draft	A guaranteed bank cheque with a future value date (do not pay before], which in commercial terms is a 'negotiatable instrument': the beneficiary can receive early payment from any bank under subtraction of a discount. The ordering customer's account is debited on value date.
ELDR	ElectronicDraft	An instrument with a future value date (do not pay before], which in commercial terms is a 'negotiatable instrument': the beneficiary can receive early payment from any bank under subtraction of a discount. The ordering customer's account is debited on value date.

2.62 ChequeNumber <ChqNb>

Presence: [0..1]
Definition: Identifies the cheque number.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.63 ChequeFrom <ChqFr>

Presence: [0..1]
Definition: Identifies the party that ordered the issuance of the cheque.
Type: *This message item is composed of the following **NameAndAddress3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.64		Name	<Nm>	[1..1]	Text
2.65		Address	<Adr>	[1..1]	+

2.64 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and is usually used to identify that identity.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.65 Address <Adr>

Presence: [1..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.66 DeliveryMethod <DlvryMtd>

Presence: [0..1]
Definition: Specifies the delivery method of the cheque by the first agent.
Data Type: Code
*When this message item is present, one of the following **ChequeDelivery1Code** values must be used:*

Code	Name	Definition
CRCD	CourierToCreditor	Cheque is to be sent through courier services to creditor.
CRDB	CourierToDebtor	Cheque is to be sent through courier services to debtor.
CRFA	CourierToFinalAgent	Cheque is to be sent through courier services to final agent.
MLCD	MailToCreditor	Cheque is to be sent through mail services to creditor.
MLDB	MailToDebtor	Cheque is to be sent through mail services to debtor.
MLFA	MailToFinalAgent	Cheque is to be sent through mail services to final agent.
PUCD	PickUpByCreditor	Cheque will be picked up by the creditor
PUDB	PickUpByDebtor	Cheque will be picked up by the debtor.
PUFA	PickUpByFinalAgent	Cheque will be picked up by the final agent.
RGCD	RegisteredMailToCreditor	Cheque is to be sent through registered mail services to creditor.
RGDB	RegisteredMailToDebtor	Cheque is to be sent through registered mail services to debtor
RGFA	RegisteredMailToFinalAgent	Cheque is to be sent through registered mail services to final agent.

2.67 DeliverTo <DlvrTo>

Presence: [0..1]
Definition: Identifies the party to whom the first agent should send the cheque.
Type: *This message item is composed of the following **NameAndAddress3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.68		Name	<Nm>	[1..1]	Text
2.69		Address	<Adr>	[1..1]	+

2.68 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and is usually used to identify that identity.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.69 Address <Adr>

Presence: [1..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.70 InstructionPriority <InstrPrty>

Presence: [0..1]

Definition: Urgency or order of importance that the originator would like the recipient of the payment instruction to apply to the processing of the payment instruction.

Data Type: Code

*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.71 ChequeMaturityDate <ChqMtrtyDt>

Presence: [0..1]

Definition: Date when the draft becomes payable and the debtor's account is debited.

Data Type: ISODate

2.72 FormsCode <FrmsCd>

Presence: [0..1]

Definition: Code agreed between the initiating party and the first agent, that specifies the cheque layout, company logo and digitised signature to be used to print the cheque.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.73 MemoField <MemoFld>

Presence: [0..1]

Definition: Information that needs to be printed on a cheque, used by the payer to add miscellaneous information.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.74 RegionalClearingZone <RgnlClrZone>

Presence: [0..1]

Definition: Regional area in which the cheque can be cleared, when a country has no nation-wide cheque clearing organisation.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.75 OriginatingParty <OrgtgPty>

Presence: [0..1]

Definition: Party that owes cash to the creditor, eg, for the receipt of goods and services. The originator orders the payment, and may or may not be the debtor.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.76		Name	<Nm>	[0..1]	Text
2.77		PostalAddress	<PstlAdr>	[0..1]	+
2.78		Identification	<Id>	[0..1]	

2.76 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.77 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.78 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.79	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.87	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.79 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.78** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.80		BEI	<BEI>	[0..1]	Identifier
2.81		EANGLN	<EANGLN>	[0..1]	Identifier
2.82		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.83		DUNS	<DUNS>	[0..1]	Identifier
2.84		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.85		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.86		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.80 BEI <BEI>

Presence: [0..1]
Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).
Data Type: BEIIdentifier
Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s): BEI

Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.81 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.82 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.83 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.84 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.85 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.86 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.

Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.87 PrivateIdentification <PrvtId>

Presence: [1..2]

*This message item is part of choice **2.78** Identification.*

Definition: Unique and unambiguous identification of a person, eg, passport.

Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.88	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.89	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.90	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.91	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.92	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.93	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.94	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.95	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.96		Issuer	<Issr>	[0..1]	Text

2.88 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)

Presence: [1..1]

*This message item is part of choice **2.87** PrivateIdentification.*

Definition: Number assigned by a license authority to a driver's license.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.89 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)

Presence: [1..1]

*This message item is part of choice **2.87** PrivateIdentification.*

Definition: Number assigned by a social security agency.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.90 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)

Presence: [1..1]

*This message item is part of choice **2.87** PrivateIdentification.*

Definition: Number assigned by a government agency to identify foreign nationals.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.91 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)

Presence: [1..1]

*This message item is part of choice **2.87** PrivateIdentification.*

Definition: Number assigned by a passport authority to a passport.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.92 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)

Presence: [1..1]

*This message item is part of choice **2.87** PrivateIdentification.*

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.93 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]

*This message item is part of choice **2.87** PrivateIdentification.*

Definition: Number assigned by a national authority to an identity card.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.94 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)

Presence: [1..1]

*This message item is part of choice **2.87** PrivateIdentification.*

Definition: Number assigned to an employer by a registration authority.

Data Type: Max35Text

Format: maxLength: 35

minLength: 1

2.95 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.87** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.96 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.97 IntermediaryAgent1 <IntrmyAgt1>

Presence: [0..1]
Definition: An agent between the first and final agent.

Usage : This information is provided by the initiating party, based on information provided by the creditor or final party. How this information is handled by the first agent will depend on the service level/business practice between initiating party and first agent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification p.282 in 'Message Item Types' section

2.98 IntermediaryAgent2 <IntrmyAgt2>

Presence: [0..1]
Definition: An agent between the first and final agent.

Usage : This information is provided by the initiating party, based on information provided by the creditor or final party. How this information is handled by the first agent will depend on the service level/business practice between initiating party and first agent. IntermediaryAgent2 is used when more than one intermediary agent is included in the payment initiation. In this case, IntermediaryAgent1 identifies the agent

between the first agent and IntermediaryAgent2, and IntermediaryAgent2 identifies the agent between IntermediaryAgent1 and the final agent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification p.282 in 'Message Item Types' section

2.99 Creditor <Cdtr>

Presence: [0..1]

Definition: Party that receives an amount of money from the debtor. In the context of the payment model, the creditor is also the credit account owner.

Usage : creditor must always be present, unless local regulations stipulate otherwise.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.100		Name	<Nm>	[0..1]	Text
2.101		PostalAddress	<PstlAdr>	[0..1]	+
2.102		Identification	<Id>	[0..1]	

2.100 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.101 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.102 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.103	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.111	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.103 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.102** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.104		BEI	<BEI>	[0..1]	Identifier
2.105		EANGLN	<EANGLN>	[0..1]	Identifier
2.106		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.107		DUNS	<DUNS>	[0..1]	Identifier
2.108		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.109		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.110		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.104 BEI <BEI>

Presence: [0..1]
Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).
Data Type: BEIIdentifier
Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s): BEI

Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.105 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.106 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.107 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.108 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.109 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.110 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.

Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.111 PrivateIdentification <PrvtId>

Presence: [1..2]

*This message item is part of choice **2.102** Identification.*

Definition: Unique and unambiguous identification of a person, eg, passport.

Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.112	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.113	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.114	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.115	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.116	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.117	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.118	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.119	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.120		Issuer	<Issr>	[0..1]	Text

2.112 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)

Presence: [1..1]

*This message item is part of choice **2.111** PrivateIdentification.*

Definition: Number assigned by a license authority to a driver's license.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.113 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)

Presence: [1..1]

*This message item is part of choice **2.111** PrivateIdentification.*

Definition: Number assigned by a social security agency.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.114 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.115 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.116 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.117 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.118 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35

minLength: 1

2.119 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.120 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.121 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.
Type: *This message item is composed of the following **CashAccount3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.122		Identification	<Id>	[1..1]	+
2.123		Type	<Tp>	[0 ..1]	Code
2.124		Currency	<Ccy>	[0..1]	Code
2.125		Name	<Nm>	[0..1]	Text

2.122 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following **AccountIdentification1Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
Or}	DomesticAccount	<DmstAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification1Choice p.278 in 'Message Item Types' section

2.123 Type <Tp>

Presence: [0 ..1]
Definition: Nature, or use, of the account.
Data Type: Code
*When this message item is present, one of the following **CashAccountType3Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SVGS	Savings	Account used for savings.

2.124 Currency <Ccy>

Presence: [0..1]
Definition: Identification of the currency in which the debtor's account is held.

Usage: Currency should only be used in case one and the same debtor's account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

2.125 Name <Nm>

Presence: [0..1]
Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.126 CreditorCountryOfResidence <CdtrCtryOfRes>

Presence: [0..1]

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

2.127 FinalAgent <FnlAgt>

Presence: [0..1]

Definition: Financial institution that receives the payment transaction on behalf of an account owner, and posts the transaction to the account.
Usage : in a credit transfer context, the final agent is the account servicer of the creditor. In a direct debit context, the final agent is the account servicer of the debtor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification p.282 in 'Message Item Types' section

2.128 FinalAgentAccount <FnlAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the nostro account of the final agent at an intermediary.

Usage :the final agent account information provides information for interbank settlement purposes. The element may be used in several ways, eg, building society scenarios (in case the nostro account of the building society at the clearing agent needs to be specified) or scenarios where the nostro account information of the final agent is part of the information provided by the creditor to the debtor for inclusion in the payment initiation.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.129 FinalParty <FnlPty>

Presence: [0..1]

Definition: Party that is the ultimate beneficiary of the cash transfer.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.130		Name	<Nm>	[0..1]	Text
2.131		PostalAddress	<PstlAdr>	[0..1]	+
2.132		Identification	<Id>	[0..1]	

2.130 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.131 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.132 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.133	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.141	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.133 OrganisationIdentification <OrgId>

Presence: [1..1]

*This message item is part of choice **2.132** Identification.*

Definition: Unique and unambiguous way of identifying an organisation.

Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.134		BEI	<BEI>	[0..1]	Identifier
2.135		EANGLN	<EANGLN>	[0..1]	Identifier
2.136		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.137		DUNS	<DUNS>	[0..1]	Identifier
2.138		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.139		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.140		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.134 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.135 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.136 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier
Format: CH[0-9]{6,6}

2.137 DUNS <DUNS>

Presence: [0..1]
Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.
Data Type: DunsIdentifier
Format: [0-9]{9,9}

2.138 BankPartyIdentification <BkPtyId>

Presence: [0..1]
Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.139 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.140 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.141 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **2.132** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.142	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.143	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.144	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.145	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.146	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.147	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.148	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.149	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.150		Issuer	<Issr>	[0..1]	Text

2.142 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.141** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.143 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.141** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.144 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.141** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.145 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.141** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.146 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.141** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.147 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.141** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.148 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.141** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.149 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.141** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.150 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identifier.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.151 ChargeBearer <ChrgBr>

Presence: [1..1]

Definition: Specifies if the creditor and/or debtor will bear the charges associated with the processing of the payment transaction.

Data Type: Code

*One of the following **ChargeBearer1Code** values must be used:*

Code	Name	Definition
BEN	BorneByCreditor	All transaction charges are to be borne by the creditor.
OUR	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHA	Shared	Under the credit transfer scenario, transaction charges on the sender's side are to be borne by the debtor; transaction charges on the receiver's side are to be borne by the creditor.

2.152 ExchangeContractReference <XchgCtrctRef>

Presence: [0..1]

Definition: Unique and unambiguous reference to the foreign exchange contract agreed between the initiating party and the first agent.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.153 RegulatoryReporting <RgltryRptg>

Presence: [0..3]

Definition: Information needed due to regulatory and statutory requirements.

Type: *This message item is composed of the following **StructuredRegulatoryReporting2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.154		Code	<Cd>	[0..1]	Text
2.155		Amount	<Amt>	[0..1]	Amount
2.156		Information	<Inf>	[0..1]	Text

2.154 Code <Cd>

Presence: [0..1]

Definition: Nature, purpose, and reason for the individual transaction, eg, salaries, pensions or dividends. As a guideline, codes of the EUROSTAT code list can be used.

Data Type: Max3Text

Format: maxLength: 3

minLength: 1

2.155 Amount <Amt>

Presence: [0..1]

Definition: Amount of money and currency that may need to be reported for regulatory and statutory requirements.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.156 Information <Inf>

Presence: [0..1]

Definition: Additional details that cater for specific domestic regulatory requirements.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.157 InstructionForFinalAgent <InstrForFnlAgt>

Presence: [0..1]

Definition: Further information related to the processing of the payment instruction, provided by the initiating party, and intended for the final agent.

Type: *This message item is composed of the following* ***InstructionForFinalAgent*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.158		Code	<Cd>	[0..2]	Code
2.159		Proprietary	<Prtry>	[0..1]	Text

2.158 Code <Cd>

Presence: [0..2]

Definition: Further information related to the processing of the payment instruction, provided by the initiating party, and intended for the final agent, in coded form.

Data Type: Code

When this message item is present, one of the following ***Instruction3Code*** *values must be used:*

Code	Name	Definition
CHQB	PayCreditorByCheque	Beneficiary must be paid by cheque.
HOLD	HoldCashForCreditor	Cash must be held for the beneficiary, who will call.. Pay on identification.
PHOB	PhoneBeneficiary	Please advise/contact beneficiary/claimant by phone

Code	Name	Definition
TELB	Telecom	Please advise/contact beneficiary/claimant by the most efficient means of telecommunication.

2.159 Proprietary <Prtry>

Presence: [0..1]

Definition: Instruction to the final agent that is specific to a user community and is required for use within that user community.

Usage : The proprietary element should only be used when the coded element does not provide sufficient codes or when the selected code in the coded element needs to be supplemented by additional information such as a passport number or telephone number.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.160 InstructionForFirstAgent <InstrForFrstAgt>

Presence: [0..1]

Definition: Further information related to the processing of the payment instruction, that may need to be acted upon by the first agent, depending on agreement between customer and the first agent. The instruction can relate to a level of service between the first agent and the customer, can be an instruction that has to be executed by the first agent, or can be information required by the first agent.

Usage: the information contained in the instruction for first agent must not be further transported in the payment chain.

Type: *This message item is composed of the following **InstructionForFirstAgent** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.161		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code
2.162		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text
2.163		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]	
2.166		DebitPurpose	<DbtPurp>	[0..1]	Text
2.167		Proprietary	<Prtry>	[0..1]	Text
2.168		Tax	<Tax>	[0..1]	

2.161 RemittanceLocationMethod <RmtLctnMtd>

Presence: [0..1]

Definition: Specifies the method to be used by the first agent to deliver the remittance advice information.

Data Type: Code

*When this message item is present, one of the following **RemittanceLocationMethod1Code** values must be used:*

Code	Name	Definition
EDIC	ElectronicDataInterchange	Remittance advice information must be sent through Electronic Data Interchange (EDI).

Code	Name	Definition
EMAL	EMail	Remittance advice information must be sent through e-mail.
FAXI	Fax	Remittance advice information must be faxed.
POST	Post	Remittance advice information must be sent through postal services.
URID	UniformResourceIdentifier	Remittance advice information needs to be sent to a Uniform Resource Identifier (URI). URI is a compact string of characters that uniquely identify an abstract or physical resource. URI's are the super-set of identifiers, such as URLs, email addresses, ftp sites, etc, and as such, provide the syntax for all of the identification schemes.

2.162 RemittanceLocationElectronicAddress <RmtLctnElctrncAdr>

Presence: [0..1]
Definition: Electronic address to which the first agent is to send the remittance information
Data Type: Max128Text
Format: maxLength: 128
minLength: 1

2.163 RemittanceLocationPostalAddress <RmtLctnPstlAdr>

Presence: [0..1]
Definition: Postal address to which the first agent is to send the remittance information.
Type: *This message item is composed of the following **NameAndAddress3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.164		Name	<Nm>	[1..1]	Text
2.165		Address	<Adr>	[1..1]	+

2.164 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and is usually used to identify that identity.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.165 Address <Adr>

Presence: [1..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.166 DebitPurpose <DbtPurp>

Presence: [0..1]

Definition: Reason or nature of the debit, on the debtor's account, that must be returned in debit advices/statements to the debtor

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.167 Proprietary <Prtry>

Presence: [0..1]

Definition: Instruction to the first agent that is specific to a user community and is required for use within that user community.

Usage : the proprietary element should only be used when the coded element does not provide sufficient codes.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.168 Tax <Tax>

Presence: [0..1]

Definition: Amount of money due to the government or tax authority, according to various pre-defined parameters such as thresholds or income.

Type: *This message item is composed of the following **TaxInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.169		CreditorTaxIdentification	<CdtrTaxId>	[0..1]	Text
2.170		CreditorTaxType	<CdtrTaxTp>	[0..1]	Text
2.171		DebtorTaxIdentification	<DbtrTaxId>	[0..1]	Text
2.172		TaxReferenceNumber	<TaxRefNb>	[0..1]	Text
2.173		TotalTaxableBaseAmount	<TtlTaxblBaseAmt>	[0..1]	Amount

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.174		TotalTaxAmount	<TtlTaxAmt>	[0..1]	Amount
2.175		TaxTypeInformation	<TaxTpInf>	[0..n]	

2.169 CreditorTaxIdentification <CdtrTaxId>

Presence: [0..1]
Definition: Tax Identification Number of the creditor.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.170 CreditorTaxType <CdtrTaxTp>

Presence: [0..1]
Definition: Type of tax payer (creditor).
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.171 DebtorTaxIdentification <DbtrTaxId>

Presence: [0..1]
Definition: Tax Identification Number of the debtor.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.172 TaxReferenceNumber <TaxRefNb>

Presence: [0..1]
Definition: Tax reference information that is specific to a taxing agency.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

2.173 TotalTaxableBaseAmount <TtlTaxblBaseAmt>

Presence: [0..1]
Definition: Total amount of money on which the tax is based.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**

ValidationByTable

2.174 TotalTaxAmount <TtlTaxAmt>

Presence: [0..1]

Definition: Amount of money resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.175 TaxTypeInformation <TaxTpInf>

Presence: [0..n]

Definition: Set of characteristics defining the type of tax.

Type: *This message item is composed of the following* ***TaxDetails*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.176		CertificateIdentification	<CertId>	[0..1]	Text
2.177		TaxType	<TaxTp>	[0..1]	

Rule(s): CertificateIdentificationAndOrTaxTypeRule
If CertificateIdentification is not present, then TaxType is mandatory.
If CertificateIdentification is present, then TaxType is optional.

2.176 CertificateIdentification <CertId>

Presence: [0..1]

Definition: Document issued by first agent on behalf of debtor to report withholding tax to taxing authority.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.177 TaxType <TaxTp>

Presence: [0..1]

Definition: Information on the type of tax.

Type: *This message item is composed of the following* ***TaxType*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.178		CategoryDescription	<CtgyDesc>	[0..1]	Text
2.179		Rate	<Rate>	[0..1]	Rate

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.180		TaxableBaseAmount	<TaxblBaseAmt>	[0..1]	Amount
2.181		Amount	<Amt>	[0..1]	Amount

2.178 CategoryDescription <CtgyDesc>

Presence: [0..1]

Definition: Description of the tax that is being paid, including specific representation required by taxing authority.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.179 Rate <Rate>

Presence: [0..1]

Definition: Rate used for calculation of the tax.

Data Type: PercentageRate

Format: fractionDigits: 10
totalDigits: 11

2.180 TaxableBaseAmount <TaxblBaseAmt>

Presence: [0..1]

Definition: Amount of money on which the tax is based.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.181 Amount <Amt>

Presence: [0..1]

Definition: Amount of money resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**

ValidationByTable

2.182 RemittanceInformation <RmtInf>

Presence: [0..n]

Definition: Information that enables the matching, ie, reconciliation, of a payment with the items that the payment is intended to settle, eg, commercial invoices in an account receivable system.

Type: *This message item is composed of one of the following* ***RemittanceInformation3Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.183	{Or	Unstructured	<Ustrd>	[1..1]	Text
2.184	Or}	Structured	<Strd>	[1..1]	

2.183 Unstructured <Ustrd>

Presence: [1..1]

This message item is part of choice ***2.182*** *RemittanceInformation.*

Definition: Information, in free text form, to enable the matching, ie reconciliation, (reconciliation) of a payment with the items that the payment is intended to settle, such as commercial invoices in an accounts receivable system.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.184 Structured <Strd>

Presence: [1..1]

This message item is part of choice ***2.182*** *RemittanceInformation.*

Definition: Information in structured form, that is supplied to enable the matching, ie, reconciliation, of a payment with the items that the payment is intended to settle, eg, commercial invoices in an account receivable system.

Type: *This message item is composed of the following* ***StructuredRemittanceInformation2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.185		ReferredDocumentType	<RfrdDocTp>	[0..1]	Code
2.186		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime
2.187		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]	
2.193		DocumentReferenceNumber	<DocRefNb>	[0..1]	Text
2.194		CreditorReference	<CdtrRef>	[0..1]	Text
2.195		Invoicer	<Invcr>	[0..1]	
2.217		Invoicee	<Invcee>	[0..1]	

2.185 ReferredDocumentType <RfrdDocTp>

Presence: [0..1]

Definition: Specifies the nature of the referred document/transaction, eg, invoice or credit note.

Data Type: Code

*When this message item is present, one of the following **DocumentType1Code** values must be used:*

Code	Name	Definition
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.

2.186 ReferredDocumentRelatedDate <RfrdDocRltdDt>

Presence: [0..1]

Definition: Date associated with the referred document, eg, date of issue.

Data Type: ISODate

2.187 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..n]

Definition: Amount of money and currency of a document referred to in the remittance section. The amount is typically either the original amount due and payable, or the amount actually remitted for the referred document.

Type: *This message item is composed of one of the following **ReferredDocumentAmount1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.188	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount
2.189	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount
2.190	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.191	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount
2.192	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount

2.188 DuePayableAmount <DuePyblAmt>

Presence: [1..1]

*This message item is part of choice **2.187** ReferredDocumentAmount.*

Definition: Amount specified is the exact amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.189 DiscountAppliedAmount <DscntApldAmt>

Presence: [1..1]

*This message item is part of choice **2.187** ReferredDocumentAmount.*

Definition: Amount of money resulting from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.190 RemittedAmount <RmtdAmt>

Presence: [1..1]

*This message item is part of choice **2.187** ReferredDocumentAmount.*

Definition: Amount of money remitted for the referred document.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18

CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.191 CreditNoteAmount <CdtNoteAmt>

Presence: [1..1]

*This message item is part of choice **2.187** ReferredDocumentAmount.*

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.192 TaxAmount <TaxAmt>

Presence: [1..1]

*This message item is part of choice **2.187** ReferredDocumentAmount.*

Definition: Quantity of cash resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.193 DocumentReferenceNumber <DocRefNb>

Presence: [0..1]

Definition: Unique and unambiguous identification of a document that distinguishes that document from another document referred to in the remittance information, usually assigned by the originator of the referred document/transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.194 CreditorReference <CdtrRef>

Presence: [0..1]

Definition: Unique and unambiguous reference assigned by the creditor to refer to the payment transaction.

Usage: if available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the cash.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.195 Invoicer <Invcr>

Presence: [0..1]

Definition: Identification of the organization issuing the invoice when different than the creditor or final party

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.196		Name	<Nm>	[0..1]	Text
2.197		PostalAddress	<PstlAdr>	[0..1]	+
2.198		Identification	<Id>	[0..1]	

2.196 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.197 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.198 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.199	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.207	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.199 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.198** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.200		BEI	<BEI>	[0..1]	Identifier
2.201		EANGLN	<EANGLN>	[0..1]	Identifier
2.202		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.203		DUNS	<DUNS>	[0..1]	Identifier
2.204		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.205		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.206		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.200 BEI <BEI>

Presence: [0..1]
Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).
Data Type: BEIIdentifier
Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.201 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.202 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.203 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.204 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.205 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.206 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.

Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.207 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **2.198** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.208	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.209	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.210	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.211	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.212	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.213	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.214	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.215	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.216		Issuer	<Issr>	[0..1]	Text

2.208 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.207** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.209 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.207** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.210 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.207** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.211 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.207** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.212 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.207** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.213 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.207** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.214 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.207** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.215 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.207** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.216 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.217 Invoicee <Invcee>

Presence: [0..1]
Definition: Identification of the party to whom an invoice is issued, when different than the originator or debtor.
Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.218		Name	<Nm>	[0..1]	Text
2.219		PostalAddress	<PstlAdr>	[0..1]	+
2.220		Identification	<Id>	[0..1]	

2.218 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.219 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.220 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.221	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.229	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.221 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.220** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.222		BEI	<BEI>	[0..1]	Identifier
2.223		EANGLN	<EANGLN>	[0..1]	Identifier
2.224		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.225		DUNS	<DUNS>	[0..1]	Identifier
2.226		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.227		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.228		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.222 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.223 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.224 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.225 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.226 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.227 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.228 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.229 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **2.220** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.230	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.231	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.232	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.233	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.234	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.235	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.236	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.237	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.238		Issuer	<Issr>	[0..1]	Text

2.230 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.229** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.231 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.229** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.232 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.229** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.233 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.229** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.234 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.229** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.235 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.229** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.236 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.229** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.237 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.229** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.238 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

Business Example - 1

Narrative

On 4 October 2005, pension fund Vitaplus sends a CoreCreditTransferInitiation message to its account servicer, AAAAFRPP.
The initiation contains two payment transactions to be paid to different creditors.
Payment transaction 1 is for account 123456 of creditor Dupont at bank BBBBFRPPNAR.
Payment transaction 2 is for account 98765 of creditor Artois at bank CCCCFRPPMUL.
Both payment transactions are pension payments. Charges related to the execution of the payments will be shared between debtor and creditor.
The requested execution date is 6 October 2005.
Pension fund Vitaplus would like to have one entry on its account 123456789 for the two transactions.
Corporate customers of AAAAFRPP do not group information from individual payment transactions, but include full details for each individual transaction.

Business Description

Element	*<XMLTag>*	*Content*

Group Header	**<GrpHdr>**	
GroupIdentification	<GrpId>	PFSM1234
CreationDateTime	<CredDtTm>	2005-10-04T13:20:00+01:00
BatchBooking	<BtchBookg>	true
NumberOfTransactions	<NbOfTxs>	2
Grouping	<Grpg>	false
InitiatingParty	<InitgPty>	
Name	<Nm>	PENSION FUND VITAPLUS
PaymentInformation	**<PmtInf>**	
RequestedExecutionDate	<ReqdExctnDt>	2005-10-06
PaymentMethodByFirstAgent	<PmtMtdByFrstAgt>	TRF
CreditTransferTypeIdentification	<CdtTrfTpId>	
Code	<Cd>	PENS
Debtor	<Dbtr>	
Name	<Name>	PENSION FUND VITAPLUS
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	BLVD DE LENTREPOT
BuildingNumber	<BldgNb>	56
PostCode	<PstCd>	59000
TownName	<TwnNm>	LILLE
Country	<Ctry>	FR
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
DomesticAccount	<DmstAcct>	
Identification	<Id>	123456789
FirstAgent	<FrstAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAAFRPP
PaymentTransaction	**<PmtTx>**	
PaymentIdentification	<PmtId>	
InstructionIdentification	<InstrId>	PMSM001
EndToEndIdentification	<EndToEndId>	PEN/OCT/05/REF456789
Amount	<Amt>	
InstructedAmount	<InstdAmt Ccy=EUR>	2000
Creditor	<Cdtr>	
Name	<Nm>	M DUPONT
PostalAddress	<PstlAdr>	

StreetName	<StrtNm>	RUE DES COMBATTANTS
BuildingNumber	<BldgNb>	12
PostCode	<PstCd>	11100
TownName	<TwnNm>	NARBONNE
Country	<Ctry>	FR
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
DomesticAccount	<DmstAcct>	
Identification	<Id>	123456
FinalAgent	<FnlAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBFRPPNAR
ChargeBearer	<ChrgBr>	SHA
RemittanceInformation	<RmtInf>	
Unstructured	<Ustrd>	PENSION PAYMENT OCTOBER 2005
PaymentInformation	**<PmtInf>**	
RequestedExecutionDate	<ReqdExctnDt>	2005-10-06
PaymentMethodByFirstAgent	<PmtMtdByFrstAgt>	TRF
CreditTransferTypeIdentification	<CdtTrfTpId>	
Code	<Cd>	PENS
Debtor	<Dbtr>	
Name	<Name>	PENSION FUND VITAPLUS
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	BLVD DE LENTREPOT
BuildingNumber	<BldgNb>	56
PostCode	<PstCd>	59000
TownName	<TwnNm>	LILLE
Country	<Ctry>	FR
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
DomesticAccount	<DmstAcct>	
Identification	<Id>	123456789
FirstAgent	<FrstAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAAFRPP
PaymentTransaction	**<PmtTx>**	
PaymentIdentification	<PmtId>	

InstructionIdentification	<InstrId>	PMSM002
EndToEndIdentification	<EndToEndId>	PEN/OCT/05/123456
Amount	<Amt>	
InstructedAmount	<InstdAmt Ccy=EUR>	1785
Creditor	<Cdtr>	
Name	<Nm>	ARTOIS
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	AV DU PRESIDENT KENNEDY
BuildingNumber	<BldgNb>	22
PostCode	<PstCd>	68050
TownName	<TwnNm>	MULHOUSE
Country	<Ctry>	FR
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
DomesticAccount	<DmstAcct>	
Identification	<Id>	98765
FinalAgent	<FnlAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	CCCCFRPPMUL
ChargeBearer	<ChrgBr>	SHA
RemittanceInformation	<RmtInf>	
Unstructured	<Ustrd>	PENSION PAYMENT OCTOBER 2005

XML Instance


```
<pain.001.001.01>
  <GrpHdr>
    <GrpId>PFSM1234</GrpId>
    <CreDtTm>2005-10-04T13:20:00+01:00</CreDtTm>
    <BtchBookg>true</BtchBookg>
    <NbOfTxs>2</NbOfTxs>
    <Grpg>false</Grpg>
    <InitgPty>
      <Nm>PENSION FUND VITAPLUS</Nm>
    </InitgPty>
  </GrpHdr>
  <PmtInf>
    <ReqdExctnDt>2005-10-06</ReqdExctnDt>
    <PmtMtdByFrstAgt>TRF</PmtMtdByFrstAgt>
    <CdtTrfTpId>
      <Cd>PENS</Cd>
    </CdtTrfTpId>
```

```
<Dbtr>
   <Nm>PENSION FUND VITAPLUS</Nm>
   <PstlAdr>
      <StrtNm>BLVD DE LENTREPOT</StrtNm>
      <BldgNb>56</BldgNb>
      <PstCd>59000</PstCd>
      <TwnNm>LILLE</TwnNm>
      <Ctry>FR</Ctry>
   </PstlAdr>
</Dbtr>
<DbtrAcct>
   <Id>
      <DmstAcct>
         <Id>123456789</Id>
      </DmstAcct>
   </Id>
</DbtrAcct>
<FrstAgt>
   <FinInstnId>
      <BIC>AAAAFRPP</BIC>
   </FinInstnId>
</FrstAgt>
<PmtTx>
   <PmtId>
      <InstrId>PMSM001</InstrId>
      <EndToEndId>PEN/OCT/05/REF456789</EndToEndId>
   </PmtId>
   <Amt>
      <InstdAmt Ccy = "EUR">2000</InstdAmt>
   </Amt>
   <Cdtr>
      <Nm>M DUPONT</Nm>
      <PstlAdr>
         <StrtNm>RUE DES COMBATTANTS</StrtNm>
         <BldgNb>12</BldgNb>
         <PstCd>11100</PstCd>
         <TwnNm>NARBONNE</TwnNm>
         <Ctry>FR</Ctry>
      </PstlAdr>
   </Cdtr>
   <CdtrAcct>
      <Id>
         <DmstAcct>
            <Id>123456</Id>
         </DmstAcct>
      </Id>
   </CdtrAcct>
   <FnlAgt>
      <FinInstnId>
         <BIC>BBBBFRPPNAR</BIC>
      </FinInstnId>
   </FnlAgt>
```

```
        <ChrgBr>SHA</ChrgBr>
        <RmtInf>
          <Ustrd>PENSION PAYMENT OCTOBER 2005</Ustrd>
        </RmtInf>
      </PmtTx>
    </PmtInf>
    <PmtInf>
      <ReqdExctnDt>2005-10-06</ReqdExctnDt>
      <PmtMtdByFrstAgt>TRF</PmtMtdByFrstAgt>
      <CdtTrfTpId>
        <Cd>PENS</Cd>
      </CdtTrfTpId>
      <Dbtr>
        <Nm>PENSION FUND VITAPLUS</Nm>
        <PstlAdr>
          <StrtNm>BLVD DE LENTREPOT</StrtNm>
          <BldgNb>56</BldgNb>
          <PstCd>59000</PstCd>
          <TwnNm>LILLE</TwnNm>
          <Ctry>FR</Ctry>
        </PstlAdr>
      </Dbtr>
      <DbtrAcct>
        <Id>
          <DmstAcct>
            <Id>123456789</Id>
          </DmstAcct>
        </Id>
      </DbtrAcct>
      <FrstAgt>
        <FinInstnId>
          <BIC>AAAAFRPP</BIC>
        </FinInstnId>
      </FrstAgt>
      <PmtTx>
        <PmtId>
          <InstrId>PMSM002</InstrId>
          <EndToEndId>PEN/OCT/05/REF123456</EndToEndId>
        </PmtId>
        <Amt>
          <InstdAmt Ccy = "EUR">1785</InstdAmt>
        </Amt>
        <Cdtr>
          <Nm>ARTOIS</Nm>
          <PstlAdr>
            <StrtNm>AV DU PRESIDENT KENNEDY</StrtNm>
            <BldgNb>22</BldgNb>
            <PstCd>68050</PstCd>
            <TwnNm>MULHOUSE</TwnNm>
            <Ctry>FR</Ctry>
          </PstlAdr>
        </Cdtr>
```

```
        <CdtrAcct>
          <Id>
            <DmstAcct>
              <Id>98765</Id>
            </DmstAcct>
          </Id>
        </CdtrAcct>
        <FnlAgt>
          <FinInstnId>
            <BIC>CCCCFRPPMUL</BIC>
          </FinInstnId>
        </FnlAgt>
        <ChrgBr>SHA</ChrgBr>
        <RmtInf>
          <Ustrd>PENSION PAYMENT OCTOBER 2005</Ustrd>
        </RmtInf>
      </PmtTx>
    </PmtInf>
  </pain.001.001.01>
```


Business Example - 2

Narrative

Company Zendi ask its payments factory ZDI to make two payments. On 10 October, ZDI sends a CoreCreditTransferInitiation message to Zendi's account servicer, AAAAUS33.
The initiation contains two payment transactions to be paid to different creditors.
Payment transaction 1 is for account 987654 of creditor Artis at bank BBBBSGSG.
Payment transaction 2 is for creditor Sakamoto at bank CCCCJPJT. Bank CCCCJPJT needs to issue a cheque to Sakamoto.
Charges related to the execution of the payments will be shared between debtor and creditor.
The requested execution date is 12 October 2005.
Company Zendi would like to have an entry per transaction on its account 123123123. If transaction charges apply, they need to be booked to Zendi's charges account 456456456 serviced by AAAAUS33.
Corporate customers of AAAAUS33 do not group information from individual payment transactions, but include full details for each individual transaction.

Business Description

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
GroupIdentification	<GrpId>	ZEN001
CreationDateTime	<CredDtTm>	2005-10-10T16:10:00-05:00
BatchBooking	<BtchBookg>	false
Grouping	<Grpg>	false
InitiatingParty	<InitgPty>	
Name	<Nm>	ZDI
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	5TH AVENUE

BuildingNumber	<BldgNb>	567
PostCode	<PstCd>	10048
TownName	<TwnNm>	NEW YORK
CountrySubDivision	<CtrySubDvsn>	NY
Country	<Ctry>	US
PaymentInformation	**<PmtInf>**	
RequestedExecutionDate	<ReqdExctnDt>	2005-10-12
PaymentMethodByFirstAgent	<PmtMtdByFrstAgt>	TRF
Debtor	<Dbtr>	
Name	<Name>	ZENDI CO.
PostalAddress	<PstlAdr>	
AddressLine	<AdrLine>	IDS TOWER
StreetName	<StrtNm>	MARQUETTE AVENUE
BuildingNumber	<BldgNb>	654
PostCode	<PstCd>	55402
TownName	<TwnNm>	MINNEAPOLIS
CountrySubDivision	<CtrySubDvsn>	MN
Country	<Ctry>	US
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
DomesticAccount	<DmstAcct>	
Identification	<Id>	123123123
Type	<Tp>	CACC
FirstAgent	<FrstAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAAUS33
ChargesAccount	<ChrgsAcct>	
Identification	<Id>	
DomesticAccount	<DmstAcct>	456456456
PaymentTransaction	**<PmtTx>**	
PaymentIdentification	<PmtId>	
InstructionIdentification	<InstrId>	ZENDI-00001
EndToEndIdentification	<EndToEndId>	12345/98765
Amount	<Amt>	
InstructedAmount	<InstdAmt Ccy=USD>	7800
Creditor	<Cdtr>	
Name	<Nm>	ARTIS

PostalAddress	<PstlAdr>	
AddressLine	<AdrLine>	LAND TOWER 09-00
StreetName	<StrtNm>	RAFFLES PLACE
BuildingNumber	<BldgNb>	50
PostCode	<PstCd>	049320
TownName	<TwnNm>	SINGAPORE
Country	<Ctry>	SG
FinalAgent	<FnlAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBSGSG
ChargeBearer	<ChrgBr>	SHA
RemittanceInformationt	<RmtInf>	
Unstructured	<Ustrd>	INVOICES 7890/7891/7892
PaymentInformation	**<PmtInf>**	
RequestedExecutionDate	<ReqdExctnDt>	2005-10-12
PaymentMethodByFirstAgent	<PmtMtdByFrstAgt>	TRF
Debtor	<Dbtr>	
Name	<Name>	ZENDI CO.
PostalAddress	<PstlAdr>	
AddressLine	<AdrLine>	IDS TOWER
StreetName	<StrtNm>	MARQUETTE AVENUE
BuildingNumber	<BldgNb>	654
PostCode	<PstCd>	55402
TownName	<TwnNm>	MINNEAPOLIS
CountrySubDivision	<CtrySubDvsn>	MN
Country	<Ctry>	US
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
DomesticAccount	<DmstAcct>	
Identification	<Id>	123123123
Type	<Tp>	CACC
FirstAgent	<FrstAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAAUS33
ChargesAccount	<ChrgsAcct>	
Identification	<Id>	
DomesticAccount	<DmstAcct>	456456456

PaymentTransaction	**<PmtTx>**	
PaymentIdentification	<PmtId>	
InstructionIdentification	<InstrId>	ZENDI-00002
EndToEndIdentification	<EndToEndId>	NRTE876
Amount	<Amt>	
InstructedAmount	<InstdAmt Ccy=USD>	7865
Creditor	<Cdtr>	
Name	<Nm>	SAKAMOTO
PostalAddress	<PstlAdr>	
AddressLine	<AdrLine>	8-5 YAESU 2 CHOME
AddressLine	<AdrLine>	CHUO-KU
PostCode	<PstCd>	104-0028
TownName	<TwnNm>	TOKYO
Country	<Ctry>	JP
FinalAgent	<FnlAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	CCCCJPJT
ChargeBearer	<ChrgBr>	SHA
InstructionForFinalAgent	<InstrForFnlAgt>	
Code	<Cd>	CHQB

XML Instance


```
<pain.001.001.01>
  <GrpHdr>
    <GrpId>ZEN001</GrpId>
    <CreDtTm>2005-10-10T16:10:00-05:00</CreDtTm>
    <BtchBookg>false</BtchBookg>
    <Grpg>false</Grpg>
    <InitgPty>
      <Nm>ZDI</Nm>
      <PstlAdr>
        <StrtNm>5TH AVENUE</StrtNm>
        <BldgNb>567</BldgNb>
        <PstCd>10048</PstCd>
        <TwnNm>NEW YORK</TwnNm>
        <CtrySubDvsn>NY</CtrySubDvsn>
        <Ctry>US</Ctry>
      </PstlAdr>
    </InitgPty>
  </GrpHdr>
  <PmtInf>
    <ReqdExctnDt>2005-10-12</ReqdExctnDt>
```

```
<PmtMtdByFrstAgt>TRF</PmtMtdByFrstAgt>
<Dbtr>
   <Nm>ZENDI CO.</Nm>
   <PstlAdr>
      <AdrLine>IDS TOWER</AdrLine>
      <StrtNm>MARQUETTE AVENUE</StrtNm>
      <BldgNb>654</BldgNb>
      <PstCd>55402</PstCd>
      <TwnNm>MINNEAPOLIS</TwnNm>
      <CtrySubDvsn>MN</CtrySubDvsn>
      <Ctry>US</Ctry>
   </PstlAdr>
</Dbtr>
<DbtrAcct>
   <Id>
      <DmstAcct>
         <Id>123123123</Id>
      </DmstAcct>
   </Id>
   <Tp>CACC</Tp>
</DbtrAcct>
<FrstAgt>
   <FinInstnId>
      <BIC>AAAAUS33</BIC>
   </FinInstnId>
</FrstAgt>
<ChrgsAcct>
   <Id>
      <DmstAcct>
         <Id>456456456</Id>
      </DmstAcct>
   </Id>
</ChrgsAcct>
<PmtTx>
   <PmtId>
      <InstrId>ZENDI-00001</InstrId>
      <EndToEndId>12345/98765</EndToEndId>
   </PmtId>
   <Amt>
      <InstdAmt Ccy = "USD">7800</InstdAmt>
   </Amt>
   <Cdtr>
      <Nm>ARTIS</Nm>
      <PstlAdr>
         <AdrLine>LAND TOWER 09-00</AdrLine>
         <StrtNm>RAFFLES PLACE</StrtNm>
         <BldgNb>50</BldgNb>
         <PstCd>049320</PstCd>
         <TwnNm>SINGAPORE</TwnNm>
         <Ctry>SG</Ctry>
      </PstlAdr>
   </Cdtr>
```

```
        <CdtrAcct>
          <Id>
            <DmstAcct>
              <Id>987654</Id>
            </DmstAcct>
          </Id>
        </CdtrAcct>
        <FnlAgt>
          <FinInstnId>
            <BIC>BBBBSGSG</BIC>
          </FinInstnId>
        </FnlAgt>
        <ChrgBr>SHA</ChrgBr>
        <RmtInf>
          <Ustrd>INVOICES 7890/7891/7892</Ustrd>
        </RmtInf>
      </PmtTx>
    </PmtInf>
    <PmtInf>
      <ReqdExctnDt>2005-10-12</ReqdExctnDt>
      <PmtMtdByFrstAgt>TRF</PmtMtdByFrstAgt>
      <Dbtr>
        <Nm>ZENDI CO.</Nm>
        <PstlAdr>
          <AdrLine>IDS TOWER</AdrLine>
          <StrtNm>MARQUETTE AVENUE</StrtNm>
          <BldgNb>654</BldgNb>
          <PstCd>55402</PstCd>
          <TwnNm>MINNEAPOLIS</TwnNm>
          <CtrySubDvsn>MN</CtrySubDvsn>
          <Ctry>US</Ctry>
        </PstlAdr>
      </Dbtr>
      <DbtrAcct>
        <Id>
          <DmstAcct>
            <Id>123123123</Id>
          </DmstAcct>
        </Id>
        <Tp>CACC</Tp>
      </DbtrAcct>
      <FrstAgt>
        <FinInstnId>
          <BIC>AAAAUS33</BIC>
        </FinInstnId>
      </FrstAgt>
      <ChrgsAcct>
        <Id>
          <DmstAcct>
            <Id>456456456</Id>
          </DmstAcct>
        </Id>
```

```
        </ChrgsAcct>
        <PmtTx>
          <PmtId>
            <InstrId>ZENDI-00002</InstrId>
            <EndToEndId>NRTE876</EndToEndId>
          </PmtId>
          <Amt>
            <InstdAmt Ccy = "USD">7865</InstdAmt>
          </Amt>
          <Cdtr>
            <Nm>SAKAMOTO</Nm>
            <PstlAdr>
              <AdrLine>8-5 YAESU 2 CHOME</AdrLine>
              <AdrLine>CHUO-KU</AdrLine>
              <PstCd>104-0028</PstCd>
              <TwnNm>TOKYO</TwnNm>
              <Ctry>JP</Ctry>
            </PstlAdr>
          </Cdtr>
          <FnlAgt>
            <FinInstnId>
              <BIC>CCCCJPJT</BIC>
            </FinInstnId>
          </FnlAgt>
          <ChrgBr>SHA</ChrgBr>
          <InstrForFnlAgt>
            <Cd>CHQB</Cd>
          </InstrForFnlAgt>
        </PmtTx>
      </PmtInf>
    </pain.001.001.01>
```

Message: EUSTPCreditTransferInitiation <pain.001.003.01>

Message Scope and Usage

Scope

The EU-STPCreditTransferInitiation message is sent by the initiating party to the forwarding agent or first agent.
This message is used to request movement of cash from a debtor's account to a creditor.

Usage

The EU-STPCreditTransferInitiation message can contain:
- one or more instances of a credit transfer initiation,
- payment transactions that result in book transfers at the first agent or payments to another financial institution,
- payment transactions that result in an electronic cash transfer to the creditor's account only.

The message can be used in a direct or a relay scenario. In a direct scenario, the initiating party sends the EU-STPCreditTransferInitiation message directly to the first agent, which is the account servicer of the debtor. In a relay scenario, the initiating party sends the EU-STPCreditTransferInitiation message to a forwarding agent, which acts as a concentrating financial institution. It will forward the EU-STPCreditTransferInitiation message to the first agent.
The EU-STPCreditTransferInitiation message can be used in domestic and euro-domestic scenarios.
The message can be used to group payments (in this case, the PaymentInformation component is present once) or can be used as a collection of individual payments (in this case the PaymentInformation component is present once per occurrence of PaymentTransaction component).

Main Characteristics

The EU-STPCreditTransferInitiation message has the following main characteristics:

Batch or single entry indication

The InitiatingParty can indicate whether it wants to have all transactions present in the EU-STPCreditTransferInitiation message booked as one entry or as individual entries on the Debtor's account.

Codes to identify agents

Agents included in the payment initiation are identified by BIC only.

International Bank Account Number (IBAN)

The IBAN is the only account identifier that can be used to identify the Creditor's account.

Remittance information

The EU-STPCreditTransferInitiation message can include basic remittance information. The remittance information component may only be present once. It also contains reference fields that can be used to refer to remittance information sent separately from the payment transaction.

Outline

The EU-STPCreditTransferInitiation message is composed of three main building blocks.

A. GroupHeader

This building block is mandatory. It contains elements such as a GroupIdentification and CreationDateTime.

B. PaymentInformation

This building block is mandatory and repetitive. It contains elements related to the debit side of the transaction. These elements include Debtor, DebtorAccountInformation and PaymentMethod. If there is an agreement between the InitiatingParty and the receiving agent to include the payment information details related to the debit side of the transaction only once, this block is only present once. If there is an agreement between the InitiatingParty and the receiving agent to repeat the debit information details for each transaction, this building block is present once per occurrence of the PaymentTransaction block.

C. PaymentTransaction

This building block is mandatory and repetitive. It contains elements related to the credit side of the transaction. These elements include Creditor, CreditorAccountInformation and references for the transaction.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		GroupIdentification	<GrpId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]	Text	
1.4		ControlSum	<CtrlSum>	[0..1]	Quantity	
1.5		BatchBooking	<BtchBookg>	[0..1]	Indicator	
1.6		NumberOfTransactions	<NbOfTxs>	[0..1]	Text	
1.7		Grouping	<Grpg>	[0..1]	Indicator	
1.8		InitiatingParty	<InitgPty>	[1..1]		
1.9		Name	<Nm>	[0..1]	Text	
1.10		PostalAddress	<PstlAdr>	[0..1]	+	
1.11		Identification	<Id>	[0..1]		
1.12	{Or	OrganisationIdentification	<OrgId>	[1..1]		
1.13		BEI	<BEI>	[0..1]	Identifier	
1.14		EANGLN	<EANGLN>	[0..1]	Identifier	
1.15		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
1.16		DUNS	<DUNS>	[0..1]	Identifier	
1.17		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
1.18		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
1.19		ProprietaryIdentification	<PrtryId>	[0..1]	+	
1.20	Or}	PrivateIdentification	<PrvtId>	[1..2]		
1.21	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
1.22	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.23	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
1.24	Or	PassportNumber	<PsptNb>	[1..1]	Text	
1.25	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
1.26	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
1.27	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
1.28	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
1.29		Issuer	<Issr>	[0..1]	Text	
1.30		ForwardingAgent	<FwdgAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		PaymentInformation	<PmtInf>	[1..n]		
2.1		RequestedExecutionDate	<ReqdExctnDt>	[1..1]	DateTime	
2.2		CreditTransferTypeIdentification	<CdtTrfTpId>	[0..1]		
2.3	{Or	Code	<Cd>	[0..1]	Code	
2.4	Or}	LocalInstrument	<LclInstrm>	[0..1]	Text	
2.5		InstructionPriority	<InstrPrty>	[0..1]	Code	
2.6		SettlementPriority	<SttlmPrty>	[0..1]		
2.7	{Or	Priority	<Prty>	[1..1]	Code	
2.8	Or}	PaymentScheme	<PmtSchme>	[1..1]		
2.9	{{Or	Code	<Cd>	[1..1]	Code	
2.10	Or}}	ProprietaryInformation	<PrtryInf>	[1..1]	Text	
2.11		Debtor	<Dbtr>	[0..1]		
2.12		Name	<Nm>	[0..1]	Text	
2.13		PostalAddress	<PstlAdr>	[0..1]	+	
2.14		Identification	<Id>	[0..1]		
2.15	{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.16		BEI	<BEI>	[0..1]	Identifier	
2.17		EANGLN	<EANGLN>	[0..1]	Identifier	
2.18		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.19		DUNS	<DUNS>	[0..1]	Identifier	
2.20		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.21		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.22		ProprietaryIdentification	<PrtryId>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.23	Or}	PrivateIdentification	<PrvtId>	[1..2]		
2.24	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.25	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.26	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.27	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.28	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.29	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.30	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.31	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
2.32		Issuer	<Issr>	[0..1]	Text	
2.33		DebtorCountryOfResidence	<DbtrCtryOfRes>	[0..1]	Code	
2.34		DebtorAccount	<DbtrAcct>	[1..1]		
2.35		Identification	<Id>	[1..1]	+	
2.36		Type	<Tp>	[0 ..1]	Code	
2.37		Currency	<Ccy>	[0..1]	Code	
2.38		Name	<Nm>	[0..1]	Text	
2.39		FirstAgent	<FrstAgt>	[1..1]	+	
2.40		ChargesAccount	<ChrgsAcct>	[0..1]		
2.41		Identification	<Id>	[1..1]	+	
2.42		Type	<Tp>	[0 ..1]	Code	
2.43		Currency	<Ccy>	[0..1]	Code	
2.44		Name	<Nm>	[0..1]	Text	
2.45		ChargesAccountAgent	<ChrgsAcctAgt>	[0..1]	+	
2.46		PaymentTransaction	<PmtTx>	[1..n]		
2.47		PaymentIdentification	<PmtId>	[1..1]		
2.48		InstructionIdentification	<InstrId>	[0..1]	Text	
2.49		EndToEndIdentification	<EndToEndId>	[1..1]	Text	
2.50		PaymentRemittanceIdentification	<PmtRmtId>	[0..1]	Text	
2.51		Purpose	<Purp>	[1..1]		
2.52	{Or	Proprietary	<Prtry>	[1..1]	Text	
2.53	Or}	Code	<Cd>	[1..1]	Code	
2.54		Amount	<Amt>	[1..1]		
2.55	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount	
2.56	Or}	EquivalentAmount	<EqvtAmt>	[1..1]		
2.57		Amount	<Amt>	[1..1]	Amount	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.58		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code	
2.59		Creditor	<Cdtr>	[0..1]		
2.60		Name	<Nm>	[0..1]	Text	
2.61		PostalAddress	<PstlAdr>	[0..1]	+	
2.62		Identification	<Id>	[0..1]		
2.63	{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.64		BEI	<BEI>	[0..1]	Identifier	
2.65		EANGLN	<EANGLN>	[0..1]	Identifier	
2.66		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.67		DUNS	<DUNS>	[0..1]	Identifier	
2.68		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.69		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.70		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.71	Or}	PrivateIdentification	<PrvtId>	[1..2]		
2.72	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.73	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.74	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.75	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.76	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.77	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.78	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.79	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
2.80		Issuer	<Issr>	[0..1]	Text	
2.81		CreditorCountryOfResidence	<CdtrCtryOfRes>	[0..1]	Code	
2.82		FinalAgent	<FnlAgt>	[1..1]	+	
2.83		ChargeBearer	<ChrgBr>	[1..1]	Code	
2.84		CreditorAccount	<CdtrAcct>	[1..1]		
2.85		IBAN	<IBAN>	[1..1]	Identifier	
2.86		ExchangeContractReference	<XchgCtrctRef>	[0..1]	Text	
2.87		RemittanceInformation	<RmtInf>	[0..1]		
2.88	{Or	Unstructured	<Ustrd>	[1..1]	Text	
2.89	Or}	Structured	<Strd>	[1..1]		
2.90		ReferredDocumentType	<RfrdDocTp>	[0..1]	Code	
2.91		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime	
2.92		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.93	{{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount	
2.94	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount	
2.95	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount	
2.96	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount	
2.97	Or}}	TaxAmount	<TaxAmt>	[1..1]	Amount	
2.98		DocumentReferenceNumber	<DocRefNb>	[0..1]	Text	
2.99		CreditorReference	<CdtrRef>	[0..1]	Text	
2.100		Invoicer	<Invcr>	[0..1]		
2.101		Name	<Nm>	[0..1]	Text	
2.102		PostalAddress	<PstlAdr>	[0..1]	+	
2.103		Identification	<Id>	[0..1]		
2.104	{{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.105		BEI	<BEI>	[0..1]	Identifier	
2.106		EANGLN	<EANGLN>	[0..1]	Identifier	
2.107		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.108		DUNS	<DUNS>	[0..1]	Identifier	
2.109		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.110		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.111		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.112	Or}}	PrivateIdentification	<PrvtId>	[1..2]		
2.113	{{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.114	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.115	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.116	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.117	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.118	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.119	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.120	Or}}}	OtherIdentification	<OthrId>	[1..1]	+	
2.121		Issuer	<Issr>	[0..1]	Text	
2.122		Invoicee	<Invcee>	[0..1]		
2.123		Name	<Nm>	[0..1]	Text	
2.124		PostalAddress	<PstlAdr>	[0..1]	+	
2.125		Identification	<Id>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.126	{{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.127		BEI	<BEI>	[0..1]	Identifier	
2.128		EANGLN	<EANGLN>	[0..1]	Identifier	
2.129		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.130		DUNS	<DUNS>	[0..1]	Identifier	
2.131		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.132		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.133		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.134	Or}}	PrivateIdentification	<PrvtId>	[1..2]		
2.135	{{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.136	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.137	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.138	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.139	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.140	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.141	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.142	Or}}}	OtherIdentification	<OthrId>	[1..1]	+	
2.143		Issuer	<Issr>	[0..1]	Text	

Message Items Description

*The following section identifies the elements of the **EUSTPCreditTransferInitiation** message.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual payment transactions included in the payment initiation.

Type: *The **GroupHeader** block is composed of the following **GroupInformation2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		GroupIdentification	<GrpId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	Text
1.4		ControlSum	<CtrlSum>	[0..1]	Quantity
1.5		BatchBooking	<BtchBookg>	[0..1]	Indicator
1.6		NumberOfTransactions	<NbOfTxs>	[0..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.7		Grouping	<Grpg>	[0..1]	Indicator
1.8		InitiatingParty	<InitgPty>	[1..1]	
1.30		ForwardingAgent	<FwdgAgt>	[0..1]	+

1.1 GroupIdentification <GrpId>

Presence: [1..1]

Definition: Reference assigned by a sending party to unambiguously identify the group of individual transfers being sent.

Usage: this reference is used between initiating party and forwarding/first agent to refer to the group of instructions sent. It can be used in status messages/statements/advices between initiation party and forwarding/first agent.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the credit transfer initiation was created by the initiating party.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user oriented key that allows to check if the initiating party is allowed to pay from the account specified in the initiation.

Usage: the content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios or payment initiations that are initiated on behalf of a different party than the initiating party.

Data Type: Max128Text

Format: maxLength: 128
minLength: 1

1.4 ControlSum <CtrlSum>

Presence: [0..1]

Definition: Total of all the individual instructed amounts included in the payment initiation.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

1.5 BatchBooking <BtchBookg>

Presence: [0..1]

Definition: Indicates that the initiating party requests a batch entry for the sum of the amounts of all transactions included in the payment initiation.

Data Type: *One of the following **BatchBookingIndicator** values must be used:*
MeaningWhenTrue: Identifies that the initiating party requests a batch entry for the sum of the amounts of all transactions in the initiation.
MeaningWhenFalse: Identifies that the initiating party requests a single entry for each of the transactions in the initiation.

1.6 NumberOfTransactions <NbOfTxs>

Presence: [0..1]

Definition: Number of individual transactions contained in the payment initiation, ie, the number of occurrences of payment transaction.

Data Type: Max15NumericText

Format: [0-9]{1,15}

1.7 Grouping <Grpg>

Presence: [0..1]

Definition: Indicates that the common debit information in the transaction is included once and not repeated for each transaction.

Data Type: *One of the following **GroupingIndicator** values must be used:*
MeaningWhenTrue: Indicates that there is only one occurrence of the PaymentInformation block and several occurrences of the PaymentTransaction block.
MeaningWhenFalse: Indicates that there is the same number of occurrences of the PaymentInformation block and of the PaymentTransaction block.

1.8 InitiatingParty <InitgPty>

Presence: [1..1]

Definition: Party initiating the payment to an agent. In the payment context, this can either be the debtor (in a credit transfer), the creditor (in a direct debit), or a party that initiates the payment on behalf of the debtor or creditor. In the context of treasury, the party that instructs the trading party to execute a treasury deal on its behalf.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.9		Name	<Nm>	[0..1]	Text
1.10		PostalAddress	<PstlAdr>	[0..1]	+
1.11		Identification	<Id>	[0..1]	

1.9 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

1.10 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

1.11 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.12	{Or	OrganisationIdentification	<OrgId>	[1..1]	
1.20	Or}	PrivateIdentification	<PrvtId>	[1..2]	

1.12 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **1.11** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.13		BEI	<BEI>	[0..1]	Identifier
1.14		EANGLN	<EANGLN>	[0..1]	Identifier
1.15		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
1.16		DUNS	<DUNS>	[0..1]	Identifier
1.17		BankPartyIdentification	<BkPtyId>	[0..1]	Text
1.18		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.19		ProprietaryIdentification	<PrtryId>	[0..1]	+

1.13 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

1.14 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

1.15 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

1.16 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

1.17 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.18 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.19 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

1.20 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **1.11** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.21	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
1.22	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
1.23	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
1.24	Or	PassportNumber	<PsptNb>	[1..1]	Text
1.25	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
1.26	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
1.27	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
1.28	Or}	OtherIdentification	<OthrId>	[1..1]	+
1.29		Issuer	<Issr>	[0..1]	Text

1.21 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)

Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.22 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.23 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.24 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.25 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.26 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]

*This message item is part of choice **1.20** PrivateIdentification.*

Definition: Number assigned by a national authority to an identity card.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.27 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)

Presence: [1..1]

*This message item is part of choice **1.20** PrivateIdentification.*

Definition: Number assigned to an employer by a registration authority.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.28 OtherIdentification <OthrId>

Presence: [1..1]

*This message item is part of choice **1.20** PrivateIdentification.*

Definition: Identifier issued to a person for which no specific identifier has been defined.

Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

1.29 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identifier.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.30 ForwardingAgent <FwdgAgt>

Presence: [0..1]

Definition: Financial Institution that receives the payment instruction from the initiating party and forwards it to the first agent in the payment chain.

Type: *This message item is composed of the following **BICIdentification1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	BIC	<BIC>	[1..1]	Identifier

For additional Type information, please refer to BICIdentification1 p.280 in 'Message Item Types' section

2.0 PaymentInformation <PmtInf>

Presence: [1..n]

Definition: Set of characteristics that applies to the debit side of the payment transactions included in the payment initiation.

Type: *The **PaymentInformation** block is composed of the following **PaymentInformation7** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		RequestedExecutionDate	<ReqdExctnDt>	[1..1]	DateTime
2.2		CreditTransferTypeIdentification	<CdtTrfTpId>	[0..1]	
2.11		Debtor	<Dbtr>	[0..1]	
2.33		DebtorCountryOfResidence	<DbtrCtryOfRes>	[0..1]	Code
2.34		DebtorAccount	<DbtrAcct>	[1..1]	
2.39		FirstAgent	<FrstAgt>	[1..1]	+
2.40		ChargesAccount	<ChrgsAcct>	[0..1]	
2.45		ChargesAccountAgent	<ChrgsAcctAgt>	[0..1]	+
2.46		PaymentTransaction	<PmtTx>	[1..n]	

Rule(s): ChargesAccountAgentRule
If ChargesAccountAgent is present, it must contain a branch of the FirstAgent. It must not contain a completely different financial institution.

ChargesAccountRule
If ChargesAccountAgent is present, then ChargesAccount is mandatory.
If ChargesAccountAgent is not present, then ChargesAccount is optional.

2.1 RequestedExecutionDate <ReqdExctnDt>

Presence: [1..1]

Definition: Date at which the initiating party requests that the payment instruction be processed.

Usage: This is the date on which the debtor's account(s) is (are) to be debited.

Data Type: ISODate

2.2 CreditTransferTypeIdentification <CdtTrfTpId>

Presence: [0..1]

Definition: Set of elements that further identifes the type of credit transfer being requested by the initiating party.

Type: *This message item is composed of the following **CreditTransferTypeIdentification** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.3	{Or	Code	<Cd>	[0..1]	Code
2.4	Or}	LocalInstrument	<LclInstrm>	[0..1]	Text
2.5		InstructionPriority	<InstrPrty>	[0..1]	Code
2.6		SettlementPriority	<SttlmPrty>	[0..1]	

2.3 Code <Cd>

Presence: [0..1]
*This message item is part of choice **2.2** CreditTransferTypeIdentification.*
Definition: Type of transaction that resulted in the payment initiation in coded form.
Data Type: Code
*When this message item is present, one of the following **CreditTransferType2Code** values must be used:*

Code	Name	Definition
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CORT	TradeSettlementPayment	Transaction is related to settlement of a trade, eg a foreign exchange deal or a securities transaction.
DIVI	Dividend	Transaction is the payment of dividends.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to the payment of a hedging operation.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is the payment of interest.
LOAN	Loan	Transaction is related to the transfer of a loan to a borrower.
PENS	PensionPayment	Transaction is the payment of pension.
SALA	SalaryPayment	Transaction is the payment of salaries.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes.
TRAD	Trade	Transaction is related to the payment of a trade transaction.
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.

2.4 LocalInstrument <LclInstrm>

Presence: [0..1]
*This message item is part of choice **2.2** CreditTransferTypeIdentification.*
Definition: Credit transfer type that is specific to a user community and is required for use within that user community.

Usage : When available, codes provided by local authorities should be used in the Max35Text format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.5 InstructionPriority <InstrPrty>

Presence: [0..1]

Definition: Urgency or order of importance that the originator would like the recipient of the payment instruction to apply to the processing of the payment instruction.
Usage: This priority relates to queue processing and queue management by forwarding or first agent.

Data Type: Code

*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.6 SettlementPriority <SttlmPrty>

Presence: [0..1]

Definition: Priority with which or the system through which the agents in the payment chain will clear and settle the payment transaction.

Type: *This message item is composed of one of the following **SettlementPriorityChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.7	{Or	Priority	<Prty>	[1..1]	Code
2.8	Or}	PaymentScheme	<PmtSchme>	[1..1]	

2.7 Priority <Prty>

Presence: [1..1]

*This message item is part of choice **2.6** SettlementPriority.*

Definition: Priority with which all agents in the payment chain must clear and settle the payment transaction

Data Type: Code

*One of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.8 PaymentScheme <PmtSchme>

Presence: [1..1]

*This message item is part of choice **2.6** SettlementPriority.*

Definition: Pre-agreed offering between clearing agents, or the channel through which the payment instruction is to be processed. This payment scheme can point to a specific rulebook governing the rules of clearing and settlement between two parties.

Type: *This message item is composed of one of the following **PaymentSchemeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.9	{Or	Code	<Cd>	[1..1]	Code
2.10	Or}	ProprietaryInformation	<PrtryInf>	[1..1]	Text

2.9 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.8** PaymentScheme.*
Definition: Specifies the channel through which the payment instruction is to be processed in coded form.
Data Type: Code
*One of the following **CashClearingSystem2Code** values must be used:*

Code	Name	Definition
ACH	ACH	Automated Clearing House. Payment system that clears cash transfers and settles the proceeds in a lump sum, usually on a multilateral netting basis.
CHI	CHIPS	CHIPS is the Clearing House Interbank Payment System.
FDN	FedNet	FedNet is a link to a Federal Bank account via the internet. FedNet enables checking of account balance, transactions, take print outs of account statement, transfer funds to third party accounts, E-shopping, BSNL Payments, Deposit opening, Deposit Renewal, Request for Demand Draft, Cheque Book etc.
RTG	RTGS	Real Time Gross Settlement System. Payment system that simultaneously clears individual transfers and settles them in central bank money.

2.10 ProprietaryInformation <PrtryInf>

Presence: [1..1]
*This message item is part of choice **2.8** PaymentScheme.*
Definition: Channel that is specific to a user community and is required for use within that user community.

Usage : if the channel is included in the list of codes provided for the payment scheme, the code element should be used instead of the proprietary element.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.11 Debtor <Dbtr>

Presence: [0..1]
Definition: Party that owes an amount of money to the creditor. In the context of the payment model, the debtor is also the debit account owner.

Usage : If required for legal reasons, this element must be present.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.12		Name	<Nm>	[0..1]	Text
2.13		PostalAddress	<PstlAdr>	[0..1]	+

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.14		Identification	<Id>	[0..1]	

2.12 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.13 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.14 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.15	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.23	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.15 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.14** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.

Type: *This message item is composed of the following* ***NonFinancialInstitutionIdentification1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.16		BEI	<BEI>	[0..1]	Identifier
2.17		EANGLN	<EANGLN>	[0..1]	Identifier
2.18		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.19		DUNS	<DUNS>	[0..1]	Identifier
2.20		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.21		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.22		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.16 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.17 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.18 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.19 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.20 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.21 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.22 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.

Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.23 PrivateIdentification <PrvtId>

Presence: [1..2]

*This message item is part of choice **2.14** Identification.*

Definition: Unique and unambiguous identification of a person, eg, passport.

Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.24	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.25	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.26	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.27	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.28	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.29	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.30	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.31	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.32		Issuer	<Issr>	[0..1]	Text

2.24 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.25 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.26 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.27 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.28 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.29 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.30 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.31 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.32 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.33 DebtorCountryOfResidence <DbtrCtryOfRes>

Presence: [0..1]

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

2.34 DebtorAccount <DbtrAcct>

Presence: [1..1]

Definition: Identification of the account of the debtor to which a debit entry will be made to execute the transfer.

Type: *This message item is composed of the following **CashAccount3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.35		Identification	<Id>	[1..1]	+
2.36		Type	<Tp>	[0 ..1]	Code
2.37		Currency	<Ccy>	[0..1]	Code
2.38		Name	<Nm>	[0..1]	Text

2.35 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.

Type: *This message item is composed of one of the following **AccountIdentification1Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier
Or}	DomesticAccount	<DmstAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification1Choice p.278 in 'Message Item Types' section

2.36 Type <Tp>

Presence: [0 ..1]

Definition: Nature, or use, of the account.

Data Type: Code

*When this message item is present, one of the following **CashAccountType3Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SVGS	Savings	Account used for savings.

2.37 Currency <Ccy>

Presence: [0..1]

Definition: Identification of the currency in which the debtor's account is held.

Usage: Currency should only be used in case one and the same debtor's account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

2.38 Name <Nm>

Presence: [0..1]

Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.39 FirstAgent <FrstAgt>

Presence: [1..1]

Definition: Financial institution that receives the payment transaction from the account owner or other authorised party, and processes the instruction.

Usage : in a credit transfer context, the first agent is the account servicer of the debtor. In a direct debit context, the first agent is the account servicer of the creditor.

Type: *This message item is composed of the following **BICIdentification1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	BIC	<BIC>	[1..1]	Identifier

For additional Type information, please refer to BICIdentification1 p.280 in 'Message Item Types' section

2.40 ChargesAccount <ChrgsAcct>

Presence: [0..1]
Definition: Account used to process charges associated with a transaction.

Usage : charges account should be used when charges have to be booked to an account different from the account identified in debtor's account.

Type: *This message item is composed of the following **CashAccount3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.41		Identification	<Id>	[1..1]	+
2.42		Type	<Tp>	[0 ..1]	Code
2.43		Currency	<Ccy>	[0..1]	Code
2.44		Name	<Nm>	[0..1]	Text

2.41 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following **AccountIdentification1Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier
Or}	DomesticAccount	<DmstAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification1Choice p.278 in 'Message Item Types' section

2.42 Type <Tp>

Presence: [0 ..1]
Definition: Nature, or use, of the account.
Data Type: Code
*When this message item is present, one of the following **CashAccountType3Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.

Code	Name	Definition
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SVGS	Savings	Account used for savings.

2.43 Currency <Ccy>

Presence: [0..1]
Definition: Identification of the currency in which the debtor's account is held.

Usage: Currency should only be used in case one and the same debtor's account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

2.44 Name <Nm>

Presence: [0..1]
Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.45 ChargesAccountAgent <ChrgsAcctAgt>

Presence: [0..1]
Definition: Agent that services a charges account.

Usage : charges account agent should only be used when the charges account agent is different from the first agent.

Type: *This message item is composed of the following **BICIdentification1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	BIC	<BIC>	[1..1]	Identifier

For additional Type information, please refer to BICIdentification1 p.280 in 'Message Item Types' section

2.46 PaymentTransaction <PmtTx>

Presence: [1..n]
Definition: Payment processes required to transfer cash from the debtor to the creditor.

Type: *This message item is composed of the following **GenericPaymentTransaction2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.47		PaymentIdentification	<PmtId>	[1..1]	
2.51		Purpose	<Purp>	[1..1]	
2.54		Amount	<Amt>	[1..1]	
2.59		Creditor	<Cdtr>	[0..1]	
2.81		CreditorCountryOfResidence	<CdtrCtryOfRes>	[0..1]	Code
2.82		FinalAgent	<FnlAgt>	[1..1]	+
2.83		ChargeBearer	<ChrgBr>	[1..1]	Code
2.84		CreditorAccount	<CdtrAcct>	[1..1]	
2.86		ExchangeContractReference	<XchgCtrctRef>	[0..1]	Text
2.87		RemittanceInformation	<RmtInf>	[0..1]	

2.47 PaymentIdentification <PmtId>

Presence: [1..1]

Definition: Set of elements used to provide further means of referencing a payment transaction.

Type: *This message item is composed of the following **PaymentIdentification** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.48		InstructionIdentification	<InstrId>	[0..1]	Text
2.49		EndToEndIdentification	<EndToEndId>	[1..1]	Text
2.50		PaymentRemittanceIdentification	<PmtRmtId>	[0..1]	Text

2.48 InstructionIdentification <InstrId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for a payment instruction assigned by the initiating party.

Usage: the instruction identification can be used between the initiating party and the receiving agent to refer to the individual instruction. It can be used in several messages, eg, status messages, debit advices or account statement messages.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.49 EndToEndIdentification <EndToEndId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a payment transaction, as assigned by any of the parties on the initiating side, that will be passed on throughout the entire end-to-end chain.

Usage: the end-to-end identification can be used for reconciliation or to link tasks relating to the payment transaction and can be included in several related messages to the payment transaction between forwarding or first agent and debtor or initiating party, and between final agent and creditor.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.50 PaymentRemittanceIdentification <PmtRmtId>

Presence: [0..1]

Definition: Unique and unambiguous identification of remittance information which is sent separately from the payment initiation information.

Usage: the payment remittance identification is used to link separately sent remittance information to the payment transaction information included in the payment initiation.

If the business context requires the use of a creditor's reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.51 Purpose <Purp>

Presence: [1..1]

Definition: Underlying reason for the payment transaction, eg, a charity payment, or a commercial agreement between the creditor and the debtor.

Usage: purpose is used by the end-customers, ie originating party, initiating party, debtor, creditor, final party, to provide information concerning the nature of the payment transaction. Purpose is a content element, which is not used for processing by any of the agents involved in the payment chain.

Type: *This message item is composed of one of the following* ***PurposeChoice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.52	{Or	Proprietary	<Prtry>	[1..1]	Text
2.53	Or}	Code	<Cd>	[1..1]	Code

2.52 Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice ***2.51*** *Purpose.*

Definition: Payment transaction purpose that is specific to a user community and is required for use within that user community.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.53 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.51** Purpose.*
Definition: Specifies the type of transaction that resulted in the payment initiation in coded form
Data Type: Code
*One of the following **PaymentPurpose1Code** values must be used:*

Code	Name	Definition
ADVA	AdvancePayment	Transaction is an advance payment.
AGRT	AgriculturalTransfer	Transaction is related to the agricultural domain.
ALMY	AlimonyPayment	Transaction is the payment of alimony.
BECH	ChildBenefit	Transaction is related to a payment made to assist parent/ guardian to maintain child.
BENE	UnemploymentDisabilityBenefit	Transaction is related to a payment to a person who is unemployed/disabled.
BONU	BonusPayment.	Transaction is related to payment of a bonus.
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CBFF	CapitalBuilding	Transaction is related to capital building fringe fortune, ie capital building for retirement.
CHAR	CharityPayment	Transaction is a payment for charity reasons.
CMDT	CommodityTransfer	Transaction is payment of commodities.
COLL	CollectionPayment	Collection of funds initiated via a credit transfer.
COMC	CommercialCredit	Transaction is payment of commercial credit.
COMM	Commission	Transaction is payment of commission.
COMT	ConsumerThirdPartyConsolidatedPayment	Payment used by a third party who can collect funds to pay on behalf of consumers, ie credit counseling or bill payment companies.
COST	Costs	Transaction is related to payment of costs.
CPYR	Copyright	Transaction is payment of copyright.
DBTC	DebitCollectionPayment	Collection of funds initiated via a debit transfer.
DIVI	Dividend	Transaction is payment of dividends.
FREX	ForeignExchange	Transaction is related to a foreign exchange operation.
GDDS	PurchaseSaleOfGoods	Transaction is related to purchase and sale of goods.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to a hedging operation.
IHRP	InstalmentHirePurchaseAgreement	Transaction is payment for an installment/hire-purchase agreement.
INSU	InsurancePremium	Transaction is payment of an insurance premium.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.

Code	Name	Definition
INTE	Interest	Transaction is payment of interest.
LICF	LicenseFee	Transaction is payment of a license fee.
LOAN	Loan	Transaction is related to transfer of loan to borrower.
LOAR	LoanRepayment	Transaction is related to repayment of loan to lender.
NETT	Netting	Transaction is related to a netting operation.
PAYR	Payroll	Transaction is related to the payment of payroll.
PENS	PensionPayment	Transaction is the payment of pension.
REFU	Refund	Transaction is the payment of a refund.
RENT	Rent	Transaction is the payment of rent.
ROYA	Royalties	Transaction is the payment of royalties.
SALA	SalaryPayment	Transaction is the payment of salaries.
SCVE	PurchaseSaleOfServices	Transaction is related to purchase and sale of services.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUBS	Subscription	Transaction is the payment of a subscription.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.

2.54 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between the debtor and creditor, before charges.

Type: *This message item is composed of one of the following* ***AmountType1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.55	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount
2.56	Or}	EquivalentAmount	<EqvtAmt>	[1..1]	

2.55 InstructedAmount <InstdAmt>

Presence: [1..1]

This message item is part of choice ***2.54*** *Amount.*

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account or in another currency..

Usage : Currency of the amount is expressed in the currency (or one of the currencies) of the debtor's account or another currency, eg, pay 1000000 EUR (and debtor's account is is EUR) or pay 1000000 JPY (and debtor's account is in EUR).

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.56 EquivalentAmount <EqvtAmt>

Presence: [1..1]

This message item is part of choice ***2.54*** *Amount.*

Definition: Amount of money to be transferred between the debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred into a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Type: *This message item is composed of the following* ***EquivalentAmount*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.57		Amount	<Amt>	[1..1]	Amount
2.58		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code

2.57 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred in a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.58 CurrencyOfTransfer <CcyOfTrf>

Presence: [1..1]

Definition: Specifies the currency of the to be transferred amount, which is different from the currency of the debtor's account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

2.59 Creditor <Cdtr>

Presence: [0..1]

Definition: Party that receives an amount of money from the debtor. In the context of the payment model, the creditor is also the credit account owner.

Usage : creditor must always be present, unless local regulations stipulate otherwise.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.60		Name	<Nm>	[0..1]	Text
2.61		PostalAddress	<PstlAdr>	[0..1]	+
2.62		Identification	<Id>	[0..1]	

2.60 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.61 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.62 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.63	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.71	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.63 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.62** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.64		BEI	<BEI>	[0..1]	Identifier
2.65		EANGLN	<EANGLN>	[0..1]	Identifier
2.66		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.67		DUNS	<DUNS>	[0..1]	Identifier
2.68		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.69		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.70		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.64 BEI <BEI>

Presence: [0..1]
Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).
Data Type: BEIIdentifier
Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s): BEI

Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.65 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.66 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.67 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.68 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.69 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.70 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.71 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **2.62** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.72	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.73	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.74	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.75	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.76	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.77	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.78	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.79	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.80		Issuer	<Issr>	[0..1]	Text

2.72 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.73 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.74 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.75 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.76 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.77 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.78 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35

minLength: 1

2.79 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.80 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.81 CreditorCountryOfResidence <CdtrCtryOfRes>

Presence: [0..1]
Definition: Country of taxation of an individual person or an organisation.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

2.82 FinalAgent <FnlAgt>

Presence: [1..1]
Definition: Financial institution that receives the payment transaction on behalf of an account owner, and posts the transaction to the account.

Usage : in a credit transfer context, the final agent is the account servicer of the creditor. In a direct debit context, the final agent is the account servicer of the debtor.
Type: *This message item is composed of the following **BICIdentification1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	BIC	<BIC>	[1..1]	Identifier

For additional Type information, please refer to BICIdentification1 p.280 in 'Message Item Types' section

2.83 ChargeBearer <ChrgBr>

Presence: [1..1]

Definition: Specifies if the creditor and/or debtor will bear the charges associated with the processing of the payment transaction.

Data Type: Code

*One of the following **ChargeBearer1Code** values must be used:*

Code	Name	Definition
BEN	BorneByCreditor	All transaction charges are to be borne by the creditor.
OUR	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHA	Shared	Under the credit transfer scenario, transaction charges on the sender's side are to be borne by the debtor; transaction charges on the receiver's side are to be borne by the creditor.

2.84 CreditorAccount <CdtrAcct>

Presence: [1..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Type: *This message item is composed of the following **AccountIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.85		IBAN	<IBAN>	[1..1]	Identifier

2.85 IBAN <IBAN>

Presence: [1..1]

Definition: International Bank Account Number (IBAN) - identifier used internationally by financial institutions to uniquely identify the account of a customer. Further specifications of the format and content of the IBAN can be found in the standard ISO 13616 "Banking and related financial services - International Bank Account Number (IBAN)" version 1997-10-01, or later revisions.

Data Type: IBANIdentifier

Format: [a-zA-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}

Rule(s): IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

2.86 ExchangeContractReference <XchgCtrctRef>

Presence: [0..1]

Definition: Unique and unambiguous reference to the foreign exchange contract agreed between the initiating party and the first agent.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.87 RemittanceInformation <RmtInf>

Presence: [0..1]

Definition: Structured information that enables the matching, ie, reconciliation, of a payment with the items that the payment is intended to settle, eg, commercial invoices in an account receivable system.

Type: *This message item is composed of one of the following **RemittanceInformation3Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.88	{Or	Unstructured	<Ustrd>	[1..1]	Text
2.89	Or}	Structured	<Strd>	[1..1]	

2.88 Unstructured <Ustrd>

Presence: [1..1]

*This message item is part of choice **2.87** RemittanceInformation.*

Definition: Information, in free text form, to enable the matching, ie reconciliation, (reconciliation) of a payment with the items that the payment is intended to settle, such as commercial invoices in an accounts receivable system.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.89 Structured <Strd>

Presence: [1..1]

*This message item is part of choice **2.87** RemittanceInformation.*

Definition: Information in structured form, that is supplied to enable the matching, ie, reconciliation, of a payment with the items that the payment is intended to settle, eg, commercial invoices in an account receivable system.

Type: *This message item is composed of the following **StructuredRemittanceInformation2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.90		ReferredDocumentType	<RfrdDocTp>	[0..1]	Code
2.91		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime
2.92		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]	
2.98		DocumentReferenceNumber	<DocRefNb>	[0..1]	Text
2.99		CreditorReference	<CdtrRef>	[0..1]	Text
2.100		Invoicer	<Invcr>	[0..1]	
2.122		Invoicee	<Invcee>	[0..1]	

2.90 ReferredDocumentType <RfrdDocTp>

Presence: [0..1]

Definition: Specifies the nature of the referred document/transaction, eg, invoice or credit note.

Data Type: Code

*When this message item is present, one of the following **DocumentType1Code** values must be used:*

Code	Name	Definition
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.

2.91 ReferredDocumentRelatedDate <RfrdDocRltdDt>

Presence: [0..1]
Definition: Date associated with the referred document, eg, date of issue.
Data Type: ISODate

2.92 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..n]
Definition: Amount of money and currency of a document referred to in the remittance section. The amount is typically either the original amount due and payable, or the amount actually remitted for the referred document.
Type: *This message item is composed of one of the following **ReferredDocumentAmount1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.93	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount
2.94	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount
2.95	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount
2.96	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.97	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount

2.93 DuePayableAmount <DuePyblAmt>

Presence: [1..1]

*This message item is part of choice **2.92** ReferredDocumentAmount.*

Definition: Amount specified is the exact amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency** (**Ccy**) which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.94 DiscountAppliedAmount <DscntApldAmt>

Presence: [1..1]

*This message item is part of choice **2.92** ReferredDocumentAmount.*

Definition: Amount of money resulting from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency** (**Ccy**) which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.95 RemittedAmount <RmtdAmt>

Presence: [1..1]

*This message item is part of choice **2.92** ReferredDocumentAmount.*

Definition: Amount of money remitted for the referred document.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency** (**Ccy**) which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode

[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.96 CreditNoteAmount <CdtNoteAmt>

Presence: [1..1]

*This message item is part of choice **2.92** ReferredDocumentAmount.*

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.97 TaxAmount <TaxAmt>

Presence: [1..1]

*This message item is part of choice **2.92** ReferredDocumentAmount.*

Definition: Quantity of cash resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.98 DocumentReferenceNumber <DocRefNb>

Presence: [0..1]

Definition: Unique and unambiguous identification of a document that distinguishes that document from another document referred to in the remittance information, usually assigned by the originator of the referred document/transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.99 CreditorReference <CdtrRef>

Presence: [0..1]

Definition: Unique and unambiguous reference assigned by the creditor to refer to the payment transaction.

Usage: if available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the cash.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.100 Invoicer <Invcr>

Presence: [0..1]

Definition: Identification of the organization issuing the invoice when different than the creditor or final party

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.101		Name	<Nm>	[0..1]	Text
2.102		PostalAddress	<PstlAdr>	[0..1]	+
2.103		Identification	<Id>	[0..1]	

2.101 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.102 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.103 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following* ***Party1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.104	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.112	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.104 OrganisationIdentification <OrgId>

Presence: [1..1]
This message item is part of choice ***2.103*** *Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following* ***NonFinancialInstitutionIdentification1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.105		BEI	<BEI>	[0..1]	Identifier
2.106		EANGLN	<EANGLN>	[0..1]	Identifier
2.107		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.108		DUNS	<DUNS>	[0..1]	Identifier
2.109		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.110		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.111		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.105 BEI <BEI>

Presence: [0..1]
Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).
Data Type: BEIIdentifier
Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.106 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.107 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.108 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.109 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.110 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.111 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.

Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.112 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **2.103** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.113	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.114	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.115	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.116	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.117	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.118	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.119	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.120	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.121		Issuer	<Issr>	[0..1]	Text

2.113 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.112** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.114 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.112** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.115 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.112** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.116 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.112** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.117 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.112** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.118 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.112** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.119 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.112** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.120 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.112** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.121 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.122 Invoicee <Invcee>

Presence: [0..1]
Definition: Identification of the party to whom an invoice is issued, when different than the originator or debtor.
Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.123		Name	<Nm>	[0..1]	Text
2.124		PostalAddress	<PstlAdr>	[0..1]	+
2.125		Identification	<Id>	[0..1]	

2.123 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.124 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.125 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.126	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.134	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.126 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.125** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.127		BEI	<BEI>	[0..1]	Identifier
2.128		EANGLN	<EANGLN>	[0..1]	Identifier
2.129		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.130		DUNS	<DUNS>	[0..1]	Identifier
2.131		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.132		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.133		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.127 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.128 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.129 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.130 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.131 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.132 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.133 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.134 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **2.125** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.135	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.136	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.137	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.138	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.139	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.140	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.141	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.142	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.143		Issuer	<Issr>	[0..1]	Text

2.135 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.134** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.136 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.134** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.137 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.134** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.138 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.134** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.139 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.134** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.140 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.134** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.141 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.134** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.142 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.134** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.143 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

Business Example

Narrative

On 24 October 2005, Company Muller sends an EU-STPCreditTransferInitiation message to its account servicer, AAAADEFF.
The initiation contains two payment transactions to be paid to different creditors.
Payment transaction 1 is for account NL76502664959 of creditor Biodata at bank BBBBNL2A. Payment is for invoice 05/097.
Payment transaction 2 is for account NL57723491524 of creditor Janssen at bank CCCCNL2A. Payment is for invoices AB/09/876 and AB/09/877.
Charges related to the execution of the payments will be shared between the debtor and creditor.
The requested execution date is 26 October 2005.
Company Muller would like to have one entry for both transactions on its account DE0130037040044.
Corporate customers of AAAADEFF group the debit side of the individual payment transactions.

Business Description

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
GroupIdentification	<GrpId>	MU001
CreationDateTime	<CredDtTm>	2005-10-24T14:15:00+01:00
BatchBooking	<BtchBookg>	true
Grouping	<Grpg>	true
InitiatingParty	<InitgPty>	
Name	<Nm>	MULLER
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	NEUE MAINZER STRASSE
BuildingNumber	<BldgNb>	42
PostCode	<PstCd>	60255
TownName	<TwnNm>	FRANKFURT AM MAIN
Country	<Ctry>	DE
PaymentInformation	**<PmtInf>**	
RequestedExecutionDate	<ReqdExctnDt>	2005-10-26
CreditTransferTypeIdentification	<CdtTrfTpId>	
Code	<Cd>	SUPP
Debtor	<Dbtr>	
Name	<Nm>	MULLER
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	NEUE MAINZER STRASSE
BuildingNumber	<BldgNb>	42
PostCode	<PstCd>	60255
TownName	<TwnNm>	FRANKFURT AM MAIN
Country	<Ctry>	DE
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	DE5320130037040044
FirstAgent	<FrstAgt>	
BIC	<BIC>	AAAADEFF
PaymentTransaction	**<PmtTx>**	
PaymentIdentification	<PmtId>	
InstructionIdentification	<InstrId>	MULL/00001
EndToEndIdentification	<EndToEndId>	BIO123456
Purpose	<Purp>	
Code	<Cd>	SUPP

Amount	<Amt>	
InstructedAmount	<InstdAmt Ccy=EUR>	5098
Creditor	<Cdtr>	
Name	<Nm>	BIODATA INC.
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	HERENGRACHT
BuildingNumber	<BldgNb>	24
PostCode	<PstCd>	1017 CB
TownName	<TwnNm>	AMSTERDAM
Country	<Ctry>	NL
FinalAgent	<FnlAgt>	
BIC	<BIC>	BBBBNL2A
ChargeBearer	<ChrgBr>	SHA
CreditorAccount	<CdtrAcct>	
IBAN	<IBAN>	NL76502664959
RemittanceInformationt	<RmtInf>	
Unstructured	<Ustrd>	INV05/097
PaymentTransaction	**<PmtTx>**	
PaymentIdentification	<PmtId>	
InstructionIdentification	<InstrId>	MULL/00002
EndToEndIdentification	<EndToEndId>	JAN/INVAB
Purpose	<Purp>	
Code	<Cd>	SUPP
Amount	<Amt>	
InstructedAmount	<InstdAmt Ccy=EUR>	78653
Creditor	<Cdtr>	
Name	<Nm>	JANSSEN
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	CARNEGIEPLEIN
BuildingNumber	<BldgNb>	26
PostCode	<PstCd>	2517 KJ
TownName	<TwnNm>	DEN HAAG
Country	<Ctry>	NL
FinalAgent	<FnlAgt>	
BIC	<BIC>	CCCCNL2A
ChargeBearer	<ChrgBr>	SHA
CreditorAccount	<CdtrAcct>	

IBAN	<IBAN>	NL57723491524
RemittanceInformationt	<RmtInf>	
Unstructured	<Ustrd>	INV AB/09/876//INV AB/09/877

XML Instance


```
<pain.001.003.01>
  <GrpHdr>
    <GrpId>MU001</GrpId>
    <CreDtTm>2005-10-24T14:15:00+01:00</CreDtTm>
    <BtchBookg>true</BtchBookg>
    <Grpg>true</Grpg>
    <InitgPty>
      <Nm>MULLER</Nm>
      <PstlAdr>
        <StrtNm>NEUE MAINZER STRASSE</StrtNm>
        <BldgNb>42</BldgNb>
        <PstCd>60255</PstCd>
        <TwnNm>FRANKFURT AM MAIN</TwnNm>
        <Ctry>DE</Ctry>
      </PstlAdr>
    </InitgPty>
  </GrpHdr>
  <PmtInf>
    <ReqdExctnDt>2005-10-26</ReqdExctnDt>
    <CdtTrfTpId>
      <Cd>SUPP</Cd>
    </CdtTrfTpId>
    <Dbtr>
      <Nm>MULLER</Nm>
      <PstlAdr>
        <StrtNm>NEUE MAINZER STRASSE</StrtNm>
        <BldgNb>42</BldgNb>
        <PstCd>60255</PstCd>
        <TwnNm>FRANKFURT AM MAIN</TwnNm>
        <Ctry>DE</Ctry>
      </PstlAdr>
    </Dbtr>
    <DbtrAcct>
      <Id>
        <IBAN>DE5320130037040044</IBAN>
      </Id>
    </DbtrAcct>
    <FrstAgt>
      <BIC>AAAADEFF</BIC>
    </FrstAgt>
    <PmtTx>
      <PmtId>
        <InstrId>MULL/00001</InstrId>
        <EndToEndId>BIO123456</EndToEndId>
```

```
      </PmtId>
      <Purp>
        <Cd>SUPP</Cd>
      </Purp>
      <Amt>
        <InstdAmt Ccy = "EUR">5098</InstdAmt>
      </Amt>
      <Cdtr>
        <Nm>BIODATA INC.</Nm>
        <PstlAdr>
          <StrtNm>HERENGRACHT</StrtNm>
          <BldgNb>24</BldgNb>
          <PstCd>1017 CB</PstCd>
          <TwnNm>AMSTERDAM</TwnNm>
          <Ctry>NL</Ctry>
        </PstlAdr>
      </Cdtr>
      <FnlAgt>
        <BIC>BBBBNL2A</BIC>
      </FnlAgt>
      <ChrgBr>SHA</ChrgBr>
      <CdtrAcct>
        <IBAN>NL76502664959</IBAN>
      </CdtrAcct>
      <RmtInf>
        <Ustrd>INV05/097</Ustrd>
      </RmtInf>
    </PmtTx>
    <PmtTx>
      <PmtId>
        <InstrId>MULL/00002</InstrId>
        <EndToEndId>JAN/INVAB</EndToEndId>
      </PmtId>
      <Purp>
        <Cd>SUPP</Cd>
      </Purp>
      <Amt>
        <InstdAmt Ccy = "EUR">78653</InstdAmt>
      </Amt>
      <Cdtr>
        <Nm>JANSSEN</Nm>
        <PstlAdr>
          <StrtNm>CARNEGIEPLEIN</StrtNm>
          <BldgNb>26</BldgNb>
          <PstCd>2517 KJ</PstCd>
          <TwnNm>DEN HAAG</TwnNm>
          <Ctry>NL</Ctry>
        </PstlAdr>
      </Cdtr>
      <FnlAgt>
        <BIC>CCCCNL2A</BIC>
      </FnlAgt>
```

```
        <ChrgBr>SHA</ChrgBr>
        <CdtrAcct>
          <IBAN>NL57723491524</IBAN>
        </CdtrAcct>
        <RmtInf>
          <Ustrd>INV AB/09/876//INV AB/09/877</Ustrd>
        </RmtInf>
      </PmtTx>
    </PmtInf>
  </pain.001.003.01>
```

Message: PaymentInitiationStatus <pain.002.001.01>

Message Scope and Usage

Scope

The PaymentInitiationStatus message is sent by the first agent or the forwarding agent to the initiating party.
It is used to inform the initiating party about the status of a payment initiation that the initiating party has sent to the forwarding agent or first agent.

Usage

The usage of the PaymentInitiationStatus message will always be governed by a bilateral agreement between the agent and customer.
The PaymentInitiationStatus message can be used to report on the initiation of a credit transfer, as well as on the initiation of other customer transactions.
It can contain status information on the group of payments included in the initiation, as well as status information on any of the individual payment transactions included in the initiation.
In the case of a relay scenario, the PaymentInitiationStatus message can either be sent by the first agent to the forwarding agent, which in its turn will forward the PaymentInitiationStatus message to the initiating party, or it can be sent by the first agent directly to the initiating party.

Main Characteristics

The PaymentInitiationStatus message has the following main characteristics:

References

The PaymentInitiationStatus message uses references to link it to the original initiation message on which it reports. Additionally, a number of elements from the original initiation message can be included to aid identification of the message to which it refers.

Status information

The PaymentInitiationStatus message contains a series of codes to indicate the status. Additional reason information about the status can also be included.

Outline

The PaymentInitiationStatus message is composed of five main building blocks.

A. GeneralInformation

This building block is mandatory. It contains elements such as a StatusIdentification and CreationDateTime.

B. OriginalGroupReferenceInformationAndStatus

This building block is mandatory. It contains the original GroupIdentification of the initiation. It also provides the optional status for the group of payments included in the initiation.

C. OriginalPaymentInformation

This building block is optional and repetitive. It contains elements of the original initiation related to the debit side of the initiation, such as Debtor and DebtorAccountInformation.

D. OriginalTransactionReferenceInformationAndStatus

This building block is optional and repetitive. It contains status information and reference elements of the individual payment transactions included in the initiation.

E. OriginalTransactionInformation

This building block is optional. It contains elements of the original payment transactions included in the initiation, such as Amount and Creditor.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GeneralInformation	<GnlInf>	[1..1]		
1.1		PaymentInitiationStatusIdentification	<PmtInitnStsId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		ForwardingAgent	<FwdgAgt>	[0..1]	+	
1.4		InitiatingParty	<InitgPty>	[1..1]		
1.5		Name	<Nm>	[0..1]	Text	
1.6		PostalAddress	<PstlAdr>	[0..1]	+	
1.7		Identification	<Id>	[0..1]		
1.8	{Or	OrganisationIdentification	<OrgId>	[1..1]		
1.9		BEI	<BEI>	[0..1]	Identifier	
1.10		EANGLN	<EANGLN>	[0..1]	Identifier	
1.11		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
1.12		DUNS	<DUNS>	[0..1]	Identifier	
1.13		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
1.14		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
1.15		ProprietaryIdentification	<PrtryId>	[0..1]	+	
1.16	Or}	PrivateIdentification	<PrvtId>	[1..2]		
1.17	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
1.18	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
1.19	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
1.20	Or	PassportNumber	<PsptNb>	[1..1]	Text	
1.21	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
1.22	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
1.23	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
1.24	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
1.25		Issuer	<Issr>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.26		FirstAgent	<FrstAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		OriginalGroupReferenceInformationAndStatus	<OrgnlGrpRefInfAndSts>	[1..1]		
2.1		GroupIdentification	<GrpId>	[1..1]	Text	
2.2		OriginalMessageType	<OrgnlMsgTp>	[1..1]	Text	
2.3		GroupStatus	<GrpSts>	[0..1]	Code	
2.4		StatusReason	<StsRsn>	[0..1]	Code	
2.5		AdditionalInformation	<AddtlInf>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.0		OriginalPaymentInformation	<OrgnlPmtInf>	[0..n]		
3.1		RequestedExecutionDate	<ReqdExctnDt>	[0..1]	DateTime	
3.2		PaymentMethodByFirstAgent	<PmtMtdByFrstAgt>	[0..1]	Code	
3.3		CreditTransferTypeIdentification	<CdtTrfTpId>	[0..1]		
3.4	{Or	Code	<Cd>	[0..1]	Code	
3.5	Or}	LocalInstrument	<LclInstrm>	[0..1]	Text	
3.6		InstructionPriority	<InstrPrty>	[0..1]	Code	
3.7		SettlementPriority	<SttlmPrty>	[0..1]		
3.8	{Or	Priority	<Prty>	[1..1]	Code	
3.9	Or}	PaymentScheme	<PmtSchme>	[1..1]		
3.10	{{Or	Code	<Cd>	[1..1]	Code	
3.11	Or}}	ProprietaryInformation	<PrtryInf>	[1..1]	Text	
3.12		Debtor	<Dbtr>	[0..1]		
3.13		Name	<Nm>	[0..1]	Text	
3.14		PostalAddress	<PstlAdr>	[0..1]	+	
3.15		Identification	<Id>	[0..1]		
3.16	{Or	OrganisationIdentification	<OrgId>	[1..1]		
3.17		BEI	<BEI>	[0..1]	Identifier	
3.18		EANGLN	<EANGLN>	[0..1]	Identifier	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.19		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
3.20		DUNS	<DUNS>	[0..1]	Identifier	
3.21		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
3.22		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
3.23		ProprietaryIdentification	<PrtryId>	[0..1]	+	
3.24	Or}	PrivateIdentification	<PrvtId>	[1..2]		
3.25	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
3.26	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
3.27	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
3.28	Or	PassportNumber	<PsptNb>	[1..1]	Text	
3.29	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
3.30	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
3.31	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
3.32	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
3.33		Issuer	<Issr>	[0..1]	Text	
3.34		DebtorAccount	<DbtrAcct>	[0..1]		
3.35		Identification	<Id>	[1..1]	+	
3.36		Type	<Tp>	[0 ..1]	Code	
3.37		Currency	<Ccy>	[0..1]	Code	
3.38		Name	<Nm>	[0..1]	Text	
3.39		OriginalTransactionReferenceInformation AndStatus	<OrgnlTxRefInfAndSts>	[0..n]		
3.40		PaymentIdentification	<PmtId>	[1..1]		
3.41		InstructionIdentification	<InstrId>	[0..1]	Text	
3.42		EndToEndIdentification	<EndToEndId>	[1..1]	Text	
3.43		PaymentRemittanceIdentification	<PmtRmtId>	[0..1]	Text	
3.44		TransactionStatus	<TxSts>	[0..1]	Code	
3.45		StatusReason	<StsRsn>	[0..1]	Code	
3.46		AdditionalInformation	<AddtlInf>	[0..1]	Text	
3.47		OriginalTransactionInformation	<OrgnlTxInf>	[0..1]		
3.48		Amount	<Amt>	[1..1]		
3.49	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount	
3.50	Or}	EquivalentAmount	<EqvtAmt>	[1..1]		
3.51		Amount	<Amt>	[1..1]	Amount	
3.52		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.53		Creditor	<Cdtr>	[0..1]		
3.54		Name	<Nm>	[0..1]	Text	
3.55		PostalAddress	<PstlAdr>	[0..1]	+	
3.56		Identification	<Id>	[0..1]		
3.57	{Or	OrganisationIdentification	<OrgId>	[1..1]		
3.58		BEI	<BEI>	[0..1]	Identifier	
3.59		EANGLN	<EANGLN>	[0..1]	Identifier	
3.60		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
3.61		DUNS	<DUNS>	[0..1]	Identifier	
3.62		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
3.63		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
3.64		ProprietaryIdentification	<PrtryId>	[0..1]	+	
3.65	Or}	PrivateIdentification	<PrvtId>	[1..2]		
3.66	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
3.67	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
3.68	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
3.69	Or	PassportNumber	<PsptNb>	[1..1]	Text	
3.70	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
3.71	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
3.72	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
3.73	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
3.74		Issuer	<Issr>	[0..1]	Text	
3.75		CreditorAccount	<CdtrAcct>	[0..1]		
3.76		Identification	<Id>	[1..1]	+	
3.77		Type	<Tp>	[0 ..1]	Code	
3.78		Currency	<Ccy>	[0..1]	Code	
3.79		Name	<Nm>	[0..1]	Text	
3.80		FinalAgent	<FnlAgt>	[0..1]	+	

Message Items Description

*The following section identifies the elements of the **PaymentInitiationStatus** message.*

1.0 GeneralInformation <GnlInf>

Presence: [1..1]

Definition: Reference information concerning the status or cancellation message, eg identification and creation date and time.

Type: *The **GeneralInformation** block is composed of the following **GeneralInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		PaymentInitiationStatusIdentification	<PmtInitnStsId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		ForwardingAgent	<FwdgAgt>	[0..1]	+
1.4		InitiatingParty	<InitgPty>	[1..1]	
1.26		FirstAgent	<FrstAgt>	[0..1]	+

1.1 PaymentInitiationStatusIdentification <PmtInitnStsId>

Presence: [1..1]

Definition: Reference assigned by a sending party to unambiguously identify the status message.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the status message was created by the sending party.

Data Type: ISODateTime

1.3 ForwardingAgent <FwdgAgt>

Presence: [0..1]

Definition: Financial Institution that receives the payment instruction from the initiating party and forwards it to the first agent in the payment chain.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification p.282 in 'Message Item Types' section

1.4 InitiatingParty <InitgPty>

Presence: [1..1]

Definition: Party initiating the payment to an agent. In the payment context, this can either be the debtor (in a credit transfer), the creditor (in a direct debit), or a party that initiates the payment on behalf of the debtor or creditor. In the context of treasury, the party that instructs the trading party to execute a treasury deal on its behalf.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.5		Name	<Nm>	[0..1]	Text
1.6		PostalAddress	<PstlAdr>	[0..1]	+
1.7		Identification	<Id>	[0..1]	

1.5 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

1.6 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

1.7 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.8	{Or	OrganisationIdentification	<OrgId>	[1..1]	
1.16	Or}	PrivateIdentification	<PrvtId>	[1..2]	

1.8 OrganisationIdentification <OrgId>

Presence: [1..1]

*This message item is part of choice **1.7** Identification.*

Definition: Unique and unambiguous way of identifying an organisation.

Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.9		BEI	<BEI>	[0..1]	Identifier
1.10		EANGLN	<EANGLN>	[0..1]	Identifier
1.11		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
1.12		DUNS	<DUNS>	[0..1]	Identifier
1.13		BankPartyIdentification	<BkPtyId>	[0..1]	Text
1.14		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
1.15		ProprietaryIdentification	<PrtryId>	[0..1]	+

1.9 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

1.10 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

1.11 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier
Format: CH[0-9]{6,6}

1.12 DUNS <DUNS>

Presence: [0..1]
Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.
Data Type: DunsIdentifier
Format: [0-9]{9,9}

1.13 BankPartyIdentification <BkPtyId>

Presence: [0..1]
Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.14 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.15 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

1.16 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **1.7** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.17	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.18	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
1.19	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
1.20	Or	PassportNumber	<PsptNb>	[1..1]	Text
1.21	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
1.22	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
1.23	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
1.24	Or}	OtherIdentification	<OthrId>	[1..1]	+
1.25		Issuer	<Issr>	[0..1]	Text

1.17 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.16** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.18 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.16** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.19 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.16** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.20 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.16** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.21 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.16** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.22 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **1.16** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.23 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.16** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.24 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **1.16** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

1.25 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identifier.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.26 FirstAgent <FrstAgt>

Presence: [0..1]

Definition: Financial institution that receives the payment transaction from the account owner, or other authorised party, and processes the instruction.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification p.282 in 'Message Item Types' section

2.0 OriginalGroupReferenceInformationAndStatus <OrgnlGrpRefInfAndSts>

Presence: [1..1]

Definition: Reference and status information concerning the payment initiation on which the status message reports.

Type: *The **OriginalGroupReferenceInformationAndStatus** block is composed of the following **OriginalGroupReferenceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		GroupIdentification	<GrpId>	[1..1]	Text
2.2		OriginalMessageType	<OrgnlMsgTp>	[1..1]	Text
2.3		GroupStatus	<GrpSts>	[0..1]	Code
2.4		StatusReason	<StsRsn>	[0..1]	Code
2.5		AdditionalInformation	<AddtlInf>	[0..1]	Text

2.1 GroupIdentification <GrpId>

Presence: [1..1]

Definition: Reference assigned by a sending party to unambiguously identify a group of individual transfers.

Usage: this reference is used between the initiating party and the forwarding or first agent to refer to the group of transactions sent. It can be used in status messages, statements and advices between the forwarding or first agent and the initiating party.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.2 OriginalMessageType <OrgnlMsgTp>

Presence: [1..1]
Definition: Specifies the message type for which the status is reported.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.3 GroupStatus <GrpSts>

Presence: [0..1]
Definition: Specifies the status of a group of payment transactions included in a payment initiation.
Data Type: Code
*When this message item is present, one of the following **PaymentGroupStatusCode** values must be used:*

Code	Name	Definition
ACCP	AcceptedCustomerProfile	Preceding check of technical validation was successful. Customer profile check was also successful. This includes the assessment of the static risks.
ACSC	AcceptedSettlementCompleted	Settlement on the debtor's account has been completed. Usage : this can be used by the first agent to report to the debtor that the transaction has been completed. Warning : this status is provided for transaction status reasons, not for financial information. It can only be used after bilateral agreement
ACSP	AcceptedSettlementInProcess	All preceding checks such as technical validation and customer profile were successful. Dynamic risk assessment is now also successful and therefore the payment initiation has been accepted for execution.
ACTC	AcceptedTechnicalValidation	Authentication and syntactical and semantical validation are successful.
PART	PartiallyAccepted	A number of transactions have been accepted, whereas another number of transactions have not yet achieved 'accepted' status.
PDNG	Pending	Payment initiation or individual transaction included in the payment initiation is pending. Further checks and status update will be performed.
RCVD	Received	Payment initiation has been received by the receiving agent.
RJCT	Rejected	Payment initiation or individual transaction included in the payment initiation has been rejected.

2.4 StatusReason <StsRsn>

Presence: [0..1]
Definition: Specifies the reason for the status of a transfer, in coded form.
Data Type: Code
*When this message item is present, one of the following **PaymentReject1Code** values must be used:*

Code	Name	Definition
AC01	IncorrectAccountNumber	Format of the account number specified is not correct.
AC02	NonNumericAccountNumber	Format of the account number specified is non-numeric.
AC03	InvalidAccountNumberForClearingCode	Format of the account number specified is not valid for local Sort/National Clearing Code.
AC04	ClosedAccountNumber	Account number specified has been closed on the Receiver's books.
AC05	InvalidAccountNumberWithInstitution	Account number specified is not a valid account at the Final Agent.
AC06	BlockedAccount	Account specified is blocked, prohibiting posting of transactions against it.
AG01	NoAgreement	No agreement is on file at the Receiver for affecting associated transaction/message.
AG02	InvalidBankOperationCode	Bank Operation code specified in the transaction/message is not valid for Receiver.
AM01	ZeroAmount	Specified transaction/message amount is equal to zero.
AM02	NotAllowedAmount	Specified transaction/message amount is greater than allowed maximum.
AM03	NotAllowedCurrency	Specified transaction/message amount is in an non processable currency outside of existing agreement.
AM04	InsufficientFunds	Amount of funds available to cover specified transaction/ message amount is insufficient.
AM05	Duplication	This transaction/message appears to have been duplicated.
AM06	TooLowAmount	Specified transaction amount is less than agreed minimum.
AM07	BlockedAmount	Amount specified in transaction/message has been blocked by regulatory authorities.
AM08	ChargeDisagreement	Specified charges amount is not as agreed between Sender and Receiver.
BE01	CreditorConsistency	Specification of creditor is not consistent with associated account number.
BE02	UnknownCreditor	Creditor specified is not known at associated Sort/National Clearing code.
BE03	NoLongerValidCreditor	Creditor specified no longer exists in the books.
BE04	IncorrectCreditorAddress	Specification of creditor's address, which is required for payment, is missing/not correct.
BE05	UnrecognisedInitiatingParty	Party who initiated the transaction/message is not recognised by the Beneficiary.
DT01	InvalidDate	Invalid date (e.g. wrong settlement date).
ED01	CorrespondentBankNotPossible	Correspond bank not possible.

Code	Name	Definition
ED02	TransactionReasonNonReportable	Transaction reason non reportable.
ED03	BalanceInfoRequested	Balance of payments complementary info is requested.
ED04	ChargeDetailsNotCorrect	Charge details not correct.
MS01	NotSpecifiedReason	Reason has not been specified due to sensitivities.
PY01	UnknownAccount	Unknown Account With Institution.
RC01	IncorrectFormatForRoutingCode	Routing code specified in the transaction/message has an incorrect format.
RC02	NonNumericRoutingCode	Routing code specified in the transaction/message is not numeric.
RC03	NotValidRoutingCode	Routing code specified in the transaction/message is not valid for local clearing.
RC04	ClosedBranch	Routing code specified in the transaction/message refers to a closed branch.
RF01	NotUniqueTransactionReference	Transaction reference is not unique within the message.
TM01	CutOffTime	Associated transaction/message was received after agreed processing cut-off time.

2.5 AdditionalInformation <AddtlInf>

Presence: [0..1]
Definition: Further details on the status in uncoded form..

Usage : Additional information can be used for several purposes, eg to report repaired information, or to provide reject reasons that hve not been included in coded form.

Data Type: Max105Text
Format: maxLength: 105
minLength: 1

3.0 OriginalPaymentInformation <OrgnlPmtInf>

Presence: [0..n]
Definition: Additional payment information concerning the payment initation on which the status message reports.
Type: *The **OriginalPaymentInformation** block is composed of the following **PaymentInformation9** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1		RequestedExecutionDate	<ReqdExctnDt>	[0..1]	DateTime
3.2		PaymentMethodByFirstAgent	<PmtMtdByFrstAgt>	[0..1]	Code
3.3		CreditTransferTypeIdentification	<CdtTrfTpId>	[0..1]	
3.12		Debtor	<Dbtr>	[0..1]	
3.34		DebtorAccount	<DbtrAcct>	[0..1]	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.39		OriginalTransactionReferenceInformationAndStatus	<OrgnlTxRefInfAndSts>	[0..n]	

Rule(s): CreditTransferTypeIdentification2Rule
If PaymentMethodByFirstAgent is present and is TRF, then CreditTransferTypeIdentification is optional.
If PaymentMethodByFirstAgent is present and is different from TRF, then CreditTransferTypeIdentification is not allowed.
If PaymentMethodByFirstAgent is not present, then CreditTransferTypeIdentification is optional.

Rule rationale: CreditTransferTypeIdentification details may be present if the payment method is Credit Transfer. It must not be present if the payment method is Cheque.

3.1 RequestedExecutionDate <ReqdExctnDt>

Presence: [0..1]
Definition: Date at which the initiating party requests that the payment instruction be processed. If payment by cheque, the date when the cheque is required to be generated by the bank.

Usage: This is the date on which the debtor's account(s) is (are) to be debited.
Data Type: ISODate

3.2 PaymentMethodByFirstAgent <PmtMtdByFrstAgt>

Presence: [0..1]
Definition: Specifies the transfer method that will be used by the first agent to transfer the funds to the creditor.
Data Type: Code
*When this message item is present, one of the following **PaymentMethod1Code** values must be used:*

Code	Name	Definition
CHK	Cheque	A written order to a bank to pay a certain sum of money from one person to another person.
TRF	CreditTransfer	A movement of cash in the books of the account servicer.

3.3 CreditTransferTypeIdentification <CdtTrfTpId>

Presence: [0..1]
Definition: Set of elements further identifying the type of credit transfer being requested by the initiating party.
Type: *This message item is composed of the following **CreditTransferTypeIdentification** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.4	{Or	Code	<Cd>	[0..1]	Code
3.5	Or}	LocalInstrument	<LclInstrm>	[0..1]	Text
3.6		InstructionPriority	<InstrPrty>	[0..1]	Code
3.7		SettlementPriority	<SttlmPrty>	[0..1]	

3.4 Code <Cd>

Presence: [0..1]
*This message item is part of choice **3.3** CreditTransferTypeIdentification.*
Definition: Type of transaction that resulted in the payment initiation in coded form.
Data Type: Code
*When this message item is present, one of the following **CreditTransferType2Code** values must be used:*

Code	Name	Definition
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CORT	TradeSettlementPayment	Transaction is related to settlement of a trade, eg a foreign exchange deal or a securities transaction.
DIVI	Dividend	Transaction is the payment of dividends.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to the payment of a hedging operation.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is the payment of interest.
LOAN	Loan	Transaction is related to the transfer of a loan to a borrower.
PENS	PensionPayment	Transaction is the payment of pension.
SALA	SalaryPayment	Transaction is the payment of salaries.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes.
TRAD	Trade	Transaction is related to the payment of a trade transaction.
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.

3.5 LocalInstrument <LclInstrm>

Presence: [0..1]
*This message item is part of choice **3.3** CreditTransferTypeIdentification.*
Definition: Credit transfer type that is specific to a user community and is required for use within that user community.

Usage : When available, codes provided by local authorities should be used in the Max35Text format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.6 InstructionPriority <InstrPrty>

Presence: [0..1]

Definition: Urgency or order of importance that the originator would like the recipient of the payment instruction to apply to the processing of the payment instruction.
Usage: This priority relates to queue processing and queue management by forwarding or first agent.

Data Type: Code

*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

3.7 SettlementPriority <SttlmPrty>

Presence: [0..1]

Definition: Priority with which or the system through which the agents in the payment chain will clear and settle the payment transaction.

Type: *This message item is composed of one of the following **SettlementPriorityChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.8	{Or	Priority	<Prty>	[1..1]	Code
3.9	Or}	PaymentScheme	<PmtSchme>	[1..1]	

3.8 Priority <Prty>

Presence: [1..1]

*This message item is part of choice **3.7** SettlementPriority.*

Definition: Priority with which all agents in the payment chain must clear and settle the payment transaction

Data Type: Code

*One of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

3.9 PaymentScheme <PmtSchme>

Presence: [1..1]

*This message item is part of choice **3.7** SettlementPriority.*

Definition: Pre-agreed offering between clearing agents, or the channel through which the payment instruction is to be processed. This payment scheme can point to a specific rulebook governing the rules of clearing and settlement between two parties.

Type: *This message item is composed of one of the following **PaymentSchemeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.10	{Or	Code	<Cd>	[1..1]	Code
3.11	Or}	ProprietaryInformation	<PrtryInf>	[1..1]	Text

3.10 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.9** PaymentScheme.*
Definition: Specifies the channel through which the payment instruction is to be processed in coded form.
Data Type: Code
*One of the following **CashClearingSystem2Code** values must be used:*

Code	Name	Definition
ACH	ACH	Automated Clearing House. Payment system that clears cash transfers and settles the proceeds in a lump sum, usually on a multilateral netting basis.
CHI	CHIPS	CHIPS is the Clearing House Interbank Payment System.
FDN	FedNet	FedNet is a link to a Federal Bank account via the internet. FedNet enables checking of account balance, transactions, take print outs of account statement, transfer funds to third party accounts, E-shopping, BSNL Payments, Deposit opening, Deposit Renewal, Request for Demand Draft, Cheque Book etc.
RTG	RTGS	Real Time Gross Settlement System. Payment system that simultaneously clears individual transfers and settles them in central bank money.

3.11 ProprietaryInformation <PrtryInf>

Presence: [1..1]
*This message item is part of choice **3.9** PaymentScheme.*
Definition: Channel that is specific to a user community and is required for use within that user community.

Usage : if the channel is included in the list of codes provided for the payment scheme, the code element should be used instead of the proprietary element.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.12 Debtor <Dbtr>

Presence: [0..1]
Definition: Party that owes an amount of money to the creditor. In the context of the payment model, the debtor is also the debit account owner.

Usage : If required for legal reasons, this element must be present.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.13		Name	<Nm>	[0..1]	Text
3.14		PostalAddress	<PstlAdr>	[0..1]	+

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.15		Identification	<Id>	[0..1]	

3.13 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.14 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

3.15 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.16	{Or	OrganisationIdentification	<OrgId>	[1..1]	
3.24	Or}	PrivateIdentification	<PrvtId>	[1..2]	

3.16 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **3.15** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.

Type: *This message item is composed of the following* ***NonFinancialInstitutionIdentification1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.17		BEI	<BEI>	[0..1]	Identifier
3.18		EANGLN	<EANGLN>	[0..1]	Identifier
3.19		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
3.20		DUNS	<DUNS>	[0..1]	Identifier
3.21		BankPartyIdentification	<BkPtyId>	[0..1]	Text
3.22		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
3.23		ProprietaryIdentification	<PrtryId>	[0..1]	+

3.17 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

3.18 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

3.19 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

3.20 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

3.21 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.22 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.23 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.

Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

3.24 PrivateIdentification <PrvtId>

Presence: [1..2]

*This message item is part of choice **3.15** Identification.*

Definition: Unique and unambiguous identification of a person, eg, passport.

Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.25	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
3.26	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
3.27	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
3.28	Or	PassportNumber	<PsptNb>	[1..1]	Text
3.29	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.30	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
3.31	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
3.32	Or}	OtherIdentification	<OthrId>	[1..1]	+
3.33		Issuer	<Issr>	[0..1]	Text

3.25 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.24** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.26 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.24** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.27 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.24** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.28 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.24** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.29 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.24** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.30 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **3.24** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.31 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.24** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.32 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **3.24** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

3.33 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.34 DebtorAccount <DbtrAcct>

Presence: [0..1]
Definition: Identification of the account of the debtor to which a debit entry will be made to execute the transfer.
Type: *This message item is composed of the following **CashAccount3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.35		Identification	<Id>	[1..1]	+
3.36		Type	<Tp>	[0 ..1]	Code
3.37		Currency	<Ccy>	[0..1]	Code
3.38		Name	<Nm>	[0..1]	Text

3.35 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following **AccountIdentification1Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier
Or}	DomesticAccount	<DmstAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification1Choice p.278 in 'Message Item Types' section

3.36 Type <Tp>

Presence: [0 ..1]
Definition: Nature, or use, of the account.
Data Type: Code
*When this message item is present, one of the following **CashAccountType3Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SVGS	Savings	Account used for savings.

3.37 Currency <Ccy>

Presence: [0..1]

Definition: Identification of the currency in which the debtor's account is held.

Usage: Currency should only be used in case one and the same debtor's account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

3.38 Name <Nm>

Presence: [0..1]

Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

3.39 OriginalTransactionReferenceInformationAndStatus <OrgnlTxRefInfAndSts>

Presence: [0..n]

Definition: Reference and status information concerning the individual payment transactions included in the payment initiation message for which the status is being reported.

Type: *This message item is composed of the following **PaymentReference1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.40		PaymentIdentification	<PmtId>	[1..1]	
3.44		TransactionStatus	<TxSts>	[0..1]	Code
3.45		StatusReason	<StsRsn>	[0..1]	Code
3.46		AdditionalInformation	<AddtlInf>	[0..1]	Text
3.47		OriginalTransactionInformation	<OrgnlTxInf>	[0..1]	

3.40 PaymentIdentification <PmtId>

Presence: [1..1]

Definition: Set of elements used to provide further means of referencing a payment transaction.

Type: *This message item is composed of the following **PaymentIdentification** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.41		InstructionIdentification	<InstrId>	[0..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.42		EndToEndIdentification	<EndToEndId>	[1..1]	Text
3.43		PaymentRemittanceIdentification	<PmtRmtId>	[0..1]	Text

3.41 InstructionIdentification <InstrId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for a payment instruction assigned by the initiating party.

Usage: the instruction identification can be used between the initiating party and the receiving agent to refer to the individual instruction. It can be used in several messages, eg, status messages, debit advices or account statement messages.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.42 EndToEndIdentification <EndToEndId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a payment transaction, as assigned by any of the parties on the initiating side, that will be passed on throughout the entire end-to-end chain.

Usage: the end-to-end identification can be used for reconciliation or to link tasks relating to the payment transaction and can be included in several related messages to the payment transaction between forwarding or first agent and debtor or initiating party, and between final agent and creditor.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.43 PaymentRemittanceIdentification <PmtRmtId>

Presence: [0..1]

Definition: Unique and unambiguous identification of remittance information which is sent separately from the payment initiation information.

Usage: the payment remittance identification is used to link separately sent remittance information to the payment transaction information included in the payment initiation.

If the business context requires the use of a creditor's reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.44 TransactionStatus <TxSts>

Presence: [0..1]

Definition: Specifies the status of a transaction included in the payment initiation

Data Type: Code

*When this message item is present, one of the following **PaymentTransactionStatusCode** values must be used:*

Code	Name	Definition
ACCP	AcceptedCustomerProfile	Preceding check of technical validation was successful. Customer profile check was also successful. This includes the assessment of the static risks.
ACSC	AcceptedSettlementCompleted	Settlement on the debtor's account has been completed. Usage : this can be used by the first agent to report to the debtor that the transaction has been completed. Warning : this status is provided for transaction status reasons, not for financial information. It can only be used after bilateral agreement
ACSP	AcceptedSettlementInProcess	All preceding checks such as technical validation and customer profile were successful. Dynamic risk assessment is now also successful and therefore the payment initiation has been accepted for execution.
ACTC	AcceptedTechnicalValidation	Authentication and syntactical and semantical validation are successful.
PDNG	Pending	Payment initiation or individual transaction included in the payment initiation is pending. Further checks and status update will be performed.
RJCT	Rejected	Payment initiation or individual transaction included in the payment initiation has been rejected.

3.45 StatusReason <StsRsn>

Presence: [0..1]

Definition: Specifies the reason for the status of a transfer, in coded form.

Data Type: Code

*When this message item is present, one of the following **PaymentReject1Code** values must be used:*

Code	Name	Definition
AC01	IncorrectAccountNumber	Format of the account number specified is not correct.
AC02	NonNumericAccountNumber	Format of the account number specified is non-numeric.
AC03	InvalidAccountNumberForClearingCode	Format of the account number specified is not valid for local Sort/National Clearing Code.
AC04	ClosedAccountNumber	Account number specified has been closed on the Receiver's books.
AC05	InvalidAccountNumberWithInstitution	Account number specified is not a valid account at the Final Agent.
AC06	BlockedAccount	Account specified is blocked, prohibiting posting of transactions against it.
AG01	NoAgreement	No agreement is on file at the Receiver for affecting associated transaction/message.

Code	Name	Definition
AG02	InvalidBankOperationCode	Bank Operation code specified in the transaction/message is not valid for Receiver.
AM01	ZeroAmount	Specified transaction/message amount is equal to zero.
AM02	NotAllowedAmount	Specified transaction/message amount is greater than allowed maximum.
AM03	NotAllowedCurrency	Specified transaction/message amount is in an non processable currency outside of existing agreement.
AM04	InsufficientFunds	Amount of funds available to cover specified transaction/ message amount is insufficient.
AM05	Duplication	This transaction/message appears to have been duplicated.
AM06	TooLowAmount	Specified transaction amount is less than agreed minimum.
AM07	BlockedAmount	Amount specified in transaction/message has been blocked by regulatory authorities.
AM08	ChargeDisagreement	Specified charges amount is not as agreed between Sender and Receiver.
BE01	CreditorConsistency	Specification of creditor is not consistent with associated account number.
BE02	UnknownCreditor	Creditor specified is not known at associated Sort/National Clearing code.
BE03	NoLongerValidCreditor	Creditor specified no longer exists in the books.
BE04	IncorrectCreditorAddress	Specification of creditor's address, which is required for payment, is missing/not correct.
BE05	UnrecognisedInitiatingParty	Party who initiated the transaction/message is not recognised by the Beneficiary.
DT01	InvalidDate	Invalid date (e.g. wrong settlement date).
ED01	CorrespondentBankNotPossible	Correspond bank not possible.
ED02	TransactionReasonNonReportable	Transaction reason non reportable.
ED03	BalanceInfoRequested	Balance of payments complementary info is requested.
ED04	ChargeDetailsNotCorrect	Charge details not correct.
MS01	NotSpecifiedReason	Reason has not been specified due to sensitivities.
PY01	UnknownAccount	Unknown Account With Institution.
RC01	IncorrectFormatForRoutingCode	Routing code specified in the transaction/message has an incorrect format.
RC02	NonNumericRoutingCode	Routing code specified in the transaction/message is not numeric.
RC03	NotValidRoutingCode	Routing code specified in the transaction/message is not valid for local clearing.
RC04	ClosedBranch	Routing code specified in the transaction/message refers to a closed branch.

Code	Name	Definition
RF01	NotUniqueTransactionReference	Transaction reference is not unique within the message.
TM01	CutOffTime	Associated transaction/message was received after agreed processing cut-off time.

3.46 AdditionalInformation <AddtlInf>

Presence: [0..1]

Definition: Further details on the status, in uncoded form..

Usage : Additional information can be used for several purposes, eg, to report repaired information, or to provide reject reasons which are not included in the coded list.

Data Type: Max105Text

Format: maxLength: 105
minLength: 1

3.47 OriginalTransactionInformation <OrgnlTxInf>

Presence: [0..1]

Definition: Additional information concerning a payment transaction included in the payment initation on which the status message reports.

Type: *This message item is composed of the following **OriginalTransactionInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.48		Amount	<Amt>	[1..1]	
3.53		Creditor	<Cdtr>	[0..1]	
3.75		CreditorAccount	<CdtrAcct>	[0..1]	
3.80		FinalAgent	<FnlAgt>	[0..1]	+

3.48 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between the debtor and creditor, before charges.

Type: *This message item is composed of one of the following **AmountType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.49	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount
3.50	Or}	EquivalentAmount	<EqvtAmt>	[1..1]	

3.49 InstructedAmount <InstdAmt>

Presence: [1..1]

*This message item is part of choice **3.48** Amount.*

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account or in another currency..

Usage : Currency of the amount is expressed in the currency (or one of the currencies) of the debtor's account or another currency, eg, pay 1000000 EUR (and debtor's account is is EUR) or pay 1000000 JPY (and debtor's account is in EUR).

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.50 EquivalentAmount <EqvtAmt>

Presence: [1..1]

This message item is part of choice ***3.48*** *Amount.*

Definition: Amount of money to be transferred between the debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred into a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Type: *This message item is composed of the following* ***EquivalentAmount*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.51		Amount	<Amt>	[1..1]	Amount
3.52		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code

3.51 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred in a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode

[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.52 CurrencyOfTransfer <CcyOfTrf>

Presence: [1..1]

Definition: Specifies the currency of the to be transferred amount, which is different from the currency of the debtor's account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

3.53 Creditor <Cdtr>

Presence: [0..1]

Definition: Party that receives an amount of money from the debtor. In the context of the payment model, the creditor is also the credit account owner.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.54		Name	<Nm>	[0..1]	Text
3.55		PostalAddress	<PstlAdr>	[0..1]	+
3.56		Identification	<Id>	[0..1]	

3.54 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

3.55 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

3.56 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.57	{Or	OrganisationIdentification	<OrgId>	[1..1]	
3.65	Or}	PrivateIdentification	<PrvtId>	[1..2]	

3.57 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **3.56** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.58		BEI	<BEI>	[0..1]	Identifier
3.59		EANGLN	<EANGLN>	[0..1]	Identifier
3.60		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
3.61		DUNS	<DUNS>	[0..1]	Identifier
3.62		BankPartyIdentification	<BkPtyId>	[0..1]	Text
3.63		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
3.64		ProprietaryIdentification	<PrtryId>	[0..1]	+

3.58 BEI <BEI>

Presence: [0..1]
Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).
Data Type: BEIIdentifier
Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s): BEI

Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

3.59 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

3.60 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

3.61 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

3.62 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.63 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.64 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

3.65 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **3.56** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.66	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
3.67	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
3.68	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
3.69	Or	PassportNumber	<PsptNb>	[1..1]	Text
3.70	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
3.71	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
3.72	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
3.73	Or}	OtherIdentification	<OthrId>	[1..1]	+
3.74		Issuer	<Issr>	[0..1]	Text

3.66 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.65** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.67 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.65** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.68 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.65** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.69 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.65** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.70 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.65** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.71 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **3.65** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.72 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **3.65** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35

minLength: 1

3.73 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **3.65** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

3.74 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.75 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Account to or from which a cash entry is made.
Type: *This message item is composed of the following **CashAccount3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.76		Identification	<Id>	[1..1]	+
3.77		Type	<Tp>	[0 ..1]	Code
3.78		Currency	<Ccy>	[0..1]	Code
3.79		Name	<Nm>	[0..1]	Text

3.76 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following **AccountIdentification1Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
Or}	DomesticAccount	<DmstAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification1Choice p.278 in 'Message Item Types' section

3.77 Type <Tp>

Presence: [0 ..1]
Definition: Nature, or use, of the account.
Data Type: Code
*When this message item is present, one of the following **CashAccountType3Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SVGS	Savings	Account used for savings.

3.78 Currency <Ccy>

Presence: [0..1]
Definition: Identification of the currency in which the debtor's account is held.

Usage: Currency should only be used in case one and the same debtor's account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

3.79 Name <Nm>

Presence: [0..1]
Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.80 FinalAgent <FnlAgt>

Presence: [0..1]

Definition: Financial institution that receives the payment transaction on behalf of an account owner, and posts the transaction into the account.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification p.282 in 'Message Item Types' section

Business Example

Narrative

Bank AAAAUS33 offers its customer, company Zendi, a status information service to report on the status of transactions contained in the initiation messages submitted by the customer. Bank and customer have bilaterally agreed that the bank will report both positive and negative status information.
On 10 October 2005, bank AAAAUS33 receives a CoreCreditTransferInitiation message from company Zendi, containing two payment transactions:
Payment transaction 1 is for account 987654 of creditor Artis at bank BBBBSGSG.
Payment transaction 2 is for creditor Sakamoto at bank CCCCJPJT. Bank CCCCJPJT needs to issue a cheque to Sakamoto.
Charges related to the execution of the payments will be shared between debtor and creditor.
The requested execution date is 12 October 2005.
Bank AAAAUS33 performs all necessary customer checks and will execute the payments on the requested execution date. Before execution takes place, bank AAAAUS33 confirms that the transactions included in the CoreCreditTransferInitiation message have been accepted for settlement on company Zendi's account.Bank AAAAUS33 has agreed with its customer to report the individual transaction status in its status reports.

Business Description

Element	***<XMLTag>***	***Content***
GeneralInformation	**<GnlInf>**	
PaymentInitiationStatusIdentification	<PmtInitnStsId>	AAAA0001
CreationDateTime	<CreDtTm>	2005-10-11T17:10:00-05:00
InitiatingParty	<InitgPty>	
Name	<Nm>	ZDI
OriginalGroupReferenceInformatinAndStatus	**<OrgnlGrpRefInfAndSts>**	
GroupIdentification	<GrpId>	ZEN001
OriginalMessageType	<OrgnlMsgTp>	Pain.001.001.01
OriginalPaymentInformation	**<OrgnlPmtInf>**	
OriginalTransactionReferenceInformationAndStatus	**<OrgnlTxRefInfAndSts>**	

PaymentIdentification	<PmtId>	
InstructionIdentification	<InstrId>	ZENDI-00001
EndToEndIdentification	<EndToEndId>	12345/98765
TransactionStatus	<TxSts>	ACSP
OriginalPaymentInformation	**<OrgnlPmtInf>**	
OriginalTransactionReferenceInformationAndStatus	**<OrgnlTxRefInfAndSts>**	
PaymentIdentification	<PmtId>	
InstructionIdentification	<InstrId>	ZENDI-00002
EndToEndIdentification	<EndToEndId>	NRTE876
TransactionStatus	<TxSts>	ACSP

XML Instance

```
<pain.002.001.01>
  <GnlInf>
    <PmtInitnStsId>AAAA0001</PmtInitnStsId>
    <CreDtTm>2005-10-11T17:10:00-05:00</CreDtTm>
    <InitgPty>
      <Nm>ZDI</Nm>
    </InitgPty>
  </GnlInf>
  <OrgnlGrpRefInfAndSts>
    <GrpId>ZEN001</GrpId>
    <OrgnlMsgTp>Pain.001.001.01</OrgnlMsgTp>
  </OrgnlGrpRefInfAndSts>
  <OrgnlPmtInf>
    <OrgnlTxRefInfAndSts>
      <PmtId>
        <InstrId>ZENDI-00001</InstrId>
        <EndToEndId>12345/98765</EndToEndId>
      </PmtId>
      <TxSts>ACSP</TxSts>
    </OrgnlTxRefInfAndSts>
  </OrgnlPmtInf>
  <OrgnlPmtInf>
    <OrgnlTxRefInfAndSts>
      <PmtId>
        <InstrId>ZENDI-00002</InstrId>
        <EndToEndId>NRTE876</EndToEndId>
      </PmtId>
      <TxSts>ACSP</TxSts>
    </OrgnlTxRefInfAndSts>
  </OrgnlPmtInf>
</pain.002.001.01>
```

Message: STPCreditTransferInitiation <pain.001.002.01>

Message Scope and Usage

Scope

The STPCreditTransferInitiation message is sent by the initiating party to the forwarding agent or first agent.
This message is used to request movement of cash from a debtor's account to a creditor.

Usage

The STPCreditTransferInitiation message can contain:
- one or more instances of a credit transfer initiation,
- payment transactions that result in book transfers at the first agent or payments to another financial institution,
- payment transactions that result in an electronic cash transfer to the creditor's account only.

The message can be used in a direct or a relay scenario. In a direct scenario, the initiating party sends the STPCreditTransferInitiation message directly to the first agent, which is the account servicer of the debtor. In a relay scenario, the initiating party sends the STPCreditTransferInitiation message to a forwarding agent, which acts as a concentrating financial institution. It will forward the STPCreditTransferInitiation message to the firstaAgent.
The STPCreditTransferInitiation message can be used in domestic and cross-border scenarios.
The message can be used to group payments (in this case, the PaymentInformation component is present once) or can be used as a collection of individual payments (in this case the PaymentInformation component is present once per occurrence of PaymentTransaction component).

Main Characteristics

The STPCreditTransferInitiation message has the following main characteristics:

Batch or single entry indication

The initiating party can indicate whether it wants to have all transactions present in the CoreCreditTransferInitiation message booked as one entry or as individual entries on the debtor's account.

Codes to identify agents

Agents included in the payment initiation are identified by a choice of codes: BIC, or Clearing Code or Proprietary ID.

Remittance information

The STPCreditTransferInitiation message can include basic remittance information. The remittance information component may only be present once. It also contains reference fields that can be used to refer to remittance information sent separately from the payment transaction.

Outline

The STPCreditTransferInitiation message is composed of three main building blocks.

A. GroupHeader

This building block is mandatory. It contains elements such as a GroupIdentification and CreationDateTime.

B. PaymentInformation

This building block is mandatory and repetitive. It contains elements related to the debit side of the transaction. These elements include Debtor, DebtorAccountInformation and PaymentMethod. If there is an agreement between the initiating party and the receiving agent to include the payment information details related to the debit side of the transaction only once, this block is only present once. If there is an agreement between the InitiatingParty and the receiving agent to repeat

the debit information details for each transaction, this building block is present once per occurrence of the PaymentTransaction block.

C. PaymentTransaction

This building block is mandatory and repetitive. It contains elements related to the credit side of the transaction. These elements include Creditor, CreditorAccountInformation and references for the transaction.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		GroupIdentification	<GrpId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]	Text	
1.4		ControlSum	<CtrlSum>	[0..1]	Quantity	
1.5		BatchBooking	<BtchBookg>	[0..1]	Indicator	
1.6		NumberOfTransactions	<NbOfTxs>	[0..1]	Text	
1.7		Grouping	<Grpg>	[0..1]	Indicator	
1.8		InitiatingParty	<InitgPty>	[1..1]		
1.9		Name	<Nm>	[0..1]	Text	
1.10		PostalAddress	<PstlAdr>	[0..1]	+	
1.11		Identification	<Id>	[0..1]		
1.12	{Or	OrganisationIdentification	<OrgId>	[1..1]		
1.13		BEI	<BEI>	[0..1]	Identifier	
1.14		EANGLN	<EANGLN>	[0..1]	Identifier	
1.15		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
1.16		DUNS	<DUNS>	[0..1]	Identifier	
1.17		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
1.18		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
1.19		ProprietaryIdentification	<PrtryId>	[0..1]	+	
1.20	Or}	PrivateIdentification	<PrvtId>	[1..2]		
1.21	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
1.22	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
1.23	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
1.24	Or	PassportNumber	<PsptNb>	[1..1]	Text	
1.25	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
1.26	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
1.27	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.28	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
1.29		Issuer	<Issr>	[0..1]	Text	
1.30		ForwardingAgent	<FwdgAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		PaymentInformation	<PmtInf>	[1..n]		
2.1		RequestedExecutionDate	<ReqdExctnDt>	[1..1]	DateTime	
2.2		CreditTransferTypeIdentification	<CdtTrfTpId>	[0..1]		
2.3	{Or	Code	<Cd>	[0..1]	Code	
2.4	Or}	LocalInstrument	<LclInstrm>	[0..1]	Text	
2.5		InstructionPriority	<InstrPrty>	[0..1]	Code	
2.6		SettlementPriority	<SttlmPrty>	[0..1]		
2.7	{Or	Priority	<Prty>	[1..1]	Code	
2.8	Or}	PaymentScheme	<PmtSchme>	[1..1]		
2.9	{{Or	Code	<Cd>	[1..1]	Code	
2.10	Or}}	ProprietaryInformation	<PrtryInf>	[1..1]	Text	
2.11		Debtor	<Dbtr>	[0..1]		
2.12		Name	<Nm>	[0..1]	Text	
2.13		PostalAddress	<PstlAdr>	[0..1]	+	
2.14		Identification	<Id>	[0..1]		
2.15	{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.16		BEI	<BEI>	[0..1]	Identifier	
2.17		EANGLN	<EANGLN>	[0..1]	Identifier	
2.18		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.19		DUNS	<DUNS>	[0..1]	Identifier	
2.20		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.21		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.22		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.23	Or}	PrivateIdentification	<PrvtId>	[1..2]		
2.24	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.25	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.26	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.27	Or	PassportNumber	<PsptNb>	[1..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.28	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.29	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.30	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.31	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
2.32		Issuer	<Issr>	[0..1]	Text	
2.33		DebtorCountryOfResidence	<DbtrCtryOfRes>	[0..1]	Code	
2.34		DebtorAccount	<DbtrAcct>	[1..1]		
2.35		Identification	<Id>	[1..1]	+	
2.36		Type	<Tp>	[0 ..1]	Code	
2.37		Currency	<Ccy>	[0..1]	Code	
2.38		Name	<Nm>	[0..1]	Text	
2.39		FirstAgent	<FrstAgt>	[1..1]	+	
2.40		ChargesAccount	<ChrgsAcct>	[0..1]		
2.41		Identification	<Id>	[1..1]	+	
2.42		Type	<Tp>	[0 ..1]	Code	
2.43		Currency	<Ccy>	[0..1]	Code	
2.44		Name	<Nm>	[0..1]	Text	
2.45		ChargesAccountAgent	<ChrgsAcctAgt>	[0..1]	+	
2.46		PaymentTransaction	<PmtTx>	[0..n]		
2.47		PaymentIdentification	<PmtId>	[1..1]		
2.48		InstructionIdentification	<InstrId>	[0..1]	Text	
2.49		EndToEndIdentification	<EndToEndId>	[1..1]	Text	
2.50		PaymentRemittanceIdentification	<PmtRmtId>	[0..1]	Text	
2.51		Purpose	<Purp>	[0..1]		
2.52	{Or	Proprietary	<Prtry>	[1..1]	Text	
2.53	Or}	Code	<Cd>	[1..1]	Code	
2.54		Amount	<Amt>	[1..1]		
2.55	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount	
2.56	Or}	EquivalentAmount	<EqvtAmt>	[1..1]		
2.57		Amount	<Amt>	[1..1]	Amount	
2.58		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code	
2.59		Creditor	<Cdtr>	[0..1]		
2.60		Name	<Nm>	[0..1]	Text	
2.61		PostalAddress	<PstlAdr>	[0..1]	+	
2.62		Identification	<Id>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.63	{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.64		BEI	<BEI>	[0..1]	Identifier	
2.65		EANGLN	<EANGLN>	[0..1]	Identifier	
2.66		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.67		DUNS	<DUNS>	[0..1]	Identifier	
2.68		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.69		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.70		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.71	Or}	PrivateIdentification	<PrvtId>	[1..2]		
2.72	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.73	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.74	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.75	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.76	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.77	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.78	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.79	Or}}	OtherIdentification	<OthrId>	[1..1]	+	
2.80		Issuer	<Issr>	[0..1]	Text	
2.81		CreditorCountryOfResidence	<CdtrCtryOfRes>	[0..1]	Code	
2.82		CreditorAccount	<CdtrAcct>	[1..1]	+	
2.83		FinalAgent	<FnlAgt>	[1..1]	+	
2.84		ChargeBearer	<ChrgBr>	[1..1]	Code	
2.85		ExchangeContractReference	<XchgCtrctRef>	[0..1]	Text	
2.86		RemittanceInformation	<RmtInf>	[0..1]		
2.87	{Or	Unstructured	<Ustrd>	[1..1]	Text	
2.88	Or}	Structured	<Strd>	[1..1]		
2.89		ReferredDocumentType	<RfrdDocTp>	[0..1]	Code	
2.90		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime	
2.91		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]		
2.92	{{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount	
2.93	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount	
2.94	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount	
2.95	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount	
2.96	Or}}	TaxAmount	<TaxAmt>	[1..1]	Amount	
2.97		DocumentReferenceNumber	<DocRefNb>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.98		CreditorReference	<CdtrRef>	[0..1]	Text	
2.99		Invoicer	<Invcr>	[0..1]		
2.100		Name	<Nm>	[0..1]	Text	
2.101		PostalAddress	<PstlAdr>	[0..1]	+	
2.102		Identification	<Id>	[0..1]		
2.103	{{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.104		BEI	<BEI>	[0..1]	Identifier	
2.105		EANGLN	<EANGLN>	[0..1]	Identifier	
2.106		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.107		DUNS	<DUNS>	[0..1]	Identifier	
2.108		BankPartyIdentification	<BkPtyId>	[0..1]	Text	
2.109		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.110		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.111	Or}}	PrivateIdentification	<PrvtId>	[1..2]		
2.112	{{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.113	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.114	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.115	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.116	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.117	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.118	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.119	Or}}}	OtherIdentification	<OthrId>	[1..1]	+	
2.120		Issuer	<Issr>	[0..1]	Text	
2.121		Invoicee	<Invcee>	[0..1]		
2.122		Name	<Nm>	[0..1]	Text	
2.123		PostalAddress	<PstlAdr>	[0..1]	+	
2.124		Identification	<Id>	[0..1]		
2.125	{{Or	OrganisationIdentification	<OrgId>	[1..1]		
2.126		BEI	<BEI>	[0..1]	Identifier	
2.127		EANGLN	<EANGLN>	[0..1]	Identifier	
2.128		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier	
2.129		DUNS	<DUNS>	[0..1]	Identifier	
2.130		BankPartyIdentification	<BkPtyId>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.131		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text	
2.132		ProprietaryIdentification	<PrtryId>	[0..1]	+	
2.133	Or}}	PrivateIdentification	<PrvtId>	[1..2]		
2.134	{{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text	
2.135	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text	
2.136	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text	
2.137	Or	PassportNumber	<PsptNb>	[1..1]	Text	
2.138	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text	
2.139	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text	
2.140	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text	
2.141	Or}}}	OtherIdentification	<OthrId>	[1..1]	+	
2.142		Issuer	<Issr>	[0..1]	Text	

Message Items Description

*The following section identifies the elements of the **STPCreditTransferInitiation** message.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]
Definition: Set of characteristics shared by all individual payment transactions included in the payment initiation.
Type: *The **GroupHeader** block is composed of the following **GroupInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		GroupIdentification	<GrpId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	Text
1.4		ControlSum	<CtrlSum>	[0..1]	Quantity
1.5		BatchBooking	<BtchBookg>	[0..1]	Indicator
1.6		NumberOfTransactions	<NbOfTxs>	[0..1]	Text
1.7		Grouping	<Grpg>	[0..1]	Indicator
1.8		InitiatingParty	<InitgPty>	[1..1]	
1.30		ForwardingAgent	<FwdgAgt>	[0..1]	+

1.1 GroupIdentification <GrpId>

Presence: [1..1]

Definition: Reference assigned by a sending party to unambiguously identify the group of individual transfers being sent.

Usage: this reference is used between the initiating party and the forwarding or first agent to refer to the group of transactions sent. It can be used in status messages, statements and advices between the forwarding or first agent and the initiating party.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the credit transfer initiation was created by the initiating party.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user oriented key that allows to check if the initiating party is allowed to pay from the account specified in the initiation.

Usage: the content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios or payment initiations that are initiated on behalf of a different party than the initiating party.

Data Type: Max128Text

Format: maxLength: 128
minLength: 1

1.4 ControlSum <CtrlSum>

Presence: [0..1]

Definition: Total of all the individual instructed amounts included in the payment initiation.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

1.5 BatchBooking <BtchBookg>

Presence: [0..1]

Definition: Indicates that the initiating party requests a batch entry for the sum of the amounts of all transactions included in the payment initiation.

Data Type: *One of the following **BatchBookingIndicator** values must be used:*
MeaningWhenTrue: Identifies that the initiating party requests a batch entry for the sum of the amounts of all transactions in the initiation.
MeaningWhenFalse: Identifies that the initiating party requests a single entry for each of the transactions in the initiation.

1.6 NumberOfTransactions <NbOfTxs>

Presence: [0..1]

Definition: Number of individual transactions contained in the payment nitiation, ie, the number of occurrences of payment transaction.

Data Type: Max15NumericText

Format: [0-9]{1,15}

1.7 Grouping <Grpg>

Presence: [0..1]

Definition: Indicates that the common debit information in the transaction is included once and not repeated for each transaction.

Data Type: *One of the following **GroupingIndicator** values must be used:*
MeaningWhenTrue: Indicates that there is only one occurrence of the PaymentInformation block and several occurrences of the PaymentTransaction block.
MeaningWhenFalse: Indicates that there is the same number of occurrences of the PaymentInformation block and of the PaymentTransaction block.

1.8 InitiatingParty <InitgPty>

Presence: [1..1]

Definition: Party initiating the payment to an agent. In the payment context, this can either be the debtor (in a credit transfer), the creditor (in a direct debit), or a party that initiates the payment on behalf of the debtor or creditor. In the context of treasury, the party that instructs the trading party to execute a treasury deal on its behalf.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.9		Name	<Nm>	[0..1]	Text
1.10		PostalAddress	<PstlAdr>	[0..1]	+
1.11		Identification	<Id>	[0..1]	

1.9 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

1.10 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

1.11 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.12	{Or	OrganisationIdentification	<OrgId>	[1..1]	
1.20	Or}	PrivateIdentification	<PrvtId>	[1..2]	

1.12 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **1.11** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.13		BEI	<BEI>	[0..1]	Identifier
1.14		EANGLN	<EANGLN>	[0..1]	Identifier
1.15		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
1.16		DUNS	<DUNS>	[0..1]	Identifier
1.17		BankPartyIdentification	<BkPtyId>	[0..1]	Text
1.18		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
1.19		ProprietaryIdentification	<PrtryId>	[0..1]	+

1.13 BEI <BEI>

Presence: [0..1]
Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

1.14 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

1.15 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

1.16 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

1.17 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.18 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.19 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

1.20 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **1.11** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.21	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
1.22	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
1.23	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
1.24	Or	PassportNumber	<PsptNb>	[1..1]	Text
1.25	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
1.26	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
1.27	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
1.28	Or}	OtherIdentification	<OthrId>	[1..1]	+
1.29		Issuer	<Issr>	[0..1]	Text

1.21 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.22 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*

Definition: Number assigned by a social security agency.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.23 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)

Presence: [1..1]

*This message item is part of choice **1.20** PrivateIdentification.*

Definition: Number assigned by a government agency to identify foreign nationals.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.24 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)

Presence: [1..1]

*This message item is part of choice **1.20** PrivateIdentification.*

Definition: Number assigned by a passport authority to a passport.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.25 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)

Presence: [1..1]

*This message item is part of choice **1.20** PrivateIdentification.*

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.26 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]

*This message item is part of choice **1.20** PrivateIdentification.*

Definition: Number assigned by a national authority to an identity card.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.27 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)

Presence: [1..1]

*This message item is part of choice **1.20** PrivateIdentification.*

Definition: Number assigned to an employer by a registration authority.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.28 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **1.20** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

1.29 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.30 ForwardingAgent <FwdgAgt>

Presence: [0..1]
Definition: Financial Institution that receives the payment instruction from the initiating party and forwards it to the first agent in the payment chain.
Type: *This message item is composed of one of the following **FinancialInstitutionIdentification2Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	BIC	<BIC>	[1..1]	Identifier
Or	ClearingSystemMemberIdentification	<ClrSysMmbId>	[1..1]	
Or}	ProprietaryIdentification	<PrtryId>	[1..1]	

For additional Type information, please refer to FinancialInstitutionIdentification2Choice p.293 in 'Message Item Types' section

2.0 PaymentInformation <PmtInf>

Presence: [1..n]
Definition: Set of characteristics that applies to the debit side of the payment transactions included in the payment initiation.
Type: *The **PaymentInformation** block is composed of the following **PaymentInformation8** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		RequestedExecutionDate	<ReqdExctnDt>	[1..1]	DateTime
2.2		CreditTransferTypeIdentification	<CdtTrfTpId>	[0..1]	
2.11		Debtor	<Dbtr>	[0..1]	
2.33		DebtorCountryOfResidence	<DbtrCtryOfRes>	[0..1]	Code
2.34		DebtorAccount	<DbtrAcct>	[1..1]	
2.39		FirstAgent	<FrstAgt>	[1..1]	+
2.40		ChargesAccount	<ChrgsAcct>	[0..1]	
2.45		ChargesAccountAgent	<ChrgsAcctAgt>	[0..1]	+
2.46		PaymentTransaction	<PmtTx>	[0..n]	

Rule(s): ChargesAccountAgentRule
If ChargesAccountAgent is present, it must contain a branch of the FirstAgent. It must not contain a completely different financial institution.

ChargesAccountRule
If ChargesAccountAgent is present, then ChargesAccount is mandatory.
If ChargesAccountAgent is not present, then ChargesAccount is optional.

2.1 RequestedExecutionDate <ReqdExctnDt>

Presence: [1..1]
Definition: Date at which the initiating party requests that the payment instruction be processed.

Usage: This is the date on which the debtor's account(s) is (are) to be debited.
Data Type: ISODate

2.2 CreditTransferTypeIdentification <CdtTrfTpId>

Presence: [0..1]
Definition: Set of elements that further identifes the type of credit transfer being requested by the initiating party.
Type: *This message item is composed of the following **CreditTransferTypeIdentification** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.3	{Or	Code	<Cd>	[0..1]	Code
2.4	Or}	LocalInstrument	<LclInstrm>	[0..1]	Text
2.5		InstructionPriority	<InstrPrty>	[0..1]	Code
2.6		SettlementPriority	<SttlmPrty>	[0..1]	

2.3 Code <Cd>

Presence: [0..1]
*This message item is part of choice **2.2** CreditTransferTypeIdentification.*
Definition: Type of transaction that resulted in the payment initiation in coded form.

Data Type: Code

*When this message item is present, one of the following **CreditTransferType2Code** values must be used:*

Code	Name	Definition
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CORT	TradeSettlementPayment	Transaction is related to settlement of a trade, eg a foreign exchange deal or a securities transaction.
DIVI	Dividend	Transaction is the payment of dividends.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to the payment of a hedging operation.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is the payment of interest.
LOAN	Loan	Transaction is related to the transfer of a loan to a borrower.
PENS	PensionPayment	Transaction is the payment of pension.
SALA	SalaryPayment	Transaction is the payment of salaries.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes.
TRAD	Trade	Transaction is related to the payment of a trade transaction.
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.

2.4 LocalInstrument <LclInstrm>

Presence: [0..1]

*This message item is part of choice **2.2** CreditTransferTypeIdentification.*

Definition: Credit transfer type that is specific to a user community and is required for use within that user community.

Usage : When available, codes provided by local authorities should be used in the Max35Text format.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.5 InstructionPriority <InstrPrty>

Presence: [0..1]

Definition: Urgency or order of importance that the originator would like the recipient of the payment instruction to apply to the processing of the payment instruction.
Usage: This priority relates to queue processing and queue management by forwarding or first agent.

Data Type: Code

*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.6 SettlementPriority <SttlmPrty>

Presence: [0..1]

Definition: Priority with which or the system through which the agents in the payment chain will clear and settle the payment transaction.

Type: *This message item is composed of one of the following **SettlementPriorityChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.7	{Or	Priority	<Prty>	[1..1]	Code
2.8	Or}	PaymentScheme	<PmtSchme>	[1..1]	

2.7 Priority <Prty>

Presence: [1..1]

*This message item is part of choice **2.6** SettlementPriority.*

Definition: Priority with which all agents in the payment chain must clear and settle the payment transaction

Data Type: Code

*One of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.8 PaymentScheme <PmtSchme>

Presence: [1..1]

*This message item is part of choice **2.6** SettlementPriority.*

Definition: Pre-agreed offering between clearing agents, or the channel through which the payment instruction is to be processed. This payment scheme can point to a specific rulebook governing the rules of clearing and settlement between two parties.

Type: *This message item is composed of one of the following **PaymentSchemeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.9	{Or	Code	<Cd>	[1..1]	Code
2.10	Or}	ProprietaryInformation	<PrtryInf>	[1..1]	Text

2.9 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.8** PaymentScheme.*

Definition: Specifies the channel through which the payment instruction is to be processed in coded form.

Data Type: Code

*One of the following **CashClearingSystem2Code** values must be used:*

Code	Name	Definition
ACH	ACH	Automated Clearing House. Payment system that clears cash transfers and settles the proceeds in a lump sum, usually on a multilateral netting basis.
CHI	CHIPS	CHIPS is the Clearing House Interbank Payment System.
FDN	FedNet	FedNet is a link to a Federal Bank account via the internet. FedNet enables checking of account balance, transactions, take print outs of account statement, transfer funds to third party accounts, E-shopping, BSNL Payments, Deposit opening, Deposit Renewal, Request for Demand Draft, Cheque Book etc.
RTG	RTGS	Real Time Gross Settlement System. Payment system that simultaneously clears individual transfers and settles them in central bank money.

2.10 ProprietaryInformation <PrtryInf>

Presence: [1..1]

*This message item is part of choice **2.8** PaymentScheme.*

Definition: Channel that is specific to a user community and is required for use within that user community.

Usage : if the channel is included in the list of codes provided for the payment scheme, the code element should be used instead of the proprietary element.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.11 Debtor <Dbtr>

Presence: [0..1]

Definition: Party that owes an amount of money to the creditor. In the context of the payment model, the debtor is also the debit account owner.

Usage : If required for legal reasons, this element must be present.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.12		Name	<Nm>	[0..1]	Text
2.13		PostalAddress	<PstlAdr>	[0..1]	+
2.14		Identification	<Id>	[0..1]	

2.12 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.13 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.14 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.15	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.23	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.15 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.14** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.16		BEI	<BEI>	[0..1]	Identifier
2.17		EANGLN	<EANGLN>	[0..1]	Identifier
2.18		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.19		DUNS	<DUNS>	[0..1]	Identifier
2.20		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.21		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.22		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.16 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.17 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.18 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.19 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.20 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.21 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.22 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.

Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.23 PrivateIdentification <PrvtId>

Presence: [1..2]

*This message item is part of choice **2.14** Identification.*

Definition: Unique and unambiguous identification of a person, eg, passport.

Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.24	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.25	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.26	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.27	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.28	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.29	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.30	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.31	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.32		Issuer	<Issr>	[0..1]	Text

2.24 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.25 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.26 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.27 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.28 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.29 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.30 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.31 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.23** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.32 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.33 DebtorCountryOfResidence <DbtrCtryOfRes>

Presence: [0..1]

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

2.34 DebtorAccount <DbtrAcct>

Presence: [1..1]

Definition: Account to or from which a cash entry is made.

Type: *This message item is composed of the following **CashAccount3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.35		Identification	<Id>	[1..1]	+
2.36		Type	<Tp>	[0 ..1]	Code
2.37		Currency	<Ccy>	[0..1]	Code
2.38		Name	<Nm>	[0..1]	Text

2.35 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.

Type: *This message item is composed of one of the following **AccountIdentification1Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier
Or}	DomesticAccount	<DmstAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification1Choice p.278 in 'Message Item Types' section

2.36 Type <Tp>

Presence: [0 ..1]

Definition: Nature, or use, of the account.

Data Type: Code

*When this message item is present, one of the following **CashAccountType3Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SVGS	Savings	Account used for savings.

2.37 Currency <Ccy>

Presence: [0..1]

Definition: Identification of the currency in which the debtor's account is held.

Usage: Currency should only be used in case one and the same debtor's account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

2.38 Name <Nm>

Presence: [0..1]

Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.39 FirstAgent <FrstAgt>

Presence: [1..1]

Definition: Financial institution that receives the payment transaction from the account owner or other authorised party, and processes the instruction.

Usage : in a credit transfer context, the first agent is the account servicer of the debtor. In a direct debit context, the first agent is the account servicer of the creditor.

Type: *This message item is composed of one of the following* ***FinancialInstitutionIdentification2Choice*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	BIC	<BIC>	[1..1]	Identifier

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
Or	ClearingSystemMemberIdentification	<ClrSysMmbId>	[1..1]	
Or}	ProprietaryIdentification	<PrtryId>	[1..1]	

For additional Type information, please refer to FinancialInstitutionIdentification2Choice p.293 in 'Message Item Types' section

2.40 ChargesAccount <ChrgsAcct>

Presence: [0..1]
Definition: Account used to process charges associated with a transaction.

Usage : charges account should be used when charges have to be booked to an account different from the account identified in debtor's account.

Type: *This message item is composed of the following **CashAccount3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.41		Identification	<Id>	[1..1]	+
2.42		Type	<Tp>	[0 ..1]	Code
2.43		Currency	<Ccy>	[0..1]	Code
2.44		Name	<Nm>	[0..1]	Text

2.41 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following **AccountIdentification1Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier
Or}	DomesticAccount	<DmstAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification1Choice p.278 in 'Message Item Types' section

2.42 Type <Tp>

Presence: [0 ..1]
Definition: Nature, or use, of the account.
Data Type: Code
*When this message item is present, one of the following **CashAccountType3Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SVGS	Savings	Account used for savings.

2.43 Currency <Ccy>

Presence: [0..1]

Definition: Identification of the currency in which the debtor's account is held.

Usage: Currency should only be used in case one and the same debtor's account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

2.44 Name <Nm>

Presence: [0..1]

Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.45 ChargesAccountAgent <ChrgsAcctAgt>

Presence: [0..1]

Definition: Agent that services a charges account.

Usage : charges account agent should only be used when the charges account agent is different from the first agent.

Type: *This message item is composed of one of the following* ***FinancialInstitutionIdentification2Choice*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	BIC	<BIC>	[1..1]	Identifier

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
Or	ClearingSystemMemberIdentification	<ClrSysMmbId>	[1..1]	
Or}	ProprietaryIdentification	<PrtryId>	[1..1]	

For additional Type information, please refer to FinancialInstitutionIdentification2Choice p.293 in 'Message Item Types' section

2.46 PaymentTransaction <PmtTx>

Presence: [0..n]
Definition: Payment processes required to transfer cash from the debtor to the creditor.
Type: *This message item is composed of the following **GenericPaymentTransaction1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.47		PaymentIdentification	<PmtId>	[1..1]	
2.51		Purpose	<Purp>	[0..1]	
2.54		Amount	<Amt>	[1..1]	
2.59		Creditor	<Cdtr>	[0..1]	
2.81		CreditorCountryOfResidence	<CdtrCtryOfRes>	[0..1]	Code
2.82		CreditorAccount	<CdtrAcct>	[1..1]	+
2.83		FinalAgent	<FnlAgt>	[1..1]	+
2.84		ChargeBearer	<ChrgBr>	[1..1]	Code
2.85		ExchangeContractReference	<XchgCtrctRef>	[0..1]	Text
2.86		RemittanceInformation	<RmtInf>	[0..1]	

2.47 PaymentIdentification <PmtId>

Presence: [1..1]
Definition: Set of elements used to provide further means of referencing a payment transaction.
Type: *This message item is composed of the following **PaymentIdentification** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.48		InstructionIdentification	<InstrId>	[0..1]	Text
2.49		EndToEndIdentification	<EndToEndId>	[1..1]	Text
2.50		PaymentRemittanceIdentification	<PmtRmtId>	[0..1]	Text

2.48 InstructionIdentification <InstrId>

Presence: [0..1]
Definition: Unique and unambiguous identifier for a payment instruction assigned by the initiating party.

Usage: the instruction identification can be used between the initiating party and the receiving agent to refer to the individual instruction. It can be used in several messages, eg, status messages, debit advices or account statement messages.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.49 EndToEndIdentification <EndToEndId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a payment transaction, as assigned by any of the parties on the initiating side, that will be passed on throughout the entire end-to-end chain.

Usage: the end-to-end identification can be used for reconciliation or to link tasks relating to the payment transaction and can be included in several related messages to the payment transaction between forwarding or first agent and debtor or initiating party, and between final agent and creditor.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.50 PaymentRemittanceIdentification <PmtRmtId>

Presence: [0..1]

Definition: Unique and unambiguous identification of remittance information which is sent separately from the payment initiation information.

Usage: the payment remittance identification is used to link separately sent remittance information to the payment transaction information included in the payment initiation.

If the business context requires the use of a creditor's reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.51 Purpose <Purp>

Presence: [0..1]

Definition: Underlying reason for the payment transaction, eg, a charity payment, or a commercial agreement between the creditor and the debtor.

Usage: purpose is used by the end-customers, ie originating party, initiating party, debtor, creditor, final party, to provide information concerning the nature of the payment transaction. Purpose is a content element, which is not used for processing by any of the agents involved in the payment chain.

Type: *This message item is composed of one of the following **PurposeChoice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.52	{Or	Proprietary	<Prtry>	[1..1]	Text
2.53	Or}	Code	<Cd>	[1..1]	Code

2.52 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.51** Purpose.*

Definition: Payment transaction purpose that is specific to a user community and is required for use within that user community.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.53 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.51** Purpose.*

Definition: Specifies the type of transaction that resulted in the payment initiation in coded form

Data Type: Code

*One of the following **PaymentPurpose1Code** values must be used:*

Code	Name	Definition
ADVA	AdvancePayment	Transaction is an advance payment.
AGRT	AgriculturalTransfer	Transaction is related to the agricultural domain.
ALMY	AlimonyPayment	Transaction is the payment of alimony.
BECH	ChildBenefit	Transaction is related to a payment made to assist parent/ guardian to maintain child.
BENE	UnemploymentDisabilityBenefit	Transaction is related to a payment to a person who is unemployed/disabled.
BONU	BonusPayment.	Transaction is related to payment of a bonus.
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CBFF	CapitalBuilding	Transaction is related to capital building fringe fortune, ie capital building for retirement.
CHAR	CharityPayment	Transaction is a payment for charity reasons.
CMDT	CommodityTransfer	Transaction is payment of commodities.
COLL	CollectionPayment	Collection of funds initiated via a credit transfer.
COMC	CommercialCredit	Transaction is payment of commercial credit.
COMM	Commission	Transaction is payment of commission.
COMT	ConsumerThirdPartyConsolidatedPayment	Payment used by a third party who can collect funds to pay on behalf of consumers, ie credit counseling or bill payment companies.
COST	Costs	Transaction is related to payment of costs.
CPYR	Copyright	Transaction is payment of copyright.
DBTC	DebitCollectionPayment	Collection of funds initiated via a debit transfer.
DIVI	Dividend	Transaction is payment of dividends.
FREX	ForeignExchange	Transaction is related to a foreign exchange operation.
GDDS	PurchaseSaleOfGoods	Transaction is related to purchase and sale of goods.

Code	Name	Definition
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to a hedging operation.
IHRP	InstalmentHirePurchaseAgreement	Transaction is payment for an installment/hire-purchase agreement.
INSU	InsurancePremium	Transaction is payment of an insurance premium.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is payment of interest.
LICF	LicenseFee	Transaction is payment of a license fee.
LOAN	Loan	Transaction is related to transfer of loan to borrower.
LOAR	LoanRepayment	Transaction is related to repayment of loan to lender.
NETT	Netting	Transaction is related to a netting operation.
PAYR	Payroll	Transaction is related to the payment of payroll.
PENS	PensionPayment	Transaction is the payment of pension.
REFU	Refund	Transaction is the payment of a refund.
RENT	Rent	Transaction is the payment of rent.
ROYA	Royalties	Transaction is the payment of royalties.
SALA	SalaryPayment	Transaction is the payment of salaries.
SCVE	PurchaseSaleOfServices	Transaction is related to purchase and sale of services.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUBS	Subscription	Transaction is the payment of a subscription.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.

2.54 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between the debtor and creditor, before charges.

Type: *This message item is composed of one of the following* ***AmountType1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.55	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount
2.56	Or}	EquivalentAmount	<EqvtAmt>	[1..1]	

2.55 InstructedAmount <InstdAmt>

Presence: [1..1]

*This message item is part of choice **2.54** Amount.*

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account or in another currency..

Usage : Currency of the amount is expressed in the currency (or one of the currencies) of the debtor's account or another currency, eg, pay 1000000 EUR (and debtor's account is is EUR) or pay 1000000 JPY (and debtor's account is in EUR).

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.56 EquivalentAmount <EqvtAmt>

Presence: [1..1]

*This message item is part of choice **2.54** Amount.*

Definition: Amount of money to be transferred between the debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred into a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Type: *This message item is composed of the following **EquivalentAmount** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.57		Amount	<Amt>	[1..1]	Amount
2.58		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code

2.57 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred in a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**

fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.58 CurrencyOfTransfer <CcyOfTrf>

Presence: [1..1]

Definition: Specifies the currency of the to be transferred amount, which is different from the currency of the debtor's account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

2.59 Creditor <Cdtr>

Presence: [0..1]

Definition: Party that receives an amount of money from the debtor. In the context of the payment model, the creditor is also the credit account owner.

Usage : creditor must always be present, unless local regulations stipulate otherwise.

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.60		Name	<Nm>	[0..1]	Text
2.61		PostalAddress	<PstlAdr>	[0..1]	+
2.62		Identification	<Id>	[0..1]	

2.60 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.61 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.62 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.63	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.71	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.63 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.62** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.64		BEI	<BEI>	[0..1]	Identifier
2.65		EANGLN	<EANGLN>	[0..1]	Identifier
2.66		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.67		DUNS	<DUNS>	[0..1]	Identifier
2.68		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.69		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.70		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.64 BEI <BEI>

Presence: [0..1]
Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters)

as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.65 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.66 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.67 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.68 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.69 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.70 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.71 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **2.62** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.72	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.73	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.74	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.75	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.76	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.77	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.78	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.79	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.80		Issuer	<Issr>	[0..1]	Text

2.72 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.73 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.74 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.75 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.76 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.77 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.71** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.78 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)

Presence: [1..1]

*This message item is part of choice **2.71** PrivateIdentification.*

Definition: Number assigned to an employer by a registration authority.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.79 OtherIdentification <OthrId>

Presence: [1..1]

*This message item is part of choice **2.71** PrivateIdentification.*

Definition: Identifier issued to a person for which no specific identifier has been defined.

Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.80 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identifier.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.81 CreditorCountryOfResidence <CdtrCtryOfRes>

Presence: [0..1]

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

2.82 CreditorAccount <CdtrAcct>

Presence: [1..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Type: *This message item is composed of one of the following **AccountIdentification1Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	IBAN	<IBAN>	[1..1]	Identifier
Or	BBAN	<BBAN>	[1..1]	Identifier
Or	UPIC	<UPIC>	[1..1]	Identifier
Or}	DomesticAccount	<DmstAcct>	[1..1]	

For additional Type information, please refer to AccountIdentification1Choice p.278 in 'Message Item Types' section

2.83 FinalAgent <FnlAgt>

Presence: [1..1]

Definition: Financial institution that receives the payment transaction on behalf of an account owner, and posts the transaction to the account.

Usage : in a credit transfer context, the final agent is the account servicer of the creditor. In a direct debit context, the final agent is the account servicer of the debtor.

Type: *This message item is composed of one of the following **FinancialInstitutionIdentification2Choice** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
{Or	BIC	<BIC>	[1..1]	Identifier
Or	ClearingSystemMemberIdentification	<ClrSysMmbId>	[1..1]	
Or}	ProprietaryIdentification	<PrtryId>	[1..1]	

For additional Type information, please refer to FinancialInstitutionIdentification2Choice p.293 in 'Message Item Types' section

2.84 ChargeBearer <ChrgBr>

Presence: [1..1]

Definition: Specifies if the creditor and/or debtor will bear the charges associated with the processing of the payment transaction.

Data Type: Code

*One of the following **ChargeBearer1Code** values must be used:*

Code	Name	Definition
BEN	BorneByCreditor	All transaction charges are to be borne by the creditor.
OUR	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHA	Shared	Under the credit transfer scenario, transaction charges on the sender's side are to be borne by the debtor; transaction charges on the receiver's side are to be borne by the creditor.

2.85 ExchangeContractReference <XchgCtrctRef>

Presence: [0..1]

Definition: Unique and unambiguous reference to the foreign exchange contract agreed between the initiating party and the first agent.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.86 RemittanceInformation <RmtInf>

Presence: [0..1]

Definition: Structured information that enables the matching, ie, reconciliation, of a payment with the items that the payment is intended to settle, eg, commercial invoices in an account receivable system.

Type: *This message item is composed of one of the following **RemittanceInformation3Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.87	{Or	Unstructured	<Ustrd>	[1..1]	Text
2.88	Or}	Structured	<Strd>	[1..1]	

2.87 Unstructured <Ustrd>

Presence: [1..1]

*This message item is part of choice **2.86** RemittanceInformation.*

Definition: Information, in free text form, to enable the matching, ie reconciliation, (reconciliation) of a payment with the items that the payment is intended to settle, such as commercial invoices in an accounts receivable system.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.88 Structured <Strd>

Presence: [1..1]

*This message item is part of choice **2.86** RemittanceInformation.*

Definition: Information in structured form, that is supplied to enable the matching, ie, reconciliation, of a payment with the items that the payment is intended to settle, eg, commercial invoices in an account receivable system.

Type: *This message item is composed of the following **StructuredRemittanceInformation2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.89		ReferredDocumentType	<RfrdDocTp>	[0..1]	Code
2.90		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime
2.91		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]	
2.97		DocumentReferenceNumber	<DocRefNb>	[0..1]	Text
2.98		CreditorReference	<CdtrRef>	[0..1]	Text
2.99		Invoicer	<Invcr>	[0..1]	
2.121		Invoicee	<Invcee>	[0..1]	

2.89 ReferredDocumentType <RfrdDocTp>

Presence: [0..1]

Definition: Specifies the nature of the referred document/transaction, eg, invoice or credit note.

Data Type: Code

*When this message item is present, one of the following **DocumentType1Code** values must be used:*

Code	Name	Definition
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.

2.90 ReferredDocumentRelatedDate <RfrdDocRltdDt>

Presence: [0..1]

Definition: Date associated with the referred document, eg, date of issue.

Data Type: ISODate

2.91 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..n]

Definition: Amount of money and currency of a document referred to in the remittance section. The amount is typically either the original amount due and payable, or the amount actually remitted for the referred document.

Type: *This message item is composed of one of the following **ReferredDocumentAmount1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.92	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount
2.93	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount
2.94	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount
2.95	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount
2.96	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount

2.92 DuePayableAmount <DuePyblAmt>

Presence: [1..1]

*This message item is part of choice **2.91** ReferredDocumentAmount.*

Definition: Amount specified is the exact amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.93 DiscountAppliedAmount <DscntApldAmt>

Presence: [1..1]

*This message item is part of choice **2.91** ReferredDocumentAmount.*

Definition: Amount of money resulting from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.94 RemittedAmount <RmtdAmt>

Presence: [1..1]

*This message item is part of choice **2.91** ReferredDocumentAmount.*

Definition: Amount of money remitted for the referred document.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.95 CreditNoteAmount <CdtNoteAmt>

Presence: [1..1]

*This message item is part of choice **2.91** ReferredDocumentAmount.*

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.96 TaxAmount <TaxAmt>

Presence: [1..1]

*This message item is part of choice **2.91** ReferredDocumentAmount.*

Definition: Quantity of cash resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.97 DocumentReferenceNumber <DocRefNb>

Presence: [0..1]

Definition: Unique and unambiguous identification of a document that distinguishes that document from another document referred to in the remittance information, usually assigned by the originator of the referred document/transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.98 CreditorReference <CdtrRef>

Presence: [0..1]

Definition: Unique and unambiguous reference assigned by the creditor to refer to the payment transaction.

Usage: if available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the cash.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.99 Invoicer <Invcr>

Presence: [0..1]

Definition: Identification of the organization issuing the invoice when different than the creditor or final party

Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.100		Name	<Nm>	[0..1]	Text
2.101		PostalAddress	<PstlAdr>	[0..1]	+
2.102		Identification	<Id>	[0..1]	

2.100 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.101 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Postal address of a party.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.102 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.103	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.111	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.103 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.102** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.104		BEI	<BEI>	[0..1]	Identifier
2.105		EANGLN	<EANGLN>	[0..1]	Identifier
2.106		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.107		DUNS	<DUNS>	[0..1]	Identifier
2.108		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.109		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.110		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.104 BEI <BEI>

Presence: [0..1]
Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).
Data Type: BEIIdentifier
Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s): BEI

Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.105 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.106 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.107 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.108 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.109 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.110 ProprietaryIdentification <PrtryId>

Presence: [0..1]

Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.111 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **2.102** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.112	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.113	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.114	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.115	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.116	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.117	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.118	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.119	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.120		Issuer	<Issr>	[0..1]	Text

2.112 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.113 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.114 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.115 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.116 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.117 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.118 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35

minLength: 1

2.119 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.111** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.120 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.121 Invoicee <Invcee>

Presence: [0..1]
Definition: Identification of the party to whom an invoice is issued, when different than the originator or debtor.
Type: *This message item is composed of the following **PartyIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.122		Name	<Nm>	[0..1]	Text
2.123		PostalAddress	<PstlAdr>	[0..1]	+
2.124		Identification	<Id>	[0..1]	

2.122 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.123 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.299 in 'Message Item Types' section

2.124 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a party.
Type: *This message item is composed of one of the following **Party1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.125	{Or	OrganisationIdentification	<OrgId>	[1..1]	
2.133	Or}	PrivateIdentification	<PrvtId>	[1..2]	

2.125 OrganisationIdentification <OrgId>

Presence: [1..1]
*This message item is part of choice **2.124** Identification.*
Definition: Unique and unambiguous way of identifying an organisation.
Type: *This message item is composed of the following **NonFinancialInstitutionIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.126		BEI	<BEI>	[0..1]	Identifier
2.127		EANGLN	<EANGLN>	[0..1]	Identifier
2.128		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
2.129		DUNS	<DUNS>	[0..1]	Identifier
2.130		BankPartyIdentification	<BkPtyId>	[0..1]	Text
2.131		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
2.132		ProprietaryIdentification	<PrtryId>	[0..1]	+

2.126 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

2.127 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve detailed information linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

2.128 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

2.129 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

2.130 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.131 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]

Definition: Number assigned by a tax authority to an entity.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.132 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	Issuer	<Issr>	[0..1]	Text

For additional Type information, please refer to GenericIdentification3 p.280 in 'Message Item Types' section

2.133 PrivateIdentification <PrvtId>

Presence: [1..2]
*This message item is part of choice **2.124** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.134	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
2.135	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
2.136	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
2.137	Or	PassportNumber	<PsptNb>	[1..1]	Text
2.138	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
2.139	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
2.140	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
2.141	Or}	OtherIdentification	<OthrId>	[1..1]	+
2.142		Issuer	<Issr>	[0..1]	Text

2.134 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.133** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.135 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.133** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.136 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.133** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.137 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.133** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.138 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.133** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.139 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **2.133** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.140 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **2.133** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.141 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **2.133** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	Text
	IdentificationType	<IdTp>	[1..1]	Text

For additional Type information, please refer to GenericIdentification4 p.281 in 'Message Item Types' section

2.142 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

Business Example

Narrative

On 18 October, Company Finpetrol sends an STPCreditTransferInitiation message to its account servicer, AAAASESS.
The initiation contains two payment transactions to be paid to different creditors.
Payment transaction 1 is for account CH3900700115201849173 of creditor Muller at bank BBBBCHZZ. Payment is for invoices XYZ/1 and XYZ/2.
Payment transaction 2 is for account CH3900762011623852957 of creditor Thomas at bank CCCCCHZZ. Payment is for rent November.
Charges related to the execution of the payments will be shared between the debtor and creditor.
The requested execution date is 20 October 2005.
Company Finpetrol would like to have one entry for both transactions on its account SE3550000000054910000003.
Corporate customers of AAAASESS do not group information from individual payment transactions, but include full details for each individual transaction.

Business Description

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
GroupIdentification	<GrpId>	FP001
CreationDateTime	<CredDtTm>	2005-10-18T13:20:00+01:00
BatchBooking	<BtchBookg>	true
NumberOfTransactions	<NbOfTxs>	2
Grouping	<Grpg>	false
InitiatingParty	<InitgPty>	
Name	<Nm>	FINPETROL
PaymentInformation	**<PmtInf>**	
RequestedExecutionDate	<ReqdExctnDt>	2005-10-20
Debtor	<Dbtr>	
Name	<Name>	FINPETROL
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	STUREPLAN
BuildingNumber	<BldgNb>	12
PostCode	<PstCd>	11145
TownName	<TwnNm>	STOCKHOLM
Country	<Ctry>	SE
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	SE3550000000054910000003
FirstAgent	<FrstAgt>	
BIC	<BIC>	AAAASESS
PaymentTransaction	**<PmtTx>**	
PaymentIdentification	<PmtId>	
InstructionIdentification	<InstrId>	FP/FIN001
EndToEndIdentification	<EndToEndId>	FP/MU00001
Amount	<Amt>	
InstructedAmount	<InstdAmt Ccy=CHF>	105678.50
Creditor	<Cdtr>	
Name	<Nm>	MULLER
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	BAHNHOFSTRASSE
BuildingNumber	<BldgNb>	12
PostCode	<PstCd>	8006
TownName	<TwnNm>	ZURICH

Country	<Ctry>	CH
CreditorAccount	<CdtrAcct>	
IBAN	<IBAN>	CH3900700115201849173
FinalAgent	<FnlAgt>	
BIC	<BIC>	BBBBCHZZ
ChargeBearer	<ChrgBr>	SHA
RemittanceInformationt	<RmtInf>	
Structured	<Strd>	
ReferredDocType	<RfrdDocTp>	CINV
DocumentReferenceNumber	<DocRefNb>	XYZ/1//XYZ/2
PaymentInformation	**<PmtInf>**	
RequestedExecutionDate	<ReqdExctnDt>	2005-10-20
Debtor	<Dbtr>	
Name	<Name>	FINPETROL
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	STUREPLAN
BuildingNumber	<BldgNb>	12
PostCode	<PstCd>	11145
TownName	<TwnNm>	STOCKHOLM
Country	<Ctry>	SE
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	SE3550000000054910000003
FirstAgent	<FrstAgt>	
BIC	<BIC>	AAAASESS
PaymentTransaction	**<PmtTx>**	
PaymentIdentification	<PmtId>	
InstructionIdentification	<InstrId>	FP/FIN002
EndToEndIdentification	<EndToEndId>	THO/RENT
Amount	<Amt>	
InstructedAmount	<InstdAmt Ccy=CHF>	3000
Creditor	<Cdtr>	
Name	<Nm>	THOMAS
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	URANIASTRASSE
BuildingNumber	<BldgNb>	1
PostCode	<PstCd>	8023

TownName	<TwnNm>	ZURICH
Country	<Ctry>	CH
CreditorAccount	<CdtrAcct>	
IBAN	<IBAN>	CH3900762011623852957
FinalAgent	<FnlAgt>	
BIC	<BIC>	CCCCCHZZ
ChargeBearer	<ChrgBr>	SHA
RemittanceInformationt	<RmtInf>	
Unstructured	<Ustrd>	RENT NOVEMBER 2005

XML Instance


```
<pain.001.002.01>
  <GrpHdr>
    <GrpId>FP001</GrpId>
    <CreDtTm>2005-10-18T13:20:00+01:00</CreDtTm>
    <BtchBookg>true</BtchBookg>
    <NbOfTxs>2</NbOfTxs>
    <Grpg>false</Grpg>
    <InitgPty>
      <Nm>FINPETROL</Nm>
    </InitgPty>
  </GrpHdr>
  <PmtInf>
    <ReqdExctnDt>2005-10-20</ReqdExctnDt>
    <Dbtr>
      <Nm>FINPETROL</Nm>
      <PstlAdr>
        <StrtNm>STUREPLAN</StrtNm>
        <BldgNb>12</BldgNb>
        <PstCd>11145</PstCd>
        <TwnNm>STOCKHOLM</TwnNm>
        <Ctry>SE</Ctry>
      </PstlAdr>
    </Dbtr>
    <DbtrAcct>
      <Id>
        <IBAN>SE3550000000054910000003</IBAN>
      </Id>
    </DbtrAcct>
    <FrstAgt>
      <BIC>AAAASESS</BIC>
    </FrstAgt>
    <PmtTx>
      <PmtId>
        <InstrId>FP/FIN001</InstrId>
        <EndToEndId>FP/MU00001</EndToEndId>
      </PmtId>
```

```
        <Amt>
          <InstdAmt Ccy = "CHF">105678.50</InstdAmt>
        </Amt>
        <Cdtr>
          <Nm>MULLER</Nm>
          <PstlAdr>
            <StrtNm>BAHNHOFSTRASSE</StrtNm>
            <BldgNb>12</BldgNb>
            <PstCd>8006</PstCd>
            <TwnNm>ZURICH</TwnNm>
            <Ctry>CH</Ctry>
          </PstlAdr>
        </Cdtr>
        <CdtrAcct>
          <IBAN>CH3900700115201849173</IBAN>
        </CdtrAcct>
        <FnlAgt>
          <BIC>BBBBCHZZ</BIC>
        </FnlAgt>
        <ChrgBr>SHA</ChrgBr>
        <RmtInf>
          <Strd>
            <RfrdDocTp>CINV</RfrdDocTp>
            <DocRefNb>XYZ/1//XYZ/2</DocRefNb>
          </Strd>
        </RmtInf>
      </PmtTx>
    </PmtInf>
    <PmtInf>
      <ReqdExctnDt>2005-10-20</ReqdExctnDt>
      <Dbtr>
        <Nm>FINPETROL</Nm>
        <PstlAdr>
          <StrtNm>STUREPLAN</StrtNm>
          <BldgNb>12</BldgNb>
          <PstCd>11145</PstCd>
          <TwnNm>STOCKHOLM</TwnNm>
          <Ctry>SE</Ctry>
        </PstlAdr>
      </Dbtr>
      <DbtrAcct>
        <Id>
          <IBAN>SE3550000000054910000003</IBAN>
        </Id>
      </DbtrAcct>
      <FrstAgt>
        <BIC>AAAASESS</BIC>
      </FrstAgt>
      <PmtTx>
        <PmtId>
          <InstrId>FP/FIN002</InstrId>
          <EndToEndId>THO/RENT</EndToEndId>
```

```
        </PmtId>
        <Amt>
          <InstdAmt Ccy = "CHF">3000</InstdAmt>
        </Amt>
        <Cdtr>
          <Nm>THOMAS</Nm>
          <PstlAdr>
            <StrtNm>URANIASTRASSE</StrtNm>
            <BldgNb>1</BldgNb>
            <PstCd>8023</PstCd>
            <TwnNm>ZURICH</TwnNm>
            <Ctry>CH</Ctry>
          </PstlAdr>
        </Cdtr>
        <CdtrAcct>
          <IBAN>CH3900762011623852957</IBAN>
        </CdtrAcct>
        <FnlAgt>
          <BIC>CCCCCHZZ</BIC>
        </FnlAgt>
        <ChrgBr>SHA</ChrgBr>
        <RmtInf>
          <Ustrd>RENT NOVEMBER 2005</Ustrd>
        </RmtInf>
      </PmtTx>
    </PmtInf>
  </pain.001.002.01>
```

Message Item Types

Data Types

Data Types Index

1 Amount

1.1 CurrencyAndAmount
1.2 ImpliedCurrencyAndAmount

2 Date Time

2.1 ISODate
2.2 ISODateTime

3 Identifier

3.1 AustrianBankleitzahlIdentifier
3.2 BBANIdentifier
3.3 BEIIdentifier
3.4 BICIdentifier
3.5 CHIPSParticipantIdentifier
3.6 CHIPSUniversalIdentifier
3.7 CanadianPaymentsARNIdentifier
3.8 CountryCode
3.9 CurrencyCode
3.10 DunsIdentifier
3.11 EANGLNIdentifier
3.12 ExtensiveBranchNetworkIdentifier
3.13 FedwireRoutingNumberIdentifier
3.14 GermanBankleitzahlIdentifier
3.15 HongKongBankIdentifier
3.16 IBANIdentifier
3.17 IrishNSCIdentifier
3.18 ItalianDomesticIdentifier
3.19 LanguageCode
3.20 MICIdentifier
3.21 NationalityCode
3.22 NewZealandNCCIdentifier
3.23 PortugueseNCCIdentifier
3.24 RussianCentralBankIdentificationCodeIdentifier
3.25 SmallNetworkIdentifier
3.26 SouthAfricanNCCIdentifier
3.27 SpanishDomesticInterbankingIdentifier
3.28 SwissBCIdentifier
3.29 SwissSICIdentifier
3.30 UKDomesticSortCodeIdentifier
3.31 UPICIdentifier

4 Quantity: Number and Decimal Number

4.1 DecimalNumber
4.2 Number

5 Rate

5.1 BaseOneRate
5.2 PercentageRate

6 Text

6.1 Max105Text
6.2 Max10Text
6.3 Max128Text
6.4 Max140Text
6.5 Max15NumericText
6.6 Max16Text
6.7 Max256Text
6.8 Max350Text
6.9 Max35Text
6.10 Max3Text
6.11 Max70Text

Data Types Description

1 Amount

1.1 CurrencyAndAmount

Definition:	Number of monetary units specified in a currency, where the unit of currency is explicit and compliant with ISO 4217. The decimal separator is a dot. Note: A zero amount is considered a positive amount.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***CurrencyCode****.*
Format:	**CurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **CurrencyCode** [A-Z]{3,3}
Rule(s):	**CurrencyCode** ValidationByTable
Example:	100000 (Ccy='EUR')

1.2 ImpliedCurrencyAndAmount

Definition:	Number of monetary units specified in a currency where the unit of currency is implied by the context and compliant with ISO 4217. The decimal separator is a dot. Note: a zero amount is considered a positive amount.
Format:	fractionDigits: 5 minInclusive: 0 totalDigits: 18
Example:	500000

2 Date Time

2.1 ISODate

Definition:	Date within a particular calendar year represented by YYYY-MM-DD (ISO 8601).
Example:	2002-02-25

2.2 ISODateTime

Definition:	Date and time within a particular calendar year represented by YYYY-MM-DDThh :mm :ss (ISO 8601).
Example:	2002-07-21T08:35:30

3 Identifier

3.1 AustrianBankleitzahlIdentifier

Definition:	Austrian Bankleitzahl. Identifies Austrian financial institutions on the Austrian national clearing system.
Format:	AT[0-9]{5,5}
Example:	AT12345

3.2 BBANIdentifier

Definition:	Basic Bank Account Number (BBAN). Identifier used nationally by financial institutions, ie, in individual countries, generally as part of a National Account Numbering Scheme(s), which uniquely identifies the account of a customer.
Format:	[a-zA-Z0-9]{1,30}
Example:	BARC12345612345678

3.3 BEIIdentifier

Definition:	Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BEI Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.
Example:	USINFRPP

3.4 BICIdentifier

Definition:	Bank Identifier Code. code allocated to a financial institution by a Registration Authority under an international identification scheme, as described in the latest edition of the

	international standard ISO 9362 "Banking - Banking telecommunication messages - Bank identifier codes".
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BIC Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.
Example:	CHASUS33

3.5 CHIPSParticipantIdentifier

Definition:	(United States) Clearing House Interbank Payment System (CHIPS) Participant Identifier (ID). Identifies financial institutions participating on CHIPS. The CHIPS Participant ID is assigned by the New York Clearing House.
Format:	CP[0-9]{4,4}
Example:	CP1234

3.6 CHIPSUniversalIdentifier

Definition:	(United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID). Identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.
Format:	CH[0-9]{6,6}
Example:	CH123456

3.7 CanadianPaymentsARNIdentifier

Definition:	Canadian Payments Association Routing Number. Identifies Canadian financial institutions on the Canadian national clearing system.
Format:	CA[0-9]{9,9}
Example:	CA123456789

3.8 CountryCode

Definition:	Code to identify a country, a dependency, or another area of particular geopolitical interest, on the basis of country names obtained from the United Nations (ISO 3166, Alpha-2 code).
Format:	[A-Z]{2,2}
Rule(s):	Country The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).
Example:	BE

3.9 CurrencyCode

Definition:	Code allocated to a currency, by a maintenance agency, under an international identification scheme as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds". Valid currency codes are registered with the ISO 4217 Maintenance Agency, and consist of three contiguous letters.
Format:	[A-Z]{3,3}
Rule(s):	ValidationByTable
Example:	AWG

3.10 DunsIdentifier

Definition:	Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.
Format:	[0-9]{9,9}
Example:	578942538

3.11 EANGLNIdentifier

Definition:	Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve the detailed information linked to it.
Format:	[0-9]{13,13}
Example:	7265658971233

3.12 ExtensiveBranchNetworkIdentifier

Definition:	The extensive branch network list of the Australian Bank State Branch (BSB) Code. The codes are used for identifying Australian financial institutions, as assigned by the Australian Payments Clearing Association (APCA).
Format:	AU[0-9]{6,6}
Example:	AU123456

3.13 FedwireRoutingNumberIdentifier

Definition:	Fedwire Routing Number. Identifies financial institutions, in the US, on the FedWire system. The routing number is assigned by the American Bankers Association (ABA).
Format:	FW[0-9]{9,9}
Example:	FW123456789

3.14 GermanBankleitzahlIdentifier

Definition:	German Bankleitzahl. Identifies German financial institutions on the German national clearing systems.
Format:	BL[0-9]{8,8}
Example:	BL12345678

3.15 HongKongBankIdentifier

Definition:	Hong Kong Bank Code. Identifies Hong Kong financial institutions on the Hong Kong local clearing system.
Format:	HK[0-9]{3,3}
Example:	HK123

3.16 IBANIdentifier

Definition:	An identifier used internationally by financial institutions to uniquely identify the account of a customer at a financial institution, as described in the latest edition of the international standard ISO 13616. "Banking and related financial services - International Bank Account Number (IBAN)".
Format:	[a-zA-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
Rule(s):	IBAN A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.
Example:	AT611904300234573201

3.17 IrishNSCIdentifier

Definition:	Irish National Sorting Code. Identifies Irish financial institutions on the Irish national clearing system.
Format:	IE[0-9]{6,6}
Example:	IE123456

3.18 ItalianDomesticIdentifier

Definition:	Italian Domestic Identification Code. Identifies Italian financial institutions on the Italian national clearing system. The code is assigned by the Associazione Bancaria Italiana (ABI).
Format:	IT[0-9]{10,10}
Example:	IT1234567890

3.19 LanguageCode

Definition:	Specifies a language.
Rule(s):	ValidationByTable
Example:	ENG

3.20 MICIdentifier

Definition:	Market Identifier Code. The identification of a financial market, as stipulated in the norm ISO 10383 'Codes for exchanges and market identifications'.
Format:	[A-Z0-9]{4,4}
Example:	XTKS

3.21 NationalityCode

Definition:	Specifies the country where a person was born or is naturalised.
Rule(s):	ValidationByTable
Example:	US

3.22 NewZealandNCCIdentifier

Definition:	New Zealand Bank/Branch Code. Identifies New Zealand institutions on the New Zealand national clearing system. The code is assigned by the New Zealand Bankers' Association (NZBA).
Format:	NZ[0-9]{6,6}
Example:	NZ123456

3.23 PortugueseNCCIdentifier

Definition:	Portuguese National Clearing Code. Identifies Portuguese financial institutions on the Portuguese national clearing system.
Format:	PT[0-9]{8,8}
Example:	PT12345678

3.24 RussianCentralBankIdentificationCodeIdentifier

Definition:	Russian Central Bank Identification Code. Identifies Russian financial institutions on the Russian national clearing system.
Format:	RU[0-9]{9,9}
Example:	RU123456789

3.25 SmallNetworkIdentifier

Definition:	The small network list of the Australian Bank State Branch (BSB) Code. The codes are used for identifying Australian financial institutions, as assigned by the Australian Payments Clearing Association (APCA).
Format:	AU[0-9]{6,6}
Example:	AU123456

3.26 SouthAfricanNCCIdentifier

Definition:	South African National Clearing Code (NCC). Identifies South African financial institutions on the South African national clearing system. The code is assigned by the South African Bankers Services Company Ltd. (BankServ).
Format:	ZA[0-9]{6,6}
Example:	ZA123456

3.27 SpanishDomesticInterbankingIdentifier

Definition:	Spanish Domestic Interbanking Code. Identifies Spanish financial institutions on the Spanish national clearing system. The code is assigned by the Centro de Cooperacion Interbancaria (CCI).

Format:	ES[0-9]{8,9}
Example:	ES12345678

3.28 SwissBCIdentifier

Definition:	Swiss Bank Code. Identifies Swiss institutions on the Swiss national clearing system.
Format:	SW[0-9]{3,5}
Example:	SW123

3.29 SwissSICIdentifier

Definition:	Swiss Interbank Clearing (SIC) Code. Identifies Swiss financial institutions domestically, on the Swiss national clearing system.
Format:	SW[0-9]{6,6}
Example:	SW123456

3.30 UKDomesticSortCodeIdentifier

Definition:	United Kingdom (UK) Sort Code. Identifies British financial institutions on the British national clearing systems. The sort code is assigned by the Association for Payments and Clearing Services (APACS).
Format:	SC[0-9]{6,6}
Example:	SC123456

3.31 UPICIdentifier

Definition:	Universal Payment Identification Code (UPIC). Identifier used by the New York Clearing House to mask confidential data, such as bank accounts and bank routing numbers. UPIC numbers remain with business customers, regardless of banking relationship changes.
Format:	[0-9]{8,17}
Example:	12345678

4 Quantity: Number and Decimal Number

4.1 DecimalNumber

Definition:	Number of objects represented as a decimal number, eg, 0.75 or 45.6.
Format:	fractionDigits: 17 totalDigits: 18
Example:	123456789.123456789

4.2 Number

Definition:	Number of objects represented as an integer.
Format:	fractionDigits: 0 totalDigits: 18
Example:	123456789012345678

5 Rate

5.1 BaseOneRate

Definition:	Rate expressed as a decimal, eg, 0.7 is 7/10 and 70%.
Format:	fractionDigits: 10 totalDigits: 11
Example:	0.60

5.2 PercentageRate

Definition:	Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Format:	fractionDigits: 10 totalDigits: 11
Example:	35

6 Text

6.1 Max105Text

Definition:	Specifies a character string with a maximum length of 105 characters.
Format:	maxLength: 105 minLength: 1
Example:	azefgvgldfpgtvcvlmgovl;v ; :B;lgkdfwxcvljfqsifj

6.2 Max10Text

Definition:	Specifies a character string with a maximum length of 10 characters.
Format:	maxLength: 10 minLength: 1
Example:	AZERTGFDXC

6.3 Max128Text

Definition:	Specifies a character string with a maximum length of 128 characters.
Format:	maxLength: 128 minLength: 1
Example:	A string value of maximum 128 characters.

6.4 Max140Text

Definition:	Specifies a character string with a maximum length of 140 characters.
Format:	maxLength: 140 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.5 Max15NumericText

Definition:	Specifies a numeric string with a maximum length of 15 digits.
Format:	[0-9]{1,15}
Example:	458793625148975

6.6 Max16Text

Definition:	Specifies a character string with a maximum length of 16 characters.
Format:	maxLength: 16 minLength: 1
Example:	ABCdEFghIJKLMNO?

6.7 Max256Text

Definition:	Specifies a character string with a maximum length of 256 characters.
Format:	maxLength: 256 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST1234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.8 Max350Text

Definition:	Specifies a character string with a maximum length of 350 characters.
Format:	maxLength: 350 minLength: 1
Example:	1234567890

6.9 Max35Text

Definition:	Specifies a character string with a maximum length of 35 characters.
Format:	maxLength: 35 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST123456789012345

6.10 Max3Text

Definition:	Specifies a character string with a maximum length of 3 characters.
Format:	maxLength: 3 minLength: 1
Example:	Nad

6.11 Max70Text

Definition:	Specifies a character string with a maximum length of 70characters.
Format:	maxLength: 70 minLength: 1
Example:	A string value of maximum 70 characters.

End Points

End Points Index

1 Cash account identification

1.1 AccountIdentification1Choice

2 Financial institution identification

2.1 BICIdentification1

3 Identification information

3.1 GenericIdentification3
3.2 GenericIdentification4

4 Partyidentification

4.1 BranchAndFinancialInstitutionIdentification
4.2 FinancialInstitutionIdentification2Choice

5 Postal address

5.1 PostalAddress1

End Points Description

1 Cash account identification

1.1 AccountIdentification1Choice

AccountIdentification1Choice *is used in message* ***CoreCreditTransferInitiation*** *p.18, p.18, p.20, message* ***EUSTPCreditTransferInitiation*** *p.113, p.113, message* ***PaymentInitiationStatus*** *p.172, p.173, message* ***STPCreditTransferInitiation*** *p.212, p.212, p.213.*

Definition: Unique identifier of an account, as assigned by the account servicer.

Type: *One of the following* ***AccountIdentification1Choice*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.0	{Or	IBAN	<IBAN>	[1..1]	Identifier
1.1.1	Or	BBAN	<BBAN>	[1..1]	Identifier
1.1.2	Or	UPIC	<UPIC>	[1..1]	Identifier
1.1.3	Or}	DomesticAccount	<DmstAcct>	[1..1]	
1.1.4		Identification	<Id>	[1..1]	Text

1.1.0 IBAN <IBAN>

Presence: [1..1]

*This message item is part of choice **1.1** AccountIdentification1Choice.*

Definition: International Bank Account Number (IBAN) - identifier used internationally by financial institutions to uniquely identify the account of a customer. Further specifications of the format and content of the IBAN can be found in the standard ISO 13616 "Banking and related financial services - International Bank Account Number (IBAN)" version 1997-10-01, or later revisions.

Data Type: IBANIdentifier

Format: [a-zA-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}

Rule(s): IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

1.1.1 BBAN <BBAN>

Presence: [1..1]

*This message item is part of choice **1.1** AccountIdentification1Choice.*

Definition: Basic Bank Account Number (BBAN) - identifier used nationally by financial institutions, ie, in individual countries, generally as part of a National Account Numbering Scheme(s), to uniquely identify the account of a customer.

Data Type: BBANIdentifier

Format: [a-zA-Z0-9]{1,30}

1.1.2 UPIC <UPIC>

Presence: [1..1]

*This message item is part of choice **1.1** AccountIdentification1Choice.*

Definition: Universal Payment Identification Code (UPIC) - identifier used by the New York Clearing House to mask confidential data, such as bank accounts and bank routing numbers. UPIC numbers remain with business customers, regardless of banking relationship changes.

Data Type: UPICIdentifier

Format: [0-9]{8,17}

1.1.3 DomesticAccount <DmstAcct>

Presence: [1..1]

*This message item is part of choice **1.1** AccountIdentification1Choice.*

Definition: Account number used by financial institutions in individual countries to identify an account of a customer, but not necessarily the bank and branch of the financial institution in which the account is held.

Type: *This message item is composed of the following **SimpleIdentificationInformation** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.4		Identification	<Id>	[1..1]	Text

1.1.4 Identification <Id>

Presence: [1..1]

Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2 Financial institution identification

2.1 BICIdentification1

BICIdentification1 *is used in message* ***EUSTPCreditTransferInitiation*** *p.112, p.113, p.113, p.114.*

Definition: Unique and unambiguous identifier of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.
Type: *The following* ***BICIdentification1*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.0		BIC	<BIC>	[1..1]	Identifier

2.1.0 BIC <BIC>

Presence: [1..1]
Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).
Data Type: BICIdentifier
Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

3 Identification information

3.1 GenericIdentification3

GenericIdentification3 *is used in message* ***CoreCreditTransferInitiation*** *p.16, p.18, p.19, p.20, p.21, p.23, p.24, message* ***EUSTPCreditTransferInitiation*** *p.111, p.112, p.114, p.115, p.116, message* ***PaymentInitiationStatus*** *p.170, p.172, p. 173, message* ***STPCreditTransferInitiation*** *p.210, p.211, p.213, p.214, p.215.*

Definition: Information related to an identification, eg, party identification or account identification.
Type: *The following* ***GenericIdentification3*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.0		Identification	<Id>	[1..1]	Text
3.1.1		Issuer	<Issr>	[0..1]	Text

3.1.0 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.1 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.2 GenericIdentification4

GenericIdentification4 *is used in message* ***CoreCreditTransferInitiation*** *p.17, p.18, p.20, p.20, p.21, p.23, p.24, message* ***EUSTPCreditTransferInitiation*** *p.112, p.113, p.114, p.115, p.116, message* ***PaymentInitiationStatus*** *p.170, p.172, p. 173, message* ***STPCreditTransferInitiation*** *p.211, p.212, p.213, p.214, p.215.*

Definition: Information related to an identification, eg, party identification or account identification.
Type: *The following* ***GenericIdentification4*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.2.0		Identification	<Id>	[1..1]	Text
3.2.1		IdentificationType	<IdTp>	[1..1]	Text

3.2.0 Identification <Id>

Presence: [1..1]
Definition: Identifier issued to a person for which no specific identifier has been defined.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.2.1 IdentificationType <IdTp>

Presence: [1..1]
Definition: Specifies the nature of the identifier.
Usage: IdentificationType is used to specify what kind of identifier is used. It should be used in case the identifier is different from the identifiers listed in the pre-defined identifier list.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4 Partyidentification

4.1 BranchAndFinancialInstitutionIdentification

BranchAndFinancialInstitutionIdentification *is used in message* ***CoreCreditTransferInitiation*** *p.17, p.18, p.18, p.20, p.20, p.21, message* ***PaymentInitiationStatus*** *p.170, p.171, p.173.*

Definition: Organisation established primarily to provide financial services.

Type: *The following* ***BranchAndFinancialInstitutionIdentification*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.0		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
4.1.1		BIC	<BIC>	[0..1]	Identifier
4.1.2		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
4.1.3	{Or	CHIPSUniversalIdentification	<USCHU>	[1..1]	Identifier
4.1.4	Or	NewZealandNCCIdentification	<NZNCC>	[1..1]	Identifier
4.1.5	Or	IrishNSCIdentification	<IENSC>	[1..1]	Identifier
4.1.6	Or	UKDomesticSortCode	<GBSC>	[1..1]	Identifier
4.1.7	Or	CHIPSParticipantIdentification	<USCH>	[1..1]	Identifier
4.1.8	Or	SwissBCIdentification	<CHBC>	[1..1]	Identifier
4.1.9	Or	FedwireRoutingNumberIdentification	<USFW>	[1..1]	Identifier
4.1.10	Or	PortugueseNCCIdentification	<PTNCC>	[1..1]	Identifier
4.1.11	Or	RussianCentralBankIdentificationCode	<RUCB>	[1..1]	Identifier
4.1.12	Or	ItalianDomesticIdentificationCode	<ITNCC>	[1..1]	Identifier
4.1.13	Or	AustrianBankleitzahlIdentification	<ATBLZ>	[1..1]	Identifier
4.1.14	Or	CanadianPaymentsAssociationRoutingNumberIdentification	<CACPA>	[1..1]	Identifier
4.1.15	Or	SwissSICIdentification	<CHSIC>	[1..1]	Identifier
4.1.16	Or	GermanBankleitzahlIdentification	<DEBLZ>	[1..1]	Identifier
4.1.17	Or	SpanishDomesticInterbankingIdentification	<ESNCC>	[1..1]	Identifier
4.1.18	Or	SouthAfricanNCCIdentification	<ZANCC>	[1..1]	Identifier
4.1.19	Or	HongKongBankCode	<HKNCC>	[1..1]	Identifier
4.1.20	Or	AustralianExtensiveBranchNetworkIdentification	<AUBSBx>	[1..1]	Identifier
4.1.21	Or}	AustralianSmallNetworkIdentification	<AUBSBs>	[1..1]	Identifier
4.1.22		Name	<Nm>	[0..1]	Text
4.1.23		PostalAddress	<PstlAdr>	[0..1]	
4.1.24		AddressType	<AdrTp>	[0..1]	Code
4.1.25		AddressLine	<AdrLine>	[0..5]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.26		StreetName	<StrtNm>	[0..1]	Text
4.1.27		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.28		PostCode	<PstCd>	[0..1]	Text
4.1.29		TownName	<TwnNm>	[0..1]	Text
4.1.30		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.31		Country	<Ctry>	[1..1]	Code
4.1.32		ProprietaryIdentification	<PrtryId>	[0..1]	
4.1.33		Identification	<Id>	[1..1]	Text
4.1.34		Issuer	<Issr>	[0..1]	Text
4.1.35		BranchIdentification	<BrnchId>	[0..1]	
4.1.36		Identification	<Id>	[0..1]	Text
4.1.37		Name	<Nm>	[0..1]	Text
4.1.38		PostalAddress	<PstlAdr>	[0..1]	
4.1.39		AddressType	<AdrTp>	[0..1]	Code
4.1.40		AddressLine	<AdrLine>	[0..5]	Text
4.1.41		StreetName	<StrtNm>	[0..1]	Text
4.1.42		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.43		PostCode	<PstCd>	[0..1]	Text
4.1.44		TownName	<TwnNm>	[0..1]	Text
4.1.45		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.46		Country	<Ctry>	[1..1]	Code

4.1.0 FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identifier of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *This message item is composed of the following **FinancialInstitutionIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.1		BIC	<BIC>	[0..1]	Identifier
4.1.2		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
4.1.22		Name	<Nm>	[0..1]	Text
4.1.23		PostalAddress	<PstlAdr>	[0..1]	
4.1.32		ProprietaryIdentification	<PrtryId>	[0..1]	

4.1.1 BIC <BIC>

Presence: [0..1]

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

4.1.2 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [0..1]

Definition: Unique and unambiguous identifier of a clearing system member, as assigned by the system or system administrator.

Type: *This message item is composed of one of the following **ClearingSystemMemberIdentificationChoice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.3	{Or	CHIPSUniversalIdentification	<USCHU>	[1..1]	Identifier
4.1.4	Or	NewZealandNCCIdentification	<NZNCC>	[1..1]	Identifier
4.1.5	Or	IrishNSCIdentification	<IENSC>	[1..1]	Identifier
4.1.6	Or	UKDomesticSortCode	<GBSC>	[1..1]	Identifier
4.1.7	Or	CHIPSParticipantIdentification	<USCH>	[1..1]	Identifier
4.1.8	Or	SwissBCIdentification	<CHBC>	[1..1]	Identifier
4.1.9	Or	FedwireRoutingNumberIdentification	<USFW>	[1..1]	Identifier
4.1.10	Or	PortugueseNCCIdentification	<PTNCC>	[1..1]	Identifier
4.1.11	Or	RussianCentralBankIdentificationCode	<RUCB>	[1..1]	Identifier
4.1.12	Or	ItalianDomesticIdentificationCode	<ITNCC>	[1..1]	Identifier
4.1.13	Or	AustrianBankleitzahlIdentification	<ATBLZ>	[1..1]	Identifier
4.1.14	Or	CanadianPaymentsAssociationRoutingNumberIdentification	<CACPA>	[1..1]	Identifier
4.1.15	Or	SwissSICIdentification	<CHSIC>	[1..1]	Identifier
4.1.16	Or	GermanBankleitzahlIdentification	<DEBLZ>	[1..1]	Identifier
4.1.17	Or	SpanishDomesticInterbankingIdentification	<ESNCC>	[1..1]	Identifier
4.1.18	Or	SouthAfricanNCCIdentification	<ZANCC>	[1..1]	Identifier
4.1.19	Or	HongKongBankCode	<HKNCC>	[1..1]	Identifier
4.1.20	Or	AustralianExtensiveBranchNetworkIdentification	<AUBSBx>	[1..1]	Identifier

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.21	Or}	AustralianSmallNetworkIdentification	<AUBSBs>	[1..1]	Identifier

4.1.3 CHIPSUniversalIdentification <USCHU>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

4.1.4 NewZealandNCCIdentification <NZNCC>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: New Zealand Bank/Branch Code - identifies New Zealand institutions on the New Zealand national clearing system. The code is assigned by the New Zealand Bankers' Association (NZBA).

Data Type: NewZealandNCCIdentifier

Format: NZ[0-9]{6,6}

4.1.5 IrishNSCIdentification <IENSC>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Irish National Sorting Code - identifies Irish financial institutions on the Irish national clearing system. The code is assigned by the Irish Payments Services Organisation (IPSO).

Data Type: IrishNSCIdentifier

Format: IE[0-9]{6,6}

4.1.6 UKDomesticSortCode <GBSC>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: United Kingdom (UK) Sort Code - identifies British financial institutions on the British national clearing systems. The sort code is assigned by the Association for Payments and Clearing Services (APACS).

Data Type: UKDomesticSortCodeIdentifier

Format: SC[0-9]{6,6}

4.1.7 CHIPSParticipantIdentification <USCH>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: (United States) Clearing House Interbank Payment System (CHIPS) Participant Identifier (ID) - identifies financial institutions participating on CHIPS. The CHIPS Participant ID is assigned by the New York Clearing House.

Data Type: CHIPSParticipantIdentifier

Format: CP[0-9]{4,4}

4.1.8 SwissBCIdentification <CHBC>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Swiss Bank Code - identifies Swiss institutions on the Swiss national clearing system.

Data Type: SwissBCIdentifier

Format: SW[0-9]{3,5}

4.1.9 FedwireRoutingNumberIdentification <USFW>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Fedwire Routing Number - identifies financial institutions, in the US, on the FedWire system. The routing number is assigned by the American Bankers Association (ABA).

Data Type: FedwireRoutingNumberIdentifier

Format: FW[0-9]{9,9}

4.1.10 PortugueseNCCIdentification <PTNCC>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Portuguese National Clearing Code - identifies Portuguese financial institutions on the Portuguese national clearing system.

Data Type: PortugueseNCCIdentifier

Format: PT[0-9]{8,8}

4.1.11 RussianCentralBankIdentificationCode <RUCB>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Russian Central Bank Identification Code - identifies Russian financial institutions on the Russian national clearing system.

Data Type: RussianCentralBankIdentificationCodeIdentifier

Format: RU[0-9]{9,9}

4.1.12 ItalianDomesticIdentificationCode <ITNCC>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Italian Domestic Identification Code - identifies Italian financial institutions on the Italian national clearing system. The code is assigned by the Associazione Bancaria Italiana (ABI).

Data Type: ItalianDomesticIdentifier

Format: IT[0-9]{10,10}

4.1.13 AustrianBankleitzahlIdentification <ATBLZ>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Austrian Bankleitzahl - identifies Austrian financial institutions on the Austrian national clearing system.

Data Type: AustrianBankleitzahlIdentifier

Format: AT[0-9]{5,5}

4.1.14 CanadianPaymentsAssociationRoutingNumberIdentification <CACPA>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Canadian Payments Association Routing Number - identifies Canadian financial institutions on the Canadian national clearing system.

Data Type: CanadianPaymentsARNIdentifier

Format: CA[0-9]{9,9}

4.1.15 SwissSICIdentification <CHSIC>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Swiss Interbank Clearing (SIC) Code - identifies Swiss financial institutions domestically, on the Swiss national clearing system.

Data Type: SwissSICIdentifier

Format: SW[0-9]{6,6}

4.1.16 GermanBankleitzahlIdentification <DEBLZ>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: German Bankleitzahl - identifies German financial institutions on the German national clearing systems.

Data Type: GermanBankleitzahlIdentifier

Format: BL[0-9]{8,8}

4.1.17 SpanishDomesticInterbankingIdentification <ESNCC>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Spanish Domestic Interbanking Code - identifies Spanish financial institutions on the Spanish national clearing system. The code is assigned by the Centro de Cooperacion Interbancaria (CCI).

Data Type: SpanishDomesticInterbankingIdentifier

Format: ES[0-9]{8,9}

4.1.18 SouthAfricanNCCIdentification <ZANCC>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: South African National Clearing Code (NCC) - identifies South African financial institutions on the South African national clearing system. The code is assigned by the South African Bankers Services Company Ltd. (BankServ).

Data Type: SouthAfricanNCCIdentifier

Format: ZA[0-9]{6,6}

4.1.19 HongKongBankCode <HKNCC>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Hong Kong Bank Code - identifies Hong Kong financial institutions on the Hong Kong local clearing system.
Data Type: HongKongBankIdentifier
Format: HK[0-9]{3,3}

4.1.20 AustralianExtensiveBranchNetworkIdentification <AUBSBx>

Presence: [1..1]
*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*
Definition: Extensive branch network list of the Australian Bank State Branch (BSB) Code. The codes are used for identifying Australian financial institutions, as assigned by the Australian Payments Clearing Association (APCA).
Data Type: ExtensiveBranchNetworkIdentifier
Format: AU[0-9]{6,6}

4.1.21 AustralianSmallNetworkIdentification <AUBSBs>

Presence: [1..1]
*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*
Definition: Small network list of the Australian Bank State Branch (BSB) Code. The codes are used for identifying Australian financial institutions , as assigned by the Australian Payments Clearing Association (APCA).
Data Type: SmallNetworkIdentifier
Format: AU[0-9]{6,6}

4.1.22 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.23 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.24		AddressType	<AdrTp>	[0..1]	Code
4.1.25		AddressLine	<AdrLine>	[0..5]	Text
4.1.26		StreetName	<StrtNm>	[0..1]	Text
4.1.27		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.28		PostCode	<PstCd>	[0..1]	Text
4.1.29		TownName	<TwnNm>	[0..1]	Text
4.1.30		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.31		Country	<Ctry>	[1..1]	Code

4.1.24 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.25 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.26 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.27 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.28 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.29 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.30 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country eg, state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.31 Country <Ctry>

Presence: [1..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.32 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier, as assigned to a financial institution using a proprietary identification scheme.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.33		Identification	<Id>	[1..1]	Text
4.1.34		Issuer	<Issr>	[0..1]	Text

4.1.33 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.34 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.35 BranchIdentification <BrnchId>

Presence: [0..1]
Definition: Information identifying a specific branch of a financial institution.

Usage : this component should be used in case the identification information in the financial institution component does not provide identification up to branch level.

Type: *This message item is composed of the following **BranchData** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.36		Identification	<Id>	[0..1]	Text
4.1.37		Name	<Nm>	[0..1]	Text
4.1.38		PostalAddress	<PstlAdr>	[0..1]	

4.1.36 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a branch of a financial institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.37 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.38 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.39		AddressType	<AdrTp>	[0..1]	Code
4.1.40		AddressLine	<AdrLine>	[0..5]	Text
4.1.41		StreetName	<StrtNm>	[0..1]	Text
4.1.42		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.43		PostCode	<PstCd>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.44		TownName	<TwnNm>	[0..1]	Text
4.1.45		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.46		Country	<Ctry>	[1..1]	Code

4.1.39 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.40 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.41 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.42 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.43 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

4.1.44 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.45 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country eg, state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.46 Country <Ctry>

Presence: [1..1]

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.2 FinancialInstitutionIdentification2Choice

FinancialInstitutionIdentification2Choice *is used in message* ***STPCreditTransferInitiation*** *p.211, p.212, p.212, p. 213.*

Definition: Unique and unambiguous identifier of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *One of the following* ***FinancialInstitutionIdentification2Choice*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.2.0	{Or	BIC	<BIC>	[1..1]	Identifier
4.2.1	Or	ClearingSystemMemberIdentification	<ClrSysMmbId>	[1..1]	
4.2.2	{{Or	CHIPSUniversalIdentification	<USCHU>	[1..1]	Identifier

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.2.3	Or	NewZealandNCCIdentification	<NZNCC>	[1..1]	Identifier
4.2.4	Or	IrishNSCIdentification	<IENSC>	[1..1]	Identifier
4.2.5	Or	UKDomesticSortCode	<GBSC>	[1..1]	Identifier
4.2.6	Or	CHIPSParticipantIdentification	<USCH>	[1..1]	Identifier
4.2.7	Or	SwissBCIdentification	<CHBC>	[1..1]	Identifier
4.2.8	Or	FedwireRoutingNumberIdentification	<USFW>	[1..1]	Identifier
4.2.9	Or	PortugueseNCCIdentification	<PTNCC>	[1..1]	Identifier
4.2.10	Or	RussianCentralBankIdentificationCode	<RUCB>	[1..1]	Identifier
4.2.11	Or	ItalianDomesticIdentificationCode	<ITNCC>	[1..1]	Identifier
4.2.12	Or	AustrianBankleitzahlIdentification	<ATBLZ>	[1..1]	Identifier
4.2.13	Or	CanadianPaymentsAssociationRoutingNumberIdentification	<CACPA>	[1..1]	Identifier
4.2.14	Or	SwissSICIdentification	<CHSIC>	[1..1]	Identifier
4.2.15	Or	GermanBankleitzahlIdentification	<DEBLZ>	[1..1]	Identifier
4.2.16	Or	SpanishDomesticInterbankingIdentification	<ESNCC>	[1..1]	Identifier
4.2.17	Or	SouthAfricanNCCIdentification	<ZANCC>	[1..1]	Identifier
4.2.18	Or	HongKongBankCode	<HKNCC>	[1..1]	Identifier
4.2.19	Or	AustralianExtensiveBranchNetworkIdentification	<AUBSBx>	[1..1]	Identifier
4.2.20	Or}}	AustralianSmallNetworkIdentification	<AUBSBs>	[1..1]	Identifier
4.2.21	Or}	ProprietaryIdentification	<PrtryId>	[1..1]	
4.2.22		Identification	<Id>	[1..1]	Text
4.2.23		Issuer	<Issr>	[0..1]	Text

4.2.0 BIC <BIC>

Presence: [1..1]

*This message item is part of choice **4.2** FinancialInstitutionIdentification2Choice.*

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

4.2.1 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [1..1]

*This message item is part of choice **4.2** FinancialInstitutionIdentification2Choice.*

Definition: Unique and unambiguous identifier of a clearing system member, as assigned by the system or system administrator.

Type: *This message item is composed of one of the following **ClearingSystemMemberIdentificationChoice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.2.2	{Or	CHIPSUniversalIdentification	<USCHU>	[1..1]	Identifier
4.2.3	Or	NewZealandNCCIdentification	<NZNCC>	[1..1]	Identifier
4.2.4	Or	IrishNSCIdentification	<IENSC>	[1..1]	Identifier
4.2.5	Or	UKDomesticSortCode	<GBSC>	[1..1]	Identifier
4.2.6	Or	CHIPSParticipantIdentification	<USCH>	[1..1]	Identifier
4.2.7	Or	SwissBCIdentification	<CHBC>	[1..1]	Identifier
4.2.8	Or	FedwireRoutingNumberIdentification	<USFW>	[1..1]	Identifier
4.2.9	Or	PortugueseNCCIdentification	<PTNCC>	[1..1]	Identifier
4.2.10	Or	RussianCentralBankIdentificationCode	<RUCB>	[1..1]	Identifier
4.2.11	Or	ItalianDomesticIdentificationCode	<ITNCC>	[1..1]	Identifier
4.2.12	Or	AustrianBankleitzahlIdentification	<ATBLZ>	[1..1]	Identifier
4.2.13	Or	CanadianPaymentsAssociationRoutingNumberIdentification	<CACPA>	[1..1]	Identifier
4.2.14	Or	SwissSICIdentification	<CHSIC>	[1..1]	Identifier
4.2.15	Or	GermanBankleitzahlIdentification	<DEBLZ>	[1..1]	Identifier
4.2.16	Or	SpanishDomesticInterbankingIdentification	<ESNCC>	[1..1]	Identifier
4.2.17	Or	SouthAfricanNCCIdentification	<ZANCC>	[1..1]	Identifier
4.2.18	Or	HongKongBankCode	<HKNCC>	[1..1]	Identifier
4.2.19	Or	AustralianExtensiveBranchNetworkIdentification	<AUBSBx>	[1..1]	Identifier
4.2.20	Or}	AustralianSmallNetworkIdentification	<AUBSBs>	[1..1]	Identifier

4.2.2 CHIPSUniversalIdentification <USCHU>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

4.2.3 NewZealandNCCIdentification <NZNCC>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: New Zealand Bank/Branch Code - identifies New Zealand institutions on the New Zealand national clearing system. The code is assigned by the New Zealand Bankers' Association (NZBA).

Data Type: NewZealandNCCIdentifier

Format: NZ[0-9]{6,6}

4.2.4 IrishNSCIdentification <IENSC>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: Irish National Sorting Code - identifies Irish financial institutions on the Irish national clearing system. The code is assigned by the Irish Payments Services Organisation (IPSO).

Data Type: IrishNSCIdentifier

Format: IE[0-9]{6,6}

4.2.5 UKDomesticSortCode <GBSC>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: United Kingdom (UK) Sort Code - identifies British financial institutions on the British national clearing systems. The sort code is assigned by the Association for Payments and Clearing Services (APACS).

Data Type: UKDomesticSortCodeIdentifier

Format: SC[0-9]{6,6}

4.2.6 CHIPSParticipantIdentification <USCH>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: (United States) Clearing House Interbank Payment System (CHIPS) Participant Identifier (ID) - identifies financial institutions participating on CHIPS. The CHIPS Participant ID is assigned by the New York Clearing House.

Data Type: CHIPSParticipantIdentifier

Format: CP[0-9]{4,4}

4.2.7 SwissBCIdentification <CHBC>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: Swiss Bank Code - identifies Swiss institutions on the Swiss national clearing system.

Data Type: SwissBCIdentifier

Format: SW[0-9]{3,5}

4.2.8 FedwireRoutingNumberIdentification <USFW>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: Fedwire Routing Number - identifies financial institutions, in the US, on the FedWire system. The routing number is assigned by the American Bankers Association (ABA).

Data Type: FedwireRoutingNumberIdentifier
Format: FW[0-9]{9,9}

4.2.9 PortugueseNCCIdentification <PTNCC>

Presence: [1..1]
*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*
Definition: Portuguese National Clearing Code - identifies Portuguese financial institutions on the Portuguese national clearing system.
Data Type: PortugueseNCCIdentifier
Format: PT[0-9]{8,8}

4.2.10 RussianCentralBankIdentificationCode <RUCB>

Presence: [1..1]
*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*
Definition: Russian Central Bank Identification Code - identifies Russian financial institutions on the Russian national clearing system.
Data Type: RussianCentralBankIdentificationCodeIdentifier
Format: RU[0-9]{9,9}

4.2.11 ItalianDomesticIdentificationCode <ITNCC>

Presence: [1..1]
*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*
Definition: Italian Domestic Identification Code - identifies Italian financial institutions on the Italian national clearing system. The code is assigned by the Associazione Bancaria Italiana (ABI).
Data Type: ItalianDomesticIdentifier
Format: IT[0-9]{10,10}

4.2.12 AustrianBankleitzahlIdentification <ATBLZ>

Presence: [1..1]
*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*
Definition: Austrian Bankleitzahl - identifies Austrian financial institutions on the Austrian national clearing system.
Data Type: AustrianBankleitzahlIdentifier
Format: AT[0-9]{5,5}

4.2.13 CanadianPaymentsAssociationRoutingNumberIdentification <CACPA>

Presence: [1..1]
*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*
Definition: Canadian Payments Association Routing Number - identifies Canadian financial institutions on the Canadian national clearing system.
Data Type: CanadianPaymentsARNIdentifier
Format: CA[0-9]{9,9}

4.2.14 SwissSICIdentification <CHSIC>

Presence: [1..1]
*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: Swiss Interbank Clearing (SIC) Code - identifies Swiss financial institutions domestically, on the Swiss national clearing system.

Data Type: SwissSICIdentifier

Format: SW[0-9]{6,6}

4.2.15 GermanBankleitzahlIdentification <DEBLZ>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: German Bankleitzahl - identifies German financial institutions on the German national clearing systems.

Data Type: GermanBankleitzahlIdentifier

Format: BL[0-9]{8,8}

4.2.16 SpanishDomesticInterbankingIdentification <ESNCC>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: Spanish Domestic Interbanking Code - identifies Spanish financial institutions on the Spanish national clearing system. The code is assigned by the Centro de Cooperacion Interbancaria (CCI).

Data Type: SpanishDomesticInterbankingIdentifier

Format: ES[0-9]{8,9}

4.2.17 SouthAfricanNCCIdentification <ZANCC>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: South African National Clearing Code (NCC) - identifies South African financial institutions on the South African national clearing system. The code is assigned by the South African Bankers Services Company Ltd. (BankServ).

Data Type: SouthAfricanNCCIdentifier

Format: ZA[0-9]{6,6}

4.2.18 HongKongBankCode <HKNCC>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: Hong Kong Bank Code - identifies Hong Kong financial institutions on the Hong Kong local clearing system.

Data Type: HongKongBankIdentifier

Format: HK[0-9]{3,3}

4.2.19 AustralianExtensiveBranchNetworkIdentification <AUBSBx>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: Extensive branch network list of the Australian Bank State Branch (BSB) Code. The codes are used for identifying Australian financial institutions, as assigned by the Australian Payments Clearing Association (APCA).

Data Type: ExtensiveBranchNetworkIdentifier

Format: AU[0-9]{6,6}

4.2.20 AustralianSmallNetworkIdentification <AUBSBs>

Presence: [1..1]

*This message item is part of choice **4.2.1** ClearingSystemMemberIdentification.*

Definition: Small network list of the Australian Bank State Branch (BSB) Code. The codes are used for identifying Australian financial institutions , as assigned by the Australian Payments Clearing Association (APCA).

Data Type: SmallNetworkIdentifier

Format: AU[0-9]{6,6}

4.2.21 ProprietaryIdentification <PrtryId>

Presence: [1..1]

*This message item is part of choice **4.2** FinancialInstitutionIdentification2Choice.*

Definition: Unique and unambiguous identifier, as assigned to a financial institution using a proprietary identification scheme.

Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.2.22		Identification	<Id>	[1..1]	Text
4.2.23		Issuer	<Issr>	[0..1]	Text

4.2.22 Identification <Id>

Presence: [1..1]

Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.2.23 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5 Postal address

5.1 PostalAddress1

***PostalAddress1** is used in message **CoreCreditTransferInitiation** p.16, p.17, p.19, p.19, p.19, p.20, p.21, p.22, p.23, p. 23, message **EUSTPCreditTransferInitiation** p.111, p.112, p.114, p.115, p.115, message **PaymentInitiationStatus** p. 170, p.171, p.173, message **STPCreditTransferInitiation** p.210, p.211, p.212, p.214, p.214.*

Definition: Information that locates and identifies a specific address, as defined by postal services.

Type: *The following **PostalAddress1** element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.0		AddressType	<AdrTp>	[0..1]	Code
5.1.1		AddressLine	<AdrLine>	[0..5]	Text
5.1.2		StreetName	<StrtNm>	[0..1]	Text
5.1.3		BuildingNumber	<BldgNb>	[0..1]	Text
5.1.4		PostCode	<PstCd>	[0..1]	Text
5.1.5		TownName	<TwnNm>	[0..1]	Text
5.1.6		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
5.1.7		Country	<Ctry>	[1..1]	Code

5.1.0 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

5.1.1 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

5.1.2 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

5.1.3 BuildingNumber <BldgNb>

Presence: [0..1]

Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

5.1.4 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

5.1.5 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.6 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country eg, state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.7 Country <Ctry>

Presence: [1..1]

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

Indexes

Index of Message Items

A

AdditionalInformation: <AddtlInf>
Message PaymentInitiationStatus 171, 172

Address: <Adr>
Message CoreCreditTransferInitiation 19, 19, 22

AddressLine: <AdrLine>
282, 283, 300

AddressType: <AdrTp>
282, 283, 300

AlienRegistrationNumber: <AlnRegnNb>
Message CoreCreditTransferInitiation 17, 18, 19, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

Amount: <Amt>
Message CoreCreditTransferInitiation 18, 19, 21, 22
Message EUSTPCreditTransferInitiation 113, 113
Message PaymentInitiationStatus 172, 172
Message STPCreditTransferInitiation 212, 212

AustralianExtensiveBranchNetworkIdentification: <AUBSBx>
282, 294

AustralianSmallNetworkIdentification: <AUBSBs>
282, 294

AustrianBankleitzahlIdentification: <ATBLZ>
282, 294

Authorisation: <Authstn>
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

B

BankPartyIdentification: <BkPtyId>
Message CoreCreditTransferInitiation 16, 18, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

BatchBooking: <BtchBookg>
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

BBAN: <BBAN>
278

BEI: <BEI>
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

BIC: <BIC>
280, 282, 293

BranchIdentification: <BrnchId>
283

BuildingNumber: <BldgNb>
283, 283, 300

C

CanadianPaymentsAssociationRoutingNumberIdentification: <CACPA>
282, 294

CategoryDescription: <CtgyDesc>
Message CoreCreditTransferInitiation 22

CertificateIdentification: <CertId>
Message CoreCreditTransferInitiation 22

ChargeBearer: <ChrgBr>
Message CoreCreditTransferInitiation 21
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

ChargesAccount: <ChrgsAcct>
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

ChargesAccountAgent: <ChrgsAcctAgt>
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

ChequeFrom: <ChqFr>
Message CoreCreditTransferInitiation 19

ChequeInstruction: <ChqInstr>
Message CoreCreditTransferInitiation 19

ChequeMaturityDate: <ChqMtrtyDt>
Message CoreCreditTransferInitiation 19

ChequeNumber: <ChqNb>
Message CoreCreditTransferInitiation 19

ChequeType: <ChqTp>
Message CoreCreditTransferInitiation 19

CHIPSParticipantIdentification: <USCH>
282, 294

CHIPSUniversalIdentification: <USCHU>
282, 293
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

ClearingSystemMemberIdentification: <ClrSysMmbId>
282, 293

Code: <Cd>
Message CoreCreditTransferInitiation 17, 17, 18, 21, 21
Message EUSTPCreditTransferInitiation 112, 112, 113
Message PaymentInitiationStatus 171, 171
Message STPCreditTransferInitiation 211, 211, 212

ControlSum: <CtrlSum>
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

Country: <Ctry>
283, 283, 300

CountrySubDivision: <CtrySubDvsn>
283, 283, 300

CreationDateTime: <CreDtTm>
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message PaymentInitiationStatus 170
Message STPCreditTransferInitiation 210

CreditNoteAmount: <CdtNoteAmt>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115

Message STPCreditTransferInitiation 213

Creditor: <Cdtr>
Message CoreCreditTransferInitiation 20
Message EUSTPCreditTransferInitiation 114
Message PaymentInitiationStatus 173
Message STPCreditTransferInitiation 212

CreditorAccount: <CdtrAcct>
Message CoreCreditTransferInitiation 20
Message EUSTPCreditTransferInitiation 114
Message PaymentInitiationStatus 173
Message STPCreditTransferInitiation 213

CreditorCountryOfResidence: <CdtrCtryOfRes>
Message CoreCreditTransferInitiation 21
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

CreditorReference: <CdtrRef>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 214

CreditorTaxIdentification: <CdtrTaxId>
Message CoreCreditTransferInitiation 22

CreditorTaxType: <CdtrTaxTp>
Message CoreCreditTransferInitiation 22

CreditTransferTypeIdentification: <CdtTrfTpId>
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

Currency: <Ccy>
Message CoreCreditTransferInitiation 18, 18, 20
Message EUSTPCreditTransferInitiation 113, 113
Message PaymentInitiationStatus 172, 173
Message STPCreditTransferInitiation 212, 212

CurrencyOfTransfer: <CcyOfTrf>
Message CoreCreditTransferInitiation 19
Message EUSTPCreditTransferInitiation 114
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

D

DebitPurpose: <DbtPurp>
Message CoreCreditTransferInitiation 22

Debtor: <Dbtr>
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

DebtorAccount: <DbtrAcct>
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

DebtorCountryOfResidence: <DbtrCtryOfRes>
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

DebtorTaxIdentification: <DbtrTaxId>
Message CoreCreditTransferInitiation 22

DeliverTo: <DlvrTo>
Message CoreCreditTransferInitiation 19

DeliveryMethod: <DlvryMtd>
Message CoreCreditTransferInitiation 19

DiscountAppliedAmount: <DscntApldAmt>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 213

DocumentReferenceNumber: <DocRefNb>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 213

DomesticAccount: <DmstAcct>
278

DriversLicenseNumber: <DrvrsLicNb>
Message CoreCreditTransferInitiation 17, 18, 19, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 111, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

DuePayableAmount: <DuePyblAmt>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 213

DUNS: <DUNS>

Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

E

EANGLN: <EANGLN>
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

EmployerIdentificationNumber: <MplyrIdNb>
Message CoreCreditTransferInitiation 17, 18, 20, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 212, 213, 214, 215

EndToEndIdentification: <EndToEndId>
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

EquivalentAmount: <EqvtAmt>
Message CoreCreditTransferInitiation 19
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

ExchangeContractReference: <XchgCtrctRef>
Message CoreCreditTransferInitiation 21
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

F

FedwireRoutingNumberIdentification: <USFW>
282, 294

FinalAgent: <FnlAgt>
Message CoreCreditTransferInitiation 21
Message EUSTPCreditTransferInitiation 114
Message PaymentInitiationStatus 173
Message STPCreditTransferInitiation 213

FinalAgentAccount: <FnlAgtAcct>
Message CoreCreditTransferInitiation 21

FinalParty: <FnlPty>

Message CoreCreditTransferInitiation 21

FinancialInstitutionIdentification: <FinInstnId>
282

FirstAgent: <FrstAgt>
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 212

FormsCode: <FrmsCd>
Message CoreCreditTransferInitiation 19

ForwardingAgent: <FwdgAgt>
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 170
Message STPCreditTransferInitiation 211

G

GeneralInformation: <GnlInf>
Message PaymentInitiationStatus 170

GermanBankleitzahlIdentification: <DEBLZ>
282, 294

GroupHeader: <GrpHdr>
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

GroupIdentification: <GrpId>
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 210

Grouping: <Grpg>
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

GroupStatus: <GrpSts>
Message PaymentInitiationStatus 171

H

HongKongBankCode: <HKNCC>
282, 294

I

IBAN: <IBAN>
278
Message EUSTPCreditTransferInitiation 114

Identification: <Id>
278, 280, 281, 283, 283, 294
Message CoreCreditTransferInitiation 16, 17, 18, 18, 19, 20, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 113, 113, 114, 115, 115
Message PaymentInitiationStatus 170, 171, 172, 173, 173
Message STPCreditTransferInitiation 210, 211, 212, 212, 212, 214, 214

IdentificationType: <IdTp>
281

IdentityCardNumber: <IdntyCardNb>
Message CoreCreditTransferInitiation 17, 18, 20, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 212, 213, 214, 215

Information: <Inf>
Message CoreCreditTransferInitiation 21

InitiatingParty: <InitgPty>
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message PaymentInitiationStatus 170
Message STPCreditTransferInitiation 210

InstructedAmount: <InstdAmt>
Message CoreCreditTransferInitiation 19
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

InstructionForFinalAgent: <InstrForFnlAgt>
Message CoreCreditTransferInitiation 21

InstructionForFirstAgent: <InstrForFrstAgt>
Message CoreCreditTransferInitiation 21

InstructionIdentification: <InstrId>
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

InstructionPriority: <InstrPrty>
Message CoreCreditTransferInitiation 17, 19

Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

IntermediaryAgent1: <IntrmyAgt1>
Message CoreCreditTransferInitiation 20

IntermediaryAgent2: <IntrmyAgt2>
Message CoreCreditTransferInitiation 20

Invoicee: <Invcee>
Message CoreCreditTransferInitiation 23
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 214

Invoicer: <Invcr>
Message CoreCreditTransferInitiation 23
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 214

IrishNSCIdentification: <IENSC>
282, 294

Issuer: <Issr>
280, 283, 294
Message CoreCreditTransferInitiation 17, 18, 20, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 211, 212, 213, 214, 215

ItalianDomesticIdentificationCode: <ITNCC>
282, 294

L

LocalInstrument: <LclInstrm>
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

M

MemoField: <MemoFld>
Message CoreCreditTransferInitiation 19

N

Name: <Nm>
282, 283
Message CoreCreditTransferInitiation 16, 17, 18, 18, 19, 19, 19, 20, 20, 21, 22, 23, 23

Message EUSTPCreditTransferInitiation 111, 112, 113, 113, 114, 115, 115
Message PaymentInitiationStatus 170, 171, 172, 173, 173
Message STPCreditTransferInitiation 210, 211, 212, 212, 212, 214, 214

NewZealandNCCIdentification: <NZNCC>
282, 294

NumberOfTransactions: <NbOfTxs>
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

O

OrganisationIdentification: <OrgId>
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

OriginalGroupReferenceInformationAndStatus: <OrgnlGrpRefInfAndSts>
Message PaymentInitiationStatus 171

OriginalMessageType: <OrgnlMsgTp>
Message PaymentInitiationStatus 171

OriginalPaymentInformation: <OrgnlPmtInf>
Message PaymentInitiationStatus 171

OriginalTransactionInformation: <OrgnlTxInf>
Message PaymentInitiationStatus 172

OriginalTransactionReferenceInformationAndStatus: <OrgnlTxRefInfAndSts>
Message PaymentInitiationStatus 172

OriginatingParty: <OrgtgPty>
Message CoreCreditTransferInitiation 19

OtherIdentification: <OthrId>
Message CoreCreditTransferInitiation 17, 18, 20, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 211, 212, 213, 214, 215

P

PassportNumber: <PsptNb>
Message CoreCreditTransferInitiation 17, 18, 20, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

PaymentIdentification: <PmtId>
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

PaymentInformation: <PmtInf>
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message STPCreditTransferInitiation 211

PaymentInitiationStatusIdentification: <PmtInitnStsId>
Message PaymentInitiationStatus 170

PaymentMethodByFirstAgent: <PmtMtdByFrstAgt>
Message CoreCreditTransferInitiation 17
Message PaymentInitiationStatus 171

PaymentRemittanceIdentification: <PmtRmtId>
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

PaymentScheme: <PmtSchme>
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

PaymentTransaction: <PmtTx>
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

PortugueseNCCIdentification: <PTNCC>
282, 294

PostalAddress: <PstlAdr>
282, 283
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 115
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 212, 214, 214

PostCode: <PstCd>
283, 283, 300

Priority: <Prty>
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112

Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

PrivateIdentification: <PrvtId>
Message CoreCreditTransferInitiation 16, 18, 19, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 111, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

Proprietary: <Prtry>
Message CoreCreditTransferInitiation 18, 21, 22
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

ProprietaryIdentification: <PrtryId>
283, 294
Message CoreCreditTransferInitiation 16, 18, 19, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

ProprietaryInformation: <PrtryInf>
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

Purpose: <Purp>
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

R

Rate: <Rate>
Message CoreCreditTransferInitiation 22

ReferredDocumentAmount: <RfrdDocAmt>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

ReferredDocumentRelatedDate: <RfrdDocRltdDt>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

ReferredDocumentType: <RfrdDocTp>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

RegionalClearingZone: <RgnlClrZone>
Message CoreCreditTransferInitiation 19

RegulatoryReporting: <RgltryRptg>
Message CoreCreditTransferInitiation 21

RemittanceInformation: <RmtInf>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

RemittanceLocationElectronicAddress: <RmtLctnElctrncAdr>
Message CoreCreditTransferInitiation 22

RemittanceLocationMethod: <RmtLctnMtd>
Message CoreCreditTransferInitiation 22

RemittanceLocationPostalAddress: <RmtLctnPstlAdr>
Message CoreCreditTransferInitiation 22

RemittedAmount: <RmtdAmt>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 213

RequestedExecutionDate: <ReqdExctnDt>
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

RussianCentralBankIdentificationCode: <RUCB>
282, 294

S

SettlementPriority: <SttlmPrty>
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

SocialSecurityNumber: <SclSctyNb>
Message CoreCreditTransferInitiation 17, 18, 19, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 111, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

SouthAfricanNCCIdentification: <ZANCC>
282, 294

SpanishDomesticInterbankingIdentification: <ESNCC>

282, 294

StatusReason: <StsRsn>
Message PaymentInitiationStatus 171, 172

StreetName: <StrtNm>
283, 283, 300

Structured: <Strd>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

SwissBCIdentification: <CHBC>
282, 294

SwissSICIdentification: <CHSIC>
282, 294

T

Tax: <Tax>
Message CoreCreditTransferInitiation 22

TaxableBaseAmount: <TaxblBaseAmt>
Message CoreCreditTransferInitiation 22

TaxAmount: <TaxAmt>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 213

TaxIdentificationNumber: <TaxIdNb>
Message CoreCreditTransferInitiation 16, 17, 18, 18, 19, 20, 20, 20, 21, 21, 23, 23, 23, 24
Message EUSTPCreditTransferInitiation 111, 112, 112, 113, 114, 114, 115, 115, 116, 116
Message PaymentInitiationStatus 170, 170, 172, 172, 173, 173
Message STPCreditTransferInitiation 210, 210, 211, 212, 213, 213, 214, 214, 215, 215

TaxReferenceNumber: <TaxRefNb>
Message CoreCreditTransferInitiation 22

TaxType: <TaxTp>
Message CoreCreditTransferInitiation 22

TaxTypeInformation: <TaxTpInf>
Message CoreCreditTransferInitiation 22

TotalTaxableBaseAmount: <TtlTaxblBaseAmt>
Message CoreCreditTransferInitiation 22

TotalTaxAmount: <TtlTaxAmt>
Message CoreCreditTransferInitiation 22

TownName: <TwnNm>
283, 283, 300

TransactionStatus: <TxSts>
Message PaymentInitiationStatus 172

Type: <Tp>
Message CoreCreditTransferInitiation 18, 18, 20
Message EUSTPCreditTransferInitiation 113, 113
Message PaymentInitiationStatus 172, 173
Message STPCreditTransferInitiation 212, 212

U

UKDomesticSortCode: <GBSC>
282, 294

Unstructured: <Ustrd>
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

UPIC: <UPIC>
278

Index of XML tags

A

<AddtlInf>: AdditionalInformation
Message PaymentInitiationStatus 171, 172

<Adr>: Address
Message CoreCreditTransferInitiation 19, 19, 22

<AdrLine>: AddressLine
282, 283, 300

<AdrTp>: AddressType
282, 283, 300

<AlnRegnNb>: AlienRegistrationNumber
Message CoreCreditTransferInitiation 17, 18, 19, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

<Amt>: Amount
Message CoreCreditTransferInitiation 18, 19, 21, 22
Message EUSTPCreditTransferInitiation 113, 113

Message PaymentInitiationStatus 172, 172
Message STPCreditTransferInitiation 212, 212

<ATBLZ>: AustrianBankleitzahlIdentification
282, 294

<AUBSBs>: AustralianSmallNetworkIdentification
282, 294

<AUBSBx>: AustralianExtensiveBranchNetworkIdentification
282, 294

<Authstn>: Authorisation
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

B

<BBAN>: BBAN
278

<BEI>: BEI
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

<BIC>: BIC
280, 282, 293

<BkPtyId>: BankPartyIdentification
Message CoreCreditTransferInitiation 16, 18, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

<BldgNb>: BuildingNumber
283, 283, 300

<BrnchId>: BranchIdentification
283

<BtchBookg>: BatchBooking
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

C

<CACPA>: CanadianPaymentsAssociationRoutingNumberIdentification

282, 294

<Ccy>: Currency
Message CoreCreditTransferInitiation 18, 18, 20
Message EUSTPCreditTransferInitiation 113, 113
Message PaymentInitiationStatus 172, 173
Message STPCreditTransferInitiation 212, 212

<CcyOfTrf>: CurrencyOfTransfer
Message CoreCreditTransferInitiation 19
Message EUSTPCreditTransferInitiation 114
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

<Cd>: Code
Message CoreCreditTransferInitiation 17, 17, 18, 21, 21
Message EUSTPCreditTransferInitiation 112, 112, 113
Message PaymentInitiationStatus 171, 171
Message STPCreditTransferInitiation 211, 211, 212

<CdtNoteAmt>: CreditNoteAmount
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 213

<Cdtr>: Creditor
Message CoreCreditTransferInitiation 20
Message EUSTPCreditTransferInitiation 114
Message PaymentInitiationStatus 173
Message STPCreditTransferInitiation 212

<CdtrAcct>: CreditorAccount
Message CoreCreditTransferInitiation 20
Message EUSTPCreditTransferInitiation 114
Message PaymentInitiationStatus 173
Message STPCreditTransferInitiation 213

<CdtrCtryOfRes>: CreditorCountryOfResidence
Message CoreCreditTransferInitiation 21
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

<CdtrRef>: CreditorReference
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 214

<CdtrTaxId>: CreditorTaxIdentification
Message CoreCreditTransferInitiation 22

<CdtrTaxTp>: CreditorTaxType
Message CoreCreditTransferInitiation 22

<CdtTrfTpId>: CreditTransferTypeIdentification
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

<CertId>: CertificateIdentification
Message CoreCreditTransferInitiation 22

<CHBC>: SwissBCIdentification
282, 294

<ChqFr>: ChequeFrom
Message CoreCreditTransferInitiation 19

<ChqInstr>: ChequeInstruction
Message CoreCreditTransferInitiation 19

<ChqMtrtyDt>: ChequeMaturityDate
Message CoreCreditTransferInitiation 19

<ChqNb>: ChequeNumber
Message CoreCreditTransferInitiation 19

<ChqTp>: ChequeType
Message CoreCreditTransferInitiation 19

<ChrgBr>: ChargeBearer
Message CoreCreditTransferInitiation 21
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

<ChrgsAcct>: ChargesAccount
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

<ChrgsAcctAgt>: ChargesAccountAgent
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

<CHSIC>: SwissSICIdentification
282, 294

<ClrSysMmbId>: ClearingSystemMemberIdentification
282, 293

<CreDtTm>: CreationDateTime
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111

Message PaymentInitiationStatus 170
Message STPCreditTransferInitiation 210

<CtgyDesc>: CategoryDescription
Message CoreCreditTransferInitiation 22

<CtrlSum>: ControlSum
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

<Ctry>: Country
283, 283, 300

<CtrySubDvsn>: CountrySubDivision
283, 283, 300

D

<DbtPurp>: DebitPurpose
Message CoreCreditTransferInitiation 22

<Dbtr>: Debtor
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

<DbtrAcct>: DebtorAccount
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

<DbtrCtryOfRes>: DebtorCountryOfResidence
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

<DbtrTaxId>: DebtorTaxIdentification
Message CoreCreditTransferInitiation 22

<DEBLZ>: GermanBankleitzahlIdentification
282, 294

<DlvrTo>: DeliverTo
Message CoreCreditTransferInitiation 19

<DlvryMtd>: DeliveryMethod
Message CoreCreditTransferInitiation 19

<DmstAcct>: DomesticAccount

278

<DocRefNb>: DocumentReferenceNumber
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 213

<DrvrsLicNb>: DriversLicenseNumber
Message CoreCreditTransferInitiation 17, 18, 19, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 111, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

<DscntApldAmt>: DiscountAppliedAmount
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 213

<DuePyblAmt>: DuePayableAmount
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 213

<DUNS>: DUNS
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

E

<EANGLN>: EANGLN
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

<EndToEndId>: EndToEndIdentification
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

<EqvtAmt>: EquivalentAmount
Message CoreCreditTransferInitiation 19
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

<ESNCC>: SpanishDomesticInterbankingIdentification
282, 294

F

<FinInstnId>: FinancialInstitutionIdentification
282

<FnlAgt>: FinalAgent
Message CoreCreditTransferInitiation 21
Message EUSTPCreditTransferInitiation 114
Message PaymentInitiationStatus 173
Message STPCreditTransferInitiation 213

<FnlAgtAcct>: FinalAgentAccount
Message CoreCreditTransferInitiation 21

<FnlPty>: FinalParty
Message CoreCreditTransferInitiation 21

<FrmsCd>: FormsCode
Message CoreCreditTransferInitiation 19

<FrstAgt>: FirstAgent
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 212

<FwdgAgt>: ForwardingAgent
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 170
Message STPCreditTransferInitiation 211

G

<GBSC>: UKDomesticSortCode
282, 294

<GnlInf>: GeneralInformation
Message PaymentInitiationStatus 170

<Grpg>: Grouping
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

<GrpHdr>: GroupHeader
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

<GrpId>: GroupIdentification
Message CoreCreditTransferInitiation 16

Message EUSTPCreditTransferInitiation 111
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 210

<GrpSts>: GroupStatus
Message PaymentInitiationStatus 171

H

<HKNCC>: HongKongBankCode
282, 294

I

<IBAN>: IBAN
278
Message EUSTPCreditTransferInitiation 114

<Id>: Identification
278, 280, 281, 283, 283, 294
Message CoreCreditTransferInitiation 16, 17, 18, 18, 19, 20, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 113, 113, 114, 115, 115
Message PaymentInitiationStatus 170, 171, 172, 173, 173
Message STPCreditTransferInitiation 210, 211, 212, 212, 212, 214, 214

<IdntyCardNb>: IdentityCardNumber
Message CoreCreditTransferInitiation 17, 18, 20, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 212, 213, 214, 215

<IdTp>: IdentificationType
281

<IENSC>: IrishNSCIdentification
282, 294

<Inf>: Information
Message CoreCreditTransferInitiation 21

<InitgPty>: InitiatingParty
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message PaymentInitiationStatus 170
Message STPCreditTransferInitiation 210

<InstdAmt>: InstructedAmount
Message CoreCreditTransferInitiation 19
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

<InstrForFnlAgt>: InstructionForFinalAgent
Message CoreCreditTransferInitiation 21

<InstrForFrstAgt>: InstructionForFirstAgent
Message CoreCreditTransferInitiation 21

<InstrId>: InstructionIdentification
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

<InstrPrty>: InstructionPriority
Message CoreCreditTransferInitiation 17, 19
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

<IntrmyAgt1>: IntermediaryAgent1
Message CoreCreditTransferInitiation 20

<IntrmyAgt2>: IntermediaryAgent2
Message CoreCreditTransferInitiation 20

<Invcee>: Invoicee
Message CoreCreditTransferInitiation 23
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 214

<Invcr>: Invoicer
Message CoreCreditTransferInitiation 23
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 214

<Issr>: Issuer
280, 283, 294
Message CoreCreditTransferInitiation 17, 18, 20, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 211, 212, 213, 214, 215

<ITNCC>: ItalianDomesticIdentificationCode
282, 294

L

<LclInstrm>: LocalInstrument
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

M

<MemoFld>: MemoField
Message CoreCreditTransferInitiation 19

<MplyrIdNb>: EmployerIdentificationNumber
Message CoreCreditTransferInitiation 17, 18, 20, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 212, 213, 214, 215

N

<NbOfTxs>: NumberOfTransactions
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

<Nm>: Name
282, 283
Message CoreCreditTransferInitiation 16, 17, 18, 18, 19, 19, 19, 20, 20, 21, 22, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 113, 113, 114, 115, 115
Message PaymentInitiationStatus 170, 171, 172, 173, 173
Message STPCreditTransferInitiation 210, 211, 212, 212, 212, 214, 214

<NZNCC>: NewZealandNCCIdentification
282, 294

O

<OrgId>: OrganisationIdentification
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

<OrgnlGrpRefInfAndSts>: OriginalGroupReferenceInformationAndStatus
Message PaymentInitiationStatus 171

<OrgnlMsgTp>: OriginalMessageType
Message PaymentInitiationStatus 171

<OrgnlPmtInf>: OriginalPaymentInformation
Message PaymentInitiationStatus 171

<OrgnlTxInf>: OriginalTransactionInformation
Message PaymentInitiationStatus 172

<OrgnlTxRefInfAndSts>: OriginalTransactionReferenceInformationAndStatus
Message PaymentInitiationStatus 172

<OrgtgPty>: OriginatingParty
Message CoreCreditTransferInitiation 19

<OthrId>: OtherIdentification
Message CoreCreditTransferInitiation 17, 18, 20, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 211, 212, 213, 214, 215

P

<PmtId>: PaymentIdentification
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

<PmtInf>: PaymentInformation
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message STPCreditTransferInitiation 211

<PmtInitnStsId>: PaymentInitiationStatusIdentification
Message PaymentInitiationStatus 170

<PmtMtdByFrstAgt>: PaymentMethodByFirstAgent
Message CoreCreditTransferInitiation 17
Message PaymentInitiationStatus 171

<PmtRmtId>: PaymentRemittanceIdentification
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

<PmtSchme>: PaymentScheme
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

<PmtTx>: PaymentTransaction
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

<Prtry>: Proprietary
Message CoreCreditTransferInitiation 18, 21, 22
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

<PrtryId>: ProprietaryIdentification
283, 294
Message CoreCreditTransferInitiation 16, 18, 19, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

<PrtryInf>: ProprietaryInformation
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

<Prty>: Priority
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

<PrvtId>: PrivateIdentification
Message CoreCreditTransferInitiation 16, 18, 19, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 111, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

<PsptNb>: PassportNumber
Message CoreCreditTransferInitiation 17, 18, 20, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

<PstCd>: PostCode
283, 283, 300

<PstlAdr>: PostalAddress
282, 283
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 115
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 212, 214, 214

<PTNCC>: PortugueseNCCIdentification
282, 294

<Purp>: Purpose
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

R

<Rate>: Rate

Message CoreCreditTransferInitiation 22

<ReqdExctnDt>: RequestedExecutionDate
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

<RfrdDocAmt>: ReferredDocumentAmount
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

<RfrdDocRltdDt>: ReferredDocumentRelatedDate
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

<RfrdDocTp>: ReferredDocumentType
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

<RgltryRptg>: RegulatoryReporting
Message CoreCreditTransferInitiation 21

<RgnlClrZone>: RegionalClearingZone
Message CoreCreditTransferInitiation 19

<RmtdAmt>: RemittedAmount
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 213

<RmtInf>: RemittanceInformation
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

<RmtLctnElctrncAdr>: RemittanceLocationElectronicAddress
Message CoreCreditTransferInitiation 22

<RmtLctnMtd>: RemittanceLocationMethod
Message CoreCreditTransferInitiation 22

<RmtLctnPstlAdr>: RemittanceLocationPostalAddress
Message CoreCreditTransferInitiation 22

<RUCB>: RussianCentralBankIdentificationCode
282, 294

S

<SclSctyNb>: SocialSecurityNumber
Message CoreCreditTransferInitiation 17, 18, 19, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 111, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

<Strd>: Structured
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

<StrtNm>: StreetName
283, 283, 300

<StsRsn>: StatusReason
Message PaymentInitiationStatus 171, 172

<SttlmPrty>: SettlementPriority
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

T

<Tax>: Tax
Message CoreCreditTransferInitiation 22

<TaxAmt>: TaxAmount
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 115
Message STPCreditTransferInitiation 213

<TaxblBaseAmt>: TaxableBaseAmount
Message CoreCreditTransferInitiation 22

<TaxIdNb>: TaxIdentificationNumber
Message CoreCreditTransferInitiation 16, 17, 18, 18, 19, 20, 20, 20, 21, 21, 23, 23, 23, 24
Message EUSTPCreditTransferInitiation 111, 112, 112, 113, 114, 114, 115, 115, 116, 116
Message PaymentInitiationStatus 170, 170, 172, 172, 173, 173
Message STPCreditTransferInitiation 210, 210, 211, 212, 213, 213, 214, 214, 215, 215

<TaxRefNb>: TaxReferenceNumber
Message CoreCreditTransferInitiation 22

<TaxTp>: TaxType
Message CoreCreditTransferInitiation 22

<TaxTpInf>: TaxTypeInformation
Message CoreCreditTransferInitiation 22

<Tp>: Type
Message CoreCreditTransferInitiation 18, 18, 20
Message EUSTPCreditTransferInitiation 113, 113
Message PaymentInitiationStatus 172, 173
Message STPCreditTransferInitiation 212, 212

<TtlTaxAmt>: TotalTaxAmount
Message CoreCreditTransferInitiation 22

<TtlTaxblBaseAmt>: TotalTaxableBaseAmount
Message CoreCreditTransferInitiation 22

<TwnNm>: TownName
283, 283, 300

<TxSts>: TransactionStatus
Message PaymentInitiationStatus 172

U

<UPIC>: UPIC
278

<USCH>: CHIPSParticipantIdentification
282, 294

<USCHU>: CHIPSUniversalIdentification
282, 293
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

<USFW>: FedwireRoutingNumberIdentification
282, 294

<Ustrd>: Unstructured
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

X

<XchgCtrctRef>: ExchangeContractReference
Message CoreCreditTransferInitiation 21
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

Z

<ZANCC>: SouthAfricanNCCIdentification
282, 294

Index of Message Item Types

A

AccountIdentification1Choice
278
Message CoreCreditTransferInitiation 18, 18, 20
Message EUSTPCreditTransferInitiation 113, 113
Message PaymentInitiationStatus 172, 173
Message STPCreditTransferInitiation 212, 212, 213

AccountIdentification2
Message EUSTPCreditTransferInitiation 114

AddressType2Code
282, 283, 300

AmountType1Choice
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

AustrianBankleitzahlIdentifier
270, 282, 294

B

BaseOneRate
276

BatchBookingIndicator
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

BBANIdentifier
270, 278

BEIIdentifier
270
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

BICIdentification1
280
Message EUSTPCreditTransferInitiation 112, 113, 113, 114

BICIdentifier
270, 280, 282, 293

BranchAndFinancialInstitutionIdentification
282
Message CoreCreditTransferInitiation 17, 18, 18, 20, 20, 21
Message PaymentInitiationStatus 170, 171, 173

BranchData
283

C

CanadianPaymentsARNIdentifier
271, 282, 294

CashAccount3
Message CoreCreditTransferInitiation 18, 18, 20
Message EUSTPCreditTransferInitiation 113, 113
Message PaymentInitiationStatus 172, 173
Message STPCreditTransferInitiation 212, 212

CashAccountType3Code
Message CoreCreditTransferInitiation 18, 18, 20
Message EUSTPCreditTransferInitiation 113, 113
Message PaymentInitiationStatus 172, 173
Message STPCreditTransferInitiation 212, 212

CashClearingSystem2Code
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

ChargeBearer1Code
Message CoreCreditTransferInitiation 21
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

Cheque2
Message CoreCreditTransferInitiation 19

ChequeDelivery1Code
Message CoreCreditTransferInitiation 19

ChequeType2Code
Message CoreCreditTransferInitiation 19

CHIPSParticipantIdentifier
271, 282, 294

CHIPSUniversalIdentifier
271, 282, 293
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

ClearingSystemMemberIdentificationChoice
282, 293

CountryCode
271, 283, 283, 300
Message CoreCreditTransferInitiation 18, 21
Message EUSTPCreditTransferInitiation 113, 114
Message STPCreditTransferInitiation 212, 213

CreditTransferType2Code
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

CreditTransferTypeIdentification
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

CurrencyAndAmount
269
Message CoreCreditTransferInitiation 19, 19, 21, 22, 22, 22, 22, 22, 22, 22, 22, 22
Message EUSTPCreditTransferInitiation 113, 113, 115, 115, 115, 115, 115
Message PaymentInitiationStatus 172, 172
Message STPCreditTransferInitiation 212, 212, 213, 213, 213, 213, 213

CurrencyCode
272
Message CoreCreditTransferInitiation 18, 18, 19, 19, 19, 20, 21, 22, 22, 22, 22, 22, 22, 22, 22, 22
Message EUSTPCreditTransferInitiation 113, 113, 113, 113, 114, 115, 115, 115, 115, 115
Message PaymentInitiationStatus 172, 172, 172, 172, 173
Message STPCreditTransferInitiation 212, 212, 212, 212, 212, 213, 213, 213, 213, 213

D

DecimalNumber
275
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

DocumentType1Code
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

DunsIdentifier
272
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

E

EANGLNIdentifier
272
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

EquivalentAmount
Message CoreCreditTransferInitiation 19
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

ExtensiveBranchNetworkIdentifier
272, 282, 294

F

FedwireRoutingNumberIdentifier
272, 282, 294

FinancialInstitutionIdentification1
282

FinancialInstitutionIdentification2Choice
293
Message STPCreditTransferInitiation 211, 212, 212, 213

G

GeneralInformation1
Message PaymentInitiationStatus 170

GenericIdentification3
280, 283, 294
Message CoreCreditTransferInitiation 16, 18, 19, 20, 21, 23, 24

Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

GenericIdentification4
281
Message CoreCreditTransferInitiation 17, 18, 20, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 112, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 211, 212, 213, 214, 215

GenericPaymentTransaction1
Message STPCreditTransferInitiation 212

GenericPaymentTransaction2
Message EUSTPCreditTransferInitiation 113

GenericPaymentTransaction3
Message CoreCreditTransferInitiation 18

GermanBankleitzahlIdentifier
272, 282, 294

GroupInformation1
Message CoreCreditTransferInitiation 16

GroupInformation2
Message EUSTPCreditTransferInitiation 111

GroupInformation3
Message STPCreditTransferInitiation 210

GroupingIndicator
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

H

HongKongBankIdentifier
273, 282, 294

I

IBANIdentifier
273, 278
Message EUSTPCreditTransferInitiation 114

ImpliedCurrencyAndAmount
269

Instruction3Code
Message CoreCreditTransferInitiation 21

InstructionForFinalAgent
Message CoreCreditTransferInitiation 21

InstructionForFirstAgent
Message CoreCreditTransferInitiation 21

IrishNSCIdentifier
273, 282, 294

ISODate
270
Message CoreCreditTransferInitiation 17, 19, 22
Message EUSTPCreditTransferInitiation 112, 114
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211, 213

ISODateTime
270
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message PaymentInitiationStatus 170
Message STPCreditTransferInitiation 210

ItalianDomesticIdentifier
273, 282, 294

L

LanguageCode
273

M

Max105Text
276
Message PaymentInitiationStatus 171, 172

Max10Text
276

Max128Text
276
Message CoreCreditTransferInitiation 16, 22
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

Max140Text
276

Message CoreCreditTransferInitiation 21, 22, 22, 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

Max15NumericText
277
Message CoreCreditTransferInitiation 16
Message EUSTPCreditTransferInitiation 111
Message STPCreditTransferInitiation 210

Max16Text
277, 283, 283, 283, 283, 300, 300

Max256Text
277

Max350Text
277

Max35Text
277, 278, 280, 280, 281, 281, 283, 283, 283, 283, 283, 283, 283, 283, 294, 294, 300, 300
Message CoreCreditTransferInitiation 16, 16, 16, 17, 17, 17, 17, 17, 17, 17, 17, 17, 17, 18, 18, 18, 18, 18, 18, 18, 18, 18, 18, 18, 18, 18, 18, 19, 19, 19, 19, 19, 19, 19, 19, 19, 20, 20, 20, 20, 20, 20, 20, 20, 20, 20, 20, 20, 20, 20, 20, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21, 22, 22, 22, 22, 22, 22, 22, 22, 23, 23, 23, 23, 23, 23, 23, 23, 23, 23, 23, 23, 24, 24, 24, 24, 24, 24, 24, 24
Message EUSTPCreditTransferInitiation 111, 111, 111, 111, 111, 112, 112, 112, 112, 112, 112, 112, 112, 112, 112, 113, 113, 113, 113, 113, 113, 113, 113, 113, 113, 113, 113, 114, 114, 114, 114, 114, 114, 114, 114, 114, 114, 114, 115, 115, 115, 115, 115, 115, 115, 115, 115, 115, 115, 115, 116, 116, 116, 116, 116, 116, 116, 116, 116, 116
Message PaymentInitiationStatus 170, 170, 170, 170, 170, 170, 170, 170, 170, 170, 170, 171, 171, 171, 171, 172, 172, 172, 172, 172, 172, 172, 172, 172, 172, 172, 172, 173, 173, 173, 173, 173, 173, 173, 173, 173, 173, 173
Message STPCreditTransferInitiation 210, 210, 210, 210, 210, 210, 210, 210, 210, 210, 211, 211, 211, 211, 211, 211, 211, 211, 211, 211, 212, 212, 212, 212, 212, 212, 212, 212, 213, 213, 213, 213, 213, 213, 213, 213, 213, 213, 213, 213, 214, 214, 214, 214, 214, 214, 214, 214, 214, 214, 214, 214, 215, 215, 215, 215, 215, 215, 215, 215, 215

Max3Text
277
Message CoreCreditTransferInitiation 21

Max70Text
278, 282, 282, 283, 283, 283, 300, 300
Message CoreCreditTransferInitiation 16, 17, 18, 18, 19, 19, 19, 20, 20, 21, 22, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 113, 113, 114, 115, 115
Message PaymentInitiationStatus 170, 171, 172, 173, 173
Message STPCreditTransferInitiation 210, 211, 212, 212, 212, 214, 214

MICIdentifier
273

N

NameAndAddress3
Message CoreCreditTransferInitiation 19, 19, 22

NationalityCode
274

NewZealandNCCIdentifier
274, 282, 294

NonFinancialInstitutionIdentification1
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 116
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 214

Number
275

O

OriginalGroupReferenceInformation1
Message PaymentInitiationStatus 171

OriginalTransactionInformation1
Message PaymentInitiationStatus 172

P

Party1Choice
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 115
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 212, 214, 214

PartyIdentification1
Message CoreCreditTransferInitiation 16, 17, 19, 20, 21, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 115
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 212, 214, 214

PaymentGroupStatusCode
Message PaymentInitiationStatus 171

PaymentIdentification
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message PaymentInitiationStatus 172
Message STPCreditTransferInitiation 212

PaymentInformation6
Message CoreCreditTransferInitiation 17

PaymentInformation7

Message EUSTPCreditTransferInitiation 112

PaymentInformation8
Message STPCreditTransferInitiation 211

PaymentInformation9
Message PaymentInitiationStatus 171

PaymentMethod1Code
Message CoreCreditTransferInitiation 17
Message PaymentInitiationStatus 171

PaymentPurpose1Code
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

PaymentReference1
Message PaymentInitiationStatus 172

PaymentReject1Code
Message PaymentInitiationStatus 171, 172

PaymentSchemeChoice
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

PaymentTransactionStatusCode
Message PaymentInitiationStatus 172

PercentageRate
276
Message CoreCreditTransferInitiation 22

PersonIdentification2
Message CoreCreditTransferInitiation 16, 18, 19, 20, 21, 23, 24
Message EUSTPCreditTransferInitiation 111, 113, 114, 115, 116
Message PaymentInitiationStatus 170, 172, 173
Message STPCreditTransferInitiation 210, 211, 213, 214, 215

PortugueseNCCIdentifier
274, 282, 294

PostalAddress1
282, 283, 299
Message CoreCreditTransferInitiation 16, 17, 19, 19, 19, 20, 21, 22, 23, 23
Message EUSTPCreditTransferInitiation 111, 112, 114, 115, 115
Message PaymentInitiationStatus 170, 171, 173
Message STPCreditTransferInitiation 210, 211, 212, 214, 214

Priority2Code
Message CoreCreditTransferInitiation 17, 17, 19
Message EUSTPCreditTransferInitiation 112, 112
Message PaymentInitiationStatus 171, 171
Message STPCreditTransferInitiation 211, 211

PurposeChoice
Message CoreCreditTransferInitiation 18
Message EUSTPCreditTransferInitiation 113
Message STPCreditTransferInitiation 212

R

ReferredDocumentAmount1Choice
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

RemittanceInformation3Choice
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

RemittanceLocationMethod1Code
Message CoreCreditTransferInitiation 22

RussianCentralBankIdentificationCodeIdentifier
274, 282, 294

S

SettlementPriorityChoice
Message CoreCreditTransferInitiation 17
Message EUSTPCreditTransferInitiation 112
Message PaymentInitiationStatus 171
Message STPCreditTransferInitiation 211

SimpleIdentificationInformation
278

SmallNetworkIdentifier
274, 282, 294

SouthAfricanNCCIdentifier
274, 282, 294

SpanishDomesticInterbankingIdentifier
274, 282, 294

StructuredRegulatoryReporting2
Message CoreCreditTransferInitiation 21

StructuredRemittanceInformation2
Message CoreCreditTransferInitiation 22
Message EUSTPCreditTransferInitiation 114
Message STPCreditTransferInitiation 213

SwissBCIdentifier
275, 282, 294

SwissSICIdentifier
275, 282, 294

T

TaxDetails
Message CoreCreditTransferInitiation 22

TaxInformation1
Message CoreCreditTransferInitiation 22

TaxType
Message CoreCreditTransferInitiation 22

U

UKDomesticSortCodeIdentifier
275, 282, 294

UPICIdentifier
275, 278

Revision Record

Revision	Date	Author	Description	Sections affected
1.0	14/09/2005	ISO 20022 RA	Approved by Payments SEG	All