UNIFI (ISO 20022) Message Definition Report

Payments Standards - Initiation

Approved by UNIFI Payments SEG on 6 June 2006

Edition October 2006

Table Of Contents

Overview **1**
What does this document contain? 1
Payment messages 1
Related messages 1
How to read 1
Message Flows **2**
Customer Credit Transfer Initiation 2
Relay Credit Transfer Initiation 6
Customer Direct Debit Initiation & FIToFI Customer Direct Debit 10
Direct Debit: Payment Status Report (Positive) 11
Direct Debit: Payment Status Report (Negative) 13
Direct Debit: Payment Reversal 16
Direct Debit: Payment Cancellation Request 18
Message: CustomerCreditTransferInitiationV02 <pain.001.001.02> **22**
Message Scope and Usage 22
Message Structure 26
Message Items Description 30
Business Example 67
Message: CustomerDirectDebitInitiationV01 <pain.008.001.01> **75**
Message Scope and Usage 75
Message Structure 79
Message Items Description 83
Business Example 1 119
Business Example 2 126
Message: CustomerPaymentReversalV01 <pain.007.001.01> **134**
Message Scope and Usage 134
Message Structure 135
Message Items Description 139
Business Example - Reversal of a CustomerDirectDebitInitiation 177
Message: PaymentCancellationRequestV01 <pain.006.001.01> **182**
Message Scope and Usage 182
Message Structure 183
Message Items Description 187
Business Example - Request to cancel a CustomerCreditTransferInitiation 226
Business Example - Request to cancel a CustomerDirectDebitInitiation 229
Message: PaymentStatusReportV02 <pain.002.001.02> **233**
Message Scope and Usage 233
Message Structure 234
Message Items Description 238
Business Example - Status of a CustomerCreditTransferInitiation 283
Business Example - Status of a PaymentCancellationRequest 285
Business Example - Status of a CustomerDirectDebitInitiation 287
Message Item Types **291**
Data Types 291
End Points 302
Indexes **358**
Index of Message Items 358
Index of XML tags 380
Index of Message Item Types 402
Revision Record **417**

Overview

What does this document contain?

This document describes a set of Payments Initiation messages approved by the Payments Standards Evaluation Group as UNIFI messages on 6 June 2006. This set includes the following messages ::

Payment messages

Two messages have been developed:
- the Customer Credit Transfer Initiation
- the Customer Direct Debit Initiation

Related messages

Three messages have been developed:
- the Customer Payment Reversal
- the Payment Cancellation Request
- the Payment Status Report

Note : the Payment Cancellation Request and the Payment Status report are exactly the same messages as the Payment Cancellation Request and the Payment Status report included in the Payments Clearing and Settlement set of messages. They only differ in the specific usage rules defined for using these messages in the two different legs (Payment Initiation and Payments Clearing and Settlement) of the end-to-end payment chain.

How to read

In compliance with ISO 20022, UML (Unified Modelling Language) is used to depict business and logical models. As knowledge of UML is not a requirement to discuss the business standards, the data format for the messages are presented in a user-friendlier way. This way of representation is automatically generated from the models, thereby ensuring absolute consistency between the model information and the published standard.
The message flow diagrams are bundled in a separate document.

Message Flows

Customer Credit Transfer Initiation

Introduction

The CustomerCreditTransferInitiation message is sent from the Initiating Party to the Debtor Agent. Depending on the service level agreed between the Debtor Agent and the Initiating Party, the Debtor Agent may send a PaymentStatusReport message to inform the Initiating Party of the status of the initiation.
A number of additional message flows have been included to illustrate the complete end-to-end execution of the payment initiation. However, these messages are out of scope.
These message flows are:

- **Account information from Debtor Agent to Initiating Party:** Depending on the service level agreed, the Debtor Agent may provide the Initiating Party with a debit advice and/or statement once the payment has been executed and the debit entry has been posted to the Debtor account;
- **Inter-bank clearing and settlement between Debtor Agent and Creditor Agent:** Depending on the inter-bank clearing and settlement method chosen, a number of messages may be exchanged between the agent parties in the payment chain;
- **Account information from creditor agent to creditor:** Depending on the service level agreed, the Creditor Agent may provide the Creditor with a credit advice and/or statement information once the payment has been posted to the Creditor account.

Sequence Diagrams

Scenario A: One actor playing roles of Initiating Party, Debtor and Ultimate Debtor and one actor playing roles of Creditor and Ultimate Creditor

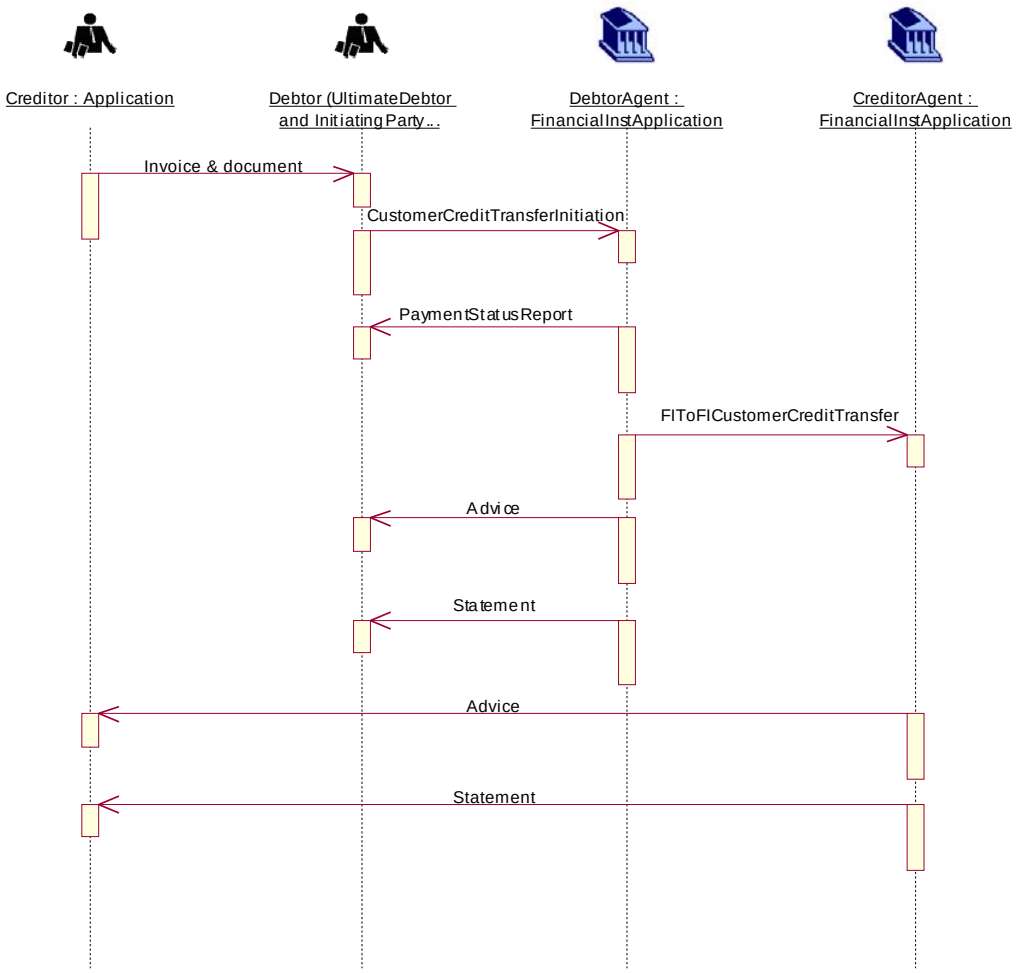

Scenario B: One actor playing roles of Initiating Party and Debtor, different actor for the role of Ultimate Debtor

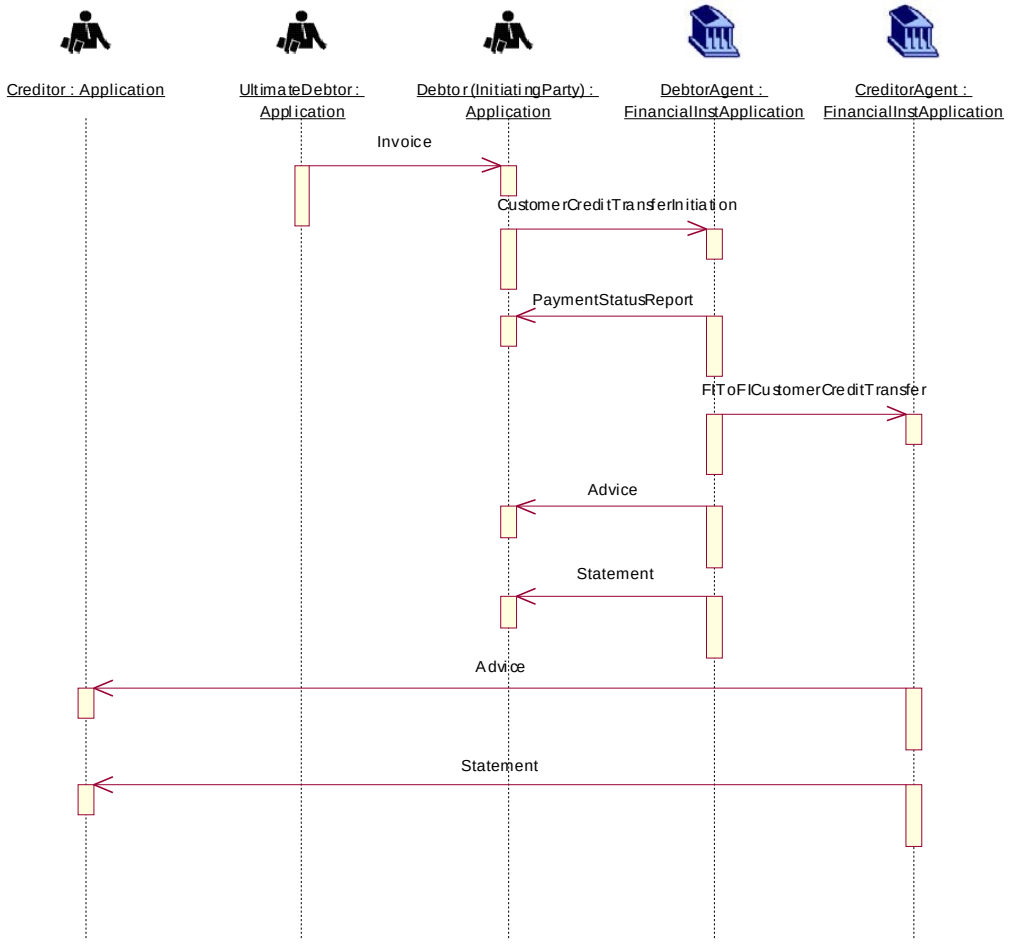

Scenario C: Three different actors playing the roles of Initiating Party, Debtor and Ultimate Debtor

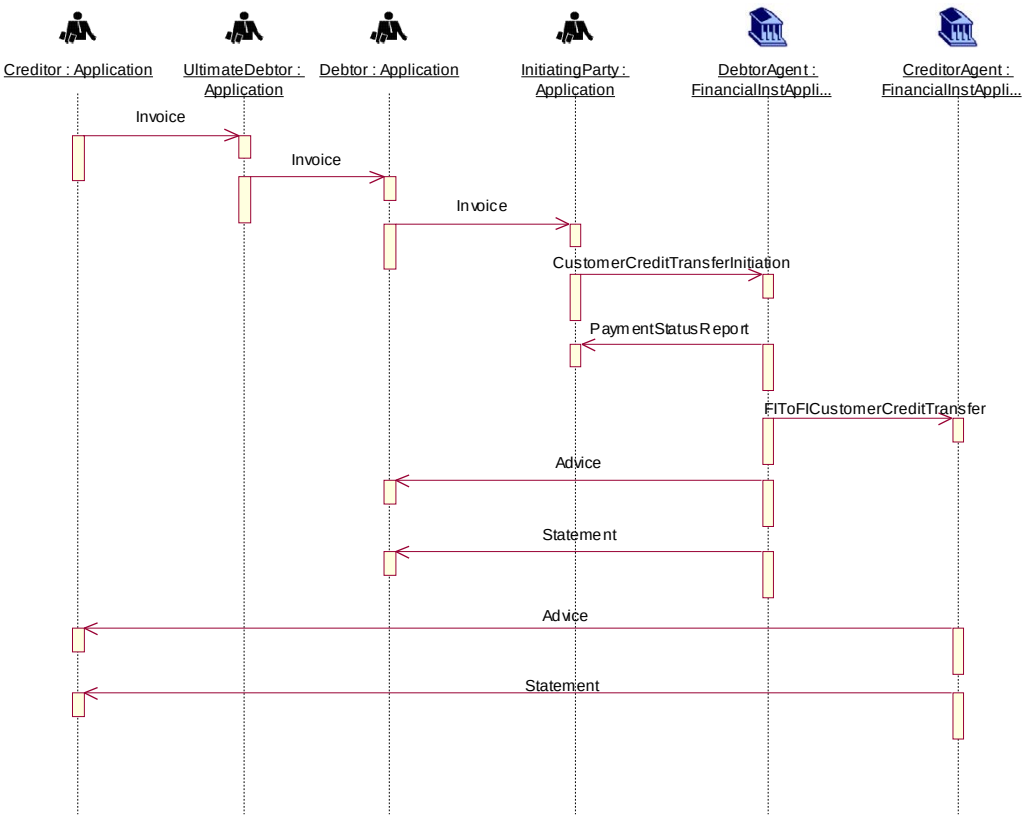

Narrative and Scenarios

The scenarios illustrate the different customer roles that can be played on the initiating side of the credit transfer initiation, and on the receiving side of the cash transfer.
On the initiating side, up to three customer roles can be specified: the Initiating Party, ie, the party sending the message, the Debtor, i.e. the debit account owner, and the Ultimate Debtor, ie, the party that owes the cash to the Creditor as a result of receipt of goods or services.
These three roles can be played by one and the same actor, or they can be played by different actors.
The CustomerCreditTransferInitiation message allows inclusion of the three different roles on the initiating side.
On the receiving side, up to two customer roles can be specified: the Creditor, i.e. the credit account owner, and the Ultimate Creditor, i.e. the party that is the ultimate beneficiary of the cash transfer. These two roles can be played by one and the same actor, or they can be played by different actors.
The CustomerCreditTransferInitiation message allows inclusion of the two different roles on the receiving side.

Scenario A: the message is sent by an Initiating Party to the Debtor Agent. The actor playing the role of Initiating Party is the same as the actor playing the role of Debtor and Ultimate Debtor. The actor playing the role of Creditor is the same as the actor playing the role of Ultimate Creditor;

Scenario B: the message is sent by an Initiating Party to the Debtor Agent. The actor playing the role of Initiating Party is the same as the actor playing the role of Debtor, but the role of the Ultimate Debtor is played by a different actor;

Scenario C: the message is sent by an Initiating Party to the Debtor Agent. The actor playing the role of Initiating Party is different from the actor playing the role of Debtor. The role of the Ultimate Debtor is played by yet another actor.

Relay Credit Transfer Initiation

Introduction

The CustomerCreditTransferInitiation message is sent from the Initiating Party to the Forwarding Agent.
Depending on the service level agreed between the Forwarding Agent and the Initiating Party, the Forwarding Agent may send a PaymentStatusReport message to inform the Initiating Party of the status of the initiation.
After performing a series of checks, the Forwarding Agent will forward the CustomerCreditTransferInitiation message to the relevant Debtor Agent, ie, the agent that will debit the Debtor account.
A relay scenario always requires service level agreements between all parties involved, in which obligations and responsibilities for each party are stipulated.
A number of additional message flows have been included to illustrate the complete end-to-end execution of the payment initiation. However, these messages are out of scope.
These message flows are:

- **Account information:** Depending on what has been agreed between the parties, the Debtor Agent may provide the Initiating Party with a debit advice and/or statement once the payment has been executed and the debit entry has been posted to the Debtor account. The Debtor Agent may send this information to the Forwarding Agent. The Forwarding Agent in its turn will forward the information to the Initiating Party;
- **Inter-bank clearing and settlement between Debtor Agent and Creditor Agent:** Depending on the inter-bank clearing and settlement method chosen, a number of messages may be exchanged between the Debtor Agent and the next agents in the payment chain;
- **Account information from Creditor Agent to Creditor:**Depending on the service level agreed, the Creditor Agent may provide the Creditor with a credit advice and/or statement information once the payment has been posted to the Creditor account.

Sequence Diagrams

Scenario A: One actor playing roles of Initiating Party, Debtor and Ultimate Debtor

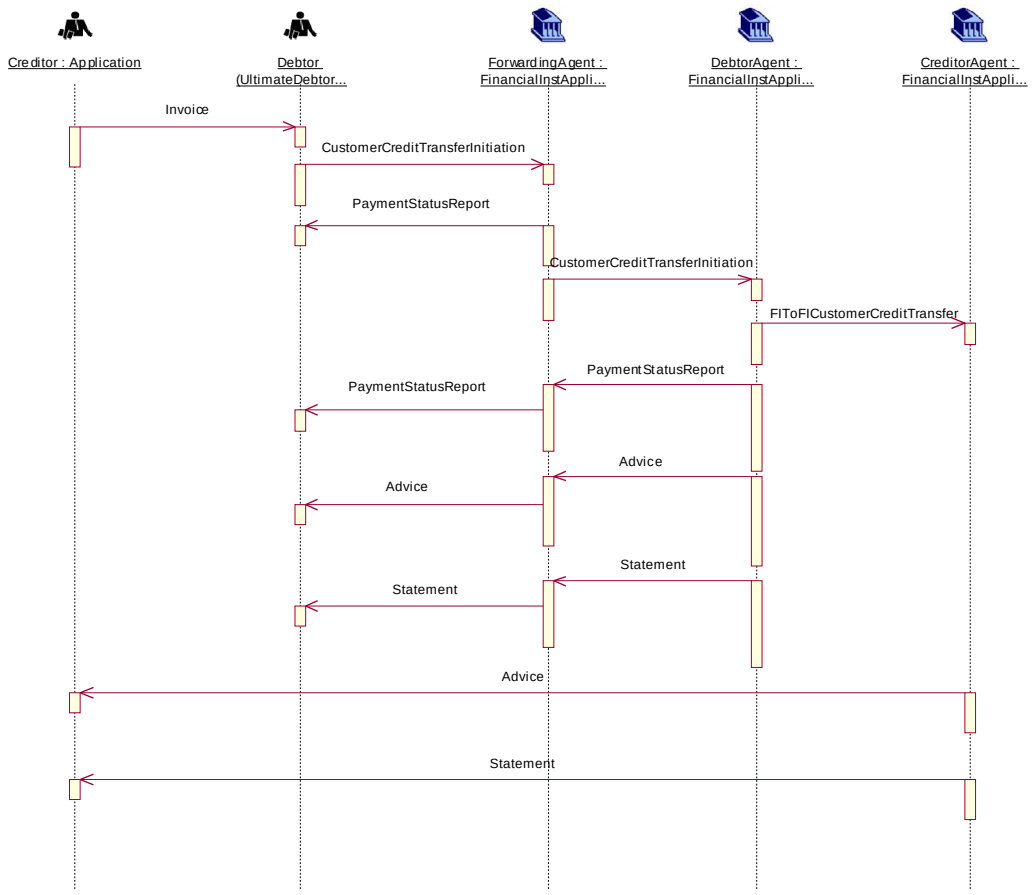

Scenario B: One actor playing roles of Initiating Party and Debtor, different actor for the role of Ultimate Debtor

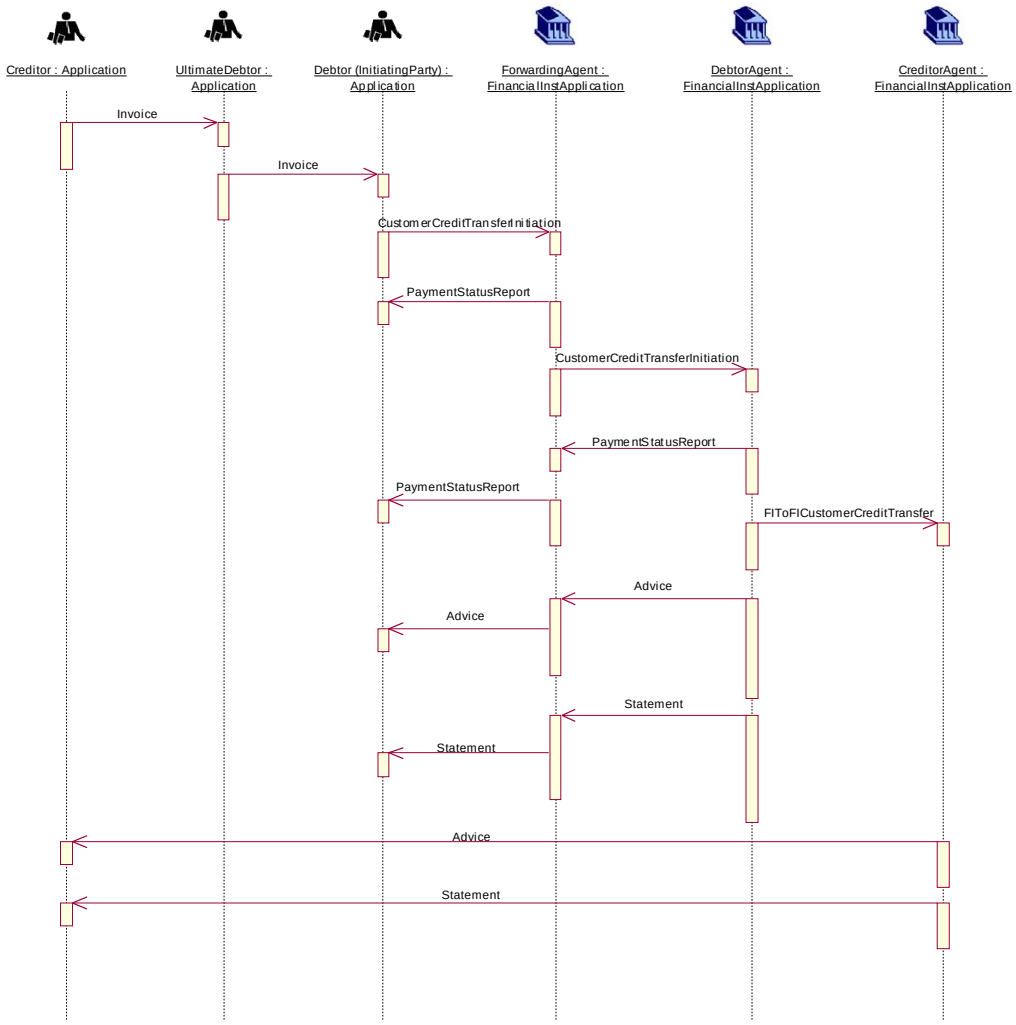

Scenario C: One actor playing role of Initiating Party and Ultimate Debtor, different actor for role of Debtor

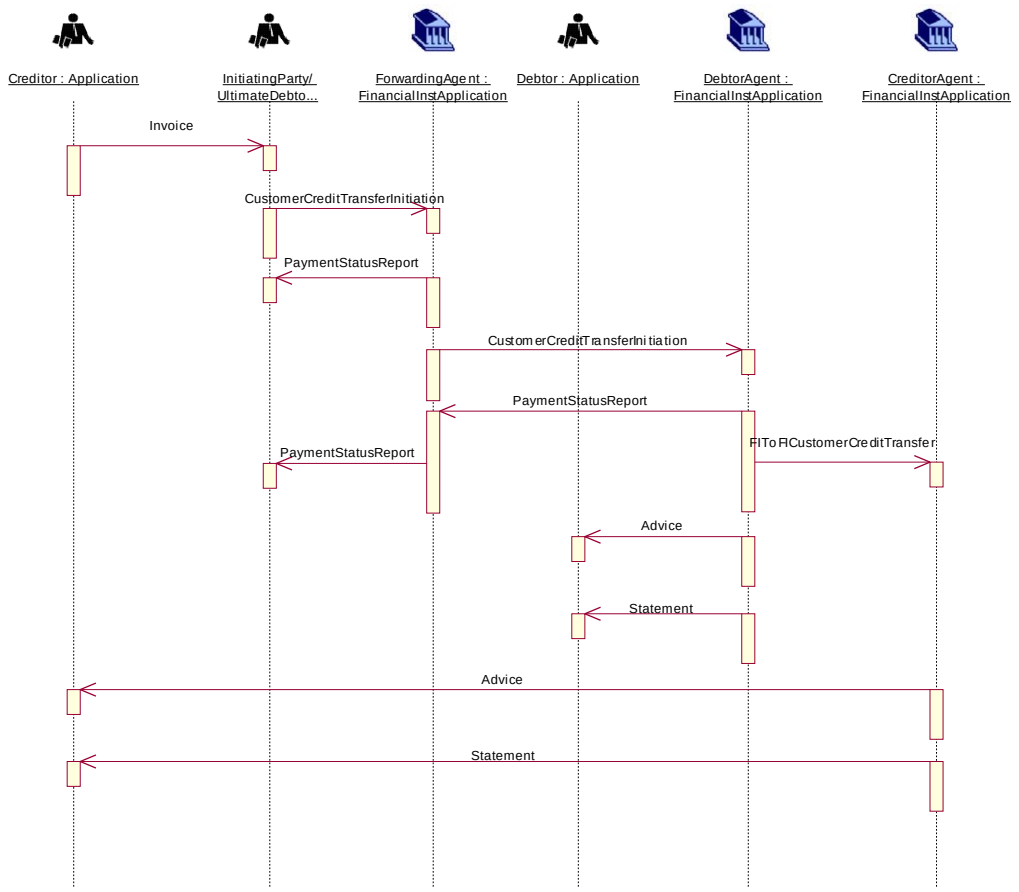

Narrative and Scenarios

The illustrated scenarios show the different customer roles that can be played on the initiating side of the credit transfer initiation, and on the receiving side of the cash transfer.
On the initiating side, up to three customer roles can be specified: the Initiating Party, ie, the party sending the message, the Debtor, ie, the debit account owner, and the Ultimate Debtor, ie, the party that owes the cash to the Creditor, as a result of receipt of goods or services.
These three roles can be played by one and the same actor, or they can be played by different actors. The CustomerCreditTransferInitiation message allows inclusion of the three different roles on the initiating side.
On the receiving side, up to two customer roles can be specified: the Creditor, ie, the credit account owner, and the Ultimate Creditor, ie, the party that is the ultimate beneficiary of the cash transfer. These two roles can be played by one and the same actor, or they can be played by different actors. The CustomerCreditTransferInitiation message allows inclusion of the two different roles on the receiving side.
Scenario A: The message is sent by an Initiating Party to the Forwarding Agent. The actor playing the role of Initiating Party is the same as the actor playing the role of Debtor and Ultimate Debtor. This illustrates the scenario in which a company owns accounts abroad and uses a concentrator bank to initiate all its payments. The company plays the role of Debtor, Ultimate Debtor and Initiating Party and asks the Forwarding Agent to request the execution of the payment at the Debtor Agent, ie, the account servicer of the Debtor. After performing a series of checks, the Forwarding Agent will forward the message to the Debtor Agent.

Scenario B: The message is sent by an Initiating Party to the Forwarding Agent. The actor playing the role of Initiating Party is the same as the actor playing the role of Debtor, but the role of the Ultimate Debtor is played by a different actor. This illustrates the scenario in which, for example, a company head office concentrates all payments from its subsidiaries. The head office plays the role of Debtor and Initiating Party, whilst the subsidiaries play the role of originating parties. After performing a series of checks, the Forwarding Agent will forward the message to the Debtor agent.

Scenario C: The message is sent by an Initiating Party to the Forwarding Agent. The actor playing the role of Initiating Party is the same as the actor playing the role of Ultimate Debtor, but the role of the Debtor is played by a different actor. This illustrates the scenario in which, for example, a head office initiates the payment, but has agreed with its subsidiary abroad to use the account of the subsidiary for certain payments. After performing a series of checks, the Forwarding Agent will forward the message to the Debtor Agent.

Customer Direct Debit Initiation & FIToFI Customer Direct Debit

Introduction

A Direct Debit is a request for payment of an amount to be collected from a party bank account (the Debtor) by an originator (the Creditor). The amounts and dates of collections may vary.
Direct Debits result in cash transfers between Debtors and Creditors through infrastructures or correspondent banks. They may be exchanged as single instructions but are traditionally grouped following some common characteristics and, for convenience or efficiency reasons, exchanged in a batch mode.
Direct Debits are processed in different ways from country to country, especially regarding the handling of the mandate (when it exists) given by the Debtor to the Creditor.
The **CustomerDirectDebitInitiation** message is sent by the Initiating Party (Creditor) to the Forwarding Agent or Creditor Agent. It is used to request single or bulk collection(s) of cash from one or various Debtor account(s) to a Creditor.
The **FItoFICustomerDirectDebit** message is sent by a Financial Institution to another Financial Institution, directly or through a Clearing System. It is used to clear Direct Debit instructions, initiated by non-financial institution customers.

Sequence Diagram

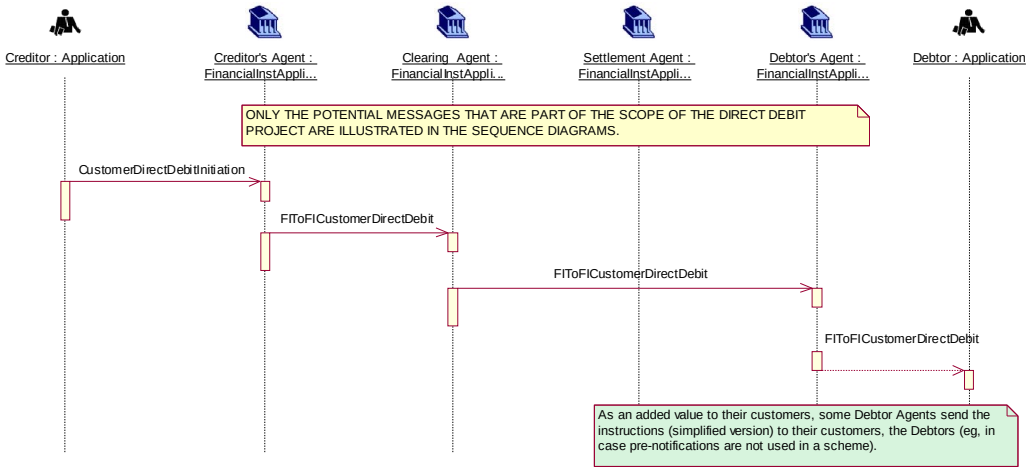

Narrative and Scenario

The original mandate between the Debtor and the Creditor and the mandate management itself are identified as being out of scope and are therefore not included in the diagram. Some information on possible mandate management information flow is available below.
The mandate is the authorisation/expression of consent given by the Debtor, allowing a specified Creditor to originate Direct Debit instructions to debit a specified Debtor account in accordance with the relevant Direct Debit Scheme Rules and, if applicable, the mandate details.
The Creditor invites the Debtor to submit a Mandate. The Debtor provides its banking information on the Mandate (eg, name and account number, financial institution, BIC and IBAN) and signs it (manually or via an electronic signature).
The mandate now represents the Debtor agreement:

- to authorise the Creditor to issue Direct Debit instruction(s) to the Debtor account, and;
- to instruct the Debtor Agent to act upon the Creditor Direct Debit instruction.

Note: in some cases, the Debtor Agent is unaware of the Mandate and simply acts upon the Direct Debit instruction.

The Creditor dematerialises the mandate upon the mandate presentation in paper form. Dematerialised mandate data are referred to as the Mandate Related Information (MRI) only and are not to be considered as the mandate document. The original mandate remains subject for archiving and reference for any legal matter.
Prior to the sending of a Direct Debit instruction, the Creditor may notify the Debtor of the amount and date on which the Direct Debit instruction will be presented to the Debtor Agent for debit. This notification may be sent together with or separately from other commercial documents (eg, an invoice).
There are two types of pre-notifications:

- Schedule of payments for a number of subsequent Direct Debits for an agreed period of time;
- Individual advices of a Direct Debit subject for collection on a specified value date only. This requires an update for each individual recurrent Direct Debit prior to its collection.

The Debtor will reconcile the pre-notification with the signed mandate and where relevant other records (such as account payable items, contract details or subscription agreement). The Debtor ensures the account is covered with subject amount.
In Scope: The Creditor sends the CustomerDirectDebitInitiation message to its Agent (the Creditor Agent), together with the Mandate Related Information when requested by the scheme.
In Scope: The Creditor Agent sends a FIToFICustomerDirectDebit message to the Clearing Agent/System, in line with the clearing cycle. The Mandate Related Information (MRI) is also transported, when requested by the scheme.
In Scope: The Clearing Agent/System sends the FIToFICustomerDirectDebit message, together with the Mandate Related Information (MRI), when requested by the scheme, to the Debtor's Agent.
Out of Scope: Potentially, the Debtor Agent could forward the Direct Debit instruction (simplified version) to the debtor (eg, in case pre-notifications are not used in a Scheme).
Out of Scope: The Clearing Agent prepares and sends the payment information for the Settlement Agent (in accordance with the agreed and published settlement cycle). The process includes the calculation of the settlement positions and transmission of the files to the Settlement Agent.
The information provided includes the net position to be debited, the party to be debited, the net position to be credited, the party to be credited and the value date.
The settlement is executed by the Settlement Agent, in accordance with the settlement cycle, based on the settlement report provided by the Clearing Agent. The Settlement Agent performs the transfer of funds from the Debtor Agent to the Creditor Agent.
Out of Scope: Reporting (Debit/Credit) to the Debtors and Creditors. Timing may vary depending on market practices and value added services provided by some Agents, that is before or after settlement.

Direct Debit: Payment Status Report (Positive)

Introduction

The positive PaymentStatusReport message is sent by the receiver of an instruction (in this case a CustomerDirectDebitInitiation or a FIToFICustomerDirectDebit) to inform the receiver that the instruction received (either single or grouped) is processable.
A positive PaymentStatusReport message can also be used to confirm the processability of a PaymentCancellation Request message, a PaymentReturn message or a PaymentReversal message.
The positive PaymentStatus Report message is also meant to be generic to ensure re-usability with other Payments Instruments.
The Payment Status Report messages are exchanged, point to point between two parties, optionally and as per bilateral agreements and may be complemented by an Advice of Credit/Debit and/or Statement message (Out of scope).

Sequence Diagram

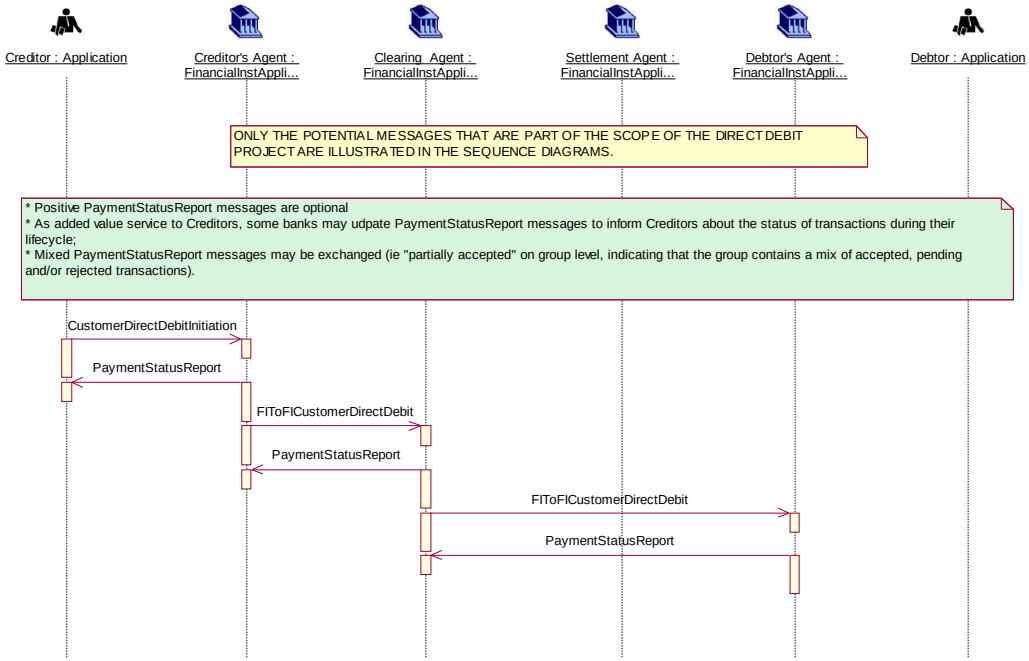

Narrative and Scenario

Scenario: *Use of the PaymentStatusReport message to confirm the processability of a CustomerDirectDebitInitiation instruction, followed by a FIToFICustomerDirectDebit message.*
In Scope: The Creditor sends the CustomerDirectDebitInitiation message to its Agent (the Creditor Agent).
In Scope: The Creditor Agent confirms the processability of the CustomerDirectDebitInitiation instruction by sending a PaymentStatusReport message (positive) to the Creditor.
In Scope: The Creditor Agent sends a FIToFICustomerDirectDebit message to the Clearing Agent/System, in line with the clearing cycle. The Mandate Related Information (MRI) is also transported, when applicable.
In Scope: The Clearing Agent/System confirms the processability of the FIToFICustomerDirectDebit instruction by sending a positive PaymentStatusReport message to the Creditor Agent.
In Scope: The Clearing Agent/System sends a FIToFICustomerDirectDebit message, together with potentially the Mandate Related Information (MRI) to the Debtor Agent immediately for information purposes only.
In Scope: The Debtor Agent sends a positive PaymentStatusReport message to the Clearing Agent. This positive status message may subsequently be forwarded to the Creditor Agent.

Direct Debit: Payment Status Report (Negative)

Introduction

The negative PaymentStatus Report message is sent by the receiver of an instruction to inform the sender of the instruction about the negative processability of the instruction (in the Direct Debit context, this could be a CustomerDirectDebitInitiation message (Single or Grouped), a FIToFICustomerDirectDebit message (Single or Grouped) or a Payment Cancellation Request message (Single or Grouped).
The negative PaymentStatusReport message used to reject a direct debit instruction is to be sent before settlement. Indeed, after settlement, the correct message to be used is the PaymentReturn message.

Sequence Diagram

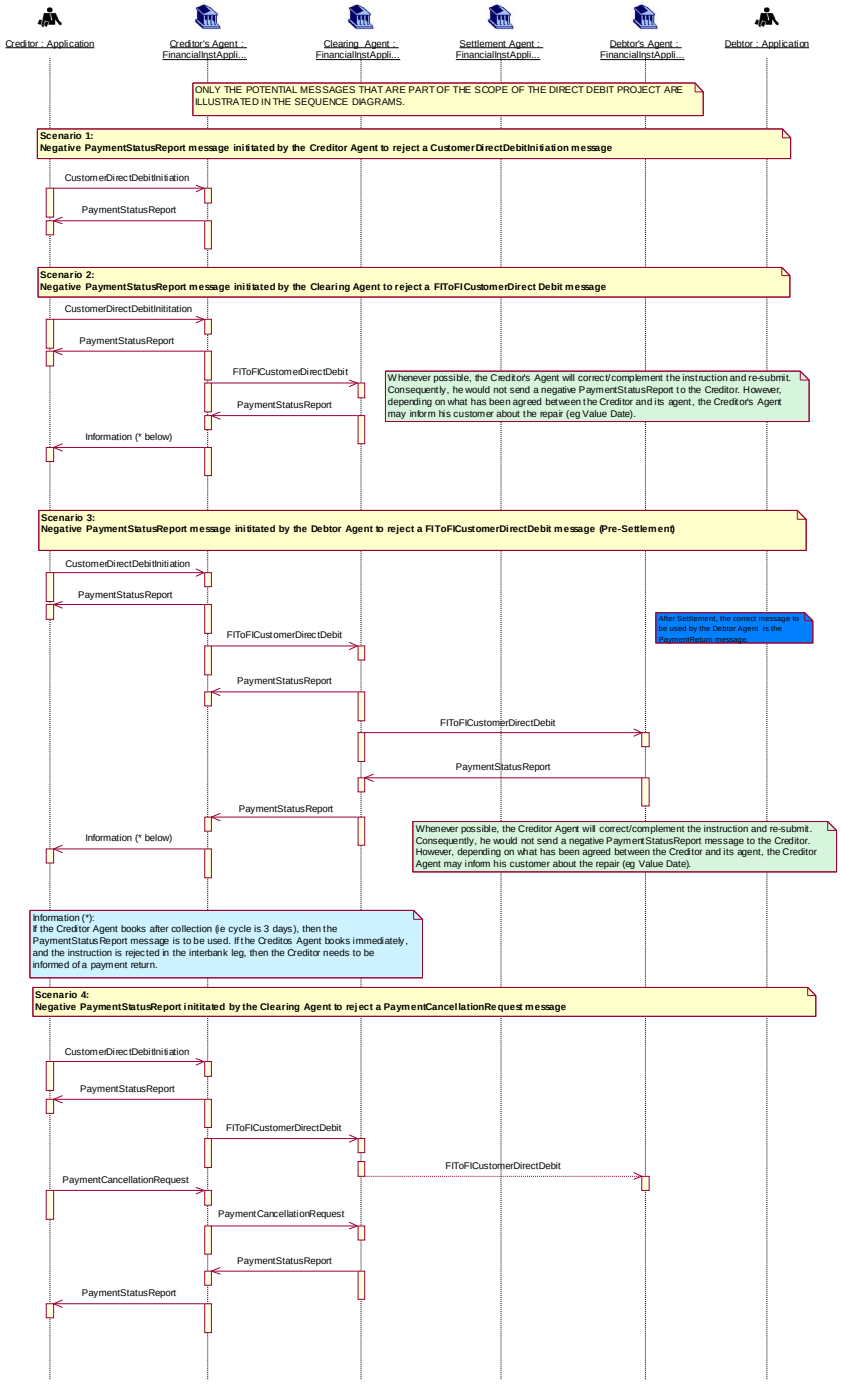

Narrative and Scenarios

Scenario 1: *A negative PaymentStatusReport message initiated by the Creditor Agent to reject a CustomerDirectDebitInitiation message.*
The Creditor sends the CustomerDirectDebitInitiation message to its Agent (the Creditor Agent).
The Creditor Agent sends a negative PaymentStatusReport message to the Creditor to inform him about the non processability of the CustomerDirectDebitInitiation instruction, e.g. due to missing information.

Scenario 2: *A negative PaymentStatusReport message initiated by the Clearing Agent to reject a FIToFICustomerDirectDebit message.*
The Creditor sends the CustomerDirectDebitInitiation message to its Agent (the Creditor Agent).
The Creditor Agent confirms the processability of the CustomerDirectDebitInitiation instruction by sending a PaymentStatusReport message (positive) to the Creditor.
The Creditor Agent sends a FIToFICustomerDirectDebit message to the Clearing Agent/System, in line with the clearing cycle. The Mandate Related Information (MRI) is also transported, when applicable.
If information is missing and inter-bank settlement has not taken place yet, the Clearing Agent/System informs the Creditor Agent about the non processability of the FIToFICustomerDirectDebit instruction. The Creditor Agent may inform (but not necessarily) his customer, the Creditor, about the negative processing of the CustomerDirectDebitInitiation instruction by using a negative PaymentStatusReport message, an Advice message (out of scope) or through a Statement message (out of scope).
Note: Before sending a negative PaymentStatusReport message to its customer, it is assumed that the Creditor Agent will try to correct the CustomerDirectDebitInitiation message information and re-submit an FIToFICustomerDirectDebit message to the Clearing Agent. In this case the Creditor will not be involved.

Scenario 3: *Negative PaymentStatusReport message initiated by the Debtor Agent to Reject the FIToFICustomerDirectDebit message.*
The Creditor sends a CustomerDirectDebitInitiation message to its Agent (the Creditor Agent).
The Creditor Agent confirms the processability of the CustomerDirectDebitInitiation instruction by sending a PaymentStatusReport message (positive) to the Creditor.
The Creditor Agent sends a FIToFICustomerDirectDebit message to the Clearing Agent/System, in line with the clearing cycle. The Mandate Related Information (MRI) is also transported, when applicable.
The Clearing Agent/System confirms the processability of the FIToFICustomerDirectDebit instruction by sending a PaymentStatusReport message (positive) to the Creditor Agent.
The Clearing Agent/System sends a FIToFICustomerDirectDebit message, together with potentially the Mandate Related Reference (MRI) to the Debtor Agent immediately for information purposes only.
If settlement has not yet taken place, the Debtor Agent may send a negative PaymentStatusReport message to the Clearing Agent, to inform him about the rejection of the FIToFICustomerDirectDebitinstruction. This negative PaymentStatusReport message may subsequently be forwarded to the Creditor Agent. The Creditor Agent may inform (but not necessarily) his customer, the Creditor, about the negative processing of the CustomerDirectDebitInitiation instruction by using a PaymentStatusReport message, an Advice message (out of scope) or through a Statement message (out of scope).

Scenario 4: *Negative PaymentStatusReport message initiated by the Clearing Agent to reject a PaymentCancellationRequest message for a previously sent FIToFICustomerDirectDebit message.*
Note: This scenario can also apply between the Creditor Agent and the Creditor.
The Creditor sends a CustomerDirectDebitInitiation message to its Agent (the Creditor Agent).
The Creditor Agent confirms the processability of the CustomerDirectDebitInitiation instruction by sending a PaymentStatusReport message (positive) to the Creditor.
The Creditor Agent sends an FIToFICustomerDirectDebit message to the Clearing Agent/System, in line with the clearing cycle. The Mandate Related Information (MRI) is also transported, when applicable.

The Creditor sends a PaymentCancellationRequest message to its Agent, the Creditor Agent, for a previously sent CustomerDirectDebitInitiation message (e.g. Duplicated message).
As the Creditor Agent had already sent a FIToFICustomerDirect Debit message to the Clearing Agent, he will in his turn send a PaymentCancellationRequest message to the Clearing Agent.
If the Clearing Agent sent a FIToFICustomerDirectDebit message already and settlement took place, he will inform the Creditor Agent about the negative processability of the PaymentCancellationRequest instruction by using a negative PaymentStatusReport message.
The Creditor Agent will inform his customer, the Creditor, about the negative processing of the PaymentCancellationRequest instruction by using a negative PaymentStatusReport message.

Direct Debit: Payment Reversal

Introduction

The Creditor will initiate a CustomerPaymentReversal message, after Settlement, when a paid Direct Debit should not have been processed.
The Creditor Agent will in his turn initiate an FIToFIPaymentReversal for the next agent in the payment chain.
Consequently, the Debtor will be credited back.
Note: The Creditor Agent may be the originator of a payment reversal - he will in this case initiation a FIToFIPaymentReversal message.

Sequence Diagram

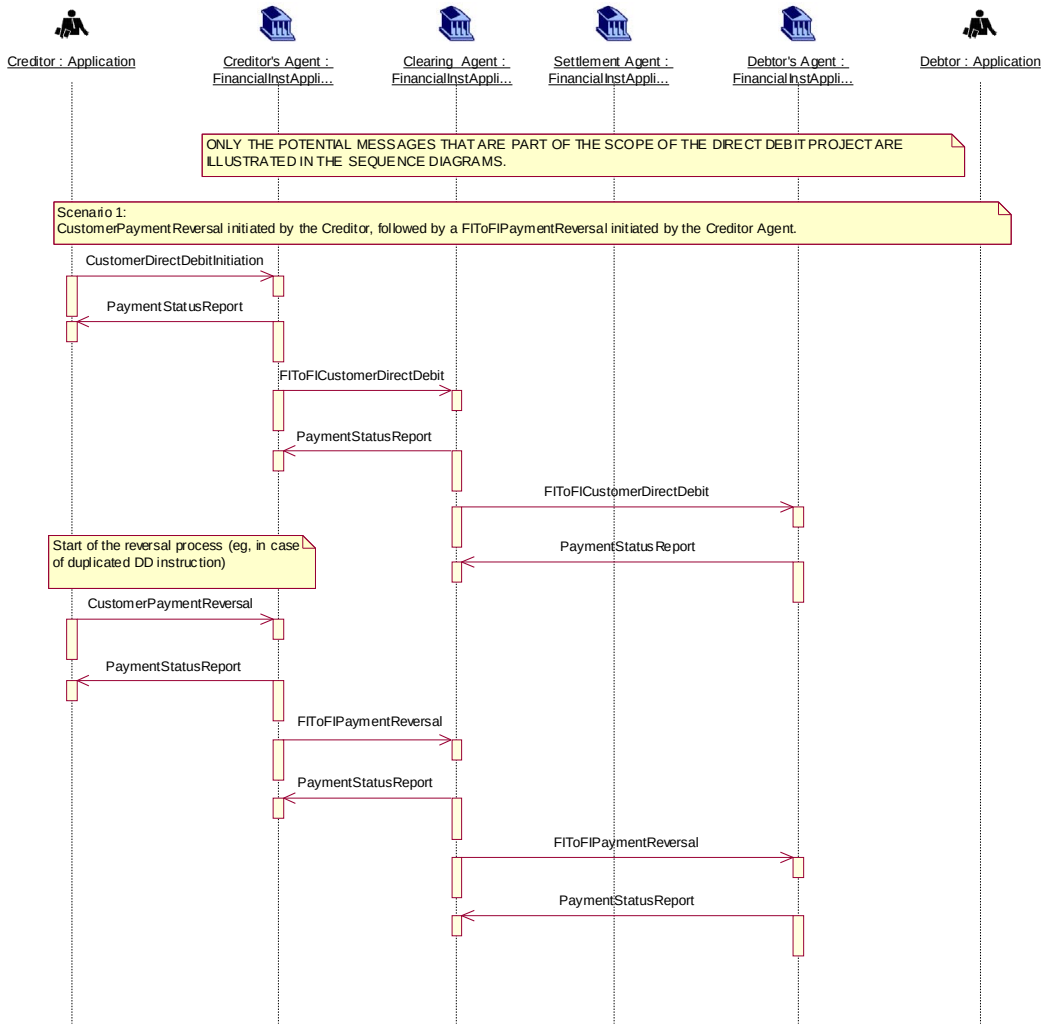

Narrative and Scenario

The Creditor sends a CustomerDirectDebitInitiation message to its Agent (the Creditor Agent).
The Creditor Agent confirms the processability of the CustomerDirectDebitInitiation instruction by sending a positive PaymentStatusReport message to the Creditor.
The Creditor Agent sends a FIToFICustomerDirectDebit message to the Clearing Agent/System, in line with the clearing cycle. The Mandate Related Information (MRI) is also transported, when applicable.
The Clearing Agent/System confirms the processability of the FIToFICustomerDirectDebit instruction by sending a positive PaymentStatusReport message to the Creditor Agent.
The Clearing Agent/System sends a FIToFICustomerDirectDebit message, together with potentially the Mandate Related Reference (MRI) to the Debtor Agent immediately for information purposes only.
The Debtor Agent sends a positive PaymentStatusReport message to the Clearing Agent.
The Creditor realises this was a duplicated CustomerDirectDebitInitiation instruction. He now wants to send a CustomerPaymentReversal message. He identifies the original CustomerDirectDebitInitiation message (or a file of direct

debit instructions) and generates an offsetting transaction in favour of the Debtor, under the quotation of the reversal reasons. The Creditor Agent may confirm the receipt of the CustomerPaymentReversal message by sending a positive PaymentStatusReport message to the Creditor.
A FIToFIPaymentReversal message is submitted by the Creditor Agent to the Clearing Agent for settlement, under quotation of the original direct debit reference and the reason for the reversal.
The Clearing Agent confirms the processability of the reversal by sending a positive PaymentStatusReport message to the Creditor Agent.
The Clearing Agent/System forwards the FIToFIPaymentReversal message to the Debtor Agent immediately for information purposes only.
The Clearing Agent prepares the payment information for the Settlement Agent (in accordance with the agreed and published settlement cycle). That process includes the calculation of the settlement positions.
The information provided to the Settlement Agent is the net position to be debited, the party to be debited, the net position to the credited, the party to be credited and the value date (Out of Scope)
The Settlement Agent performs the transfer of funds from the Credit Party to the Debit Party (in accordance with the agreed and published settlement cycle) (Out of Scope)
A positive PaymentStatusReport message can optionally be initiated by the Debtor agent and sent to the Clearing Agent to confirm the processability of the reversal message.

Note: it may exceptionally occur that a PaymentReturn message and a PaymentReversal message would cross each other, but that this could only be avoided through value-added monitoring services that could be offered by the scheme manager and/or might provoke exceptions/investigation handling

Direct Debit: Payment Cancellation Request

Introduction

The PaymentCancellationRequest message is sent by the sender of a previously sent CustomerDirectDebitInitiation or FIToFICustomerDirectDebit message, e.g. a PaymentCancellationRequest message can be sent by the Creditor to the Creditor Agent to cancel a CustomerDirectDebitInitiation message, prior to the acceptance by the Creditor Agent (or the bilaterally agreed cancellation cut-off time).
Acceptance or rejection of a PaymentCancellationRequest message is communicated through the PaymentStatusReport message.

Sequence Diagram

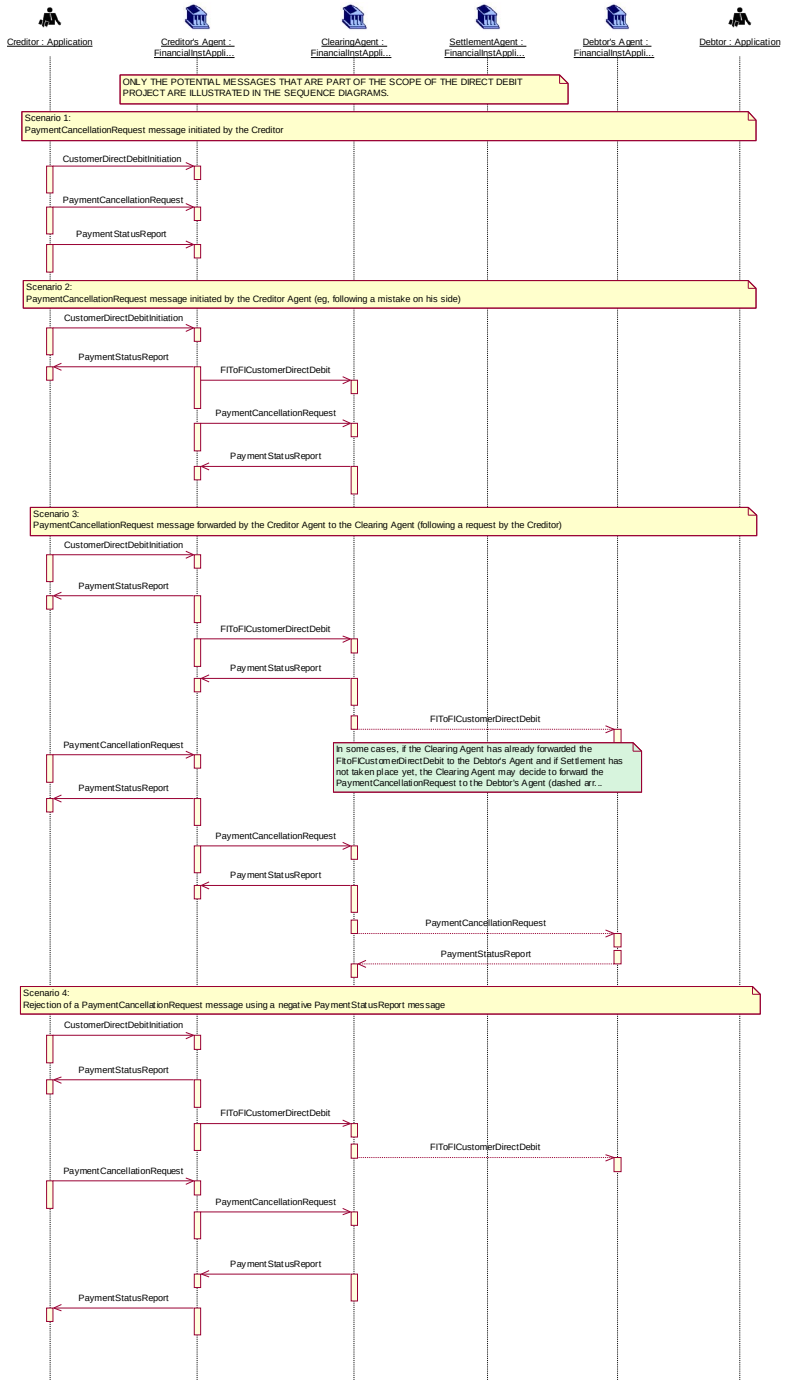

Narrative and Scenarios

Scenario 1: *PaymentCancellationRequest message initiated by the Creditor*
The Creditor sends a CustomerDirectDebitInitiation message to its Agent (the Creditor Agent).
The Creditor, prior the acceptance by the Creditor Agent initiates a PaymentCancellationRequest message for a previously sent CustomerDirectDebitInitiation message (eg, Duplicated Direct Debit instruction).
The Creditor Agent confirms the cancellation of the CustomerDirectDebitInitiation message by sending a positive PaymentStatusReport message to the Creditor.
The Creditor can now reconcile the PaymentStatusReport message he received from the Creditor Agent against the PaymentCancellationRequest message.

Scenario 2: *PaymentCancellationRequest message initiated by the Creditor Agent (eg, following a mistake on his side)*
The Creditor sends a CustomerDirectDebitInitiation message to its Agent (the Creditor Agent).
The Creditor Agents optionally confirms the processability of the CustomerDirectDebitInitiation message by sending a positive PaymentStatusReport message to the Creditor.
The Creditor Agent sends a FIToFICustomerDirectDebit message to the Clearing Agent/System, in line with the clearing cycle. The Mandate Related Information is also transported, when applicable.
The Creditor Agent realises he made a mistake in the FIToFICustomerDirectDebit message. He sends a PaymentCancellationRequest message to the Clearing Agent.
If Settlement has not taken place yet, the Clearing Agent confirms the cancellation of the Direct Debit instruction by sending a positive PaymentStatusReport message to the Creditor Agent.

Scenario3: *Payment Cancellation Request message forwarded by the Creditor Agent to the Clearing Agent (following a request by the Creditor)*
The Creditor sends a CustomerDirectDebitInitiation message to its Agent (the Creditor Agent).
The Creditor Agent optionally confirms the processability of the CustomerDirectDebitInitiation message by sending a positive PaymentStatusReport message to the Creditor.
The Creditor Agent sends a FIToFICustomerDirectDebit message to the Clearing Agent/System, in line with the clearing cycle. The Mandate Related Information is also transported, when applicable. The Clearing Agent/System optionally confirms the processability of the Direct Debit instruction by sending a positive PaymentStatusReport message to the Creditor Agent.
The Creditor sends a PaymentCancellationRequest message to its Agent, the Creditor Agent for a previously sent CustomerDirectDebitInitiation message (eg, Duplicated message). The Creditor Agent acknowledges the receipt of the PaymentCancellationRequest message by sending a positive PaymentStatusReport message to his customer, the Creditor.
As the Creditor Agent had already sent a FIToFICustomerDirectDebit message to the Clearing Agent, he will in his turn send a PaymentCancellationRequest message to the Clearing Agent.

Note: If Settlement has not taken place yet, the Clearing Agent will cancel the Direct Debit instruction and confirm the cancellation by sending a positive PaymentStatusReport message to the Creditor Agent.Note: In some exceptional cases, if the Clearing Agent has already forwarded the FIToFICustomerDirectDebit message to the Debtor Agent and if Settlement has not taken place yet, the Clearing Agent may decide to forward the PaymentCancellationRequest message to the Debtor Agent. The Debtor Agent may confirm the cancellation to the Clearing Agent by using the PaymentStatusReport message.

Scenario 4: *Negative PaymentStatusReport message initiated by the Clearing Agent to reject a Payment Cancellation Request for a previously sent Direct Debit instruction (for clarity reasons, this scenario is already present under the Negative Payment Status Report section).*
Note: This scenario can also apply between the Creditor Agent and the Creditor.
Note: It mainly depends on the clearing cycles of the Scheme whether or not a bank would chase an instruction that has left the bank system.
The Creditor sends a CustomerDirectDebitInitiation message to its Agent (the Creditor Agent).

The Creditor Agent confirms the processability of the CustomerDirectDebitInitiation instruction by sending a PaymentStatusReport message (positive) to the Creditor.
The Creditor Agent sends an FIToFICustomerDirectDebit message to the Clearing Agent/System, in line with the clearing cycle. The Mandate Related Information (MRI) is also transported, when applicable.
The Creditor sends a PaymentCancellationRequest message to its Agent, the Creditor Agent, for a previously sent CustomerDirectDebitInitiation message (e.g. Duplicated message).
As the Creditor Agent had already sent a FIToFICustomerDirectDebit message to the Clearing Agent, he will in his turn send a PaymentCancellationRequest message to the Clearing Agent.
If the Clearing Agent sent a FIToFICustomerDirectDebit message already and settlement took place, he will inform the Creditor Agent about the negative processability of the PaymentCancellationRequest instruction by using a negative PaymentStatusReport message.
The Creditor Agent will inform his customer, the Creditor, about the negative processing of the PaymentCancellationRequest instruction by using a negative PaymentStatusReport message.

Message: CustomerCreditTransferInitiationV02 <pain.001.001.02>

Message Scope and Usage

Scope

The CustomerCreditTransferInitiation message is sent by the initiating party to the forwarding agent or debtor agent. It is used to request movement of funds from the debtor account to a creditor.

Usage

The CustomerCreditTransferInitiation message can contain one or more customer credit transfer instructions.

The CustomerCreditTransferInitiation message is used to exchange:
- One or more instances of a credit transfer initiation;
- Payment transactions that result in book transfers at the debtor agent or payments to another financial institution;
- Payment transactions that result in an electronic cash transfer to the creditor account or in the emission of a cheque.

The message can be used in a direct or a relay scenario:
- In a direct scenario, the message is sent directly to the debtor agent. The debtor agent is the account servicer of the debtor.
- In a relay scenario, the message is sent to a forwarding agent. The forwarding agent acts as a concentrating financial institution. It will forward the CustomerCreditTransferInitiation message to the debtor agent.

The message can also be used by an initiating party that has authority to send the message on behalf of the debtor. This caters for example for the scenario of a payments factory initiating all payments on behalf of a large corporate.

The CustomerCreditTransferInitiation message can be used in domestic and cross-border scenarios.

The CustomerCreditTransferInitiation message must not be used by the debtor agent to execute the credit transfer instruction(s). The FIToFICustomerCreditTransfer message must be used instead.

If it is agreed to include the payment information related to the debit side only once (i.e. *Grouped* mode), the PaymentInformation block will be present only once.
If it is agreed to repeat the payment information related to the debit side (i.e. *Single* mode), the PaymentInformation block must be present once per occurrence of the CreditTransferTransactionInformation block.
The CustomerCreditTransferInitiation message also allows for a *Mixed* mode where the PaymentInformation block can be repeated and each PaymentInformation block can contain one or several CreditTransferTransactionInformation block (s).

Single	Indicates that for each occurrence of the payment information block, exactly one occurrence of the payment transaction block is present.
Grouped	Indicates that there is only one occurrence of the Payment Information block and several occurrences of the payment transaction block.
Mixed	Indicates that there are one or several occurrences of the Payment Information block where each of the occurrences might contain one or several occurrences of the payment transaction block.

Single

When grouping is set to *Single*, information for each individual instruction is included separately. This means the PaymentInformation block is repeated and present for each occurrence of the Credit Transfer TransactionInformation block.

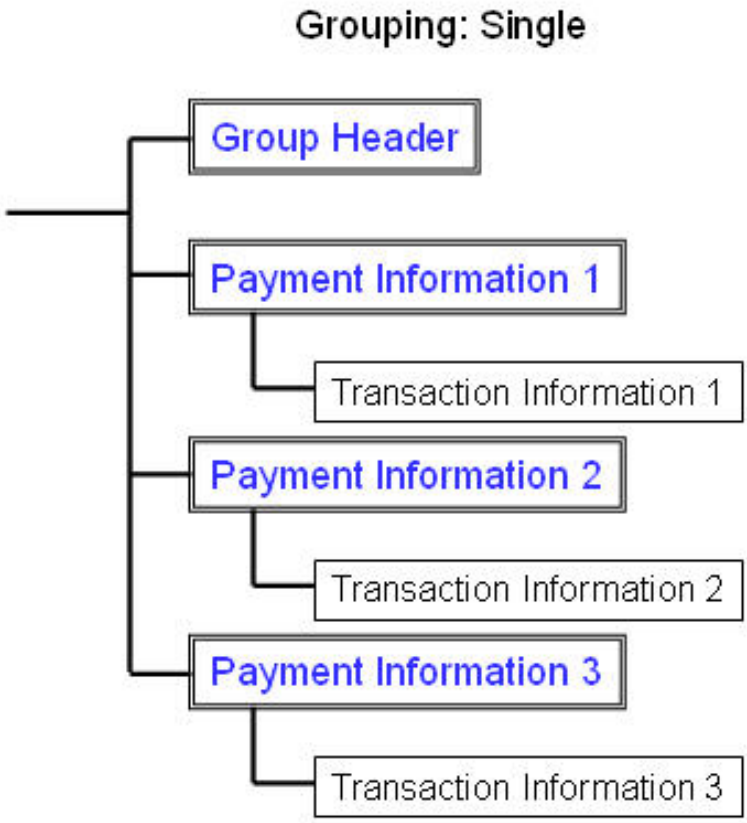

Grouped

When grouping is set to *Grouped*, the PaymentInformation block will be present once and the Credit Transfer TransactionInformation block will be repeated.

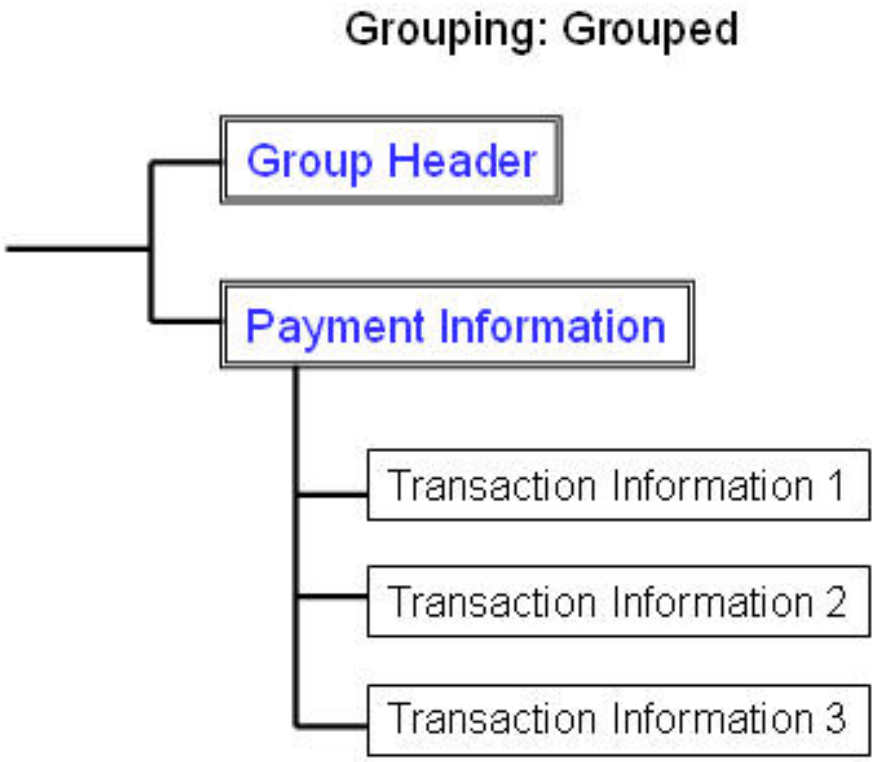

Mixed

When grouping is set to *Mixed*, the PaymentInformation block may be present once or may be repeated. Each sequence of the PaymentInformation block may contain one or several Credit Transfer TransactionInformation block(s).

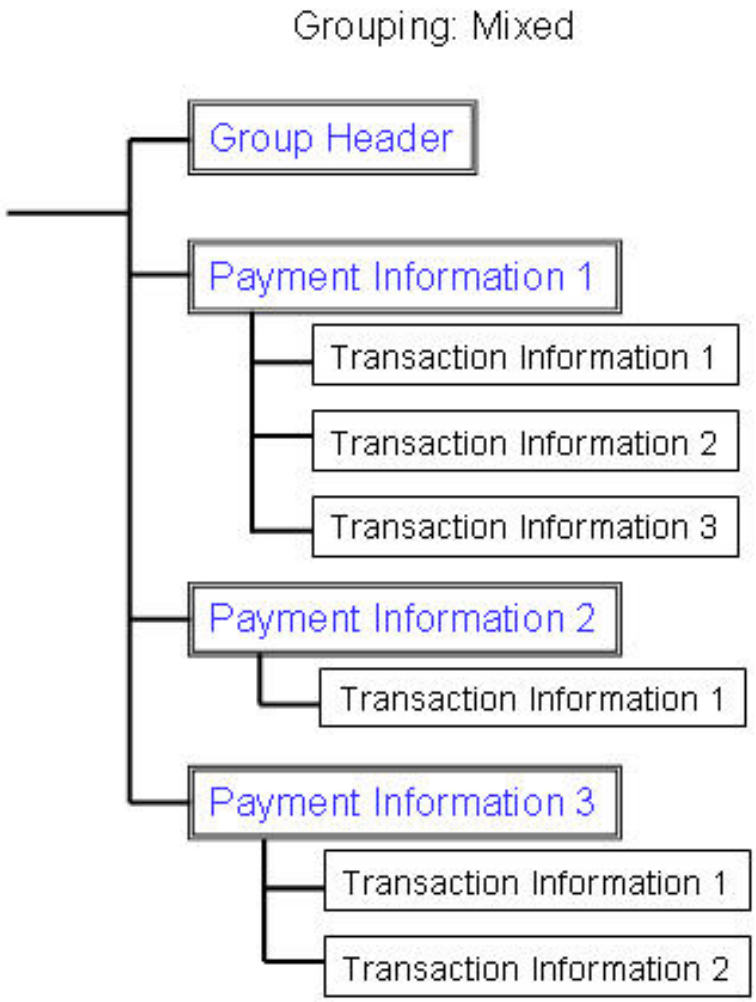

Outline

The CustomerCreditTransferInitiation message is composed of 3 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime, Grouping indicator.

B. Payment Information

This building block is mandatory and repetitive. It contains, amongst others, elements related to the debit side of the transaction, such as Debtor or PaymentTypeInformation.

C. CreditTransfer Transaction Information

This building block is mandatory and repetitive. It contains, amongst others, elements related to the credit side of the transaction, such as Creditor or RemittanceInformation.

Rules

Grouping1Rule
If GroupHeader/Grouping is present and equals GRPD, then one and only one occurrence of PaymentInformation must be present.

Grouping2Rule
If GroupHeader/Grouping is present and equals SNGL, then each occurrence of PaymentInformation must contain one and only one occurrence of PaymentInformation/CreditTransferTransactionInformation.

Note : Rules applying to specific message components or message elements are included in the description of the relevant message component or message element.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]	Text	
1.4		BatchBooking	<BtchBookg>	[0..1]	Indicator	
1.5		NumberOfTransactions	<NbOfTxs>	[1..1]	Text	
1.6		ControlSum	<CtrlSum>	[0..1]	Quantity	
1.7		Grouping	<Grpg>	[1..1]	Code	
1.8		InitiatingParty	<InitgPty>	[1..1]	+	
1.9		ForwardingAgent	<FwdgAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		PaymentInformation	<PmtInf>	[1..n]		
2.1		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text	
2.2		PaymentMethod	<PmtMtd>	[1..1]	Code	
2.3		PaymentTypeInformation	<PmtTpInf>	[0..1]		
2.4		InstructionPriority	<InstrPrty>	[0..1]	Code	
2.5	{Or	ServiceLevel	<SvcLvl>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.6	{{Or	Code	<Cd>	[1..1]	Code	
2.7	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.8	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code	
2.9		LocalInstrument	<LclInstrm>	[0..1]		
2.10	{Or	Code	<Cd>	[1..1]	Code	
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.12		CategoryPurpose	<CtgyPurp>	[0..1]	Code	
2.13		RequestedExecutionDate	<ReqdExctnDt>	[1..1]	DateTime	
2.14		PoolingAdjustmentDate	<PoolgAdjstmntDt>	[0..1]	DateTime	
2.15		Debtor	<Dbtr>	[1..1]	+	
2.16		DebtorAccount	<DbtrAcct>	[1..1]	+	
2.17		DebtorAgent	<DbtrAgt>	[1..1]	+	
2.18		DebtorAgentAccount	<DbtrAgtAcct>	[0..1]	+	
2.19		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.20		ChargeBearer	<ChrgBr>	[0..1]	Code	
2.21		ChargesAccount	<ChrgsAcct>	[0..1]	+	
2.22		ChargesAccountAgent	<ChrgsAcctAgt>	[0..1]	+	
2.23		CreditTransferTransactionInformation	<CdtTrfTxInf>	[1..n]		
2.24		PaymentIdentification	<PmtId>	[1..1]		
2.25		InstructionIdentification	<InstrId>	[0..1]	Text	
2.26		EndToEndIdentification	<EndToEndId>	[1..1]	Text	
2.27		PaymentTypeInformation	<PmtTpInf>	[0..1]		
2.28		InstructionPriority	<InstrPrty>	[0..1]	Code	
2.29	{Or	ServiceLevel	<SvcLvl>	[0..1]		
2.30	{{Or	Code	<Cd>	[1..1]	Code	
2.31	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.32	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code	
2.33		LocalInstrument	<LclInstrm>	[0..1]		
2.34	{Or	Code	<Cd>	[1..1]	Code	
2.35	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.36		CategoryPurpose	<CtgyPurp>	[0..1]	Code	
2.37		Amount	<Amt>	[1..1]		
2.38	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount	
2.39	Or}	EquivalentAmount	<EqvtAmt>	[1..1]		
2.40		Amount	<Amt>	[1..1]	Amount	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.41		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code	
2.42		ExchangeRateInformation	<XchgRateInf>	[0..1]		
2.43		ExchangeRate	<XchgRate>	[0..1]	Rate	
2.44		RateType	<RateTp>	[0..1]	Code	
2.45		ContractIdentification	<CtrctId>	[0..1]	Text	
2.46		ChargeBearer	<ChrgBr>	[0..1]	Code	
2.47		ChequeInstruction	<ChqInstr>	[0..1]	+	
2.48		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.49		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+	
2.50		IntermediaryAgent1Account	<IntrmyAgt1Acct>	[0..1]	+	
2.51		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+	
2.52		IntermediaryAgent2Account	<IntrmyAgt2Acct>	[0..1]	+	
2.53		IntermediaryAgent3	<IntrmyAgt3>	[0..1]	+	
2.54		IntermediaryAgent3Account	<IntrmyAgt3Acct>	[0..1]	+	
2.55		CreditorAgent	<CdtrAgt>	[0..1]	+	
2.56		CreditorAgentAccount	<CdtrAgtAcct>	[0..1]	+	
2.57		Creditor	<Cdtr>	[0..1]	+	
2.58		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.59		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.60		InstructionForCreditorAgent	<InstrForCdtrAgt>	[0..n]		
2.61		Code	<Cd>	[0..1]	Code	
2.62		InstructionInformation	<InstrInf>	[0..1]	Text	
2.63		InstructionForDebtorAgent	<InstrForDbtrAgt>	[0..1]	Text	
2.64		Purpose	<Purp>	[0..1]		
2.65	{Or	Code	<Cd>	[1..1]	Code	
2.66	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.67		RegulatoryReporting	<RgltryRptg>	[0..10]		
2.68		DebitCreditReportingIndicator	<DbtCdtRptgInd>	[0..1]	Code	
2.69		Authority	<Authrty>	[0..1]		
2.70		AuthorityName	<AuthrtyNm>	[0..1]	Text	
2.71		AuthorityCountry	<AuthrtyCtry>	[0..1]	Code	
2.72		RegulatoryDetails	<RgltryDtls>	[0..1]		
2.73		Code	<Cd>	[0..1]	Text	
2.74		Amount	<Amt>	[0..1]	Amount	
2.75		Information	<Inf>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.76		Tax	<Tax>	[0..1]	+	
2.77		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]		
2.78		RemittanceIdentification	<RmtId>	[0..1]	Text	
2.79		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code	
2.80		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text	
2.81		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]		
2.82		Name	<Nm>	[1..1]	Text	
2.83		Address	<Adr>	[1..1]	+	
2.84		RemittanceInformation	<RmtInf>	[0..1]		
2.85		Unstructured	<Ustrd>	[0..n]	Text	
2.86		Structured	<Strd>	[0..n]		
2.87		ReferredDocumentInformation	<RfrdDocInf>	[0..1]		
2.88		ReferredDocumentType	<RfrdDocTp>	[0..1]		
2.89	{Or	Code	<Cd>	[1..1]	Code	
2.90	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.91		Issuer	<Issr>	[0..1]	Text	
2.92		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text	
2.93		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime	
2.94		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]		
2.95	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount	
2.96	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount	
2.97	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount	
2.98	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount	
2.99	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount	
2.100		CreditorReferenceInformation	<CdtrRefInf>	[0..1]		
2.101		CreditorReferenceType	<CdtrRefTp>	[0..1]		
2.102	{Or	Code	<Cd>	[1..1]	Code	
2.103	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.104		Issuer	<Issr>	[0..1]	Text	
2.105		CreditorReference	<CdtrRef>	[0..1]	Text	
2.106		Invoicer	<Invcr>	[0..1]	+	
2.107		Invoicee	<Invcee>	[0..1]	+	
2.108		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text	

Message Items Description

*The following section identifies the elements of the **CustomerCreditTransferInitiationV02** message.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the message.

Type: *The **GroupHeader** block is composed of the following **GroupHeader1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	Text
1.4		BatchBooking	<BtchBookg>	[0..1]	Indicator
1.5		NumberOfTransactions	<NbOfTxs>	[1..1]	Text
1.6		ControlSum	<CtrlSum>	[0..1]	Quantity
1.7		Grouping	<Grpg>	[1..1]	Code
1.8		InitiatingParty	<InitgPty>	[1..1]	+
1.9		ForwardingAgent	<FwdgAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the instructing party and sent to the next party in the chain to unambiguously identify the message.

Usage: The instructing party has to make sure that 'MessageIdentification' is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which a (group of) payment instruction(s) was created by the instructing party.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user key that allows to check if the initiating party is allowed to initiate transactions from the account specified in the initiation.

Usage: the content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios, payment initiations, payment returns or payment reversals that are initiated on behalf of a different party than the initiating party.

Data Type: Max128Text

Format: maxLength: 128
minLength: 1

1.4 BatchBooking <BtchBookg>

Presence: [0..1]

Definition: Identifies whether a single entry per individual transaction or a batch entry for the sum of the amounts of all transactions in the message is requested.

Data Type: *One of the following **BatchBookingIndicator** values must be used:*
MeaningWhenTrue: Identifies that a batch entry for the sum of the amounts of all transactions in the message is requested.
MeaningWhenFalse: Identifies that a single entry for each of the transactions in the message is requested.

1.5 NumberOfTransactions <NbOfTxs>

Presence: [1..1]

Definition: Number of individual transactions contained in the message.

Data Type: Max15NumericText

Format: [0-9]{1,15}

1.6 ControlSum <CtrlSum>

Presence: [0..1]

Definition: Total of all individual amounts included in the message, irrespective of currencies.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

1.7 Grouping <Grpg>

Presence: [1..1]

Definition: Indicates whether common accounting information in the transaction is included once for all transactions or repeated for each single transaction.

Data Type: Code

*One of the following **Grouping1Code** values must be used:*

Code	Name	Definition
GRPD	Grouped	Indicates that there is only one occurrence of the payment information block and several occurrences of the payment transaction block.
MIXD	Mixed	Indicates that there are one or several occurrences of the payment information block where each of the occurences might contain one or several occurrences of the payment transaction block.
SNGL	Single	Indicates that for each occurrences of the payment information block, exactly one occurrence of the payment transaction block is present.

1.8 InitiatingParty <InitgPty>

Presence: [1..1]

Definition: Party initiating the payment. In the payment context, this can either be the debtor (in a credit transfer), the creditor (in a direct debit), or the party that initiates the payment on behalf of the debtor or creditor.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

1.9 ForwardingAgent <FwdgAgt>

Presence: [0..1]

Definition: Financial institution that receives the instruction from the initiating party and forwards it to the next agent in the payment chain for execution.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.0 PaymentInformation <PmtInf>

Presence: [1..n]

Definition: Set of characteristics that applies to the debit side of the payment transactions included in the credit transfer initiation.

Type: *The **PaymentInformation** block is composed of the following **PaymentInstructionInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text
2.2		PaymentMethod	<PmtMtd>	[1..1]	Code
2.3		PaymentTypeInformation	<PmtTpInf>	[0..1]	
2.13		RequestedExecutionDate	<ReqdExctnDt>	[1..1]	DateTime
2.14		PoolingAdjustmentDate	<PoolgAdjstmntDt>	[0..1]	DateTime
2.15		Debtor	<Dbtr>	[1..1]	+
2.16		DebtorAccount	<DbtrAcct>	[1..1]	+

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.17		DebtorAgent	<DbtrAgt>	[1..1]	+
2.18		DebtorAgentAccount	<DbtrAgtAcct>	[0..1]	+
2.19		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.20		ChargeBearer	<ChrgBr>	[0..1]	Code
2.21		ChargesAccount	<ChrgsAcct>	[0..1]	+
2.22		ChargesAccountAgent	<ChrgsAcctAgt>	[0..1]	+
2.23		CreditTransferTransactionInformation	<CdtTrfTxInf>	[1..n]	

Rule(s): ChargeBearerRule
If ChargeBearer is present, then CreditTransferTransactionInformation/ChargeBearer is not allowed.
If CreditTransferTransactionInformation/ChargeBearer is present, then ChargeBearer is not allowed.
CreditTransferTransactionInformation/ChargeBearer and ChargeBearer may both be absent.

ChargesAccountAgentRule
If ChargesAccountAgent is present, it must contain a branch of the DebtorAgent. It must not contain a completely different financial institution.

ChargesAccountRule
If ChargesAccountAgent is present, then ChargesAccount must be present.

ChequeInstructionRule
If PaymentMethod is CHK, then CreditTransferTransactionInformation/ChequeInstruction is optional.
If PaymentMethod is different from CHK, then CreditTransferTransactionInformation/ChequeInstruction is not allowed.

Rule rationale: ChequeInstructionDetails may be present if the payment method is Cheque. It must not be present if the payment method is 'Transfer'.

CreditorAgentRule
If PaymentMethod is CHK and if CreditTransferTransactionInformation/ ChequeInstruction/DeliveryMethod is present and is equal to MLFA, CRFA, RGFA or PUFA, then CreditTransferTransactionInformation/ CreditorAgent is mandatory.

If PaymentMethod is CHK and if CreditTransferTransactionInformation/ ChequeInstruction/DeliveryMethod is not present or is not equal to MLFA, CRFA, RGFA or PUFA, then CreditTransferTransactionInformation/ CreditorAgent is not allowed.

CreditorAndOrCreditorAccountRule
If PaymentMethod is CHK, then CreditTransferTransactionInformation/CreditorAccount is not allowed.

If PaymentMethod is different from CHK and if CreditTransferTransactionInformation/Creditor is not present, then CreditTransferTransactionInformation/CreditorAccount is mandatory.

If PaymentMethod is different from CHK and if CreditTransferTransactionInformation/Creditor is present, then CreditTransferTransactionInformation/CreditorAccount is optional.

PaymentTypeInformationRule

If PaymentTypeInformation is present, then CreditTransferTransactionInformation/PaymentTypeInformation is not allowed.

Guideline(s): ChequeFromGuideline()
CreditTransferTransactionInformation/ChequeInstruction/ChequeFrom may only be present if different from CreditTransferTransactionInformation/UltimateDebtor or Debtor.

ChequeInstructionDeliverToCreditorAgentGuideline()
If CreditTransferTransactionInformation/ChequeInstruction/DeliveryMethod is present and is CRFA or MLFA or PUFA or RGFA, then CreditTransferTransactionInformation/ChequeInstruction/DeliverTo may only be present if different than CreditTransferTransactionInformation/Creditor.

ChequeInstructionDeliverToCreditorGuideline()
If PaymentInformation/CreditTransferTransactionInformation/ChequeInstruction/DeliveryMethod is present and is CRCD or MLCD or PUCD or RGCD, then CreditTransferTransactionInformation/ ChequeInstruction/DeliverTo may only be present if different from CreditTransferTransactionInformation/ Creditor.

ChequeInstructionDeliverToDebtorGuideline()
If CreditTransferTransactionInformation/ChequeInstruction/DeliveryMethod is present and if CreditTransferTransactionInformation/ChequeInstruction/DeliveryMethod/Code is CRDB or MLDB or PUDB or RGDB, then CreditTransferTransactionInformation/ChequeInstruction/DeliverTo may only be present if different than Debtor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.1 PaymentInformationIdentification <PmtInfId>

Presence: [0..1]

Definition: Reference assigned by a sending party to unambiguously identify the payment information block within the message.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.2 PaymentMethod <PmtMtd>

Presence: [1..1]

Definition: Specifies the means of payment that will be used to move the amount of money.

Data Type: Code

*One of the following **PaymentMethod3Code** values must be used:*

Code	Name	Definition
CHK	Cheque	Written order to a bank to pay a certain amount of money from one person to another person.
TRA	TransferAdvice	Transfer of an amount of money in the books of the account servicer. An advice should be sent back to the account owner.
TRF	CreditTransfer	Transfer of an amount of money in the books of the account servicer.

2.3 PaymentTypeInformation <PmtTpInf>

Presence: [0..1]
Definition: Set of elements that further specifies the type of transaction.
Type: *This message item is composed of the following **PaymentTypeInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.4		InstructionPriority	<InstrPrty>	[0..1]	Code
2.5	{Or	ServiceLevel	<SvcLvl>	[0..1]	
2.8	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code
2.9		LocalInstrument	<LclInstrm>	[0..1]	
2.12		CategoryPurpose	<CtgyPurp>	[0..1]	Code

2.4 InstructionPriority <InstrPrty>

Presence: [0..1]
Definition: Indicator of the urgency or order of importance that the instructing party would like the instructed party to apply to the processing of the instruction.
Data Type: Code
*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.5 ServiceLevel <SvcLvl>

Presence: [0..1]
*This message item is part of choice **2.3** PaymentTypeInformation.*
Definition: Agreement under which or rules under which the transaction should be processed.
Type: *This message item is composed of one of the following **ServiceLevel2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.6	{Or	Code	<Cd>	[1..1]	Code
2.7	Or}	Proprietary	<Prtry>	[1..1]	Text

2.6 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.5** ServiceLevel.*
Definition: Identification of a pre-agreed level of service between the parties in a coded form.
Data Type: Code
*One of the following **ServiceLevel1Code** values must be used:*

Code	Name	Definition
PRPT	EBAPriorityService	Transaction must be processed according to the EBA Priority Service.
SDVA	SameDayValue	Payment must be executed with same day value to the creditor.
SEPA	SingleEuroPaymentsArea	Payment must be executed following the Single Euro Payments Area scheme.

2.7 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.5** ServiceLevel.*
Definition: Proprietary identification of a pre-agreed level of service between the parties.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.8 ClearingChannel <ClrChanl>

Presence: [0..1]
*This message item is part of choice **2.3** PaymentTypeInformation.*
Definition: Specifies the clearing channel to be used for the instruction.
Data Type: Code
*When this message item is present, one of the following **ClearingChannel2Code** values must be used:*

Code	Name	Definition
BOOK	BookTransfer	Payment through internal book transfer.
MPNS	MassPaymentNetSystem	Clearing channel is a mass payment net settlement system.
RTGS	RealTimeGrossSettlementSystem	Clearing channel is a real-time gross settlement system.
RTNS	RealTimeNetSettlementSystem	Clearing channel is a real-time net settlement system.

2.9 LocalInstrument <LclInstrm>

Presence: [0..1]
Definition: User community specific instrument.

Usage : When available, codes provided by local authorities should be used.

Type: *This message item is composed of one of the following **LocalInstrument1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.10	{Or	Code	<Cd>	[1..1]	Code
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text

2.10 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.9** LocalInstrument.*
Definition: Specifies the local instrument published in an external local instrument code list.
Data Type: ExternalLocalInstrumentCode
Format: maxLength: 35
minLength: 1

2.11 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.9** LocalInstrument.*
Definition: Specifies the local instrument as a proprietary code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.12 CategoryPurpose <CtgyPurp>

Presence: [0..1]
Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.
Data Type: Code
*When this message item is present, one of the following **PaymentCategoryPurpose1Code** values must be used:*

Code	Name	Definition
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CORT	TradeSettlementPayment	Transaction is related to settlement of a trade, eg a foreign exchange deal or a securities transaction.
DIVI	Dividend	Transaction is the payment of dividends.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to the payment of a hedging operation.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is the payment of interest.
LOAN	Loan	Transaction is related to the transfer of a loan to a borrower.
PENS	PensionPayment	Transaction is the payment of pension.
SALA	SalaryPayment	Transaction is the payment of salaries.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes.
TRAD	Trade	Transaction is related to the payment of a trade transaction.

Code	Name	Definition
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.
WHLD	WithHolding	Transaction is the payment of withholding tax.

2.13 RequestedExecutionDate <ReqdExctnDt>

Presence: [1..1]

Definition: Date at which the initiating party requests the clearing agent to process the payment. If payment by cheque, the date when the cheque must be generated by the bank.

Usage: This is the date on which the debtor's account(s) is (are) to be debited.

Data Type: ISODate

2.14 PoolingAdjustmentDate <PoolgAdjstmntDt>

Presence: [0..1]

Definition: Date used for the correction of the value date of a cash pool movement that has been posted with a different value date.

Data Type: ISODate

2.15 Debtor <Dbtr>

Presence: [1..1]

Definition: Party that owes an amount of money to the (ultimate) creditor.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.16 DebtorAccount <DbtrAcct>

Presence: [1..1]

Definition: Unambiguous identification of the account of the debtor to which a debit entry will be made as a result of the transaction.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.17 DebtorAgent <DbtrAgt>

Presence: [1..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.18 DebtorAgentAccount <DbtrAgtAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the debtor agent at its servicing agent in the payment chain.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.19 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.20 ChargeBearer <ChrgBr>

Presence: [0..1]
Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.
Data Type: Code
*When this message item is present, one of the following **ChargeBearerType1Code** values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.21 ChargesAccount <ChrgsAcct>

Presence: [0..1]
Definition: Account used to process charges associated with a transaction.

Usage : charges account should be used when charges have to be booked to an account different from the account identified in debtor's account.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.22 ChargesAccountAgent <ChrgsAcctAgt>

Presence: [0..1]
Definition: Agent that services a charges account.

Usage : charges account agent should only be used when the charges account agent is different from the debtor agent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.23 CreditTransferTransactionInformation <CdtTrfTxInf>

Presence: [1..n]
Definition: Set of elements providing information specific to the individual transaction(s) included in the message.
Type: *This message item is composed of the following **CreditTransferTransactionInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.24		PaymentIdentification	<PmtId>	[1..1]	
2.27		PaymentTypeInformation	<PmtTpInf>	[0..1]	
2.37		Amount	<Amt>	[1..1]	
2.42		ExchangeRateInformation	<XchgRateInf>	[0..1]	
2.46		ChargeBearer	<ChrgBr>	[0..1]	Code
2.47		ChequeInstruction	<ChqInstr>	[0..1]	+
2.48		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.49		IntermediaryAgent1	<IntrmyAgt1>	[0..1]	+
2.50		IntermediaryAgent1Account	<IntrmyAgt1Acct>	[0..1]	+
2.51		IntermediaryAgent2	<IntrmyAgt2>	[0..1]	+
2.52		IntermediaryAgent2Account	<IntrmyAgt2Acct>	[0..1]	+
2.53		IntermediaryAgent3	<IntrmyAgt3>	[0..1]	+
2.54		IntermediaryAgent3Account	<IntrmyAgt3Acct>	[0..1]	+
2.55		CreditorAgent	<CdtrAgt>	[0..1]	+
2.56		CreditorAgentAccount	<CdtrAgtAcct>	[0..1]	+
2.57		Creditor	<Cdtr>	[0..1]	+
2.58		CreditorAccount	<CdtrAcct>	[0..1]	+
2.59		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.60		InstructionForCreditorAgent	<InstrForCdtrAgt>	[0..n]	
2.63		InstructionForDebtorAgent	<InstrForDbtrAgt>	[0..1]	Text
2.64		Purpose	<Purp>	[0..1]	
2.67		RegulatoryReporting	<RgltryRptg>	[0..10]	
2.76		Tax	<Tax>	[0..1]	+
2.77		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]	
2.84		RemittanceInformation	<RmtInf>	[0..1]	

Rule(s): InstructionForCreditorAgentRule
If InstructionForCreditorAgent/Code contains CHQB, then CreditorAccount is not allowed.

IntermediaryAgent1AccountRule
If IntermediaryAgent1 is not present, then IntermediaryAgent1Account is not allowed.

IntermediaryAgent2AccountRule
If IntermediaryAgent2 is not present, then IntermediaryAgent2Account is not allowed.

IntermediaryAgent2Rule
If IntermediaryAgent2 is present, then IntermediaryAgent1 must be present.

IntermediaryAgent3AccountRule
If IntermediaryAgent3 is not present, then IntermediaryAgent3Account is not allowed.

IntermediaryAgent3Rule
If IntermediaryAgent3 is present, then IntermediaryAgent2 must be present.

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.24 PaymentIdentification <PmtId>

Presence: [1..1]

Definition: Set of elements to reference a payment instruction.

Type: *This message item is composed of the following **PaymentIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.25		InstructionIdentification	<InstrId>	[0..1]	Text
2.26		EndToEndIdentification	<EndToEndId>	[1..1]	Text

2.25 InstructionIdentification <InstrId>

Presence: [0..1]

Definition: Unique identification as assigned by an instructing party for an instructed party to unambiguously identify the instruction.

Usage: the instruction identification is a point to point reference that can be used between the instructing party and the instructed party to refer to the individual instruction. It can be included in several messages related to the instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.26 EndToEndIdentification <EndToEndId>

Presence: [1..1]

Definition: Unique identification assigned by the initiating party to unumbiguously identify the transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain.

Usage: The end-to-end identification can be used for reconciliation or to link tasks relating to the transaction. It can be included in several messages related to the transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.27 PaymentTypeInformation <PmtTpInf>

Presence: [0..1]

Definition: Set of elements that further specifies the type of transaction.

Type: *This message item is composed of the following **PaymentTypeInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.28		InstructionPriority	<InstrPrty>	[0..1]	Code
2.29	{Or	ServiceLevel	<SvcLvl>	[0..1]	
2.32	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code
2.33		LocalInstrument	<LclInstrm>	[0..1]	
2.36		CategoryPurpose	<CtgyPurp>	[0..1]	Code

2.28 InstructionPriority <InstrPrty>

Presence: [0..1]

Definition: Indicator of the urgency or order of importance that the instructing party would like the instructed party to apply to the processing of the instruction.

Data Type: Code

*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.29 ServiceLevel <SvcLvl>

Presence: [0..1]

*This message item is part of choice **2.27** PaymentTypeInformation.*

Definition: Agreement under which or rules under which the transaction should be processed.

Type: *This message item is composed of one of the following **ServiceLevel2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.30	{Or	Code	<Cd>	[1..1]	Code
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text

2.30 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.29** ServiceLevel.*
Definition: Identification of a pre-agreed level of service between the parties in a coded form.
Data Type: Code
*One of the following **ServiceLevel1Code** values must be used:*

Code	Name	Definition
PRPT	EBAPriorityService	Transaction must be processed according to the EBA Priority Service.
SDVA	SameDayValue	Payment must be executed with same day value to the creditor.
SEPA	SingleEuroPaymentsArea	Payment must be executed following the Single Euro Payments Area scheme.

2.31 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.29** ServiceLevel.*
Definition: Proprietary identification of a pre-agreed level of service between the parties.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.32 ClearingChannel <ClrChanl>

Presence: [0..1]
*This message item is part of choice **2.27** PaymentTypeInformation.*
Definition: Specifies the clearing channel to be used for the instruction.
Data Type: Code
*When this message item is present, one of the following **ClearingChannel2Code** values must be used:*

Code	Name	Definition
BOOK	BookTransfer	Payment through internal book transfer.
MPNS	MassPaymentNetSystem	Clearing channel is a mass payment net settlement system.
RTGS	RealTimeGrossSettlementSystem	Clearing channel is a real-time gross settlement system.
RTNS	RealTimeNetSettlementSystem	Clearing channel is a real-time net settlement system.

2.33 LocalInstrument <LclInstrm>

Presence: [0..1]
Definition: User community specific instrument.

Usage : When available, codes provided by local authorities should be used.

Type: *This message item is composed of one of the following* ***LocalInstrument1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.34	{Or	Code	<Cd>	[1..1]	Code
2.35	Or}	Proprietary	<Prtry>	[1..1]	Text

2.34 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.33*** *LocalInstrument.*
Definition: Specifies the local instrument published in an external local instrument code list.
Data Type: ExternalLocalInstrumentCode
Format: maxLength: 35
minLength: 1

2.35 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***2.33*** *LocalInstrument.*
Definition: Specifies the local instrument as a proprietary code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.36 CategoryPurpose <CtgyPurp>

Presence: [0..1]
Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.
Data Type: Code
When this message item is present, one of the following ***PaymentCategoryPurpose1Code*** *values must be used:*

Code	Name	Definition
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CORT	TradeSettlementPayment	Transaction is related to settlement of a trade, eg a foreign exchange deal or a securities transaction.
DIVI	Dividend	Transaction is the payment of dividends.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to the payment of a hedging operation.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is the payment of interest.
LOAN	Loan	Transaction is related to the transfer of a loan to a borrower.
PENS	PensionPayment	Transaction is the payment of pension.
SALA	SalaryPayment	Transaction is the payment of salaries.

Code	Name	Definition
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes.
TRAD	Trade	Transaction is related to the payment of a trade transaction.
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.
WHLD	WithHolding	Transaction is the payment of withholding tax.

2.37 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Type: *This message item is composed of one of the following **AmountType2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.38	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount
2.39	Or}	EquivalentAmount	<EqvtAmt>	[1..1]	

2.38 InstructedAmount <InstdAmt>

Presence: [1..1]

*This message item is part of choice **2.37** Amount.*

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.39 EquivalentAmount <EqvtAmt>

Presence: [1..1]

*This message item is part of choice **2.37** Amount.*

Definition: Amount of money to be transferred between the debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred into a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The debtor agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Type: *This message item is composed of the following **EquivalentAmount** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.40		Amount	<Amt>	[1..1]	Amount
2.41		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code

2.40 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred in a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.41 CurrencyOfTransfer <CcyOfTrf>

Presence: [1..1]

Definition: Specifies the currency of the to be transferred amount, which is different from the currency of the debtor's account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

2.42 ExchangeRateInformation <XchgRateInf>

Presence: [0..1]

Definition: Further detailed information on the exchange rate specified in the payment transaction.

Type: *This message item is composed of the following **ExchangeRateInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.43		ExchangeRate	<XchgRate>	[0..1]	Rate
2.44		RateType	<RateTp>	[0..1]	Code

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.45		ContractIdentification	<CtrctId>	[0..1]	Text

2.43 ExchangeRate <XchgRate>

Presence: [0..1]

Definition: The factor used for conversion of an amount from one currency to another. This reflects the price at which one currency was bought with another currency.

Data Type: BaseOneRate

Format: fractionDigits: 10
totalDigits: 11

2.44 RateType <RateTp>

Presence: [0..1]

Definition: Specifies the type used to complete the currency exchange.

Data Type: Code

*When this message item is present, one of the following **ExchangeRateType1Code** values must be used:*

Code	Name	Definition
AGRD	Agreed	Exchange rate applied is the rate agreed between the parties.
SALE	Sale	Exchange rate applied is the market rate at the time of the sale.
SPOT	Spot	Exchange rate applied is the spot rate.

2.45 ContractIdentification <CtrctId>

Presence: [0..1]

Definition: Unique and unambiguous reference to the foreign exchange contract agreed between the initiating party/ creditor and the debtor agent.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.46 ChargeBearer <ChrgBr>

Presence: [0..1]

Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.

Data Type: Code

*When this message item is present, one of the following **ChargeBearerType1Code** values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor.

Code	Name	Definition
		In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.47 ChequeInstruction <ChqInstr>

Presence: [0..1]
Definition: Information related to the issuance of a cheque.
Type: *This message item is composed of the following **Cheque5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	ChequeType	<ChqTp>	[0..1]	Code
	ChequeNumber	<ChqNb>	[0..1]	Text
	ChequeFrom	<ChqFr>	[0..1]	
	DeliveryMethod	<DlvryMtd>	[0..1]	
	DeliverTo	<DlvrTo>	[0..1]	
	InstructionPriority	<InstrPrty>	[0..1]	Code
	ChequeMaturityDate	<ChqMtrtyDt>	[0..1]	DateTime
	FormsCode	<FrmsCd>	[0..1]	Text
	MemoField	<MemoFld>	[0..1]	Text
	RegionalClearingZone	<RgnlClrZone>	[0..1]	Text
	PrintLocation	<PrtLctn>	[0..1]	Text

For additional Type information, please refer to Cheque5 p.320 in 'Message Item Types' section

Rule(s): ChequeMaturityDateRule
If ChequeType is present and is DRFT or ELDR, then ChequeMaturityDate is optional. If ChequeType is not present or is different from DRFT or ELDR, then ChequeMaturityDate is not allowed.

Rule rationale: ChequeMaturityDate may be present only when ChequeType is DRFT or ELDR.

2.48 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.49 IntermediaryAgent1 <IntrmyAgt1>

Presence: [0..1]

Definition: Agent between the debtor agent and creditor agent.

Usage: If more than one intermediary agent is present, then IntermediaryAgent1 identifies the agent between the debtor agent and the intermediary agent 2.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.50 IntermediaryAgent1Account <IntrmyAgt1Acct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the intermediary agent 1 at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.51 IntermediaryAgent2 <IntrmyAgt2>

Presence: [0..1]

Definition: Agent between the debtor agent and creditor agent.

Usage: If more than two intermediary agents are present, then IntermediaryAgent2 identifies the agent between the intermediary agent 1 and the intermediary agent 3.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.52 IntermediaryAgent2Account <IntrmyAgt2Acct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the intermediary agent 2 at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.53 IntermediaryAgent3 <IntrmyAgt3>

Presence: [0..1]

Definition: Agent between the debtor agent and creditor agent.

Usage: If IntermediaryAgent3 is present, then it identifies the agent between the intermediary agent 2 and the creditor agent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.54 IntermediaryAgent3Account <IntrmyAgt3Acct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the intermediary agent 3 at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.55 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.56 CreditorAgentAccount <CdtrAgtAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor agent at its servicing agent in the payment chain.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.57 Creditor <Cdtr>

Presence: [0..1]
Definition: Party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.58 CreditorAccount <CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.59 UltimateCreditor <UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.60 InstructionForCreditorAgent <InstrForCdtrAgt>

Presence: [0..n]

Definition: Further information related to the processing of the payment instruction, provided by the initiating party, and intended for the creditor agent.

Type: *This message item is composed of the following **InstructionForCreditorAgent1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.61		Code	<Cd>	[0..1]	Code
2.62		InstructionInformation	<InstrInf>	[0..1]	Text

2.61 Code <Cd>

Presence: [0..1]

Definition: Coded information related to the processing of the payment instruction, provided by the initiating party, and intended for the creditor's agent.

Data Type: Code

*When this message item is present, one of the following **Instruction3Code** values must be used:*

Code	Name	Definition
CHQB	PayCreditorByCheque	(Ultimate) creditor must be paid by cheque.
HOLD	HoldCashForCreditor	Amount of money must be held for the (ultimate) creditor, who will call. Pay on identification.
PHOB	PhoneBeneficiary	Please advise/contact (ultimate) creditor/claimant by phone
TELB	Telecom	Please advise/contact (ultimate) creditor/claimant by the most efficient means of telecommunication.

2.62 InstructionInformation <InstrInf>

Presence: [0..1]

Definition: Further information complementing the coded instruction or instruction to the creditor's agent that is bilaterally agreed or specific to a user community.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.63 InstructionForDebtorAgent <InstrForDbtrAgt>

Presence: [0..1]

Definition: Further information related to the processing of the payment instruction that may need to be acted upon by the debtor agent, depending on agreement between debtor and the debtor agent.

Usage: The instruction can relate to a level of service, can be an instruction to be executed by the debtor's agent, or can be information required by the debtor's agent to process the instruction.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.64 Purpose <Purp>

Presence: [0..1]

Definition: Underlying reason for the payment transaction, eg, a charity payment, or a commercial agreement between the creditor and the debtor.

Usage: purpose is used by the end-customers, ie originating party, initiating party, debtor, creditor, final party, to provide information concerning the nature of the payment transaction. Purpose is a content element, which is not used for processing by any of the agents involved in the payment chain.

Type: *This message item is composed of one of the following* ***Purpose1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.65	{Or	Code	<Cd>	[1..1]	Code
2.66	Or}	Proprietary	<Prtry>	[1..1]	Text

2.65 Code <Cd>

Presence: [1..1]

This message item is part of choice ***2.64*** *Purpose.*

Definition: Specifies the underlying reason for the payment transaction, as published in an external purpose code list.

Data Type: ExternalPurposeCode

Format: maxLength: 35
minLength: 1

2.66 Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice ***2.64*** *Purpose.*

Definition: User community specific purpose.

Usage: When available, codes provided by local communities should be used.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.67 RegulatoryReporting <RgltryRptg>

Presence: [0..10]

Definition: Information needed due to regulatory and statutory requirements.

Type: *This message item is composed of the following* ***RegulatoryReporting2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.68		DebitCreditReportingIndicator	<DbtCdtRptgInd>	[0..1]	Code
2.69		Authority	<Authrty>	[0..1]	
2.72		RegulatoryDetails	<RgltryDtls>	[0..1]	

2.68 DebitCreditReportingIndicator <DbtCdtRptgInd>

Presence: [0..1]

Definition: Identifies whether the regulatory reporting information applies to the debit side, to the credit side or to both debit and credit sides of the transaction.

Data Type: Code

When this message item is present, one of the following ***RegulatoryReportingType1Code*** *values must be used:*

Code	Name	Definition
BOTH	Both	Regulatory information applies to both credit and debit sides.
CRED	Credit	Regulatory information applies to the credit side.
DEBT	Debit	Regulatory information applies to the debit side.

2.69 Authority <Authrty>

Presence: [0..1]
Definition: Entity requiring the regulatory reporting information.
Type: *This message item is composed of the following **RegulatoryAuthority** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.70		AuthorityName	<AuthrtyNm>	[0..1]	Text
2.71		AuthorityCountry	<AuthrtyCtry>	[0..1]	Code

2.70 AuthorityName <AuthrtyNm>

Presence: [0..1]
Definition: Name of the entity requiring the regulatory reporting information.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.71 AuthorityCountry <AuthrtyCtry>

Presence: [0..1]
Definition: Country of the entity requiring the regulatory reporting information.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

2.72 RegulatoryDetails <RgltryDtls>

Presence: [0..1]
Definition: Details related to the regulatory reporting information.
Type: *This message item is composed of the following **StructuredRegulatoryReporting2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.73		Code	<Cd>	[0..1]	Text
2.74		Amount	<Amt>	[0..1]	Amount
2.75		Information	<Inf>	[0..1]	Text

2.73 Code <Cd>

Presence: [0..1]

Definition: Specifies the nature, purpose, and reason for the transaction to be reported for regulatory and statutory requirements in a coded form.

Data Type: Max3Text

Format: maxLength: 3
minLength: 1

2.74 Amount <Amt>

Presence: [0..1]

Definition: Amount of money to be reported for regulatory and statutory requirements.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.75 Information <Inf>

Presence: [0..1]

Definition: Additional details that cater for specific domestic regulatory requirements.

Usage: Information is used to provide details that are not catered for in the Code or/and Amount elements.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.76 Tax <Tax>

Presence: [0..1]

Definition: Amount of money due to the government or tax authority, according to various pre-defined parameters such as thresholds or income.

Type: *This message item is composed of the following* ***TaxInformation2*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	CreditorTaxIdentification	<CdtrTaxId>	[0..1]	Text
	CreditorTaxType	<CdtrTaxTp>	[0..1]	Text
	DebtorTaxIdentification	<DbtrTaxId>	[0..1]	Text
	TaxReferenceNumber	<TaxRefNb>	[0..1]	Text
	TotalTaxableBaseAmount	<TtlTaxblBaseAmt>	[0..1]	Amount
	TotalTaxAmount	<TtlTaxAmt>	[0..1]	Amount

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	TaxDate	<TaxDt>	[0..1]	DateTime
	TaxTypeInformation	<TaxTpInf>	[0..n]	

For additional Type information, please refer to TaxInformation2 p.353 in 'Message Item Types' section

2.77 RelatedRemittanceInformation <RltdRmtInf>

Presence: [0..10]

Definition: Information related to the handling of the remittance information by any of the agents in the transaction processing chain.

Type: *This message item is composed of the following **RemittanceLocation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.78		RemittanceIdentification	<RmtId>	[0..1]	Text
2.79		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code
2.80		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text
2.81		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]	

2.78 RemittanceIdentification <RmtId>

Presence: [0..1]

Definition: Unique and unambiguous identification of the remittance information, e.g. a remittance advice, which is sent separately from the payment instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.79 RemittanceLocationMethod <RmtLctnMtd>

Presence: [0..1]

Definition: Specifies the method used to deliver the remittance advice information.

Data Type: Code

*When this message item is present, one of the following **RemittanceLocationMethod1Code** values must be used:*

Code	Name	Definition
EDIC	ElectronicDataInterchange	Remittance advice information must be sent through Electronic Data Interchange (EDI).
EMAL	EMail	Remittance advice information must be sent through e-mail.
FAXI	Fax	Remittance advice information must be faxed.
POST	Post	Remittance advice information must be sent through postal services.
URID	UniformResourceIdentifier	Remittance advice information needs to be sent to a Uniform Resource Identifier (URI). URI is a compact string of characters that uniquely identify an abstract or physical

Code	Name	Definition
		resource. URI's are the super-set of identifiers, such as URLs, email addresses, ftp sites, etc, and as such, provide the syntax for all of the identification schemes.

2.80 RemittanceLocationElectronicAddress <RmtLctnElctrncAdr>

Presence: [0..1]
Definition: Electronic address to which an agent is to send the remittance information.
Data Type: Max256Text
Format: maxLength: 256
minLength: 1

2.81 RemittanceLocationPostalAddress <RmtLctnPstlAdr>

Presence: [0..1]
Definition: Postal address to which an agent is to send the remittance information.
Type: *This message item is composed of the following **NameAndAddress3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.82		Name	<Nm>	[1..1]	Text
2.83		Address	<Adr>	[1..1]	+

2.82 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and is usually used to identify that identity.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.83 Address <Adr>

Presence: [1..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.351 in 'Message Item Types' section

2.84 RemittanceInformation <RmtInf>

Presence: [0..1]

Definition: Information that enables the matching, ie, reconciliation, of a payment with the items that the payment is intended to settle, eg, commercial invoices in an account receivable system.

Type: *This message item is composed of the following **RemittanceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.85		Unstructured	<Ustrd>	[0..n]	Text
2.86		Structured	<Strd>	[0..n]	

2.85 Unstructured <Ustrd>

Presence: [0..n]

Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in an unstructured form.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.86 Structured <Strd>

Presence: [0..n]

Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in a structured form.

Type: *This message item is composed of the following **StructuredRemittanceInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.87		ReferredDocumentInformation	<RfrdDocInf>	[0..1]	
2.93		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime
2.94		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]	
2.100		CreditorReferenceInformation	<CdtrRefInf>	[0..1]	
2.106		Invoicer	<Invcr>	[0..1]	+
2.107		Invoicee	<Invcee>	[0..1]	+
2.108		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text

2.87 ReferredDocumentInformation <RfrdDocInf>

Presence: [0..1]

Definition: Reference information to allow the identification of the underlying reference documents.
Type: *This message item is composed of the following **ReferredDocumentInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.88		ReferredDocumentType	<RfrdDocTp>	[0..1]	
2.92		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text

2.88 ReferredDocumentType <RfrdDocTp>

Presence: [0..1]
Definition: Provides the type of the referred document.
Type: *This message item is composed of the following **ReferredDocumentType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.89	{Or	Code	<Cd>	[1..1]	Code
2.90	Or}	Proprietary	<Prtry>	[1..1]	Text
2.91		Issuer	<Issr>	[0..1]	Text

2.89 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.88** ReferredDocumentType.*
Definition: Document type in a coded form.
Data Type: Code
*One of the following **DocumentType2Code** values must be used:*

Code	Name	Definition
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.

Code	Name	Definition
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.

2.90 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.88** ReferredDocumentType.*

Definition: Proprietary identification of the type of the remittance document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.91 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the reference document type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.92 ReferredDocumentNumber <RfrdDocNb>

Presence: [0..1]

Definition: Unique and unambiguous identification number of the referred document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.93 ReferredDocumentRelatedDate <RfrdDocRltdDt>

Presence: [0..1]

Definition: Date associated with the referred document, eg, date of issue.

Data Type: ISODate

2.94 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..n]

Definition: Amount of money and currency of a document referred to in the remittance section. The amount is typically either the original amount due and payable, or the amount actually remitted for the referred document.

Type: *This message item is composed of one of the following **ReferredDocumentAmount1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.95	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount
2.96	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount
2.97	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount
2.98	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount
2.99	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount

2.95 DuePayableAmount <DuePyblAmt>

Presence: [1..1]

*This message item is part of choice **2.94** ReferredDocumentAmount.*

Definition: Amount specified is the exact amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.96 DiscountAppliedAmount <DscntApldAmt>

Presence: [1..1]

*This message item is part of choice **2.94** ReferredDocumentAmount.*

Definition: Amount of money resulting from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.97 RemittedAmount <RmtdAmt>

Presence: [1..1]

*This message item is part of choice **2.94** ReferredDocumentAmount.*

Definition: Amount of money remitted for the referred document.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.98 CreditNoteAmount <CdtNoteAmt>

Presence: [1..1]
*This message item is part of choice **2.94** ReferredDocumentAmount.*
Definition: Amount specified for the referred document is the amount of a credit note.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.99 TaxAmount <TaxAmt>

Presence: [1..1]
*This message item is part of choice **2.94** ReferredDocumentAmount.*
Definition: Quantity of cash resulting from the calculation of the tax.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

2.100 CreditorReferenceInformation <CdtrRefInf>

Presence: [0..1]
Definition: Reference information provided by the creditor to allow the identification of the underlying documents.
Type: *This message item is composed of the following **CreditorReferenceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.101		CreditorReferenceType	<CdtrRefTp>	[0..1]	
2.105		CreditorReference	<CdtrRef>	[0..1]	Text

2.101 CreditorReferenceType <CdtrRefTp>

Presence: [0..1]
Definition: Provides the type of the creditor reference.
Type: *This message item is composed of the following **CreditorReferenceType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.102	{Or	Code	<Cd>	[1..1]	Code
2.103	Or}	Proprietary	<Prtry>	[1..1]	Text
2.104		Issuer	<Issr>	[0..1]	Text

2.102 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.101** CreditorReferenceType.*
Definition: Coded creditor reference type.
Data Type: Code
*One of the following **DocumentType3Code** values must be used:*

Code	Name	Definition
DISP	DispatchAdvice	Document is a dispatch advice.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
PUOR	PurchaseOrder	Document is a purchase order.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SCOR	StructuredCommunicationReference	Document is a structured communication reference provided by the creditor to identify the referred transaction.

2.103 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.101** CreditorReferenceType.*
Definition: Creditor reference type not avilable in a coded format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.104 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the credit reference type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.105 CreditorReference <CdtrRef>

Presence: [0..1]

Definition: Unique and unambiguous reference assigned by the creditor to refer to the payment transaction.

Usage: if available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the cash.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.106 Invoicer <Invcr>

Presence: [0..1]

Definition: Identification of the organization issuing the invoice when different than the creditor or final party.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.107 Invoicee <Invcee>

Presence: [0..1]

Definition: Identification of the party to whom an invoice is issued, when different than the originator or debtor.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.108 AdditionalRemittanceInformation <AddtlRmtInf>

Presence: [0..1]

Definition: Additional information, in free text form, to complement the structured remittance information.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

Business Example

Narrative

ABC Corporation, New York has received three invoices:
1. An invoice with number 4562, dated 08 September 2006 from DEF Electronics, London: 10 million JPY needs to be paid to DEF Electronics account 23683707994215 with AAAA Bank, London (AAAAGB2L). ABC Corporation assigns reference ABC/4562/2006-09-08 to the payment. Payment transaction charges are shared between ABC Corporation and DEF Electronics.
2. An invoice with number ABC-13679, dated 15 September 2006 from GHI Semiconductors, Brussels: 500,000 EUR needs to be paid to GHI Semiconductors account BE30001216371411 with DDDD Bank, Belgium (DDDDBEBB). ABC Corporation assigns reference ABC/ABC-13679/2006-09-15 to the payment. The accounts receivable department of GHI Semiconductors needs to be advised when the funds have been credited on the account on telephone number +32/2/2222222. GHI Semiconductors will bear all payment transaction charges.
3. An invoice with number 987-AC, dated 27 September 2006, from their branch ABC Corporation, California: 1 million USD needs to be paid to the branch account 4895623 with BBBB Bank, San Francisco (BBBBUS66). ABC assigns a reference ABC/987-AC/2006-09-27 to the payment. Payment transaction charges are shared.

ABC Corporation holds an account 00125574999 with BBBB Bank, New York (BBBBUS33) and instructs its bank to execute payment of the invoices with a CustomerCreditTransferInitiation message.

Business Description

CustomerCreditTransferInitiation from ABC Corporation, New York to BBBBB Bank, New York:

Element	***<XMLTag>***	***Content***
Group Header	<GrpHdr>	
MessageIdentification	<MsgId>	ABC/060928/CCT001
CreationDateTime	<CreDtTm>	2006-09-28T14:07:00
BatchBooking	<BtchBookg>	false
NumberOfTransactions	<NbOfTxs>	3
Controlsum	<CtrlSum>	11500000
Grouping	<Grpg>	GRPD
InitiatingParty	<InitgPty>	
Name	<Nm>	ABC Corporation
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Times Square
BuildingNumber	<BldgNb>	7
PostCode	<PstCd>	NY 10036
TownName	<TwnNm>	New York
Country	<Ctry>	US
PaymentInformation	<PmtInf>	
PaymentMethod	<PmtMtd>	TRF
RequestedExecutionDate	<ReqdExctnDt>	2006-09-29
Debtor	<Dbtr>	

Name	<Nm>	ABC Corporation
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Times Square
BuildingNumber	<BldgNb>	7
PostCode	<PstCd>	NY 10036
TownName	<TwnNm>	New York
Country	<Ctry>	US
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	
Identification	<Id>	00125574999
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBUS33
CreditTransferTransactionInformation	<CdtTrfTxInf>	
PaymentIdentification		
InstructionIdentification	<InstrId>	ABC/060928/CCT001/1
EndToEndIdentification	<EndToEnd>	ABC/4562/2006-09-08
Amount	<Amt>	
InstructedAmount	<InstAmt>Ccy=JPY	10000000.
ChargeBearer	<ChrgBr>	SHAR
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAAGB2L
Creditor	<Cdtr>	
Name	<Nm>	DEF Electronics
PostalAddress	<PstlAdr>	
AddressLine	<AdrLine>	Corn Exchange 5th Floor
StreetName	<StrtNm>	Mark Lane
BuildingNumber	<BldgNb>	55
PostCode	<PstCd>	EC3R7NE
TownName	<TwnNm>	London
Country	<Ctry>	GB
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	

Identification	<Id>	23683707994215
Purpose	<Purp>	
Code	<Cd>	GDDS
RemittanceInformation	<RmtInf>	
Structured	<Strd>	
ReferredDocumentInformation	<RfrdDocInf>	
ReferredDocumentType	<RfrdDocType>	
Code	<Cd>	CINV
ReferredDocumentNumber	<RfrdDocNb>	4562
ReferredDocumentRelatedDate	<RfrdDocRltdDt>	2006-09-08
CreditTransferTransactionInformation	<CdtTrfTxInf>	
PaymentIdentification	<PmtId>	
InstructionIdentification	<InstrId>	ABC/060928/CCT001/2
EndToEndIdentification	<EndToEndId>	ABC/ABC-13679/2006-09-15
Amount	<Amt>	
InstructedAmount	<InstdAmt>Ccy=EUR	500000.00
ChargeBearer	<ChrgBr>	CRED
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	DDDDBEBB
Creditor	<Cdtr>	
Name	<Nm>	GHI Semiconductors
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Avenue Brugmann
BuildingNumber	<BldgNb>	415
PostCode	<PstCd>	1180
TownName	<TwnNm>	Brussels
Country	<Ctry>	BE
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	BE30001216371411
InstructionForCreditorAgent	<InstrForCdtrAgt>	
Code	<Cd>	PHOB
InstructionInformation	<InstrInf>	+32/2/2222222
Purpose	<Purp>	
Code	<Cd>	GDDS
RemittanceInformation	<RmtInf>	

Structured	<Strd>	
ReferredDocumentInformation	<RfrdDocInf>	
ReferredDocumentType	<RfrdDocType>	
Code	<Cd>	CINV
ReferredDocumentNumber	<RfrdDocNb>	ABC-13679
ReferredDocumentRelatedDate	<RfrdDocRltdDt>	2006-09-15
CreditTransferTransactionInformation	<CdtTrfTxInf>	
PaymentIdentification	<PmtId>	
InstructionIdentification	<InstrId>	ABC/060928/CCT001/3
EndToEndIdentification	<EndToEndId>	ABC/987-AC/2006-09-27
Amount	<Amt>	
InstructedAmount	<InstdAmt>Ccy=EUR	1000000.00
ChargeBearer	<ChrgBr>	SHAR
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBUS66
Creditor	<Cdtr>	
Name	<Nm>	ABC Corporation
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Bush Street
BuildingNumber	<BldgNb>	13
PostCode	<PstCd>	CA 94108
TownName	<TwnNm>	San Francisco
Country	<Ctry>	US
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	
Identification	<Id>	4895623
Purpose	<Purp>	
Code	<Cd>	INTC
RemittanceInformation	<RmtInf>	
Structured	<Strd>	
ReferredDocumentInformation	<RfrdDocInf>	
ReferredDocumentType	<RfrdDocType>	
Code	<Cd>	CINV
ReferredDocumentNumber	<RfrdDocNb>	987-AC
ReferredDocumentRelatedDate	<RfrdDocRltdDt>	2006-09-27

XML Instance


```
<pain.001.001.02>
    <GrpHdr>
      <MsgId>ABC/060928/CCT001</MsgId>
      <CreDtTm>2006-09-28T14:07:00</CreDtTm>
      <BtchBookg>false</BtchBookg>
      <NbOfTxs>3</NbOfTxs>
      <CtrlSum>11500000</CtrlSum>
      <Grpg>GRPD</Grpg>
      <InitgPty>
        <Nm>ABC Corporation</Nm>
        <PstlAdr>
          <StrtNm>Times Square</StrtNm>
          <BldgNb>7</BldgNb>
          <PstCd>NY 10036</PstCd>
          <TwnNm>New York</TwnNm>
          <Ctry>US</Ctry>
        </PstlAdr>
      </InitgPty>
    </GrpHdr>
    <PmtInf>
      <PmtMtd>TRF</PmtMtd>
      <ReqdExctnDt>2006-09-29</ReqdExctnDt>
      <Dbtr>
        <Nm>ABC Corporation</Nm>
        <PstlAdr>
          <StrtNm>Times Square</StrtNm>
          <BldgNb>7</BldgNb>
          <PstCd>NY 10036</PstCd>
          <TwnNm>New York</TwnNm>
          <Ctry>US</Ctry>
        </PstlAdr>
      </Dbtr>
      <DbtrAcct>
        <Id>
          <PrtryAcct>
            <Id>00125574999</Id>
          </PrtryAcct>
        </Id>
      </DbtrAcct>
      <DbtrAgt>
        <FinInstnId>
          <BIC>BBBBUS33</BIC>
        </FinInstnId>
      </DbtrAgt>
      <CdtTrfTxInf>
        <PmtId>
          <InstrId>ABC/060928/CCT001/1</InstrId>
          <EndToEndId>ABC/4562/2006-09-08</EndToEndId>
        </PmtId>
```

```
      <Amt>
        <InstdAmt Ccy = "JPY">10000000</InstdAmt>
      </Amt>
      <ChrgBr>SHAR</ChrgBr>
      <CdtrAgt>
        <FinInstnId>
          <BIC>AAAAGB2L</BIC>
        </FinInstnId>
      </CdtrAgt>
      <Cdtr>
        <Nm>DEF Electronics</Nm>
        <PstlAdr>
          <AdrLine>Corn Exchange 5th Floor</AdrLine>
          <StrtNm>Mark Lane</StrtNm>
          <BldgNb>55</BldgNb>
          <PstCd>EC3R7NE</PstCd>
          <TwnNm>London</TwnNm>
          <Ctry>GB</Ctry>
        </PstlAdr>
      </Cdtr>
      <CdtrAcct>
        <Id>
          <PrtryAcct>
            <Id>23683707994215</Id>
          </PrtryAcct>
        </Id>
      </CdtrAcct>
      <Purp>
        <Cd>GDDS</Cd>
      </Purp>
      <RmtInf>
        <Strd>
          <RfrdDocInf>
            <RfrdDocTp>
              <Cd>CINV</Cd>
            </RfrdDocTp>
            <RfrdDocNb>4562</RfrdDocNb>
          </RfrdDocInf>
          <RfrdDocRltdDt>2006-09-08</RfrdDocRltdDt>
        </Strd>
      </RmtInf>
    </CdtTrfTxInf>
    <CdtTrfTxInf>
      <PmtId>
        <InstrId>ABC/060928/CCT001/2</InstrId>
        <EndToEndId>ABC/ABC-13679/2006-09-15</EndToEndId>
      </PmtId>
      <Amt>
        <InstdAmt Ccy = "EUR">500000</InstdAmt>
      </Amt>
      <ChrgBr>CRED</ChrgBr>
      <CdtrAgt>
```

```
            <FinInstnId>
                <BIC>DDDDBEBB</BIC>
            </FinInstnId>
        </CdtrAgt>
        <Cdtr>
            <Nm>GHI Semiconductors</Nm>
            <PstlAdr>
                <StrtNm>Avenue Brugmann</StrtNm>
                <BldgNb>415</BldgNb>
                <PstCd>1180</PstCd>
                <TwnNm>Brussels</TwnNm>
                <Ctry>BE</Ctry>
            </PstlAdr>
        </Cdtr>
        <CdtrAcct>
            <Id>
                <IBAN>BE30001216371411</IBAN>
            </Id>
        </CdtrAcct>
        <InstrForCdtrAgt>
            <Cd>PHOB</Cd>
            <InstrInf>+32/2/2222222</InstrInf>
        </InstrForCdtrAgt>
        <Purp>
            <Cd>GDDS</Cd>
        </Purp>
        <RmtInf>
            <Strd>
                <RfrdDocInf>
                    <RfrdDocTp>
                        <Cd>CINV</Cd>
                    </RfrdDocTp>
                    <RfrdDocNb>ABC-13679</RfrdDocNb>
                </RfrdDocInf>
                <RfrdDocRltdDt>2006-09-15</RfrdDocRltdDt>
            </Strd>
        </RmtInf>
    </CdtTrfTxInf>
    <CdtTrfTxInf>
        <PmtId>
            <InstrId>ABC/060928/CCT001/3</InstrId>
            <EndToEndId>ABC/987-AC/2006-09-27</EndToEndId>
        </PmtId>
        <Amt>
            <InstdAmt Ccy = "USD">1000000</InstdAmt>
        </Amt>
        <ChrgBr>SHAR</ChrgBr>
        <CdtrAgt>
            <FinInstnId>
                <BIC>BBBBUS66</BIC>
            </FinInstnId>
        </CdtrAgt>
```

```
        <Cdtr>
          <Nm>ABC Corporation</Nm>
          <PstlAdr>
            <StrtNm>Bush Street</StrtNm>
            <BldgNb>13</BldgNb>
            <PstCd>CA 94108</PstCd>
            <TwnNm>San Francisco</TwnNm>
            <Ctry>US</Ctry>
          </PstlAdr>
        </Cdtr>
        <CdtrAcct>
          <Id>
            <PrtryAcct>
              <Id>4895623</Id>
            </PrtryAcct>
          </Id>
        </CdtrAcct>
        <Purp>
          <Cd>INTC</Cd>
        </Purp>
        <RmtInf>
          <Strd>
            <RfrdDocInf>
              <RfrdDocTp>
                <Cd>CINV</Cd>
              </RfrdDocTp>
              <RfrdDocNb>987-AC</RfrdDocNb>
            </RfrdDocInf>
            <RfrdDocRltdDt>2006-09-27</RfrdDocRltdDt>
          </Strd>
        </RmtInf>
      </CdtTrfTxInf>
    </PmtInf>
  </pain.001.001.02>
```

Message: CustomerDirectDebitInitiationV01 <pain.008.001.01>

Message Scope and Usage

Scope

The CustomerDirectDebitInitiation message is sent by the initiating party to the forwarding agent or creditor agent. It is used to request single or bulk collection(s) of funds from one or various debtor's account(s) for a creditor.

Usage

The CustomerDirectDebitInitiation message can contain one or more direct debit instructions.
The message can be used in a direct or a relay scenario:

- In a direct scenario, the message is sent directly to the creditor agent. The creditor agent is the account servicer of the creditor.
- In a relay scenario, the message is sent to a forwarding agent. The forwarding agent acts as a concentrating financial institution. It will forward the CustomerDirectDebitInitiation message to the creditor agent.

The message can also be used by an initiating party that has authority to send the message on behalf of the creditor. This caters for example for the scenario of a payments factory initiating all payments on behalf of a large corporate.

The CustomerDirectDebitInitiation message can be used in domestic and cross-border scenarios.

The CustomerDirectDebitInitiation may or may not contain mandate related information, i.e. extracts from a mandate, such as MandateIdentification or DateOfSignature. The CustomerDirectDebitInitiation message must not be considered as a mandate.

The CustomerDirectDebitInitiation message must not be used by the creditor agent to execute the direct debit instruction (s). The FIToFICustomerDirectDebit message must be used instead.

If it is agreed to include the payment information related to the credit side only once (i.e. *Grouped* mode), the PaymentInformation block will be present only once. If it is agreed to repeat the payment information related to the credit side (i.e. *Single* mode), the PaymentInformation block must be present once per occurrence of the DirectDebitTransactionInformation block. The CustomerDirectDebitInitiation message also allows for a *Mixed* mode where the PaymentInformation block can be repeated and each PaymentInformation block can contain one or several DirectDebitTransactionInformation block(s).

Single	Indicates that for each occurrence of the payment information block, exactly one occurrence of the payment transaction block is present.
Grouped	Indicates that there is only one occurrence of the Payment Information block and several occurrences of the payment transaction block.
Mixed	Indicates that there are one or several occurrences of the Payment Information block where each of the occurrences might contain one or several occurrences of the payment transaction block.

Single

When grouping is set to *Single*, information for each individual instruction is included separately. This means the PaymentInformation block is repeated, and present for each occurrence of the Direct Debit TransactionInformation block.

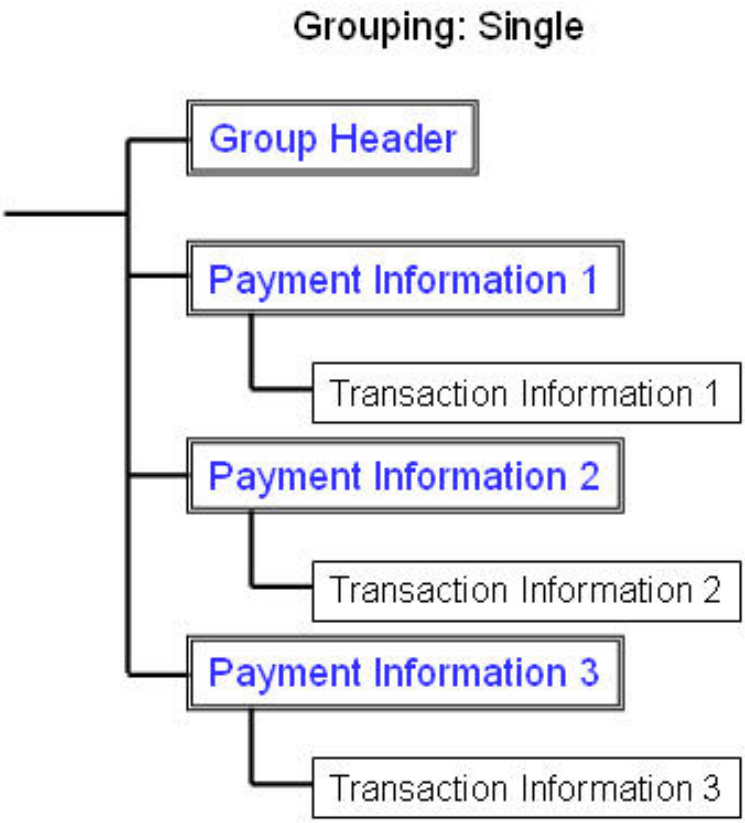

Grouped

When grouping is set to *Grouped*, the PaymentInformation block will be present once and the Direct Debit TransactionInformation block will be repeated.

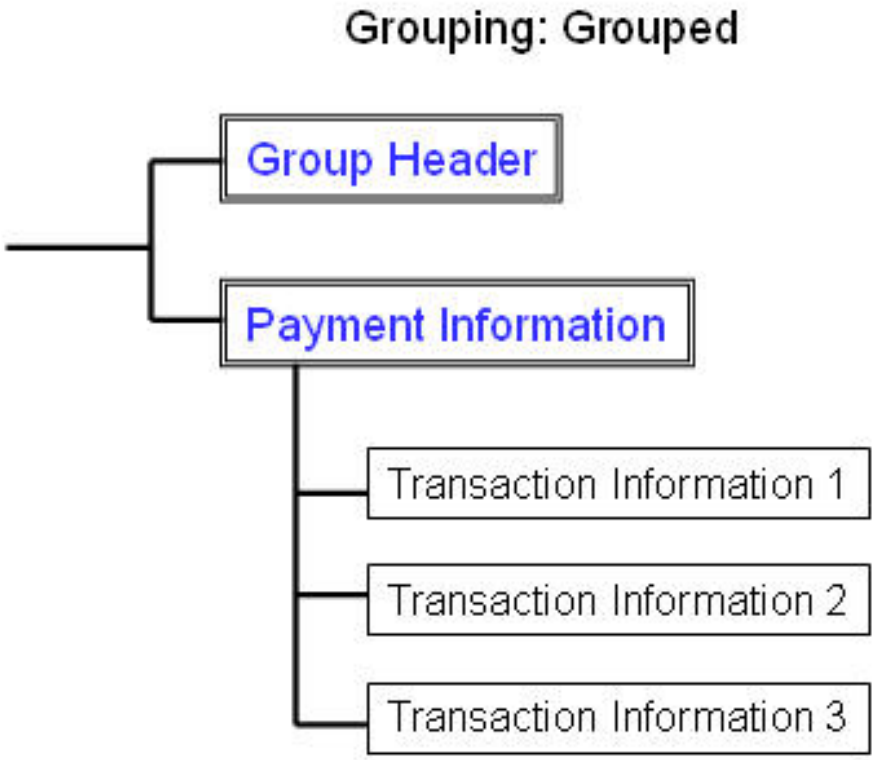

Mixed

When grouping is set to *Mixed*, the PaymentInformation block may be present once or may be repeated. Each sequence of the PaymentInformation block may contain one or several Direct Debit TransactionInformation block(s).

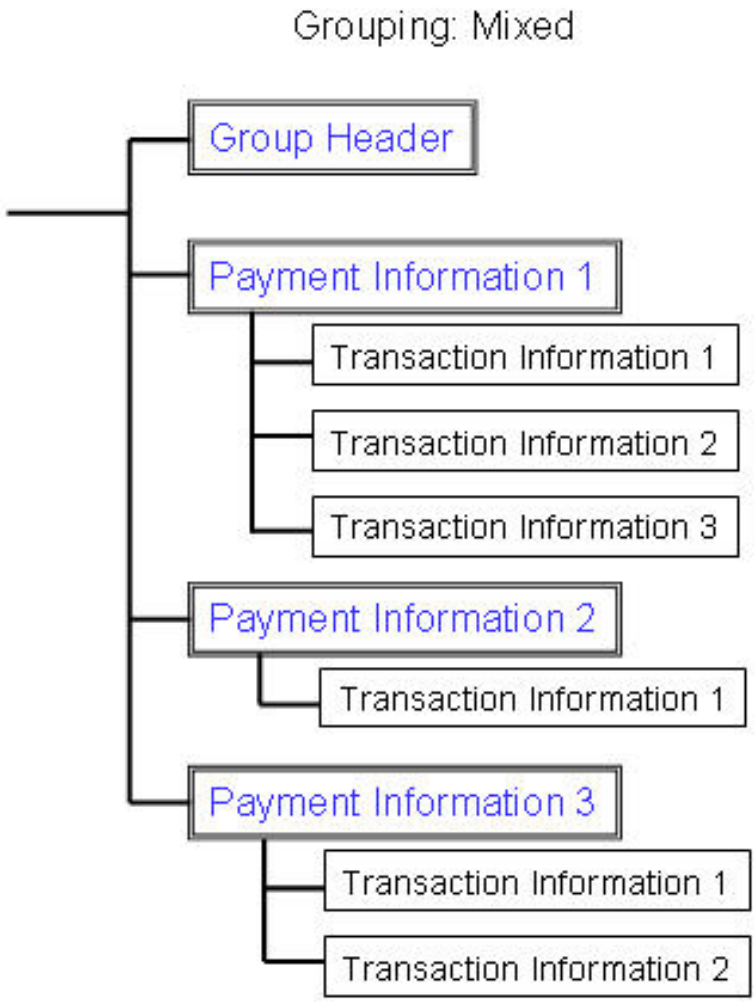

Outline

The CustomerDirectDebitInitiation message is composed of 3 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime, Grouping indicator.

B. Payment Information

This building block is mandatory and repetitive. It contains, amongst others, elements related to the Credit side of the transaction, such as Creditor or PaymentTypeInformation.

C. Direct Debit Transaction Information

This building block is mandatory and repetitive. It contains, amongst others, elements related to the Debit side of the transaction, such as Debtor or RemittanceInformation.

Rules

Grouping1Rule
If GroupHeader/Grouping is present and equals GRPD, then one and only one occurrence of PaymentInformation must be present.

Grouping2Rule
If GroupHeader/Grouping is present and equals SNGL, then each occurrence of PaymentInformation must contain one and only one occurrence of PaymentInformation/DirectDebitTransactionInformation.

Note : Rules applying to specific message components or message elements are included in the description of the relevant message component or message element.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]	Text	
1.4		BatchBooking	<BtchBookg>	[0..1]	Indicator	
1.5		NumberOfTransactions	<NbOfTxs>	[1..1]	Text	
1.6		ControlSum	<CtrlSum>	[0..1]	Quantity	
1.7		Grouping	<Grpg>	[1..1]	Code	
1.8		InitiatingParty	<InitgPty>	[1..1]	+	
1.9		ForwardingAgent	<FwdgAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		PaymentInformation	<PmtInf>	[1..n]		
2.1		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text	
2.2		PaymentMethod	<PmtMtd>	[1..1]	Code	
2.3		PaymentTypeInformation	<PmtTpInf>	[0..1]		
2.4		InstructionPriority	<InstrPrty>	[0..1]	Code	
2.5	{Or	ServiceLevel	<SvcLvl>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.6	{{Or	Code	<Cd>	[1..1]	Code	
2.7	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.8	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code	
2.9		LocalInstrument	<LclInstrm>	[0..1]		
2.10	{Or	Code	<Cd>	[1..1]	Code	
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.12		SequenceType	<SeqTp>	[0..1]	Code	
2.13		CategoryPurpose	<CtgyPurp>	[0..1]	Code	
2.14		RequestedCollectionDate	<ReqdColltnDt>	[1..1]	DateTime	
2.15		Creditor	<Cdtr>	[1..1]	+	
2.16		CreditorAccount	<CdtrAcct>	[1..1]	+	
2.17		CreditorAgent	<CdtrAgt>	[1..1]	+	
2.18		CreditorAgentAccount	<CdtrAgtAcct>	[0..1]	+	
2.19		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.20		ChargeBearer	<ChrgBr>	[0..1]	Code	
2.21		ChargesAccount	<ChrgsAcct>	[0..1]	+	
2.22		ChargesAccountAgent	<ChrgsAcctAgt>	[0..1]	+	
2.23		DirectDebitTransactionInformation	<DrctDbtTxInf>	[1..n]		
2.24		PaymentIdentification	<PmtId>	[1..1]		
2.25		InstructionIdentification	<InstrId>	[0..1]	Text	
2.26		EndToEndIdentification	<EndToEndId>	[1..1]	Text	
2.27		PaymentTypeInformation	<PmtTpInf>	[0..1]		
2.28		InstructionPriority	<InstrPrty>	[0..1]	Code	
2.29	{Or	ServiceLevel	<SvcLvl>	[0..1]		
2.30	{{Or	Code	<Cd>	[1..1]	Code	
2.31	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.32	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code	
2.33		LocalInstrument	<LclInstrm>	[0..1]		
2.34	{Or	Code	<Cd>	[1..1]	Code	
2.35	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.36		SequenceType	<SeqTp>	[0..1]	Code	
2.37		CategoryPurpose	<CtgyPurp>	[0..1]	Code	
2.38		InstructedAmount	<InstdAmt>	[1..1]	Amount	
2.39		ChargeBearer	<ChrgBr>	[0..1]	Code	
2.40		DirectDebitTransaction	<DrctDbtTx>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.41		MandateRelatedInformation	<MndtRltdInf>	[0..1]		
2.42		MandateIdentification	<MndtId>	[0..1]	Text	
2.43		DateOfSignature	<DtOfSgntr>	[0..1]	DateTime	
2.44		AmendmentIndicator	<AmdmntInd>	[0..1]	Indicator	
2.45		AmendmentInformationDetails	<AmdmntInfDtls>	[0..1]		
2.46		OriginalMandateIdentification	<OrgnlMndtId>	[0..1]	Text	
2.47		OriginalCreditorSchemeIdentification	<OrgnlCdtrSchmeId>	[0..1]	+	
2.48		OriginalCreditorAgent	<OrgnlCdtrAgt>	[0..1]	+	
2.49		OriginalCreditorAgentAccount	<OrgnlCdtrAgtAcct>	[0..1]	+	
2.50		OriginalDebtor	<OrgnlDbtr>	[0..1]	+	
2.51		OriginalDebtorAccount	<OrgnlDbtrAcct>	[0..1]	+	
2.52		OriginalDebtorAgent	<OrgnlDbtrAgt>	[0..1]	+	
2.53		OriginalDebtorAgentAccount	<OrgnlDbtrAgtAcct>	[0..1]	+	
2.54		OriginalFinalCollectionDate	<OrgnlFnlColltnDt>	[0..1]	DateTime	
2.55		OriginalFrequency	<OrgnlFrqcy>	[0..1]	Code	
2.56		ElectronicSignature	<ElctrncSgntr>	[0..1]	Text	
2.57		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	
2.58		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
2.59		Frequency	<Frqcy>	[0..1]	Code	
2.60		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
2.61		PreNotificationIdentification	<PreNtfctnId>	[0..1]	Text	
2.62		PreNotificationDate	<PreNtfctnDt>	[0..1]	DateTime	
2.63		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.64		DebtorAgent	<DbtrAgt>	[1..1]	+	
2.65		DebtorAgentAccount	<DbtrAgtAcct>	[0..1]	+	
2.66		Debtor	<Dbtr>	[1..1]	+	
2.67		DebtorAccount	<DbtrAcct>	[1..1]	+	
2.68		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.69		InstructionForCreditorAgent	<InstrForCdtrAgt>	[0..1]	Text	
2.70		Purpose	<Purp>	[0..1]		
2.71	{Or	Code	<Cd>	[1..1]	Code	
2.72	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.73		RegulatoryReporting	<RgltryRptg>	[0..10]		
2.74		DebitCreditReportingIndicator	<DbtCdtRptgInd>	[0..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.75		Authority	<Authrty>	[0..1]		
2.76		AuthorityName	<AuthrtyNm>	[0..1]	Text	
2.77		AuthorityCountry	<AuthrtyCtry>	[0..1]	Code	
2.78		RegulatoryDetails	<RgltryDtls>	[0..1]		
2.79		Code	<Cd>	[0..1]	Text	
2.80		Amount	<Amt>	[0..1]	Amount	
2.81		Information	<Inf>	[0..1]	Text	
2.82		Tax	<Tax>	[0..1]	+	
2.83		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]		
2.84		RemittanceIdentification	<RmtId>	[0..1]	Text	
2.85		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code	
2.86		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text	
2.87		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]		
2.88		Name	<Nm>	[1..1]	Text	
2.89		Address	<Adr>	[1..1]	+	
2.90		RemittanceInformation	<RmtInf>	[0..1]		
2.91		Unstructured	<Ustrd>	[0..n]	Text	
2.92		Structured	<Strd>	[0..n]		
2.93		ReferredDocumentInformation	<RfrdDocInf>	[0..1]		
2.94		ReferredDocumentType	<RfrdDocTp>	[0..1]		
2.95	{Or	Code	<Cd>	[1..1]	Code	
2.96	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.97		Issuer	<Issr>	[0..1]	Text	
2.98		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text	
2.99		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime	
2.100		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]		
2.101	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount	
2.102	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount	
2.103	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount	
2.104	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount	
2.105	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount	
2.106		CreditorReferenceInformation	<CdtrRefInf>	[0..1]		
2.107		CreditorReferenceType	<CdtrRefTp>	[0..1]		
2.108	{Or	Code	<Cd>	[1..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.109	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.110		Issuer	<Issr>	[0..1]	Text	
2.111		CreditorReference	<CdtrRef>	[0..1]	Text	
2.112		Invoicer	<Invcr>	[0..1]	+	
2.113		Invoicee	<Invcee>	[0..1]	+	
2.114		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text	

Message Items Description

*The following section identifies the elements of the **CustomerDirectDebitInitiationV01** message.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]
Definition: Set of characteristics shared by all individual transactions included in the message.
Type: *The **GroupHeader** block is composed of the following **GroupHeader1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	Text
1.4		BatchBooking	<BtchBookg>	[0..1]	Indicator
1.5		NumberOfTransactions	<NbOfTxs>	[1..1]	Text
1.6		ControlSum	<CtrlSum>	[0..1]	Quantity
1.7		Grouping	<Grpg>	[1..1]	Code
1.8		InitiatingParty	<InitgPty>	[1..1]	+
1.9		ForwardingAgent	<FwdgAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]
Definition: Point to point reference assigned by the instructing party and sent to the next party in the chain to unambiguously identify the message.

Usage: The instructing party has to make sure that 'MessageIdentification' is unique per instructed party for a pre-agreed period.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which a (group of) payment instruction(s) was created by the instructing party.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user key that allows to check if the initiating party is allowed to initiate transactions from the account specified in the initiation.

Usage: the content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios, payment initiations, payment returns or payment reversals that are initiated on behalf of a different party than the initiating party.

Data Type: Max128Text

Format: maxLength: 128
minLength: 1

1.4 BatchBooking <BtchBookg>

Presence: [0..1]

Definition: Identifies whether a single entry per individual transaction or a batch entry for the sum of the amounts of all transactions in the message is requested.

Data Type: *One of the following **BatchBookingIndicator** values must be used:*
MeaningWhenTrue: Identifies that a batch entry for the sum of the amounts of all transactions in the message is requested.
MeaningWhenFalse: Identifies that a single entry for each of the transactions in the message is requested.

1.5 NumberOfTransactions <NbOfTxs>

Presence: [1..1]

Definition: Number of individual transactions contained in the message.

Data Type: Max15NumericText

Format: [0-9]{1,15}

1.6 ControlSum <CtrlSum>

Presence: [0..1]

Definition: Total of all individual amounts included in the message, irrespective of currencies.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

1.7 Grouping <Grpg>

Presence: [1..1]

Definition: Indicates whether common accounting information in the transaction is included once for all transactions or repeated for each single transaction.

Data Type: Code

*One of the following **Grouping1Code** values must be used:*

Code	Name	Definition
GRPD	Grouped	Indicates that there is only one occurrence of the payment information block and several occurrences of the payment transaction block.
MIXD	Mixed	Indicates that there are one or several occurrences of the payment information block where each of the occurences might contain one or several occurrences of the payment transaction block.
SNGL	Single	Indicates that for each occurrences of the payment information block, exactly one occurrence of the payment transaction block is present.

1.8 InitiatingParty <InitgPty>

Presence: [1..1]

Definition: Party initiating the payment. In the payment context, this can either be the debtor (in a credit transfer), the creditor (in a direct debit), or the party that initiates the payment on behalf of the debtor or creditor.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

1.9 ForwardingAgent <FwdgAgt>

Presence: [0..1]

Definition: Financial institution that receives the instruction from the initiating party and forwards it to the next agent in the payment chain for execution.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.0 PaymentInformation <PmtInf>

Presence: [1..n]

Definition: Set of characteristics that apply to the credit side of the payment transactions included in the direct debit transaction initiation.

Type: *The **PaymentInformation** block is composed of the following **PaymentInstructionInformation2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		PaymentInformationIdentification	<PmtInfId>	[0..1]	Text
2.2		PaymentMethod	<PmtMtd>	[1..1]	Code
2.3		PaymentTypeInformation	<PmtTpInf>	[0..1]	
2.14		RequestedCollectionDate	<ReqdColltnDt>	[1..1]	DateTime
2.15		Creditor	<Cdtr>	[1..1]	+
2.16		CreditorAccount	<CdtrAcct>	[1..1]	+
2.17		CreditorAgent	<CdtrAgt>	[1..1]	+
2.18		CreditorAgentAccount	<CdtrAgtAcct>	[0..1]	+
2.19		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.20		ChargeBearer	<ChrgBr>	[0..1]	Code
2.21		ChargesAccount	<ChrgsAcct>	[0..1]	+
2.22		ChargesAccountAgent	<ChrgsAcctAgt>	[0..1]	+
2.23		DirectDebitTransactionInformation	<DrctDbtTxInf>	[1..n]	

Rule(s): ChargeBearerRule
If ChargeBearer is present, then DirectDebitTransactionInformation/ChargeBearer is not allowed.
If DirectDebitTransactionInformation/ChargeBearer is present, then ChargeBearer is not allowed.
DirectDebitTransactionInformation/ChargeBearer and ChargeBearer may both be absent.

ChargesAccountAgentRule
If ChargesAccountAgent is present, it must contain a branch of the CreditorAgent. It must not contain a completely different financial institution.

ChargesAccountRule
If ChargesAccountAgent is present, then ChargesAccount must be present.

PaymentTypeInformationRule
If PaymentTypeInformation is present, then DirectDebitTransactionInformation/PaymentTypeInformation is not allowed.

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

2.1 PaymentInformationIdentification <PmtInfId>

Presence: [0..1]

Definition: Reference assigned by a sending party to unambiguously identify the payment information block within the message.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.2 PaymentMethod <PmtMtd>

Presence: [1..1]
Definition: Specifies the means of payment that will be used to move the amount of money.
Data Type: Code
*One of the following **PaymentMethod2Code** values must be used:*

Code	Name	Definition
DD	DirectDebit	Collection of an amount of money from the debtor's bank account by the creditor. The amount of money and dates of collections may vary.

2.3 PaymentTypeInformation <PmtTpInf>

Presence: [0..1]
Definition: Set of elements that further specifies the type of transaction.
Type: *This message item is composed of the following **PaymentTypeInformation2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.4		InstructionPriority	<InstrPrty>	[0..1]	Code
2.5	{Or	ServiceLevel	<SvcLvl>	[0..1]	
2.8	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code
2.9		LocalInstrument	<LclInstrm>	[0..1]	
2.12		SequenceType	<SeqTp>	[0..1]	Code
2.13		CategoryPurpose	<CtgyPurp>	[0..1]	Code

2.4 InstructionPriority <InstrPrty>

Presence: [0..1]
Definition: Indicator of the urgency or order of importance that the instructing party would like the instructed party to apply to the processing of the instruction.
Data Type: Code
*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.5 ServiceLevel <SvcLvl>

Presence: [0..1]
*This message item is part of choice **2.3** PaymentTypeInformation.*
Definition: Agreement under which or rules under which the transaction should be processed.
Type: *This message item is composed of one of the following **ServiceLevel3Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.6	{Or	Code	<Cd>	[1..1]	Code
2.7	Or}	Proprietary	<Prtry>	[1..1]	Text

2.6 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.5** ServiceLevel.*
Definition: Identification of a pre-agreed level of service between the parties in a coded form.
Data Type: Code
*One of the following **ServiceLevel2Code** values must be used:*

Code	Name	Definition
SDVA	SameDayValue	Payment must be executed with same day value to the creditor.
SEPA	SingleEuroPaymentsArea	Payment must be executed following the Single Euro Payments Area scheme.

2.7 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.5** ServiceLevel.*
Definition: Proprietary identification of a pre-agreed level of service between the parties.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.8 ClearingChannel <ClrChanl>

Presence: [0..1]
*This message item is part of choice **2.3** PaymentTypeInformation.*
Definition: Specifies the clearing channel to be used for the instruction.
Data Type: Code
*When this message item is present, one of the following **ClearingChannel2Code** values must be used:*

Code	Name	Definition
BOOK	BookTransfer	Payment through internal book transfer.
MPNS	MassPaymentNetSystem	Clearing channel is a mass payment net settlement system.
RTGS	RealTimeGrossSettlementSystem	Clearing channel is a real-time gross settlement system.
RTNS	RealTimeNetSettlementSystem	Clearing channel is a real-time net settlement system.

2.9 LocalInstrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.

Usage : When available, codes provided by local authorities should be used.

Type: *This message item is composed of one of the following **LocalInstrument1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.10	{Or	Code	<Cd>	[1..1]	Code
2.11	Or}	Proprietary	<Prtry>	[1..1]	Text

2.10 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.9** LocalInstrument.*

Definition: Specifies the local instrument published in an external local instrument code list.

Data Type: ExternalLocalInstrumentCode

Format: maxLength: 35
minLength: 1

2.11 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.9** LocalInstrument.*

Definition: Specifies the local instrument as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.12 SequenceType <SeqTp>

Presence: [0..1]

Definition: Identifies the direct debit sequence, eg, first, recurrent, final or one-off.

Data Type: Code

*When this message item is present, one of the following **SequenceType1Code** values must be used:*

Code	Name	Definition
FNAL	Final	Final collection of a series of direct debit instructions.
FRST	First	First collection of a series of direct debit instructions.
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

2.13 CategoryPurpose <CtgyPurp>

Presence: [0..1]

Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.

Data Type: Code

*When this message item is present, one of the following **PaymentCategoryPurpose1Code** values must be used:*

Code	Name	Definition
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CORT	TradeSettlementPayment	Transaction is related to settlement of a trade, eg a foreign exchange deal or a securities transaction.
DIVI	Dividend	Transaction is the payment of dividends.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to the payment of a hedging operation.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is the payment of interest.
LOAN	Loan	Transaction is related to the transfer of a loan to a borrower.
PENS	PensionPayment	Transaction is the payment of pension.
SALA	SalaryPayment	Transaction is the payment of salaries.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes.
TRAD	Trade	Transaction is related to the payment of a trade transaction.
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.
WHLD	WithHolding	Transaction is the payment of withholding tax.

2.14 RequestedCollectionDate <ReqdColltnDt>

Presence: [1..1]

Definition: Date at which the creditor requests the amount of money to be collected from the debtor.

Data Type: ISODate

2.15 Creditor <Cdtr>

Presence: [1..1]

Definition: Party to which an amount of money is due.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.16 CreditorAccount <CdtrAcct>

Presence: [1..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.17 CreditorAgent <CdtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the creditor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.18 CreditorAgentAccount <CdtrAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor agent at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.19 UltimateCreditor <UltmtCdtr>

Presence: [0..1]
Definition: Ultimate party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.20 ChargeBearer <ChrgBr>

Presence: [0..1]
Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.
Data Type: Code
*When this message item is present, one of the following **ChargeBearerType1Code** values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.21 ChargesAccount <ChrgsAcct>

Presence: [0..1]
Definition: Account used to process charges associated with a transaction.

Usage : charges account should be used when charges have to be booked to an account different from the account identified in debtor's account.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.22 ChargesAccountAgent <ChrgsAcctAgt>

Presence: [0..1]

Definition: Agent that services a charges account.

Usage : charges account agent should only be used when the charges account agent is different from the creditor agent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.23 DirectDebitTransactionInformation <DrctDbtTxInf>

Presence: [1..n]

Definition: Set of elements providing information specific to the individual transaction(s) included in the message.

Type: *This message item is composed of the following **DirectDebitTransactionInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.24		PaymentIdentification	<PmtId>	[1..1]	
2.27		PaymentTypeInformation	<PmtTpInf>	[0..1]	
2.38		InstructedAmount	<InstdAmt>	[1..1]	Amount
2.39		ChargeBearer	<ChrgBr>	[0..1]	Code
2.40		DirectDebitTransaction	<DrctDbtTx>	[0..1]	
2.63		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.64		DebtorAgent	<DbtrAgt>	[1..1]	+
2.65		DebtorAgentAccount	<DbtrAgtAcct>	[0..1]	+
2.66		Debtor	<Dbtr>	[1..1]	+
2.67		DebtorAccount	<DbtrAcct>	[1..1]	+
2.68		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.69		InstructionForCreditorAgent	<InstrForCdtrAgt>	[0..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.70		Purpose	<Purp>	[0..1]	
2.73		RegulatoryReporting	<RgltryRptg>	[0..10]	
2.82		Tax	<Tax>	[0..1]	+
2.83		RelatedRemittanceInformation	<RltdRmtInf>	[0..10]	
2.90		RemittanceInformation	<RmtInf>	[0..1]	

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.24 PaymentIdentification <PmtId>

Presence: [1..1]
Definition: Set of elements to reference a payment instruction.
Type: *This message item is composed of the following **PaymentIdentification1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.25		InstructionIdentification	<InstrId>	[0..1]	Text
2.26		EndToEndIdentification	<EndToEndId>	[1..1]	Text

2.25 InstructionIdentification <InstrId>

Presence: [0..1]
Definition: Unique identification as assigned by an instructing party for an instructed party to unambiguously identify the instruction.

Usage: the instruction identification is a point to point reference that can be used between the instructing party and the instructed party to refer to the individual instruction. It can be included in several messages related to the instruction.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.26 EndToEndIdentification <EndToEndId>

Presence: [1..1]
Definition: Unique identification assigned by the initiating party to unumbiguously identify the transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain.

Usage: The end-to-end identification can be used for reconciliation or to link tasks relating to the transaction. It can be included in several messages related to the transaction.
Data Type: Max35Text
Format: maxLength: 35

minLength: 1

2.27 PaymentTypeInformation <PmtTpInf>

Presence: [0..1]
Definition: Set of elements that further specifies the type of transaction.
Type: *This message item is composed of the following **PaymentTypeInformation2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.28		InstructionPriority	<InstrPrty>	[0..1]	Code
2.29	{Or	ServiceLevel	<SvcLvl>	[0..1]	
2.32	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code
2.33		LocalInstrument	<LclInstrm>	[0..1]	
2.36		SequenceType	<SeqTp>	[0..1]	Code
2.37		CategoryPurpose	<CtgyPurp>	[0..1]	Code

2.28 InstructionPriority <InstrPrty>

Presence: [0..1]
Definition: Indicator of the urgency or order of importance that the instructing party would like the instructed party to apply to the processing of the instruction.
Data Type: Code
*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

2.29 ServiceLevel <SvcLvl>

Presence: [0..1]
*This message item is part of choice **2.27** PaymentTypeInformation.*
Definition: Agreement under which or rules under which the transaction should be processed.
Type: *This message item is composed of one of the following **ServiceLevel3Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.30	{Or	Code	<Cd>	[1..1]	Code
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text

2.30 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.29** ServiceLevel.*
Definition: Identification of a pre-agreed level of service between the parties in a coded form.
Data Type: Code

*One of the following **ServiceLevel2Code** values must be used:*

Code	Name	Definition
SDVA	SameDayValue	Payment must be executed with same day value to the creditor.
SEPA	SingleEuroPaymentsArea	Payment must be executed following the Single Euro Payments Area scheme.

2.31 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.29** ServiceLevel.*
Definition: Proprietary identification of a pre-agreed level of service between the parties.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.32 ClearingChannel <ClrChanl>

Presence: [0..1]
*This message item is part of choice **2.27** PaymentTypeInformation.*
Definition: Specifies the clearing channel to be used for the instruction.
Data Type: Code
*When this message item is present, one of the following **ClearingChannel2Code** values must be used:*

Code	Name	Definition
BOOK	BookTransfer	Payment through internal book transfer.
MPNS	MassPaymentNetSystem	Clearing channel is a mass payment net settlement system.
RTGS	RealTimeGrossSettlementSystem	Clearing channel is a real-time gross settlement system.
RTNS	RealTimeNetSettlementSystem	Clearing channel is a real-time net settlement system.

2.33 LocalInstrument <LclInstrm>

Presence: [0..1]
Definition: User community specific instrument.

Usage : When available, codes provided by local authorities should be used.

Type: *This message item is composed of one of the following **LocalInstrument1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.34	{Or	Code	<Cd>	[1..1]	Code
2.35	Or}	Proprietary	<Prtry>	[1..1]	Text

2.34 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.33** LocalInstrument.*
Definition: Specifies the local instrument published in an external local instrument code list.
Data Type: ExternalLocalInstrumentCode
Format: maxLength: 35
minLength: 1

2.35 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.33** LocalInstrument.*
Definition: Specifies the local instrument as a proprietary code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.36 SequenceType <SeqTp>

Presence: [0..1]
Definition: Identifies the direct debit sequence, eg, first, recurrent, final or one-off.
Data Type: Code
*When this message item is present, one of the following **SequenceType1Code** values must be used:*

Code	Name	Definition
FNAL	Final	Final collection of a series of direct debit instructions.
FRST	First	First collection of a series of direct debit instructions.
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

2.37 CategoryPurpose <CtgyPurp>

Presence: [0..1]
Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.
Data Type: Code
*When this message item is present, one of the following **PaymentCategoryPurpose1Code** values must be used:*

Code	Name	Definition
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CORT	TradeSettlementPayment	Transaction is related to settlement of a trade, eg a foreign exchange deal or a securities transaction.
DIVI	Dividend	Transaction is the payment of dividends.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.

Code	Name	Definition
HEDG	Hedging	Transaction is related to the payment of a hedging operation.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is the payment of interest.
LOAN	Loan	Transaction is related to the transfer of a loan to a borrower.
PENS	PensionPayment	Transaction is the payment of pension.
SALA	SalaryPayment	Transaction is the payment of salaries.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes.
TRAD	Trade	Transaction is related to the payment of a trade transaction.
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.
WHLD	WithHolding	Transaction is the payment of withholding tax.

2.38 InstructedAmount <InstdAmt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.39 ChargeBearer <ChrgBr>

Presence: [0..1]

Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.

Data Type: Code

When this message item is present, one of the following ***ChargeBearerType1Code*** *values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.

Code	Name	Definition
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

2.40 DirectDebitTransaction <DrctDbtTx>

Presence: [0..1]

Definition: Set of elements providing information specific to the direct debit mandate.

Type: *This message item is composed of the following **DirectDebitTransaction1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.41		MandateRelatedInformation	<MndtRltdInf>	[0..1]	
2.60		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
2.61		PreNotificationIdentification	<PreNtfctnId>	[0..1]	Text
2.62		PreNotificationDate	<PreNtfctnDt>	[0..1]	DateTime

2.41 MandateRelatedInformation <MndtRltdInf>

Presence: [0..1]

Definition: Set of elements used to provide further details related to a direct debit mandate signed between the creditor and the debtor.

Usage: Mandate related information is to be used only when the direct debit relates to a mandate signed between the debtor and the creditor.

Type: *This message item is composed of the following **MandateRelatedInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.42		MandateIdentification	<MndtId>	[0..1]	Text
2.43		DateOfSignature	<DtOfSgntr>	[0..1]	DateTime
2.44		AmendmentIndicator	<AmdmntInd>	[0..1]	Indicator
2.45		AmendmentInformationDetails	<AmdmntInfDtls>	[0..1]	
2.56		ElectronicSignature	<ElctrncSgntr>	[0..1]	Text
2.57		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
2.58		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime
2.59		Frequency	<Frqcy>	[0..1]	Code

Rule(s): AmendmentIndicatorRule

If AmendmentIndicator is true, then AmendementInformationDetails must be present, with amended mandate information.

If AmendmentIndicator is false, then AmendmentInformationDetails is not allowed.

2.42 MandateIdentification <MndtId>

Presence: [0..1]
Definition: Reference of the direct debit mandate that has been signed between by the debtor and the creditor.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.43 DateOfSignature <DtOfSgntr>

Presence: [0..1]
Definition: Date on which the direct debit mandate has been signed by the debtor.
Data Type: ISODate

2.44 AmendmentIndicator <AmdmntInd>

Presence: [0..1]
Definition: Indicator notifying whether the underlying mandate is amended or not.
Data Type: *One of the following **TrueFalseIndicator** values must be used:*
MeaningWhenTrue: True
MeaningWhenFalse: False

2.45 AmendmentInformationDetails <AmdmntInfDtls>

Presence: [0..1]
Definition: List of direct debit mandate elements that have been modified.
Type: *This message item is composed of the following **AmendmentInformationDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.46		OriginalMandateIdentification	<OrgnlMndtId>	[0..1]	Text
2.47		OriginalCreditorSchemeIdentification	<OrgnlCdtrSchmeId>	[0..1]	+
2.48		OriginalCreditorAgent	<OrgnlCdtrAgt>	[0..1]	+
2.49		OriginalCreditorAgentAccount	<OrgnlCdtrAgtAcct>	[0..1]	+
2.50		OriginalDebtor	<OrgnlDbtr>	[0..1]	+
2.51		OriginalDebtorAccount	<OrgnlDbtrAcct>	[0..1]	+
2.52		OriginalDebtorAgent	<OrgnlDbtrAgt>	[0..1]	+
2.53		OriginalDebtorAgentAccount	<OrgnlDbtrAgtAcct>	[0..1]	+
2.54		OriginalFinalCollectionDate	<OrgnlFnlColltnDt>	[0..1]	DateTime
2.55		OriginalFrequency	<OrgnlFrqcy>	[0..1]	Code

2.46 OriginalMandateIdentification <OrgnlMndtId>

Presence: [0..1]

Definition: Original mandate identification that has been modified.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.47 OriginalCreditorSchemeIdentification <OrgnlCdtrSchmeId>

Presence: [0..1]
Definition: Original creditor scheme identification that has been modified.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.48 OriginalCreditorAgent <OrgnlCdtrAgt>

Presence: [0..1]
Definition: Original creditor agent that has been modified.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.49 OriginalCreditorAgentAccount <OrgnlCdtrAgtAcct>

Presence: [0..1]
Definition: Original creditor agent acount that has been modified.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.50 OriginalDebtor <OrgnlDbtr>

Presence: [0..1]
Definition: Original debtor that has been modified.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.51 OriginalDebtorAccount <OrgnlDbtrAcct>

Presence: [0..1]
Definition: Original debtor account that has been modified.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.52 OriginalDebtorAgent <OrgnlDbtrAgt>

Presence: [0..1]
Definition: Original debtor's agent that has been modified.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.53 OriginalDebtorAgentAccount <OrgnlDbtrAgtAcct>

Presence: [0..1]
Definition: Original debtor agent account that has been modified.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.54 OriginalFinalCollectionDate <OrgnlFnlColltnDt>

Presence: [0..1]
Definition: Original final collection date that has been modified.
Data Type: ISODate

2.55 OriginalFrequency <OrgnlFrqcy>

Presence: [0..1]
Definition: Original frequency that has been modified.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

2.56 ElectronicSignature <ElctrncSgntr>

Presence: [0..1]
Definition: Additional security provisions, eg, digital signature as provided by the debtor.
Data Type: Max1025Text
Format: maxLength: 1025
minLength: 1

2.57 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.
Data Type: ISODate

2.58 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.
Data Type: ISODate

2.59 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which direct debit instructions are to be created and processed, eg, daily, weekly, monthly.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

2.60 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]
Definition: Credit party that signs the direct debit mandate.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.61 PreNotificationIdentification <PreNtfctnId>

Presence: [0..1]
Definition: Unique and unambiguous identification of the pre-notification which is sent separately from the direct debit instruction.

Usage: the direct debit pre-notification is used to reconcile separately sent collection information with the direct debit transaction information.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.62 PreNotificationDate <PreNtfctnDt>

Presence: [0..1]

Definition: Date on which the creditor notifies the debtor about the amount and date on which the direct debit instruction will be presented to the debtor's agent.

Data Type: ISODate

2.63 UltimateCreditor <UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.64 DebtorAgent <DbtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the debtor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.65 DebtorAgentAccount <DbtrAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor agent at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.66 Debtor <Dbtr>

Presence: [1..1]
Definition: Party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.67 DebtorAccount <DbtrAcct>

Presence: [1..1]
Definition: Identification of the account of the debtor to which a debit entry will be made to execute the transfer.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

2.68 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.69 InstructionForCreditorAgent <InstrForCdtrAgt>

Presence: [0..1]

Definition: Further information, related to the processing of the payment instruction, that may need to be acted upon by the creditor agent, depending on agreement between creditor and the creditor agent.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

2.70 Purpose <Purp>

Presence: [0..1]

Definition: Underlying reason for the payment transaction, eg, a charity payment, or a commercial agreement between the creditor and the debtor.

Usage: purpose is used by the end-customers, ie originating party, initiating party, debtor, creditor, final party, to provide information concerning the nature of the payment transaction. Purpose is a content element, which is not used for processing by any of the agents involved in the payment chain.

Type: *This message item is composed of one of the following **Purpose1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.71	{Or	Code	<Cd>	[1..1]	Code
2.72	Or}	Proprietary	<Prtry>	[1..1]	Text

2.71 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.70** Purpose.*

Definition: Specifies the underlying reason for the payment transaction, as published in an external purpose code list.

Data Type: ExternalPurposeCode

Format: maxLength: 35
minLength: 1

2.72 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.70** Purpose.*

Definition: User community specific purpose.

Usage: When available, codes provided by local communities should be used.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.73 RegulatoryReporting <RgltryRptg>

Presence: [0..10]
Definition: Information needed due to regulatory and statutory requirements.
Type: *This message item is composed of the following **RegulatoryReporting2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.74		DebitCreditReportingIndicator	<DbtCdtRptgInd>	[0..1]	Code
2.75		Authority	<Authrty>	[0..1]	
2.78		RegulatoryDetails	<RgltryDtls>	[0..1]	

2.74 DebitCreditReportingIndicator <DbtCdtRptgInd>

Presence: [0..1]
Definition: Identifies whether the regulatory reporting information applies to the debit side, to the credit side or to both debit and credit sides of the transaction.
Data Type: Code
*When this message item is present, one of the following **RegulatoryReportingType1Code** values must be used:*

Code	Name	Definition
BOTH	Both	Regulatory information applies to both credit and debit sides.
CRED	Credit	Regulatory information applies to the credit side.
DEBT	Debit	Regulatory information applies to the debit side.

2.75 Authority <Authrty>

Presence: [0..1]
Definition: Entity requiring the regulatory reporting information.
Type: *This message item is composed of the following **RegulatoryAuthority** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.76		AuthorityName	<AuthrtyNm>	[0..1]	Text
2.77		AuthorityCountry	<AuthrtyCtry>	[0..1]	Code

2.76 AuthorityName <AuthrtyNm>

Presence: [0..1]
Definition: Name of the entity requiring the regulatory reporting information.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.77 AuthorityCountry <AuthrtyCtry>

Presence: [0..1]

Definition: Country of the entity requiring the regulatory reporting information.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

2.78 RegulatoryDetails <RgltryDtls>

Presence: [0..1]

Definition: Details related to the regulatory reporting information.

Type: *This message item is composed of the following **StructuredRegulatoryReporting2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.79		Code	<Cd>	[0..1]	Text
2.80		Amount	<Amt>	[0..1]	Amount
2.81		Information	<Inf>	[0..1]	Text

2.79 Code <Cd>

Presence: [0..1]

Definition: Specifies the nature, purpose, and reason for the transaction to be reported for regulatory and statutory requirements in a coded form.

Data Type: Max3Text

Format: maxLength: 3
minLength: 1

2.80 Amount <Amt>

Presence: [0..1]

Definition: Amount of money to be reported for regulatory and statutory requirements.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.81 Information <Inf>

Presence: [0..1]

Definition: Additional details that cater for specific domestic regulatory requirements.

Usage: Information is used to provide details that are not catered for in the Code or/and Amount elements.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.82 Tax <Tax>

Presence: [0..1]

Definition: Amount of money due to the government or tax authority, according to various pre-defined parameters such as thresholds or income.

Type: *This message item is composed of the following **TaxInformation2** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	CreditorTaxIdentification	<CdtrTaxId>	[0..1]	Text
	CreditorTaxType	<CdtrTaxTp>	[0..1]	Text
	DebtorTaxIdentification	<DbtrTaxId>	[0..1]	Text
	TaxReferenceNumber	<TaxRefNb>	[0..1]	Text
	TotalTaxableBaseAmount	<TtlTaxblBaseAmt>	[0..1]	Amount
	TotalTaxAmount	<TtlTaxAmt>	[0..1]	Amount
	TaxDate	<TaxDt>	[0..1]	DateTime
	TaxTypeInformation	<TaxTpInf>	[0..n]	

For additional Type information, please refer to TaxInformation2 p.353 in 'Message Item Types' section

2.83 RelatedRemittanceInformation <RltdRmtInf>

Presence: [0..10]

Definition: Information related to the handling of the remittance information by any of the agents in the transaction processing chain.

Type: *This message item is composed of the following **RemittanceLocation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.84		RemittanceIdentification	<RmtId>	[0..1]	Text
2.85		RemittanceLocationMethod	<RmtLctnMtd>	[0..1]	Code
2.86		RemittanceLocationElectronicAddress	<RmtLctnElctrncAdr>	[0..1]	Text
2.87		RemittanceLocationPostalAddress	<RmtLctnPstlAdr>	[0..1]	

2.84 RemittanceIdentification <RmtId>

Presence: [0..1]

Definition: Unique and unambiguous identification of the remittance information, e.g. a remittance advice, which is sent separately from the payment instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.85 RemittanceLocationMethod <RmtLctnMtd>

Presence: [0..1]
Definition: Specifies the method used to deliver the remittance advice information.
Data Type: Code
*When this message item is present, one of the following **RemittanceLocationMethod1Code** values must be used:*

Code	Name	Definition
EDIC	ElectronicDataInterchange	Remittance advice information must be sent through Electronic Data Interchange (EDI).
EMAL	EMail	Remittance advice information must be sent through e-mail.
FAXI	Fax	Remittance advice information must be faxed.
POST	Post	Remittance advice information must be sent through postal services.
URID	UniformResourceIdentifier	Remittance advice information needs to be sent to a Uniform Resource Identifier (URI). URI is a compact string of characters that uniquely identify an abstract or physical resource. URI's are the super-set of identifiers, such as URLs, email addresses, ftp sites, etc, and as such, provide the syntax for all of the identification schemes.

2.86 RemittanceLocationElectronicAddress <RmtLctnElctrncAdr>

Presence: [0..1]
Definition: Electronic address to which an agent is to send the remittance information.
Data Type: Max256Text
Format: maxLength: 256
minLength: 1

2.87 RemittanceLocationPostalAddress <RmtLctnPstlAdr>

Presence: [0..1]
Definition: Postal address to which an agent is to send the remittance information.
Type: *This message item is composed of the following **NameAndAddress3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.88		Name	<Nm>	[1..1]	Text
2.89		Address	<Adr>	[1..1]	+

2.88 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and is usually used to identify that identity.
Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.89 Address <Adr>

Presence: [1..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	AddressType	<AdrTp>	[0..1]	Code
	AddressLine	<AdrLine>	[0..5]	Text
	StreetName	<StrtNm>	[0..1]	Text
	BuildingNumber	<BldgNb>	[0..1]	Text
	PostCode	<PstCd>	[0..1]	Text
	TownName	<TwnNm>	[0..1]	Text
	CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
	Country	<Ctry>	[1..1]	Code

For additional Type information, please refer to PostalAddress1 p.351 in 'Message Item Types' section

2.90 RemittanceInformation <RmtInf>

Presence: [0..1]
Definition: Information that enables the matching, ie, reconciliation, of a payment with the items that the payment is intended to settle, eg, commercial invoices in an account receivable system.
Type: *This message item is composed of the following **RemittanceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.91		Unstructured	<Ustrd>	[0..n]	Text
2.92		Structured	<Strd>	[0..n]	

2.91 Unstructured <Ustrd>

Presence: [0..n]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in an unstructured form.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

2.92 Structured <Strd>

Presence: [0..n]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in a structured form.

Type: *This message item is composed of the following* ***StructuredRemittanceInformation6*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.93		ReferredDocumentInformation	<RfrdDocInf>	[0..1]	
2.99		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime
2.100		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]	
2.106		CreditorReferenceInformation	<CdtrRefInf>	[0..1]	
2.112		Invoicer	<Invcr>	[0..1]	+
2.113		Invoicee	<Invcee>	[0..1]	+
2.114		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text

2.93 ReferredDocumentInformation <RfrdDocInf>

Presence: [0..1]
Definition: Reference information to allow the identification of the underlying reference documents.
Type: *This message item is composed of the following* ***ReferredDocumentInformation1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.94		ReferredDocumentType	<RfrdDocTp>	[0..1]	
2.98		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text

2.94 ReferredDocumentType <RfrdDocTp>

Presence: [0..1]
Definition: Provides the type of the referred document.
Type: *This message item is composed of the following* ***ReferredDocumentType1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.95	{Or	Code	<Cd>	[1..1]	Code
2.96	Or}	Proprietary	<Prtry>	[1..1]	Text
2.97		Issuer	<Issr>	[0..1]	Text

2.95 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.94*** *ReferredDocumentType.*
Definition: Document type in a coded form.
Data Type: Code
One of the following ***DocumentType2Code*** *values must be used:*

Code	Name	Definition
CINV	CommercialInvoice	Document is an invoice.

Code	Name	Definition
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.

2.96 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.94** ReferredDocumentType.*

Definition: Proprietary identification of the type of the remittance document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.97 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the reference document type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.98 ReferredDocumentNumber <RfrdDocNb>

Presence: [0..1]

Definition: Unique and unambiguous identification number of the referred document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.99 ReferredDocumentRelatedDate <RfrdDocRltdDt>

Presence: [0..1]

Definition: Date associated with the referred document, eg, date of issue.

Data Type: ISODate

2.100 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..n]

Definition: Amount of money and currency of a document referred to in the remittance section. The amount is typically either the original amount due and payable, or the amount actually remitted for the referred document.

Type: *This message item is composed of one of the following **ReferredDocumentAmount1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.101	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount
2.102	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount
2.103	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount
2.104	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount
2.105	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount

2.101 DuePayableAmount <DuePyblAmt>

Presence: [1..1]

*This message item is part of choice **2.100** ReferredDocumentAmount.*

Definition: Amount specified is the exact amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.102 DiscountAppliedAmount <DscntApldAmt>

Presence: [1..1]

*This message item is part of choice **2.100** ReferredDocumentAmount.*

Definition: Amount of money resulting from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.103 RemittedAmount <RmtdAmt>

Presence: [1..1]

*This message item is part of choice **2.100** ReferredDocumentAmount.*

Definition: Amount of money remitted for the referred document.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.104 CreditNoteAmount <CdtNoteAmt>

Presence: [1..1]

*This message item is part of choice **2.100** ReferredDocumentAmount.*

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.105 TaxAmount <TaxAmt>

Presence: [1..1]

*This message item is part of choice **2.100** ReferredDocumentAmount.*

Definition: Quantity of cash resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

2.106 CreditorReferenceInformation <CdtrRefInf>

Presence: [0..1]
Definition: Reference information provided by the creditor to allow the identification of the underlying documents.
Type: *This message item is composed of the following* ***CreditorReferenceInformation1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.107		CreditorReferenceType	<CdtrRefTp>	[0..1]	
2.111		CreditorReference	<CdtrRef>	[0..1]	Text

2.107 CreditorReferenceType <CdtrRefTp>

Presence: [0..1]
Definition: Provides the type of the creditor reference.
Type: *This message item is composed of the following* ***CreditorReferenceType1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.108	{Or	Code	<Cd>	[1..1]	Code
2.109	Or}	Proprietary	<Prtry>	[1..1]	Text
2.110		Issuer	<Issr>	[0..1]	Text

2.108 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.107*** *CreditorReferenceType.*
Definition: Coded creditor reference type.
Data Type: Code
One of the following ***DocumentType3Code*** *values must be used:*

Code	Name	Definition
DISP	DispatchAdvice	Document is a dispatch advice.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
PUOR	PurchaseOrder	Document is a purchase order.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SCOR	StructuredCommunicationReference	Document is a structured communication reference provided by the creditor to identify the referred transaction.

2.109 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.107** CreditorReferenceType.*
Definition: Creditor reference type not avilable in a coded format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.110 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the credit reference type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.111 CreditorReference <CdtrRef>

Presence: [0..1]
Definition: Unique and unambiguous reference assigned by the creditor to refer to the payment transaction.

Usage: if available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the cash.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.112 Invoicer <Invcr>

Presence: [0..1]
Definition: Identification of the organization issuing the invoice when different than the creditor or final party.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.113 Invoicee <Invcee>

Presence: [0..1]

Definition: Identification of the party to whom an invoice is issued, when different than the originator or debtor.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.114 AdditionalRemittanceInformation <AddtlRmtInf>

Presence: [0..1]

Definition: Additional information, in free text form, to complement the structured remittance information.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

Business Example 1

Narrative

On 27 June 2006, Virgay insurance company sends a CustomerDirectDebitInitiation message to its account servicer, AAAAUS29. AAAAUS29 offers a special service to Virgay, under agreement VERPA-1.
The direct debit initiation message contains two collection instructions from two different debtors.
The first direct debit instruction is for 1025 USD to be collected from account 123456, owned by debtor Jones and serviced by agent BBBBUS39. The mandate reference is VIRGAY123 and was signed by Jones on 15 June 2005. The last collection is due to take place on 15 June 2015. The payment is for a yearly life insurance fee.
The second direct debit instruction is for 985 USD to be collected from account 789101, owned by debtor Lee and serviced by agent CCCCUS27. This is a one/off direct debit which has been notified to Lee on 7 June 2006, with reference VIRGAY2435/2006. The payment is for a car insurance premium.
The requested collection date for both collections is 3 July 2006 and charges related to the handling of the instruction will be shared between Virgay insurance company and the debtors.
Virgay company would like to have 2 entries on its account 789123 and does not wish to use the grouping facility.

Business Description

CustomerDirectDebitInitiation from Virgay to AAAAUS29 :

Element	***<XMLTag>***	***Content***
Group Header	<GrpHdr>	
MessageIdentification	<MsgId>	CAVAY1234
CreationDateTime	<CreDtTm>	2006-06-27T14:25:00
Batchbooking	<BtchBookg>	false
NumberOfTransactions	<NbOfTxs>	2
ControlSum	<CtrlSum>	2010.00
Grouping	<Grpg>	SNGL

InitiatingParty	<InitgPty>	
Name	<Nm>	Virgay
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Virginia Lane
BuildingNumber	<BldgNb>	36
PostCode	<PstCd>	NJ 07311
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
PaymentInformation	<PmtInf>	
PaymentMethod	<PmtMtd>	DD
RequestedCollectionDate	<ReqColltnDt>	2006-07-03
Creditor	<Cdtr>	
Name	<Nm>	Virgay
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Virginia Lane
BuildingNumber	<BldgNb>	36
PostCode	<PstCd>	NJ 07311
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct	
Identification	<Id>	789123
CreditorAgent	<CdtrAgt>	AAAAUS29
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAAUS29
DirectDebitTransactionInformation	<DrctDbtTxInf>	
PaymentIdentification	<PmtId>	
EndToEndIdentification	<EndToEndId>	VA060327/0123
PaymentTypeInformation	<PmtTpInf>	
InstructionPriority	<InstrPrty>	NORM
ServiceLevel	<SvcLvl>	
Proprietary	<Prtry>	VERPA-1
SequenceType	<SeqTp>	RCUR
InstructedAmount	<InstdAmtCcy=USD>	1025.00
ChargeBearer	<ChrBr>	SHAR
DirectDebitTransaction	<DrctDbtTx>	

MandateRelatedInformation	<MndtRltInf>	
MandateIdentification	<MndtId>	VIRGAY123
DateOfSignature	<DtOfSgntr>	2005-06-15
FinalCollectionDate	<FnlColltnDt>	2015-06-09
Frequency	<Frqcy>	YEAR
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBUS39
Debtor	<Dbtr>	
Name	<Nm>	Jones
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Hudston Street
BuildingNumber	<BldgNb>	19
PostCode	<PstCd>	NJ 07302
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	
Identification	<Id>	123456
Purpose	<Purp>	
Code	<Cd>	LIFI
RemittanceInformation	<RmtInf>	
Unstructured	<Ustrd>	LIFE INSURANCE PAYMENT/ JULY 2006
PaymentInformation	<PmtInf>	
PaymentMethod	<PmtMtd>	DD
RequestedCollectionDate	<ReqColltnDt>	2006-07-03
Creditor	<Cdtr>	
Name	<Nm>	Virgay
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Virginia Lane
BuildingNumber	<BldgNb>	36
PostCode	<PstCd>	NJ 07311
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
CreditorAccount	<CdtrAcct>	

Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	
Identification	<Id>	789123
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAAUS29
DirectDebitTransactionInformation	<DrctDbtTxInf>	
PaymentIdentification	<PmtId>	
EndToEndIdentification	<EndToEndId>	AY060327/456
PaymentTypeInformation	<PmtTpInf>	
InstructionPriority	<InstrPrty>	NORM
ServiceLevel	<SvcLvl>	
Proprietary	<Prtry>	VERPA-1
SequenceType	<SeqTp>	OOFF
InstructedAmount	<InstdAmtCcy=USD>	985.00
ChargeBearer	<ChrBr>	SHAR
DirectDebitTransaction	<DrctDbtTx>	
PreNotificationIdentification	<PreNtfctnId>	VIRGAY2435/2006
PreNotificationDate	<PreNtfctnDt>	2006-06-07
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	CCCCUS27
Debtor	<Dbtr>	
Name	<Nm>	Lee
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Cross Road
BuildingNumber	<BldgNb>	45
PostCode	<PstCd>	NJ 07399
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	
Identification	<Id>	789101
Purpose	<Purp>	
Code	<Cd>	
RemittanceInformation	<RmtInf>	

Unstructured	<Ustrd>	CAR INSURANCE PREMIUM

XML Instance


```
<pain.008.001.01>
  <GrpHdr>
    <MsgId>CAVAY1234</MsgId>
    <CreDtTm>2006-06-27T14:25:00</CreDtTm>
    <BtchBookg>false</BtchBookg>
    <NbOfTxs>2</NbOfTxs>
    <CtrlSum>2010.00</CtrlSum>
    <Grpg>SNGL</Grpg>
    <InitgPty>
      <Nm>Virgay</Nm>
      <PstlAdr>
        <StrtNm>Virginia Lane</StrtNm>
        <BldgNb>36</BldgNb>
        <PstCd>NJ 07311</PstCd>
        <TwnNm>Jersey City</TwnNm>
        <Ctry>US</Ctry>
      </PstlAdr>
    </InitgPty>
  </GrpHdr>
  <PmtInf>
    <PmtMtd>DD</PmtMtd>
    <ReqdColltnDt>2006-07-03</ReqdColltnDt>
    <Cdtr>
      <Nm>Virgay</Nm>
      <PstlAdr>
        <StrtNm>Virginia Lane</StrtNm>
        <BldgNb>36</BldgNb>
        <PstCd>NJ 07311</PstCd>
        <TwnNm>Jersey City</TwnNm>
        <Ctry>US</Ctry>
      </PstlAdr>
    </Cdtr>
    <CdtrAcct>
      <Id>
        <PrtryAcct>
          <Id>789123</Id>
        </PrtryAcct>
      </Id>
    </CdtrAcct>
    <CdtrAgt>
      <FinInstnId>
        <BIC>AAAAUS29</BIC>
      </FinInstnId>
    </CdtrAgt>
    <DrctDbtTxInf>
      <PmtId>
        <EndToEndId>VA060327/0123</EndToEndId>
```

```
        </PmtId>
        <PmtTpInf>
          <InstrPrty>NORM</InstrPrty>
          <SvcLvl>
            <Prtry>VERPA-1</Prtry>
          </SvcLvl>
          <SeqTp>RCUR</SeqTp>
        </PmtTpInf>
        <InstdAmt Ccy = "USD">1025.00</InstdAmt>
        <ChrgBr>SHAR</ChrgBr>
        <DrctDbtTx>
          <MndtRltdInf>
            <MndtId>VIRGAY123</MndtId>
            <DtOfSgntr>2005-06-15</DtOfSgntr>
            <FnlColltnDt>2015-06-09</FnlColltnDt>
            <Frqcy>YEAR</Frqcy>
          </MndtRltdInf>
        </DrctDbtTx>
        <DbtrAgt>
          <FinInstnId>
            <BIC>BBBBUS39</BIC>
          </FinInstnId>
        </DbtrAgt>
        <Dbtr>
          <Nm>Jones</Nm>
          <PstlAdr>
            <StrtNm>Hudston Street</StrtNm>
            <BldgNb>19</BldgNb>
            <PstCd>NJ 07302</PstCd>
            <TwnNm>Jersey City</TwnNm>
            <Ctry>US</Ctry>
          </PstlAdr>
        </Dbtr>
        <DbtrAcct>
          <Id>
            <PrtryAcct>
              <Id>123456</Id>
            </PrtryAcct>
          </Id>
        </DbtrAcct>
        <Purp>
          <Cd>LIFI</Cd>
        </Purp>
        <RmtInf>
          <Ustrd>LIFE INSURANCE PAYMENT/JULY 2006</Ustrd>
        </RmtInf>
      </DrctDbtTxInf>
    </PmtInf>
    <PmtInf>
      <PmtMtd>DD</PmtMtd>
      <ReqdColltnDt>2006-07-03</ReqdColltnDt>
      <Cdtr>
```

```
      <Nm>Virgay</Nm>
      <PstlAdr>
        <StrtNm>Virginia Lane</StrtNm>
        <BldgNb>36</BldgNb>
        <PstCd>NJ 07311</PstCd>
        <TwnNm>Jersey City</TwnNm>
        <Ctry>US</Ctry>
      </PstlAdr>
    </Cdtr>
    <CdtrAcct>
      <Id>
        <PrtryAcct>
          <Id>789123</Id>
        </PrtryAcct>
      </Id>
    </CdtrAcct>
    <CdtrAgt>
      <FinInstnId>
        <BIC>AAAAUS29</BIC>
      </FinInstnId>
    </CdtrAgt>
    <DrctDbtTxInf>
      <PmtId>
        <EndToEndId>AY060327/456</EndToEndId>
      </PmtId>
      <PmtTpInf>
        <InstrPrty>NORM</InstrPrty>
        <SvcLvl>
          <Prtry>VERPA-1</Prtry>
        </SvcLvl>
        <SeqTp>OOFF</SeqTp>
      </PmtTpInf>
      <InstdAmt Ccy = "USD">985.00</InstdAmt>
      <ChrgBr>SHAR</ChrgBr>
      <DrctDbtTx>
        <PreNtfctnId>VIRGAY2435/2006</PreNtfctnId>
        <PreNtfctnDt>2006-06-07</PreNtfctnDt>
      </DrctDbtTx>
      <DbtrAgt>
        <FinInstnId>
          <BIC>CCCCUS27</BIC>
        </FinInstnId>
      </DbtrAgt>
      <Dbtr>
        <Nm>Lee</Nm>
        <PstlAdr>
          <StrtNm>Cross Road</StrtNm>
          <BldgNb>45</BldgNb>
          <PstCd>NJ 07399</PstCd>
          <TwnNm>Jersey City</TwnNm>
          <Ctry>US</Ctry>
        </PstlAdr>
```

```
            </Dbtr>
            <DbtrAcct>
               <Id>
                  <PrtryAcct>
                     <Id>789101</Id>
                  </PrtryAcct>
               </Id>
            </DbtrAcct>
            <Purp>
               <Cd>INSU</Cd>
            </Purp>
            <RmtInf>
               <Ustrd>CAR INSURANCE PREMIUM</Ustrd>
            </RmtInf>
         </DrctDbtTxInf>
      </PmtInf>
   </pain.008.001.01>
```

Business Example 2

Narrative

On 9 June 2006, Ritcom electricity company sends a CustomerDirectDebitInitiation message to its account servicer, AAAADEFF.
The message contains three recurrent collection instructions from three different debtors. The payments are for half yearly invoices. The three debtors have been pre-notified about the collections on 1 June 2006.
The first direct debit instruction is for account 123456, owned by debtor Keller and serviced by agent BBBBDE33. The payment is for 325 Euros.
The second direct debit instruction is for account DE89370400440332013000, owned by debtor Schneider and serviced by agent CCCCDE31. The payment is for 286 Euros.
The third direct debit instruction is for account 893467, owned by Schritt and serviced by agent DDDDDE33. The payment is for 235 Euros. The requested collection date for the 3 collections is 16 June 2006. Charges related to the handling of the instructions will be shared between Ritcom electricity company and the debtors.
Ritcom company would like to have 1 entry on its account 789123 and wishes to use the grouping facility.

Business Description

CustomerDirectDebitInitiation from Ritcom to AAAADEFF :

Element	***<XMLTag>***	***Content***
Group Header	<GrpHdr>	
MessageIdentification	<MsgId>	RITCOM1234
CreationDateTime	<CreDtTm>	2006-06-09T09:18:00
Batchbooking	<BtchBookg>	true
NumberOfTransactions	<NbOfTxs>	3
ControlSum	<CtrlSum>	846.00
Grouping	<Grpg>	GRPD
InitiatingParty	<InitgPty>	

Name	<Nm>	RITCOM
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Schueman Strasse
BuildingNumber	<BldgNb>	18
PostCode	<PstCd>	60017
TownName	<TwnNm>	Frankfurt am Main
Country	<Ctry>	DE
PaymentInformation	<PmtInf>	
PaymentMethod	<PmtMtd>	DD
PaymentTypeInformation	<PmtTpInf>	
InstructionPriority	<InstrPrty>	NORM
ServiceLevel	<SvcLvl>	RCUR
RequestedCollectionDate	<ReqColltnDt>	2006-06-16
Creditor	<Cdtr>	
Name	<Nm>	RITCOM
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Schueman Strasse
BuildingNumber	<BldgNb>	18
PostCode	<PstCd>	60017
TownName	<TwnNm>	Frankfurt am Main
Country	<Ctry>	DE
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	
Identification	<Id>	789123
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAADEFF
ChargeBearer	<ChrBr>	SHAR
DirectDebitTransactionInformation	<DrctDbtTxInf>	
PaymentIdentification	<PmtId>	
EndToEndIdentification	<EndToEndId>	RIT/012006-2356B7
InstructedAmount	<InstdAmtCcy=EUR>	325.00
DirectDebitTransaction	<DrctDbtTx>	
MandateRelatedInformation	<MndtRltInf>	
MandateIdentification	<MndtId>	RIT03/ac576

DateOfSignature	<DtOfSgntr>	2003-06-05
Frequency	<Frqcy>	MIAN
PrenotificationDate	<PreNtfctnDt>	2006-06-01
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBDE33
Debtor	<Dbtr>	
Name	<Nm>	Keller
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Sedan Strasse
BuildingNumber	<BldgNb>	36
PostCode	<PstCd>	52349
TownName	<TwnNm>	Dueren
Country	<Ctry>	DE
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	
Identification	<Id>	123456
Purpose	<Purp>	
Code	<Cd>	ELEC
RemittanceInformation	<RmtInf>	
Unstructured	<Ustrd>	Invoice Rit200601-78910
DirectDebitTransactionInformation	<DrctDbtTxInf>	
PaymentIdentification	<PmtId>	
EndToEndIdentification	<EndToEndId>	RIT/012006-2562C26
InstructedAmount	<InstdAmtCcy=USD>	286.00
DirectDebitTransaction	<DrctDbtTx>	
MandateRelatedInformation	<MndtRltInf>	
MandateIdentification	<MndtId>	RIT04/av002
DateOfSignature	<DtOfSgntr>	2004-08-03
Frequency	<Frqcy>	MIAN
PrenotificationDate	<PreNtfctnDt>	2006-06-01
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	CCCCDE31
Debtor	<Dbtr>	
Name	<Nm>	Schneider

PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Kuertmanstrasse
BuildingNumber	<BldgNb>	45
PostCode	<PstCd>	50475
TownName	<TwnNm>	Koeln
Country	<Ctry>	DE
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	DE89370400440332013000
Purpose	<Purp>	
Code	<Cd>	ELEC
RemittanceInformation	<RmtInf>	
Unstructured	<Ustrd>	Invoice Rit200601-78911
DirectDebitTransactionInformation	<DrctDbtTxInf>	
PaymentIdentification	<PmtId>	
EndToEndIdentification	<EndToEndId>	RIT/012006-4578S09
InstructedAmount	<InstdAmtCcy=USD>	235.00
DirectDebitTransaction	<DrctDbtTx>	
MandateRelatedInformation	<MndtRltInf>	
MandateIdentification	<MndtId>	RIT05/ab018
DateOfSignature	<DtOfSgntr>	2004-03-22
Frequency	<Frqcy>	MIAN
DateOfPrenotification	<PreNtfctnDt>	2006-06-01
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	DDDDDE33
Debtor	<Dbtr>	
Name	<Nm>	Schritt
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Kruegerstrasse
BuildingNumber	<BldgNb>	125
PostCode	<PstCd>	50475
TownName	<TwnNm>	Koeln
Country	<Ctry>	DE
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	

Identification	<Id>	893467
Purpose	<Purp>	
Code	<Cd>	ELEC
RemittanceInformation	<RmtInf>	
Unstructured	<Ustrd>	Invoice Rit200601-78912

XML Instance


```
<pain.008.001.01>
  <GrpHdr>
    <MsgId>RITCOM1234</MsgId>
    <CreDtTm>2006-06-09T09:18:00</CreDtTm>
    <BtchBookg>true</BtchBookg>
    <NbOfTxs>3</NbOfTxs>
    <CtrlSum>846.00</CtrlSum>
    <Grpg>GRPD</Grpg>
    <InitgPty>
      <Nm>RITCOM</Nm>
      <PstlAdr>
        <StrtNm>Schueman Strasse</StrtNm>
        <BldgNb>18</BldgNb>
        <PstCd>60017</PstCd>
        <TwnNm>Frankfurt Am Main</TwnNm>
        <Ctry>DE</Ctry>
      </PstlAdr>
    </InitgPty>
  </GrpHdr>
  <PmtInf>
    <PmtMtd>DD</PmtMtd>
    <PmtTpInf>
      <InstrPrty>NORM</InstrPrty>
      <SeqTp>RCUR</SeqTp>
    </PmtTpInf>
    <ReqdColltnDt>0226-06-16</ReqdColltnDt>
    <Cdtr>
      <Nm>RITCOM</Nm>
      <PstlAdr>
        <StrtNm>Schueman Strasse</StrtNm>
        <BldgNb>18</BldgNb>
        <PstCd>60017</PstCd>
        <TwnNm>Frankfurt Am Main</TwnNm>
        <Ctry>DE</Ctry>
      </PstlAdr>
    </Cdtr>
    <CdtrAcct>
      <Id>
        <PrtryAcct>
          <Id>789123</Id>
        </PrtryAcct>
```

```
      </Id>
    </CdtrAcct>
    <CdtrAgt>
      <FinInstnId>
        <BIC>AAAADEFF</BIC>
      </FinInstnId>
    </CdtrAgt>
    <ChrgBr>SHAR</ChrgBr>
    <DrctDbtTxInf>
      <PmtId>
        <EndToEndId>RIT/012006-2356B7</EndToEndId>
      </PmtId>
      <InstdAmt Ccy = "EUR">325</InstdAmt>
      <DrctDbtTx>
        <MndtRltdInf>
          <MndtId>RIT03/ac576</MndtId>
          <DtOfSgntr>2003-06-05</DtOfSgntr>
          <Frqcy>MIAN</Frqcy>
        </MndtRltdInf>
      </DrctDbtTx>
      <DbtrAgt>
        <FinInstnId>
          <BIC>BBBBDE33</BIC>
        </FinInstnId>
      </DbtrAgt>
      <Dbtr>
        <Nm>Keller</Nm>
        <PstlAdr>
          <StrtNm>Sedanstrasse</StrtNm>
          <BldgNb>36</BldgNb>
          <PstCd>52349</PstCd>
          <TwnNm>Dueren</TwnNm>
          <Ctry>DE</Ctry>
        </PstlAdr>
      </Dbtr>
      <DbtrAcct>
        <Id>
          <PrtryAcct>
            <Id>123456</Id>
          </PrtryAcct>
        </Id>
      </DbtrAcct>
      <Purp>
        <Cd>ELEC</Cd>
      </Purp>
      <RmtInf>
        <Ustrd>Invoice Rit200601-78910</Ustrd>
      </RmtInf>
    </DrctDbtTxInf>
    <DrctDbtTxInf>
      <PmtId>
        <EndToEndId>RIT/012006-2562C26</EndToEndId>
```

```
      </PmtId>
      <InstdAmt Ccy = "EUR">286.00</InstdAmt>
      <DrctDbtTx>
        <MndtRltdInf>
          <MndtId>RIT04/av002</MndtId>
          <DtOfSgntr>2004-08-03</DtOfSgntr>
          <Frqcy>MIAN</Frqcy>
        </MndtRltdInf>
        <PreNtfctnDt>2006-06-01</PreNtfctnDt>
      </DrctDbtTx>
      <DbtrAgt>
        <FinInstnId>
          <BIC>CCCCDE31</BIC>
        </FinInstnId>
      </DbtrAgt>
      <Dbtr>
        <Nm>Schneider</Nm>
        <PstlAdr>
          <StrtNm>Kuertmanstrasse</StrtNm>
          <BldgNb>45</BldgNb>
          <PstCd>50475</PstCd>
          <TwnNm>Koeln</TwnNm>
          <Ctry>DE</Ctry>
        </PstlAdr>
      </Dbtr>
      <DbtrAcct>
        <Id> <IBAN>DE89370400440332013000</IBAN>
        </Id>
      </DbtrAcct>
      <Purp>
        <Cd>ELEC</Cd>
      </Purp>
      <RmtInf>
        <Ustrd>Invoice Rit200601-78911</Ustrd>
      </RmtInf>
    </DrctDbtTxInf>
    <DrctDbtTxInf>
      <PmtId>
        <EndToEndId>RIT/012006-4578S09</EndToEndId>
      </PmtId>
      <InstdAmt Ccy = "EUR">235.00</InstdAmt>
      <DrctDbtTx>
        <MndtRltdInf>
          <MndtId>RIT05/ab018</MndtId>
          <DtOfSgntr>2004-03-22</DtOfSgntr>
          <Frqcy>MIAN</Frqcy>
        </MndtRltdInf>
        <PreNtfctnDt>2006-06-01</PreNtfctnDt>
      </DrctDbtTx>
      <DbtrAgt>
        <FinInstnId>
          <BIC>DDDDDE33</BIC>
```

```
            </FinInstnId>
          </DbtrAgt>
          <Dbtr>
            <Nm>Schritt</Nm>
            <PstlAdr>
              <StrtNm>Kruegerstrasse</StrtNm>
              <BldgNb>125</BldgNb>
              <PstCd>50475</PstCd>
              <TwnNm>Koeln</TwnNm>
              <Ctry>DE</Ctry>
            </PstlAdr>
          </Dbtr>
          <DbtrAcct>
            <Id>
              <PrtryAcct>
                <Id>893467</Id>
              </PrtryAcct>
            </Id>
          </DbtrAcct>
          <Purp>
            <Cd>ELEC</Cd>
          </Purp>
          <RmtInf>
            <Ustrd>Invoice Rit200601-78912</Ustrd>
          </RmtInf>
        </DrctDbtTxInf>
      </PmtInf>
    </pain.008.001.01>
```

Message: CustomerPaymentReversalV01 <pain.007.001.01>

Message Scope and Usage

Scope

The CustomerPaymentReversal message is sent by the initiating party to the next party in the payment chain. It is used to reverse a payment previously executed.

Usage

The CustomerPaymentReversal message is exchanged between a non-financial institution customer and an agent to reverse a CustomerDirectDebitInitiation message that has been settled. The result will be a credit on the debtor account.

The CustomerPaymentReversal message refers to the original CustomerDirectDebitInitiation message by means of references only or by means of references and a set of elements from the original instruction.

The CustomerPaymentReversal message can be used in domestic and cross-border scenarios.

Outline

The CustomerPaymentReversal message is composed of 3 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime.

B. Original Group Information

This building block is mandatory and present once. It contains elements such as OriginalMessageIdentification, OriginalMessageNameIdentification.

C. Transaction Information

This building block is optional and repetitive. It contains elements referencing the original instruction (e.g. OriginalEndToEndIdentification, OriginalInstructedAmount), elements relating to the CustomerPaymentReversal (e.g. ReversedInstructedAmount, ReversalReasonInformation). The TransactionInformation block may also transport a set of elements from the original instruction.

Rules

GroupReversal1Rule
If GroupHeader/GroupReversal is true, then TransactionInformation is not allowed.
If GroupHeader/GroupReversal is false, then at least one occurrence of TransactionInformation must be present.

GroupReversal2Rule
If GroupHeader/GroupReversal is true, then OriginalGroupInformation/ReversalReasonInformation/ReversalReason must be present.

GroupReversal3Rule
If GroupHeader/GroupReversal is false, then GroupHeader/NumberOfTransactions must equal the number of occurrences of TransactionInformation.

Note : Rules applying to specific message components or message elements are included in the description of the relevant message component or message element.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]	Text	
1.4		BatchBooking	<BtchBookg>	[0..1]	Indicator	
1.5		NumberOfTransactions	<NbOfTxs>	[1..1]	Text	
1.6		ControlSum	<CtrlSum>	[0..1]	Quantity	
1.7		GroupReversal	<GrpRvsl>	[0..1]	Indicator	
1.8		InitiatingParty	<InitgPty>	[0..1]	+	
1.9		ForwardingAgent	<FwdgAgt>	[0..1]	+	
1.10		DebtorAgent	<DbtrAgt>	[0..1]	+	
1.11		CreditorAgent	<CdtrAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		OriginalGroupInformation	<OrgnlGrpInf>	[1..1]		
2.1		OriginalMessageIdentification	<OrgnlMsgId>	[1..1]	Text	
2.2		OriginalMessageNameIdentification	<OrgnlMsgNmId>	[1..1]	Text	
2.3		OriginalCreationDateTime	<OrgnlCreDtTm>	[0..1]	DateTime	
2.4		ReversalReasonInformation	<RvslRsnInf>	[0..n]		
2.5		ReversalOriginator	<RvslOrgtr>	[0..1]	+	
2.6		ReversalReason	<RvslRsn>	[0..1]		
2.7	{Or	Code	<Cd>	[1..1]	Code	
2.8	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.9		AdditionalReversalReasonInformation	<AddtlRvslRsnInf>	[0..n]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.0		TransactionInformation	<TxInf>	[0..n]		
3.1		ReversalIdentification	<RvslId>	[0..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.2		OriginalPaymentInformationIdentification	<OrgnlPmtInfId>	[0..1]	Text	
3.3		OriginalInstructionIdentification	<OrgnlInstrId>	[0..1]	Text	
3.4		OriginalEndToEndIdentification	<OrgnlEndToEndId>	[0..1]	Text	
3.5		OriginalInstructedAmount	<OrgnlInstdAmt>	[0..1]	Amount	
3.6		ReversedInstructedAmount	<RvsdInstdAmt>	[0..1]	Amount	
3.7		ChargeBearer	<ChrgBr>	[0..1]	Code	
3.8		ReversalReasonInformation	<RvslRsnInf>	[0..n]		
3.9		ReversalOriginator	<RvslOrgtr>	[0..1]	+	
3.10		ReversalReason	<RvslRsn>	[0..1]		
3.11	{Or	Code	<Cd>	[1..1]	Code	
3.12	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.13		AdditionalReversalReasonInformation	<AddtlRvslRsnInf>	[0..n]	Text	
3.14		OriginalTransactionReference	<OrgnlTxRef>	[0..1]		
3.15		InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount	
3.16		Amount	<Amt>	[0..1]		
3.17	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount	
3.18	Or}	EquivalentAmount	<EqvtAmt>	[1..1]		
3.19		Amount	<Amt>	[1..1]	Amount	
3.20		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code	
3.21		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime	
3.22	{Or	RequestedExecutionDate	<ReqdExctnDt>	[0..1]	DateTime	
3.23	Or}	RequestedCollectionDate	<ReqdColltnDt>	[0..1]	DateTime	
3.24		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
3.25		SettlementInformation	<SttlmInf>	[0..1]		
3.26		SettlementMethod	<SttlmMtd>	[1..1]	Code	
3.27		SettlementAccount	<SttlmAcct>	[0..1]	+	
3.28		ClearingSystem	<ClrSys>	[0..1]		
3.29	{Or	ClearingSystemIdentification	<ClrSysId>	[1..1]	Code	
3.30	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.31		InstructingReimbursementAgent	<InstgRmbrsmntAgt>	[0..1]	+	
3.32		InstructingReimbursementAgentAccount	<InstgRmbrsmntAgtAcct>	[0..1]	+	
3.33		InstructedReimbursementAgent	<InstdRmbrsmntAgt>	[0..1]	+	
3.34		InstructedReimbursementAgentAccount	<InstdRmbrsmntAgtAcct>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.35		ThirdReimbursementAgent	<ThrdRmbrsmntAgt>	[0..1]	+	
3.36		ThirdReimbursementAgentAccount	<ThrdRmbrsmntAgtAcct>	[0..1]	+	
3.37		PaymentTypeInformation	<PmtTpInf>	[0..1]		
3.38		InstructionPriority	<InstrPrty>	[0..1]	Code	
3.39	{Or	ServiceLevel	<SvcLvl>	[0..1]		
3.40	{{Or	Code	<Cd>	[1..1]	Code	
3.41	Or}}	Proprietary	<Prtry>	[1..1]	Text	
3.42	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code	
3.43		LocalInstrument	<LclInstrm>	[0..1]		
3.44	{Or	Code	<Cd>	[1..1]	Code	
3.45	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.46		SequenceType	<SeqTp>	[0..1]	Code	
3.47		CategoryPurpose	<CtgyPurp>	[0..1]	Code	
3.48		PaymentMethod	<PmtMtd>	[0..1]	Code	
3.49		MandateRelatedInformation	<MndtRltdInf>	[0..1]		
3.50		MandateIdentification	<MndtId>	[0..1]	Text	
3.51		DateOfSignature	<DtOfSgntr>	[0..1]	DateTime	
3.52		AmendmentIndicator	<AmdmntInd>	[0..1]	Indicator	
3.53		AmendmentInformationDetails	<AmdmntInfDtls>	[0..1]		
3.54		OriginalMandateIdentification	<OrgnlMndtId>	[0..1]	Text	
3.55		OriginalCreditorSchemeIdentification	<OrgnlCdtrSchmeId>	[0..1]	+	
3.56		OriginalCreditorAgent	<OrgnlCdtrAgt>	[0..1]	+	
3.57		OriginalCreditorAgentAccount	<OrgnlCdtrAgtAcct>	[0..1]	+	
3.58		OriginalDebtor	<OrgnlDbtr>	[0..1]	+	
3.59		OriginalDebtorAccount	<OrgnlDbtrAcct>	[0..1]	+	
3.60		OriginalDebtorAgent	<OrgnlDbtrAgt>	[0..1]	+	
3.61		OriginalDebtorAgentAccount	<OrgnlDbtrAgtAcct>	[0..1]	+	
3.62		OriginalFinalCollectionDate	<OrgnlFnlColltnDt>	[0..1]	DateTime	
3.63		OriginalFrequency	<OrgnlFrqcy>	[0..1]	Code	
3.64		ElectronicSignature	<ElctrncSgntr>	[0..1]	Text	
3.65		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	
3.66		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
3.67		Frequency	<Frqcy>	[0..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.68		RemittanceInformation	<RmtInf>	[0..1]		
3.69		Unstructured	<Ustrd>	[0..n]	Text	
3.70		Structured	<Strd>	[0..n]		
3.71		ReferredDocumentInformation	<RfrdDocInf>	[0..1]		
3.72		ReferredDocumentType	<RfrdDocTp>	[0..1]		
3.73	{Or	Code	<Cd>	[1..1]	Code	
3.74	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.75		Issuer	<Issr>	[0..1]	Text	
3.76		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text	
3.77		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime	
3.78		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]		
3.79	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount	
3.80	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount	
3.81	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount	
3.82	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount	
3.83	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount	
3.84		CreditorReferenceInformation	<CdtrRefInf>	[0..1]		
3.85		CreditorReferenceType	<CdtrRefTp>	[0..1]		
3.86	{Or	Code	<Cd>	[1..1]	Code	
3.87	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.88		Issuer	<Issr>	[0..1]	Text	
3.89		CreditorReference	<CdtrRef>	[0..1]	Text	
3.90		Invoicer	<Invcr>	[0..1]	+	
3.91		Invoicee	<Invcee>	[0..1]	+	
3.92		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text	
3.93		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
3.94		Debtor	<Dbtr>	[0..1]	+	
3.95		DebtorAccount	<DbtrAcct>	[0..1]	+	
3.96		DebtorAgent	<DbtrAgt>	[0..1]	+	
3.97		DebtorAgentAccount	<DbtrAgtAcct>	[0..1]	+	
3.98		CreditorAgent	<CdtrAgt>	[0..1]	+	
3.99		CreditorAgentAccount	<CdtrAgtAcct>	[0..1]	+	
3.100		Creditor	<Cdtr>	[0..1]	+	
3.101		CreditorAccount	<CdtrAcct>	[0..1]	+	
3.102		UltimateCreditor	<UltmtCdtr>	[0..1]	+	

Message Items Description

*The following section identifies the elements of the **CustomerPaymentReversalV01** message.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the message.

Type: *The **GroupHeader** block is composed of the following **GroupHeader8** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	Text
1.4		BatchBooking	<BtchBookg>	[0..1]	Indicator
1.5		NumberOfTransactions	<NbOfTxs>	[1..1]	Text
1.6		ControlSum	<CtrlSum>	[0..1]	Quantity
1.7		GroupReversal	<GrpRvsl>	[0..1]	Indicator
1.8		InitiatingParty	<InitgPty>	[0..1]	+
1.9		ForwardingAgent	<FwdgAgt>	[0..1]	+
1.10		DebtorAgent	<DbtrAgt>	[0..1]	+
1.11		CreditorAgent	<CdtrAgt>	[0..1]	+

Rule(s): ControlSumAndGroupReversalRule
If GroupReversal is true, then ControlSum is not allowed.

Guideline(s): GroupReversalAndNumberOfTransactionsGuideline
If GroupReversal is true, then NumberOfTransactions equals the number of transactions in the original message.

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the instructing party and sent to the next party in the chain to unambiguously identify the message.

Usage: The instructing party has to make sure that 'MessageIdentification' is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which a (group of) payment instruction(s) was created by the instructing party.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user key that allows to check if the initiating party is allowed to initiate transactions from the account specified in the initiation.

Usage: the content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios, payment initiations, payment returns or payment reversals that are initiated on behalf of a different party than the initiating party.

Data Type: Max128Text

Format: maxLength: 128
minLength: 1

1.4 BatchBooking <BtchBookg>

Presence: [0..1]

Definition: Identifies whether a single entry per individual transaction or a batch entry for the sum of the amounts of all transactions in the message is requested.

Data Type: *One of the following **BatchBookingIndicator** values must be used:*
MeaningWhenTrue: Identifies that a batch entry for the sum of the amounts of all transactions in the message is requested.
MeaningWhenFalse: Identifies that a single entry for each of the transactions in the message is requested.

1.5 NumberOfTransactions <NbOfTxs>

Presence: [1..1]

Definition: Number of individual transactions contained in the message.

Data Type: Max15NumericText

Format: [0-9]{1,15}

1.6 ControlSum <CtrlSum>

Presence: [0..1]

Definition: Total of all individual amounts included in the message, irrespective of currencies.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

1.7 GroupReversal <GrpRvsl>

Presence: [0..1]

Definition: Indicates whether the reversal applies to the whole group of transactions or to individual transactions within the original group.

Data Type: *One of the following **TrueFalseIndicator** values must be used:*
MeaningWhenTrue: True
MeaningWhenFalse: False

1.8 InitiatingParty <InitgPty>

Presence: [0..1]

Definition: Party initiating the payment. In the payment context, this can either be the debtor (in a credit transfer), the creditor (in a direct debit), or the party that initiates the payment on behalf of the debtor or creditor.

Type: *This message item is composed of the following* ***PartyIdentification8*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

1.9 ForwardingAgent <FwdgAgt>

Presence: [0..1]

Definition: Financial institution that receives the instruction from the initiating party and forwards it to the next agent in the payment chain.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

1.10 DebtorAgent <DbtrAgt>

Presence: [0..1]

Definition: Financial institution servicing an account for the debtor.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

1.11 CreditorAgent <CdtrAgt>

Presence: [0..1]

Definition: Financial institution servicing an account for the creditor.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.0 OriginalGroupInformation <OrgnlGrpInf>

Presence: [1..1]
Definition: Information concerning the original group of transactions, to which the message refers.
Type: *The **OriginalGroupInformation** block is composed of the following **OriginalGroupInformation5** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		OriginalMessageIdentification	<OrgnlMsgId>	[1..1]	Text
2.2		OriginalMessageNameIdentification	<OrgnlMsgNmId>	[1..1]	Text
2.3		OriginalCreationDateTime	<OrgnlCreDtTm>	[0..1]	DateTime
2.4		ReversalReasonInformation	<RvslRsnInf>	[0..n]	

2.1 OriginalMessageIdentification <OrgnlMsgId>

Presence: [1..1]
Definition: Point to point reference assigned by the original instructing party to unambiguously identify the original group of individual transactions.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.2 OriginalMessageNameIdentification <OrgnlMsgNmId>

Presence: [1..1]
Definition: Specifies the original message name identifier to which the message refers, eg, pacs.003.001.01 or MT103.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.3 OriginalCreationDateTime <OrgnlCreDtTm>

Presence: [0..1]
Definition: Date and time at which the original message was created.
Data Type: ISODateTime

2.4 ReversalReasonInformation <RvslRsnInf>

Presence: [0..n]
Definition: Detailed information on the reversal reason.
Type: *This message item is composed of the following **ReversalReasonInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.5		ReversalOriginator	<RvslOrgtr>	[0..1]	+
2.6		ReversalReason	<RvslRsn>	[0..1]	
2.9		AdditionalReversalReasonInformation	<AddtlRvslRsnInf>	[0..n]	Text

2.5 ReversalOriginator <RvslOrgtr>

Presence: [0..1]
Definition: Party issuing the reversal.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.6 ReversalReason <RvslRsn>

Presence: [0..1]
Definition: Specifies the reason for the reversal.
Type: *This message item is composed of one of the following **ReversalReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.7	{Or	Code	<Cd>	[1..1]	Code
2.8	Or}	Proprietary	<Prtry>	[1..1]	Text

2.7 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.6** ReversalReason.*
Definition: Reason for the reversal in a coded form.
Data Type: Code
*One of the following **TransactionReversalReason1Code** values must be used:*

Code	Name	Definition
AC04	ClosedAccountNumber	Account number specified has been closed on the Receiver's books.
AG02	InvalidBankOperationCode	Bank Operation code specified in the message is not valid for receiver.
AM05	Duplication	This message appears to have been duplicated.

Code	Name	Definition
MD01	NoMandate	Mandate is cancelled or invalid.
MD05	CollectionNotDue	Creditor or creditor's agent should not have collected the direct debit.

2.8 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.6** ReversalReason.*
Definition: Reason for the reversal not catered for by the available codes.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.9 AdditionalReversalReasonInformation <AddtlRvslRsnInf>

Presence: [0..n]
Definition: Further details on the reversal reason.
Data Type: Max105Text
Format: maxLength: 105
minLength: 1

3.0 TransactionInformation <TxInf>

Presence: [0..n]
Definition: Information concerning the original transactions, to which the reversal message refers.
Type: *The **TransactionInformation** block is composed of the following **PaymentTransactionInformation4** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1		ReversalIdentification	<RvslId>	[0..1]	Text
3.2		OriginalPaymentInformationIdentification	<OrgnlPmtInfId>	[0..1]	Text
3.3		OriginalInstructionIdentification	<OrgnlInstrId>	[0..1]	Text
3.4		OriginalEndToEndIdentification	<OrgnlEndToEndId>	[0..1]	Text
3.5		OriginalInstructedAmount	<OrgnlInstdAmt>	[0..1]	Amount
3.6		ReversedInstructedAmount	<RvsdInstdAmt>	[0..1]	Amount
3.7		ChargeBearer	<ChrgBr>	[0..1]	Code
3.8		ReversalReasonInformation	<RvslRsnInf>	[0..n]	
3.14		OriginalTransactionReference	<OrgnlTxRef>	[0..1]	

3.1 ReversalIdentification <RvslId>

Presence: [0..1]
Definition: Unique identification as assigned by an instructing party for an instructed party to unambiguously identify the reversed transaction.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.2 OriginalPaymentInformationIdentification <OrgnlPmtInfId>

Presence: [0..1]

Definition: Unique and unambiguous identifier of the original payment information block as assigned by the original sending party.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.3 OriginalInstructionIdentification <OrgnlInstrId>

Presence: [0..1]

Definition: Original unique instruction identification as assigned by an instructing party for an instructed party to unambiguously identify the original instruction.

Usage: the original instruction identification is the original point to point reference used between the instructing party and the instructed party to refer to the original instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.4 OriginalEndToEndIdentification <OrgnlEndToEndId>

Presence: [0..1]

Definition: Original unique identification assigned by the initiating party to unambiguously identify the original transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.5 OriginalInstructedAmount <OrgnlInstdAmt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and the creditor, before deduction of charges, expressed in the currency as ordered by the initiating party in the original transaction.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.6 ReversedInstructedAmount <RvsdInstdAmt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and the creditor, before deduction of charges, in the reversed transaction.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.7 ChargeBearer <ChrgBr>

Presence: [0..1]

Definition: Specifies if the creditor and/or debtor will bear the charges associated with the processing of the payment transaction.

Usage: The ChargeBearer applies to the reversal message, not to the original instruction.

Data Type: Code

When this message item is present, one of the following ***ChargeBearerType1Code*** *values must be used:*

Code	Name	Definition
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

3.8 ReversalReasonInformation <RvslRsnInf>

Presence: [0..n]

Definition: Detailed information on the reversal reason.

Type: *This message item is composed of the following* ***ReversalReasonInformation1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.9		ReversalOriginator	<RvslOrgtr>	[0..1]	+
3.10		ReversalReason	<RvslRsn>	[0..1]	
3.13		AdditionalReversalReasonInformation	<AddtlRvslRsnInf>	[0..n]	Text

3.9 ReversalOriginator <RvslOrgtr>

Presence: [0..1]
Definition: Party issuing the reversal.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.10 ReversalReason <RvslRsn>

Presence: [0..1]
Definition: Specifies the reason for the reversal.
Type: *This message item is composed of one of the following **ReversalReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.11	{Or	Code	<Cd>	[1..1]	Code
3.12	Or}	Proprietary	<Prtry>	[1..1]	Text

3.11 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.10** ReversalReason.*
Definition: Reason for the reversal in a coded form.
Data Type: Code
*One of the following **TransactionReversalReason1Code** values must be used:*

Code	Name	Definition
AC04	ClosedAccountNumber	Account number specified has been closed on the Receiver's books.
AG02	InvalidBankOperationCode	Bank Operation code specified in the message is not valid for receiver.
AM05	Duplication	This message appears to have been duplicated.
MD01	NoMandate	Mandate is cancelled or invalid.
MD05	CollectionNotDue	Creditor or creditor's agent should not have collected the direct debit.

3.12 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.10** ReversalReason.*

Definition: Reason for the reversal not catered for by the available codes.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.13 AdditionalReversalReasonInformation <AddtlRvslRsnInf>

Presence: [0..n]

Definition: Further details on the reversal reason.

Data Type: Max105Text

Format: maxLength: 105
minLength: 1

3.14 OriginalTransactionReference <OrgnlTxRef>

Presence: [0..1]

Definition: Set of key elements of the original transaction being referred to.

Type: *This message item is composed of the following **OriginalTransactionReference1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.15		InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount
3.16		Amount	<Amt>	[0..1]	
3.21		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime
3.22	{Or	RequestedExecutionDate	<ReqdExctnDt>	[0..1]	DateTime
3.23	Or}	RequestedCollectionDate	<ReqdColltnDt>	[0..1]	DateTime
3.24		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
3.25		SettlementInformation	<SttlmInf>	[0..1]	
3.37		PaymentTypeInformation	<PmtTpInf>	[0..1]	
3.48		PaymentMethod	<PmtMtd>	[0..1]	Code
3.49		MandateRelatedInformation	<MndtRltdInf>	[0..1]	
3.68		RemittanceInformation	<RmtInf>	[0..1]	
3.93		UltimateDebtor	<UltmtDbtr>	[0..1]	+
3.94		Debtor	<Dbtr>	[0..1]	+
3.95		DebtorAccount	<DbtrAcct>	[0..1]	+
3.96		DebtorAgent	<DbtrAgt>	[0..1]	+
3.97		DebtorAgentAccount	<DbtrAgtAcct>	[0..1]	+
3.98		CreditorAgent	<CdtrAgt>	[0..1]	+
3.99		CreditorAgentAccount	<CdtrAgtAcct>	[0..1]	+
3.100		Creditor	<Cdtr>	[0..1]	+
3.101		CreditorAccount	<CdtrAcct>	[0..1]	+
3.102		UltimateCreditor	<UltmtCdtr>	[0..1]	+

3.15 InterbankSettlementAmount <IntrBkSttlmAmt>

Presence: [0..1]

Definition: Amount of money moved between the instructing agent and the instructed agent.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.16 Amount <Amt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Type: *This message item is composed of one of the following* ***AmountType2Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.17	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount
3.18	Or}	EquivalentAmount	<EqvtAmt>	[1..1]	

3.17 InstructedAmount <InstdAmt>

Presence: [1..1]

This message item is part of choice ***3.16*** *Amount.*

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.18 EquivalentAmount <EqvtAmt>

Presence: [1..1]

This message item is part of choice ***3.16*** *Amount.*

Definition: Amount of money to be transferred between the debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred into a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The debtor agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Type: *This message item is composed of the following **EquivalentAmount** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.19		Amount	<Amt>	[1..1]	Amount
3.20		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code

3.19 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred in a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.20 CurrencyOfTransfer <CcyOfTrf>

Presence: [1..1]

Definition: Specifies the currency of the to be transferred amount, which is different from the currency of the debtor's account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

3.21 InterbankSettlementDate <IntrBkSttlmDt>

Presence: [0..1]

Definition: Date on which the amount of money ceases to be available to the agent that owes it and when the amount of money becomes available to the agent to which it is due.

Data Type: ISODate

3.22 RequestedExecutionDate <ReqdExctnDt>

Presence: [0..1]

*This message item is part of choice **3.14** OriginalTransactionReference.*

Definition: Date at which the initiating party requests that the clearing agent to process the payment. If payment by cheque, the date when the cheque must be generated by the bank.

Usage: This is the date on which the debtor's account(s) is (are) to be debited.

Data Type: ISODate

3.23 RequestedCollectionDate <ReqdColltnDt>

Presence: [0..1]

*This message item is part of choice **3.14** OriginalTransactionReference.*

Definition: Date at which the creditor requests the amount of money to be collected from the debtor.

Data Type: ISODate

3.24 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]

Definition: Credit party that signs the direct debit mandate.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.25 SettlementInformation <SttlmInf>

Presence: [0..1]

Definition: Specifies the details on how the settlement of the original transaction(s) between the instructing agent and the instructed agent was completed.

Type: *This message item is composed of the following **SettlementInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.26		SettlementMethod	<SttlmMtd>	[1..1]	Code
3.27		SettlementAccount	<SttlmAcct>	[0..1]	+
3.28		ClearingSystem	<ClrSys>	[0..1]	
3.31		InstructingReimbursementAgent	<InstgRmbrsmntAgt>	[0..1]	+
3.32		InstructingReimbursementAgentAccount	<InstgRmbrsmntAgtAcct>	[0..1]	+
3.33		InstructedReimbursementAgent	<InstdRmbrsmntAgt>	[0..1]	+
3.34		InstructedReimbursementAgentAccount	<InstdRmbrsmntAgtAcct>	[0..1]	+
3.35		ThirdReimbursementAgent	<ThrdRmbrsmntAgt>	[0..1]	+
3.36		ThirdReimbursementAgentAccount	<ThrdRmbrsmntAgtAcct>	[0..1]	+

3.26 SettlementMethod <SttlmMtd>

Presence: [1..1]
Definition: Method used to settle the (batch of) payment instructions.
Data Type: Code
*One of the following **SettlementMethod1Code** values must be used:*

Code	Name	Definition
CLRG	ClearingSystem	Settlement is done through a payment clearing system.
COVE	CoverMethod	Settlement is done through a cover payment.
INDA	InstructedAgent	Settlement is done by the agent instructed to execute a payment instruction.
INGA	InstructingAgent	Settlement is done by the agent instructing and forwarding the payment to the next party in the payment chain.

3.27 SettlementAccount <SttlmAcct>

Presence: [0..1]
Definition: A specific purpose account used to post debit and credit entries as a result of the transaction.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.28 ClearingSystem <ClrSys>

Presence: [0..1]
Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.
Type: *This message item is composed of one of the following **ClearingSystemIdentification1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.29	{Or	ClearingSystemIdentification	<ClrSysId>	[1..1]	Code
3.30	Or}	Proprietary	<Prtry>	[1..1]	Text

3.29 ClearingSystemIdentification <ClrSysId>

Presence: [1..1]
*This message item is part of choice **3.28** ClearingSystem.*
Definition: Infrastructure through which the payment instruction is processed.

Data Type: Code

*One of the following **CashClearingSystem3Code** values must be used:*

Code	Name	Definition
ABE	EBAEuro1Step1	Scheme code for EBA Euro1/Step1.
AIP	Albania	Scheme code for AL (Albania) - Albania Interbank Payment System.
ART	Austrian	Scheme code for AT (Austria) - Austrian RTGS (ARTIS).
AVP	NewZealand	Scheme code for NZ (New Zealand) - New Zealand Assured Value Payments.
AZM	Azerbaijan	Scheme code for AZ (Azerbaijan) - Azerbaijan Interbank Payment System (AZIPS).
BAP	BosniaHerzegovina	Scheme code for BA (Bosnia and Herzegovina).
BCC	SwedenBGC	Scheme code for SE (Sweden) - Sweden BGC Clearing CUG.
BDS	Barbados	Scheme code for BB (Barbados) - Barbados RTGS (CBRTGS).
BEL	Belgium	Scheme code for BE (Belgium) - Belgium RTGS (ELLIPS).
BGN	Bulgaria	Scheme code for BG (Bulgaria) - Bulgaria RTGS.
BHS	Bahamas	Scheme code for BS (Bahamas) - Bahamas RTGS.
BIS	Botswana	Scheme code for BW (Botswana) - Botswana Interbank Settlement System.
BOF	Finland	Scheme code for FI (Finland) - RTGS (BOF).
BOJ	BankOfJapanNet	Scheme code for the Bank of Japan clearing system.
BRL	Italy	Scheme code for IT (Italy) - Italy RTGS (BIREL).
BSP	Philippines	Scheme code for PH (Philippines) - Philippines Payment System.
CAD	Canada	Scheme code for CA (Canada) - Canadian Large Value Transfer System (LVTS)
CAM	SpainCAM	Scheme code for ES (Spain).
CBJ	Ireland	Scheme code for IE (Ireland) - Irish RTGS (IRIS).
CHI	USChips	CHIPS is the Clearing House Interbank Payment System in the US.
CHP	UnitedKingdom	Scheme code for GB (UK) - British Euro RTGS (CHAPS).
COP	Columbia	Scheme code for Columbia (CO) - Colombian ACH CENIT Central Bank Payment System.
DDK	DenmarkDDK	Scheme code for DK (Denmark) - Danish Krone RTGS (KRONOS)
DKC	Denmark	Scheme code for DK (Denmark) - Danish Euro RTGS (KRONOS)
EBA	EBAEuro1	Scheme code for EBA Euro1.
ELS	GermanyELS	Scheme code for DE (Germany).

Code	Name	Definition
EPM	ECB	Scheme code for ECB (European Central Bank) - ECB Payment Mechanism.
EPN	USChipsACH	Scheme code for the US CHIPS-ACH.
ERP	EBAStep1	Scheme code for EBA step 1 (members).
FDA	USFedACH	Scheme code for the US FED-ACH.
FDW	Fedwire	Scheme code for the US national real time gross settlement system.
FEY	ForeignExchangeYenClearing	Scheme code for the Foreign Exchange Yen Clearing system (FEYCS). It is the Japanese electronic interbank system for sending guaranteed and unconditional yen payments of FX deals for same day settlement from one settlement bank, on behalf of itself or its customers, to another settlement bank.
GIS	Ghana	Scheme code for GH (Ghana) - Ghana Interbank Settlement System (GISS).
HRK	Croatia	Scheme code for HR (Croatia) - HSVP.
HRM	Greece	Scheme code for GR (Greece) - Greek RTGS (HERMES).
HUF	Hungary	Scheme code for HU (Hungary) - VIBER.
INC	NetherlandsIP	Scheme code for NL (Netherlands) - Netherlands Interpay CUG.
JOD	Jordan	Scheme code for JO (Jordan) - Jordan RTGS.
KPS	Kenya	Scheme code for KE (Kenya) - Kenyan Electronic Payment Settlement System.
LGS	Luxemburg	Scheme code for LU (Luxemburg) - Luxembourg RTGS (LIPS).
LKB	SriLanka	Scheme code for LK (Sri Lanka) - Sri Lanka (Lankasettle).
LVL	Latvia	Scheme code for LV (Latvia).
MEP	Singapore	Scheme code for SG (Singapore) - Singapore RTGS (MEPS +).
MOS	SouthAfrica	Scheme code for ZA (South Africa) - South-African Multiple Option Settlement.
MRS	Malta	Scheme code for MT (Malta) - Malta Realtime Interbank Settlement System.
MUP	Mauritius	Scheme code for MU (Mauritius).
NAM	Namibia	Scheme code for NA (Namibian) - Namibian Interbank Settlement System.
NOC	Norway	Scheme code for NO (Norway).
PCH	Switzerland	Scheme code for CH (Switzerland).
PDS	Australia	Scheme code for AU (Australia).
PEG	Egypt	Scheme code for EG (Egypt).
PNS	FrancePNS	Scheme code for FR (France).

Code	Name	Definition
PTR	Angola	Scheme code for AO (Angola) - Angola RTGS.
PVE	Venezuela	Scheme code for Ve (Venezuela).
ROL	RomaniaEPO	Scheme code for RO (Romania) - Romanian Electronic Payment Operations RT.
ROS	RomaniaGSRS	Scheme code for RO (Romania) - Romanian GSRS.
RTP	GermanyRTGSPlus	Scheme code for DE (Germany).
SCP	Chili	Scheme code for CL (Chile) - Chilean Interbank Payment System.
SEC	SwedenSEC	Scheme code for SE (Sweden) - Swedish Euro RTGS (SEC).
SIT	Slovania	Scheme code for SI (Slovenia).
SLB	SpainES	Scheme code for ES (Spain) - Spanish RTGS (SLBE).
SPG	Portugal	Scheme code for PT (Portugal) - Portuguese RTGS (SPGT).
SSK	SwedenSSK	Scheme code for SE (Sweden) - SEK RTGS (RIX).
STG	UnitedKingdomGBP	Scheme code for UK (United Kingdom) - CHAPS Sterling RTGS.
TBF	FranceFR	Scheme code for FR (France) - French RTGS (TBF).
TGT	Target	Scheme code for Target.
THB	Thailand	Scheme code for TH (Thailand) - Thailand Payment System (Bahtnet/2).
TIS	Tanzania	Scheme code for TZ (Tanzania) - Tanzania Interbank Settlement System (TISS).
TOP	Netherlands	Scheme code for NL (Netherlands) - Dutch RTGS (TOP)
TTD	TrinidadAndTobago	Scheme code for TT (Trinidad and Tobago) - Trinidad and Tobago SAFE-TT.
UIS	Uganda	Scheme code for UG (Uganda) - Uganda National Interbank Settlement System.
XCT	EBAStep2	Scheme code for EBA step 2.
ZEN	Zengin	Scheme code for the Zengin system. The electronic payment system for domestic third party transfers managed by the Tokyo Bankers Association.
ZET	Zimbabwe	Scheme code for ZW (Zimbabwe) - Zimbabwe Electronic Transfer & Settlement System.
ZIS	Zambia	Scheme code for ZM (Zambia) - Zambian Interbank Payment &Settlement System.

3.30 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.28** ClearingSystem.*

Definition: Proprietary clearing system service selected for a transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.31 InstructingReimbursementAgent <InstgRmbrsmntAgt>

Presence: [0..1]

Definition: Specifies the agent through which the instructing agent will reimburse the instructed agent.

Usage: If the instructing and instructed agents have the same reimbursement agent, then only InstructingReimbursementAgent must be used.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.32 InstructingReimbursementAgentAccount <InstgRmbrsmntAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the instructing reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.33 InstructedReimbursementAgent <InstdRmbrsmntAgt>

Presence: [0..1]

Definition: Agent at which the instructed agent will be reimbursed.

Usage: If InstructedReimbursementAgent contains a branch of the InstructedAgent, then the instructed agent will claim reimbursement from that branch/will be paid by that branch.

Usage: If InstructingAgent and InstructedAgent have the same reimbursement agent, then only InstructingReimbursementAgent must be used.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.34 InstructedReimbursementAgentAccount <InstdRmbrsmntAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the instructed reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.35 ThirdReimbursementAgent <ThrdRmbrsmntAgt>

Presence: [0..1]

Definition: Specifies the branch of the instructed agent where the amount of money will be made available when different from the instructed reimbursement agent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.36 ThirdReimbursementAgentAccount <ThrdRmbrsmntAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the third reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.37 PaymentTypeInformation <PmtTpInf>

Presence: [0..1]
Definition: Set of elements that further specifies the type of transaction.
Type: *This message item is composed of the following **PaymentTypeInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.38		InstructionPriority	<InstrPrty>	[0..1]	Code
3.39	{Or	ServiceLevel	<SvcLvl>	[0..1]	
3.42	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code
3.43		LocalInstrument	<LclInstrm>	[0..1]	
3.46		SequenceType	<SeqTp>	[0..1]	Code
3.47		CategoryPurpose	<CtgyPurp>	[0..1]	Code

3.38 InstructionPriority <InstrPrty>

Presence: [0..1]
Definition: Indicator of the urgency or order of importance that the instructing party would like the instructed party to apply to the processing of the instruction.
Data Type: Code
*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

3.39 ServiceLevel <SvcLvl>

Presence: [0..1]
*This message item is part of choice **3.37** PaymentTypeInformation.*
Definition: Agreement under which or rules under which the transaction should be processed.
Type: *This message item is composed of one of the following **ServiceLevel2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.40	{Or	Code	<Cd>	[1..1]	Code

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.41	Or}	Proprietary	<Prtry>	[1..1]	Text

3.40 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.39** ServiceLevel.*
Definition: Identification of a pre-agreed level of service between the parties in a coded form.
Data Type: Code
*One of the following **ServiceLevel1Code** values must be used:*

Code	Name	Definition
PRPT	EBAPriorityService	Transaction must be processed according to the EBA Priority Service.
SDVA	SameDayValue	Payment must be executed with same day value to the creditor.
SEPA	SingleEuroPaymentsArea	Payment must be executed following the Single Euro Payments Area scheme.

3.41 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.39** ServiceLevel.*
Definition: Proprietary identification of a pre-agreed level of service between the parties.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.42 ClearingChannel <ClrChanl>

Presence: [0..1]
*This message item is part of choice **3.37** PaymentTypeInformation.*
Definition: Specifies the clearing channel to be used for the settlement of the instruction.
Data Type: Code
*When this message item is present, one of the following **ClearingChannel2Code** values must be used:*

Code	Name	Definition
BOOK	BookTransfer	Payment through internal book transfer.
MPNS	MassPaymentNetSystem	Clearing channel is a mass payment net settlement system.
RTGS	RealTimeGrossSettlementSystem	Clearing channel is a real-time gross settlement system.
RTNS	RealTimeNetSettlementSystem	Clearing channel is a real-time net settlement system.

3.43 LocalInstrument <LclInstrm>

Presence: [0..1]
Definition: User community specific instrument.

Usage : When available, codes provided by local authorities should be used.

Type: *This message item is composed of one of the following **LocalInstrument1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.44	{Or	Code	<Cd>	[1..1]	Code
3.45	Or}	Proprietary	<Prtry>	[1..1]	Text

3.44 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.43** LocalInstrument.*
Definition: Specifies the local instrument published in an external local instrument code list.
Data Type: ExternalLocalInstrumentCode
Format: maxLength: 35
minLength: 1

3.45 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.43** LocalInstrument.*
Definition: Specifies the local instrument as a proprietary code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.46 SequenceType <SeqTp>

Presence: [0..1]
Definition: Identifies the direct debit sequence, eg, first, recurrent, final or one-off.
Data Type: Code
*When this message item is present, one of the following **SequenceType1Code** values must be used:*

Code	Name	Definition
FNAL	Final	Final collection of a series of direct debit instructions.
FRST	First	First collection of a series of direct debit instructions.
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

3.47 CategoryPurpose <CtgyPurp>

Presence: [0..1]
Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.
Data Type: Code
*When this message item is present, one of the following **PaymentCategoryPurpose1Code** values must be used:*

Code	Name	Definition
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CORT	TradeSettlementPayment	Transaction is related to settlement of a trade, eg a foreign exchange deal or a securities transaction.
DIVI	Dividend	Transaction is the payment of dividends.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to the payment of a hedging operation.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is the payment of interest.
LOAN	Loan	Transaction is related to the transfer of a loan to a borrower.
PENS	PensionPayment	Transaction is the payment of pension.
SALA	SalaryPayment	Transaction is the payment of salaries.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes.
TRAD	Trade	Transaction is related to the payment of a trade transaction.
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.
WHLD	WithHolding	Transaction is the payment of withholding tax.

3.48 PaymentMethod <PmtMtd>

Presence: [0..1]
Definition: Specifies the transfer method that will be used by the instructing agent to transfer the funds to the creditor.
Data Type: Code
*When this message item is present, one of the following **PaymentMethod4Code** values must be used:*

Code	Name	Definition
CHK	Cheque	Written order to a bank to pay a certain amount of money from one person to another person.

Code	Name	Definition
DD	DirectDebit	Collection of an amount of money from the debtor's bank account by the creditor. The amount of money and dates of collections may vary.
TRA	TransferAdvice	Transfer of an amount of money in the books of the account servicer. An advice should be sent back to the account owner.
TRF	CreditTransfer	Transfer of an amount of money in the books of the account servicer.

3.49 MandateRelatedInformation <MndtRltdInf>

Presence: [0..1]

Definition: Set of elements used to provide further details related to a direct debit mandate signed between the creditor and the debtor.

Usage: Mandate related information is to be used only when the direct debit relates to a mandate signed between the debtor and the creditor.

Type: *This message item is composed of the following **MandateRelatedInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.50		MandateIdentification	<MndtId>	[0..1]	Text
3.51		DateOfSignature	<DtOfSgntr>	[0..1]	DateTime
3.52		AmendmentIndicator	<AmdmntInd>	[0..1]	Indicator
3.53		AmendmentInformationDetails	<AmdmntInfDtls>	[0..1]	
3.64		ElectronicSignature	<ElctrncSgntr>	[0..1]	Text
3.65		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
3.66		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime
3.67		Frequency	<Frqcy>	[0..1]	Code

Rule(s): AmendmentIndicatorRule
If AmendmentIndicator is true, then AmendementInformationDetails must be present, with amended mandate information.

If AmendmentIndicator is false, then AmendmentInformationDetails is not allowed.

3.50 MandateIdentification <MndtId>

Presence: [0..1]

Definition: Reference of the direct debit mandate that has been signed between by the debtor and the creditor.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.51 DateOfSignature <DtOfSgntr>

Presence: [0..1]
Definition: Date on which the direct debit mandate has been signed by the debtor.
Data Type: ISODate

3.52 AmendmentIndicator <AmdmntInd>

Presence: [0..1]
Definition: Indicator notifying whether the underlying mandate is amended or not.
Data Type: *One of the following **TrueFalseIndicator** values must be used:*
MeaningWhenTrue: True
MeaningWhenFalse: False

3.53 AmendmentInformationDetails <AmdmntInfDtls>

Presence: [0..1]
Definition: List of direct debit mandate elements that have been modified.
Type: *This message item is composed of the following **AmendmentInformationDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.54		OriginalMandateIdentification	<OrgnlMndtId>	[0..1]	Text
3.55		OriginalCreditorSchemeIdentification	<OrgnlCdtrSchmeId>	[0..1]	+
3.56		OriginalCreditorAgent	<OrgnlCdtrAgt>	[0..1]	+
3.57		OriginalCreditorAgentAccount	<OrgnlCdtrAgtAcct>	[0..1]	+
3.58		OriginalDebtor	<OrgnlDbtr>	[0..1]	+
3.59		OriginalDebtorAccount	<OrgnlDbtrAcct>	[0..1]	+
3.60		OriginalDebtorAgent	<OrgnlDbtrAgt>	[0..1]	+
3.61		OriginalDebtorAgentAccount	<OrgnlDbtrAgtAcct>	[0..1]	+
3.62		OriginalFinalCollectionDate	<OrgnlFnlColltnDt>	[0..1]	DateTime
3.63		OriginalFrequency	<OrgnlFrqcy>	[0..1]	Code

3.54 OriginalMandateIdentification <OrgnlMndtId>

Presence: [0..1]
Definition: Original mandate identification that has been modified.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.55 OriginalCreditorSchemeIdentification <OrgnlCdtrSchmeId>

Presence: [0..1]
Definition: Original creditor scheme identification that has been modified.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.56 OriginalCreditorAgent <OrgnlCdtrAgt>

Presence: [0..1]
Definition: Original creditor agent that has been modified.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.57 OriginalCreditorAgentAccount <OrgnlCdtrAgtAcct>

Presence: [0..1]
Definition: Original creditor agent acount that has been modified.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.58 OriginalDebtor <OrgnlDbtr>

Presence: [0..1]
Definition: Original debtor that has been modified.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.59 OriginalDebtorAccount <OrgnlDbtrAcct>

Presence: [0..1]
Definition: Original debtor account that has been modified.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.60 OriginalDebtorAgent <OrgnlDbtrAgt>

Presence: [0..1]
Definition: Original debtor's agent that has been modified.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.61 OriginalDebtorAgentAccount <OrgnlDbtrAgtAcct>

Presence: [0..1]
Definition: Original debtor agent account that has been modified.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.62 OriginalFinalCollectionDate <OrgnlFnlColltnDt>

Presence: [0..1]
Definition: Original final collection date that has been modified.
Data Type: ISODate

3.63 OriginalFrequency <OrgnlFrqcy>

Presence: [0..1]
Definition: Original frequency that has been modified.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

3.64 ElectronicSignature <ElctrncSgntr>

Presence: [0..1]
Definition: Additional security provisions, eg, digital signature as provided by the debtor.
Data Type: Max1025Text
Format: maxLength: 1025
minLength: 1

3.65 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.
Data Type: ISODate

3.66 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.

Data Type: ISODate

3.67 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which direct debit instructions are to be created and processed, eg, daily, weekly, monthly.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

3.68 RemittanceInformation <RmtInf>

Presence: [0..1]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system.
Type: *This message item is composed of the following **RemittanceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.69		Unstructured	<Ustrd>	[0..n]	Text
3.70		Structured	<Strd>	[0..n]	

3.69 Unstructured <Ustrd>

Presence: [0..n]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in an unstructured form.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.70 Structured <Strd>

Presence: [0..n]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in a structured form.
Type: *This message item is composed of the following **StructuredRemittanceInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.71		ReferredDocumentInformation	<RfrdDocInf>	[0..1]	
3.77		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime
3.78		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]	
3.84		CreditorReferenceInformation	<CdtrRefInf>	[0..1]	
3.90		Invoicer	<Invcr>	[0..1]	+
3.91		Invoicee	<Invcee>	[0..1]	+
3.92		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text

3.71 ReferredDocumentInformation <RfrdDocInf>

Presence: [0..1]
Definition: Reference information to allow the identification of the underlying reference documents.
Type: *This message item is composed of the following **ReferredDocumentInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.72		ReferredDocumentType	<RfrdDocTp>	[0..1]	
3.76		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text

3.72 ReferredDocumentType <RfrdDocTp>

Presence: [0..1]
Definition: Provides the type of the referred document.
Type: *This message item is composed of the following **ReferredDocumentType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.73	{Or	Code	<Cd>	[1..1]	Code
3.74	Or}	Proprietary	<Prtry>	[1..1]	Text
3.75		Issuer	<Issr>	[0..1]	Text

3.73 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.72** ReferredDocumentType.*
Definition: Document type in a coded form.
Data Type: Code
*One of the following **DocumentType2Code** values must be used:*

Code	Name	Definition
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.

Code	Name	Definition
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.

3.74 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.72** ReferredDocumentType.*

Definition: Proprietary identification of the type of the remittance document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.75 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the reference document type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.76 ReferredDocumentNumber <RfrdDocNb>

Presence: [0..1]

Definition: Unique and unambiguous identification number of the referred document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.77 ReferredDocumentRelatedDate <RfrdDocRltdDt>

Presence: [0..1]

Definition: Date associated with the referred document, eg, date of issue.

Data Type: ISODate

3.78 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..n]

Definition: Amount of money and currency of a document referred to in the remittance section. The amount is typically either the original amount due and payable, or the amount actually remitted for the referred document.

Type: *This message item is composed of one of the following **ReferredDocumentAmount1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.79	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount
3.80	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount
3.81	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount
3.82	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount
3.83	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount

3.79 DuePayableAmount <DuePyblAmt>

Presence: [1..1]

*This message item is part of choice **3.78** ReferredDocumentAmount.*

Definition: Amount specified is the exact amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.80 DiscountAppliedAmount <DscntApldAmt>

Presence: [1..1]

*This message item is part of choice **3.78** ReferredDocumentAmount.*

Definition: Amount of money resulting from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.81 RemittedAmount <RmtdAmt>

Presence: [1..1]

*This message item is part of choice **3.78** ReferredDocumentAmount.*

Definition: Amount of money remitted for the referred document.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.82 CreditNoteAmount <CdtNoteAmt>

Presence: [1..1]

*This message item is part of choice **3.78** ReferredDocumentAmount.*

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.83 TaxAmount <TaxAmt>

Presence: [1..1]

*This message item is part of choice **3.78** ReferredDocumentAmount.*

Definition: Quantity of cash resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.84 CreditorReferenceInformation <CdtrRefInf>

Presence: [0..1]
Definition: Reference information provided by the creditor to allow the identification of the underlying documents.
Type: *This message item is composed of the following* ***CreditorReferenceInformation1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.85		CreditorReferenceType	<CdtrRefTp>	[0..1]	
3.89		CreditorReference	<CdtrRef>	[0..1]	Text

3.85 CreditorReferenceType <CdtrRefTp>

Presence: [0..1]
Definition: Provides the type of the creditor reference.
Type: *This message item is composed of the following* ***CreditorReferenceType1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.86	{Or	Code	<Cd>	[1..1]	Code
3.87	Or}	Proprietary	<Prtry>	[1..1]	Text
3.88		Issuer	<Issr>	[0..1]	Text

3.86 Code <Cd>

Presence: [1..1]
This message item is part of choice ***3.85*** *CreditorReferenceType.*
Definition: Coded creditor reference type.
Data Type: Code
One of the following ***DocumentType3Code*** *values must be used:*

Code	Name	Definition
DISP	DispatchAdvice	Document is a dispatch advice.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
PUOR	PurchaseOrder	Document is a purchase order.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SCOR	StructuredCommunicationReference	Document is a structured communication reference provided by the creditor to identify the referred transaction.

3.87 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.85** CreditorReferenceType.*
Definition: Creditor reference type not avilable in a coded format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.88 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the credit reference type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.89 CreditorReference <CdtrRef>

Presence: [0..1]
Definition: Unique and unambiguous reference assigned by the creditor to refer to the payment transaction.

Usage: if available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the cash.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.90 Invoicer <Invcr>

Presence: [0..1]
Definition: Identification of the organization issuing the invoice when different than the creditor or final party.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.91 Invoicee <Invcee>

Presence: [0..1]

Definition: Identification of the party to whom an invoice is issued, when different than the originator or debtor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.92 AdditionalRemittanceInformation <AddtlRmtInf>

Presence: [0..1]
Definition: Additional information, in free text form, to complement the structured remittance information.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.93 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.94 Debtor <Dbtr>

Presence: [0..1]
Definition: Party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.95 DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor to which a debit entry will be made as a result of the transaction.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.96 DebtorAgent <DbtrAgt>

Presence: [0..1]

Definition: Financial institution servicing an account for the debtor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.97 DebtorAgentAccount <DbtrAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor agent at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.98 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.99 CreditorAgentAccount <CdtrAgtAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor agent at its servicing agent in the payment chain.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.100 Creditor <Cdtr>

Presence: [0..1]
Definition: Party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.101 CreditorAccount <CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.102 UltimateCreditor <UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

Business Example - Reversal of a CustomerDirectDebitInitiation

Narrative

On 17 June 2006, date of the collection from debtor Schneider, Ritcom electricity company realizes that the direct debit instruction sent on 9 June was a duplicated instruction. As settlement of the direct debit already took place, Ritcom electricity company initiates a CustomerPaymentReversal message and sends it to its account servicer AAAADEFF. Any potential charges relating to this reversal payment, paid by Schneider, will be deducted from the next invoice.
Note : the original CustomerDirectDebitInitiation instruction is included in the business example section of the CustomerDirectDebitInitiation message.

Business Description

CustomerPaymentReversal from Ritcom to AAAADEFF :

Element	***<XMLTag>***	***Content***
Group Header	<GrpHdr>	
MessageIdentification	<MsgId>	RIT-REV-20060617-456f
CreationDateTime	<CreDtTm>	2006-06-17T=15:38:00
NumberOfTransactions	<NbOfTxs>	1

InitiatingParty	<InitgPty>	
Name	<Nm>	Ritcom
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Schueman Strasse
BuildingNumber	<BldgNb>	18
PostCode	<PstCd>	60017
TownName	<TwnNm>	Frankfurt am Main
Country	<Ctry>	DE
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBDE33
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	CCCCDE31
OriginalGroupInformation	<OrgnlGrpInf>	
OriginalMessageIdentification	<OrgnlMsgId>	RITCOM1234
OriginalMessageName Identification	<OrgnlMsgNmId>	Pain.008.001.01
OriginalCreationDateAndTime	<OrgnlCreDtTm>	2006-06-09T09:18:00
TransactionInformation	<TxInf>	
ReversalID	<RvslId>	RIT5467
OriginalEndToEndIdentification	<OrgnlEndToEnd>	RIT/012006-2562C26
OriginalInstructedAmount	<OrgnlInstdAmtCcy=EUR>	286.00
ReversedInstructedAmount	<RvsdInstdAmtCcy=EUR>	286.00
ReversalReasonInformation	<RvslRsnInf>	
ReversalOriginator	<RvslOrgtr>	
Name	<Nm>	Ritcom
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Schueman Strasse
BuildingNumber	<BldgNb>	18
PostCode	<PstCd>	60017
TownName	<TwnNm>	Frankfurt am Main
Country	<Ctry>	DE
ReversalReason	<RvslRsn>	
Code	<Cd>	AM05
OriginalTransactionReference	<OrgnlTxRef>	
RequestedCollectionDate	<ReqdColltnDt>	2006-06-16
MandateRelatedInformation	<MndtRltdInf>	

MandateIdentification	<MndtId>	RIT04/av002
Debtor	<Dbtr>	
Name	<Nm>	Schneider
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Kuertman Strasse
BuildingNumber	<BldgNb>	45
PostCode	<PstCd>	50475
TownName	<TwnNm>	Koeln
Country	<Ctry>	DE
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	DE89370400440332013000
Creditor	<Cdtr>	
Name	<Nm>	Ritcom
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Schueman Strasse
BuildingNumber	<BldgNb>	18
PostCode	<PstCd>	60017
TownName	<TwnNm>	Frankfurt am Main
Country	<Ctry>	DE

XML Instance

```
<pain.007.001.01>
  <GrpHdr>
    <MsgId>RIT-REV-20060617-456f</MsgId>
    <CreDtTm>2006-06-17T15:38:00</CreDtTm>
    <NbOfTxs>1</NbOfTxs>
    <InitgPty>
      <Nm>Ritcom</Nm>
      <PstlAdr>
        <StrtNm>Schueman Strasse</StrtNm>
        <BldgNb>18</BldgNb>
        <PstCd>60017</PstCd>
        <TwnNm>Frankfurt Am Main</TwnNm>
        <Ctry>DE</Ctry>
      </PstlAdr>
    </InitgPty>
    <DbtrAgt>
      <FinInstnId>
        <BIC>BBBBDE33</BIC>
      </FinInstnId>
    </DbtrAgt>
```

```
    <CdtrAgt>
      <FinInstnId>
        <BIC>CCCCDE31</BIC>
      </FinInstnId>
    </CdtrAgt>
  </GrpHdr>
  <OrgnlGrpInf>
    <OrgnlMsgId>RITCOM1234</OrgnlMsgId>
    <OrgnlMsgNmId>Pain.008.001.01</OrgnlMsgNmId>
    <OrgnlCreDtTm>2006-06-09T09:18:00</OrgnlCreDtTm>
  </OrgnlGrpInf>
  <TxInf>
    <RvslId>RIT5467</RvslId>
    <OrgnlEndToEndId>RIT/012006-2562C26</OrgnlEndToEndId>
    <OrgnlInstdAmt Ccy = "EUR">286.00</OrgnlInstdAmt>
    <RvsdInstdAmt Ccy = "EUR">286.00</RvsdInstdAmt>
    <RvslRsnInf>
      <RvslOrgtr>
        <Nm>Ritcom</Nm>
        <PstlAdr>
          <StrtNm>Schueman Strasse</StrtNm>
          <BldgNb>18</BldgNb>
          <PstCd>60017</PstCd>
          <TwnNm>Frankfurt Am Main</TwnNm>
          <Ctry>DE</Ctry>
        </PstlAdr>
      </RvslOrgtr>
      <RvslRsn>
        <Cd>AM05</Cd>
      </RvslRsn>
    </RvslRsnInf>
    <OrgnlTxRef>
      <ReqdColltnDt>2006-06-16</ReqdColltnDt>
      <MndtRltdInf>
        <MndtId>RIT04/av002</MndtId>
      </MndtRltdInf>
      <Dbtr>
        <Nm>Schneider</Nm>
        <PstlAdr>
          <StrtNm>Kuertman Strasse</StrtNm>
          <BldgNb>45</BldgNb>
          <PstCd>50475</PstCd>
          <TwnNm>Koeln</TwnNm>
          <Ctry>DE</Ctry>
        </PstlAdr>
      </Dbtr>
      <DbtrAcct>
        <Id>
          <IBAN>DE8937040440332013000</IBAN>
        </Id>
      </DbtrAcct>
      <Cdtr>
```

```
            <Nm>Ritcom</Nm>
            <PstlAdr>
               <StrtNm>Schueman Strasse</StrtNm>
               <BldgNb>18</BldgNb>
               <PstCd>60017</PstCd>
               <TwnNm>Frankfurt Am Main</TwnNm>
               <Ctry>DE</Ctry>
            </PstlAdr>
         </Cdtr>
      </OrgnlTxRef>
   </TxInf>
</pain.007.001.01>
```

Message: PaymentCancellationRequestV01 <pain.006.001.01>

Message Scope and Usage

Scope

The PaymentCancellationRequest message is sent by the initiating party or any agent, to the next party in the payment chain. It is used to request the cancellation of an instruction previously sent.

Usage

The PaymentCancellationRequest message is exchanged between non-financial institution customers and agents to request the cancellation of a payment initiation message previously sent (i.e. the CustomerCreditTransferInitiation message and the CustomerDirectDebitInitiation messages).

The PaymentCancellationRequest message can be used to request the cancellation of single instructions or multiple instructions, from one or multiple files.

The PaymentCancellationRequest message can be used in domestic and cross-border scenarios.

The PaymentCancellationRequest message refers to the original instruction(s) by means of references only or by means of references and a set of elements from the original instruction.

The PaymentCancellationRequest message exchanged between non-financial institution customers and agents is identified in the schema as follows: **urn:iso:std:iso:20022:tech:xsd: pain.006.001.01**

Outline

The PaymentCancellationRequest message is composed of 3 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime, GroupCancellation indicator.

B. Original Group Information

This building block is mandatory and present once. It contains elements such as OriginalMessageIdentification, OriginalMessageNameIdentification.

C. Transaction Information

This building block is optional and repetitive. It contains elements referencing the original instruction (e.g. OriginalEndToEndIdentification, OriginalInterbankSettlementAmount), elements relating to the CancellationRequest (e.g. CancellationReasonInformation).
The TransactionInformation block may also transport a set of elements from the original instruction.

Rules

InstructedAgentRule
GroupHeader/InstructedAgent is not allowed.

InstructingAgentRule
GroupHeader/InstructingAgent is not allowed.

OriginalInterbankSettlementAmountRule

TransactionInformation/OriginalInterbankSettlementAmount is not allowed.

GroupCancellation1Rule
If GroupHeader/GroupCancellation is true, then TransactionInformation is not allowed.
If GroupHeader/GroupCancellation is false, then at least one occurrence of TransactionInformation must be present.

GroupCancellation2Rule
If GroupHeader/GroupCancellation is true, then OriginalGroupInformation/CancellationReasonInformation/CancellationReason must be present.

GroupCancellation3Rule
If GroupHeader/GroupCancellation is false, then GroupHeader/NumberOfTransactions must equal the number of occurrences of TransactionInformation.

Note : Rules applying to specific message components or message elements are included in the description of the relevant message component or message element.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		NumberOfTransactions	<NbOfTxs>	[1..1]	Text	
1.4		ControlSum	<CtrlSum>	[0..1]	Quantity	
1.5		GroupCancellation	<GrpCxl>	[0..1]	Indicator	
1.6		InitiatingParty	<InitgPty>	[0..1]	+	
1.7		ForwardingAgent	<FwdgAgt>	[0..1]	+	
1.8		DebtorAgent	<DbtrAgt>	[0..1]	+	
1.9		CreditorAgent	<CdtrAgt>	[0..1]	+	
1.10		InstructingAgent	<InstgAgt>	[0..1]	+	
1.11		InstructedAgent	<InstdAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		OriginalGroupInformation	<OrgnlGrpInf>	[1..1]		
2.1		OriginalMessageIdentification	<OrgnlMsgId>	[1..1]	Text	
2.2		OriginalMessageNameIdentification	<OrgnlMsgNmId>	[1..1]	Text	
2.3		OriginalCreationDateTime	<OrgnlCreDtTm>	[0..1]	DateTime	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.4		CancellationReasonInformation	<CxlRsnInf>	[0..n]		
2.5		CancellationOriginator	<CxlOrgtr>	[0..1]	+	
2.6		CancellationReason	<CxlRsn>	[0..1]		
2.7	{Or	Code	<Cd>	[1..1]	Code	
2.8	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.9		AdditionalCancellationReasonInformation	<AddtlCxlRsnInf>	[0..n]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.0		TransactionInformation	<TxInf>	[0..n]		
3.1		CancellationIdentification	<CxlId>	[0..1]	Text	
3.2		OriginalPaymentInformationIdentification	<OrgnlPmtInfId>	[0..1]	Text	
3.3		OriginalInstructionIdentification	<OrgnlInstrId>	[0..1]	Text	
3.4		OriginalEndToEndIdentification	<OrgnlEndToEndId>	[0..1]	Text	
3.5		OriginalTransactionIdentification	<OrgnlTxId>	[0..1]	Text	
3.6		OriginalInterbankSettlementAmount	<OrgnlIntrBkSttlmAmt>	[0..1]	Amount	
3.7		OriginalInstructedAmount	<OrgnlInstdAmt>	[0..1]	Amount	
3.8		InstructingAgent	<InstgAgt>	[0..1]	+	
3.9		InstructedAgent	<InstdAgt>	[0..1]	+	
3.10		CancellationReasonInformation	<CxlRsnInf>	[0..n]		
3.11		CancellationOriginator	<CxlOrgtr>	[0..1]	+	
3.12		CancellationReason	<CxlRsn>	[0..1]		
3.13	{Or	Code	<Cd>	[1..1]	Code	
3.14	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.15		AdditionalCancellationReasonInformation	<AddtlCxlRsnInf>	[0..n]	Text	
3.16		OriginalTransactionReference	<OrgnlTxRef>	[0..1]		
3.17		InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount	
3.18		Amount	<Amt>	[0..1]		
3.19	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount	
3.20	Or}	EquivalentAmount	<EqvtAmt>	[1..1]		
3.21		Amount	<Amt>	[1..1]	Amount	
3.22		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.23		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime	
3.24	{Or	RequestedExecutionDate	<ReqdExctnDt>	[0..1]	DateTime	
3.25	Or}	RequestedCollectionDate	<ReqdColltnDt>	[0..1]	DateTime	
3.26		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
3.27		SettlementInformation	<SttlmInf>	[0..1]		
3.28		SettlementMethod	<SttlmMtd>	[1..1]	Code	
3.29		SettlementAccount	<SttlmAcct>	[0..1]	+	
3.30		ClearingSystem	<ClrSys>	[0..1]		
3.31	{Or	ClearingSystemIdentification	<ClrSysId>	[1..1]	Code	
3.32	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.33		InstructingReimbursementAgent	<InstgRmbrsmntAgt>	[0..1]	+	
3.34		InstructingReimbursementAgentAccount	<InstgRmbrsmntAgtAcct>	[0..1]	+	
3.35		InstructedReimbursementAgent	<InstdRmbrsmntAgt>	[0..1]	+	
3.36		InstructedReimbursementAgentAccount	<InstdRmbrsmntAgtAcct>	[0..1]	+	
3.37		ThirdReimbursementAgent	<ThrdRmbrsmntAgt>	[0..1]	+	
3.38		ThirdReimbursementAgentAccount	<ThrdRmbrsmntAgtAcct>	[0..1]	+	
3.39		PaymentTypeInformation	<PmtTpInf>	[0..1]		
3.40		InstructionPriority	<InstrPrty>	[0..1]	Code	
3.41	{Or	ServiceLevel	<SvcLvl>	[0..1]		
3.42	{{Or	Code	<Cd>	[1..1]	Code	
3.43	Or}}	Proprietary	<Prtry>	[1..1]	Text	
3.44	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code	
3.45		LocalInstrument	<LclInstrm>	[0..1]		
3.46	{Or	Code	<Cd>	[1..1]	Code	
3.47	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.48		SequenceType	<SeqTp>	[0..1]	Code	
3.49		CategoryPurpose	<CtgyPurp>	[0..1]	Code	
3.50		PaymentMethod	<PmtMtd>	[0..1]	Code	
3.51		MandateRelatedInformation	<MndtRltdInf>	[0..1]		
3.52		MandateIdentification	<MndtId>	[0..1]	Text	
3.53		DateOfSignature	<DtOfSgntr>	[0..1]	DateTime	
3.54		AmendmentIndicator	<AmdmntInd>	[0..1]	Indicator	
3.55		AmendmentInformationDetails	<AmdmntInfDtls>	[0..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.56		OriginalMandateIdentification	<OrgnlMndtId>	[0..1]	Text	
3.57		OriginalCreditorSchemeIdentification	<OrgnlCdtrSchmeId>	[0..1]	+	
3.58		OriginalCreditorAgent	<OrgnlCdtrAgt>	[0..1]	+	
3.59		OriginalCreditorAgentAccount	<OrgnlCdtrAgtAcct>	[0..1]	+	
3.60		OriginalDebtor	<OrgnlDbtr>	[0..1]	+	
3.61		OriginalDebtorAccount	<OrgnlDbtrAcct>	[0..1]	+	
3.62		OriginalDebtorAgent	<OrgnlDbtrAgt>	[0..1]	+	
3.63		OriginalDebtorAgentAccount	<OrgnlDbtrAgtAcct>	[0..1]	+	
3.64		OriginalFinalCollectionDate	<OrgnlFnlColltnDt>	[0..1]	DateTime	
3.65		OriginalFrequency	<OrgnlFrqcy>	[0..1]	Code	
3.66		ElectronicSignature	<ElctrncSgntr>	[0..1]	Text	
3.67		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	
3.68		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
3.69		Frequency	<Frqcy>	[0..1]	Code	
3.70		RemittanceInformation	<RmtInf>	[0..1]		
3.71		Unstructured	<Ustrd>	[0..n]	Text	
3.72		Structured	<Strd>	[0..n]		
3.73		ReferredDocumentInformation	<RfrdDocInf>	[0..1]		
3.74		ReferredDocumentType	<RfrdDocTp>	[0..1]		
3.75	{Or	Code	<Cd>	[1..1]	Code	
3.76	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.77		Issuer	<Issr>	[0..1]	Text	
3.78		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text	
3.79		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime	
3.80		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]		
3.81	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount	
3.82	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount	
3.83	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount	
3.84	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount	
3.85	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount	
3.86		CreditorReferenceInformation	<CdtrRefInf>	[0..1]		
3.87		CreditorReferenceType	<CdtrRefTp>	[0..1]		
3.88	{Or	Code	<Cd>	[1..1]	Code	
3.89	Or}	Proprietary	<Prtry>	[1..1]	Text	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.90		Issuer	<Issr>	[0..1]	Text	
3.91		CreditorReference	<CdtrRef>	[0..1]	Text	
3.92		Invoicer	<Invcr>	[0..1]	+	
3.93		Invoicee	<Invcee>	[0..1]	+	
3.94		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text	
3.95		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
3.96		Debtor	<Dbtr>	[0..1]	+	
3.97		DebtorAccount	<DbtrAcct>	[0..1]	+	
3.98		DebtorAgent	<DbtrAgt>	[0..1]	+	
3.99		DebtorAgentAccount	<DbtrAgtAcct>	[0..1]	+	
3.100		CreditorAgent	<CdtrAgt>	[0..1]	+	
3.101		CreditorAgentAccount	<CdtrAgtAcct>	[0..1]	+	
3.102		Creditor	<Cdtr>	[0..1]	+	
3.103		CreditorAccount	<CdtrAcct>	[0..1]	+	
3.104		UltimateCreditor	<UltmtCdtr>	[0..1]	+	

Message Items Description

*The following section identifies the elements of the **PaymentCancellationRequestV01** message.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]
Definition: Set of characteristics shared by all individual transactions included in the message.
Type: *The **GroupHeader** block is composed of the following **GroupHeader7** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		NumberOfTransactions	<NbOfTxs>	[1..1]	Text
1.4		ControlSum	<CtrlSum>	[0..1]	Quantity
1.5		GroupCancellation	<GrpCxl>	[0..1]	Indicator
1.6		InitiatingParty	<InitgPty>	[0..1]	+
1.7		ForwardingAgent	<FwdgAgt>	[0..1]	+
1.8		DebtorAgent	<DbtrAgt>	[0..1]	+
1.9		CreditorAgent	<CdtrAgt>	[0..1]	+
1.10		InstructingAgent	<InstgAgt>	[0..1]	+
1.11		InstructedAgent	<InstdAgt>	[0..1]	+

Guideline(s): GroupCancellationAndNumberOfTransactionsGuideline
If GroupCancellation is true, then NumberOfTransactions equals the number of transactions in the original message.

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the instructing party and sent to the next party in the chain to unambiguously identify the message.

Usage: The instructing party has to make sure that 'MessageIdentification' is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the (group of) cancellation request(s) was created by the instructing party.

Data Type: ISODateTime

1.3 NumberOfTransactions <NbOfTxs>

Presence: [1..1]

Definition: Number of individual transactions contained in the message.

Data Type: Max15NumericText

Format: [0-9]{1,15}

1.4 ControlSum <CtrlSum>

Presence: [0..1]

Definition: Total of all individual amounts included in the message, irrespective of currencies.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

1.5 GroupCancellation <GrpCxl>

Presence: [0..1]

Definition: Indicates whether the cancellation applies to a whole group of transactions or to individual transactions within the original group.

Data Type: *One of the following* ***GroupingIndicator*** *values must be used:*
MeaningWhenTrue: Indicates that there is only one occurrence of the PaymentInformation block and several occurrences of the PaymentTransaction block.
MeaningWhenFalse: Indicates that there is the same number of occurrences of the PaymentInformation block and of the PaymentTransaction block.

1.6 InitiatingParty <InitgPty>

Presence: [0..1]

Definition: Party initiating the payment. In the payment context, this can either be the debtor (in a credit transfer), the creditor (in a direct debit), or the party that initiates the payment on behalf of the debtor or creditor.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

1.7 ForwardingAgent <FwdgAgt>

Presence: [0..1]

Definition: Financial institution that receives the instruction from the initiating party and forwards it to the next agent in the payment chain.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

1.8 DebtorAgent <DbtrAgt>

Presence: [0..1]

Definition: Financial institution servicing an account for the debtor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

1.9 CreditorAgent <CdtrAgt>

Presence: [0..1]

Definition: Financial institution servicing an account for the creditor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

1.10 InstructingAgent <InstgAgt>

Presence: [0..1]

Definition: Agent that instructs the next party in the chain to carry out the (set of) instruction(s).

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

1.11 InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out the (set of) instruction(s).

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.0 OriginalGroupInformation <OrgnlGrpInf>

Presence: [1..1]

Definition: Information concerning the original group of transactions, to which the message refers.

Type: *The **OriginalGroupInformation** block is composed of the following **OriginalGroupInformation4** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		OriginalMessageIdentification	<OrgnlMsgId>	[1..1]	Text
2.2		OriginalMessageNameIdentification	<OrgnlMsgNmId>	[1..1]	Text
2.3		OriginalCreationDateTime	<OrgnlCreDtTm>	[0..1]	DateTime
2.4		CancellationReasonInformation	<CxlRsnInf>	[0..n]	

2.1 OriginalMessageIdentification <OrgnlMsgId>

Presence: [1..1]
Definition: Point to point reference assigned by the original instructing party to unambiguously identify the original group of individual transactions.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.2 OriginalMessageNameIdentification <OrgnlMsgNmId>

Presence: [1..1]
Definition: Specifies the original message name identifier to which the message refers, eg, pacs.003.001.01 or MT103.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.3 OriginalCreationDateTime <OrgnlCreDtTm>

Presence: [0..1]
Definition: Original date and time at which the message was created.
Data Type: ISODateTime

2.4 CancellationReasonInformation <CxlRsnInf>

Presence: [0..n]
Definition: Detailed information on the cancellation reason.
Type: *This message item is composed of the following **CancellationReasonInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.5		CancellationOriginator	<CxlOrgtr>	[0..1]	+
2.6		CancellationReason	<CxlRsn>	[0..1]	
2.9		AdditionalCancellationReasonInformation	<AddtlCxlRsnInf>	[0..n]	Text

2.5 CancellationOriginator <CxlOrgtr>

Presence: [0..1]
Definition: Party issuing the cancellation request.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.6 CancellationReason <CxlRsn>

Presence: [0..1]
Definition: Specifies the reason for the cancellation.
Type: *This message item is composed of one of the following* ***CancellationReason1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.7	{Or	Code	<Cd>	[1..1]	Code
2.8	Or}	Proprietary	<Prtry>	[1..1]	Text

2.7 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.6*** *CancellationReason.*
Definition: Reason for the cancellation request in a coded form.
Data Type: Code
One of the following ***CancellationReason2Code*** *values must be used:*

Code	Name	Definition
AGNT	IncorrectAgent	Agent in the payment workflow is incorrect.
CURR	IncorrectCurrency	Currency of the payment is incorrect.
CUST	RequestedByCustomer	Cancellation requested by the Debtor.
DUPL	DuplicatePayment	Payment is a duplicate of another payment.
SUSP	SuspiciousPayment	Payment is a suspicious payment.
UPAY	UnduePayment	Payment is not justified.

2.8 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***2.6*** *CancellationReason.*
Definition: Reason for the cancellation request not catered for by the available codes.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.9 AdditionalCancellationReasonInformation <AddtlCxlRsnInf>

Presence: [0..n]
Definition: Further details on the cancellation request reason.

Usage: Additional cancellation reason information can be used to further detail the cancellation request reason.

Data Type: Max105Text
Format: maxLength: 105
minLength: 1

3.0 TransactionInformation <TxInf>

Presence: [0..n]

Definition: Information concerning the original transactions, to which the cancellation request message refers.

Type: *The **TransactionInformation** block is composed of the following **PaymentTransactionInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1		CancellationIdentification	<CxlId>	[0..1]	Text
3.2		OriginalPaymentInformationIdentification	<OrgnlPmtInfId>	[0..1]	Text
3.3		OriginalInstructionIdentification	<OrgnlInstrId>	[0..1]	Text
3.4		OriginalEndToEndIdentification	<OrgnlEndToEndId>	[0..1]	Text
3.5		OriginalTransactionIdentification	<OrgnlTxId>	[0..1]	Text
3.6		OriginalInterbankSettlementAmount	<OrgnlIntrBkSttlmAmt>	[0..1]	Amount
3.7		OriginalInstructedAmount	<OrgnlInstdAmt>	[0..1]	Amount
3.8		InstructingAgent	<InstgAgt>	[0..1]	+
3.9		InstructedAgent	<InstdAgt>	[0..1]	+
3.10		CancellationReasonInformation	<CxlRsnInf>	[0..n]	
3.16		OriginalTransactionReference	<OrgnlTxRef>	[0..1]	

3.1 CancellationIdentification <CxlId>

Presence: [0..1]

Definition: Unique and unambiguous identifier of a cancellation request, assigned by an instructing party.

Usage: the cancellation request identification can be used for reconciliation or to link tasks relating to the cancellation request transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.2 OriginalPaymentInformationIdentification <OrgnlPmtInfId>

Presence: [0..1]

Definition: Unique and unambiguous identifier of the original payment information block as assigned by the original sending party.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.3 OriginalInstructionIdentification <OrgnlInstrId>

Presence: [0..1]

Definition: Original unique instruction identification as assigned by an instructing party for an instructed party to unambiguously identify the original instruction.

Usage: the original instruction identification is the original point to point reference used between the instructing party and the instructed party to refer to the original instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.4 OriginalEndToEndIdentification <OrgnlEndToEndId>

Presence: [0..1]

Definition: Original unique identification assigned by the initiating party to unambiguously identify the original transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.5 OriginalTransactionIdentification <OrgnlTxId>

Presence: [0..1]

Definition: Original identification of a transaction, as assigned by the first instructing agent and passed on, unchanged, throughout the entire interbank chain.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.6 OriginalInterbankSettlementAmount <OrgnlIntrBkSttlmAmt>

Presence: [0..1]

Definition: Amount of money transferred between the instructing agent and the instructed agent in the original transaction.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.7 OriginalInstructedAmount <OrgnlInstdAmt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and the creditor, before deduction of charges, expressed in the currency as ordered by the initiating party in the original transaction.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18

CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

3.8 InstructingAgent <InstgAgt>

Presence: [0..1]

Definition: Agent that instructs the next party in the chain to carry out the (set of) instruction(s).

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.9 InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out the (set of) instruction(s).

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.10 CancellationReasonInformation <CxlRsnInf>

Presence: [0..n]

Definition: Detailed information on the cancellation reason.

Type: *This message item is composed of the following **CancellationReasonInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.11		CancellationOriginator	<CxlOrgtr>	[0..1]	+
3.12		CancellationReason	<CxlRsn>	[0..1]	
3.15		AdditionalCancellationReasonInformation	<AddtlCxlRsnInf>	[0..n]	Text

3.11 CancellationOriginator <CxlOrgtr>

Presence: [0..1]

Definition: Party issuing the cancellation request.

Type: *This message item is composed of the following* ***PartyIdentification8*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.12 CancellationReason <CxlRsn>

Presence: [0..1]
Definition: Specifies the reason for the cancellation.
Type: *This message item is composed of one of the following* ***CancellationReason1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.13	{Or	Code	<Cd>	[1..1]	Code
3.14	Or}	Proprietary	<Prtry>	[1..1]	Text

3.13 Code <Cd>

Presence: [1..1]
This message item is part of choice ***3.12*** *CancellationReason.*
Definition: Reason for the cancellation request in a coded form.
Data Type: Code
One of the following ***CancellationReason2Code*** *values must be used:*

Code	Name	Definition
AGNT	IncorrectAgent	Agent in the payment workflow is incorrect.
CURR	IncorrectCurrency	Currency of the payment is incorrect.
CUST	RequestedByCustomer	Cancellation requested by the Debtor.
DUPL	DuplicatePayment	Payment is a duplicate of another payment.
SUSP	SuspiciousPayment	Payment is a suspicious payment.
UPAY	UnduePayment	Payment is not justified.

3.14 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***3.12*** *CancellationReason.*
Definition: Reason for the cancellation request not catered for by the available codes.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.15 AdditionalCancellationReasonInformation <AddtlCxlRsnInf>

Presence: [0..n]
Definition: Further details on the cancellation request reason.

Usage: Additional cancellation reason information can be used to further detail the cancellation request reason.

Data Type: Max105Text
Format: maxLength: 105
minLength: 1

3.16 OriginalTransactionReference <OrgnlTxRef>

Presence: [0..1]
Definition: Set of key elements of the original transaction being referred to.
Type: *This message item is composed of the following **OriginalTransactionReference1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.17		InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount
3.18		Amount	<Amt>	[0..1]	
3.23		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime
3.24	{Or	RequestedExecutionDate	<ReqdExctnDt>	[0..1]	DateTime
3.25	Or}	RequestedCollectionDate	<ReqdColltnDt>	[0..1]	DateTime
3.26		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
3.27		SettlementInformation	<SttlmInf>	[0..1]	
3.39		PaymentTypeInformation	<PmtTpInf>	[0..1]	
3.50		PaymentMethod	<PmtMtd>	[0..1]	Code
3.51		MandateRelatedInformation	<MndtRltdInf>	[0..1]	
3.70		RemittanceInformation	<RmtInf>	[0..1]	
3.95		UltimateDebtor	<UltmtDbtr>	[0..1]	+
3.96		Debtor	<Dbtr>	[0..1]	+
3.97		DebtorAccount	<DbtrAcct>	[0..1]	+
3.98		DebtorAgent	<DbtrAgt>	[0..1]	+
3.99		DebtorAgentAccount	<DbtrAgtAcct>	[0..1]	+
3.100		CreditorAgent	<CdtrAgt>	[0..1]	+
3.101		CreditorAgentAccount	<CdtrAgtAcct>	[0..1]	+
3.102		Creditor	<Cdtr>	[0..1]	+
3.103		CreditorAccount	<CdtrAcct>	[0..1]	+
3.104		UltimateCreditor	<UltmtCdtr>	[0..1]	+

3.17 InterbankSettlementAmount <IntrBkSttlmAmt>

Presence: [0..1]

Definition: Amount of money moved between the instructing agent and the instructed agent.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.18 Amount <Amt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Type: *This message item is composed of one of the following* ***AmountType2Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.19	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount
3.20	Or}	EquivalentAmount	<EqvtAmt>	[1..1]	

3.19 InstructedAmount <InstdAmt>

Presence: [1..1]

This message item is part of choice ***3.18*** *Amount.*

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.20 EquivalentAmount <EqvtAmt>

Presence: [1..1]

This message item is part of choice ***3.18*** *Amount.*

Definition: Amount of money to be transferred between the debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred into a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The debtor agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Type: *This message item is composed of the following **EquivalentAmount** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.21		Amount	<Amt>	[1..1]	Amount
3.22		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code

3.21 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred in a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.22 CurrencyOfTransfer <CcyOfTrf>

Presence: [1..1]

Definition: Specifies the currency of the to be transferred amount, which is different from the currency of the debtor's account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

3.23 InterbankSettlementDate <IntrBkSttlmDt>

Presence: [0..1]

Definition: Date on which the amount of money ceases to be available to the agent that owes it and when the amount of money becomes available to the agent to which it is due.

Data Type: ISODate

3.24 RequestedExecutionDate <ReqdExctnDt>

Presence: [0..1]

*This message item is part of choice **3.16** OriginalTransactionReference.*

Definition: Date at which the initiating party requests that the clearing agent to process the payment. If payment by cheque, the date when the cheque must be generated by the bank.

Usage: This is the date on which the debtor's account(s) is (are) to be debited.

Data Type: ISODate

3.25 RequestedCollectionDate <ReqdColltnDt>

Presence: [0..1]

*This message item is part of choice **3.16** OriginalTransactionReference.*

Definition: Date at which the creditor requests the amount of money to be collected from the debtor.

Data Type: ISODate

3.26 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]

Definition: Credit party that signs the direct debit mandate.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.27 SettlementInformation <SttlmInf>

Presence: [0..1]

Definition: Specifies the details on how the settlement of the original transaction(s) between the instructing agent and the instructed agent was completed.

Type: *This message item is composed of the following **SettlementInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.28		SettlementMethod	<SttlmMtd>	[1..1]	Code
3.29		SettlementAccount	<SttlmAcct>	[0..1]	+
3.30		ClearingSystem	<ClrSys>	[0..1]	
3.33		InstructingReimbursementAgent	<InstgRmbrsmntAgt>	[0..1]	+
3.34		InstructingReimbursementAgentAccount	<InstgRmbrsmntAgtAcct>	[0..1]	+
3.35		InstructedReimbursementAgent	<InstdRmbrsmntAgt>	[0..1]	+
3.36		InstructedReimbursementAgentAccount	<InstdRmbrsmntAgtAcct>	[0..1]	+
3.37		ThirdReimbursementAgent	<ThrdRmbrsmntAgt>	[0..1]	+
3.38		ThirdReimbursementAgentAccount	<ThrdRmbrsmntAgtAcct>	[0..1]	+

3.28 SettlementMethod <SttlmMtd>

Presence: [1..1]
Definition: Method used to settle the (batch of) payment instructions.
Data Type: Code
*One of the following **SettlementMethod1Code** values must be used:*

Code	Name	Definition
CLRG	ClearingSystem	Settlement is done through a payment clearing system.
COVE	CoverMethod	Settlement is done through a cover payment.
INDA	InstructedAgent	Settlement is done by the agent instructed to execute a payment instruction.
INGA	InstructingAgent	Settlement is done by the agent instructing and forwarding the payment to the next party in the payment chain.

3.29 SettlementAccount <SttlmAcct>

Presence: [0..1]
Definition: A specific purpose account used to post debit and credit entries as a result of the transaction.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.30 ClearingSystem <ClrSys>

Presence: [0..1]
Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.
Type: *This message item is composed of one of the following **ClearingSystemIdentification1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.31	{Or	ClearingSystemIdentification	<ClrSysId>	[1..1]	Code
3.32	Or}	Proprietary	<Prtry>	[1..1]	Text

3.31 ClearingSystemIdentification <ClrSysId>

Presence: [1..1]
*This message item is part of choice **3.30** ClearingSystem.*
Definition: Infrastructure through which the payment instruction is processed.

Data Type: Code

*One of the following **CashClearingSystem3Code** values must be used:*

Code	Name	Definition
ABE	EBAEuro1Step1	Scheme code for EBA Euro1/Step1.
AIP	Albania	Scheme code for AL (Albania) - Albania Interbank Payment System.
ART	Austrian	Scheme code for AT (Austria) - Austrian RTGS (ARTIS).
AVP	NewZealand	Scheme code for NZ (New Zealand) - New Zealand Assured Value Payments.
AZM	Azerbaijan	Scheme code for AZ (Azerbaijan) - Azerbaijan Interbank Payment System (AZIPS).
BAP	BosniaHerzegovina	Scheme code for BA (Bosnia and Herzegovina).
BCC	SwedenBGC	Scheme code for SE (Sweden) - Sweden BGC Clearing CUG.
BDS	Barbados	Scheme code for BB (Barbados) - Barbados RTGS (CBRTGS).
BEL	Belgium	Scheme code for BE (Belgium) - Belgium RTGS (ELLIPS).
BGN	Bulgaria	Scheme code for BG (Bulgaria) - Bulgaria RTGS.
BHS	Bahamas	Scheme code for BS (Bahamas) - Bahamas RTGS.
BIS	Botswana	Scheme code for BW (Botswana) - Botswana Interbank Settlement System.
BOF	Finland	Scheme code for FI (Finland) - RTGS (BOF).
BOJ	BankOfJapanNet	Scheme code for the Bank of Japan clearing system.
BRL	Italy	Scheme code for IT (Italy) - Italy RTGS (BIREL).
BSP	Philippines	Scheme code for PH (Philippines) - Philippines Payment System.
CAD	Canada	Scheme code for CA (Canada) - Canadian Large Value Transfer System (LVTS)
CAM	SpainCAM	Scheme code for ES (Spain).
CBJ	Ireland	Scheme code for IE (Ireland) - Irish RTGS (IRIS).
CHI	USChips	CHIPS is the Clearing House Interbank Payment System in the US.
CHP	UnitedKingdom	Scheme code for GB (UK) - British Euro RTGS (CHAPS).
COP	Columbia	Scheme code for Columbia (CO) - Colombian ACH CENIT Central Bank Payment System.
DDK	DenmarkDDK	Scheme code for DK (Denmark) - Danish Krone RTGS (KRONOS)
DKC	Denmark	Scheme code for DK (Denmark) - Danish Euro RTGS (KRONOS)
EBA	EBAEuro1	Scheme code for EBA Euro1.
ELS	GermanyELS	Scheme code for DE (Germany).

Code	Name	Definition
EPM	ECB	Scheme code for ECB (European Central Bank) - ECB Payment Mechanism.
EPN	USChipsACH	Scheme code for the US CHIPS-ACH.
ERP	EBAStep1	Scheme code for EBA step 1 (members).
FDA	USFedACH	Scheme code for the US FED-ACH.
FDW	Fedwire	Scheme code for the US national real time gross settlement system.
FEY	ForeignExchangeYenClearing	Scheme code for the Foreign Exchange Yen Clearing system (FEYCS). It is the Japanese electronic interbank system for sending guaranteed and unconditional yen payments of FX deals for same day settlement from one settlement bank, on behalf of itself or its customers, to another settlement bank.
GIS	Ghana	Scheme code for GH (Ghana) - Ghana Interbank Settlement System (GISS).
HRK	Croatia	Scheme code for HR (Croatia) - HSVP.
HRM	Greece	Scheme code for GR (Greece) - Greek RTGS (HERMES).
HUF	Hungary	Scheme code for HU (Hungary) - VIBER.
INC	NetherlandsIP	Scheme code for NL (Netherlands) - Netherlands Interpay CUG.
JOD	Jordan	Scheme code for JO (Jordan) - Jordan RTGS.
KPS	Kenya	Scheme code for KE (Kenya) - Kenyan Electronic Payment Settlement System.
LGS	Luxemburg	Scheme code for LU (Luxemburg) - Luxembourg RTGS (LIPS).
LKB	SriLanka	Scheme code for LK (Sri Lanka) - Sri Lanka (Lankasettle).
LVL	Latvia	Scheme code for LV (Latvia).
MEP	Singapore	Scheme code for SG (Singapore) - Singapore RTGS (MEPS +).
MOS	SouthAfrica	Scheme code for ZA (South Africa) - South-African Multiple Option Settlement.
MRS	Malta	Scheme code for MT (Malta) - Malta Realtime Interbank Settlement System.
MUP	Mauritius	Scheme code for MU (Mauritius).
NAM	Namibia	Scheme code for NA (Namibian) - Namibian Interbank Settlement System.
NOC	Norway	Scheme code for NO (Norway).
PCH	Switzerland	Scheme code for CH (Switzerland).
PDS	Australia	Scheme code for AU (Australia).
PEG	Egypt	Scheme code for EG (Egypt).
PNS	FrancePNS	Scheme code for FR (France).

Code	Name	Definition
PTR	Angola	Scheme code for AO (Angola) - Angola RTGS.
PVE	Venezuela	Scheme code for Ve (Venezuela).
ROL	RomaniaEPO	Scheme code for RO (Romania) - Romanian Electronic Payment Operations RT.
ROS	RomaniaGSRS	Scheme code for RO (Romania) - Romanian GSRS.
RTP	GermanyRTGSPlus	Scheme code for DE (Germany).
SCP	Chili	Scheme code for CL (Chile) - Chilean Interbank Payment System.
SEC	SwedenSEC	Scheme code for SE (Sweden) - Swedish Euro RTGS (SEC).
SIT	Slovania	Scheme code for SI (Slovenia).
SLB	SpainES	Scheme code for ES (Spain) - Spanish RTGS (SLBE).
SPG	Portugal	Scheme code for PT (Portugal) - Portuguese RTGS (SPGT).
SSK	SwedenSSK	Scheme code for SE (Sweden) - SEK RTGS (RIX).
STG	UnitedKingdomGBP	Scheme code for UK (United Kingdom) - CHAPS Sterling RTGS.
TBF	FranceFR	Scheme code for FR (France) - French RTGS (TBF).
TGT	Target	Scheme code for Target.
THB	Thailand	Scheme code for TH (Thailand) - Thailand Payment System (Bahtnet/2).
TIS	Tanzania	Scheme code for TZ (Tanzania) - Tanzania Interbank Settlement System (TISS).
TOP	Netherlands	Scheme code for NL (Netherlands) - Dutch RTGS (TOP)
TTD	TrinidadAndTobago	Scheme code for TT (Trinidad and Tobago) - Trinidad and Tobago SAFE-TT.
UIS	Uganda	Scheme code for UG (Uganda) - Uganda National Interbank Settlement System.
XCT	EBAStep2	Scheme code for EBA step 2.
ZEN	Zengin	Scheme code for the Zengin system. The electronic payment system for domestic third party transfers managed by the Tokyo Bankers Association.
ZET	Zimbabwe	Scheme code for ZW (Zimbabwe) - Zimbabwe Electronic Transfer & Settlement System.
ZIS	Zambia	Scheme code for ZM (Zambia) - Zambian Interbank Payment &Settlement System.

3.32 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.30** ClearingSystem.*

Definition: Proprietary clearing system service selected for a transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.33 InstructingReimbursementAgent <InstgRmbrsmntAgt>

Presence: [0..1]

Definition: Specifies the agent through which the instructing agent will reimburse the instructed agent.

Usage: If the instructing and instructed agents have the same reimbursement agent, then only InstructingReimbursementAgent must be used.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.34 InstructingReimbursementAgentAccount <InstgRmbrsmntAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the instructing reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.35 InstructedReimbursementAgent <InstdRmbrsmntAgt>

Presence: [0..1]

Definition: Agent at which the instructed agent will be reimbursed.

Usage: If InstructedReimbursementAgent contains a branch of the InstructedAgent, then the instructed agent will claim reimbursement from that branch/will be paid by that branch.

Usage: If InstructingAgent and InstructedAgent have the same reimbursement agent, then only InstructingReimbursementAgent must be used.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.36 InstructedReimbursementAgentAccount <InstdRmbrsmntAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the instructed reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.37 ThirdReimbursementAgent <ThrdRmbrsmntAgt>

Presence: [0..1]

Definition: Specifies the branch of the instructed agent where the amount of money will be made available when different from the instructed reimbursement agent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.38 ThirdReimbursementAgentAccount <ThrdRmbrsmntAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the third reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.39 PaymentTypeInformation <PmtTpInf>

Presence: [0..1]
Definition: Set of elements that further specifies the type of transaction.
Type: *This message item is composed of the following **PaymentTypeInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.40		InstructionPriority	<InstrPrty>	[0..1]	Code
3.41	{Or	ServiceLevel	<SvcLvl>	[0..1]	
3.44	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code
3.45		LocalInstrument	<LclInstrm>	[0..1]	
3.48		SequenceType	<SeqTp>	[0..1]	Code
3.49		CategoryPurpose	<CtgyPurp>	[0..1]	Code

3.40 InstructionPriority <InstrPrty>

Presence: [0..1]
Definition: Indicator of the urgency or order of importance that the instructing party would like the instructed party to apply to the processing of the instruction.
Data Type: Code
*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

3.41 ServiceLevel <SvcLvl>

Presence: [0..1]
*This message item is part of choice **3.39** PaymentTypeInformation.*
Definition: Agreement under which or rules under which the transaction should be processed.
Type: *This message item is composed of one of the following **ServiceLevel2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.42	{Or	Code	<Cd>	[1..1]	Code

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.43	Or}	Proprietary	<Prtry>	[1..1]	Text

3.42 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.41** ServiceLevel.*
Definition: Identification of a pre-agreed level of service between the parties in a coded form.
Data Type: Code
*One of the following **ServiceLevel1Code** values must be used:*

Code	Name	Definition
PRPT	EBAPriorityService	Transaction must be processed according to the EBA Priority Service.
SDVA	SameDayValue	Payment must be executed with same day value to the creditor.
SEPA	SingleEuroPaymentsArea	Payment must be executed following the Single Euro Payments Area scheme.

3.43 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.41** ServiceLevel.*
Definition: Proprietary identification of a pre-agreed level of service between the parties.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.44 ClearingChannel <ClrChanl>

Presence: [0..1]
*This message item is part of choice **3.39** PaymentTypeInformation.*
Definition: Specifies the clearing channel to be used for the settlement of the instruction.
Data Type: Code
*When this message item is present, one of the following **ClearingChannel2Code** values must be used:*

Code	Name	Definition
BOOK	BookTransfer	Payment through internal book transfer.
MPNS	MassPaymentNetSystem	Clearing channel is a mass payment net settlement system.
RTGS	RealTimeGrossSettlementSystem	Clearing channel is a real-time gross settlement system.
RTNS	RealTimeNetSettlementSystem	Clearing channel is a real-time net settlement system.

3.45 LocalInstrument <LclInstrm>

Presence: [0..1]
Definition: User community specific instrument.

Usage : When available, codes provided by local authorities should be used.

Type: *This message item is composed of one of the following **LocalInstrument1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.46	{Or	Code	<Cd>	[1..1]	Code
3.47	Or}	Proprietary	<Prtry>	[1..1]	Text

3.46 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.45** LocalInstrument.*
Definition: Specifies the local instrument published in an external local instrument code list.
Data Type: ExternalLocalInstrumentCode
Format: maxLength: 35
minLength: 1

3.47 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.45** LocalInstrument.*
Definition: Specifies the local instrument as a proprietary code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.48 SequenceType <SeqTp>

Presence: [0..1]
Definition: Identifies the direct debit sequence, eg, first, recurrent, final or one-off.
Data Type: Code
*When this message item is present, one of the following **SequenceType1Code** values must be used:*

Code	Name	Definition
FNAL	Final	Final collection of a series of direct debit instructions.
FRST	First	First collection of a series of direct debit instructions.
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

3.49 CategoryPurpose <CtgyPurp>

Presence: [0..1]
Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.
Data Type: Code
*When this message item is present, one of the following **PaymentCategoryPurpose1Code** values must be used:*

Code	Name	Definition
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CORT	TradeSettlementPayment	Transaction is related to settlement of a trade, eg a foreign exchange deal or a securities transaction.
DIVI	Dividend	Transaction is the payment of dividends.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to the payment of a hedging operation.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is the payment of interest.
LOAN	Loan	Transaction is related to the transfer of a loan to a borrower.
PENS	PensionPayment	Transaction is the payment of pension.
SALA	SalaryPayment	Transaction is the payment of salaries.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes.
TRAD	Trade	Transaction is related to the payment of a trade transaction.
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.
WHLD	WithHolding	Transaction is the payment of withholding tax.

3.50 PaymentMethod <PmtMtd>

Presence: [0..1]
Definition: Specifies the transfer method that will be used by the instructing agent to transfer the funds to the creditor.
Data Type: Code
*When this message item is present, one of the following **PaymentMethod4Code** values must be used:*

Code	Name	Definition
CHK	Cheque	Written order to a bank to pay a certain amount of money from one person to another person.

Code	Name	Definition
DD	DirectDebit	Collection of an amount of money from the debtor's bank account by the creditor. The amount of money and dates of collections may vary.
TRA	TransferAdvice	Transfer of an amount of money in the books of the account servicer. An advice should be sent back to the account owner.
TRF	CreditTransfer	Transfer of an amount of money in the books of the account servicer.

3.51 MandateRelatedInformation <MndtRltdInf>

Presence: [0..1]

Definition: Set of elements used to provide further details related to a direct debit mandate signed between the creditor and the debtor.

Usage: Mandate related information is to be used only when the direct debit relates to a mandate signed between the debtor and the creditor.

Type: *This message item is composed of the following **MandateRelatedInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.52		MandateIdentification	<MndtId>	[0..1]	Text
3.53		DateOfSignature	<DtOfSgntr>	[0..1]	DateTime
3.54		AmendmentIndicator	<AmdmntInd>	[0..1]	Indicator
3.55		AmendmentInformationDetails	<AmdmntInfDtls>	[0..1]	
3.66		ElectronicSignature	<ElctrncSgntr>	[0..1]	Text
3.67		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
3.68		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime
3.69		Frequency	<Frqcy>	[0..1]	Code

Rule(s): AmendmentIndicatorRule
If AmendmentIndicator is true, then AmendementInformationDetails must be present, with amended mandate information.

If AmendmentIndicator is false, then AmendmentInformationDetails is not allowed.

3.52 MandateIdentification <MndtId>

Presence: [0..1]

Definition: Reference of the direct debit mandate that has been signed between by the debtor and the creditor.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.53 DateOfSignature <DtOfSgntr>

Presence: [0..1]
Definition: Date on which the direct debit mandate has been signed by the debtor.
Data Type: ISODate

3.54 AmendmentIndicator <AmdmntInd>

Presence: [0..1]
Definition: Indicator notifying whether the underlying mandate is amended or not.
Data Type: *One of the following **TrueFalseIndicator** values must be used:*
MeaningWhenTrue: True
MeaningWhenFalse: False

3.55 AmendmentInformationDetails <AmdmntInfDtls>

Presence: [0..1]
Definition: List of direct debit mandate elements that have been modified.
Type: *This message item is composed of the following **AmendmentInformationDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.56		OriginalMandateIdentification	<OrgnlMndtId>	[0..1]	Text
3.57		OriginalCreditorSchemeIdentification	<OrgnlCdtrSchmeId>	[0..1]	+
3.58		OriginalCreditorAgent	<OrgnlCdtrAgt>	[0..1]	+
3.59		OriginalCreditorAgentAccount	<OrgnlCdtrAgtAcct>	[0..1]	+
3.60		OriginalDebtor	<OrgnlDbtr>	[0..1]	+
3.61		OriginalDebtorAccount	<OrgnlDbtrAcct>	[0..1]	+
3.62		OriginalDebtorAgent	<OrgnlDbtrAgt>	[0..1]	+
3.63		OriginalDebtorAgentAccount	<OrgnlDbtrAgtAcct>	[0..1]	+
3.64		OriginalFinalCollectionDate	<OrgnlFnlColltnDt>	[0..1]	DateTime
3.65		OriginalFrequency	<OrgnlFrqcy>	[0..1]	Code

3.56 OriginalMandateIdentification <OrgnlMndtId>

Presence: [0..1]
Definition: Original mandate identification that has been modified.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.57 OriginalCreditorSchemeIdentification <OrgnlCdtrSchmeId>

Presence: [0..1]
Definition: Original creditor scheme identification that has been modified.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.58 OriginalCreditorAgent <OrgnlCdtrAgt>

Presence: [0..1]
Definition: Original creditor agent that has been modified.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.59 OriginalCreditorAgentAccount <OrgnlCdtrAgtAcct>

Presence: [0..1]
Definition: Original creditor agent acount that has been modified.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.60 OriginalDebtor <OrgnlDbtr>

Presence: [0..1]
Definition: Original debtor that has been modified.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.61 OriginalDebtorAccount <OrgnlDbtrAcct>

Presence: [0..1]
Definition: Original debtor account that has been modified.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.62 OriginalDebtorAgent <OrgnlDbtrAgt>

Presence: [0..1]
Definition: Original debtor's agent that has been modified.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.63 OriginalDebtorAgentAccount <OrgnlDbtrAgtAcct>

Presence: [0..1]
Definition: Original debtor agent account that has been modified.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.64 OriginalFinalCollectionDate <OrgnlFnlColltnDt>

Presence: [0..1]
Definition: Original final collection date that has been modified.
Data Type: ISODate

3.65 OriginalFrequency <OrgnlFrqcy>

Presence: [0..1]
Definition: Original frequency that has been modified.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

3.66 ElectronicSignature <ElctrncSgntr>

Presence: [0..1]
Definition: Additional security provisions, eg, digital signature as provided by the debtor.
Data Type: Max1025Text
Format: maxLength: 1025
minLength: 1

3.67 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.
Data Type: ISODate

3.68 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.

Data Type: ISODate

3.69 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which direct debit instructions are to be created and processed, eg, daily, weekly, monthly.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

3.70 RemittanceInformation <RmtInf>

Presence: [0..1]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system.
Type: *This message item is composed of the following **RemittanceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.71		Unstructured	<Ustrd>	[0..n]	Text
3.72		Structured	<Strd>	[0..n]	

3.71 Unstructured <Ustrd>

Presence: [0..n]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in an unstructured form.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.72 Structured <Strd>

Presence: [0..n]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in a structured form.
Type: *This message item is composed of the following **StructuredRemittanceInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.73		ReferredDocumentInformation	<RfrdDocInf>	[0..1]	
3.79		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime
3.80		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]	
3.86		CreditorReferenceInformation	<CdtrRefInf>	[0..1]	
3.92		Invoicer	<Invcr>	[0..1]	+
3.93		Invoicee	<Invcee>	[0..1]	+
3.94		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text

3.73 ReferredDocumentInformation <RfrdDocInf>

Presence: [0..1]
Definition: Reference information to allow the identification of the underlying reference documents.
Type: *This message item is composed of the following **ReferredDocumentInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.74		ReferredDocumentType	<RfrdDocTp>	[0..1]	
3.78		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text

3.74 ReferredDocumentType <RfrdDocTp>

Presence: [0..1]
Definition: Provides the type of the referred document.
Type: *This message item is composed of the following **ReferredDocumentType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.75	{Or	Code	<Cd>	[1..1]	Code
3.76	Or}	Proprietary	<Prtry>	[1..1]	Text
3.77		Issuer	<Issr>	[0..1]	Text

3.75 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.74** ReferredDocumentType.*
Definition: Document type in a coded form.
Data Type: Code
*One of the following **DocumentType2Code** values must be used:*

Code	Name	Definition
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.

Code	Name	Definition
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.

3.76 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.74** ReferredDocumentType.*

Definition: Proprietary identification of the type of the remittance document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.77 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the reference document type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.78 ReferredDocumentNumber <RfrdDocNb>

Presence: [0..1]

Definition: Unique and unambiguous identification number of the referred document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.79 ReferredDocumentRelatedDate <RfrdDocRltdDt>

Presence: [0..1]

Definition: Date associated with the referred document, eg, date of issue.

Data Type: ISODate

3.80 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..n]

Definition: Amount of money and currency of a document referred to in the remittance section. The amount is typically either the original amount due and payable, or the amount actually remitted for the referred document.

Type: *This message item is composed of one of the following **ReferredDocumentAmount1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.81	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount
3.82	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount
3.83	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount
3.84	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount
3.85	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount

3.81 DuePayableAmount <DuePyblAmt>

Presence: [1..1]

*This message item is part of choice **3.80** ReferredDocumentAmount.*

Definition: Amount specified is the exact amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.82 DiscountAppliedAmount <DscntApldAmt>

Presence: [1..1]

*This message item is part of choice **3.80** ReferredDocumentAmount.*

Definition: Amount of money resulting from the application of an agreed discount to the amount due and payable to the creditor.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.83 RemittedAmount <RmtdAmt>

Presence: [1..1]

*This message item is part of choice **3.80** ReferredDocumentAmount.*

Definition: Amount of money remitted for the referred document.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.84 CreditNoteAmount <CdtNoteAmt>

Presence: [1..1]

*This message item is part of choice **3.80** ReferredDocumentAmount.*

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.85 TaxAmount <TaxAmt>

Presence: [1..1]

*This message item is part of choice **3.80** ReferredDocumentAmount.*

Definition: Quantity of cash resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.86 CreditorReferenceInformation <CdtrRefInf>

Presence: [0..1]
Definition: Reference information provided by the creditor to allow the identification of the underlying documents.
Type: *This message item is composed of the following* ***CreditorReferenceInformation1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.87		CreditorReferenceType	<CdtrRefTp>	[0..1]	
3.91		CreditorReference	<CdtrRef>	[0..1]	Text

3.87 CreditorReferenceType <CdtrRefTp>

Presence: [0..1]
Definition: Provides the type of the creditor reference.
Type: *This message item is composed of the following* ***CreditorReferenceType1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.88	{Or	Code	<Cd>	[1..1]	Code
3.89	Or}	Proprietary	<Prtry>	[1..1]	Text
3.90		Issuer	<Issr>	[0..1]	Text

3.88 Code <Cd>

Presence: [1..1]
This message item is part of choice ***3.87*** *CreditorReferenceType.*
Definition: Coded creditor reference type.
Data Type: Code
One of the following ***DocumentType3Code*** *values must be used:*

Code	Name	Definition
DISP	DispatchAdvice	Document is a dispatch advice.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
PUOR	PurchaseOrder	Document is a purchase order.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.
SCOR	StructuredCommunicationReference	Document is a structured communication reference provided by the creditor to identify the referred transaction.

3.89 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.87** CreditorReferenceType.*
Definition: Creditor reference type not avilable in a coded format.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.90 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the credit reference type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.91 CreditorReference <CdtrRef>

Presence: [0..1]
Definition: Unique and unambiguous reference assigned by the creditor to refer to the payment transaction.

Usage: if available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the cash.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.92 Invoicer <Invcr>

Presence: [0..1]
Definition: Identification of the organization issuing the invoice when different than the creditor or final party.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.93 Invoicee <Invcee>

Presence: [0..1]

Definition: Identification of the party to whom an invoice is issued, when different than the originator or debtor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.94 AdditionalRemittanceInformation <AddtlRmtInf>

Presence: [0..1]
Definition: Additional information, in free text form, to complement the structured remittance information.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.95 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.96 Debtor <Dbtr>

Presence: [0..1]
Definition: Party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.97 DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor to which a debit entry will be made as a result of the transaction.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.98 DebtorAgent <DbtrAgt>

Presence: [0..1]

Definition: Financial institution servicing an account for the debtor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.99 DebtorAgentAccount <DbtrAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor agent at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.100 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.101 CreditorAgentAccount <CdtrAgtAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor agent at its servicing agent in the payment chain.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.102 Creditor <Cdtr>

Presence: [0..1]
Definition: Party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.103 CreditorAccount <CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.104 UltimateCreditor <UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

Business Example - Request to cancel a CustomerCreditTransferInitiation

Narrative

After sending the payment initiation ABC Corporation realizes that a mistake was made in relation to the third transaction included in the payment initiation :
3. *An invoice with number 987-AC, dated 27 September 2006 from their branch ABC Corporation, California: 1 million USD needs to be paid on the branch account 4895623 with BBBB Bank, San Francisco (BBBBUS66). ABC assigns a reference ABC/987-AC/2006-09-27 to the payment. Charges are shared*
As this invoice is only to be paid with the October payment cycle ABC Corporations decides to request cancellation for this instruction.
Notes :
1. the original CustomerCreditTransferInitiation sent by ABC Corporation to BBBBUS33 is documented in the business example section of the CustomerCreditTransferInitiation message.
2. the reply given by BBBBUS33 to ABC Corporation is documented in the business example section of the PaymentStatusReport message.

Business Description

PaymentCancellationRequest from ABC Corporation to BBBBUS33 :

Element	*<XMLTag>*	*Content*

Group Header	<GrpHdr>	
MessageIdentification	<MsgId>	ABC/060928/PCR001
CreationDateTime	<CreDtTm>	2006-09-28T15:07:00
NumberOfTransactions	<NbOfTxs>	1
GroupCancellation	<GrpCxl>	FALSE
InitiatingParty	<InitgPty>	
Name	<Nm>	ABC Corporation
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Times Square
BuildingNumber	<BldgNb>	7
PostCode	<PstCd>	NY 10036
TownName	<TwnNm>	New York
Country	<Ctry>	US
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBUS33
OriginalGroupInformation	<OrgnlGrpInf>	
OriginalMessageIdentification	<OrgnlMsgId>	ABC/060928/CCT001
OriginalMessageNameIdentification	<OrgnlMsgNmId>	pain.001.001.02
OriginalCreationDateTime	<OrgnlCreDtTm>	2006-09-28T14:07:00
TransactionInformation	<TxInf>	
CancellationIdentification	<CxlId>	ABC/060928/PCR001/1
OriginalInstructionIdentification	<OrgnlInstrId>	ABC/060928/CCT001/3
OriginalEndToEndIdentification	<OrgnlEndToEndId>	ABC/987-AC/2006-09-27
OriginalInstructedAmount	<OrgnlInstdAmt>Ccy=USD	1000000.00
CancellationReasonInformation	<CxlRsnInf>	
CancellationOriginator	<CxlOrgtr>	
Name	<Name>	ABC Corporation
CancellationReason	<CxlRsn>	
Code	<Cd>	UPAY
OriginalTransactionReference	<OrgnlTxRef>	
Amount	<Amt>	
InstructedAmount	<InstdAmt>Ccy=USD	1000000.00
RequestedExecutionDate	<ReqdExctnDt>	2006-09-29
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBUS66

Creditor	<Cdtr>	
Name	<Nm>	ABC Corporation
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Bush Street
BuildingNumber	<BldgNb>	13
PostCode	<PstCd>	CA 94108
TownName	<TwnNm>	San Francisco
Country	<Ctry>	US
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
ProprietaryAccount	<PrtryAcct>	
Identification	<Id>	4895623

XML Instance


```
<pain.006.001.01>
    <GrpHdr>
      <MsgId>ABC/060928/PCR001</MsgId>
      <CreDtTm>2006-09-28T15:07:00</CreDtTm>
      <NbOfTxs>1</NbOfTxs>
      <GrpCxl>false</GrpCxl>
      <InitgPty>
        <Nm>ABC Corporation</Nm>
        <PstlAdr>
          <StrtNm>Times Square</StrtNm>
          <BldgNb>7</BldgNb>
          <PstCd>NY 10036</PstCd>
          <TwnNm>New York</TwnNm>
          <Ctry>US</Ctry>
        </PstlAdr>
      </InitgPty>
      <DbtrAgt>
        <FinInstnId>
          <BIC>BBBBUS33</BIC>
        </FinInstnId>
      </DbtrAgt>
    </GrpHdr>
    <OrgnlGrpInf>
      <OrgnlMsgId>ABC/060928/CCT001</OrgnlMsgId>
      <OrgnlMsgNmId>pain.001.001.02</OrgnlMsgNmId>
      <OrgnlCreDtTm>2006-09-28T14:07:00</OrgnlCreDtTm>
    </OrgnlGrpInf>
    <TxInf>
      <CxlId>ABC/060928/PCR001/1</CxlId>
      <OrgnlInstrId>ABC/060928/CCT001/3</OrgnlInstrId>
      <OrgnlEndToEndId>ABC/987-AC/2006-09-27</OrgnlEndToEndId>
```

```
        <OrgnlInstdAmt Ccy = "USD">1000000</OrgnlInstdAmt>
        <CxlRsnInf>
          <CxlOrgtr>
            <Nm>ABC Corporation</Nm>
          </CxlOrgtr>
          <CxlRsn>
            <Cd>UPAY</Cd>
          </CxlRsn>
        </CxlRsnInf>
        <OrgnlTxRef>
          <Amt>
            <InstdAmt Ccy = "USD">1000000</InstdAmt>
          </Amt>
          <ReqdExctnDt>2006-09-29</ReqdExctnDt>
          <CdtrAgt>
            <FinInstnId>
              <BIC>BBBBUS66</BIC>
            </FinInstnId>
          </CdtrAgt>
          <Cdtr>
            <Nm>ABC Corporation</Nm>
            <PstlAdr>
              <StrtNm>Times Square</StrtNm>
              <BldgNb>7</BldgNb>
              <PstCd>NY 10036</PstCd>
              <TwnNm>New York</TwnNm>
              <Ctry>US</Ctry>
            </PstlAdr>
          </Cdtr>
          <CdtrAcct>
            <Id>
              <PrtryAcct>
                <Id>4895623</Id>
              </PrtryAcct>
            </Id>
          </CdtrAcct>
        </OrgnlTxRef>
      </TxInf>
    </pain.006.001.01>
```


Business Example - Request to cancel a CustomerDirectDebitInitiation

Narrative

On 27 June 2006, at 14:28, Virgay insurance company wishes to cancel one of the instructions included in a CustomerDirectDebitInitiation message it sent earlier that day to its account servicer AAAAUS29. The original message identification is CAVAY1234, the End-to-End Identification of the instruction to be cancelled is VA060327/0123.
The instruction was for a collection of USD 1025, from account 123456, owned by debtor Jones and serviced by agent BBBBUS39. The reason for the cancellation request is a duplicated instruction.
Notes :

1. in its turn, AAAAUS29 will send a Payment CancellationRequest to the next party in the chain. This example is included in the business example section of the PaymentCancellationRequest message in the Payments Clearing and Settlement Message Reference Guide.
2. the CustomerDirectDebitInitiation from Virgay to AAAAUS29 is documented in the business example section of the CustomerDirectDebitInitiation message.

Business Description

PaymentCancellationRequest from Virgay to AAAAUS29 :

Element	***<XMLTag>***	***Content***
Group Header	<GrpHdr>	
MessageIdentification	<MsgId>	CAVAY-CAN234F
CreationDateTime	<CreDtTm>	2006-06-27T=14:28:00
NumberOfTransactions	<NbOfTxs>	1
GroupCancellation	<GrpCxl>	false
InitiatingParty	<InitgPty>	
Name	<Nm>	Virgay
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Virginia Lane
BuildingNumber	<BldgNb>	36
PostCode	<PstCd>	NJ 07311
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAAUS29
Original Group Information	<OrgnlGrpInf>	
OriginalMessageIdentification	<OrgnlMsgId>	CAVAY1234
OriginalMessageNameIdentification	<OrgnlMsgNmId>	Pain.008.001.01
OriginalCreationDateTime	<OrgnlCreDtTm>	2006-06-27T14:25:00
TransactionInformation	<TxInf>	
CancellationIdentification	<CxlId>	VG-CAN-34306
OriginalEndtoEndIdentification	<OrgnlEndToEndId>	VA060327/0123
OriginalInstructedAmount	<OrgnlInstdAmtCCy = USD>	1025.00
CancellationReasonInformation		
CancellationReason	<CxlRsn>	
Code	<Cd>	DUPL
OriginalTransactionReference	<OrgnlTxRef>	
RequestedCollectionDate	<ReqColltnDt>	2006-07-03
MandateRelatedInformation	<MndtRltInf>	

MandateIdentification	<MndtId>	VIRGAY123
Debtor	<Dbtr>	
Name	<Nm>	Jones
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Hudson Street
BuildingNumber	<BldgNb>	19
PostCode	<PstCd>	NJ 07302
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
Creditor	<Dbtr>	
Name	<Nm>	Virgay
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Virginia Lane
BuildingNumber	<BldgNb>	36
PostCode	<PstCd>	NJ 07311
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US

XML Instance

```
<pain.006.001.01>
  <GrpHdr>
    <MsgId>CAVAY-CAN234F</MsgId>
    <CreDtTm>2006-06-27T14:28:00</CreDtTm>
    <NbOfTxs>1</NbOfTxs>
    <GrpCxl>false</GrpCxl>
    <InitgPty>
      <Nm>Virgay</Nm>
      <PstlAdr>
        <StrtNm>Virginia Lane</StrtNm>
        <BldgNb>36</BldgNb>
        <PstCd>NJ 07311</PstCd>
        <TwnNm>Jersey City</TwnNm>
        <Ctry>US</Ctry>
      </PstlAdr>
    </InitgPty>
    <CdtrAgt>
      <FinInstnId>
        <BIC>AAAAUS29</BIC>
      </FinInstnId>
    </CdtrAgt>
  </GrpHdr>
  <OrgnlGrpInf>
    <OrgnlMsgId>CAVAY1234</OrgnlMsgId>
```

```
        <OrgnlMsgNmId>Pain.008.001.01</OrgnlMsgNmId>
        <OrgnlCreDtTm>2006-06-27T14:25:00</OrgnlCreDtTm>
      </OrgnlGrpInf>
      <TxInf>
        <CxlId>VG-CAN-34306</CxlId>
        <OrgnlEndToEndId>VA060327/0123</OrgnlEndToEndId>
        <OrgnlInstdAmt Ccy = "USD">1025.00</OrgnlInstdAmt>
        <CxlRsnInf>
          <CxlRsn>
            <Cd>DUPL</Cd>
          </CxlRsn>
        </CxlRsnInf>
        <OrgnlTxRef>
          <ReqdColltnDt>2006-07-03</ReqdColltnDt>
          <MndtRltdInf>
            <MndtId>VIRGAY123</MndtId>
          </MndtRltdInf>
          <Dbtr>
            <Nm>Jones</Nm>
            <PstlAdr>
              <StrtNm>Hudston Street</StrtNm>
              <BldgNb>19</BldgNb>
              <PstCd>NJ 07302</PstCd>
              <TwnNm>Jersey City</TwnNm>
              <Ctry>US</Ctry>
            </PstlAdr>
          </Dbtr>
          <Cdtr>
            <Nm>Virgay</Nm>
            <PstlAdr>
              <StrtNm>Virginia Lane</StrtNm>
              <BldgNb>36</BldgNb>
              <PstCd>NJ07311</PstCd>
              <TwnNm>Jersey City</TwnNm>
              <Ctry>US</Ctry>
            </PstlAdr>
          </Cdtr>
        </OrgnlTxRef>
      </TxInf>
    </pain.006.001.01>
```

Message: PaymentStatusReportV02 <pain.002.001.02>

Message Scope and Usage

Scope

The PaymentStatusReport message is sent by an instructed agent to the previous party in the payment chain. It is used to inform this party about the positive or negative status of an instruction (either single or file). It is also used to report on a pending instruction.

Usage

The PaymentStatusReport message is exchanged between an agent and a non-financial institution customer to provide status information on instructions previously sent. Its usage will always be governed by a bilateral agreement between the agent and the non-financial institution customer.

The PaymentStatusReport message can be used to provide information about the status (e.g. rejection, acceptance) of the initiation of a credit transfer, a direct debit, as well as on the initiation of other customer instructions (e.g. PaymentCancellationRequest).

The PaymentStatusReport message refers to the original instruction(s) by means of references only or by means of references and a set of elements from the original instruction.

The PaymentStatusReport message can be used in domestic and cross-border scenarios.

The PaymentStatusReport message exchanged between agents and non-financial institution customers is identified in the schema as follows: urn:iso:std:iso:20022:tech:xsd: **pain.002.001.02**

Outline

The PaymentStatusReport message is composed of 3 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime.

B. Original Group Information and Status

This building block is mandatory and present once. It contains elements such as OriginalMessageIdentification, OriginalMessageNameIdentification, GroupStatus.

C. Transaction Information and Status

This building block is optional and repetitive. It contains elements referencing the original instruction (e.g. OriginalEndToEndIdentification), elements relating to the PaymentStatusReport (e.g. StatusReasonInformation). The TransactionInformationAndStatus block may also transport a set of elements from the original instruction.

Rules

GroupAndTransactionStatus1Rule
If OriginalGroupInformationAndStatus/GroupStatus is present and is equal to ACTC, ACCP, ACSP, ACSC, ACCR or ACWC, then TransactionInformationAndStatus/TransactionStatus must be different from RJCT.

GroupAndTransactionStatus2Rule

If OriginalGroupInformationAndStatus/GroupStatus is present and is equal to PDNG, then TransactionInformationAndStatus/TransactionStatus must be different from RJCT.

GroupAndTransactionStatus3Rule
If OriginalGroupInformationAndStatus/GroupStatus is present and is equal to RJCT, then TransactionInformationAndStatus/TransactionStatus must be different from ACTC, ACCP, ACSP, ACSC, ACCR, ACWC or PDNG.

GroupAndTransactionStatus4Rule
If OriginalGroupInformationAndStatus/GroupStatus is present and is equal to RCVD, then TransactionInformationAndStatus/TransactionStatus is not allowed.

InstructedAgentRule
GroupHeader/InstructedAgent is not allowed.

InstructingAgentRule
GroupHeader/InstructingAgent is not allowed.

Note : Rules applying to specific message components or message elements are included in the description of the relevant message component or message element.

Message Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		InitiatingParty	<InitgPty>	[0..1]	+	
1.4		ForwardingAgent	<FwdgAgt>	[0..1]	+	
1.5		DebtorAgent	<DbtrAgt>	[0..1]	+	
1.6		CreditorAgent	<CdtrAgt>	[0..1]	+	
1.7		InstructingAgent	<InstgAgt>	[0..1]	+	
1.8		InstructedAgent	<InstdAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		OriginalGroupInformationAndStatus	<OrgnlGrpInfAndSts>	[1..1]		
2.1	{Or	OriginalMessageIdentification	<OrgnlMsgId>	[1..1]	Text	
2.2	Or}	NetworkFileName	<NtwkFileNm>	[1..1]	Text	
2.3		OriginalMessageNameIdentification	<OrgnlMsgNmId>	[1..1]	Text	
2.4		OriginalCreationDateTime	<OrgnlCreDtTm>	[0..1]	DateTime	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.5		FileOriginator	<FileOrgtr>	[0..1]	Text	
2.6		OriginalNumberOfTransactions	<OrgnlNbOfTxs>	[0..1]	Text	
2.7		OriginalControlSum	<OrgnlCtrlSum>	[0..1]	Quantity	
2.8		GroupStatus	<GrpSts>	[0..1]	Code	
2.9		StatusReasonInformation	<StsRsnInf>	[0..n]		
2.10		StatusOriginator	<StsOrgtr>	[0..1]	+	
2.11		StatusReason	<StsRsn>	[0..1]		
2.12	{Or	Code	<Cd>	[1..1]	Code	
2.13	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.14		AdditionalStatusReasonInformation	<AddtlStsRsnInf>	[0..n]	Text	
2.15		NumberOfTransactionsPerStatus	<NbOfTxsPerSts>	[0..n]		
2.16		DetailedNumberOfTransactions	<DtldNbOfTxs>	[1..1]	Text	
2.17		DetailedStatus	<DtldSts>	[1..1]	Code	
2.18		DetailedControlSum	<DtldCtrlSum>	[0..1]	Quantity	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.0		TransactionInformationAndStatus	<TxInfAndSts>	[0..n]		
3.1		StatusIdentification	<StsId>	[0..1]	Text	
3.2		OriginalPaymentInformationIdentification	<OrgnlPmtInfId>	[0..1]	Text	
3.3		OriginalInstructionIdentification	<OrgnlInstrId>	[0..1]	Text	
3.4		OriginalEndToEndIdentification	<OrgnlEndToEndId>	[0..1]	Text	
3.5		OriginalTransactionIdentification	<OrgnlTxId>	[0..1]	Text	
3.6		TransactionStatus	<TxSts>	[0..1]	Code	
3.7		StatusReasonInformation	<StsRsnInf>	[0..n]		
3.8		StatusOriginator	<StsOrgtr>	[0..1]	+	
3.9		StatusReason	<StsRsn>	[0..1]		
3.10	{Or	Code	<Cd>	[1..1]	Code	
3.11	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.12		AdditionalStatusReasonInformation	<AddtlStsRsnInf>	[0..n]	Text	
3.13		ChargesInformation	<ChrgsInf>	[0..n]	+	
3.14		AcceptanceDateTime	<AccptncDtTm>	[0..1]	DateTime	
3.15		InstructingAgent	<InstgAgt>	[0..1]	+	
3.16		InstructedAgent	<InstdAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.17		OriginalTransactionReference	<OrgnlTxRef>	[0..1]		
3.18		InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount	
3.19		Amount	<Amt>	[0..1]		
3.20	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount	
3.21	Or}	EquivalentAmount	<EqvtAmt>	[1..1]		
3.22		Amount	<Amt>	[1..1]	Amount	
3.23		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code	
3.24		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime	
3.25	{Or	RequestedExecutionDate	<ReqdExctnDt>	[0..1]	DateTime	
3.26	Or}	RequestedCollectionDate	<ReqdColltnDt>	[0..1]	DateTime	
3.27		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
3.28		SettlementInformation	<SttlmInf>	[0..1]		
3.29		SettlementMethod	<SttlmMtd>	[1..1]	Code	
3.30		SettlementAccount	<SttlmAcct>	[0..1]	+	
3.31		ClearingSystem	<ClrSys>	[0..1]		
3.32	{Or	ClearingSystemIdentification	<ClrSysId>	[1..1]	Code	
3.33	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.34		InstructingReimbursementAgent	<InstgRmbrsmntAgt>	[0..1]	+	
3.35		InstructingReimbursementAgentAccount	<InstgRmbrsmntAgtAcct>	[0..1]	+	
3.36		InstructedReimbursementAgent	<InstdRmbrsmntAgt>	[0..1]	+	
3.37		InstructedReimbursementAgentAccount	<InstdRmbrsmntAgtAcct>	[0..1]	+	
3.38		ThirdReimbursementAgent	<ThrdRmbrsmntAgt>	[0..1]	+	
3.39		ThirdReimbursementAgentAccount	<ThrdRmbrsmntAgtAcct>	[0..1]	+	
3.40		PaymentTypeInformation	<PmtTpInf>	[0..1]		
3.41		InstructionPriority	<InstrPrty>	[0..1]	Code	
3.42	{Or	ServiceLevel	<SvcLvl>	[0..1]		
3.43	{{Or	Code	<Cd>	[1..1]	Code	
3.44	Or}}	Proprietary	<Prtry>	[1..1]	Text	
3.45	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code	
3.46		LocalInstrument	<LclInstrm>	[0..1]		
3.47	{Or	Code	<Cd>	[1..1]	Code	
3.48	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.49		SequenceType	<SeqTp>	[0..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.50		CategoryPurpose	<CtgyPurp>	[0..1]	Code	
3.51		PaymentMethod	<PmtMtd>	[0..1]	Code	
3.52		MandateRelatedInformation	<MndtRltdInf>	[0..1]		
3.53		MandateIdentification	<MndtId>	[0..1]	Text	
3.54		DateOfSignature	<DtOfSgntr>	[0..1]	DateTime	
3.55		AmendmentIndicator	<AmdmntInd>	[0..1]	Indicator	
3.56		AmendmentInformationDetails	<AmdmntInfDtls>	[0..1]		
3.57		OriginalMandateIdentification	<OrgnlMndtId>	[0..1]	Text	
3.58		OriginalCreditorSchemeIdentification	<OrgnlCdtrSchmeId>	[0..1]	+	
3.59		OriginalCreditorAgent	<OrgnlCdtrAgt>	[0..1]	+	
3.60		OriginalCreditorAgentAccount	<OrgnlCdtrAgtAcct>	[0..1]	+	
3.61		OriginalDebtor	<OrgnlDbtr>	[0..1]	+	
3.62		OriginalDebtorAccount	<OrgnlDbtrAcct>	[0..1]	+	
3.63		OriginalDebtorAgent	<OrgnlDbtrAgt>	[0..1]	+	
3.64		OriginalDebtorAgentAccount	<OrgnlDbtrAgtAcct>	[0..1]	+	
3.65		OriginalFinalCollectionDate	<OrgnlFnlColltnDt>	[0..1]	DateTime	
3.66		OriginalFrequency	<OrgnlFrqcy>	[0..1]	Code	
3.67		ElectronicSignature	<ElctrncSgntr>	[0..1]	Text	
3.68		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	
3.69		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
3.70		Frequency	<Frqcy>	[0..1]	Code	
3.71		RemittanceInformation	<RmtInf>	[0..1]		
3.72		Unstructured	<Ustrd>	[0..n]	Text	
3.73		Structured	<Strd>	[0..n]		
3.74		ReferredDocumentInformation	<RfrdDocInf>	[0..1]		
3.75		ReferredDocumentType	<RfrdDocTp>	[0..1]		
3.76	{Or	Code	<Cd>	[1..1]	Code	
3.77	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.78		Issuer	<Issr>	[0..1]	Text	
3.79		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text	
3.80		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime	
3.81		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]		
3.82	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount	
3.83	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.84	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount	
3.85	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount	
3.86	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount	
3.87		CreditorReferenceInformation	<CdtrRefInf>	[0..1]		
3.88		CreditorReferenceType	<CdtrRefTp>	[0..1]		
3.89	{Or	Code	<Cd>	[1..1]	Code	
3.90	Or}	Proprietary	<Prtry>	[1..1]	Text	
3.91		Issuer	<Issr>	[0..1]	Text	
3.92		CreditorReference	<CdtrRef>	[0..1]	Text	
3.93		Invoicer	<Invcr>	[0..1]	+	
3.94		Invoicee	<Invcee>	[0..1]	+	
3.95		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text	
3.96		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
3.97		Debtor	<Dbtr>	[0..1]	+	
3.98		DebtorAccount	<DbtrAcct>	[0..1]	+	
3.99		DebtorAgent	<DbtrAgt>	[0..1]	+	
3.100		DebtorAgentAccount	<DbtrAgtAcct>	[0..1]	+	
3.101		CreditorAgent	<CdtrAgt>	[0..1]	+	
3.102		CreditorAgentAccount	<CdtrAgtAcct>	[0..1]	+	
3.103		Creditor	<Cdtr>	[0..1]	+	
3.104		CreditorAccount	<CdtrAcct>	[0..1]	+	
3.105		UltimateCreditor	<UltmtCdtr>	[0..1]	+	

Message Items Description

*The following section identifies the elements of the **PaymentStatusReportV02** message.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]
Definition: Set of characteristics shared by all individual transactions included in the status report message.
Type: *The **GroupHeader** block is composed of the following **GroupHeader5** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		InitiatingParty	<InitgPty>	[0..1]	+
1.4		ForwardingAgent	<FwdgAgt>	[0..1]	+

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.5		DebtorAgent	<DbtrAgt>	[0..1]	+
1.6		CreditorAgent	<CdtrAgt>	[0..1]	+
1.7		InstructingAgent	<InstgAgt>	[0..1]	+
1.8		InstructedAgent	<InstdAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the instructing party and sent to the next party in the chain to unambiguously identify the message.

Usage: The instructing party has to make sure that 'MessageIdentification' is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the status report was created by the instructing party.

Data Type: ISODateTime

1.3 InitiatingParty <InitgPty>

Presence: [0..1]

Definition: Party initiating the payment. In the payment context, this can either be the debtor (in a credit transfer), the creditor (in a direct debit), or the party that initiates the payment on behalf of the debtor or creditor.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

1.4 ForwardingAgent <FwdgAgt>

Presence: [0..1]

Definition: Financial institution that receives the instruction from the initiating party and forwards it to the next agent in the payment chain.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

1.5 DebtorAgent <DbtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

1.6 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

1.7 InstructingAgent <InstgAgt>

Presence: [0..1]
Definition: Agent that instructs the next party in the chain to carry out the (set of) instruction(s).
Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

1.8 InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out the (set of) instruction(s).

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

2.0 OriginalGroupInformationAndStatus <OrgnlGrpInfAndSts>

Presence: [1..1]

Definition: Original group information concerning the group of transactions, to which the status report message refers to.

Type: *The **OriginalGroupInformationAndStatus** block is composed of the following **OriginalGroupInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1	{Or	OriginalMessageIdentification	<OrgnlMsgId>	[1..1]	Text
2.2	Or}	NetworkFileName	<NtwkFileNm>	[1..1]	Text
2.3		OriginalMessageNameIdentification	<OrgnlMsgNmId>	[1..1]	Text
2.4		OriginalCreationDateTime	<OrgnlCreDtTm>	[0..1]	DateTime
2.5		FileOriginator	<FileOrgtr>	[0..1]	Text
2.6		OriginalNumberOfTransactions	<OrgnlNbOfTxs>	[0..1]	Text
2.7		OriginalControlSum	<OrgnlCtrlSum>	[0..1]	Quantity
2.8		GroupStatus	<GrpSts>	[0..1]	Code
2.9		StatusReasonInformation	<StsRsnInf>	[0..n]	
2.15		NumberOfTransactionsPerStatus	<NbOfTxsPerSts>	[0..n]	

Rule(s): StatusReasonInformationRule
StatusReasonInformation/AdditionalStatusReasonInformation may only be present when GroupStatus is present and is equal to RJCTor PDNG.

Guideline(s): NumberOfTransactionPerStatusGuideline
OriginalGroupInformationAndStatus/NumberOfTransactionsPerStatus should only be present if GroupStatus equals 'PART'.

2.1 OriginalMessageIdentification <OrgnlMsgId>

Presence: [1..1]

*This message item is part of choice **2.0** OriginalGroupInformationAndStatus.*

Definition: Point to point reference assigned by the original instructing party to unambiguously identify the original group of individual transactions.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.2 NetworkFileName <NtwkFileNm>

Presence: [1..1]

*This message item is part of choice **2.0** OriginalGroupInformationAndStatus.*

Definition: Name assigned by the sending party to unambiguously identify the file transmitted on the network.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.3 OriginalMessageNameIdentification <OrgnlMsgNmId>

Presence: [1..1]

Definition: Specifies the original message name identifier to which the message refers, eg, pacs.003.001.01 or MT103.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.4 OriginalCreationDateTime <OrgnlCreDtTm>

Presence: [0..1]

Definition: Date and time at which the original message was created.

Data Type: ISODateTime

2.5 FileOriginator <FileOrgtr>

Presence: [0..1]

Definition: Party that sent the file for which the status has been generated.

Usage: this field will only be used when the content of the message could not be decoded at the receiving side.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.6 OriginalNumberOfTransactions <OrgnlNbOfTxs>

Presence: [0..1]

Definition: Number of individual transactions contained in the original message.

Data Type: Max15NumericText

Format: [0-9]{1,15}

2.7 OriginalControlSum <OrgnlCtrlSum>

Presence: [0..1]

Definition: Total of all individual amounts included in the original message, irrespective of currencies.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

2.8 GroupStatus <GrpSts>

Presence: [0..1]
Definition: Specifies the status of a group of transactions.
Data Type: Code
*When this message item is present, one of the following **TransactionGroupStatus1Code** values must be used:*

Code	Name	Definition
ACCP	AcceptedCustomerProfile	Preceding check of technical validation was successful. Customer profile check was also successful. This includes the assessment of the static risks.
ACCR	AcceptedCancellationRequest	Cancellation is accepted.
ACSC	AcceptedSettlementCompleted	Settlement on the debtor's account has been completed. Usage : this can be used by the first agent to report to the debtor that the transaction has been completed. Warning : this status is provided for transaction status reasons, not for financial information. It can only be used after bilateral agreement
ACSP	AcceptedSettlementInProcess	All preceding checks such as technical validation and customer profile were successful. Dynamic risk assessment is now also successful and therefore the payment initiation has been accepted for execution.
ACTC	AcceptedTechnicalValidation	Authentication and syntactical and semantical validation are successful.
ACWC	AcceptedWithChange	Instruction is accepted but a change will be made, i.e., date, remittance not sent.
PART	PartiallyAccepted	A number of transactions have been accepted, whereas another number of transactions have not yet achieved 'accepted' status.
PDNG	Pending	Payment initiation or individual transaction included in the payment initiation is pending. Further checks and status update will be performed.
RCVD	Received	Payment initiation has been received by the receiving agent.
RJCT	Rejected	Payment initiation or individual transaction included in the payment initiation has been rejected.

2.9 StatusReasonInformation <StsRsnInf>

Presence: [0..n]
Definition: Detailed information on the status reason.
Type: *This message item is composed of the following **StatusReasonInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.10		StatusOriginator	<StsOrgtr>	[0..1]	+
2.11		StatusReason	<StsRsn>	[0..1]	
2.14		AdditionalStatusReasonInformation	<AddtlStsRsnInf>	[0..n]	Text

Rule(s): StatusReasonRule
If StatusReason/Code is equal to 'NARR', then at least one occurrence of AdditionalStatusReasonInformation must be present.

2.10 StatusOriginator <StsOrgtr>

Presence: [0..1]
Definition: Party issuing the status.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

2.11 StatusReason <StsRsn>

Presence: [0..1]
Definition: Specifies the reason for the status report.
Type: *This message item is composed of one of the following **StatusReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.12	{Or	Code	<Cd>	[1..1]	Code
2.13	Or}	Proprietary	<Prtry>	[1..1]	Text

2.12 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.11** StatusReason.*
Definition: Reason for the status in a coded form.
Data Type: Code
*One of the following **TransactionRejectReason2Code** values must be used:*

Code	Name	Definition
AC01	IncorrectAccountNumber	Format of the account number specified is not correct.

Code	Name	Definition
AC04	ClosedAccountNumber	Account number specified has been closed on the Receiver's books.
AC06	BlockedAccount	Account specified is blocked, prohibiting posting of transactions against it.
AG01	TransactionForbidden	Transaction forbidden on this type of account (formerly NoAgreement).
AG02	InvalidBankOperationCode	Bank Operation code specified in the message is not valid for receiver.
AM01	ZeroAmount	Specified message amount is equal to zero.
AM02	NotAllowedAmount	Specified transaction/message amount is greater than allowed maximum.
AM03	NotAllowedCurrency	Specified message amount is in an non processable currency outside of existing agreement.
AM04	InsufficientFunds	Amount of funds available to cover specified message amount is insufficient.
AM05	Duplication	This message appears to have been duplicated.
AM06	TooLowAmount	Specified transaction amount is less than agreed minimum.
AM07	BlockedAmount	Amount specified in message has been blocked by regulatory authorities.
AM09	WrongAmount	Amount received is not the amount agreed or expected.
AM10	InvalidControlSum	Sum of instructed amounts does not equal the control sum.
BE01	InconsistentWithEndCustomer	Identification of end customer is not consistent with associated account number. (formerly CreditorConsistency)
BE04	MissingCreditorAddress	Specification of creditor's address, which is required for payment, is missing/not correct (formerly IncorrectCreditorAddress).
BE05	UnrecognisedInitiatingParty	Party who initiated the message is not recognised by the end customer.
BE06	UnknownEndCustomer	End customer specified is not known at associated Sort/ National Bank Code or does no longer exist in the books.
BE07	MissingDebtorAddress	Specification of debtor's address, which is required for payment, is missing/not correct.
DT01	InvalidDate	Invalid date (eg, wrong settlement date).
ED01	CorrespondentBankNotPossible	Correspondent bank not possible.
ED03	BalanceInfoRequested	Balance of payments complementary info is requested.
ED05	SettlementFailed	Settlement of the transaction has failed.
MD01	NoMandate	Mandate is cancelled or invalid.
MD02	MissingMandatoryInformationInMandate	Mandate related information data required by the scheme is missing.

Code	Name	Definition
MD03	InvalidFileFormatForOtherReasonThanGroupingIndicator	File format incomplete or invalid.
MD04	InvalidFileFormatForGroupingIndicator	File format incorrect in terms of grouping indicator.
MD06	RefundRequestByEndCustomer	Return of funds requested by end customer.
MD07	EndCustomerDeceased	End customer is deceased.
MS02	NotSpecifiedReasonCustomerGenerated	Reason has not been specified by end customer.
MS03	NotSpecifiedReasonAgentGenerated	Reason has not been specified by agent.
NARR	Narrative	Reason is provided as narrative information in the additional reason information.
RC01	BankIdentifierIncorrect	Bank identifier code specified in the message has an incorrect format (formerly IncorrectFormatForRoutingCode).
RF01	NotUniqueTransactionReference	Transaction reference is not unique within the message.
TM01	CutOffTime	Associated message was received after agreed processing cut-off time.

2.13 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.11** StatusReason.*

Definition: Reason for the status not catered for by the available codes.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.14 AdditionalStatusReasonInformation <AddtlStsRsnInf>

Presence: [0..n]

Definition: Further details on the status reason.

Usage: Additional information can be used for several purposes, e.g. to report repaired information, or to further detail the status reason.

Data Type: Max105Text

Format: maxLength: 105
minLength: 1

2.15 NumberOfTransactionsPerStatus <NbOfTxsPerSts>

Presence: [0..n]

Definition: Detailed information on the number of transactions for each identical individual transaction status.

Type: *This message item is composed of the following* ***NumberOfTransactionsPerStatus1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.16		DetailedNumberOfTransactions	<DtldNbOfTxs>	[1..1]	Text
2.17		DetailedStatus	<DtldSts>	[1..1]	Code
2.18		DetailedControlSum	<DtldCtrlSum>	[0..1]	Quantity

2.16 DetailedNumberOfTransactions <DtldNbOfTxs>

Presence: [1..1]
Definition: Number of individual transactions contained in the message, detailed per status.
Data Type: Max15NumericText
Format: [0-9]{1,15}

2.17 DetailedStatus <DtldSts>

Presence: [1..1]
Definition: Common transaction status for all individual transactions reported with the same status.
Data Type: Code
One of the following ***TransactionIndividualStatus1Code*** *values must be used:*

Code	Name	Definition
ACCP	AcceptedCustomerProfile	Preceding check of technical validation was successful. Customer profile check was also successful. This includes the assessment of the static risks.
ACCR	AcceptedCancellationRequest	Cancellation is accepted.
ACSC	AcceptedSettlementCompleted	Settlement on the debtor's account has been completed. Usage : this can be used by the first agent to report to the debtor that the transaction has been completed. Warning : this status is provided for transaction status reasons, not for financial information. It can only be used after bilateral agreement
ACSP	AcceptedSettlementInProcess	All preceding checks such as technical validation and customer profile were successful. Dynamic risk assessment is now also successful and therefore the payment initiation has been accepted for execution.
ACTC	AcceptedTechnicalValidation	Authentication and syntactical and semantical validation are successful.
ACWC	AcceptedWithChange	Instruction is accepted but a change will be made, i.e., date, remittance not sent.
PDNG	Pending	Payment initiation or individual transaction included in the payment initiation is pending. Further checks and status update will be performed.

Code	Name	Definition
RJCT	Rejected	Payment initiation or individual transaction included in the payment initiation has been rejected.

2.18 DetailedControlSum <DtldCtrlSum>

Presence: [0..1]

Definition: Total of all individual amounts included in the message, irrespective of currencies, detailed per status.

Data Type: DecimalNumber

Format: fractionDigits: 17
totalDigits: 18

3.0 TransactionInformationAndStatus <TxInfAndSts>

Presence: [0..n]

Definition: Information concerning the original transactions, to which the status report message refers.

Type: *The **TransactionInformationAndStatus** block is composed of the following **PaymentTransactionInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1		StatusIdentification	<StsId>	[0..1]	Text
3.2		OriginalPaymentInformationIdentification	<OrgnlPmtInfId>	[0..1]	Text
3.3		OriginalInstructionIdentification	<OrgnlInstrId>	[0..1]	Text
3.4		OriginalEndToEndIdentification	<OrgnlEndToEndId>	[0..1]	Text
3.5		OriginalTransactionIdentification	<OrgnlTxId>	[0..1]	Text
3.6		TransactionStatus	<TxSts>	[0..1]	Code
3.7		StatusReasonInformation	<StsRsnInf>	[0..n]	
3.13		ChargesInformation	<ChrgsInf>	[0..n]	+
3.14		AcceptanceDateTime	<AccptncDtTm>	[0..1]	DateTime
3.15		InstructingAgent	<InstgAgt>	[0..1]	+
3.16		InstructedAgent	<InstdAgt>	[0..1]	+
3.17		OriginalTransactionReference	<OrgnlTxRef>	[0..1]	

3.1 StatusIdentification <StsId>

Presence: [0..1]

Definition: Unique identification as assigned by an instructing party for an instructed party to unambiguously identify the reported status.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.2 OriginalPaymentInformationIdentification <OrgnlPmtInfId>

Presence: [0..1]

Definition: Unique and unambiguous identifier of the original payment information block as assigned by the original sending party.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.3 OriginalInstructionIdentification <OrgnlInstrId>

Presence: [0..1]

Definition: Original unique instruction identification as assigned by an instructing party for an instructed party to unambiguously identify the original instruction.

Usage: the original instruction identification is the original point to point reference used between the instructing party and the instructed party to refer to the original instruction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.4 OriginalEndToEndIdentification <OrgnlEndToEndId>

Presence: [0..1]

Definition: Original unique identification assigned by the initiating party to unambiguously identify the original transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.5 OriginalTransactionIdentification <OrgnlTxId>

Presence: [0..1]

Definition: Original identification of a transaction, as assigned by the first instructing agent and passed on, unchanged, throughout the entire interbank chain.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.6 TransactionStatus <TxSts>

Presence: [0..1]

Definition: Specifies the status of a transaction, in a coded form.

Data Type: Code

*When this message item is present, one of the following **TransactionIndividualStatus1Code** values must be used:*

Code	Name	Definition
ACCP	AcceptedCustomerProfile	Preceding check of technical validation was successful. Customer profile check was also successful. This includes the assessment of the static risks.
ACCR	AcceptedCancellationRequest	Cancellation is accepted.
ACSC	AcceptedSettlementCompleted	Settlement on the debtor's account has been completed.

Code	Name	Definition
		Usage : this can be used by the first agent to report to the debtor that the transaction has been completed. Warning : this status is provided for transaction status reasons, not for financial information. It can only be used after bilateral agreement
ACSP	AcceptedSettlementInProcess	All preceding checks such as technical validation and customer profile were successful. Dynamic risk assessment is now also successful and therefore the payment initiation has been accepted for execution.
ACTC	AcceptedTechnicalValidation	Authentication and syntactical and semantical validation are successful.
ACWC	AcceptedWithChange	Instruction is accepted but a change will be made, i.e., date, remittance not sent.
PDNG	Pending	Payment initiation or individual transaction included in the payment initiation is pending. Further checks and status update will be performed.
RJCT	Rejected	Payment initiation or individual transaction included in the payment initiation has been rejected.

3.7 StatusReasonInformation <StsRsnInf>

Presence: [0..n]
Definition: Detailed information on the status reason.
Type: *This message item is composed of the following **StatusReasonInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.8		StatusOriginator	<StsOrgtr>	[0..1]	+
3.9		StatusReason	<StsRsn>	[0..1]	
3.12		AdditionalStatusReasonInformation	<AddtlStsRsnInf>	[0..n]	Text

Rule(s): StatusReasonRule
If StatusReason/Code is equal to 'NARR', then at least one occurrence of AdditionalStatusReasonInformation must be present.

3.8 StatusOriginator <StsOrgtr>

Presence: [0..1]
Definition: Party issuing the status.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.9 StatusReason <StsRsn>

Presence: [0..1]
Definition: Specifies the reason for the status report.
Type: *This message item is composed of one of the following **StatusReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.10	{Or	Code	<Cd>	[1..1]	Code
3.11	Or}	Proprietary	<Prtry>	[1..1]	Text

3.10 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.9** StatusReason.*
Definition: Reason for the status in a coded form.
Data Type: Code
*One of the following **TransactionRejectReason2Code** values must be used:*

Code	Name	Definition
AC01	IncorrectAccountNumber	Format of the account number specified is not correct.
AC04	ClosedAccountNumber	Account number specified has been closed on the Receiver's books.
AC06	BlockedAccount	Account specified is blocked, prohibiting posting of transactions against it.
AG01	TransactionForbidden	Transaction forbidden on this type of account (formerly NoAgreement).
AG02	InvalidBankOperationCode	Bank Operation code specified in the message is not valid for receiver.
AM01	ZeroAmount	Specified message amount is equal to zero.
AM02	NotAllowedAmount	Specified transaction/message amount is greater than allowed maximum.
AM03	NotAllowedCurrency	Specified message amount is in an non processable currency outside of existing agreement.
AM04	InsufficientFunds	Amount of funds available to cover specified message amount is insufficient.
AM05	Duplication	This message appears to have been duplicated.
AM06	TooLowAmount	Specified transaction amount is less than agreed minimum.

Code	Name	Definition
AM07	BlockedAmount	Amount specified in message has been blocked by regulatory authorities.
AM09	WrongAmount	Amount received is not the amount agreed or expected.
AM10	InvalidControlSum	Sum of instructed amounts does not equal the control sum.
BE01	InconsistentWithEndCustomer	Identification of end customer is not consistent with associated account number. (formerly CreditorConsistency)
BE04	MissingCreditorAddress	Specification of creditor's address, which is required for payment, is missing/not correct (formerly IncorrectCreditorAddress).
BE05	UnrecognisedInitiatingParty	Party who initiated the message is not recognised by the end customer.
BE06	UnknownEndCustomer	End customer specified is not known at associated Sort/ National Bank Code or does no longer exist in the books.
BE07	MissingDebtorAddress	Specification of debtor's address, which is required for payment, is missing/not correct.
DT01	InvalidDate	Invalid date (eg, wrong settlement date).
ED01	CorrespondentBankNotPossible	Correspondent bank not possible.
ED03	BalanceInfoRequested	Balance of payments complementary info is requested.
ED05	SettlementFailed	Settlement of the transaction has failed.
MD01	NoMandate	Mandate is cancelled or invalid.
MD02	MissingMandatoryInformationInMandate	Mandate related information data required by the scheme is missing.
MD03	InvalidFileFormatForOtherReasonThanGroupingIndicator	File format incomplete or invalid.
MD04	InvalidFileFormatForGroupingIndicator	File format incorrect in terms of grouping indicator.
MD06	RefundRequestByEndCustomer	Return of funds requested by end customer.
MD07	EndCustomerDeceased	End customer is deceased.
MS02	NotSpecifiedReasonCustomerGenerated	Reason has not been specified by end customer.
MS03	NotSpecifiedReasonAgentGenerated	Reason has not been specified by agent.
NARR	Narrative	Reason is provided as narrative information in the additional reason information.
RC01	BankIdentifierIncorrect	Bank identifier code specified in the message has an incorrect format (formerly IncorrectFormatForRoutingCode).
RF01	NotUniqueTransactionReference	Transaction reference is not unique within the message.

Code	Name	Definition
TM01	CutOffTime	Associated message was received after agreed processing cut-off time.

3.11 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.9** StatusReason.*

Definition: Reason for the status not catered for by the available codes.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.12 AdditionalStatusReasonInformation <AddtlStsRsnInf>

Presence: [0..n]

Definition: Further details on the status reason.

Usage: Additional information can be used for several purposes, e.g. to report repaired information, or to further detail the status reason.

Data Type: Max105Text

Format: maxLength: 105
minLength: 1

3.13 ChargesInformation <ChrgsInf>

Presence: [0..n]

Definition: Information on charges related to the processing of the rejection of the instruction.

Usage: ChargesInformation is past on for information purposes only. Settlement of the charges will be done separately.

Type: *This message item is composed of the following **ChargesInformation1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	ChargesAmount	<ChrgsAmt>	[1..1]	Amount
	ChargesParty	<ChrgsPty>	[1..1]	

For additional Type information, please refer to ChargesInformation1 p.307 in 'Message Item Types' section

3.14 AcceptanceDateTime <AccptncDtTm>

Presence: [0..1]

Definition: Point in time when the payment order from the initiating party meets the processing conditions of the account servicing agent (debtor's agent in case of a credit transfer, creditor's agent in case of a direct debit). This means - amongst others - that the account servicing agent has received the payment order and has applied checks as eg, authorisation, availability of funds.

Data Type: ISODateTime

3.15 InstructingAgent <InstgAgt>

Presence: [0..1]
Definition: Agent that instructs the next party in the chain to carry out the (set of) instruction(s).
Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.16 InstructedAgent <InstdAgt>

Presence: [0..1]
Definition: Agent that is instructed by the previous party in the chain to carry out the (set of) instruction(s).
Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification3*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.17 OriginalTransactionReference <OrgnlTxRef>

Presence: [0..1]
Definition: Set of key elements of the original transaction being referred to.
Type: *This message item is composed of the following* ***OriginalTransactionReference1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.18		InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount
3.19		Amount	<Amt>	[0..1]	
3.24		InterbankSettlementDate	<IntrBkSttlmDt>	[0..1]	DateTime
3.25	{Or	RequestedExecutionDate	<ReqdExctnDt>	[0..1]	DateTime
3.26	Or}	RequestedCollectionDate	<ReqdColltnDt>	[0..1]	DateTime
3.27		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
3.28		SettlementInformation	<SttlmInf>	[0..1]	
3.40		PaymentTypeInformation	<PmtTpInf>	[0..1]	
3.51		PaymentMethod	<PmtMtd>	[0..1]	Code
3.52		MandateRelatedInformation	<MndtRltdInf>	[0..1]	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.71		RemittanceInformation	<RmtInf>	[0..1]	
3.96		UltimateDebtor	<UltmtDbtr>	[0..1]	+
3.97		Debtor	<Dbtr>	[0..1]	+
3.98		DebtorAccount	<DbtrAcct>	[0..1]	+
3.99		DebtorAgent	<DbtrAgt>	[0..1]	+
3.100		DebtorAgentAccount	<DbtrAgtAcct>	[0..1]	+
3.101		CreditorAgent	<CdtrAgt>	[0..1]	+
3.102		CreditorAgentAccount	<CdtrAgtAcct>	[0..1]	+
3.103		Creditor	<Cdtr>	[0..1]	+
3.104		CreditorAccount	<CdtrAcct>	[0..1]	+
3.105		UltimateCreditor	<UltmtCdtr>	[0..1]	+

3.18 InterbankSettlementAmount <IntrBkSttlmAmt>

Presence: [0..1]

Definition: Amount of money moved between the instructing agent and the instructed agent.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.19 Amount <Amt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Type: *This message item is composed of one of the following* ***AmountType2Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.20	{Or	InstructedAmount	<InstdAmt>	[1..1]	Amount
3.21	Or}	EquivalentAmount	<EqvtAmt>	[1..1]	

3.20 InstructedAmount <InstdAmt>

Presence: [1..1]

This message item is part of choice ***3.19*** *Amount.*

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.21 EquivalentAmount <EqvtAmt>

Presence: [1..1]

This message item is part of choice ***3.19*** *Amount.*

Definition: Amount of money to be transferred between the debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred into a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The debtor agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Type: *This message item is composed of the following* ***EquivalentAmount*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.22		Amount	<Amt>	[1..1]	Amount
3.23		CurrencyOfTransfer	<CcyOfTrf>	[1..1]	Code

3.22 Amount <Amt>

Presence: [1..1]

Definition: Amount of money to be transferred between debtor and creditor, before deduction of charges, expressed in the currency of the debtor's account, and to be transferred in a different currency.

Usage : Currency of the amount is expressed in the currency of the debtor's account, but the amount to be transferred is in another currency. The first agent will convert the amount and currency to the to be transferred amount and currency, eg, 'pay equivalent of 100000 EUR in JPY'(and account is in EUR).

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

3.23 CurrencyOfTransfer <CcyOfTrf>

Presence: [1..1]

Definition: Specifies the currency of the to be transferred amount, which is different from the currency of the debtor's account.

Data Type: CurrencyCode

Format: [A-Z]{3,3}

Rule(s): ValidationByTable

3.24 InterbankSettlementDate <IntrBkSttlmDt>

Presence: [0..1]

Definition: Date on which the amount of money ceases to be available to the agent that owes it and when the amount of money becomes available to the agent to which it is due.

Data Type: ISODate

3.25 RequestedExecutionDate <ReqdExctnDt>

Presence: [0..1]

*This message item is part of choice **3.17** OriginalTransactionReference.*

Definition: Date at which the initiating party requests that the clearing agent to process the payment. If payment by cheque, the date when the cheque must be generated by the bank.

Usage: This is the date on which the debtor's account(s) is (are) to be debited.

Data Type: ISODate

3.26 RequestedCollectionDate <ReqdColltnDt>

Presence: [0..1]

*This message item is part of choice **3.17** OriginalTransactionReference.*

Definition: Date at which the creditor requests the amount of money to be collected from the debtor.

Data Type: ISODate

3.27 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]

Definition: Credit party that signs the direct debit mandate.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.28 SettlementInformation <SttlmInf>

Presence: [0..1]

Definition: Specifies the details on how the settlement of the original transaction(s) between the instructing agent and the instructed agent was completed.

Type: *This message item is composed of the following **SettlementInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.29		SettlementMethod	<SttlmMtd>	[1..1]	Code
3.30		SettlementAccount	<SttlmAcct>	[0..1]	+
3.31		ClearingSystem	<ClrSys>	[0..1]	
3.34		InstructingReimbursementAgent	<InstgRmbrsmntAgt>	[0..1]	+
3.35		InstructingReimbursementAgentAccount	<InstgRmbrsmntAgtAcct>	[0..1]	+
3.36		InstructedReimbursementAgent	<InstdRmbrsmntAgt>	[0..1]	+
3.37		InstructedReimbursementAgentAccount	<InstdRmbrsmntAgtAcct>	[0..1]	+
3.38		ThirdReimbursementAgent	<ThrdRmbrsmntAgt>	[0..1]	+
3.39		ThirdReimbursementAgentAccount	<ThrdRmbrsmntAgtAcct>	[0..1]	+

3.29 SettlementMethod <SttlmMtd>

Presence: [1..1]

Definition: Method used to settle the (batch of) payment instructions.

Data Type: Code

*One of the following **SettlementMethod1Code** values must be used:*

Code	Name	Definition
CLRG	ClearingSystem	Settlement is done through a payment clearing system.
COVE	CoverMethod	Settlement is done through a cover payment.
INDA	InstructedAgent	Settlement is done by the agent instructed to execute a payment instruction.
INGA	InstructingAgent	Settlement is done by the agent instructing and forwarding the payment to the next party in the payment chain.

3.30 SettlementAccount <SttlmAcct>

Presence: [0..1]

Definition: A specific purpose account used to post debit and credit entries as a result of the transaction.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.31 ClearingSystem <ClrSys>

Presence: [0..1]

Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.

Type: *This message item is composed of one of the following **ClearingSystemIdentification1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.32	{Or	ClearingSystemIdentification	<ClrSysId>	[1..1]	Code
3.33	Or}	Proprietary	<Prtry>	[1..1]	Text

3.32 ClearingSystemIdentification <ClrSysId>

Presence: [1..1]

*This message item is part of choice **3.31** ClearingSystem.*

Definition: Infrastructure through which the payment instruction is processed.

Data Type: Code

*One of the following **CashClearingSystem3Code** values must be used:*

Code	Name	Definition
ABE	EBAEuro1Step1	Scheme code for EBA Euro1/Step1.
AIP	Albania	Scheme code for AL (Albania) - Albania Interbank Payment System.
ART	Austrian	Scheme code for AT (Austria) - Austrian RTGS (ARTIS).
AVP	NewZealand	Scheme code for NZ (New Zealand) - New Zealand Assured Value Payments.
AZM	Azerbaijan	Scheme code for AZ (Azerbaijan) - Azerbaijan Interbank Payment System (AZIPS).
BAP	BosniaHerzegovina	Scheme code for BA (Bosnia and Herzegovina).
BCC	SwedenBGC	Scheme code for SE (Sweden) - Sweden BGC Clearing CUG.
BDS	Barbados	Scheme code for BB (Barbados) - Barbados RTGS (CBRTGS).
BEL	Belgium	Scheme code for BE (Belgium) - Belgium RTGS (ELLIPS).
BGN	Bulgaria	Scheme code for BG (Bulgaria) - Bulgaria RTGS.
BHS	Bahamas	Scheme code for BS (Bahamas) - Bahamas RTGS.
BIS	Botswana	Scheme code for BW (Botswana) - Botswana Interbank Settlement System.

Code	Name	Definition
BOF	Finland	Scheme code for FI (Finland) - RTGS (BOF).
BOJ	BankOfJapanNet	Scheme code for the Bank of Japan clearing system.
BRL	Italy	Scheme code for IT (Italy) - Italy RTGS (BIREL).
BSP	Philippines	Scheme code for PH (Philippines) - Philippines Payment System.
CAD	Canada	Scheme code for CA (Canada) - Canadian Large Value Transfer System (LVTS)
CAM	SpainCAM	Scheme code for ES (Spain).
CBJ	Ireland	Scheme code for IE (Ireland) - Irish RTGS (IRIS).
CHI	USChips	CHIPS is the Clearing House Interbank Payment System in the US.
CHP	UnitedKingdom	Scheme code for GB (UK) - British Euro RTGS (CHAPS).
COP	Columbia	Scheme code for Columbia (CO) - Colombian ACH CENIT Central Bank Payment System.
DDK	DenmarkDDK	Scheme code for DK (Denmark) - Danish Krone RTGS (KRONOS)
DKC	Denmark	Scheme code for DK (Denmark) - Danish Euro RTGS (KRONOS)
EBA	EBAEuro1	Scheme code for EBA Euro1.
ELS	GermanyELS	Scheme code for DE (Germany).
EPM	ECB	Scheme code for ECB (European Central Bank) - ECB Payment Mechanism.
EPN	USChipsACH	Scheme code for the US CHIPS-ACH.
ERP	EBAStep1	Scheme code for EBA step 1 (members).
FDA	USFedACH	Scheme code for the US FED-ACH.
FDW	Fedwire	Scheme code for the US national real time gross settlement system.
FEY	ForeignExchangeYenClearing	Scheme code for the Foreign Exchange Yen Clearing system (FEYCS). It is the Japanese electronic interbank system for sending guaranteed and unconditional yen payments of FX deals for same day settlement from one settlement bank, on behalf of itself or its customers, to another settlement bank.
GIS	Ghana	Scheme code for GH (Ghana) - Ghana Interbank Settlement System (GISS).
HRK	Croatia	Scheme code for HR (Croatia) - HSVP.
HRM	Greece	Scheme code for GR (Greece) - Greek RTGS (HERMES).
HUF	Hungary	Scheme code for HU (Hungary) - VIBER.
INC	NetherlandsIP	Scheme code for NL (Netherlands) - Netherlands Interpay CUG.
JOD	Jordan	Scheme code for JO (Jordan) - Jordan RTGS.

Code	Name	Definition
KPS	Kenya	Scheme code for KE (Kenya) - Kenyan Electronic Payment Settlement System.
LGS	Luxemburg	Scheme code for LU (Luxemburg) - Luxembourg RTGS (LIPS).
LKB	SriLanka	Scheme code for LK (Sri Lanka) - Sri Lanka (Lankasettle).
LVL	Latvia	Scheme code for LV (Latvia).
MEP	Singapore	Scheme code for SG (Singapore) - Singapore RTGS (MEPS +).
MOS	SouthAfrica	Scheme code for ZA (South Africa) - South-African Multiple Option Settlement.
MRS	Malta	Scheme code for MT (Malta) - Malta Realtime Interbank Settlement System.
MUP	Mauritius	Scheme code for MU (Mauritius).
NAM	Namibia	Scheme code for NA (Namibian) - Namibian Interbank Settlement System.
NOC	Norway	Scheme code for NO (Norway).
PCH	Switzerland	Scheme code for CH (Switzerland).
PDS	Australia	Scheme code for AU (Australia).
PEG	Egypt	Scheme code for EG (Egypt).
PNS	FrancePNS	Scheme code for FR (France).
PTR	Angola	Scheme code for AO (Angola) - Angola RTGS.
PVE	Venezuela	Scheme code for Ve (Venezuela).
ROL	RomaniaEPO	Scheme code for RO (Romania) - Romanian Electronic Payment Operations RT.
ROS	RomaniaGSRS	Scheme code for RO (Romania) - Romanian GSRS.
RTP	GermanyRTGSPlus	Scheme code for DE (Germany).
SCP	Chili	Scheme code for CL (Chile) - Chilean Interbank Payment System.
SEC	SwedenSEC	Scheme code for SE (Sweden) - Swedish Euro RTGS (SEC).
SIT	Slovania	Scheme code for SI (Slovenia).
SLB	SpainES	Scheme code for ES (Spain) - Spanish RTGS (SLBE).
SPG	Portugal	Scheme code for PT (Portugal) - Portuguese RTGS (SPGT).
SSK	SwedenSSK	Scheme code for SE (Sweden) - SEK RTGS (RIX).
STG	UnitedKingdomGBP	Scheme code for UK (United Kingdom) - CHAPS Sterling RTGS.
TBF	FranceFR	Scheme code for FR (France) - French RTGS (TBF).
TGT	Target	Scheme code for Target.
THB	Thailand	Scheme code for TH (Thailand) - Thailand Payment System (Bahtnet/2).

Code	Name	Definition
TIS	Tanzania	Scheme code for TZ (Tanzania) - Tanzania Interbank Settlement System (TISS).
TOP	Netherlands	Scheme code for NL (Netherlands) - Dutch RTGS (TOP)
TTD	TrinidadAndTobago	Scheme code for TT (Trinidad and Tobago) - Trinidad and Tobago SAFE-TT.
UIS	Uganda	Scheme code for UG (Uganda) - Uganda National Interbank Settlement System.
XCT	EBAStep2	Scheme code for EBA step 2.
ZEN	Zengin	Scheme code for the Zengin system. The electronic payment system for domestic third party transfers managed by the Tokyo Bankers Association.
ZET	Zimbabwe	Scheme code for ZW (Zimbabwe) - Zimbabwe Electronic Transfer & Settlement System.
ZIS	Zambia	Scheme code for ZM (Zambia) - Zambian Interbank Payment &Settlement System.

3.33 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.31** ClearingSystem.*

Definition: Proprietary clearing system service selected for a transaction.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.34 InstructingReimbursementAgent <InstgRmbrsmntAgt>

Presence: [0..1]

Definition: Specifies the agent through which the instructing agent will reimburse the instructed agent.

Usage: If the instructing and instructed agents have the same reimbursement agent, then only InstructingReimbursementAgent must be used.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.35 InstructingReimbursementAgentAccount <InstgRmbrsmntAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the instructing reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.36 InstructedReimbursementAgent <InstdRmbrsmntAgt>

Presence: [0..1]

Definition: Agent at which the instructed agent will be reimbursed.

Usage: If InstructedReimbursementAgent contains a branch of the InstructedAgent, then the instructed agent will claim reimbursement from that branch/will be paid by that branch.

Usage: If InstructingAgent and InstructedAgent have the same reimbursement agent, then only InstructingReimbursementAgent must be used.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.37 InstructedReimbursementAgentAccount <InstdRmbrsmntAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the instructed reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.38 ThirdReimbursementAgent <ThrdRmbrsmntAgt>

Presence: [0..1]

Definition: Specifies the branch of the instructed agent where the amount of money will be made available when different from the instructed reimbursement agent.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.39 ThirdReimbursementAgentAccount <ThrdRmbrsmntAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the third reimbursement agent account at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.40 PaymentTypeInformation <PmtTpInf>

Presence: [0..1]

Definition: Set of elements that further specifies the type of transaction.

Type: *This message item is composed of the following **PaymentTypeInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.41		InstructionPriority	<InstrPrty>	[0..1]	Code
3.42	{Or	ServiceLevel	<SvcLvl>	[0..1]	
3.45	Or}	ClearingChannel	<ClrChanl>	[0..1]	Code
3.46		LocalInstrument	<LclInstrm>	[0..1]	
3.49		SequenceType	<SeqTp>	[0..1]	Code
3.50		CategoryPurpose	<CtgyPurp>	[0..1]	Code

3.41 InstructionPriority <InstrPrty>

Presence: [0..1]

Definition: Indicator of the urgency or order of importance that the instructing party would like the instructed party to apply to the processing of the instruction.

Data Type: Code

*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

3.42 ServiceLevel <SvcLvl>

Presence: [0..1]

*This message item is part of choice **3.40** PaymentTypeInformation.*

Definition: Agreement under which or rules under which the transaction should be processed.

Type: *This message item is composed of one of the following **ServiceLevel2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.43	{Or	Code	<Cd>	[1..1]	Code
3.44	Or}	Proprietary	<Prtry>	[1..1]	Text

3.43 Code <Cd>

Presence: [1..1]

*This message item is part of choice **3.42** ServiceLevel.*

Definition: Identification of a pre-agreed level of service between the parties in a coded form.

Data Type: Code

*One of the following **ServiceLevel1Code** values must be used:*

Code	Name	Definition
PRPT	EBAPriorityService	Transaction must be processed according to the EBA Priority Service.
SDVA	SameDayValue	Payment must be executed with same day value to the creditor.
SEPA	SingleEuroPaymentsArea	Payment must be executed following the Single Euro Payments Area scheme.

3.44 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.42** ServiceLevel.*

Definition: Proprietary identification of a pre-agreed level of service between the parties.

Data Type: Max35Text

Format: maxLength: 35

minLength: 1

3.45 ClearingChannel <ClrChanl>

Presence: [0..1]
*This message item is part of choice **3.40** PaymentTypeInformation.*
Definition: Specifies the clearing channel to be used for the settlement of the instruction.
Data Type: Code
*When this message item is present, one of the following **ClearingChannel2Code** values must be used:*

Code	Name	Definition
BOOK	BookTransfer	Payment through internal book transfer.
MPNS	MassPaymentNetSystem	Clearing channel is a mass payment net settlement system.
RTGS	RealTimeGrossSettlementSystem	Clearing channel is a real-time gross settlement system.
RTNS	RealTimeNetSettlementSystem	Clearing channel is a real-time net settlement system.

3.46 LocalInstrument <LclInstrm>

Presence: [0..1]
Definition: User community specific instrument.

Usage : When available, codes provided by local authorities should be used.
Type: *This message item is composed of one of the following **LocalInstrument1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.47	{Or	Code	<Cd>	[1..1]	Code
3.48	Or}	Proprietary	<Prtry>	[1..1]	Text

3.47 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.46** LocalInstrument.*
Definition: Specifies the local instrument published in an external local instrument code list.
Data Type: ExternalLocalInstrumentCode
Format: maxLength: 35
minLength: 1

3.48 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.46** LocalInstrument.*
Definition: Specifies the local instrument as a proprietary code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.49 SequenceType <SeqTp>

Presence: [0..1]
Definition: Identifies the direct debit sequence, eg, first, recurrent, final or one-off.
Data Type: Code
*When this message item is present, one of the following **SequenceType1Code** values must be used:*

Code	Name	Definition
FNAL	Final	Final collection of a series of direct debit instructions.
FRST	First	First collection of a series of direct debit instructions.
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

3.50 CategoryPurpose <CtgyPurp>

Presence: [0..1]
Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.
Data Type: Code
*When this message item is present, one of the following **PaymentCategoryPurpose1Code** values must be used:*

Code	Name	Definition
CASH	CashManagementTransfer	Transaction is a general cash management instruction.
CORT	TradeSettlementPayment	Transaction is related to settlement of a trade, eg a foreign exchange deal or a securities transaction.
DIVI	Dividend	Transaction is the payment of dividends.
GOVT	GovernmentPayment	Transaction is a payment to or from a government department.
HEDG	Hedging	Transaction is related to the payment of a hedging operation.
INTC	IntraCompanyPayment	Transaction is an intra-company payment, ie, a payment between two companies belonging to the same group.
INTE	Interest	Transaction is the payment of interest.
LOAN	Loan	Transaction is related to the transfer of a loan to a borrower.
PENS	PensionPayment	Transaction is the payment of pension.
SALA	SalaryPayment	Transaction is the payment of salaries.
SECU	Securities	Transaction is the payment of securities.
SSBE	SocialSecurityBenefit	Transaction is a social security benefit, ie payment made by a government to support individuals.
SUPP	SupplierPayment	Transaction is related to a payment to a supplier.
TAXS	TaxPayment	Transaction is the payment of taxes.
TRAD	Trade	Transaction is related to the payment of a trade transaction.

Code	Name	Definition
TREA	TreasuryPayment	Transaction is related to treasury operations.
VATX	ValueAddedTaxPayment	Transaction is the payment of value added tax.
WHLD	WithHolding	Transaction is the payment of withholding tax.

3.51 PaymentMethod <PmtMtd>

Presence: [0..1]

Definition: Specifies the transfer method that will be used by the instructing agent to transfer the funds to the creditor.

Data Type: Code

*When this message item is present, one of the following **PaymentMethod4Code** values must be used:*

Code	Name	Definition
CHK	Cheque	Written order to a bank to pay a certain amount of money from one person to another person.
DD	DirectDebit	Collection of an amount of money from the debtor's bank account by the creditor. The amount of money and dates of collections may vary.
TRA	TransferAdvice	Transfer of an amount of money in the books of the account servicer. An advice should be sent back to the account owner.
TRF	CreditTransfer	Transfer of an amount of money in the books of the account servicer.

3.52 MandateRelatedInformation <MndtRltdInf>

Presence: [0..1]

Definition: Set of elements used to provide further details related to a direct debit mandate signed between the creditor and the debtor.

Usage: Mandate related information is to be used only when the direct debit relates to a mandate signed between the debtor and the creditor.

Type: *This message item is composed of the following **MandateRelatedInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.53		MandateIdentification	<MndtId>	[0..1]	Text
3.54		DateOfSignature	<DtOfSgntr>	[0..1]	DateTime
3.55		AmendmentIndicator	<AmdmntInd>	[0..1]	Indicator
3.56		AmendmentInformationDetails	<AmdmntInfDtls>	[0..1]	
3.67		ElectronicSignature	<ElctrncSgntr>	[0..1]	Text
3.68		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
3.69		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime
3.70		Frequency	<Frqcy>	[0..1]	Code

Rule(s): AmendmentIndicatorRule
If AmendmentIndicator is true, then AmendementInformationDetails must be present, with amended mandate information.

If AmendmentIndicator is false, then AmendmentInformationDetails is not allowed.

3.53 MandateIdentification <MndtId>

Presence: [0..1]
Definition: Reference of the direct debit mandate that has been signed between by the debtor and the creditor.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.54 DateOfSignature <DtOfSgntr>

Presence: [0..1]
Definition: Date on which the direct debit mandate has been signed by the debtor.
Data Type: ISODate

3.55 AmendmentIndicator <AmdmntInd>

Presence: [0..1]
Definition: Indicator notifying whether the underlying mandate is amended or not.
Data Type: *One of the following **TrueFalseIndicator** values must be used:*
MeaningWhenTrue: True
MeaningWhenFalse: False

3.56 AmendmentInformationDetails <AmdmntInfDtls>

Presence: [0..1]
Definition: List of direct debit mandate elements that have been modified.
Type: *This message item is composed of the following **AmendmentInformationDetails1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.57		OriginalMandateIdentification	<OrgnlMndtId>	[0..1]	Text
3.58		OriginalCreditorSchemeIdentification	<OrgnlCdtrSchmeId>	[0..1]	+
3.59		OriginalCreditorAgent	<OrgnlCdtrAgt>	[0..1]	+
3.60		OriginalCreditorAgentAccount	<OrgnlCdtrAgtAcct>	[0..1]	+
3.61		OriginalDebtor	<OrgnlDbtr>	[0..1]	+
3.62		OriginalDebtorAccount	<OrgnlDbtrAcct>	[0..1]	+
3.63		OriginalDebtorAgent	<OrgnlDbtrAgt>	[0..1]	+
3.64		OriginalDebtorAgentAccount	<OrgnlDbtrAgtAcct>	[0..1]	+
3.65		OriginalFinalCollectionDate	<OrgnlFnlColltnDt>	[0..1]	DateTime
3.66		OriginalFrequency	<OrgnlFrqcy>	[0..1]	Code

3.57 OriginalMandateIdentification <OrgnlMndtId>

Presence: [0..1]
Definition: Original mandate identification that has been modified.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.58 OriginalCreditorSchemeIdentification <OrgnlCdtrSchmeId>

Presence: [0..1]
Definition: Original creditor scheme identification that has been modified.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.59 OriginalCreditorAgent <OrgnlCdtrAgt>

Presence: [0..1]
Definition: Original creditor agent that has been modified.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.60 OriginalCreditorAgentAccount <OrgnlCdtrAgtAcct>

Presence: [0..1]
Definition: Original creditor agent acount that has been modified.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.61 OriginalDebtor <OrgnlDbtr>

Presence: [0..1]
Definition: Original debtor that has been modified.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.62 OriginalDebtorAccount <OrgnlDbtrAcct>

Presence: [0..1]
Definition: Original debtor account that has been modified.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.63 OriginalDebtorAgent <OrgnlDbtrAgt>

Presence: [0..1]
Definition: Original debtor's agent that has been modified.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.64 OriginalDebtorAgentAccount <OrgnlDbtrAgtAcct>

Presence: [0..1]
Definition: Original debtor agent account that has been modified.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.65 OriginalFinalCollectionDate <OrgnlFnlColltnDt>

Presence: [0..1]
Definition: Original final collection date that has been modified.
Data Type: ISODate

3.66 OriginalFrequency <OrgnlFrqcy>

Presence: [0..1]
Definition: Original frequency that has been modified.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

3.67 ElectronicSignature <ElctrncSgntr>

Presence: [0..1]
Definition: Additional security provisions, eg, digital signature as provided by the debtor.
Data Type: Max1025Text
Format: maxLength: 1025

minLength: 1

3.68 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.
Data Type: ISODate

3.69 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.
Data Type: ISODate

3.70 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which direct debit instructions are to be created and processed, eg, daily, weekly, monthly.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

3.71 RemittanceInformation <RmtInf>

Presence: [0..1]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system.
Type: *This message item is composed of the following **RemittanceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.72		Unstructured	<Ustrd>	[0..n]	Text
3.73		Structured	<Strd>	[0..n]	

3.72 Unstructured <Ustrd>

Presence: [0..n]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in an unstructured form.

Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.73 Structured <Strd>

Presence: [0..n]
Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, eg, commercial invoices in an accounts' receivable system in a structured form.
Type: *This message item is composed of the following **StructuredRemittanceInformation6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.74		ReferredDocumentInformation	<RfrdDocInf>	[0..1]	
3.80		ReferredDocumentRelatedDate	<RfrdDocRltdDt>	[0..1]	DateTime
3.81		ReferredDocumentAmount	<RfrdDocAmt>	[0..n]	
3.87		CreditorReferenceInformation	<CdtrRefInf>	[0..1]	
3.93		Invoicer	<Invcr>	[0..1]	+
3.94		Invoicee	<Invcee>	[0..1]	+
3.95		AdditionalRemittanceInformation	<AddtlRmtInf>	[0..1]	Text

3.74 ReferredDocumentInformation <RfrdDocInf>

Presence: [0..1]
Definition: Reference information to allow the identification of the underlying reference documents.
Type: *This message item is composed of the following **ReferredDocumentInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.75		ReferredDocumentType	<RfrdDocTp>	[0..1]	
3.79		ReferredDocumentNumber	<RfrdDocNb>	[0..1]	Text

3.75 ReferredDocumentType <RfrdDocTp>

Presence: [0..1]
Definition: Provides the type of the referred document.
Type: *This message item is composed of the following **ReferredDocumentType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.76	{Or	Code	<Cd>	[1..1]	Code
3.77	Or}	Proprietary	<Prtry>	[1..1]	Text
3.78		Issuer	<Issr>	[0..1]	Text

3.76 Code <Cd>

Presence: [1..1]

*This message item is part of choice **3.75** ReferredDocumentType.*

Definition: Document type in a coded form.

Data Type: Code

*One of the following **DocumentType2Code** values must be used:*

Code	Name	Definition
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.

3.77 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.75** ReferredDocumentType.*

Definition: Proprietary identification of the type of the remittance document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.78 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the reference document type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.79 ReferredDocumentNumber <RfrdDocNb>

Presence: [0..1]

Definition: Unique and unambiguous identification number of the referred document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.80 ReferredDocumentRelatedDate <RfrdDocRltdDt>

Presence: [0..1]
Definition: Date associated with the referred document, eg, date of issue.
Data Type: ISODate

3.81 ReferredDocumentAmount <RfrdDocAmt>

Presence: [0..n]
Definition: Amount of money and currency of a document referred to in the remittance section. The amount is typically either the original amount due and payable, or the amount actually remitted for the referred document.
Type: *This message item is composed of one of the following **ReferredDocumentAmount1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.82	{Or	DuePayableAmount	<DuePyblAmt>	[1..1]	Amount
3.83	Or	DiscountAppliedAmount	<DscntApldAmt>	[1..1]	Amount
3.84	Or	RemittedAmount	<RmtdAmt>	[1..1]	Amount
3.85	Or	CreditNoteAmount	<CdtNoteAmt>	[1..1]	Amount
3.86	Or}	TaxAmount	<TaxAmt>	[1..1]	Amount

3.82 DuePayableAmount <DuePyblAmt>

Presence: [1..1]
*This message item is part of choice **3.81** ReferredDocumentAmount.*
Definition: Amount specified is the exact amount due and payable to the creditor.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

3.83 DiscountAppliedAmount <DscntApldAmt>

Presence: [1..1]
*This message item is part of choice **3.81** ReferredDocumentAmount.*
Definition: Amount of money resulting from the application of an agreed discount to the amount due and payable to the creditor.
Data Type: CurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*
Format: **CurrencyAndAmount**

fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

3.84 RemittedAmount <RmtdAmt>

Presence: [1..1]

*This message item is part of choice **3.81** ReferredDocumentAmount.*

Definition: Amount of money remitted for the referred document.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

3.85 CreditNoteAmount <CdtNoteAmt>

Presence: [1..1]

*This message item is part of choice **3.81** ReferredDocumentAmount.*

Definition: Amount specified for the referred document is the amount of a credit note.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

3.86 TaxAmount <TaxAmt>

Presence: [1..1]

*This message item is part of choice **3.81** ReferredDocumentAmount.*

Definition: Quantity of cash resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **CurrencyCode**.*

Format: CurrencyAndAmount
fractionDigits: 5
minInclusive: 0

totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): CurrencyCode
ValidationByTable

3.87 CreditorReferenceInformation <CdtrRefInf>

Presence: [0..1]
Definition: Reference information provided by the creditor to allow the identification of the underlying documents.
Type: *This message item is composed of the following **CreditorReferenceInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.88		CreditorReferenceType	<CdtrRefTp>	[0..1]	
3.92		CreditorReference	<CdtrRef>	[0..1]	Text

3.88 CreditorReferenceType <CdtrRefTp>

Presence: [0..1]
Definition: Provides the type of the creditor reference.
Type: *This message item is composed of the following **CreditorReferenceType1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.89	{Or	Code	<Cd>	[1..1]	Code
3.90	Or}	Proprietary	<Prtry>	[1..1]	Text
3.91		Issuer	<Issr>	[0..1]	Text

3.89 Code <Cd>

Presence: [1..1]
*This message item is part of choice **3.88** CreditorReferenceType.*
Definition: Coded creditor reference type.
Data Type: Code
*One of the following **DocumentType3Code** values must be used:*

Code	Name	Definition
DISP	DispatchAdvice	Document is a dispatch advice.
FXDR	ForeignExchangeDealReference	Document is a pre-agreed or pre-arranged foreign exchange transaction to which the payment transaction refers.
PUOR	PurchaseOrder	Document is a purchase order.
RADM	RemittanceAdviceMessage	Document is a remittance advice sent separately from the current transaction.
RPIN	RelatedPaymentInstruction	Document is a linked payment instruction to which the current payment instruction is related, eg, in a cover scenario.

Code	Name	Definition
SCOR	StructuredCommunicationReference	Document is a structured communication reference provided by the creditor to identify the referred transaction.

3.90 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.88** CreditorReferenceType.*

Definition: Creditor reference type not avilable in a coded format.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.91 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the credit reference type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.92 CreditorReference <CdtrRef>

Presence: [0..1]

Definition: Unique and unambiguous reference assigned by the creditor to refer to the payment transaction.

Usage: if available, the initiating party should provide this reference in the structured remittance information, to enable reconciliation by the creditor upon receipt of the cash.

If the business context requires the use of a creditor reference or a payment remit identification, and only one identifier can be passed through the end-to-end chain, the creditor's reference or payment remittance identification should be quoted in the end-to-end transaction identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.93 Invoicer <Invcr>

Presence: [0..1]

Definition: Identification of the organization issuing the invoice when different than the creditor or final party.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.94 Invoicee <Invcee>

Presence: [0..1]
Definition: Identification of the party to whom an invoice is issued, when different than the originator or debtor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.95 AdditionalRemittanceInformation <AddtlRmtInf>

Presence: [0..1]
Definition: Additional information, in free text form, to complement the structured remittance information.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.96 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.97 Debtor <Dbtr>

Presence: [0..1]
Definition: Party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.98 DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor to which a debit entry will be made as a result of the transaction.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.99 DebtorAgent <DbtrAgt>

Presence: [0..1]

Definition: Financial institution servicing an account for the debtor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.100 DebtorAgentAccount <DbtrAgtAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor agent at its servicing agent in the payment chain.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.101 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to BranchAndFinancialInstitutionIdentification3 p.328 in 'Message Item Types' section

3.102 CreditorAgentAccount <CdtrAgtAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor agent at its servicing agent in the payment chain.
Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.103 Creditor <Cdtr>

Presence: [0..1]
Definition: Party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

3.104 CreditorAccount <CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Type: *This message item is composed of the following **CashAccount7** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to CashAccount7 p.303 in 'Message Item Types' section

3.105 UltimateCreditor <UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

Type: *This message item is composed of the following **PartyIdentification8** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

For additional Type information, please refer to PartyIdentification8 p.341 in 'Message Item Types' section

Business Example - Status of a CustomerCreditTransferInitiation

Narrative

As follow-up to the payment initiation by ABC Corporation, BBBB Bank sends a PaymentStatusReport to acknowledge that the message passed technical validation and was accepted based on the customer profile.
Note : the original CustomerCreditTransferInitiation sent by ABC Corporation to BBBB Bank is documented in the business example section of the CustomerCreditTransferInitiation message.

Business Description

PaymentStatusReport from BBBB Bank to ABC Corporation

Element	***<XMLTag>***	***Content***
Group Header	<GrpHdr>	
MessageIdentification	<MsgId>	BBBB/060928-PSR/001
CreationDateTime	<CreDtTm>	2006-09-28T14:09:00
InitiatingParty	<InitgPty>	
Name	<Nm>	ABC Corporation
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Times Square
BuildingNumber	<BldgNb>	7
PostCode	<PstCd>	NY 10036
TownName	<TwnNm>	New York
Country	<Ctry>	US
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBUS33
OriginalGroupInformationAndStatus	<OrgnlGrpInfAndSts>	
OriginalMessageIdentification	<OrgnlMsgId>	ABC/060928/CCT001
OriginalMessageNameIdentification	<OrgnlMsgNmId>	pain.001.001.02
OriginalCreationDateTime	<OrgnlCreDtTm>	2006-09-28T14:07:00
OriginalNumberOfTransactions	<OrgnlNbOfTxs>	3
OriginalControlSum	<OrgnlCtrlSm>	11500000.
GroupStatus	<GrpsSts>	ACCP

XML Instance

```
<pain.002.001.02>
    <GrpHdr>
      <MsgId>BBBB/060928-PSR/001</MsgId>
      <CreDtTm>2006-09-28T14:09:00</CreDtTm>
      <InitgPty>
        <Nm>ABC Corporation</Nm>
        <PstlAdr>
          <StrtNm>Times Square</StrtNm>
          <BldgNb>7</BldgNb>
          <PstCd>NY 10036</PstCd>
          <TwnNm>New York</TwnNm>
          <Ctry>US</Ctry>
        </PstlAdr>
      </InitgPty>
```

```
      <DbtrAgt>
        <FinInstnId>
          <BIC>BBBBUS33</BIC>
        </FinInstnId>
      </DbtrAgt>
    </GrpHdr>
    <OrgnlGrpInfAndSts>
      <OrgnlMsgId>ABC/060928/CCT001</OrgnlMsgId>
      <OrgnlMsgNmId>pain.001.001.02</OrgnlMsgNmId>
      <OrgnlCreDtTm>2006-09-28T14:07:00</OrgnlCreDtTm>
      <OrgnlNbOfTxs>3</OrgnlNbOfTxs>
      <OrgnlCtrlSum>11500000</OrgnlCtrlSum>
      <GrpSts>ACCP</GrpSts>
    </OrgnlGrpInfAndSts>
  </pain.002.001.02>
```


Business Example - Status of a PaymentCancellationRequest

Narrative

BBBB Banks confirms to ABC Corporation that it accepts the PaymentCancellationRequest by sending a PaymentStatusReport.
Note : the PaymentCancellationRequest sent by ABC Corporation to BBBBUS33 is documented in the business example section of the PaymentCancellationRequest message.

Business Description

PaymentStatusReport from BBBBUS33 to ABC Corporation

Element	***<XMLTag>***	***Content***
Group Header	<GrpHdr>	
MessageIdentification	<MsgId>	BBBB/060928-PSR/002
CreationDateTime	<CreDtTm>	2006-09-28T15:49:00
InitiatingParty	<InitgPty>	
Name	<Nm>	ABC Corporation
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Times Square
BuildingNumber	<BldgNb>	7
PostCode	<PstCd>	NY 10036
TownName	<TwnNm>	New York
Country	<Ctry>	US
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBUS33
OriginalGroupInformationAndStatus	<OrgnlGrpInfAndSts>	

OriginalMessageIdentification	<OrgnlMsgId>	ABC/060928/PCR001
OriginalMessageNameIdentification	<OrgnlMsgNmId>	pain.006.001.01
OriginalCreationDateTime	<OrgnlCreDtTm>	2006-09-28T15:07:00
OriginalNumberOfTransactions	<OrgnlNbOfTxs>	1
TransactionInformationAndStatus	<TxInfAndSts>	
StatusIdentification	<StsId>	BBBB/060928-PSR/002/1
OriginalInstructionIdentification	<OrgnlInstrId>	ABC/060928/PCR001/1
TransactionStatus	<TxSts>	ACCR

XML Instance

```
<pain.002.001.02>
    <GrpHdr>
      <MsgId>BBBB/060928-PSR/002</MsgId>
      <CreDtTm>2006-09-28T15:49:00</CreDtTm>
      <InitgPty>
        <Nm>ABC Corporation</Nm>
        <PstlAdr>
          <StrtNm>Times Square</StrtNm>
          <BldgNb>7</BldgNb>
          <PstCd>NY 10036</PstCd>
          <TwnNm>New York</TwnNm>
          <Ctry>US</Ctry>
        </PstlAdr>
      </InitgPty>
      <DbtrAgt>
        <FinInstnId>
          <BIC>BBBBUS33</BIC>
        </FinInstnId>
      </DbtrAgt>
    </GrpHdr>
    <OrgnlGrpInfAndSts>
      <OrgnlMsgId>ABC/060928/PCR001</OrgnlMsgId>
      <OrgnlMsgNmId>pain.006.001.01</OrgnlMsgNmId>
      <OrgnlCreDtTm>2006-09-28T15:07:00</OrgnlCreDtTm>
      <OrgnlNbOfTxs>1</OrgnlNbOfTxs>
    </OrgnlGrpInfAndSts>
    <TxInfAndSts>
      <StsId>BBBB/060928-PSR/002/1</StsId>
      <OrgnlInstrId>ABC/060928/PCR001/1 </OrgnlInstrId>
      <TxSts>ACCR</TxSts>
    </TxInfAndSts>
  </pain.002.001.02>
```

Business Example - Status of a CustomerDirectDebitInitiation

Narrative

AAAAUS29 received a PaymentStatusReport from its correspondent, ABABUS23, containing reject information about a previously sent FIToFICustomerDirectDebit. As AAAAUS29 has not yet credited the account of the original initiating party (Virgay) of the direct debit, AAAAUS29 in its turn informs Virgay about the rejection of the CustomerDirectDebitInitiation sent on 27 June 2006.
Note : the PaymentStatusReport from ABABUS23 to AAAAUS29 is included in the business example section of the PaymentStatusReport message in the Payments Clearing and Settlement Message Reference Guide.

Business Description

PaymentStatusReport from AAAAUS29 to Virgay :

Element	***<XMLTag>***	***Content***
Group Header	<GrpHdr>	
MessageIdentification	<MsgId>	AAAAUS29_5678c
CreationDateTime	<CreDtTm>	2006-06-29T=11:35:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Virgay
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Virginia Lane
BuildingNumber	<BldgNb>	36
PostCode	<PstCd>	NJ 07311
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAAUS29
OriginalGroupInformationAndStatus	<OrgnGrpInfAndSts>	
OriginalMessageIdentification	<OrgnlMsgId>	CAVAY1234
OriginalMessageName Identification	<OrgnlMsgNmId>	Pacs.008.001.01
OriginalCreationDateAndTime	<OrgnlCreDtTm>	2006-06-27T14:25:00
TransactionInformationAndStatus	<TxInfAndSts>	
StatusID	<StsId>	RJT2006_657B
OriginalEndToEndIdentification	<OrgnlEndToEndId>	VA060327/0123
TransactionStatus	<TxSts>	RJCT
StatusReasonInformation	<StsRsnInf>	
StatusOriginator	<StsOrgtr>	

OrganisationIdentification	<OrgId>	
BIC	<BIC>	ABABUS23
Status Reason	<StsRsn>	
Code	<Cd>	AM05
OriginalTransactionReference	<OrgnlTxRef>	
Amount	<Amt>	
InstructedAmount	<InstAmtCcy=USD>	1025.00
RequestedCollectionDate	<ReqdColltnDt>	2006-07-03
MandateRelatedInformation	<MndtRltdInf>	
MandateIdentification	<MndtId>	VIRGAY123
Debtor	<Dbtr>	
Name	<Name>	Jones
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Hudston Street
BuildingNumber	<BldgNb>	19
PostCode	<PstCd>	NJ 07302
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
Creditor	<Cdtr>	
Name	<Name>	Virgay
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Virginia Lane
BuildingNumber	<BldgNb>	36
PostCode	<PstCd>	NJ 07311
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US

XML Instance

```
<pain.002.001.02>
    <GrpHdr>
      <MsgId>AAAAUS29_5678c</MsgId>
      <CreDtTm>2006-06-29T11:35:00</CreDtTm>
      <InitgPty>
        <Nm>Virgay</Nm>
        <PstlAdr>
          <StrtNm>Virginia Lane</StrtNm>
          <BldgNb>36</BldgNb>
          <PstCd>NJ 07311</PstCd>
          <TwnNm>Jersey City</TwnNm>
          <Ctry>US</Ctry>
```

```
        </PstlAdr>
      </InitgPty>
      <CdtrAgt>
        <FinInstnId>
          <BIC>AAAAUS29</BIC>
        </FinInstnId>
      </CdtrAgt>
    </GrpHdr>
    <OrgnlGrpInfAndSts>
      <OrgnlMsgId>CAVAY1234</OrgnlMsgId>
      <OrgnlMsgNmId>Pain.008.001.01</OrgnlMsgNmId>
      <OrgnlCreDtTm>2006-06-27T14:25:00</OrgnlCreDtTm>
    </OrgnlGrpInfAndSts>
    <TxInfAndSts>
      <StsId>RJT2006-657B</StsId>
      <OrgnlEndToEndId>VA060327/0123</OrgnlEndToEndId>
      <TxSts>RJCT</TxSts>
      <StsRsnInf>
        <StsOrgtr>
          <Id>
            <OrgId>
              <BIC>ABABUS23</BIC>
            </OrgId>
          </Id>
        </StsOrgtr>
        <StsRsn>
          <Cd>AM05</Cd>
        </StsRsn>
      </StsRsnInf>
      <OrgnlTxRef>
        <Amt>
          <InstdAmt Ccy = "USD">1025.00</InstdAmt>
        </Amt>
        <ReqdColltnDt>2006-07-03</ReqdColltnDt>
        <MndtRltdInf>
          <MndtId>VIRGAY123</MndtId>
        </MndtRltdInf>
        <Dbtr>
          <Nm>Jones</Nm>
          <PstlAdr>
            <StrtNm>Hudston Street</StrtNm>
            <BldgNb>19</BldgNb>
            <PstCd>NJ 07302</PstCd>
            <TwnNm>Jersey City</TwnNm>
            <Ctry>US</Ctry>
          </PstlAdr>
        </Dbtr>
        <Cdtr>
          <Nm>Virgay</Nm>
          <PstlAdr>
            <StrtNm>Virginia Lane</StrtNm>
            <BldgNb>36</BldgNb>
```

```
                <PstCd>NJ 07311</PstCd>
                <TwnNm>Jersey City</TwnNm>
                <Ctry/>
              </PstlAdr>
            </Cdtr>
          </OrgnlTxRef>
        </TxInfAndSts>
      </pain.002.001.02>
```

Message Item Types

Data Types

Data Types Index

1 Amount

1.1 CurrencyAndAmount
1.2 ImpliedCurrencyAndAmount

2 Date Time

2.1 ISODate
2.2 ISODateTime
2.3 ISOTime

3 Identifier

3.1 AustrianBankleitzahlIdentifier
3.2 BBANIdentifier
3.3 BEIIdentifier
3.4 BICIdentifier
3.5 CHIPSParticipantIdentifier
3.6 CHIPSUniversalIdentifier
3.7 CanadianPaymentsARNIdentifier
3.8 CountryCode
3.9 CurrencyCode
3.10 DunsIdentifier
3.11 EANGLNIdentifier
3.12 ExtensiveBranchNetworkIdentifier
3.13 ExternalClearingSystemMemberCode
3.14 ExternalCode
3.15 ExternalLocalInstrumentCode
3.16 ExternalPurposeCode
3.17 FedwireRoutingNumberIdentifier
3.18 GermanBankleitzahlIdentifier
3.19 HellenicBankIdentificationCodeIdentifier
3.20 HongKongBankIdentifier
3.21 IBANIdentifier
3.22 IBEIIdentifier
3.23 IndianFinancialSystemCodeIdentifier
3.24 IrishNSCIdentifier
3.25 ItalianDomesticIdentifier
3.26 LanguageCode
3.27 MICIdentifier
3.28 NationalityCode
3.29 NewZealandNCCIdentifier
3.30 PolishNationalClearingCodeIdentifier
3.31 PortugueseNCCIdentifier
3.32 RussianCentralBankIdentificationCodeIdentifier
3.33 SmallNetworkIdentifier
3.34 SouthAfricanNCCIdentifier

3.35 SpanishDomesticInterbankingIdentifier
3.36 SwissBCIdentifier
3.37 SwissSICIdentifier
3.38 UKDomesticSortCodeIdentifier
3.39 UPICIdentifier

4 Quantity: Number and Decimal Number

4.1 DecimalNumber

5 Rate

5.1 BaseOneRate
5.2 PercentageRate

6 Text

6.1 Max1025Text
6.2 Max105Text
6.3 Max128Text
6.4 Max140Text
6.5 Max15NumericText
6.6 Max16Text
6.7 Max256Text
6.8 Max34Text
6.9 Max350Text
6.10 Max35Text
6.11 Max3Text
6.12 Max70Text

Data Types Description

1 Amount

1.1 CurrencyAndAmount

Definition:	Number of monetary units specified in a currency, where the unit of currency is explicit and compliant with ISO 4217. The decimal separator is a dot. Note: A zero amount is considered a positive amount.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***CurrencyCode****.*
Format:	**CurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **CurrencyCode** [A-Z]{3,3}
Rule(s):	**CurrencyCode** ValidationByTable
Example:	100000 (Ccy='EUR')

1.2 ImpliedCurrencyAndAmount

Definition:	Number of monetary units specified in a currency where the unit of currency is implied by the context and compliant with ISO 4217. The decimal separator is a dot. Note: a zero amount is considered a positive amount.
Format:	fractionDigits: 5 minInclusive: 0 totalDigits: 18
Example:	500000

2 Date Time

2.1 ISODate

Definition:	Date within a particular calendar year represented by YYYY-MM-DD (ISO 8601).
Example:	2002-02-25

2.2 ISODateTime

Definition:	Date and time within a particular calendar year represented by YYYY-MM-DDThh :mm :ss (ISO 8601).
Example:	2002-07-21T08:35:30

2.3 ISOTime

Definition:	Time represented by hh :mm :ss (ISO 8601).
Example:	16:34:44

3 Identifier

3.1 AustrianBankleitzahlIdentifier

Definition:	Austrian Bankleitzahl. Identifies Austrian financial institutions on the Austrian national clearing system.
Format:	AT[0-9]{5,5}
Example:	AT12345

3.2 BBANIdentifier

Definition:	Basic Bank Account Number (BBAN). Identifier used nationally by financial institutions, ie, in individual countries, generally as part of a National Account Numbering Scheme(s), which uniquely identifies the account of a customer.
Format:	[a-zA-Z0-9]{1,30}
Example:	BARC12345612345678

3.3 BEIIdentifier

Definition:	Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC

	code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BEI Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.
Example:	USINFRPP

3.4 BICIdentifier

Definition:	Bank Identifier Code. code allocated to a financial institution by a Registration Authority under an international identification scheme, as described in the latest edition of the international standard ISO 9362 "Banking - Banking telecommunication messages - Bank identifier codes".
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BIC Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.
Example:	CHASUS33

3.5 CHIPSParticipantIdentifier

Definition:	(United States) Clearing House Interbank Payment System (CHIPS) Participant Identifier (ID). Identifies financial institutions participating on CHIPS. The CHIPS Participant ID is assigned by the New York Clearing House.
Format:	CP[0-9]{4,4}
Example:	CP1234

3.6 CHIPSUniversalIdentifier

Definition:	(United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID). Identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.
Format:	CH[0-9]{6,6}
Example:	CH123456

3.7 CanadianPaymentsARNIdentifier

Definition:	Canadian Payments Association Routing Number. Identifies Canadian financial institutions on the Canadian national clearing system.

Format:	CA[0-9]{9,9}
Example:	CA123456789

3.8 CountryCode

Definition:	Code to identify a country, a dependency, or another area of particular geopolitical interest, on the basis of country names obtained from the United Nations (ISO 3166, Alpha-2 code).
Format:	[A-Z]{2,2}
Rule(s):	Country The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).
Example:	BE

3.9 CurrencyCode

Definition:	Code allocated to a currency, by a maintenance agency, under an international identification scheme as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds". Valid currency codes are registered with the ISO 4217 Maintenance Agency, and consist of three contiguous letters.
Format:	[A-Z]{3,3}
Rule(s):	ValidationByTable
Example:	AWG

3.10 DunsIdentifier

Definition:	Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.
Format:	[0-9]{9,9}
Example:	578942538

3.11 EANGLNIdentifier

Definition:	Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve the detailed information linked to it.
Format:	[0-9]{13,13}
Example:	7265658971233

3.12 ExtensiveBranchNetworkIdentifier

Definition:	The extensive branch network list of the Australian Bank State Branch (BSB) Code. The codes are used for identifying Australian financial institutions, as assigned by the Australian Payments Clearing Association (APCA).
Format:	AU[0-9]{6,6}
Example:	AU123456

3.13 ExternalClearingSystemMemberCode

Definition:	Specifies the external clearing system member code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 35 minLength: 1
Example:	External Member Code 1

3.14 ExternalCode

Definition:	Specifies an external code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 35 minLength: 1
Example:	External Code 1

3.15 ExternalLocalInstrumentCode

Definition:	Specifies the external local instrument code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 35 minLength: 1
Example:	External Code 1

3.16 ExternalPurposeCode

Definition:	Specifies the external purpose code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 35 minLength: 1
Example:	External Purpose Code 1

3.17 FedwireRoutingNumberIdentifier

Definition:	Fedwire Routing Number. Identifies financial institutions, in the US, on the FedWire system. The routing number is assigned by the American Bankers Association (ABA).
Format:	FW[0-9]{9,9}
Example:	FW123456789

3.18 GermanBankleitzahlIdentifier

Definition:	German Bankleitzahl. Identifies German financial institutions on the German national clearing systems.
Format:	BL[0-9]{8,8}
Example:	BL12345678

3.19 HellenicBankIdentificationCodeIdentifier

Definition:	Hellenic Bank Identification Code Identifier. Identifies Greek financial institutions on the greek national clearing system.
Format:	GR[0-9]{7,7}
Example:	GR1234567

3.20 HongKongBankIdentifier

Definition:	Hong Kong Bank Code. Identifies Hong Kong financial institutions on the Hong Kong local clearing system.
Format:	HK[0-9]{3,3}
Example:	HK123

3.21 IBANIdentifier

Definition:	An identifier used internationally by financial institutions to uniquely identify the account of a customer at a financial institution, as described in the latest edition of the international standard ISO 13616. "Banking and related financial services - International Bank Account Number (IBAN)".
Format:	[a-zA-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
Rule(s):	IBAN A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.
Example:	AT611904300234573201

3.22 IBEIdentifier

Definition:	International Business Entity Identifier to uniquely identify business entities playing a role in the lifecycle of and events related to a financial instrument. (tentative - to be confirmed).
Format:	[A-Z]{2,2}[B-DF-HJ-NP-TV-XZ0-9]{7,7}[0-9]{1,1}
Example:	DEXBC823N0

3.23 IndianFinancialSystemCodeIdentifier

Definition:	Indian Financial System Code Identifier. Identifies Indian financial institutions on the Indian national clearing system.
Format:	IN[a-zA-Z0-9]{11,11}
Example:	IN12azBX12345

3.24 IrishNSCIdentifier

Definition:	Irish National Sorting Code. Identifies Irish financial institutions on the Irish national clearing system.
Format:	IE[0-9]{6,6}
Example:	IE123456

3.25 ItalianDomesticIdentifier

Definition:	Italian Domestic Identification Code. Identifies Italian financial institutions on the Italian national clearing system. The code is assigned by the Associazione Bancaria Italiana (ABI).
Format:	IT[0-9]{10,10}
Example:	IT1234567890

3.26 LanguageCode

Definition:	Specifies a language.
Rule(s):	ValidationByTable
Example:	ENG

3.27 MICIdentifier

Definition:	Market Identifier Code. The identification of a financial market, as stipulated in the norm ISO 10383 'Codes for exchanges and market identifications'.
Format:	[A-Z0-9]{4,4}
Example:	XTKS

3.28 NationalityCode

Definition:	Specifies the country where a person was born or is naturalised.
Rule(s):	ValidationByTable
Example:	US

3.29 NewZealandNCCIdentifier

Definition:	New Zealand Bank/Branch Code. Identifies New Zealand institutions on the New Zealand national clearing system. The code is assigned by the New Zealand Bankers' Association (NZBA).
Format:	NZ[0-9]{6,6}
Example:	NZ123456

3.30 PolishNationalClearingCodeIdentifier

Definition:	Polish National Clearing Code Identifier. Identifies Polish financial institutions on the Polish national clearing system.
Format:	PL[0-9]{8,8}
Example:	PL12345678

3.31 PortugueseNCCIdentifier

Definition:	Portuguese National Clearing Code. Identifies Portuguese financial institutions on the Portuguese national clearing system.
Format:	PT[0-9]{8,8}
Example:	PT12345678

3.32 RussianCentralBankIdentificationCodeIdentifier

Definition:	Russian Central Bank Identification Code. Identifies Russian financial institutions on the Russian national clearing system.
Format:	RU[0-9]{9,9}
Example:	RU123456789

3.33 SmallNetworkIdentifier

Definition:	The small network list of the Australian Bank State Branch (BSB) Code. The codes are used for identifying Australian financial institutions, as assigned by the Australian Payments Clearing Association (APCA).
Format:	AU[0-9]{6,6}
Example:	AU123456

3.34 SouthAfricanNCCIdentifier

Definition:	South African National Clearing Code (NCC). Identifies South African financial institutions on the South African national clearing system. The code is assigned by the South African Bankers Services Company Ltd. (BankServ).
Format:	ZA[0-9]{6,6}
Example:	ZA123456

3.35 SpanishDomesticInterbankingIdentifier

Definition:	Spanish Domestic Interbanking Code. Identifies Spanish financial institutions on the Spanish national clearing system. The code is assigned by the Centro de Cooperacion Interbancaria (CCI).
Format:	ES[0-9]{8,9}
Example:	ES12345678

3.36 SwissBCIdentifier

Definition:	Swiss Bank Code. Identifies Swiss institutions on the Swiss national clearing system.
Format:	SW[0-9]{3,5}
Example:	SW123

3.37 SwissSICIdentifier

Definition:	Swiss Interbank Clearing (SIC) Code. Identifies Swiss financial institutions domestically, on the Swiss national clearing system.
Format:	SW[0-9]{6,6}
Example:	SW123456

3.38 UKDomesticSortCodeIdentifier

Definition:	United Kingdom (UK) Sort Code. Identifies British financial institutions on the British national clearing systems. The sort code is assigned by the Association for Payments and Clearing Services (APACS).

Format:	SC[0-9]{6,6}
Example:	SC123456

3.39 UPICIdentifier

Definition:	Universal Payment Identification Code (UPIC). Identifier used by the New York Clearing House to mask confidential data, such as bank accounts and bank routing numbers. UPIC numbers remain with business customers, regardless of banking relationship changes.
Format:	[0-9]{8,17}
Example:	12345678

4 Quantity: Number and Decimal Number

4.1 DecimalNumber

Definition:	Number of objects represented as a decimal number, eg, 0.75 or 45.6.
Format:	fractionDigits: 17 totalDigits: 18
Example:	123456789.123456789

5 Rate

5.1 BaseOneRate

Definition:	Rate expressed as a decimal, eg, 0.7 is 7/10 and 70%.
Format:	fractionDigits: 10 totalDigits: 11
Example:	0.60

5.2 PercentageRate

Definition:	Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Format:	fractionDigits: 10 totalDigits: 11
Example:	35

6 Text

6.1 Max1025Text

Definition:	Specifies a character string with a maximum length of 1025 characters.
Format:	maxLength: 1025 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789

6.2 Max105Text

Definition:	Specifies a character string with a maximum length of 105 characters.
Format:	maxLength: 105

	minLength: 1
Example:	azefgvgldfpgtvcvlmgovl;v ; :B;lgkdfwxcvljfqsifj

6.3 Max128Text

Definition:	Specifies a character string with a maximum length of 128 characters.
Format:	maxLength: 128 minLength: 1
Example:	A string value of maximum 128 characters.

6.4 Max140Text

Definition:	Specifies a character string with a maximum length of 140 characters.
Format:	maxLength: 140 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.5 Max15NumericText

Definition:	Specifies a numeric string with a maximum length of 15 digits.
Format:	[0-9]{1,15}
Example:	458793625148975

6.6 Max16Text

Definition:	Specifies a character string with a maximum length of 16 characters.
Format:	maxLength: 16 minLength: 1
Example:	ABCdEFghIJKLMNO?

6.7 Max256Text

Definition:	Specifies a character string with a maximum length of 256 characters.
Format:	maxLength: 256 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.8 Max34Text

Definition:	Specifies a character string with a maximum length of 34 characters.
Format:	maxLength: 34 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234

6.9 Max350Text

Definition:	Specifies a character string with a maximum length of 350 characters.
Format:	maxLength: 350 minLength: 1
Example:	1234567890

6.10 Max35Text

Definition:	Specifies a character string with a maximum length of 35 characters.
Format:	maxLength: 35 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST123456789012345

6.11 Max3Text

Definition:	Specifies a character string with a maximum length of 3 characters.
Format:	maxLength: 3 minLength: 1
Example:	Nad

6.12 Max70Text

Definition:	Specifies a character string with a maximum length of 70characters.
Format:	maxLength: 70 minLength: 1
Example:	A string value of maximum 70 characters.

End Points

End Points Index

1 Account identification

1.1 CashAccount7

2 Charge

2.1 ChargesInformation1

3 Cheque

3.1 Cheque5

4 Financial institution identification

4.1 BranchAndFinancialInstitutionIdentification3

5 Party identification

5.1 PartyIdentification8

6 Postal address

6.1 PostalAddress1

7 Tax

7.1 TaxInformation2

End Points Description

1 Account identification

1.1 CashAccount7

CashAccount7 *is used in message* ***CustomerCreditTransferInitiationV02*** *p.27, p.27, p.27, p.28, p.28, p.28, p.28, p.28, message* ***CustomerDirectDebitInitiationV01*** *p.80, p.80, p.80, p.81, p.81, p.81, p.81, p.81, message* ***CustomerPaymentReversalV01*** *p.136, p.136, p.136, p.137, p.137, p.137, p.137, p.138, p.138, p.138, p.138, message* ***PaymentCancellationRequestV01*** *p.185, p.185, p.185, p.185, p.186, p.186, p.186, p.187, p.187, p.187, p.187, message* ***PaymentStatusReportV02*** *p.236, p.236, p.236, p.236, p.237, p.237, p.237, p.238, p.238, p.238, p.238.*

Definition: Information used for identifying an account.
Type: *The following* ***CashAccount7*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.0		Identification	<Id>	[1..1]	
1.1.1	{Or	IBAN	<IBAN>	[1..1]	Identifier
1.1.2	Or	BBAN	<BBAN>	[1..1]	Identifier
1.1.3	Or	UPIC	<UPIC>	[1..1]	Identifier
1.1.4	Or}	ProprietaryAccount	<PrtryAcct>	[1..1]	
1.1.5		Identification	<Id>	[1..1]	Text
1.1.6		Type	<Tp>	[0..1]	
1.1.7	{Or	Code	<Cd>	[1..1]	Code
1.1.8	Or}	Proprietary	<Prtry>	[1..1]	Text
1.1.9		Currency	<Ccy>	[0..1]	Code
1.1.10		Name	<Nm>	[0..1]	Text

1.1.0 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following* ***AccountIdentification3Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.1	{Or	IBAN	<IBAN>	[1..1]	Identifier
1.1.2	Or	BBAN	<BBAN>	[1..1]	Identifier
1.1.3	Or	UPIC	<UPIC>	[1..1]	Identifier
1.1.4	Or}	ProprietaryAccount	<PrtryAcct>	[1..1]	

1.1.1 IBAN <IBAN>

Presence: [1..1]

*This message item is part of choice **1.1.0** Identification.*

Definition: International Bank Account Number (IBAN) - identifier used internationally by financial institutions to uniquely identify the account of a customer. Further specifications of the format and content of the IBAN can be found in the standard ISO 13616 "Banking and related financial services - International Bank Account Number (IBAN)" version 1997-10-01, or later revisions.

Data Type: IBANIdentifier

Format: [a-zA-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}

Rule(s): IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

1.1.2 BBAN <BBAN>

Presence: [1..1]

*This message item is part of choice **1.1.0** Identification.*

Definition: Basic Bank Account Number (BBAN) - identifier used nationally by financial institutions, ie, in individual countries, generally as part of a National Account Numbering Scheme(s), to uniquely identify the account of a customer.

Data Type: BBANIdentifier

Format: [a-zA-Z0-9]{1,30}

1.1.3 UPIC <UPIC>

Presence: [1..1]

*This message item is part of choice **1.1.0** Identification.*

Definition: Universal Payment Identification Code (UPIC) - identifier used by the New York Clearing House to mask confidential data, such as bank accounts and bank routing numbers. UPIC numbers remain with business customers, regardless of banking relationship changes.

Data Type: UPICIdentifier

Format: [0-9]{8,17}

1.1.4 ProprietaryAccount <PrtryAcct>

Presence: [1..1]

*This message item is part of choice **1.1.0** Identification.*

Definition: Account number used by financial institutions in individual countries to identify an account of a customer, but not necessarily the bank and branch of the financial institution in which the account is held.

Type: *This message item is composed of the following **SimpleIdentificationInformation2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.5		Identification	<Id>	[1..1]	Text

1.1.5 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max34Text
Format: maxLength: 34
minLength: 1

1.1.6 Type <Tp>

Presence: [0..1]
Definition: Nature, or use, of the account.
Type: *This message item is composed of one of the following **CashAccountType2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.7	{Or	Code	<Cd>	[1..1]	Code
1.1.8	Or}	Proprietary	<Prtry>	[1..1]	Text

1.1.7 Code <Cd>

Presence: [1..1]
*This message item is part of choice **1.1.6** Type.*
Definition: Nature or use of the account in a coded form.
Data Type: Code
*One of the following **CashAccountType4Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
CISH	CashIncome	Account used for payment of income if different from the current cash account.
COMM	Commission	Account used for commission if different from the account for payment.
LOAN	Loan	Account used for loans.
MGLD	MarginalLending	Account used for a marginal lending facility.
MOMA	MoneyMarket	Account used for money markets if different from the cash account.
NREX	NonResidentExternal	Account used for non-resident external.

Code	Name	Definition
ODFT	Overdraft	Account is used for overdrafts.
ONDP	OverNightDeposit	Account used for overnight deposits.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SLRY	Salary	Accounts used for salary payments.
SVGS	Savings	Account used for savings.
TAXE	Tax	Account used for taxes if different from the account for payment.
TRAS	CashTrading	Account used for trading if different from the current cash account.

1.1.8 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **1.1.6** Type.*
Definition: Proprietary nature or use of the account.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.1.9 Currency <Ccy>

Presence: [0..1]
Definition: Identification of the currency in which the account is held.

Usage: Currency should only be used in case one and the same account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.
Data Type: CurrencyCode
Format: [A-Z]{3,3}
Rule(s): ValidationByTable

1.1.10 Name <Nm>

Presence: [0..1]
Definition: Name of the account, assigned by the account servicing institution in agreement with the account owner in order to provide an additional means of identification of the account.

Usage : the account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2 Charge

2.1 ChargesInformation1

ChargesInformation1 *is used in message* ***PaymentStatusReportV02*** *p.235.*

Definition: Information on the charges related to the payment transaction.
Type: *The following* ***ChargesInformation1*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.0		ChargesAmount	<ChrgsAmt>	[1..1]	Amount
2.1.1		ChargesParty	<ChrgsPty>	[1..1]	
2.1.2		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
2.1.3	{Or	BIC	<BIC>	[1..1]	Identifier
2.1.4	Or	ClearingSystemMemberIdentification	<ClrSysMmbId>	[1..1]	
2.1.5	{{Or	Identification	<Id>	[1..1]	Code
2.1.6	Or}}	Proprietary	<Prtry>	[1..1]	Text
2.1.7	Or	NameAndAddress	<NmAndAdr>	[1..1]	
2.1.8		Name	<Nm>	[1..1]	Text
2.1.9		PostalAddress	<PstlAdr>	[1..1]	
2.1.10		AddressType	<AdrTp>	[0..1]	Code
2.1.11		AddressLine	<AdrLine>	[0..5]	Text
2.1.12		StreetName	<StrtNm>	[0..1]	Text
2.1.13		BuildingNumber	<BldgNb>	[0..1]	Text
2.1.14		PostCode	<PstCd>	[0..1]	Text
2.1.15		TownName	<TwnNm>	[0..1]	Text
2.1.16		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
2.1.17		Country	<Ctry>	[1..1]	Code
2.1.18	Or	ProprietaryIdentification	<PrtryId>	[1..1]	
2.1.19		Identification	<Id>	[1..1]	Text
2.1.20		Issuer	<Issr>	[0..1]	Text
2.1.21	Or}	CombinedIdentification	<CmbndId>	[1..1]	
2.1.22		BIC	<BIC>	[0..1]	Identifier
2.1.23		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
2.1.24	{{Or	Identification	<Id>	[1..1]	Code
2.1.25	Or}}	Proprietary	<Prtry>	[1..1]	Text
2.1.26		Name	<Nm>	[0..1]	Text
2.1.27		PostalAddress	<PstlAdr>	[0..1]	
2.1.28		AddressType	<AdrTp>	[0..1]	Code

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.29		AddressLine	<AdrLine>	[0..5]	Text
2.1.30		StreetName	<StrtNm>	[0..1]	Text
2.1.31		BuildingNumber	<BldgNb>	[0..1]	Text
2.1.32		PostCode	<PstCd>	[0..1]	Text
2.1.33		TownName	<TwnNm>	[0..1]	Text
2.1.34		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
2.1.35		Country	<Ctry>	[1..1]	Code
2.1.36		ProprietaryIdentification	<PrtryId>	[0..1]	
2.1.37		Identification	<Id>	[1..1]	Text
2.1.38		Issuer	<Issr>	[0..1]	Text
2.1.39		BranchIdentification	<BrnchId>	[0..1]	
2.1.40		Identification	<Id>	[0..1]	Text
2.1.41		Name	<Nm>	[0..1]	Text
2.1.42		PostalAddress	<PstlAdr>	[0..1]	
2.1.43		AddressType	<AdrTp>	[0..1]	Code
2.1.44		AddressLine	<AdrLine>	[0..5]	Text
2.1.45		StreetName	<StrtNm>	[0..1]	Text
2.1.46		BuildingNumber	<BldgNb>	[0..1]	Text
2.1.47		PostCode	<PstCd>	[0..1]	Text
2.1.48		TownName	<TwnNm>	[0..1]	Text
2.1.49		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
2.1.50		Country	<Ctry>	[1..1]	Code

2.1.0 ChargesAmount <ChrgsAmt>

Presence: [1..1]

Definition: Transaction charges to be paid by the charge bearer.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

2.1.1 ChargesParty <ChrgsPty>

Presence: [1..1]

Definition: Party that takes the transaction charges or to which the transaction charges are due.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.2		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
2.1.39		BranchIdentification	<BrnchId>	[0..1]	

2.1.2 FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identifier of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *This message item is composed of one of the following **FinancialInstitutionIdentification5Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.3	{Or	BIC	<BIC>	[1..1]	Identifier
2.1.4	Or	ClearingSystemMemberIdentification	<ClrSysMmbId>	[1..1]	
2.1.7	Or	NameAndAddress	<NmAndAdr>	[1..1]	
2.1.18	Or	ProprietaryIdentification	<PrtryId>	[1..1]	
2.1.21	Or}	CombinedIdentification	<CmbndId>	[1..1]	

2.1.3 BIC <BIC>

Presence: [1..1]

*This message item is part of choice **2.1.2** FinancialInstitutionIdentification.*

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

2.1.4 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [1..1]

*This message item is part of choice **2.1.2** FinancialInstitutionIdentification.*

Definition: Unique and unambiguous identifier of a clearing system member, as assigned by the system or system administrator.

Type: *This message item is composed of one of the following **ClearingSystemMemberIdentification3Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.5	{Or	Identification	<Id>	[1..1]	Code
2.1.6	Or}	Proprietary	<Prtry>	[1..1]	Text

2.1.5 Identification <Id>

Presence: [1..1]

*This message item is part of choice **2.1.4** ClearingSystemMemberIdentification.*

Definition: Identification for a clearing system member, identified in the list of clearing system member identifications published externally.

Data Type: ExternalClearingSystemMemberCode

Format: maxLength: 35
minLength: 1

2.1.6 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.1.4** ClearingSystemMemberIdentification.*

Definition: Identification Code for a clearing system, that has not yet been identified in the list of clearing systems.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.1.7 NameAndAddress <NmAndAdr>

Presence: [1..1]

*This message item is part of choice **2.1.2** FinancialInstitutionIdentification.*

Definition: Identifies the name and address of a financial institution.

Type: *This message item is composed of the following **NameAndAddress7** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.8		Name	<Nm>	[1..1]	Text
2.1.9		PostalAddress	<PstlAdr>	[1..1]	

2.1.8 Name <Nm>

Presence: [1..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.1.9 PostalAddress <PstlAdr>

Presence: [1..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.10		AddressType	<AdrTp>	[0..1]	Code
2.1.11		AddressLine	<AdrLine>	[0..5]	Text
2.1.12		StreetName	<StrtNm>	[0..1]	Text
2.1.13		BuildingNumber	<BldgNb>	[0..1]	Text
2.1.14		PostCode	<PstCd>	[0..1]	Text
2.1.15		TownName	<TwnNm>	[0..1]	Text
2.1.16		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
2.1.17		Country	<Ctry>	[1..1]	Code

2.1.10 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

2.1.11 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.1.12 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.1.13 BuildingNumber <BldgNb>

Presence: [0..1]

Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

2.1.14 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

2.1.15 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.1.16 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country eg, state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.1.17 Country <Ctry>

Presence: [1..1]

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

2.1.18 ProprietaryIdentification <PrtryId>

Presence: [1..1]

*This message item is part of choice **2.1.2** FinancialInstitutionIdentification.*

Definition: Unique and unambiguous identifier, as assigned to a financial institution using a proprietary identification scheme.

Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.19		Identification	<Id>	[1..1]	Text
2.1.20		Issuer	<Issr>	[0..1]	Text

2.1.19 Identification <Id>

Presence: [1..1]

Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.1.20 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.1.21 CombinedIdentification <CmbndId>

Presence: [1..1]

*This message item is part of choice **2.1.2** FinancialInstitutionIdentification.*

Definition: Unique and unambiguous identification of a financial institution, through a combimation of globally recognised or proprietary identification scheme.

Type: *This message item is composed of the following **FinancialInstitutionIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.22		BIC	<BIC>	[0..1]	Identifier
2.1.23		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
2.1.26		Name	<Nm>	[0..1]	Text
2.1.27		PostalAddress	<PstlAdr>	[0..1]	
2.1.36		ProprietaryIdentification	<PrtryId>	[0..1]	

2.1.22 BIC <BIC>

Presence: [0..1]

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE,

COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

2.1.23 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [0..1]

Definition: Unique and unambiguous identifier of a clearing system member, as assigned by the system or system administrator.

Type: *This message item is composed of one of the following **ClearingSystemMemberIdentification3Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.24	{Or	Identification	<Id>	[1..1]	Code
2.1.25	Or}	Proprietary	<Prtry>	[1..1]	Text

2.1.24 Identification <Id>

Presence: [1..1]

*This message item is part of choice **2.1.23** ClearingSystemMemberIdentification.*

Definition: Identification for a clearing system member, identified in the list of clearing system member identifications published externally.

Data Type: ExternalClearingSystemMemberCode

Format: maxLength: 35
minLength: 1

2.1.25 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.1.23** ClearingSystemMemberIdentification.*

Definition: Identification Code for a clearing system, that has not yet been identified in the list of clearing systems.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.1.26 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2.1.27 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.28		AddressType	<AdrTp>	[0..1]	Code
2.1.29		AddressLine	<AdrLine>	[0..5]	Text
2.1.30		StreetName	<StrtNm>	[0..1]	Text
2.1.31		BuildingNumber	<BldgNb>	[0..1]	Text
2.1.32		PostCode	<PstCd>	[0..1]	Text
2.1.33		TownName	<TwnNm>	[0..1]	Text
2.1.34		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
2.1.35		Country	<Ctry>	[1..1]	Code

2.1.28 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

2.1.29 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.1.30 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.1.31 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

2.1.32 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

2.1.33 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.1.34 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country eg, state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.1.35 Country <Ctry>

Presence: [1..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

2.1.36 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier, as assigned to a financial institution using a proprietary identification scheme.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.37		Identification	<Id>	[1..1]	Text
2.1.38		Issuer	<Issr>	[0..1]	Text

2.1.37 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.1.38 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.1.39 BranchIdentification <BrnchId>

Presence: [0..1]
Definition: Information identifying a specific branch of a financial institution.

Usage : this component should be used in case the identification information in the financial institution component does not provide identification up to branch level.

Type: *This message item is composed of the following **BranchData** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.40		Identification	<Id>	[0..1]	Text
2.1.41		Name	<Nm>	[0..1]	Text
2.1.42		PostalAddress	<PstlAdr>	[0..1]	

2.1.40 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a branch of a financial institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.1.41 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.1.42 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.43		AddressType	<AdrTp>	[0..1]	Code
2.1.44		AddressLine	<AdrLine>	[0..5]	Text
2.1.45		StreetName	<StrtNm>	[0..1]	Text
2.1.46		BuildingNumber	<BldgNb>	[0..1]	Text
2.1.47		PostCode	<PstCd>	[0..1]	Text
2.1.48		TownName	<TwnNm>	[0..1]	Text
2.1.49		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
2.1.50		Country	<Ctry>	[1..1]	Code

2.1.43 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

2.1.44 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.1.45 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

2.1.46 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

2.1.47 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

2.1.48 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.1.49 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country eg, state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.1.50 Country <Ctry>

Presence: [1..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

3 Cheque

3.1 Cheque5

Cheque5 *is used in message* ***CustomerCreditTransferInitiationV02*** *p.28.*

Definition: Set of characteristics related to a cheque instruction, eg cheque type or cheque number.
Type: *The following* ***Cheque5*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.0		ChequeType	<ChqTp>	[0..1]	Code
3.1.1		ChequeNumber	<ChqNb>	[0..1]	Text
3.1.2		ChequeFrom	<ChqFr>	[0..1]	
3.1.3		Name	<Nm>	[1..1]	Text
3.1.4		Address	<Adr>	[1..1]	
3.1.5		AddressType	<AdrTp>	[0..1]	Code
3.1.6		AddressLine	<AdrLine>	[0..5]	Text
3.1.7		StreetName	<StrtNm>	[0..1]	Text
3.1.8		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.9		PostCode	<PstCd>	[0..1]	Text
3.1.10		TownName	<TwnNm>	[0..1]	Text
3.1.11		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.12		Country	<Ctry>	[1..1]	Code
3.1.13		DeliveryMethod	<DlvryMtd>	[0..1]	
3.1.14	{Or	Code	<Cd>	[1..1]	Code
3.1.15	Or}	Proprietary	<Prtry>	[1..1]	Text
3.1.16		DeliverTo	<DlvrTo>	[0..1]	
3.1.17		Name	<Nm>	[1..1]	Text
3.1.18		Address	<Adr>	[1..1]	
3.1.19		AddressType	<AdrTp>	[0..1]	Code
3.1.20		AddressLine	<AdrLine>	[0..5]	Text
3.1.21		StreetName	<StrtNm>	[0..1]	Text
3.1.22		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.23		PostCode	<PstCd>	[0..1]	Text
3.1.24		TownName	<TwnNm>	[0..1]	Text
3.1.25		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.26		Country	<Ctry>	[1..1]	Code
3.1.27		InstructionPriority	<InstrPrty>	[0..1]	Code
3.1.28		ChequeMaturityDate	<ChqMtrtyDt>	[0..1]	DateTime

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.29		FormsCode	<FrmsCd>	[0..1]	Text
3.1.30		MemoField	<MemoFld>	[0..1]	Text
3.1.31		RegionalClearingZone	<RgnlClrZone>	[0..1]	Text
3.1.32		PrintLocation	<PrtLctn>	[0..1]	Text

Rule(s): ChequeMaturityDateRule
If ChequeType is present and is DRFT or ELDR, then ChequeMaturityDate is optional. If ChequeType is not present or is different from DRFT or ELDR, then ChequeMaturityDate is not allowed.

Rule rationale: ChequeMaturityDate may be present only when ChequeType is DRFT or ELDR.

3.1.0 ChequeType <ChqTp>

Presence: [0..1]
Definition: Specifies the type of cheque to be issued by the first agent.
Data Type: Code
*When this message item is present, one of the following **ChequeType2Code** values must be used:*

Code	Name	Definition
BCHQ	BankCheque	Cheque drawn on the account of the debtor's financial institution, which is debited on the debtor's account when the cheque is issued.These cheques are printed by the debtor's financial institution and payment is guaranteed by the financial institution. Synonym is 'cashier's cheque'.
CCCH	CertifiedCustomerCheque	Cheque drawn on the account of the debtor, and debited on the debtor's account when the cheque is cashed. The financial institution prints and certifies the cheque, guaranteeing the payment.
CCHQ	CustomerCheque	Cheque drawn on the account of the debtor, and debited on the debtor's account when the cheque is cashed. Synonym is 'corporate cheque'.
DRFT	Draft	A guaranteed bank cheque with a future value date (do not pay before], which in commercial terms is a 'negotiatable instrument': the beneficiary can receive early payment from any bank under subtraction of a discount. The ordering customer's account is debited on value date.
ELDR	ElectronicDraft	An instrument with a future value date (do not pay before], which in commercial terms is a 'negotiatable instrument': the beneficiary can receive early payment from any bank under subtraction of a discount. The ordering customer's account is debited on value date.

3.1.1 ChequeNumber <ChqNb>

Presence: [0..1]

Definition: Identifies the cheque number.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.2 ChequeFrom <ChqFr>

Presence: [0..1]
Definition: Identifies the party that ordered the issuance of the cheque.
Type: *This message item is composed of the following **NameAndAddress3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.3		Name	<Nm>	[1..1]	Text
3.1.4		Address	<Adr>	[1..1]	

3.1.3 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and is usually used to identify that identity.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.4 Address <Adr>

Presence: [1..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.5		AddressType	<AdrTp>	[0..1]	Code
3.1.6		AddressLine	<AdrLine>	[0..5]	Text
3.1.7		StreetName	<StrtNm>	[0..1]	Text
3.1.8		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.9		PostCode	<PstCd>	[0..1]	Text
3.1.10		TownName	<TwnNm>	[0..1]	Text
3.1.11		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.12		Country	<Ctry>	[1..1]	Code

3.1.5 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

3.1.6 AddressLine <AdrLine>

Presence: [0..5]

Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

3.1.7 StreetName <StrtNm>

Presence: [0..1]

Definition: Name of a street or thoroughfare.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

3.1.8 BuildingNumber <BldgNb>

Presence: [0..1]

Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

3.1.9 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

3.1.10 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.11 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country eg, state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.12 Country <Ctry>

Presence: [1..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

3.1.13 DeliveryMethod <DlvryMtd>

Presence: [0..1]
Definition: Specifies the delivery method of the cheque by the debtor's agent.
Type: *This message item is composed of one of the following* ***ChequeDeliveryMethod1Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.14	{Or	Code	<Cd>	[1..1]	Code
3.1.15	Or}	Proprietary	<Prtry>	[1..1]	Text

3.1.14 Code <Cd>

Presence: [1..1]
This message item is part of choice ***3.1.13*** *DeliveryMethod.*
Definition: Specifies the delivery method of the cheque by the debtor's agent.
Data Type: Code
One of the following ***ChequeDelivery1Code*** *values must be used:*

Code	Name	Definition
CRCD	CourierToCreditor	Cheque is to be sent through courier services to creditor.
CRDB	CourierToDebtor	Cheque is to be sent through courier services to debtor.
CRFA	CourierToFinalAgent	Cheque is to be sent through courier services to creditor agent.
MLCD	MailToCreditor	Cheque is to be sent through mail services to creditor.
MLDB	MailToDebtor	Cheque is to be sent through mail services to debtor.
MLFA	MailToFinalAgent	Cheque is to be sent through mail services to creditor agent.
PUCD	PickUpByCreditor	Cheque will be picked up by the creditor

Code	Name	Definition
PUDB	PickUpByDebtor	Cheque will be picked up by the debtor.
PUFA	PickUpByFinalAgent	Cheque will be picked up by the creditor agent.
RGCD	RegisteredMailToCreditor	Cheque is to be sent through registered mail services to creditor.
RGDB	RegisteredMailToDebtor	Cheque is to be sent through registered mail services to debtor
RGFA	RegisteredMailToFinalAgent	Cheque is to be sent through registered mail services to creditor agent.

3.1.15 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.1.13** DeliveryMethod.*
Definition: Specifies a proprietary delivery method of the cheque by the debtor's agent.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.16 DeliverTo <DlvrTo>

Presence: [0..1]
Definition: Identifies the party to whom the debtor's agent should send the cheque.
Type: *This message item is composed of the following **NameAndAddress3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.17		Name	<Nm>	[1..1]	Text
3.1.18		Address	<Adr>	[1..1]	

3.1.17 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and is usually used to identify that identity.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.18 Address <Adr>

Presence: [1..1]
Definition: Postal address of a party.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.19		AddressType	<AdrTp>	[0..1]	Code

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.20		AddressLine	<AdrLine>	[0..5]	Text
3.1.21		StreetName	<StrtNm>	[0..1]	Text
3.1.22		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.23		PostCode	<PstCd>	[0..1]	Text
3.1.24		TownName	<TwnNm>	[0..1]	Text
3.1.25		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.26		Country	<Ctry>	[1..1]	Code

3.1.19 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

3.1.20 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.21 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.22 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

3.1.23 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

3.1.24 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.25 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country eg, state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.26 Country <Ctry>

Presence: [1..1]

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

3.1.27 InstructionPriority <InstrPrty>

Presence: [0..1]

Definition: Urgency or order of importance that the originator would like the recipient of the payment instruction to apply to the processing of the payment instruction.

Data Type: Code

*When this message item is present, one of the following **Priority2Code** values must be used:*

Code	Name	Definition
HIGH	High	Priority level is high.
NORM	Normal	Priority level is normal.

3.1.28 ChequeMaturityDate <ChqMtrtyDt>

Presence: [0..1]

Definition: Date when the draft becomes payable and the debtor's account is debited.

Data Type: ISODate

3.1.29 FormsCode <FrmsCd>

Presence: [0..1]

Definition: Code agreed between the initiating party and the debtor's agent, that specifies the cheque layout, company logo and digitised signature to be used to print the cheque.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.30 MemoField <MemoFld>

Presence: [0..1]

Definition: Information that needs to be printed on a cheque, used by the payer to add miscellaneous information.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.31 RegionalClearingZone <RgnlClrZone>

Presence: [0..1]

Definition: Regional area in which the cheque can be cleared, when a country has no nation-wide cheque clearing organisation.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.32 PrintLocation <PrtLctn>

Presence: [0..1]

Definition: Specifies the print location of the cheque.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4 Financial institution identification

4.1 BranchAndFinancialInstitutionIdentification3

BranchAndFinancialInstitutionIdentification3 *is used in message* ***CustomerCreditTransferInitiationV02*** *p.26, p.27, p.27, p.28, p.28, p.28, p.28, message* ***CustomerDirectDebitInitiationV01*** *p.79, p.80, p.80, p.81, p.81, p.81, message* ***CustomerPaymentReversalV01*** *p.135, p.135, p.135, p.136, p.136, p.137, p.137, p.137, p.138, p.138, message* ***PaymentCancellationRequestV01*** *p.183, p.183, p.183, p.183, p.183, p.184, p.184, p.185, p.185, p.185, p.186, p.186, p. 187, p.187, message* ***PaymentStatusReportV02*** *p.234, p.234, p.234, p.234, p.234, p.235, p.235, p.236, p.236, p.236, p. 237, p.237, p.238, p.238.*

Definition: Unique and unambiguous identifier of a financial institution or a branch of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *The following **BranchAndFinancialInstitutionIdentification3** element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.0		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
4.1.1	{Or	BIC	<BIC>	[1..1]	Identifier
4.1.2	Or	ClearingSystemMemberIdentification	<ClrSysMmbId>	[1..1]	
4.1.3	{{Or	Identification	<Id>	[1..1]	Code
4.1.4	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.5	Or	NameAndAddress	<NmAndAdr>	[1..1]	
4.1.6		Name	<Nm>	[1..1]	Text
4.1.7		PostalAddress	<PstlAdr>	[1..1]	
4.1.8		AddressType	<AdrTp>	[0..1]	Code
4.1.9		AddressLine	<AdrLine>	[0..5]	Text
4.1.10		StreetName	<StrtNm>	[0..1]	Text
4.1.11		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.12		PostCode	<PstCd>	[0..1]	Text
4.1.13		TownName	<TwnNm>	[0..1]	Text
4.1.14		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.15		Country	<Ctry>	[1..1]	Code
4.1.16	Or	ProprietaryIdentification	<PrtryId>	[1..1]	
4.1.17		Identification	<Id>	[1..1]	Text
4.1.18		Issuer	<Issr>	[0..1]	Text
4.1.19	Or}	CombinedIdentification	<CmbndId>	[1..1]	
4.1.20		BIC	<BIC>	[0..1]	Identifier
4.1.21		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
4.1.22	{{Or	Identification	<Id>	[1..1]	Code
4.1.23	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.24		Name	<Nm>	[0..1]	Text
4.1.25		PostalAddress	<PstlAdr>	[0..1]	
4.1.26		AddressType	<AdrTp>	[0..1]	Code
4.1.27		AddressLine	<AdrLine>	[0..5]	Text
4.1.28		StreetName	<StrtNm>	[0..1]	Text
4.1.29		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.30		PostCode	<PstCd>	[0..1]	Text
4.1.31		TownName	<TwnNm>	[0..1]	Text
4.1.32		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.33		Country	<Ctry>	[1..1]	Code
4.1.34		ProprietaryIdentification	<PrtryId>	[0..1]	
4.1.35		Identification	<Id>	[1..1]	Text
4.1.36		Issuer	<Issr>	[0..1]	Text
4.1.37		BranchIdentification	<BrnchId>	[0..1]	
4.1.38		Identification	<Id>	[0..1]	Text
4.1.39		Name	<Nm>	[0..1]	Text
4.1.40		PostalAddress	<PstlAdr>	[0..1]	
4.1.41		AddressType	<AdrTp>	[0..1]	Code
4.1.42		AddressLine	<AdrLine>	[0..5]	Text
4.1.43		StreetName	<StrtNm>	[0..1]	Text
4.1.44		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.45		PostCode	<PstCd>	[0..1]	Text
4.1.46		TownName	<TwnNm>	[0..1]	Text
4.1.47		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.48		Country	<Ctry>	[1..1]	Code

4.1.0 FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identifier of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *This message item is composed of one of the following **FinancialInstitutionIdentification5Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.1	{Or	BIC	<BIC>	[1..1]	Identifier
4.1.2	Or	ClearingSystemMemberIdentification	<ClrSysMmbId>	[1..1]	
4.1.5	Or	NameAndAddress	<NmAndAdr>	[1..1]	
4.1.16	Or	ProprietaryIdentification	<PrtryId>	[1..1]	
4.1.19	Or}	CombinedIdentification	<CmbndId>	[1..1]	

4.1.1 BIC <BIC>

Presence: [1..1]

*This message item is part of choice **4.1.0** FinancialInstitutionIdentification.*

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

4.1.2 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [1..1]

*This message item is part of choice **4.1.0** FinancialInstitutionIdentification.*

Definition: Unique and unambiguous identifier of a clearing system member, as assigned by the system or system administrator.

Type: *This message item is composed of one of the following **ClearingSystemMemberIdentification3Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.3	{Or	Identification	<Id>	[1..1]	Code
4.1.4	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.3 Identification <Id>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Identification for a clearing system member, identified in the list of clearing system member identifications published externally.

Data Type: ExternalClearingSystemMemberCode

Format: maxLength: 35
minLength: 1

4.1.4 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **4.1.2** ClearingSystemMemberIdentification.*

Definition: Identification Code for a clearing system, that has not yet been identified in the list of clearing systems.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.5 NameAndAddress <NmAndAdr>

Presence: [1..1]

*This message item is part of choice **4.1.0** FinancialInstitutionIdentification.*

Definition: Identifies the name and address of a financial institution.

Type: *This message item is composed of the following **NameAndAddress7** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.6		Name	<Nm>	[1..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.7		PostalAddress	<PstlAdr>	[1..1]	

4.1.6 Name <Nm>

Presence: [1..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.7 PostalAddress <PstlAdr>

Presence: [1..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.8		AddressType	<AdrTp>	[0..1]	Code
4.1.9		AddressLine	<AdrLine>	[0..5]	Text
4.1.10		StreetName	<StrtNm>	[0..1]	Text
4.1.11		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.12		PostCode	<PstCd>	[0..1]	Text
4.1.13		TownName	<TwnNm>	[0..1]	Text
4.1.14		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.15		Country	<Ctry>	[1..1]	Code

4.1.8 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.9 AddressLine <AdrLine>

Presence: [0..5]

Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.10 StreetName <StrtNm>

Presence: [0..1]

Definition: Name of a street or thoroughfare.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.11 BuildingNumber <BldgNb>

Presence: [0..1]

Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

4.1.12 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

4.1.13 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.14 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country eg, state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.15 Country <Ctry>

Presence: [1..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.16 ProprietaryIdentification <PrtryId>

Presence: [1..1]
*This message item is part of choice **4.1.0** FinancialInstitutionIdentification.*
Definition: Unique and unambiguous identifier, as assigned to a financial institution using a proprietary identification scheme.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.17		Identification	<Id>	[1..1]	Text
4.1.18		Issuer	<Issr>	[0..1]	Text

4.1.17 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.18 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.19 CombinedIdentification <CmbndId>

Presence: [1..1]
*This message item is part of choice **4.1.0** FinancialInstitutionIdentification.*
Definition: Unique and unambiguous identification of a financial institution, through a combimation of globally recognised or proprietary identification scheme.
Type: *This message item is composed of the following **FinancialInstitutionIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.20		BIC	<BIC>	[0..1]	Identifier
4.1.21		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
4.1.24		Name	<Nm>	[0..1]	Text
4.1.25		PostalAddress	<PstlAdr>	[0..1]	
4.1.34		ProprietaryIdentification	<PrtryId>	[0..1]	

4.1.20 BIC <BIC>

Presence: [0..1]

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

4.1.21 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [0..1]

Definition: Unique and unambiguous identifier of a clearing system member, as assigned by the system or system administrator.

Type: *This message item is composed of one of the following **ClearingSystemMemberIdentification3Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.22	{Or	Identification	<Id>	[1..1]	Code
4.1.23	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.22 Identification <Id>

Presence: [1..1]

*This message item is part of choice **4.1.21** ClearingSystemMemberIdentification.*

Definition: Identification for a clearing system member, identified in the list of clearing system member identifications published externally.

Data Type: ExternalClearingSystemMemberCode

Format: maxLength: 35
minLength: 1

4.1.23 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **4.1.21** ClearingSystemMemberIdentification.*

Definition: Identification Code for a clearing system, that has not yet been identified in the list of clearing systems.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.24 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.25 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.

Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.26		AddressType	<AdrTp>	[0..1]	Code
4.1.27		AddressLine	<AdrLine>	[0..5]	Text
4.1.28		StreetName	<StrtNm>	[0..1]	Text
4.1.29		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.30		PostCode	<PstCd>	[0..1]	Text
4.1.31		TownName	<TwnNm>	[0..1]	Text
4.1.32		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.33		Country	<Ctry>	[1..1]	Code

4.1.26 AddressType <AdrTp>

Presence: [0..1]

Definition: Identifies the nature of the postal address.

Data Type: Code

*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.27 AddressLine <AdrLine>

Presence: [0..5]

Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.28 StreetName <StrtNm>

Presence: [0..1]

Definition: Name of a street or thoroughfare.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.29 BuildingNumber <BldgNb>

Presence: [0..1]

Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

4.1.30 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

4.1.31 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.32 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country eg, state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.33 Country <Ctry>

Presence: [1..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.34 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier, as assigned to a financial institution using a proprietary identification scheme.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.35		Identification	<Id>	[1..1]	Text
4.1.36		Issuer	<Issr>	[0..1]	Text

4.1.35 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.36 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.37 BranchIdentification <BrnchId>

Presence: [0..1]
Definition: Information identifying a specific branch of a financial institution.

Usage : this component should be used in case the identification information in the financial institution component does not provide identification up to branch level.

Type: *This message item is composed of the following **BranchData** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.38		Identification	<Id>	[0..1]	Text
4.1.39		Name	<Nm>	[0..1]	Text
4.1.40		PostalAddress	<PstlAdr>	[0..1]	

4.1.38 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a branch of a financial institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.39 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.40 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.41		AddressType	<AdrTp>	[0..1]	Code
4.1.42		AddressLine	<AdrLine>	[0..5]	Text
4.1.43		StreetName	<StrtNm>	[0..1]	Text
4.1.44		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.45		PostCode	<PstCd>	[0..1]	Text
4.1.46		TownName	<TwnNm>	[0..1]	Text
4.1.47		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.48		Country	<Ctry>	[1..1]	Code

4.1.41 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.42 AddressLine <AdrLine>

Presence: [0..5]

Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.43 StreetName <StrtNm>

Presence: [0..1]

Definition: Name of a street or thoroughfare.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.44 BuildingNumber <BldgNb>

Presence: [0..1]

Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

4.1.45 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

4.1.46 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.47 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country eg, state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.48 Country <Ctry>

Presence: [1..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

5 Party identification

5.1 PartyIdentification8

PartyIdentification8 *is used in message* ***CustomerCreditTransferInitiationV02*** *p.26, p.27, p.27, p.28, p.28, p.28, p.29, p.29, message* ***CustomerDirectDebitInitiationV01*** *p.79, p.80, p.80, p.81, p.81, p.81, p.81, p.81, p.81, p.83, p.83, message* ***CustomerPaymentReversalV01*** *p.135, p.135, p.136, p.136, p.137, p.137, p.138, p.138, p.138, p.138, p.138, p.138, message* ***PaymentCancellationRequestV01*** *p.183, p.184, p.184, p.185, p.186, p.186, p.187, p.187, p.187, p.187, p.187, p.187, message* ***PaymentStatusReportV02*** *p.234, p.235, p.235, p.236, p.237, p.237, p.238, p.238, p.238, p.238, p.238, p. 238.*

Definition: Identification of a person, a financial institution or a non-financial institution.
Type: *The following* ***PartyIdentification8*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.0		Name	<Nm>	[0..1]	Text
5.1.1		PostalAddress	<PstlAdr>	[0..1]	
5.1.2		AddressType	<AdrTp>	[0..1]	Code
5.1.3		AddressLine	<AdrLine>	[0..5]	Text
5.1.4		StreetName	<StrtNm>	[0..1]	Text
5.1.5		BuildingNumber	<BldgNb>	[0..1]	Text
5.1.6		PostCode	<PstCd>	[0..1]	Text
5.1.7		TownName	<TwnNm>	[0..1]	Text
5.1.8		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
5.1.9		Country	<Ctry>	[1..1]	Code
5.1.10		Identification	<Id>	[0..1]	
5.1.11	{Or	OrganisationIdentification	<OrgId>	[1..1]	

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.12		BIC	<BIC>	[0..1]	Identifier
5.1.13		IBEI	<IBEI>	[0..1]	Identifier
5.1.14		BEI	<BEI>	[0..1]	Identifier
5.1.15		EANGLN	<EANGLN>	[0..1]	Identifier
5.1.16		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
5.1.17		DUNS	<DUNS>	[0..1]	Identifier
5.1.18		BankPartyIdentification	<BkPtyId>	[0..1]	Text
5.1.19		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
5.1.20		ProprietaryIdentification	<PrtryId>	[0..1]	
5.1.21		Identification	<Id>	[1..1]	Text
5.1.22		Issuer	<Issr>	[0..1]	Text
5.1.23	Or}	PrivateIdentification	<PrvtId>	[1..4]	
5.1.24	{{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
5.1.25	Or	CustomerNumber	<CstmrNb>	[1..1]	Text
5.1.26	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
5.1.27	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text
5.1.28	Or	PassportNumber	<PsptNb>	[1..1]	Text
5.1.29	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
5.1.30	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
5.1.31	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
5.1.32	Or	DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[1..1]	
5.1.33		BirthDate	<BirthDt>	[1..1]	DateTime
5.1.34		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
5.1.35		CityOfBirth	<CityOfBirth>	[1..1]	Text
5.1.36		CountryOfBirth	<CtryOfBirth>	[1..1]	Code
5.1.37	Or}}	OtherIdentification	<OthrId>	[1..1]	
5.1.38		Identification	<Id>	[1..1]	Text
5.1.39		IdentificationType	<IdTp>	[1..1]	Text
5.1.40		Issuer	<Issr>	[0..1]	Text
5.1.41		CountryOfResidence	<CtryOfRes>	[0..1]	Code

5.1.0 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max70Text
Format: maxLength: 70

minLength: 1

5.1.1 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.2		AddressType	<AdrTp>	[0..1]	Code
5.1.3		AddressLine	<AdrLine>	[0..5]	Text
5.1.4		StreetName	<StrtNm>	[0..1]	Text
5.1.5		BuildingNumber	<BldgNb>	[0..1]	Text
5.1.6		PostCode	<PstCd>	[0..1]	Text
5.1.7		TownName	<TwnNm>	[0..1]	Text
5.1.8		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
5.1.9		Country	<Ctry>	[1..1]	Code

5.1.2 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

5.1.3 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

5.1.4 StreetName <StrtNm>

Presence: [0..1]

Definition: Name of a street or thoroughfare.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

5.1.5 BuildingNumber <BldgNb>

Presence: [0..1]

Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

5.1.6 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

5.1.7 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.8 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country eg, state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.9 Country <Ctry>

Presence: [1..1]

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

5.1.10 Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous way of identifying an organisation or an individual person.

Type: *This message item is composed of one of the following **Party2Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.11	{Or	OrganisationIdentification	<OrgId>	[1..1]	
5.1.23	Or}	PrivateIdentification	<PrvtId>	[1..4]	

5.1.11 OrganisationIdentification <OrgId>

Presence: [1..1]

*This message item is part of choice **5.1.10** Identification.*

Definition: Unique and unambiguous way of identifying an organisation.

Type: *This message item is composed of the following **OrganisationIdentification2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.12		BIC	<BIC>	[0..1]	Identifier
5.1.13		IBEI	<IBEI>	[0..1]	Identifier
5.1.14		BEI	<BEI>	[0..1]	Identifier
5.1.15		EANGLN	<EANGLN>	[0..1]	Identifier
5.1.16		CHIPSUniversalIdentification	<USCHU>	[0..1]	Identifier
5.1.17		DUNS	<DUNS>	[0..1]	Identifier
5.1.18		BankPartyIdentification	<BkPtyId>	[0..1]	Text
5.1.19		TaxIdentificationNumber	<TaxIdNb>	[0..1]	Text
5.1.20		ProprietaryIdentification	<PrtryId>	[0..1]	

5.1.12 BIC <BIC>

Presence: [0..1]

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

5.1.13 IBEI <IBEI>

Presence: [0..1]

Definition: International Business Entity Identifier to uniquely identify business entities playing a role in the lifecycle of and events related to a financial instrument. (tentative - to be confirmed)

Data Type: IBEIIdentifier

Format: [A-Z]{2,2}[B-DF-HJ-NP-TV-XZ0-9]{7,7}[0-9]{1,1}

5.1.14 BEI <BEI>

Presence: [0..1]

Definition: Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).

Data Type: BEIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BEI
Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.

5.1.15 EANGLN <EANGLN>

Presence: [0..1]

Definition: Global Location Number. A non-significant reference number used to identify legal entities, functional entities, or physical entities according to the European Association for Numbering (EAN) numbering scheme rules.The number is used to retrieve detailed information that is linked to it.

Data Type: EANGLNIdentifier

Format: [0-9]{13,13}

5.1.16 CHIPSUniversalIdentification <USCHU>

Presence: [0..1]

Definition: (United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID) - identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.

Data Type: CHIPSUniversalIdentifier

Format: CH[0-9]{6,6}

5.1.17 DUNS <DUNS>

Presence: [0..1]

Definition: Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.

Data Type: DunsIdentifier

Format: [0-9]{9,9}

5.1.18 BankPartyIdentification <BkPtyId>

Presence: [0..1]

Definition: Unique and unambiguous assignment made by a specific bank to identify a relationship as defined between the bank and its client.

Data Type: Max35Text

Format: maxLength: 35

minLength: 1

5.1.19 TaxIdentificationNumber <TaxIdNb>

Presence: [0..1]
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.20 ProprietaryIdentification <PrtryId>

Presence: [0..1]
Definition: Unique and unambiguous identifier for an organisation that is allocated by an institution.
Type: *This message item is composed of the following **GenericIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.21		Identification	<Id>	[1..1]	Text
5.1.22		Issuer	<Issr>	[0..1]	Text

5.1.21 Identification <Id>

Presence: [1..1]
Definition: Name or number assigned by an entity to enable recognition of that entity, eg, account identifier.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.22 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.23 PrivateIdentification <PrvtId>

Presence: [1..4]
*This message item is part of choice **5.1.10** Identification.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.24	{Or	DriversLicenseNumber	<DrvrsLicNb>	[1..1]	Text
5.1.25	Or	CustomerNumber	<CstmrNb>	[1..1]	Text
5.1.26	Or	SocialSecurityNumber	<SclSctyNb>	[1..1]	Text
5.1.27	Or	AlienRegistrationNumber	<AlnRegnNb>	[1..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.28	Or	PassportNumber	<PsptNb>	[1..1]	Text
5.1.29	Or	TaxIdentificationNumber	<TaxIdNb>	[1..1]	Text
5.1.30	Or	IdentityCardNumber	<IdntyCardNb>	[1..1]	Text
5.1.31	Or	EmployerIdentificationNumber	<MplyrIdNb>	[1..1]	Text
5.1.32	Or	DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[1..1]	
5.1.37	Or}	OtherIdentification	<OthrId>	[1..1]	
5.1.40		Issuer	<Issr>	[0..1]	Text

5.1.24 DriversLicenseNumber <DrvrsLicNb>

Synonym(s): :95S::ALTE//DRLC (ISO 15022)
Presence: [1..1]
*This message item is part of choice **5.1.23** PrivateIdentification.*
Definition: Number assigned by a license authority to a driver's license.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.25 CustomerNumber <CstmrNb>

Presence: [1..1]
*This message item is part of choice **5.1.23** PrivateIdentification.*
Definition: Number assigned by an agent to identify its customer.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.26 SocialSecurityNumber <SclSctyNb>

Synonym(s): :95S::ALTE//SSNX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **5.1.23** PrivateIdentification.*
Definition: Number assigned by a social security agency.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.27 AlienRegistrationNumber <AlnRegnNb>

Synonym(s): :95S::ALTE//ARNU (ISO 15022)
Presence: [1..1]
*This message item is part of choice **5.1.23** PrivateIdentification.*
Definition: Number assigned by a government agency to identify foreign nationals.
Data Type: Max35Text
Format: maxLength: 35

minLength: 1

5.1.28 PassportNumber <PsptNb>

Synonym(s): :95S::ALTE//CCPT (ISO 15022)
Presence: [1..1]
*This message item is part of choice **5.1.23** PrivateIdentification.*
Definition: Number assigned by a passport authority to a passport.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.29 TaxIdentificationNumber <TaxIdNb>

Synonym(s): :95S::ALTE//TXID (ISO 15022)
Presence: [1..1]
*This message item is part of choice **5.1.23** PrivateIdentification.*
Definition: Number assigned by a tax authority to an entity.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.30 IdentityCardNumber <IdntyCardNb>

Presence: [1..1]
*This message item is part of choice **5.1.23** PrivateIdentification.*
Definition: Number assigned by a national authority to an identity card.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.31 EmployerIdentificationNumber <MplyrIdNb>

Synonym(s): :95S::ALTE//EINX (ISO 15022)
Presence: [1..1]
*This message item is part of choice **5.1.23** PrivateIdentification.*
Definition: Number assigned to an employer by a registration authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.32 DateAndPlaceOfBirth <DtAndPlcOfBirth>

Presence: [1..1]
*This message item is part of choice **5.1.23** PrivateIdentification.*
Definition: Date and place of birth of a person.
Type: *This message item is composed of the following **DateAndPlaceOfBirth** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.33		BirthDate	<BirthDt>	[1..1]	DateTime

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.34		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
5.1.35		CityOfBirth	<CityOfBirth>	[1..1]	Text
5.1.36		CountryOfBirth	<CtryOfBirth>	[1..1]	Code

5.1.33 BirthDate <BirthDt>

Presence: [1..1]
Definition: Date on which a person is born.
Data Type: ISODate

5.1.34 ProvinceOfBirth <PrvcOfBirth>

Presence: [0..1]
Definition: Province where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.35 CityOfBirth <CityOfBirth>

Presence: [1..1]
Definition: City where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.36 CountryOfBirth <CtryOfBirth>

Presence: [1..1]
Definition: Country where a person was born.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

5.1.37 OtherIdentification <OthrId>

Presence: [1..1]
*This message item is part of choice **5.1.23** PrivateIdentification.*
Definition: Identifier issued to a person for which no specific identifier has been defined.
Type: *This message item is composed of the following **GenericIdentification4** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.38		Identification	<Id>	[1..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.39		IdentificationType	<IdTp>	[1..1]	Text

5.1.38 Identification <Id>

Presence: [1..1]

Definition: Identifier issued to a person for which no specific identifier has been defined.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.39 IdentificationType <IdTp>

Presence: [1..1]

Definition: Specifies the nature of the identifier.
Usage: IdentificationType is used to specify what kind of identifier is used. It should be used in case the identifier is different from the identifiers listed in the pre-defined identifier list.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.40 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identifier.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.41 CountryOfResidence <CtryOfRes>

Presence: [0..1]

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

6 Postal address

6.1 PostalAddress1

PostalAddress1 *is used in message* ***CustomerCreditTransferInitiationV02*** *p.29, message* ***CustomerDirectDebitInitiationV01*** *p.82.*

Definition: Information that locates and identifies a specific address, as defined by postal services.

Type: *The following* ***PostalAddress1*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.0		AddressType	<AdrTp>	[0..1]	Code
6.1.1		AddressLine	<AdrLine>	[0..5]	Text
6.1.2		StreetName	<StrtNm>	[0..1]	Text
6.1.3		BuildingNumber	<BldgNb>	[0..1]	Text
6.1.4		PostCode	<PstCd>	[0..1]	Text
6.1.5		TownName	<TwnNm>	[0..1]	Text
6.1.6		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
6.1.7		Country	<Ctry>	[1..1]	Code

6.1.0 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

6.1.1 AddressLine <AdrLine>

Presence: [0..5]
Definition: Information that locates and identifies a specific address, as defined by postal services, that is presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

6.1.2 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

6.1.3 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

6.1.4 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

6.1.5 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.6 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country eg, state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.7 Country <Ctry>

Presence: [1..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

7 Tax

7.1 TaxInformation2

TaxInformation2 *is used in message* ***CustomerCreditTransferInitiationV02*** *p.29, message* ***CustomerDirectDebitInitiationV01*** *p.82.*

Definition: Details about tax paid, or to be paid, to the government in accordance with the law, including pre-defined parameters such as thresholds and type of account.

Type: *The following **TaxInformation2** element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.0		CreditorTaxIdentification	<CdtrTaxId>	[0..1]	Text
7.1.1		CreditorTaxType	<CdtrTaxTp>	[0..1]	Text
7.1.2		DebtorTaxIdentification	<DbtrTaxId>	[0..1]	Text
7.1.3		TaxReferenceNumber	<TaxRefNb>	[0..1]	Text
7.1.4		TotalTaxableBaseAmount	<TtlTaxblBaseAmt>	[0..1]	Amount
7.1.5		TotalTaxAmount	<TtlTaxAmt>	[0..1]	Amount
7.1.6		TaxDate	<TaxDt>	[0..1]	DateTime
7.1.7		TaxTypeInformation	<TaxTpInf>	[0..n]	
7.1.8		CertificateIdentification	<CertId>	[0..1]	Text
7.1.9		TaxType	<TaxTp>	[0..1]	
7.1.10		CategoryDescription	<CtgyDesc>	[0..1]	Text
7.1.11		Rate	<Rate>	[0..1]	Rate
7.1.12		TaxableBaseAmount	<TaxblBaseAmt>	[0..1]	Amount
7.1.13		Amount	<Amt>	[0..1]	Amount

7.1.0 CreditorTaxIdentification <CdtrTaxId>

Presence: [0..1]

Definition: Tax Identification Number of the creditor.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.1 CreditorTaxType <CdtrTaxTp>

Presence: [0..1]

Definition: Type of tax payer (creditor).

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.2 DebtorTaxIdentification <DbtrTaxId>

Presence: [0..1]

Definition: Tax Identification Number of the debtor.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

7.1.3 TaxReferenceNumber <TaxRefNb>

Presence: [0..1]
Definition: Tax reference information that is specific to a taxing agency.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

7.1.4 TotalTaxableBaseAmount <TtlTaxblBaseAmt>

Presence: [0..1]
Definition: Total amount of money on which the tax is based.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

7.1.5 TotalTaxAmount <TtlTaxAmt>

Presence: [0..1]
Definition: Amount of money resulting from the calculation of the tax.
Data Type: CurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*
Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}
Rule(s): **CurrencyCode**
ValidationByTable

7.1.6 TaxDate <TaxDt>

Presence: [0..1]
Definition: Date by which tax is due.
Data Type: ISODate

7.1.7 TaxTypeInformation <TaxTpInf>

Presence: [0..n]
Definition: Set of characteristics defining the type of tax.
Type: *This message item is composed of the following* ***TaxDetails*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.8		CertificateIdentification	<CertId>	[0..1]	Text
7.1.9		TaxType	<TaxTp>	[0..1]	

Rule(s): CertificateIdentificationAndOrTaxTypeRule
If CertificateIdentification is not present, then TaxType is mandatory.
If CertificateIdentification is present, then TaxType is optional.

7.1.8 CertificateIdentification <CertId>

Presence: [0..1]
Definition: Document issued by first agent on behalf of debtor to report withholding tax to taxing authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.9 TaxType <TaxTp>

Presence: [0..1]
Definition: Information on the type of tax.
Type: *This message item is composed of the following **TaxType** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
7.1.10		CategoryDescription	<CtgyDesc>	[0..1]	Text
7.1.11		Rate	<Rate>	[0..1]	Rate
7.1.12		TaxableBaseAmount	<TaxblBaseAmt>	[0..1]	Amount
7.1.13		Amount	<Amt>	[0..1]	Amount

7.1.10 CategoryDescription <CtgyDesc>

Presence: [0..1]
Definition: Description of the tax that is being paid, including specific representation required by taxing authority.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

7.1.11 Rate <Rate>

Presence: [0..1]
Definition: Rate used for calculation of the tax.
Data Type: PercentageRate
Format: fractionDigits: 10
totalDigits: 11

7.1.12 TaxableBaseAmount <TaxblBaseAmt>

Presence: [0..1]

Definition: Amount of money on which the tax is based.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

7.1.13 Amount <Amt>

Presence: [0..1]

Definition: Amount of money resulting from the calculation of the tax.

Data Type: CurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***CurrencyCode****.*

Format: **CurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
CurrencyCode
[A-Z]{3,3}

Rule(s): **CurrencyCode**
ValidationByTable

Indexes

Index of Message Items

A

AcceptanceDateTime: <AccptncDtTm>
Message PaymentStatusReportV02 235

AdditionalCancellationReasonInformation: <AddtlCxlRsnInf>
Message PaymentCancellationRequestV01 184, 184

AdditionalRemittanceInformation: <AddtlRmtInf>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 83
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

AdditionalReversalReasonInformation: <AddtlRvslRsnInf>
Message CustomerPaymentReversalV01 135, 136

AdditionalStatusReasonInformation: <AddtlStsRsnInf>
Message PaymentStatusReportV02 235, 235

Address: <Adr>
320, 320
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

AddressLine: <AdrLine>
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

AddressType: <AdrTp>
307, 307, 308, 320, 320, 329, 329, 330, 341, 352

AlienRegistrationNumber: <AlnRegnNb>
342

AmendmentIndicator: <AmdmntInd>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

AmendmentInformationDetails: <AmdmntInfDtls>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

Amount: <Amt>

354
Message CustomerCreditTransferInitiationV02 27, 27, 28
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 136, 136
Message PaymentCancellationRequestV01 184, 184
Message PaymentStatusReportV02 236, 236

Authorisation: <Authstn>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135

Authority: <Authrty>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

AuthorityCountry: <AuthrtyCtry>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

AuthorityName: <AuthrtyNm>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

B

BankPartyIdentification: <BkPtyId>
342

BatchBooking: <BtchBookg>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135

BBAN: <BBAN>
303

BEI: <BEI>
342

BIC: <BIC>
307, 307, 329, 329, 342

BirthDate: <BirthDt>
342

BranchIdentification: <BrnchId>
308, 330

BuildingNumber: <BldgNb>
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

C

CancellationIdentification: <CxlId>
Message PaymentCancellationRequestV01 184

CancellationOriginator: <CxlOrgtr>
Message PaymentCancellationRequestV01 184, 184

CancellationReason: <CxlRsn>
Message PaymentCancellationRequestV01 184, 184

CancellationReasonInformation: <CxlRsnInf>
Message PaymentCancellationRequestV01 184, 184

CategoryDescription: <CtgyDesc>
354

CategoryPurpose: <CtgyPurp>
Message CustomerCreditTransferInitiationV02 27, 27
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

CertificateIdentification: <CertId>
354

ChargeBearer: <ChrgBr>
Message CustomerCreditTransferInitiationV02 27, 28
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 136

ChargesAccount: <ChrgsAcct>
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80

ChargesAccountAgent: <ChrgsAcctAgt>
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80

ChargesAmount: <ChrgsAmt>
307

ChargesInformation: <ChrgsInf>
Message PaymentStatusReportV02 235

ChargesParty: <ChrgsPty>
307

ChequeFrom: <ChqFr>
320

ChequeInstruction: <ChqInstr>
Message CustomerCreditTransferInitiationV02 28

ChequeMaturityDate: <ChqMtrtyDt>
320

ChequeNumber: <ChqNb>
320

ChequeType: <ChqTp>
320

CHIPSUniversalIdentification: <USCHU>
342

CityOfBirth: <CityOfBirth>
342

ClearingChannel: <ClrChanl>
Message CustomerCreditTransferInitiationV02 27, 27
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ClearingSystem: <ClrSys>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ClearingSystemIdentification: <ClrSysId>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ClearingSystemMemberIdentification: <ClrSysMmbId>
307, 307, 329, 329

Code: <Cd>
303, 320
Message CustomerCreditTransferInitiationV02 27, 27, 27, 27, 28, 28, 28, 29, 29
Message CustomerDirectDebitInitiationV01 80, 80, 80, 80, 81, 82, 82, 82
Message CustomerPaymentReversalV01 135, 136, 137, 137, 138, 138
Message PaymentCancellationRequestV01 184, 184, 185, 185, 186, 186
Message PaymentStatusReportV02 235, 235, 236, 236, 237, 238

CombinedIdentification: <CmbndId>
307, 329

ContractIdentification: <CtrctId>
Message CustomerCreditTransferInitiationV02 28

ControlSum: <CtrlSum>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183

Country: <Ctry>
307, 308, 308, 320, 320, 329, 330, 330, 341, 352

CountryOfBirth: <CtryOfBirth>
342

CountryOfResidence: <CtryOfRes>
342

CountrySubDivision: <CtrySubDvsn>
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

CreationDateTime: <CreDtTm>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

CreditNoteAmount: <CdtNoteAmt>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

Creditor: <Cdtr>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

CreditorAccount: <CdtrAcct>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

CreditorAgent: <CdtrAgt>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 135, 138
Message PaymentCancellationRequestV01 183, 187
Message PaymentStatusReportV02 234, 238

CreditorAgentAccount: <CdtrAgtAcct>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

CreditorReference: <CdtrRef>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 83
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

CreditorReferenceInformation: <CdtrRefInf>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

CreditorReferenceType: <CdtrRefTp>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

CreditorSchemeIdentification: <CdtrSchmeId>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

CreditorTaxIdentification: <CdtrTaxId>
354

CreditorTaxType: <CdtrTaxTp>
354

CreditTransferTransactionInformation: <CdtTrfTxInf>
Message CustomerCreditTransferInitiationV02 27

Currency: <Ccy>
303

CurrencyOfTransfer: <CcyOfTrf>
Message CustomerCreditTransferInitiationV02 28
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

CustomerNumber: <CstmrNb>
342

D

DateAndPlaceOfBirth: <DtAndPlcOfBirth>
342

DateOfSignature: <DtOfSgntr>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

DebitCreditReportingIndicator: <DbtCdtRptgInd>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 81

Debtor: <Dbtr>
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

DebtorAccount: <DbtrAcct>
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

DebtorAgent: <DbtrAgt>
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 135, 138
Message PaymentCancellationRequestV01 183, 187
Message PaymentStatusReportV02 234, 238

DebtorAgentAccount: <DbtrAgtAcct>
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

DebtorTaxIdentification: <DbtrTaxId>
354

DeliverTo: <DlvrTo>
320

DeliveryMethod: <DlvryMtd>
320

DetailedControlSum: <DtldCtrlSum>
Message PaymentStatusReportV02 235

DetailedNumberOfTransactions: <DtldNbOfTxs>
Message PaymentStatusReportV02 235

DetailedStatus: <DtldSts>
Message PaymentStatusReportV02 235

DirectDebitTransaction: <DrctDbtTx>
Message CustomerDirectDebitInitiationV01 80

DirectDebitTransactionInformation: <DrctDbtTxInf>
Message CustomerDirectDebitInitiationV01 80

DiscountAppliedAmount: <DscntApldAmt>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

DriversLicenseNumber: <DrvrsLicNb>
342

DuePayableAmount: <DuePyblAmt>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

DUNS: <DUNS>
342

E

EANGLN: <EANGLN>
342

ElectronicSignature: <ElctrncSgntr>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

EmployerIdentificationNumber: <MplyrIdNb>
342

EndToEndIdentification: <EndToEndId>
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80

EquivalentAmount: <EqvtAmt>
Message CustomerCreditTransferInitiationV02 27
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

ExchangeRate: <XchgRate>
Message CustomerCreditTransferInitiationV02 28

ExchangeRateInformation: <XchgRateInf>
Message CustomerCreditTransferInitiationV02 28

F

FileOriginator: <FileOrgtr>
Message PaymentStatusReportV02 235

FinalCollectionDate: <FnlColltnDt>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

FinancialInstitutionIdentification: <FinInstnId>
307, 329

FirstCollectionDate: <FrstColltnDt>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

FormsCode: <FrmsCd>
321

ForwardingAgent: <FwdgAgt>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

Frequency: <Frqcy>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

G

GroupCancellation: <GrpCxl>
Message PaymentCancellationRequestV01 183

GroupHeader: <GrpHdr>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

Grouping: <Grpg>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79

GroupReversal: <GrpRvsl>
Message CustomerPaymentReversalV01 135

GroupStatus: <GrpSts>
Message PaymentStatusReportV02 235

I

IBAN: <IBAN>
303

IBEI: <IBEI>
342

Identification: <Id>
303, 303, 307, 307, 307, 308, 308, 329, 329, 329, 330, 330, 341, 342, 342

IdentificationType: <IdTp>
342

IdentityCardNumber: <IdntyCardNb>
342

Information: <Inf>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

InitiatingParty: <InitgPty>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

InstructedAgent: <InstdAgt>
Message PaymentCancellationRequestV01 183, 184
Message PaymentStatusReportV02 234, 235

InstructedAmount: <InstdAmt>
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

InstructedReimbursementAgent: <InstdRmbrsmntAgt>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

InstructedReimbursementAgentAccount: <InstdRmbrsmntAgtAcct>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

InstructingAgent: <InstgAgt>
Message PaymentCancellationRequestV01 183, 184
Message PaymentStatusReportV02 234, 235

InstructingReimbursementAgent: <InstgRmbrsmntAgt>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

InstructingReimbursementAgentAccount: <InstgRmbrsmntAgtAcct>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

InstructionForCreditorAgent: <InstrForCdtrAgt>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 81

InstructionForDebtorAgent: <InstrForDbtrAgt>
Message CustomerCreditTransferInitiationV02 28

InstructionIdentification: <InstrId>
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80

InstructionInformation: <InstrInf>
Message CustomerCreditTransferInitiationV02 28

InstructionPriority: <InstrPrty>
320
Message CustomerCreditTransferInitiationV02 26, 27

Message CustomerDirectDebitInitiationV01 79, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

InterbankSettlementAmount: <IntrBkSttlmAmt>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

InterbankSettlementDate: <IntrBkSttlmDt>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

IntermediaryAgent1: <IntrmyAgt1>
Message CustomerCreditTransferInitiationV02 28

IntermediaryAgent1Account: <IntrmyAgt1Acct>
Message CustomerCreditTransferInitiationV02 28

IntermediaryAgent2: <IntrmyAgt2>
Message CustomerCreditTransferInitiationV02 28

IntermediaryAgent2Account: <IntrmyAgt2Acct>
Message CustomerCreditTransferInitiationV02 28

IntermediaryAgent3: <IntrmyAgt3>
Message CustomerCreditTransferInitiationV02 28

IntermediaryAgent3Account: <IntrmyAgt3Acct>
Message CustomerCreditTransferInitiationV02 28

Invoicee: <Invcee>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 83
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

Invoicer: <Invcr>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 83
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

Issuer: <Issr>
307, 308, 329, 330, 342, 342
Message CustomerCreditTransferInitiationV02 29, 29
Message CustomerDirectDebitInitiationV01 82, 83
Message CustomerPaymentReversalV01 138, 138

Message PaymentCancellationRequestV01 186, 187
Message PaymentStatusReportV02 237, 238

L

LocalInstrument: <LclInstrm>
Message CustomerCreditTransferInitiationV02 27, 27
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

M

MandateIdentification: <MndtId>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

MandateRelatedInformation: <MndtRltdInf>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

MemoField: <MemoFld>
321

MessageIdentification: <MsgId>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

N

Name: <Nm>
303, 307, 307, 308, 320, 320, 329, 329, 330, 341
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

NameAndAddress: <NmAndAdr>
307, 329

NetworkFileName: <NtwkFileNm>
Message PaymentStatusReportV02 234

NumberOfTransactions: <NbOfTxs>
Message CustomerCreditTransferInitiationV02 26

Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183

NumberOfTransactionsPerStatus: <NbOfTxsPerSts>
Message PaymentStatusReportV02 235

O

OrganisationIdentification: <OrgId>
341

OriginalControlSum: <OrgnlCtrlSum>
Message PaymentStatusReportV02 235

OriginalCreationDateTime: <OrgnlCreDtTm>
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

OriginalCreditorAgent: <OrgnlCdtrAgt>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

OriginalCreditorAgentAccount: <OrgnlCdtrAgtAcct>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

OriginalCreditorSchemeIdentification: <OrgnlCdtrSchmeId>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

OriginalDebtor: <OrgnlDbtr>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

OriginalDebtorAccount: <OrgnlDbtrAcct>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

OriginalDebtorAgent: <OrgnlDbtrAgt>
Message CustomerDirectDebitInitiationV01 81

Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

OriginalDebtorAgentAccount: <OrgnlDbtrAgtAcct>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

OriginalEndToEndIdentification: <OrgnlEndToEndId>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 235

OriginalFinalCollectionDate: <OrgnlFnlColltnDt>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

OriginalFrequency: <OrgnlFrqcy>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

OriginalGroupInformation: <OrgnlGrpInf>
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183

OriginalGroupInformationAndStatus: <OrgnlGrpInfAndSts>
Message PaymentStatusReportV02 234

OriginalInstructedAmount: <OrgnlInstdAmt>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184

OriginalInstructionIdentification: <OrgnlInstrId>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 235

OriginalInterbankSettlementAmount: <OrgnlIntrBkSttlmAmt>
Message PaymentCancellationRequestV01 184

OriginalMandateIdentification: <OrgnlMndtId>
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

OriginalMessageIdentification: <OrgnlMsgId>
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

OriginalMessageNameIdentification: <OrgnlMsgNmId>
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

OriginalNumberOfTransactions: <OrgnlNbOfTxs>
Message PaymentStatusReportV02 235

OriginalPaymentInformationIdentification: <OrgnlPmtInfId>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 235

OriginalTransactionIdentification: <OrgnlTxId>
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 235

OriginalTransactionReference: <OrgnlTxRef>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

OtherIdentification: <OthrId>
342

P

PassportNumber: <PsptNb>
342

PaymentIdentification: <PmtId>
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80

PaymentInformation: <PmtInf>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79

PaymentInformationIdentification: <PmtInfId>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79

PaymentMethod: <PmtMtd>
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185

Message PaymentStatusReportV02 237

PaymentTypeInformation: <PmtTpInf>
Message CustomerCreditTransferInitiationV02 26, 27
Message CustomerDirectDebitInitiationV01 79, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

PoolingAdjustmentDate: <PoolgAdjstmntDt>
Message CustomerCreditTransferInitiationV02 27

PostalAddress: <PstlAdr>
307, 307, 308, 329, 329, 330, 341

PostCode: <PstCd>
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

PreNotificationDate: <PreNtfctnDt>
Message CustomerDirectDebitInitiationV01 81

PreNotificationIdentification: <PreNtfctnId>
Message CustomerDirectDebitInitiationV01 81

PrintLocation: <PrtLctn>
321

PrivateIdentification: <PrvtId>
342

Proprietary: <Prtry>
303, 307, 307, 320, 329, 329
Message CustomerCreditTransferInitiationV02 27, 27, 27, 27, 28, 29, 29
Message CustomerDirectDebitInitiationV01 80, 80, 80, 80, 81, 82, 83
Message CustomerPaymentReversalV01 135, 136, 136, 137, 137, 138, 138
Message PaymentCancellationRequestV01 184, 184, 185, 185, 185, 186, 186
Message PaymentStatusReportV02 235, 235, 236, 236, 236, 237, 238

ProprietaryAccount: <PrtryAcct>
303

ProprietaryIdentification: <PrtryId>
307, 308, 329, 330, 342

ProvinceOfBirth: <PrvcOfBirth>
342

Purpose: <Purp>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 81

R

Rate: <Rate>
354

RateType: <RateTp>
Message CustomerCreditTransferInitiationV02 28

ReferredDocumentAmount: <RfrdDocAmt>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

ReferredDocumentInformation: <RfrdDocInf>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

ReferredDocumentNumber: <RfrdDocNb>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

ReferredDocumentRelatedDate: <RfrdDocRltdDt>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

ReferredDocumentType: <RfrdDocTp>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

RegionalClearingZone: <RgnlClrZone>
321

RegulatoryDetails: <RgltryDtls>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

RegulatoryReporting: <RgltryRptg>
Message CustomerCreditTransferInitiationV02 28

Message CustomerDirectDebitInitiationV01 81

RelatedRemittanceInformation: <RltdRmtInf>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

RemittanceIdentification: <RmtId>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

RemittanceInformation: <RmtInf>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

RemittanceLocationElectronicAddress: <RmtLctnElctrncAdr>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

RemittanceLocationMethod: <RmtLctnMtd>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

RemittanceLocationPostalAddress: <RmtLctnPstlAdr>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

RemittedAmount: <RmtdAmt>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

RequestedCollectionDate: <ReqdColltnDt>
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

RequestedExecutionDate: <ReqdExctnDt>
Message CustomerCreditTransferInitiationV02 27
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ReversalIdentification: <RvslId>
Message CustomerPaymentReversalV01 135

ReversalOriginator: <RvslOrgtr>

Message CustomerPaymentReversalV01 135, 136

ReversalReason: <RvslRsn>
Message CustomerPaymentReversalV01 135, 136

ReversalReasonInformation: <RvslRsnInf>
Message CustomerPaymentReversalV01 135, 136

ReversedInstructedAmount: <RvsdInstdAmt>
Message CustomerPaymentReversalV01 136

S

SequenceType: <SeqTp>
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ServiceLevel: <SvcLvl>
Message CustomerCreditTransferInitiationV02 26, 27
Message CustomerDirectDebitInitiationV01 79, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

SettlementAccount: <SttlmAcct>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

SettlementInformation: <SttlmInf>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

SettlementMethod: <SttlmMtd>
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

SocialSecurityNumber: <SclSctyNb>
342

StatusIdentification: <StsId>
Message PaymentStatusReportV02 235

StatusOriginator: <StsOrgtr>
Message PaymentStatusReportV02 235, 235

StatusReason: <StsRsn>
Message PaymentStatusReportV02 235, 235

StatusReasonInformation: <StsRsnInf>
Message PaymentStatusReportV02 235, 235

StreetName: <StrtNm>
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

Structured: <Strd>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

T

Tax: <Tax>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

TaxableBaseAmount: <TaxblBaseAmt>
354

TaxAmount: <TaxAmt>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

TaxDate: <TaxDt>
354

TaxIdentificationNumber: <TaxIdNb>
342, 342

TaxReferenceNumber: <TaxRefNb>
354

TaxType: <TaxTp>
354

TaxTypeInformation: <TaxTpInf>
354

ThirdReimbursementAgent: <ThrdRmbrsmntAgt>
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ThirdReimbursementAgentAccount: <ThrdRmbrsmntAgtAcct>
Message CustomerPaymentReversalV01 137

Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

TotalTaxableBaseAmount: <TtlTaxblBaseAmt>
354

TotalTaxAmount: <TtlTaxAmt>
354

TownName: <TwnNm>
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

TransactionInformation: <TxInf>
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 184

TransactionInformationAndStatus: <TxInfAndSts>
Message PaymentStatusReportV02 235

TransactionStatus: <TxSts>
Message PaymentStatusReportV02 235

Type: <Tp>
303

U

UltimateCreditor: <UltmtCdtr>
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 80, 81
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

UltimateDebtor: <UltmtDbtr>
Message CustomerCreditTransferInitiationV02 27, 28
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

Unstructured: <Ustrd>
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

UPIC: <UPIC>
303

Index of XML tags

A

<AccptncDtTm>: AcceptanceDateTime
Message PaymentStatusReportV02 235

<AddtlCxlRsnInf>: AdditionalCancellationReasonInformation
Message PaymentCancellationRequestV01 184, 184

<AddtlRmtInf>: AdditionalRemittanceInformation
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 83
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

<AddtlRvslRsnInf>: AdditionalReversalReasonInformation
Message CustomerPaymentReversalV01 135, 136

<AddtlStsRsnInf>: AdditionalStatusReasonInformation
Message PaymentStatusReportV02 235, 235

<Adr>: Address
320, 320
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

<AdrLine>: AddressLine
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

<AdrTp>: AddressType
307, 307, 308, 320, 320, 329, 329, 330, 341, 352

<AlnRegnNb>: AlienRegistrationNumber
342

<AmdmntInd>: AmendmentIndicator
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

<AmdmntInfDtls>: AmendmentInformationDetails
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

<Amt>: Amount
354
Message CustomerCreditTransferInitiationV02 27, 27, 28

Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 136, 136
Message PaymentCancellationRequestV01 184, 184
Message PaymentStatusReportV02 236, 236

<Authrty>: Authority
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

<AuthrtyCtry>: AuthorityCountry
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

<AuthrtyNm>: AuthorityName
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

<Authstn>: Authorisation
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135

B

<BBAN>: BBAN
303

<BEI>: BEI
342

<BIC>: BIC
307, 307, 329, 329, 342

<BirthDt>: BirthDate
342

<BkPtyId>: BankPartyIdentification
342

<BldgNb>: BuildingNumber
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

<BrnchId>: BranchIdentification
308, 330

<BtchBookg>: BatchBooking
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135

C

<Ccy>: Currency
303

<CcyOfTrf>: CurrencyOfTransfer
Message CustomerCreditTransferInitiationV02 28
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

<Cd>: Code
303, 320
Message CustomerCreditTransferInitiationV02 27, 27, 27, 27, 28, 28, 28, 29, 29
Message CustomerDirectDebitInitiationV01 80, 80, 80, 80, 81, 82, 82, 82
Message CustomerPaymentReversalV01 135, 136, 137, 137, 138, 138
Message PaymentCancellationRequestV01 184, 184, 185, 185, 186, 186
Message PaymentStatusReportV02 235, 235, 236, 236, 237, 238

<CdtNoteAmt>: CreditNoteAmount
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

<Cdtr>: Creditor
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

<CdtrAcct>: CreditorAccount
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

<CdtrAgt>: CreditorAgent
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 135, 138
Message PaymentCancellationRequestV01 183, 187
Message PaymentStatusReportV02 234, 238

<CdtrAgtAcct>: CreditorAgentAccount
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187

Message PaymentStatusReportV02 238

<CdtrRef>: CreditorReference
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 83
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

<CdtrRefInf>: CreditorReferenceInformation
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

<CdtrRefTp>: CreditorReferenceType
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

<CdtrSchmeId>: CreditorSchemeIdentification
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<CdtrTaxId>: CreditorTaxIdentification
354

<CdtrTaxTp>: CreditorTaxType
354

<CdtTrfTxInf>: CreditTransferTransactionInformation
Message CustomerCreditTransferInitiationV02 27

<CertId>: CertificateIdentification
354

<ChqFr>: ChequeFrom
320

<ChqInstr>: ChequeInstruction
Message CustomerCreditTransferInitiationV02 28

<ChqMtrtyDt>: ChequeMaturityDate
320

<ChqNb>: ChequeNumber
320

<ChqTp>: ChequeType
320

<ChrgBr>: ChargeBearer
Message CustomerCreditTransferInitiationV02 27, 28
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 136

<ChrgsAcct>: ChargesAccount
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80

<ChrgsAcctAgt>: ChargesAccountAgent
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80

<ChrgsAmt>: ChargesAmount
307

<ChrgsInf>: ChargesInformation
Message PaymentStatusReportV02 235

<ChrgsPty>: ChargesParty
307

<CityOfBirth>: CityOfBirth
342

<ClrChanl>: ClearingChannel
Message CustomerCreditTransferInitiationV02 27, 27
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<ClrSys>: ClearingSystem
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<ClrSysId>: ClearingSystemIdentification
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<ClrSysMmbId>: ClearingSystemMemberIdentification
307, 307, 329, 329

<CmbndId>: CombinedIdentification
307, 329

<CreDtTm>: CreationDateTime
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

<CstmrNb>: CustomerNumber
342

<CtgyDesc>: CategoryDescription
354

<CtgyPurp>: CategoryPurpose
Message CustomerCreditTransferInitiationV02 27, 27
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

<CtrctId>: ContractIdentification
Message CustomerCreditTransferInitiationV02 28

<CtrlSum>: ControlSum
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183

<Ctry>: Country
307, 308, 308, 320, 320, 329, 330, 330, 341, 352

<CtryOfBirth>: CountryOfBirth
342

<CtryOfRes>: CountryOfResidence
342

<CtrySubDvsn>: CountrySubDivision
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

<CxlId>: CancellationIdentification
Message PaymentCancellationRequestV01 184

<CxlOrgtr>: CancellationOriginator
Message PaymentCancellationRequestV01 184, 184

<CxlRsn>: CancellationReason
Message PaymentCancellationRequestV01 184, 184

<CxlRsnInf>: CancellationReasonInformation
Message PaymentCancellationRequestV01 184, 184

D

<DbtCdtRptgInd>: DebitCreditReportingIndicator
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 81

<Dbtr>: Debtor
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

<DbtrAcct>: DebtorAccount
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

<DbtrAgt>: DebtorAgent
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 135, 138
Message PaymentCancellationRequestV01 183, 187
Message PaymentStatusReportV02 234, 238

<DbtrAgtAcct>: DebtorAgentAccount
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

<DbtrTaxId>: DebtorTaxIdentification
354

<DlvrTo>: DeliverTo
320

<DlvryMtd>: DeliveryMethod
320

<DrctDbtTx>: DirectDebitTransaction
Message CustomerDirectDebitInitiationV01 80

<DrctDbtTxInf>: DirectDebitTransactionInformation
Message CustomerDirectDebitInitiationV01 80

<DrvrsLicNb>: DriversLicenseNumber
342

<DscntApldAmt>: DiscountAppliedAmount
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<DtAndPlcOfBirth>: DateAndPlaceOfBirth
342

<DtldCtrlSum>: DetailedControlSum
Message PaymentStatusReportV02 235

<DtldNbOfTxs>: DetailedNumberOfTransactions
Message PaymentStatusReportV02 235

<DtldSts>: DetailedStatus
Message PaymentStatusReportV02 235

<DtOfSgntr>: DateOfSignature
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

<DuePyblAmt>: DuePayableAmount
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<DUNS>: DUNS
342

E

<EANGLN>: EANGLN
342

<ElctrncSgntr>: ElectronicSignature
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<EndToEndId>: EndToEndIdentification
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80

<EqvtAmt>: EquivalentAmount

Message CustomerCreditTransferInitiationV02 27
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

F

<FileOrgtr>: FileOriginator
Message PaymentStatusReportV02 235

<FinInstnId>: FinancialInstitutionIdentification
307, 329

<FnlColltnDt>: FinalCollectionDate
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<FrmsCd>: FormsCode
321

<Frqcy>: Frequency
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<FrstColltnDt>: FirstCollectionDate
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<FwdgAgt>: ForwardingAgent
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

G

<GrpCxl>: GroupCancellation
Message PaymentCancellationRequestV01 183

<Grpg>: Grouping
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79

<GrpHdr>: GroupHeader

Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

<GrpRvsl>: GroupReversal
Message CustomerPaymentReversalV01 135

<GrpSts>: GroupStatus
Message PaymentStatusReportV02 235

I

<IBAN>: IBAN
303

<IBEI>: IBEI
342

<Id>: Identification
303, 303, 307, 307, 307, 308, 308, 329, 329, 329, 330, 330, 341, 342, 342

<IdntyCardNb>: IdentityCardNumber
342

<IdTp>: IdentificationType
342

<Inf>: Information
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

<InitgPty>: InitiatingParty
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

<InstdAgt>: InstructedAgent
Message PaymentCancellationRequestV01 183, 184
Message PaymentStatusReportV02 234, 235

<InstdAmt>: InstructedAmount
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

<InstdRmbrsmntAgt>: InstructedReimbursementAgent

Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<InstdRmbrsmntAgtAcct>: InstructedReimbursementAgentAccount
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<InstgAgt>: InstructingAgent
Message PaymentCancellationRequestV01 183, 184
Message PaymentStatusReportV02 234, 235

<InstgRmbrsmntAgt>: InstructingReimbursementAgent
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<InstgRmbrsmntAgtAcct>: InstructingReimbursementAgentAccount
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<InstrForCdtrAgt>: InstructionForCreditorAgent
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 81

<InstrForDbtrAgt>: InstructionForDebtorAgent
Message CustomerCreditTransferInitiationV02 28

<InstrId>: InstructionIdentification
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80

<InstrInf>: InstructionInformation
Message CustomerCreditTransferInitiationV02 28

<InstrPrty>: InstructionPriority
320
Message CustomerCreditTransferInitiationV02 26, 27
Message CustomerDirectDebitInitiationV01 79, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<IntrBkSttlmAmt>: InterbankSettlementAmount
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

<IntrBkSttlmDt>: InterbankSettlementDate
Message CustomerPaymentReversalV01 136

Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<IntrmyAgt1>: IntermediaryAgent1
Message CustomerCreditTransferInitiationV02 28

<IntrmyAgt1Acct>: IntermediaryAgent1Account
Message CustomerCreditTransferInitiationV02 28

<IntrmyAgt2>: IntermediaryAgent2
Message CustomerCreditTransferInitiationV02 28

<IntrmyAgt2Acct>: IntermediaryAgent2Account
Message CustomerCreditTransferInitiationV02 28

<IntrmyAgt3>: IntermediaryAgent3
Message CustomerCreditTransferInitiationV02 28

<IntrmyAgt3Acct>: IntermediaryAgent3Account
Message CustomerCreditTransferInitiationV02 28

<Invcee>: Invoicee
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 83
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

<Invcr>: Invoicer
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 83
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

<Issr>: Issuer
307, 308, 329, 330, 342, 342
Message CustomerCreditTransferInitiationV02 29, 29
Message CustomerDirectDebitInitiationV01 82, 83
Message CustomerPaymentReversalV01 138, 138
Message PaymentCancellationRequestV01 186, 187
Message PaymentStatusReportV02 237, 238

L

<LclInstrm>: LocalInstrument
Message CustomerCreditTransferInitiationV02 27, 27
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

M

<MemoFld>: MemoField
321

<MndtId>: MandateIdentification
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

<MndtRltdInf>: MandateRelatedInformation
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

<MplyrIdNb>: EmployerIdentificationNumber
342

<MsgId>: MessageIdentification
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

N

<NbOfTxs>: NumberOfTransactions
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183

<NbOfTxsPerSts>: NumberOfTransactionsPerStatus
Message PaymentStatusReportV02 235

<Nm>: Name
303, 307, 307, 308, 320, 320, 329, 329, 330, 341
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

<NmAndAdr>: NameAndAddress
307, 329

<NtwkFileNm>: NetworkFileName
Message PaymentStatusReportV02 234

O

<OrgId>: OrganisationIdentification
341

<OrgnlCdtrAgt>: OriginalCreditorAgent
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<OrgnlCdtrAgtAcct>: OriginalCreditorAgentAccount
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<OrgnlCdtrSchmeId>: OriginalCreditorSchemeIdentification
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<OrgnlCreDtTm>: OriginalCreationDateTime
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

<OrgnlCtrlSum>: OriginalControlSum
Message PaymentStatusReportV02 235

<OrgnlDbtr>: OriginalDebtor
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<OrgnlDbtrAcct>: OriginalDebtorAccount
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<OrgnlDbtrAgt>: OriginalDebtorAgent
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<OrgnlDbtrAgtAcct>: OriginalDebtorAgentAccount
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137

Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<OrgnlEndToEndId>: OriginalEndToEndIdentification
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 235

<OrgnlFnlColltnDt>: OriginalFinalCollectionDate
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<OrgnlFrqcy>: OriginalFrequency
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<OrgnlGrpInf>: OriginalGroupInformation
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183

<OrgnlGrpInfAndSts>: OriginalGroupInformationAndStatus
Message PaymentStatusReportV02 234

<OrgnlInstdAmt>: OriginalInstructedAmount
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184

<OrgnlInstrId>: OriginalInstructionIdentification
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 235

<OrgnlIntrBkSttlmAmt>: OriginalInterbankSettlementAmount
Message PaymentCancellationRequestV01 184

<OrgnlMndtId>: OriginalMandateIdentification
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<OrgnlMsgId>: OriginalMessageIdentification
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

<OrgnlMsgNmId>: OriginalMessageNameIdentification
Message CustomerPaymentReversalV01 135

Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 234

<OrgnlNbOfTxs>: OriginalNumberOfTransactions
Message PaymentStatusReportV02 235

<OrgnlPmtInfId>: OriginalPaymentInformationIdentification
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 235

<OrgnlTxId>: OriginalTransactionIdentification
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 235

<OrgnlTxRef>: OriginalTransactionReference
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

<OthrId>: OtherIdentification
342

P

<PmtId>: PaymentIdentification
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80

<PmtInf>: PaymentInformation
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79

<PmtInfId>: PaymentInformationIdentification
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79

<PmtMtd>: PaymentMethod
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

<PmtTpInf>: PaymentTypeInformation
Message CustomerCreditTransferInitiationV02 26, 27
Message CustomerDirectDebitInitiationV01 79, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<PoolgAdjstmntDt>: PoolingAdjustmentDate

Message CustomerCreditTransferInitiationV02 27

<PreNtfctnDt>: PreNotificationDate
Message CustomerDirectDebitInitiationV01 81

<PreNtfctnId>: PreNotificationIdentification
Message CustomerDirectDebitInitiationV01 81

<PrtLctn>: PrintLocation
321

<Prtry>: Proprietary
303, 307, 307, 320, 329, 329
Message CustomerCreditTransferInitiationV02 27, 27, 27, 27, 28, 29, 29
Message CustomerDirectDebitInitiationV01 80, 80, 80, 80, 81, 82, 83
Message CustomerPaymentReversalV01 135, 136, 136, 137, 137, 138, 138
Message PaymentCancellationRequestV01 184, 184, 185, 185, 185, 186, 186
Message PaymentStatusReportV02 235, 235, 236, 236, 236, 237, 238

<PrtryAcct>: ProprietaryAccount
303

<PrtryId>: ProprietaryIdentification
307, 308, 329, 330, 342

<PrvcOfBirth>: ProvinceOfBirth
342

<PrvtId>: PrivateIdentification
342

<PsptNb>: PassportNumber
342

<PstCd>: PostCode
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

<PstlAdr>: PostalAddress
307, 307, 308, 329, 329, 330, 341

<Purp>: Purpose
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 81

R

<Rate>: Rate
354

<RateTp>: RateType
Message CustomerCreditTransferInitiationV02 28

<ReqdColltnDt>: RequestedCollectionDate
Message CustomerDirectDebitInitiationV01 80
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<ReqdExctnDt>: RequestedExecutionDate
Message CustomerCreditTransferInitiationV02 27
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<RfrdDocAmt>: ReferredDocumentAmount
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<RfrdDocInf>: ReferredDocumentInformation
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<RfrdDocNb>: ReferredDocumentNumber
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<RfrdDocRltdDt>: ReferredDocumentRelatedDate
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<RfrdDocTp>: ReferredDocumentType
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<RgltryDtls>: RegulatoryDetails
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

<RgltryRptg>: RegulatoryReporting

Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 81

<RgnlClrZone>: RegionalClearingZone
321

<RltdRmtInf>: RelatedRemittanceInformation
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

<RmtdAmt>: RemittedAmount
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

<RmtId>: RemittanceIdentification
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

<RmtInf>: RemittanceInformation
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<RmtLctnElctrncAdr>: RemittanceLocationElectronicAddress
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

<RmtLctnMtd>: RemittanceLocationMethod
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

<RmtLctnPstlAdr>: RemittanceLocationPostalAddress
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

<RvsdInstdAmt>: ReversedInstructedAmount
Message CustomerPaymentReversalV01 136

<RvslId>: ReversalIdentification
Message CustomerPaymentReversalV01 135

<RvslOrgtr>: ReversalOriginator
Message CustomerPaymentReversalV01 135, 136

<RvslRsn>: ReversalReason
Message CustomerPaymentReversalV01 135, 136

<RvslRsnInf>: ReversalReasonInformation
Message CustomerPaymentReversalV01 135, 136

S

<SclSctyNb>: SocialSecurityNumber
342

<SeqTp>: SequenceType
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<Strd>: Structured
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

<StrtNm>: StreetName
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

<StsId>: StatusIdentification
Message PaymentStatusReportV02 235

<StsOrgtr>: StatusOriginator
Message PaymentStatusReportV02 235, 235

<StsRsn>: StatusReason
Message PaymentStatusReportV02 235, 235

<StsRsnInf>: StatusReasonInformation
Message PaymentStatusReportV02 235, 235

<SttlmAcct>: SettlementAccount
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<SttlmInf>: SettlementInformation
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<SttlmMtd>: SettlementMethod
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<SvcLvl>: ServiceLevel

Message CustomerCreditTransferInitiationV02 26, 27
Message CustomerDirectDebitInitiationV01 79, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

T

<Tax>: Tax
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

<TaxAmt>: TaxAmount
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

<TaxblBaseAmt>: TaxableBaseAmount
354

<TaxDt>: TaxDate
354

<TaxIdNb>: TaxIdentificationNumber
342, 342

<TaxRefNb>: TaxReferenceNumber
354

<TaxTp>: TaxType
354

<TaxTpInf>: TaxTypeInformation
354

<ThrdRmbrsmntAgt>: ThirdReimbursementAgent
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<ThrdRmbrsmntAgtAcct>: ThirdReimbursementAgentAccount
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

<Tp>: Type
303

<TtlTaxAmt>: TotalTaxAmount
354

<TtlTaxblBaseAmt>: TotalTaxableBaseAmount
354

<TwnNm>: TownName
307, 308, 308, 320, 320, 329, 329, 330, 341, 352

<TxInf>: TransactionInformation
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 184

<TxInfAndSts>: TransactionInformationAndStatus
Message PaymentStatusReportV02 235

<TxSts>: TransactionStatus
Message PaymentStatusReportV02 235

U

<UltmtCdtr>: UltimateCreditor
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 80, 81
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

<UltmtDbtr>: UltimateDebtor
Message CustomerCreditTransferInitiationV02 27, 28
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 187
Message PaymentStatusReportV02 238

<UPIC>: UPIC
303

<USCHU>: CHIPSUniversalIdentification
342

<Ustrd>: Unstructured
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

X

<XchgRate>: ExchangeRate
Message CustomerCreditTransferInitiationV02 28

<XchgRateInf>: ExchangeRateInformation
Message CustomerCreditTransferInitiationV02 28

Index of Message Item Types

A

AccountIdentification3Choice
303

AddressType2Code
307, 307, 308, 320, 320, 329, 329, 330, 341, 352

AmendmentInformationDetails1
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

AmountType2Choice
Message CustomerCreditTransferInitiationV02 27
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

AustrianBankleitzahlIdentifier
293

B

BaseOneRate
300
Message CustomerCreditTransferInitiationV02 28

BatchBookingIndicator
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135

BBANIdentifier
293, 303

BEIIdentifier
293, 342

BICIdentifier
294, 307, 307, 329, 329, 342

BranchAndFinancialInstitutionIdentification3
307, 328
Message CustomerCreditTransferInitiationV02 26, 27, 27, 28, 28, 28, 28

Message CustomerDirectDebitInitiationV01 79, 80, 80, 81, 81, 81
Message CustomerPaymentReversalV01 135, 135, 135, 136, 136, 137, 137, 137, 138, 138
Message PaymentCancellationRequestV01 183, 183, 183, 183, 183, 184, 184, 185, 185, 185, 186, 186, 187, 187
Message PaymentStatusReportV02 234, 234, 234, 234, 234, 235, 235, 236, 236, 236, 237, 237, 238, 238

BranchData
308, 330

C

CanadianPaymentsARNIdentifier
294

CancellationReason1Choice
Message PaymentCancellationRequestV01 184, 184

CancellationReason2Code
Message PaymentCancellationRequestV01 184, 184

CancellationReasonInformation1
Message PaymentCancellationRequestV01 184, 184

CashAccount7
303
Message CustomerCreditTransferInitiationV02 27, 27, 27, 28, 28, 28, 28, 28
Message CustomerDirectDebitInitiationV01 80, 80, 80, 81, 81, 81, 81, 81
Message CustomerPaymentReversalV01 136, 136, 136, 137, 137, 137, 137, 138, 138, 138, 138
Message PaymentCancellationRequestV01 185, 185, 185, 185, 186, 186, 186, 187, 187, 187, 187
Message PaymentStatusReportV02 236, 236, 236, 236, 237, 237, 237, 238, 238, 238, 238

CashAccountType2
303

CashAccountType4Code
303

CashClearingSystem3Code
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ChargeBearerType1Code
Message CustomerCreditTransferInitiationV02 27, 28
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 136

ChargesInformation1
307
Message PaymentStatusReportV02 235

Cheque5
320

Message CustomerCreditTransferInitiationV02 28

ChequeDelivery1Code
320

ChequeDeliveryMethod1Choice
320

ChequeType2Code
320

CHIPSParticipantIdentifier
294

CHIPSUniversalIdentifier
294, 342

ClearingChannel2Code
Message CustomerCreditTransferInitiationV02 27, 27
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ClearingSystemIdentification1Choice
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ClearingSystemMemberIdentification3Choice
307, 307, 329, 329

CountryCode
295, 307, 308, 308, 320, 320, 329, 330, 330, 341, 342, 342, 352
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

CreditorReferenceInformation1
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

CreditorReferenceType1
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

CreditTransferTransactionInformation1

Message CustomerCreditTransferInitiationV02 27

CurrencyAndAmount
292, 307, 354, 354, 354, 354
Message CustomerCreditTransferInitiationV02 27, 27, 28, 29, 29, 29, 29, 29
Message CustomerDirectDebitInitiationV01 80, 82, 82, 82, 82, 82, 82
Message CustomerPaymentReversalV01 136, 136, 136, 136, 136, 138, 138, 138, 138, 138
Message PaymentCancellationRequestV01 184, 184, 184, 184, 184, 186, 186, 186, 186, 186
Message PaymentStatusReportV02 236, 236, 236, 237, 237, 238, 238, 238

CurrencyCode
295, 303, 307, 354, 354, 354, 354
Message CustomerCreditTransferInitiationV02 27, 27, 28, 28, 29, 29, 29, 29, 29
Message CustomerDirectDebitInitiationV01 80, 82, 82, 82, 82, 82, 82
Message CustomerPaymentReversalV01 136, 136, 136, 136, 136, 136, 138, 138, 138, 138, 138
Message PaymentCancellationRequestV01 184, 184, 184, 184, 184, 184, 186, 186, 186, 186, 186
Message PaymentStatusReportV02 236, 236, 236, 236, 237, 237, 238, 238, 238

D

DateAndPlaceOfBirth
342

DecimalNumber
300
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 235, 235

DirectDebitTransaction1
Message CustomerDirectDebitInitiationV01 80

DirectDebitTransactionInformation1
Message CustomerDirectDebitInitiationV01 80

DocumentType2Code
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

DocumentType3Code
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 238

DunsIdentifier

295, 342

E

EANGLNIdentifier
295, 342

EquivalentAmount
Message CustomerCreditTransferInitiationV02 27
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

ExchangeRateInformation1
Message CustomerCreditTransferInitiationV02 28

ExchangeRateType1Code
Message CustomerCreditTransferInitiationV02 28

ExtensiveBranchNetworkIdentifier
295

ExternalClearingSystemMemberCode
296, 307, 307, 329, 329

ExternalCode
296

ExternalLocalInstrumentCode
296
Message CustomerCreditTransferInitiationV02 27, 27
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ExternalPurposeCode
296
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 81

F

FedwireRoutingNumberIdentifier
296

FinancialInstitutionIdentification3
307, 329

FinancialInstitutionIdentification5Choice
307, 329

Frequency1Code
Message CustomerDirectDebitInitiationV01 81, 81
Message CustomerPaymentReversalV01 137, 137
Message PaymentCancellationRequestV01 186, 186
Message PaymentStatusReportV02 237, 237

G

GenericIdentification3
307, 308, 329, 330, 342

GenericIdentification4
342

GermanBankleitzahlIdentifier
296

GroupHeader1
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79

GroupHeader5
Message PaymentStatusReportV02 234

GroupHeader7
Message PaymentCancellationRequestV01 183

GroupHeader8
Message CustomerPaymentReversalV01 135

Grouping1Code
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79

GroupingIndicator
Message PaymentCancellationRequestV01 183

H

HellenicBankIdentificationCodeIdentifier
297

HongKongBankIdentifier
297

I

IBANIdentifier
297, 303

IBEIIdentifier
297, 342

ImpliedCurrencyAndAmount
293

IndianFinancialSystemCodeIdentifier
297

Instruction3Code
Message CustomerCreditTransferInitiationV02 28

InstructionForCreditorAgent1
Message CustomerCreditTransferInitiationV02 28

IrishNSCIdentifier
297

ISODate
293, 320, 342, 354
Message CustomerCreditTransferInitiationV02 27, 27, 29
Message CustomerDirectDebitInitiationV01 80, 81, 81, 81, 81, 81, 82
Message CustomerPaymentReversalV01 136, 136, 136, 137, 137, 137, 137, 138
Message PaymentCancellationRequestV01 185, 185, 185, 185, 186, 186, 186, 186
Message PaymentStatusReportV02 236, 236, 236, 237, 237, 237, 237, 237

ISODateTime
293
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135, 135
Message PaymentCancellationRequestV01 183, 183
Message PaymentStatusReportV02 234, 234, 235

ISOTime
293

ItalianDomesticIdentifier
298

L

LanguageCode
298

LocalInstrument1Choice
Message CustomerCreditTransferInitiationV02 27, 27
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

M

MandateRelatedInformation1
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

Max1025Text
300
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

Max105Text
300
Message CustomerPaymentReversalV01 135, 136
Message PaymentCancellationRequestV01 184, 184
Message PaymentStatusReportV02 235, 235

Max128Text
301
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135

Max140Text
301, 354
Message CustomerCreditTransferInitiationV02 28, 28, 29, 29
Message CustomerDirectDebitInitiationV01 81, 82, 83
Message CustomerPaymentReversalV01 138, 138
Message PaymentCancellationRequestV01 186, 187
Message PaymentStatusReportV02 237, 238

Max15NumericText
301
Message CustomerCreditTransferInitiationV02 26
Message CustomerDirectDebitInitiationV01 79
Message CustomerPaymentReversalV01 135
Message PaymentCancellationRequestV01 183
Message PaymentStatusReportV02 235, 235

Max16Text
301, 307, 307, 308, 308, 308, 308, 320, 320, 320, 320, 329, 329, 329, 329, 330, 330, 341, 341, 352, 352

Max256Text
301
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

Max34Text

301, 303

Max350Text
302

Max35Text
302, 303, 307, 307, 307, 307, 307, 307, 308, 308, 308, 308, 308, 308, 308, 308, 320, 320, 320, 320, 320, 320, 321, 321, 321, 321, 329, 329, 329, 329, 329, 329, 329, 329, 330, 330, 330, 330, 330, 330, 341, 341, 342, 342, 342, 342, 342, 342, 342, 342, 342, 342, 342, 342, 342, 342, 342, 342, 352, 352, 354, 354, 354, 354, 354
Message CustomerCreditTransferInitiationV02 26, 26, 27, 27, 27, 27, 27, 27, 28, 28, 28, 29, 29, 29, 29, 29, 29, 29
Message CustomerDirectDebitInitiationV01 79, 79, 80, 80, 80, 80, 80, 80, 81, 81, 81, 81, 82, 82, 82, 82, 82, 83, 83, 83
Message CustomerPaymentReversalV01 135, 135, 135, 135, 135, 136, 136, 136, 136, 136, 137, 137, 137, 137, 138, 138, 138, 138, 138, 138
Message PaymentCancellationRequestV01 183, 183, 183, 184, 184, 184, 184, 184, 184, 184, 185, 185, 185, 185, 186, 186, 186, 186, 186, 187, 187
Message PaymentStatusReportV02 234, 234, 234, 234, 235, 235, 235, 235, 235, 235, 235, 235, 236, 236, 236, 237, 237, 237, 237, 237, 238, 238, 238

Max3Text
302
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

Max70Text
302, 303, 307, 307, 307, 307, 308, 308, 308, 308, 320, 320, 320, 320, 320, 320, 329, 329, 329, 329, 329, 329, 330, 330, 341, 341, 341, 352, 352
Message CustomerCreditTransferInitiationV02 28, 29
Message CustomerDirectDebitInitiationV01 82, 82

MICIdentifier
298

N

NameAndAddress3
320, 320
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

NameAndAddress7
307, 329

NationalityCode
298

NewZealandNCCIdentifier
298

NumberOfTransactionsPerStatus1
Message PaymentStatusReportV02 235

O

OrganisationIdentification2
341

OriginalGroupInformation1
Message PaymentStatusReportV02 234

OriginalGroupInformation4
Message PaymentCancellationRequestV01 183

OriginalGroupInformation5
Message CustomerPaymentReversalV01 135

OriginalTransactionReference1
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 184
Message PaymentStatusReportV02 236

P

Party2Choice
341

PartyIdentification8
341
Message CustomerCreditTransferInitiationV02 26, 27, 27, 28, 28, 28, 29, 29
Message CustomerDirectDebitInitiationV01 79, 80, 80, 81, 81, 81, 81, 81, 81, 83, 83
Message CustomerPaymentReversalV01 135, 135, 136, 136, 137, 137, 138, 138, 138, 138, 138, 138
Message PaymentCancellationRequestV01 183, 184, 184, 185, 186, 186, 187, 187, 187, 187, 187, 187
Message PaymentStatusReportV02 234, 235, 235, 236, 237, 237, 238, 238, 238, 238, 238, 238

PaymentCategoryPurpose1Code
Message CustomerCreditTransferInitiationV02 27, 27
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

PaymentIdentification1
Message CustomerCreditTransferInitiationV02 27
Message CustomerDirectDebitInitiationV01 80

PaymentInstructionInformation1
Message CustomerCreditTransferInitiationV02 26

PaymentInstructionInformation2
Message CustomerDirectDebitInitiationV01 79

PaymentMethod2Code
Message CustomerDirectDebitInitiationV01 79

PaymentMethod3Code
Message CustomerCreditTransferInitiationV02 26

PaymentMethod4Code
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

PaymentTransactionInformation1
Message PaymentStatusReportV02 235

PaymentTransactionInformation3
Message PaymentCancellationRequestV01 184

PaymentTransactionInformation4
Message CustomerPaymentReversalV01 135

PaymentTypeInformation1
Message CustomerCreditTransferInitiationV02 26, 27

PaymentTypeInformation2
Message CustomerDirectDebitInitiationV01 79, 80

PaymentTypeInformation6
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

PercentageRate
300, 354

PersonIdentification3
342

PolishNationalClearingCodeIdentifier
298

PortugueseNCCIdentifier
298

PostalAddress1
307, 307, 308, 320, 320, 329, 329, 330, 341, 351
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

Priority2Code
320
Message CustomerCreditTransferInitiationV02 26, 27
Message CustomerDirectDebitInitiationV01 79, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

Purpose1Choice
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 81

R

ReferredDocumentAmount1Choice
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

ReferredDocumentInformation1
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

ReferredDocumentType1
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

RegulatoryAuthority
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

RegulatoryReporting2
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 81

RegulatoryReportingType1Code
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 81

RemittanceInformation1
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

RemittanceLocation1
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

RemittanceLocationMethod1Code

Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

ReversalReason1Choice
Message CustomerPaymentReversalV01 135, 136

ReversalReasonInformation1
Message CustomerPaymentReversalV01 135, 136

RussianCentralBankIdentificationCodeIdentifier
299

S

SequenceType1Code
Message CustomerDirectDebitInitiationV01 80, 80
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ServiceLevel1Code
Message CustomerCreditTransferInitiationV02 27, 27
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ServiceLevel2Choice
Message CustomerCreditTransferInitiationV02 26, 27
Message CustomerPaymentReversalV01 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

ServiceLevel2Code
Message CustomerDirectDebitInitiationV01 80, 80

ServiceLevel3Choice
Message CustomerDirectDebitInitiationV01 79, 80

SettlementInformation3
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

SettlementMethod1Code
Message CustomerPaymentReversalV01 136
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 236

SimpleIdentificationInformation2
303

SmallNetworkIdentifier

299

SouthAfricanNCCIdentifier
299

SpanishDomesticInterbankingIdentifier
299

StatusReason1Choice
Message PaymentStatusReportV02 235, 235

StatusReasonInformation1
Message PaymentStatusReportV02 235, 235

StructuredRegulatoryReporting2
Message CustomerCreditTransferInitiationV02 28
Message CustomerDirectDebitInitiationV01 82

StructuredRemittanceInformation6
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82
Message CustomerPaymentReversalV01 138
Message PaymentCancellationRequestV01 186
Message PaymentStatusReportV02 237

SwissBCIdentifier
299

SwissSICIdentifier
299

T

TaxDetails
354

TaxInformation2
353
Message CustomerCreditTransferInitiationV02 29
Message CustomerDirectDebitInitiationV01 82

TaxType
354

TransactionGroupStatus1Code
Message PaymentStatusReportV02 235

TransactionIndividualStatus1Code
Message PaymentStatusReportV02 235, 235

TransactionRejectReason2Code
Message PaymentStatusReportV02 235, 235

TransactionReversalReason1Code
Message CustomerPaymentReversalV01 135, 136

TrueFalseIndicator
Message CustomerDirectDebitInitiationV01 81
Message CustomerPaymentReversalV01 135, 137
Message PaymentCancellationRequestV01 185
Message PaymentStatusReportV02 237

U

UKDomesticSortCodeIdentifier
299

UPICIdentifier
300, 303

Revision Record

Revision	Date	Author	Description	Sections affected
1.0	12/07/2006	ISO 20022 RA	Initial version	All
2.0	08/09/2006	ISO 20022 RA	Reviewed version	All
3.0	11/10/2006	ISO 20022 RA	Message flows added	Message flows