ISO 20022

Payments Mandate

Approved by the Payments SEG on 17 August 2009

Message Definition Report

Edition August 2009

Table Of Contents

Overview **1**
Scope 1
Mandate messages 1
Related messages 1
How to read 1
Message Flow **2**
Mandate scenarios 2
pain.009.001.01 MandateInitiationRequestV01 ..... **8**
Message Functionality 8
Structure 8
Message Items Description 10
Business Example 1 23
Business Example 2 26
Business Example 3 29
pain.010.001.01 MandateAmendmentRequestV01 ..... **32**
Message Functionality 32
Structure 32
Message Items Description 34
Business Example 1 51
Business Example 2 54
Business Example 3 57
pain.011.001.01 MandateCancellationRequestV01 ..... **61**
Message Functionality 61
Structure 61
Message Items Description 62
Business Example 1 68
Business Example 2 70
Business Example 3 72
pain.012.001.01 MandateAcceptanceReportV01 ..... **74**
Message Functionality 74
Structure 74
Message Items Description 75
Business Example 1 81
Business Example 2 83
Business Example 3 86
Message Item Types **90**
Data Types 90
End Points 102
Indexes **214**
Index of Message Items 214
Index of XML tags 222
Index of Message Item Types 230
Revision Record **239**

Overview

Scope

This document describes a set ISO 20022 message definitions developed by SWIFT and approved by the Payments Standards Evaluation Group as ISO 20022 messages on 17 August 2009. These messages are situated in the Payment Initiation area. Although these messages are documented within the Payments Initiation space, the messages can be exchanged between creditor and creditor agent or debtor and debtor agent AND between creditor agent and debtor agent as there is no clearing and settlement involved in the process flow. This includes the following messages:

Mandate messages

Three messages have been developed:

1. The MandateInitiationRequest message: used to request the set-up of an instruction that allows the debtor agent to accept instructions from the creditor, through the creditor agent, to debit the account of the debtor (mandate);
2. The MandateAmendmentRequest message: used to request the amendment of specific information in an existing mandate;
3. The MandateCancellationRequest message: used to request the cancellation of an existing mandate.

Related messages

One message has been developed:

1. The MandateAcceptanceReport message: a MandateAcceptanceReport message is used to respond on any of the MandateRequest messages, holding the confirmation of either acceptance or rejection of the request.

   Note: Where acceptance is part of the full process flow, a MandateRequest message only becomes valid after a confirmation of acceptance is received through a MandateAcceptanceReport message from the agent of the receiver.

How to read

In compliance with ISO 20022, UML (Unified Modelling Language) is used to depict business and logical models. As knowledge of UML is not a requirement to discuss the business standards, the data format for the messages are presented in a user-friendly way. This way of representation is automatically generated from the models, thereby ensuring absolute consistency between the model information and the published standard.

Message Flow

Mandate scenarios

Mandate Initiation Request message

Introduction

The MandateInitiationRequest message is used to request the set-up of an instruction that allows the debtor agent to accept instructions from the creditor, through the creditor agent, to debit the account of the debtor. The MandateInitiationRequest message contains a single request to set-up one specific mandate. The initiator of a MandateInitiationRequest message can be either the debtor or the creditor.
The MandateInitiationRequest message is sent from the initiator of the request to his agent. The MandateInitiationRequest message is forwarded by the agent of the initiator to the agent of the counterparty.
The message flow of the MandateAcceptanceReport message has been included to illustrate the complete end-to-end process of the MandateInitiationRequest message.

A Mandate is identified through a unique identification, MandateIdentification. In the MandateInitiationRequest message at a minimum the MandateRequestIdentification must be present, to cater for those cases where at the point of sending a MandateInitiationRequest message the MandateIdentification is not yet available. Practice should be that if Mandate/ MandateIdentification is available at the moment of sending the MandateInitiationRequest message then Mandate/ Mandate Identification should be given. In this case Mandate/MandateRequestIdentification may be a copy of Mandate Identification.

Message Flows

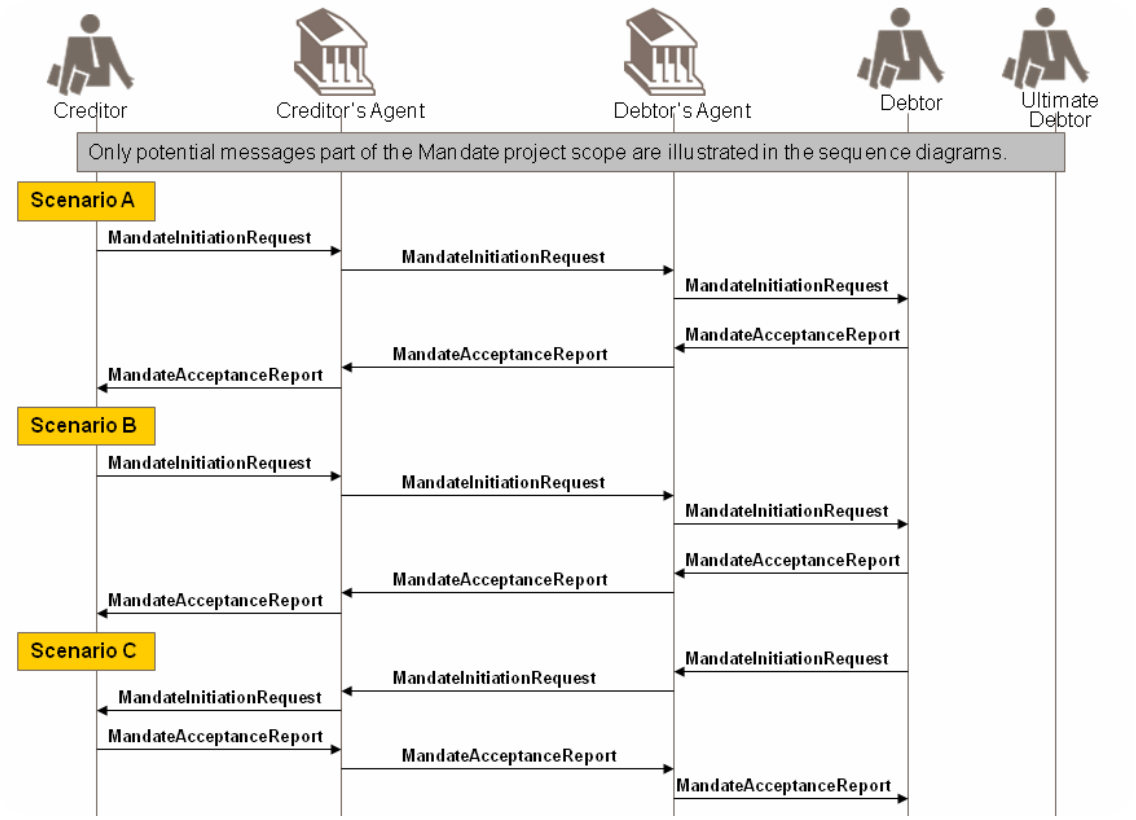

Scenario A:

One party playing the roles of initiating party, creditor and ultimate creditor and one party playing the roles of debtor and ultimate debtor.

Scenario B:

One party playing the roles of initiating party, creditor and ultimate creditor and one party playing role of debtor and a different party for the role of ultimate debtor.

Scenario C:

One party playing the roles of initiating party, debtor and ultimate debtor and one party playing the roles of creditor and ultimate creditor.

Narrative and Scenarios

The scenarios illustrate the different customer roles that can be played on the initiating side and receiving side of the MandateInitiationRequest message. These roles can be played by one and the same party, or they can be played by different parties.

Scenario A:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same as the party playing the role of creditor and ultimate creditor. The party playing the role of debtor is the same as the party playing the role of ultimate debtor. The debtor either accepts or rejects the MandateInitiationRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the creditor through the debtor agent and creditor agent.

Scenario B:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same party playing the role of creditor and ultimate creditor. One party is playing the role of debtor and the role of ultimate debtor is played by a different party. The debtor either accepts or rejects the MandateInitiationRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the creditor through the debtor agent and creditor agent.

Scenario C:

The message is sent by an initiating party to the debtor agent. The party playing the role of initiating party is the same as the party playing the role of debtor and ultimate debtor. The party playing the role of creditor is the same as the party playing the role of ultimate creditor. The creditor either accepts or rejects the MandateInitiationRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the debtor through the creditor agent and the debtor agent.

Mandate Amendment Request message

Introduction

A MandateAmendmentRequest message is used to request the amendment of specific information in an existing mandate. The MandateAmendmentRequest message must reflect the new data of the element(s) to be amended and at a minimum the unique reference to the existing mandate. The MandateAmendmentRequest message contains a single request to amend one specific mandate.
The MandateAmendmentRequest message is sent from the initiator of the request to his agent. The MandateAmendmentRequest message is forwarded by the agent of the initiator to the agent of the counterparty.
The initiator of a MandateAmendmentRequest message can be either the debtor or the creditor and where appropriate the debtor agent.

The message flow of the MandateAcceptanceReport message has been included to illustrate the complete end-to-end process of the MandateAmendmentRequest message.

Message Flows

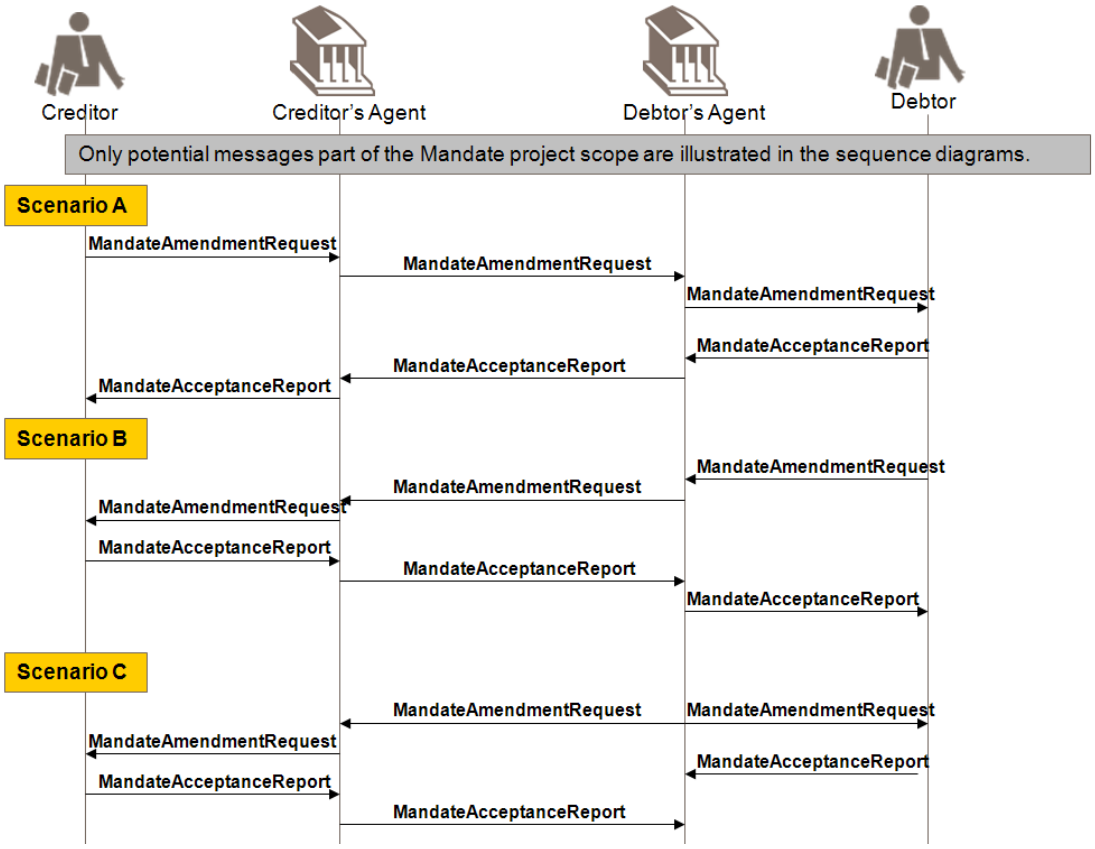

Scenario A:

One party playing the roles of initiating party, creditor and ultimate creditor and one party playing roles of debtor and ultimate debtor.

Scenario B:

One party playing the roles of initiating party, debtor and ultimate debtor and one party playing roles of creditor and ultimate creditor.

Scenario C:

One party playing the roles of initiating party and debtor bank.

Narrative and Scenarios

The scenarios illustrate the different customer roles that can be played on the initiating side and receiving side of the MandateAmendmentRequest message. These roles can be played by one and the same party, or they can be played by different parties.

Scenario A:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same as the party playing the role of creditor and ultimate creditor. The party playing the role of debtor is the same as the party playing the role of ultimate debtor. The debtor either accepts or rejects the MandateAmendmentRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the creditor through the debtor agent and creditor agent.

Scenario B:

The message is sent by an initiating party to the debtor agent. The party playing the role of initiating party is the same as the party playing the role of debtor and ultimate debtor. The party playing the role of creditor is the same as the party playing the role of ultimate creditor. The creditor either accepts or rejects the MandateAmendmentRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the debtor through the creditor agent and the debtor agent.

Scenario C:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same as the party playing the role of debtor agent. The debtor agent informs in this way that information owned by the debtor agent and essential to the mandate, such as structure of an account number, has changed. The creditor agent may confirm his response to this request through the MandateAcceptanceReport message which will be sent from the creditor agent to the debtor agent.

Mandate Cancellation Request message

Introduction

A MandateCancellationRequest message is used to request the cancellation of an existing mandate. The MandateCancellationRequest message contains a single request to cancel one specific mandate.
The MandateCancellationRequest message is sent from the initiator of the request to his agent. The MandateCancellationRequest message is forwarded by the agent of the initiator to the agent of the counterparty. The initiator of a MandateCancellationRequest message can be either the debtor or the creditor.
The message flow of the MandateAcceptanceReport message has been included to illustrate the complete end-to-end process of the MandateCancellationRequest message.

Message Flows

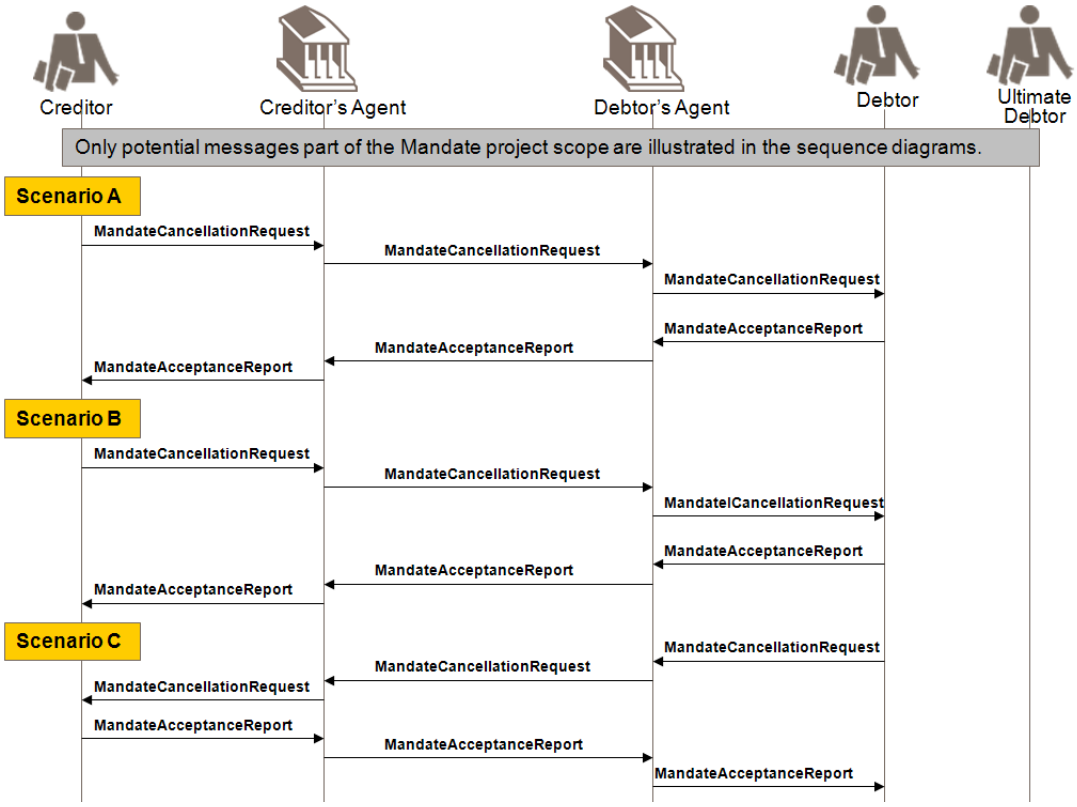

Scenario A:

One party playing the roles of initiating party, creditor and ultimate creditor and one party playing the roles of debtor and ultimate debtor.

Scenario B:

One party playing the roles of initiating party and creditor and of ultimate creditor and one party playing the roles of debtor and a different party for the role of ultimate debtor.

Scenario C:

One party playing the roles of initiating party, debtor and ultimate debtor and one party playing the roles of creditor and ultimate creditor.

Narrative and Scenarios

The scenarios illustrate the different customer roles that can be played on the initiating side and receiving side of the MandateCancellationRequest message. These roles can be played by one and the same party, or they can be played by different parties.

Scenario A:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same as the party playing the role of creditor and ultimate creditor. The party playing the role of debtor is the same as the party playing the role of ultimate debtor. The debtor either accepts or rejects the MandateCancellationRequest message and

confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the creditor through the debtor agent and creditor agent.

Scenario B:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same party playing the role of creditor and ultimate creditor. One party is playing the role of debtor and another party is playing the role of ultimate debtor. The debtor either accepts or rejects the MandateCancellationRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the creditor through the debtor agent and creditor agent.

Scenario C:

The message is sent by an initiating party to the debtor agent. The party playing the role of initiating party is the same as the party playing the role of debtor and ultimate debtor. The party playing the role of creditor is the same as the party playing the role of ultimate creditor. The creditor either accepts or rejects the MandateCancellationRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the debtor through the creditor agent and the debtor agent.

Mandate Acceptance Report message

Introduction

A MandateAcceptanceReport message is used to respond on any of the Mandate Request messages (initiation, amendment or cancellation) holding the confirmation of either acceptance or rejection of the request. The MandateAcceptanceReport message contains a single reply to one specific request.
The MandateAcceptanceReport message can be sent from the recipient or recipients agent to the agent of the initiator of the request. The MandateAcceptanceReport message can be forwarded by the agent of the initiator to the initiator of the Mandate Request message.

Narrative and Scenarios

The scenarios illustrate the different customer roles that can be played on the initiating side and receiving side of the MandateAcceptanceReport message. These roles can be played by one party, or they can be played by different parties.

Scenario A:

The message is sent by the debtor agent to the creditor agent. The debtor has rejected a MandateInitiationRequest message from the creditor.

Scenario B:

The message is sent by the creditor agent to the debtor agent. The creditor has accepted a MandateInitiationRequest message from the debtor.

Scenario C:

The message is sent by the debtor agent to the debtor. The creditor has accepted a MandateCancellationRequest message from the debtor.

pain.009.001.01 MandateInitiationRequestV01

Message Functionality

Scope

The MandateInitiationRequest message is sent by the initiator of the request to his agent. The initiator can either be the debtor or the creditor.
The MandateInitiationRequest message is forwarded by the agent of the initiator to the agent of the counterparty.
The MandateInitiationRequest message is used to set-up the instruction that allows the debtor agent to accept instructions from the creditor, through the creditor agent, to debit the account of the debtor.

Usage

The MandateInitiationRequest message can contain only one request to set-up one specific mandate.
The messages can be exchanged between creditor and creditor agent or debtor and debtor agent and between creditor agent and debtor agent.
The message can also be used by an initiating party that has authority to send the message on behalf of the creditor or debtor.
The MandateInitiationRequest message can be used in domestic and cross-border scenarios.

Outline

The MandateInitiationRequest message is composed of 2 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime, Authorisation.

B. Mandate

This building block is mandatory and present once. It contains elements that make up a mandate and allow for the set-up and/or recognition of transactions underlying to the mandate. These elements include, among others, MandateIdentification, Occurrences, CreditorSchemeIdentification, CollectionAmount.

Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<MndtInitnReq>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.4	{Or	Code	<Cd>	[1..1]	Code	
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text	
1.6		InitiatingParty	<InitgPty>	[0..1]	+	
1.7		InstructingAgent	<InstgAgt>	[0..1]	+	
1.8		InstructedAgent	<InstdAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		Mandate	<Mndt>	[1..1]		
2.1		MandateIdentification	<MndtId>	[0..1]	Text	
2.2		MandateRequestIdentification	<MndtReqId>	[1..1]	Text	
2.3		Type	<Tp>	[0..1]		
2.4		ServiceLevel	<SvcLvl>	[0..1]		
2.5	{Or	Code	<Cd>	[1..1]	Code	
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.7		LocalInstrument	<LclInstrm>	[0..1]		
2.8	{Or	Code	<Cd>	[1..1]	Code	
2.9	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.10		Occurrences	<Ocrncs>	[0..1]		
2.11		SequenceType	<SeqTp>	[1..1]	Code	
2.12		Frequency	<Frqcy>	[0..1]	Code	
2.13		Duration	<Drtn>	[0..1]	+	
2.14		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	
2.15		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
2.16		CollectionAmount	<ColltnAmt>	[0..1]	Amount	
2.17		MaximumAmount	<MaxAmt>	[0..1]	Amount	
2.18		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
2.19		Creditor	<Cdtr>	[1..1]	+	
2.20		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.21		CreditorAgent	<CdtrAgt>	[0..1]	+	
2.22		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.23		Debtor	<Dbtr>	[1..1]	+	
2.24		DebtorAccount	<DbtrAcct>	[0..1]	+	
2.25		DebtorAgent	<DbtrAgt>	[1..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.26		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.27		ReferredDocument	<RfrdDoc>	[0..1]		
2.28		Type	<Tp>	[0..1]		
2.29		CodeOrProprietary	<CdOrPrtry>	[1..1]		
2.30	{Or	Code	<Cd>	[1..1]	Code	
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.32		Issuer	<Issr>	[0..1]	Text	
2.33		Number	<Nb>	[0..1]	Text	
2.34		RelatedDate	<RltdDt>	[0..1]	DateTime	

Message Items Description

*The following section identifies the elements of the **MandateInitiationRequestV01** message definition.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics to identify the message and parties playing a role in the mandate initiation, but which are not part of the mandate.

Type: *The **GroupHeader** block is composed of the following **GroupHeader31** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	
1.6		InitiatingParty	<InitgPty>	[0..1]	+
1.7		InstructingAgent	<InstgAgt>	[0..1]	+
1.8		InstructedAgent	<InstdAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the instructed party, to unambiguously identify the message.
Usage: The instructing party has to make sure that MessageIdentification is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]
Definition: Date and time at which the message was created.
Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]
Definition: User identification or any user key to be used to check the authority of the initiating party.

Usage: The content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios, payment initiations, payment returns or payment reversals that are initiated on behalf of a party different from the initiating party.

Type: *This message item is composed of one of the following **Authorisation1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.4	{Or	Code	<Cd>	[1..1]	Code
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

1.4 Code <Cd>

Presence: [1..1]
*This message item is part of choice **1.3 Authorisation**.*
Definition: Specifies the authorisation, in a coded form.
Data Type: Code
*One of the following **Authorisation1Code** values must be used:*

Code	Name	Definition
AUTH	PreAuthorisedFile	Indicates a file has been pre authorised or approved within the originating customer environment and no further approval is required.
FDET	FileLevelAuthorisationDetails	Indicates that a file requires additional file level approval, with the ability to view both the payment information block and supporting customer credit transaction detail.
FSUM	FileLevelAuthorisationSummary	Indicates that a file requires additional file level approval, with the ability to view only the payment information block level information.
ILEV	InstructionLevelAuthorisation	Indicates that a file requires all customer transactions to be authorised or approved.

1.5 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **1.3 Authorisation**.*
Definition: Specifies the authorisation, in a free text form.
Data Type: Max128Text

Format: maxLength: 128
minLength: 1

1.6 InitiatingParty <InitgPty>

Presence: [0..1]
Definition: Party that initiates the mandate message.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

1.7 InstructingAgent <InstgAgt>

Presence: [0..1]
Definition: Agent that instructs the next party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructing agent is the party sending the amendment and cancellation request message and not the party that sent the original mandate initiation request message.
In case of acceptance report message, the instructing agent is the party sending the acceptance report message and not the party that sent the original mandate request message.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification4** p.107 in 'Message Item Types' section.*

1.8 InstructedAgent <InstdAgt>

Presence: [0..1]
Definition: Agent that is instructed by the previous party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructed agent is the party receiving the amendment and cancellation request message and not the party that received the original mandate initiation request message.

In case of acceptance report message, the instructed agent is the party receiving the acceptance report message and not the party that received the original mandate request message.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification4*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to ***BranchAndFinancialInstitutionIdentification4*** *p.107 in 'Message Item Types' section.*

2.0 Mandate <Mndt>

Presence: [1..1]

Definition: Set of elements used to provide the details of the mandate signed between the (ultimate) creditor and the (ultimate) debtor.

Type: *The* ***Mandate*** *block is composed of the following* ***MandateInformation2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		MandateIdentification	<MndtId>	[0..1]	Text
2.2		MandateRequestIdentification	<MndtReqId>	[1..1]	Text
2.3		Type	<Tp>	[0..1]	
2.10		Occurrences	<Ocrncs>	[0..1]	
2.16		CollectionAmount	<ColltnAmt>	[0..1]	Amount
2.17		MaximumAmount	<MaxAmt>	[0..1]	Amount
2.18		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
2.19		Creditor	<Cdtr>	[1..1]	+
2.20		CreditorAccount	<CdtrAcct>	[0..1]	+
2.21		CreditorAgent	<CdtrAgt>	[0..1]	+
2.22		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.23		Debtor	<Dbtr>	[1..1]	+
2.24		DebtorAccount	<DbtrAcct>	[0..1]	+
2.25		DebtorAgent	<DbtrAgt>	[1..1]	+
2.26		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.27		ReferredDocument	<RfrdDoc>	[0..1]	

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.1 MandateIdentification <MndtId>

Presence: [0..1]
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.2 MandateRequestIdentification <MndtReqId>

Presence: [1..1]
Definition: Identification for the mandate request, as assigned by the initiating party.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.3 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of mandate, such as paper, electronic or scheme.
Type: *This message item is composed of the following **MandateTypeInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.4		ServiceLevel	<SvcLvl>	[0..1]	
2.7		LocalInstrument	<LclInstrm>	[0..1]	

2.4 ServiceLevel <SvcLvl>

Presence: [0..1]
Definition: Agreement under which or rules under which the mandate resides.
Type: *This message item is composed of one of the following **ServiceLevel8Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.5	{Or	Code	<Cd>	[1..1]	Code
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text

2.5 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.4 ServiceLevel**.*
Definition: Specifies a pre-agreed service or level of service between the parties, as published in an external service level code list.
Data Type: ExternalServiceLevel1Code
Format: maxLength: 4
minLength: 1

2.6 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.4 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.7 LocalInstrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.
Usage: This element is used to specify a local instrument, local clearing option and/or further qualify the service or service level.

Type: *This message item is composed of one of the following **LocalInstrument2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.8	{Or	Code	<Cd>	[1..1]	Code
2.9	Or}	Proprietary	<Prtry>	[1..1]	Text

2.8 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.7 LocalInstrument**.*

Definition: Specifies the local instrument, as published in an external local instrument code list.

Data Type: ExternalLocalInstrument1Code

Format: maxLength: 35
minLength: 1

2.9 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.7 LocalInstrument**.*

Definition: Specifies the local instrument, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.10 Occurrences <Ocrncs>

Presence: [0..1]

Definition: Set of elements used to provide details of the duration of the mandate and occurrence of the underlying transactions.

Type: *This message item is composed of the following **MandateOccurrences1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.11		SequenceType	<SeqTp>	[1..1]	Code

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.12		Frequency	<Frqcy>	[0..1]	Code
2.13		Duration	<Drtn>	[0..1]	+
2.14		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
2.15		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime

2.11 SequenceType <SeqTp>

Presence: [1..1]
Definition: Identifies the underlying transaction sequence as either recurring or one-off.
Data Type: Code
*One of the following **SequenceType2Code** values must be used:*

Code	Name	Definition
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

2.12 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which instructions are to be created and processed.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

2.13 Duration <Drtn>

Presence: [0..1]
Definition: Length of time for which the mandate remains valid.
Type: *This message item is composed of the following **DatePeriodDetails1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDate	<FrDt>	[1..1]	DateTime
	ToDate	<ToDt>	[0..1]	DateTime

*For additional Type information, please refer to **DatePeriodDetails1** p.106 in 'Message Item Types' section.*

2.14 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.
Data Type: ISODate

2.15 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.
Data Type: ISODate

2.16 CollectionAmount <ColltnAmt>

Presence: [0..1]
Definition: Fixed amount to be collected from the debtor's account.
Data Type: ActiveCurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveCurrencyCode**.*
Format: **ActiveCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveCurrencyCode
[A-Z]{3,3}
Rule(s): **ActiveCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveCurrencyCode
ActiveCurrency
The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.

2.17 MaximumAmount <MaxAmt>

Presence: [0..1]
Definition: Maximum amount that may be collected from the debtor's account, per instruction.
Data Type: ActiveCurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveCurrencyCode**.*

Format: **ActiveCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveCurrencyCode
ActiveCurrency
The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.

2.18 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]
Definition: Credit party that signs the mandate.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.19 Creditor <Cdtr>

Presence: [1..1]
Definition: Party that signs the mandate and to whom an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.20 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.
Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.102 in 'Message Item Types' section.*

2.21 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification4** p.107 in 'Message Item Types' section.*

2.22 UltimateCreditor <UltmtCdtr>

Presence: [0..1]
Definition: Ultimate party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.23 Debtor <Dbtr>

Presence: [1..1]
Definition: Party that signs the mandate and owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.24 DebtorAccount <DbtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the debtor, to which a debit entry will be made as a result of the transaction.
Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.102 in 'Message Item Types' section.*

2.25 DebtorAgent <DbtrAgt>

Presence: [1..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification4** p.107 in 'Message Item Types' section.*

2.26 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.27 ReferredDocument <RfrdDoc>

Presence: [0..1]
Definition: Set of elements used to provide information to identify the underlying documents associated with the mandate.
Type: *This message item is composed of the following **ReferredDocumentInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.28		Type	<Tp>	[0..1]	
2.33		Number	<Nb>	[0..1]	Text
2.34		RelatedDate	<RltdDt>	[0..1]	DateTime

2.28 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of referred document.
Type: *This message item is composed of the following **ReferredDocumentType2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.29		CodeOrProprietary	<CdOrPrtry>	[1..1]	
2.32		Issuer	<Issr>	[0..1]	Text

2.29 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]
Definition: Provides the type details of the referred document.
Type: *This message item is composed of one of the following* ***ReferredDocumentType1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.30	{Or	Code	<Cd>	[1..1]	Code
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text

2.30 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.29 CodeOrProprietary****.*
Definition: Document type in a coded form.
Data Type: Code
One of the following ***DocumentType5Code*** *values must be used:*

Code	Name	Definition
AROI	AccountReceivableOpenItem	Document is a payment that applies to a specific source document.
BOLD	BillOfLading	Document is a shipping notice.
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.
TSUT	TradeServicesUtilityTransaction	Document is a transaction identifier as assigned by the Trade Services Utility.
VCHR	Voucher	Document is an electronic payment document.

2.31 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.29 CodeOrProprietary**.*
Definition: Proprietary identification of the type of the remittance document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.32 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the reference document type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.33 Number <Nb>

Presence: [0..1]
Definition: Unique and unambiguous identification of the referred document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.34 RelatedDate <RltdDt>

Presence: [0..1]
Definition: Date associated with the referred document.
Data Type: ISODate

Business Example 1

Narrative

On 9 June 2009, debtor Johnson purchases mobile phone services from creditor Jersey Mobile Phone. Debtor Johnson and creditor Jersey Mobile Phone agree that the services will be paid for via direct debit transactions in monthly payments for the amount calculated for a period of the past month, starting the first payment on 25 June 2009, from debtor account 5544732 at debtor agent FFFFUS91. It was agreed that the contract for these services will run until further notice.
Creditor Jersey Mobile Phone informs debtor Johnson that the mandate identification will only be available in their administration at the first collection, in the meantime creditor Jersey Mobile Phone will use the number Johns/005 as means of identification of the mandate. Debtor Johnson receives a contractual agreement document on 11 June 2009 with reference number JMP/24653 which holds, among others, detailed information on creditor account (76543) and creditor agent (DDDDUS31).
Creditor Jersey Mobile Phone sends a MandateInitiationRequest message to its account servicer, DDDDUS31.
DDDDUS31 forwards the MandateInitiationRequest message to the account servicer of debtor Johnson, FFFFUS91.

Business Description

MandateInitiationRequest message from Jersey Mobile Phone to FFFFUS91.

Element	*<XMLTag>*	*Content*

Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	BBBB654322
CreationDateTime	<CredDtTm>	2009-06-10T11:00:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Jersey Mobile Phone
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Virginia Lane
BuildingNumber	<BldgNb>	36
PostCode	<PstCd>	NJ 07311
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
Mandate	**<Mndt>**	
MandateRequestIdentification	<MndtReqId>	Johns/005
Occurrences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR
Frequency	<Frqcy>	MNTH
FirstCollectionDate	<FrstColltnDt>	2009-06-25
Creditor	<Cdtr>	
Name	<Nm>	Jersey Mobile Phone
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	76543
CreditorAgent	<CdtrAcct>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	DDDDUS31
Debtor	<Dbtr>	
Name	<Nm>	Johnson
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	5544732
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	FFFFUS91
ReferredDocument	<RfrdDoc>	
Type	<Tp>	

CodeOrProprietary	<CdOrPrtry>	
Code	<Cd>	DISP
Number	<Nb>	JMP/24653
RelatedDate	<RltdDt>	2009-06-11

XML Instance


```
<MndtInitnReq>
    <GrpHdr>
      <MsgId>BBBB654322</MsgId>
      <CreDtTm>2009-06-10T11:00:00</CreDtTm>
      <InitgPty>
        <Nm>Jersey Mobile Phone</Nm>
        <PstlAdr>
          <StrtNm>Virginia Lane</StrtNm>
          <BldgNb>36</BldgNb>
          <PstCd>NJ 07311</PstCd>
          <TwnNm>Jersey City</TwnNm>
          <Ctry>US</Ctry>
        </PstlAdr>
      </InitgPty>
    </GrpHdr>
    <Mndt>
      <MndtReqId>Johns/005</MndtReqId>
      <Ocrncs>
        <SeqTp>RCUR</SeqTp>
        <Frqcy>MNTH</Frqcy>
        <FrstColltnDt>2009-06-25</FrstColltnDt>
      </Ocrncs>
      <Cdtr>
        <Nm>Jersey Mobile Phone</Nm>
      </Cdtr>
      <CdtrAcct>
        <Id>
          <Othr>
            <Id>76543</Id>
          </Othr>
        </Id>
      </CdtrAcct>
      <CdtrAgt>
        <FinInstnId>
          <BIC>DDDDUS31</BIC>
        </FinInstnId>
      </CdtrAgt>
      <Dbtr>
        <Nm>Johnson</Nm>
      </Dbtr>
      <DbtrAcct>
        <Id>
          <Othr>
```

```
            <Id>5544732</Id>
          </Othr>
        </Id>
      </DbtrAcct>
      <DbtrAgt>
        <FinInstnId>
          <BIC>FFFFUS91</BIC>
        </FinInstnId>
      </DbtrAgt>
      <RfrdDoc>
        <Tp>
          <CdOrPrtry>
            <Cd>DISP</Cd>
          </CdOrPrtry>
        </Tp>
        <Nb>JMP/24653</Nb>
        <RltdDt>2009-06-11</RltdDt>
      </RfrdDoc>
    </Mndt>
  </MndtInitnReq>
```


Business Example 2

Narrative

On 16 December 2008, debtor Schneider purchases goods from creditor Paris Solutions, on behalf of ultimate debtor Fischer. Debtor Schneider and creditor Paris Solutions agree that the purchased goods will be paid for via direct debit transactions in monthly payments of EUR 50 for a period of 10 months, starting the first payment on 4 February 2009, from debtor account DE89350700644570000 at debtor agent BBBBFR39.
Creditor Paris Solutions informs debtor Schneider that the number with which he will identify this agreement in his system is 09/345 this number will be quoted as the mandate identification. Debtor Schneider receives an electronic invoice with reference number DE-09/345/79801 which holds detailed information on the creditor account (FR1430041020030300015M02606) and the creditor agent (BBBBFR39).
Creditor Paris Solutions sends a MandateInitiationRequest message to its account servicer, BBBBFR39. BBBBFR39 forwards the MandateInitiationRequest message to the account servicer of debtor Schneider, AAAADE29.

Business Description

MandateInitiationRequest message from Paris Solutions to BBBBFR39.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	AAAA123456
CreationDateTime	<CredDtTm>	2008-12-16T14:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Paris Solutions
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Rue Dante
BuildingNumber	<BldgNb>	16
PostCode	<PstCd>	75004

TownName	<TwnNm>	Paris
Country	<Ctry>	FR
Mandate	**<Mndt>**	
MandateIdentification	<MndtId>	09/345
MandateRequestIdentification	<MndtReqId>	09/345
Type	<Tp>	
ServiceLevel	<SvcLvl>	
Code	<Cd>	SEPA
LocalInstrument	<LclInstrm>	
Code	<Cd>	CORE
Occurrences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR
Frequency	<Frqcy>	MNTH
FirstCollectionDate	<FrstColltnDt>	2009-02-04
FinalCollectionDate	<FnlColltnDt>	2009-11-04
CollectionAmount	<ClltnAmt>	EUR 50
Creditor	<Cdtr>	
Name	<Nm>	Paris Solutions
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	FR1430041020030300015M02606
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBFR39
Debtor	<Dbtr>	
Name	<Nm>	Schneider
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAADE29
Ultimate Debtor	<UltmDbtr	
Name	<Nm>	Fischer
ReferredDocument	<RfrdDoc>	
Number	<Nb>	DE-09/345/79801
RelatedDate	<RltdDt>	2008-12-16

XML Instance

```
<MndtInitnReq>
    <GrpHdr>
```

```
      <MsgId>AAAA123456</MsgId>
      <CreDtTm>2008-12-16T14:25:00</CreDtTm>
      <InitgPty>
         <Nm>Paris Solutions</Nm>
         <PstlAdr>
            <StrtNm>Rue Dante</StrtNm>
            <BldgNb>16</BldgNb>
            <PstCd>75004</PstCd>
            <TwnNm>Paris</TwnNm>
            <Ctry>FR</Ctry>
         </PstlAdr>
      </InitgPty>
   </GrpHdr>
   <Mndt>
      <MndtId>09/345</MndtId>
      <MndtReqId>09/345</MndtReqId>
      <Tp>
         <SvcLvl>
            <Cd>SEPA</Cd>
         </SvcLvl>
         <LclInstrm>
            <Cd>CORE</Cd>
         </LclInstrm>
      </Tp>
      <Ocrncs>
         <SeqTp>RCUR</SeqTp>
         <Frqcy>MNTH</Frqcy>
         <FrstColltnDt>2009-02-04</FrstColltnDt>
         <FnlColltnDt>2009-11-04</FnlColltnDt>
      </Ocrncs>
      <ColltnAmt Ccy="EUR">50</ColltnAmt>
      <Cdtr>
         <Nm>Paris Solutions</Nm>
      </Cdtr>
      <CdtrAcct>
         <Id>
            <IBAN>FR1430041020030300015M02606</IBAN>
         </Id>
      </CdtrAcct>
      <CdtrAgt>
         <FinInstnId>
            <BIC>BBBBFR39</BIC>
         </FinInstnId>
      </CdtrAgt>
      <Dbtr>
         <Nm>Schneider</Nm>
      </Dbtr>
      <DbtrAgt>
         <FinInstnId>
            <BIC>AAAADE29</BIC>
         </FinInstnId>
      </DbtrAgt>
```

```
        <UltmtDbtr>
          <Nm>Fischer</Nm>
        </UltmtDbtr>
        <RfrdDoc>
          <Nb>DE-09/345/79801</Nb>
          <RltdDt>2008-12-16</RltdDt>
        </RfrdDoc>
      </Mndt>
    </MndtInitnReq>
```


Business Example 3

Narrative

On 5 January 2009, debtor Gilles purchases goods from creditor Jones Inc. Debtor Gilles and creditor Jones Inc agree that the purchased goods will be paid for via a direct debit transaction in one payment of the total sum of EUR 1200, from debtor account FR1420063030070500 21M05405 at debtor agent JJJJFR35.
Creditor Jones Inc. informs debtor Gilles that the number with which he will identify this agreement in his system is 55513 this number will be quoted as the mandate identification.
Creditor Jones Inc. informs debtor Gilles on the details of its account (5566771) and agent (GGGGUS32). Debtor Gilles sends a MandateInitiationRequest message to its account servicer, JJJJFR35. JJJJFR35 forwards the MandateInitiationRequest message to the account servicer of creditor Jones and Son Inc., GGGGUS32.

Business Description

MandateInitiationRequest message from Gilles to JJJJFR35.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	BBA969789
CreationDateTime	<CredDtTm>	2009-01-06T16:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Gilles
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Rue Cler
BuildingNumber	<BldgNb>	11
PostCode	<PstCd>	75005
TownName	<TwnNm>	Paris
Country	<Ctry>	FR
Mandate	**<Mndt>**	
MandateIdentification	<MndtId>	55513
MandateRequestIdentification	<MndtReqId>	55513
Type	<Tp>	
Occurrences	<Ocrncs>	
SequenceType	<SeqTp>	OOFF
Frequency	<Frqcy>	

CollectionAmount	<ClltnAmt>	EUR 1200
Creditor	<Cdtr>	
Name	<Nm>	Jones Inc
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	5566771
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	GGGGUS32
Debtor	<Dbtr>	
Name	<Nm>	Gilles
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	FR1420063030070500 21M05405
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	JJJJFR35

XML Instance


```
<MndtInitnReq>
    <GrpHdr>
      <MsgId>BBA969789</MsgId>
      <CreDtTm>2009-01-06T16:25:00</CreDtTm>
      <InitgPty>
        <Nm>Gilles</Nm>
        <PstlAdr>
          <StrtNm>Rue Cler</StrtNm>
          <BldgNb>11</BldgNb>
          <PstCd>75005</PstCd>
          <TwnNm>Paris</TwnNm>
          <Ctry>FR</Ctry>
        </PstlAdr>
      </InitgPty>
    </GrpHdr>
    <Mndt>
      <MndtId>55513</MndtId>
      <MndtReqId>55513</MndtReqId>
      <Ocrncs>
        <SeqTp>OOFF</SeqTp>
      </Ocrncs>
      <ColltnAmt Ccy="EUR">1200</ColltnAmt>
      <Cdtr>
        <Nm>Jones Inc.</Nm>
```

```
        </Cdtr>
        <CdtrAcct>
          <Id>
            <Othr>
              <Id>5566771</Id>
            </Othr>
          </Id>
        </CdtrAcct>
        <CdtrAgt>
          <FinInstnId>
            <BIC>GGGGUS32</BIC>
          </FinInstnId>
        </CdtrAgt>
        <Dbtr>
          <Nm>Gilles</Nm>
        </Dbtr>
        <DbtrAcct>
          <Id>
            <IBAN>FR1420063030070500 21M05405</IBAN>
          </Id>
        </DbtrAcct>
        <DbtrAgt>
          <FinInstnId>
            <BIC>JJJJFR35</BIC>
          </FinInstnId>
        </DbtrAgt>
      </Mndt>
    </MndtInitnReq>
```

pain.010.001.01 MandateAmendmentRequestV01

Message Functionality

Scope

The MandateAmendmentRequest message is sent by the initiator of the request to his agent and/or counterparty. The initiator can both be the debtor or the creditor (or where appropriate the debtor agent).
The MandateAmendmentRequest message is forwarded by the agent of the initiator to the agent of the counterparty.
A MandateAmendmentRequest message is used to request the amendment of specific information in an existing mandate.
The MandateAmendmentRequest message must reflect the new data of the element(s) to be amended and at a minimum a unique reference to the existing mandate. If accepted, this MandateAmendmentRequest message together with the MandateAcceptanceReport message confirming the acceptance will be considered as a valid amendment on an existing mandate, agreed upon by all parties. The amended mandate will from then on be considered the valid mandate.

Usage

The MandateAmendmentRequest message can contain only one request to amend one specific mandate.
The messages can be exchanged between creditor and creditor agent or debtor and debtor agent and between creditor agent and debtor agent.
The message can also be used by an initiating party that has authority to send the message on behalf of the creditor or debtor.
The MandateAmendmentRequest message can be used in domestic and cross-border scenarios.
If all elements in the existing Mandate need to be amended or the underlying contract is different, then the MandateAmendmentRequest message should not be used. The existing Mandate has to be cancelled and a new Mandate has to be initiated.

Outline

The MandateAmendmentRequest message is composed of 2 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime, Authorisation.

B. Underlying Amendment Details

This building block is mandatory and present once. It contains elements that identify the existing mandate and reflects the data of the element(s) to be amended. These include, among others, OriginalMessageInformation, AmendmentReason, OriginalMandate.

Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<MndtAmdmntReq>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]		
1.4	{Or	Code	<Cd>	[1..1]	Code	
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text	
1.6		InitiatingParty	<InitgPty>	[0..1]	±	
1.7		InstructingAgent	<InstgAgt>	[0..1]	±	
1.8		InstructedAgent	<InstdAgt>	[0..1]	±	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		UnderlyingAmendmentDetails	<UndrlygAmdmntDtls>	[1..1]		
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	±	
2.2		AmendmentReason	<AmdmntRsn>	[1..1]		
2.3		Originator	<Orgtr>	[0..1]	±	
2.4		Reason	<Rsn>	[1..1]		
2.5	{Or	Code	<Cd>	[1..1]	Code	
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.7		AdditionalInformation	<AddtlInf>	[0..n]	Text	
2.8		Mandate	<Mndt>	[1..1]		
2.9		MandateIdentification	<MndtId>	[1..1]	Text	
2.10		MandateRequestIdentification	<MndtReqId>	[0..1]	Text	
2.11		Type	<Tp>	[0..1]		
2.12		ServiceLevel	<SvcLvl>	[0..1]		
2.13	{Or	Code	<Cd>	[1..1]	Code	
2.14	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.15		LocalInstrument	<LclInstrm>	[0..1]		
2.16	{Or	Code	<Cd>	[1..1]	Code	
2.17	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.18		Occurrences	<Ocrncs>	[0..1]		
2.19		SequenceType	<SeqTp>	[1..1]	Code	
2.20		Frequency	<Frqcy>	[0..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.21		Duration	<Drtn>	[0..1]	+	
2.22		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	
2.23		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
2.24		CollectionAmount	<ColltnAmt>	[0..1]	Amount	
2.25		MaximumAmount	<MaxAmt>	[0..1]	Amount	
2.26		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
2.27		Creditor	<Cdtr>	[0..1]	+	
2.28		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.29		CreditorAgent	<CdtrAgt>	[0..1]	+	
2.30		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.31		Debtor	<Dbtr>	[0..1]	+	
2.32		DebtorAccount	<DbtrAcct>	[0..1]	+	
2.33		DebtorAgent	<DbtrAgt>	[0..1]	+	
2.34		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.35		ReferredDocument	<RfrdDoc>	[0..1]		
2.36		Type	<Tp>	[0..1]		
2.37		CodeOrProprietary	<CdOrPrtry>	[1..1]		
2.38	{Or	Code	<Cd>	[1..1]	Code	
2.39	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.40		Issuer	<Issr>	[0..1]	Text	
2.41		Number	<Nb>	[0..1]	Text	
2.42		RelatedDate	<RltdDt>	[0..1]	DateTime	
2.43		OriginalMandate	<OrgnlMndt>	[1..1]		
2.44	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text	
2.45	Or}	OriginalMandate	<OrgnlMndt>	[1..1]	+	

Message Items Description

*The following section identifies the elements of the **MandateAmendmentRequestV01** message definition.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics to identify the message and parties playing a role in the amendment of the mandate, but which are not part of the mandate.

Type: *The **GroupHeader** block is composed of the following **GroupHeader31** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	
1.6		InitiatingParty	<InitgPty>	[0..1]	+
1.7		InstructingAgent	<InstgAgt>	[0..1]	+
1.8		InstructedAgent	<InstdAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the instructed party, to unambiguously identify the message.
Usage: The instructing party has to make sure that MessageIdentification is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user key to be used to check the authority of the initiating party.

Usage: The content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios, payment initiations, payment returns or payment reversals that are initiated on behalf of a party different from the initiating party.

Type: *This message item is composed of one of the following **Authorisation1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.4	{Or	Code	<Cd>	[1..1]	Code
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

1.4 Code <Cd>

Presence: [1..1]

*This message item is part of choice **1.3 Authorisation**.*

Definition: Specifies the authorisation, in a coded form.

Data Type: Code

*One of the following **Authorisation1Code** values must be used:*

Code	Name	Definition
AUTH	PreAuthorisedFile	Indicates a file has been pre authorised or approved within the originating customer environment and no further approval is required.
FDET	FileLevelAuthorisationDetails	Indicates that a file requires additional file level approval, with the ability to view both the payment information block and supporting customer credit transaction detail.
FSUM	FileLevelAuthorisationSummary	Indicates that a file requires additional file level approval, with the ability to view only the payment information block level information.
ILEV	InstructionLevelAuthorisation	Indicates that a file requires all customer transactions to be authorised or approved.

1.5 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **1.3 Authorisation**.*
Definition: Specifies the authorisation, in a free text form.
Data Type: Max128Text
Format: maxLength: 128
minLength: 1

1.6 InitiatingParty <InitgPty>

Presence: [0..1]
Definition: Party that initiates the mandate message.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

1.7 InstructingAgent <InstgAgt>

Presence: [0..1]
Definition: Agent that instructs the next party in the chain to carry out an instruction.

Usage Rule:

In case of amendment and cancellation request messages, the instructing agent is the party sending the amendment and cancellation request message and not the party that sent the original mandate initiation request message.
In case of acceptance report message, the instructing agent is the party sending the acceptance report message and not the party that sent the original mandate request message.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification4*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to ***BranchAndFinancialInstitutionIdentification4*** *p.107 in 'Message Item Types' section.*

1.8 InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructed agent is the party receiving the amendment and cancellation request message and not the party that received the original mandate initiation request message.
In case of acceptance report message, the instructed agent is the party receiving the acceptance report message and not the party that received the original mandate request message.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification4*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to ***BranchAndFinancialInstitutionIdentification4*** *p.107 in 'Message Item Types' section.*

2.0 UnderlyingAmendmentDetails <UndrlygAmdmntDtls>

Presence: [1..1]

Definition: Set of elements used to provide details on the amendment request.

Type: *The* ***UnderlyingAmendmentDetails*** *block is composed of the following* ***MandateAmendment1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	+
2.2		AmendmentReason	<AmdmntRsn>	[1..1]	
2.8		Mandate	<Mndt>	[1..1]	
2.43		OriginalMandate	<OrgnlMndt>	[1..1]	

2.1 OriginalMessageInformation <OrgnlMsgInf>

Presence: [0..1]
Definition: Set of elements used to provide information on the original messsage.
Type: *This message item is composed of the following **OriginalMessageInformation1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	MessageIdentification	<MsgId>	[1..1]	Text
	MessageNameIdentification	<MsgNmId>	[1..1]	Text
	CreationDateTime	<CreDtTm>	[0..1]	DateTime

*For additional Type information, please refer to **OriginalMessageInformation1** p.202 in 'Message Item Types' section.*

2.2 AmendmentReason <AmdmntRsn>

Presence: [1..1]
Definition: Set of elements used to provide detailed information on the amendment reason.
Type: *This message item is composed of the following **AmendmentReasonInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.3		Originator	<Orgtr>	[0..1]	+
2.4		Reason	<Rsn>	[1..1]	
2.7		AdditionalInformation	<AddtlInf>	[0..n]	Text

2.3 Originator <Orgtr>

Presence: [0..1]
Definition: Party that issues the amendment request.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.4 Reason <Rsn>

Presence: [1..1]
Definition: Specifies the reason for the amendment request.
Type: *This message item is composed of one of the following **MandateReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.5	{Or	Code	<Cd>	[1..1]	Code
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text

2.5 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.4 Reason**.*
Definition: Reason, as published in an external reason code list.
Data Type: ExternalMandateReason1Code
Format: maxLength: 4
minLength: 1

2.6 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.4 Reason**.*
Definition: Reason, in a proprietary form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.7 AdditionalInformation <AddtlInf>

Presence: [0..n]
Definition: Further details on the amendment request reason.
Data Type: Max105Text
Format: maxLength: 105
minLength: 1

2.8 Mandate <Mndt>

Presence: [1..1]
Definition: Set of elements used to provide the amended mandate data.
Type: *This message item is composed of the following **MandateInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.9		MandateIdentification	<MndtId>	[1..1]	Text
2.10		MandateRequestIdentification	<MndtReqId>	[0..1]	Text
2.11		Type	<Tp>	[0..1]	
2.18		Occurrences	<Ocrncs>	[0..1]	
2.24		CollectionAmount	<ColltnAmt>	[0..1]	Amount
2.25		MaximumAmount	<MaxAmt>	[0..1]	Amount
2.26		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
2.27		Creditor	<Cdtr>	[0..1]	+

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.28		CreditorAccount	<CdtrAcct>	[0..1]	+
2.29		CreditorAgent	<CdtrAgt>	[0..1]	+
2.30		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.31		Debtor	<Dbtr>	[0..1]	+
2.32		DebtorAccount	<DbtrAcct>	[0..1]	+
2.33		DebtorAgent	<DbtrAgt>	[0..1]	+
2.34		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.35		ReferredDocument	<RfrdDoc>	[0..1]	

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.9 MandateIdentification <MndtId>

Presence: [1..1]
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.10 MandateRequestIdentification <MndtReqId>

Presence: [0..1]
Definition: Identification for the mandate request, as assigned by the initiating party.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.11 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of mandate, such as paper, electronic or scheme.
Type: *This message item is composed of the following **MandateTypeInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.12		ServiceLevel	<SvcLvl>	[0..1]	
2.15		LocalInstrument	<LclInstrm>	[0..1]	

2.12 ServiceLevel <SvcLvl>

Presence: [0..1]

Definition: Agreement under which or rules under which the mandate resides.

Type: *This message item is composed of one of the following **ServiceLevel8Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.13	{Or	Code	<Cd>	[1..1]	Code
2.14	Or}	Proprietary	<Prtry>	[1..1]	Text

2.13 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.12 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as published in an external service level code list.

Data Type: ExternalServiceLevel1Code

Format: maxLength: 4
minLength: 1

2.14 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.12 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.15 LocalInstrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.
Usage: This element is used to specify a local instrument, local clearing option and/or further qualify the service or service level.

Type: *This message item is composed of one of the following **LocalInstrument2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.16	{Or	Code	<Cd>	[1..1]	Code
2.17	Or}	Proprietary	<Prtry>	[1..1]	Text

2.16 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.15 LocalInstrument**.*

Definition: Specifies the local instrument, as published in an external local instrument code list.

Data Type: ExternalLocalInstrument1Code

Format: maxLength: 35
minLength: 1

2.17 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.15 LocalInstrument**.*
Definition: Specifies the local instrument, as a proprietary code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.18 Occurrences <Ocrncs>

Presence: [0..1]
Definition: Set of elements used to provide details of the duration of the mandate and occurrence of the underlying transactions.
Type: *This message item is composed of the following **MandateOccurrences1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.19		SequenceType	<SeqTp>	[1..1]	Code
2.20		Frequency	<Frqcy>	[0..1]	Code
2.21		Duration	<Drtn>	[0..1]	+
2.22		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
2.23		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime

2.19 SequenceType <SeqTp>

Presence: [1..1]
Definition: Identifies the underlying transaction sequence as either recurring or one-off.
Data Type: Code
*One of the following **SequenceType2Code** values must be used:*

Code	Name	Definition
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

2.20 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which instructions are to be created and processed.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.

Code	Name	Definition
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

2.21 Duration <Drtn>

Presence: [0..1]
Definition: Length of time for which the mandate remains valid.
Type: *This message item is composed of the following **DatePeriodDetails1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDate	<FrDt>	[1..1]	DateTime
	ToDate	<ToDt>	[0..1]	DateTime

*For additional Type information, please refer to **DatePeriodDetails1** p.106 in 'Message Item Types' section.*

2.22 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.
Data Type: ISODate

2.23 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.
Data Type: ISODate

2.24 CollectionAmount <ColltnAmt>

Presence: [0..1]
Definition: Fixed amount to be collected from the debtor's account.
Data Type: ActiveCurrencyAndAmount
*This data type must be used with the following XML Attribute: **Currency (Ccy)** which is typed by **ActiveCurrencyCode**.*
Format: **ActiveCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveCurrencyCode
[A-Z]{3,3}
Rule(s): **ActiveCurrencyAndAmount**
CurrencyAmount

The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveCurrencyCode
ActiveCurrency
The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.

2.25 MaximumAmount <MaxAmt>

Presence: [0..1]
Definition: Maximum amount that may be collected from the debtor's account, per instruction.
Data Type: ActiveCurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveCurrencyCode****.*
Format: **ActiveCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveCurrencyCode
[A-Z]{3,3}
Rule(s): **ActiveCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveCurrencyCode
ActiveCurrency
The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.

2.26 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]
Definition: Credit party that signs the mandate.
Type: *This message item is composed of the following* ***PartyIdentification32*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.27 Creditor <Cdtr>

Presence: [0..1]
Definition: Party that signs the mandate and to whom an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.28 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.
Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.102 in 'Message Item Types' section.*

2.29 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification4** p.107 in 'Message Item Types' section.*

2.30 UltimateCreditor <UltmtCdtr>

Presence: [0..1]
Definition: Ultimate party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.31 Debtor <Dbtr>

Presence: [0..1]
Definition: Party that signs the mandate and owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.32 DebtorAccount <DbtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the debtor, to which a debit entry will be made as a result of the transaction.
Type: *This message item is composed of the following **CashAccount16** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount16** p.102 in 'Message Item Types' section.*

2.33 DebtorAgent <DbtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification4** p.107 in 'Message Item Types' section.*

2.34 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.35 ReferredDocument <RfrdDoc>

Presence: [0..1]
Definition: Set of elements used to provide information to identify the underlying documents associated with the mandate.
Type: *This message item is composed of the following **ReferredDocumentInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.36		Type	<Tp>	[0..1]	
2.41		Number	<Nb>	[0..1]	Text
2.42		RelatedDate	<RltdDt>	[0..1]	DateTime

2.36 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of referred document.
Type: *This message item is composed of the following **ReferredDocumentType2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.37		CodeOrProprietary	<CdOrPrtry>	[1..1]	
2.40		Issuer	<Issr>	[0..1]	Text

2.37 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]
Definition: Provides the type details of the referred document.
Type: *This message item is composed of one of the following **ReferredDocumentType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.38	{Or	Code	<Cd>	[1..1]	Code
2.39	Or}	Proprietary	<Prtry>	[1..1]	Text

2.38 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.37 CodeOrProprietary**.*
Definition: Document type in a coded form.
Data Type: Code
*One of the following **DocumentType5Code** values must be used:*

Code	Name	Definition
AROI	AccountReceivableOpenItem	Document is a payment that applies to a specific source document.
BOLD	BillOfLading	Document is a shipping notice.
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.

Code	Name	Definition
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.
TSUT	TradeServicesUtilityTransaction	Document is a transaction identifier as assigned by the Trade Services Utility.
VCHR	Voucher	Document is an electronic payment document.

2.39 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.37 CodeOrProprietary**.*

Definition: Proprietary identification of the type of the remittance document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.40 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the reference document type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.41 Number <Nb>

Presence: [0..1]

Definition: Unique and unambiguous identification of the referred document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.42 RelatedDate <RltdDt>

Presence: [0..1]

Definition: Date associated with the referred document.

Data Type: ISODate

2.43 OriginalMandate <OrgnlMndt>

Presence: [1..1]
Definition: Set of elements used to provide the original mandate data.
Type: *This message item is composed of one of the following* ***OriginalMandate1Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.44	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text
2.45	Or}	OriginalMandate	<OrgnlMndt>	[1..1]	+

2.44 OriginalMandateIdentification <OrgnlMndtId>

Presence: [1..1]
This message item is part of choice ***2.43 OriginalMandate****.*
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the original mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.45 OriginalMandate <OrgnlMndt>

Presence: [1..1]
This message item is part of choice ***2.43 OriginalMandate****.*
Definition: Set of elements used to provide the original mandate data.
Type: *This message item is composed of the following* ***MandateInformation1*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	MandateIdentification	<MndtId>	[1..1]	Text
	MandateRequestIdentification	<MndtReqId>	[0..1]	Text
	Type	<Tp>	[0..1]	
	Occurrences	<Ocrncs>	[0..1]	
	CollectionAmount	<ColltnAmt>	[0..1]	Amount
	MaximumAmount	<MaxAmt>	[0..1]	Amount
	CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	
	Creditor	<Cdtr>	[1..1]	
	CreditorAccount	<CdtrAcct>	[0..1]	
	CreditorAgent	<CdtrAgt>	[0..1]	
	UltimateCreditor	<UltmtCdtr>	[0..1]	
	Debtor	<Dbtr>	[1..1]	
	DebtorAccount	<DbtrAcct>	[0..1]	
	DebtorAgent	<DbtrAgt>	[1..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	UltimateDebtor	<UltmtDbtr>	[0..1]	
	ReferredDocument	<RfrdDoc>	[0..1]	

*For additional Type information, please refer to **MandateInformation1** p.117 in 'Message Item Types' section.*

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

Business Example 1

Narrative

Debtor Carter has an existing mandate, identification number 3344/54, with creditor Virgay Insurance Company for a yearly recurring direct debit transaction for a car insurance premium for an amount of USD 1200.
Debtor Carter and creditor Virgay have agreed to change the frequency of the direct debit transaction from yearly to monthly for an amount of EUR 100. All other existing information remains the same: debtor account 33445, debtor agent MMMMUS31, and creditor agent BBBBUS21.
Creditor Virgay Insurance Company has sent a MandateAmendmentRequest message to its account servicer, BBBBUS21.
BBBBUS21 forward the MandateAmendmentRequest message to the account servicer of debtor Carter, MMMMUS31.

Business Description

MandateAmendmentRequest message from BBBBUS21 to MMMMUS31.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	DDFF12345
CreationDateTime	<CredDtTm>	2008-12-16T11:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Virgay Insurance Company
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	High Street
BuildingNumber	<BldgNb>	12
PostCode	<PstCd>	NJ 65005
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
InstructingAgent	<InstgAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBUS21
InstructedAgent	<InstdAgt>	
FinancialInstitutionIdentification	<FinInstnId>	

BIC	<BIC>	MMMMUS31
UnderlyingAmendmentDetails	**<UndrlygAmdmntDtls>**	
AmendmentReason	<AmdlntRsn>	
Reason	<Rsn>	
Proprietary	<Prtry>	Change on the contract
Mandate	<Mndt>	
MandateIdentification	<MndtId>	3344/54
Occurrences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR
Frequency	<Frqcy>	MNTH
CollectionAmount	<ColltnAmt>	USD 100
Creditor	<Cdtr>	
Name	<Nm>	Virgay Insurance Company
Debtor	<Dbtr>	
Name	<Nm>	Carter
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	33445
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	MMMMUS31
OriginalMandate	<OrgnMndt>	
OriginalMandate	<OrgnMndt>	
MandateIdentification	<MndtId>	3344/54
Occurrences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR
Frequency	<Frqcy>	YEAR
CollectionAmount	<ColltnAmt>	USD 1200
Creditor	<Cdtr>	
Name	<Nm>	Virgay Insurance Company
Debtor	<Dbtr>	
Name	<Nm>	Carter
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	MMMMUS31

XML Instance


```
<MndtAmdmntReq>
    <GrpHdr>
      <MsgId>DDFF12345</MsgId>
      <CreDtTm>2008-12-16T11:25:00</CreDtTm>
      <InitgPty>
        <Nm>Virgay Insurance Company</Nm>
        <PstlAdr>
          <StrtNm>High Street</StrtNm>
          <BldgNb>12</BldgNb>
          <PstCd>NJ 65005</PstCd>
          <TwnNm>Jersey City</TwnNm>
          <Ctry>US</Ctry>
        </PstlAdr>
      </InitgPty>
      <InstgAgt>
        <FinInstnId>
          <BIC>BBBBUS21</BIC>
        </FinInstnId>
      </InstgAgt>
      <InstdAgt>
        <FinInstnId>
          <BIC>MMMMUS31</BIC>
        </FinInstnId>
      </InstdAgt>
    </GrpHdr>
    <UndrlygAmdmntDtls>
      <AmdmntRsn>
        <Rsn>
          <Prtry>Change on the contract</Prtry>
        </Rsn>
      </AmdmntRsn>
      <Mndt>
        <MndtId>3344/54</MndtId>
        <Ocrncs>
          <SeqTp>RCUR</SeqTp>
          <Frqcy>MNTH</Frqcy>
        </Ocrncs>
        <ColltnAmt Ccy="USD">100</ColltnAmt>
        <Cdtr>
          <Nm>Virgay Insurance Company</Nm>
        </Cdtr>
        <Dbtr>
          <Nm>Carter</Nm>
        </Dbtr>
        <DbtrAcct>
          <Id>
            <Othr>
              <Id>33445</Id>
            </Othr>
          </Id>
```

```
            </DbtrAcct>
            <DbtrAgt>
              <FinInstnId>
                <BIC>MMMMUS31</BIC>
              </FinInstnId>
            </DbtrAgt>
          </Mndt>
          <OrgnlMndt>
            <OrgnlMndt>
              <MndtId>3344/54</MndtId>
              <Ocrncs>
                <SeqTp>RCUR</SeqTp>
                <Frqcy>YEAR</Frqcy>
              </Ocrncs>
              <ColltnAmt Ccy="USD">1200</ColltnAmt>
              <Cdtr>
                <Nm>Virgay Insurance Company</Nm>
              </Cdtr>
              <Dbtr>
                <Nm>Carter</Nm>
              </Dbtr>
              <DbtrAgt>
                <FinInstnId>
                  <BIC>MMMMUS31</BIC>
                </FinInstnId>
              </DbtrAgt>
            </OrgnlMndt>
          </OrgnlMndt>
        </UndrlygAmdmntDtls>
      </MndtAmdmntReq>
    <MndtAmdmntReq>
```


Business Example 2

Narrative

Debtor Moulin et Cie. has an existing mandate, identification number 66613/06, with creditor Jacquelin Freres for a monthly recurring direct debit for the amount of EUR 25.
Debtor Moulin et Cie is changing account numbers from FR1420663338880500 21M05505 to FR1310052030060400 10M04304 with the same debtor agent MMMMFR23 because of a cash management optimization.
Debtor Moulin et Cie. sends a MandateAmendmentRequest message to its account servicer, MMMMFR23. MMMMFR23 forwards the MandateAmendmentRequest message, unchanged, to the account servicer of the creditor Jacquelin Freres, GGGGUS31.

Business Description

MandateAmendmentRequest message from Moulin et Cie to MMMMFR23.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	CFFC33445
CreationDateTime	<CredDtTm>	2008-12-15T16:25:00

InitiatingParty	<InitgPty>	
Name	<Nm>	Moulin et Cie
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Rue de Bretagne
BuildingNumber	<BldgNb>	10
PostCode	<PstCd>	75005
TownName	<TwnNm>	Paris
Country	<Ctry>	FR
UnderlyingAmendmentDetails	**<UndrlygAmdmntDtls>**	
AmendmentReason	<AmdlntRsn>	
Originator	<Orgtr>	
Name	<Nm>	Moulin et Cie
Reason	<Rsn>	
Proprietary	<Prtry>	Change account for optimization
Mandate	<Mndt>	
MandateIdentification	<MndtId>	66613
Creditor	<Cdtr>	
Name	<Nm>	Jacquelin Freres
Debtor	<Dbtr>	
Name	<Nm>	Moulin et Cie
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	FR1310052030060400 10m04304
OriginalMandate	<OrgnMndt>	
OriginalMandate	<OrgnMndt>	
MandateIdentification	<MndtId>	66613
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	FR1420663338880500 21m05505
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	MMMMFR23

XML Instance

```
<MndtAmdmntReq>
    <GrpHdr>
      <MsgId>CFFC33445</MsgId>
      <CreDtTm>2008-12-15T16:25:00</CreDtTm>
      <InitgPty>
```

```
        <Nm>Moulin et Cie</Nm>
        <PstlAdr>
          <StrtNm>Rue de Bretagne</StrtNm>
          <BldgNb>10</BldgNb>
          <PstCd>75005</PstCd>
          <TwnNm>Paris</TwnNm>
          <Ctry>FR</Ctry>
        </PstlAdr>
      </InitgPty>
    </GrpHdr>
    <UndrlygAmdmntDtls>
      <AmdmntRsn>
        <Orgtr>
          <Nm>Moulin et Cie</Nm>
        </Orgtr>
        <Rsn>
          <Prtry>Change account for optimization</Prtry>
        </Rsn>
      </AmdmntRsn>
      <Mndt>
        <MndtId>66613</MndtId>
        <DbtrAcct>
          <Id>
            <IBAN>FR1310052030060400 10M04304</IBAN>
          </Id>
        </DbtrAcct>
      </Mndt>
      <OrgnlMndt>
        <OrgnlMndt>
          <MndtId>66613/06</MndtId>
          <Cdtr>
            <Nm>Jacquelin Freres</Nm>
          </Cdtr>
          <Dbtr>
            <Nm>Moulin et Cie</Nm>
          </Dbtr>
          <DbtrAcct>
            <Id>
              <IBAN>FR1420663338880500 21M05505</IBAN>
            </Id>
          </DbtrAcct>
          <DbtrAgt>
            <FinInstnId>
              <BIC>MMMMFR23</BIC>
            </FinInstnId>
          </DbtrAgt>
        </OrgnlMndt>
      </OrgnlMndt>
    </UndrlygAmdmntDtls>
  </MndtAmdmntReq>
```

Business Example 3

Narrative

Debtor Agent (Best Bank) AAAAUS22 has recently merged with another agent, one of the consequences of this merger is that the structure of the account numbers in the books of AAAAUS22 will change.
AAAAUS22 is offering the service to its clients to inform their creditors, through the creditor agent, in this case BBBBB56, of this change.
The existing mandate, identification number 55512/04, is a mandate between debtor Williams and creditor Stevens and Son (account number 558823). The account number of debtor Williams will change from 445568 to 33144568.

Business Description

MandateAmendmentRequest message from AAAAUS22 to BBBBUS56.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	FGH7945
CreationDateTime	<CredDtTm>	2008-12-16T11:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Best Bank
InstructingAgent	<InstgAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAAUS22
InstructedAgent	<InstdAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	BBBBUS56
UnderlyingAmendmentDetails	**<UndrlygAmdmntDtls>**	
AmendmentReason	<AmdlntRsn>	
OriginalMessageInformation	<OrgnlMsgInf>	
MessageIdentification	<MsgId>	FGH7930
MessageNameIdentification	<MsgNmId>	pain.009.001.01
CreationDateTime	<CreDtTm>	2008-06-28T10:00:00
Originator	<Orgtr>	
Name	<Nm>	Best Bank
Reason	<Rsn>	
Proprietary	<Prtry>	Account structure change
Mandate	<Mndt>	
MandateIdentification	<MndtId>	55512/04
Creditor	<Cdtr>	
Name	<Nm>	Stevens and Son
CreditorAccount	<CdtrAcct>	

Identification	<Id>	
Other	<Othr>	
Identification	<Id>	558823
Debtor	<Dbtr>	
Name	<Nm>	Williams
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	33144568
OriginalMandate	<OrgnlMndt>	
OriginalMandate	<OrgnlMndt>	
MandateIdentification	<MndtId>	55512/04
Creditor	<Cdtr>	
Name	<Nm>	Stevens and Son
Debtor	<Dbtr>	
Name	<Nm>	Williams
DebtorAccount	<DbtrAcct>	
Other	<Othr>	
Identification	<Id>	445568
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstId>	
BIC	<BIC>	AAAAUS22

XML Instance

```
<MndtAmdmntReq>
    <GrpHdr>
      <MsgId>FGH7945</MsgId>
      <CreDtTm>2008-12-16T11:25:00</CreDtTm>
      <InitgPty>
        <Nm>Best Bank</Nm>
      </InitgPty>
      <InstgAgt>
        <FinInstnId>
          <BIC>AAAAUS22</BIC>
        </FinInstnId>
      </InstgAgt>
      <InstdAgt>
        <FinInstnId>
          <BIC>BBBBUS56</BIC>
        </FinInstnId>
      </InstdAgt>
    </GrpHdr>
```

```
<UndrlygAmdmntDtls>
  <OrgnlMsgInf>
    <MsgId>FGH7930</MsgId>
    <MsgNmId>pain.009.001.01</MsgNmId>
    <CreDtTm>2008-06-28T10:00:00</CreDtTm>
  </OrgnlMsgInf>
  <AmdmntRsn>
    <Orgtr>
      <Nm>Best Bank</Nm>
    </Orgtr>
    <Rsn>
      <Prtry>Account structure change</Prtry>
    </Rsn>
  </AmdmntRsn>
  <Mndt>
    <MndtId>55512/04</MndtId>
    <Cdtr>
      <Nm>Stevens and Son</Nm>
    </Cdtr>
    <CdtrAcct>
      <Id>
        <Othr>
          <Id>558823</Id>
        </Othr>
      </Id>
    </CdtrAcct>
    <Dbtr>
      <Nm>Williams</Nm>
    </Dbtr>
    <DbtrAcct>
      <Id>
        <Othr>
          <Id>33144568</Id>
        </Othr>
      </Id>
    </DbtrAcct>
  </Mndt>
  <OrgnlMndt>
    <OrgnlMndt>
      <MndtId>55512/04</MndtId>
      <Cdtr>
        <Nm>Stevens and Son</Nm>
      </Cdtr>
      <Dbtr>
        <Nm>Williams</Nm>
      </Dbtr>
      <DbtrAcct>
        <Id>
          <Othr>
            <Id>445568</Id>
          </Othr>
        </Id>
```

```
            </DbtrAcct>
            <DbtrAgt>
              <FinInstnId>
                <BIC>AAAAUS22</BIC>
              </FinInstnId>
            </DbtrAgt>
          </OrgnlMndt>
        </OrgnlMndt>
      </UndrlygAmdmntDtls>
    </MndtAmdmntReq>
```

pain.011.001.01 MandateCancellationRequestV01

Message Functionality

Scope

The MandateCancellationRequest message is sent by the initiator of the request to his agent. The initiator can either be the debtor or the creditor.
The MandateCancellationRequest message is forwarded by the agent of the initiator to the agent of the counterparty.
A MandateCancellationRequest message is used to request the cancellation of an existing mandate. If accepted, this MandateCancellationRequest message together with the MandateAcceptanceReport message confirming the acceptance will be considered a valid cancellation of an existing mandate, agreed upon by all parties.

Usage

The MandateCancellationRequest message can contain only one request to cancel one specific mandate.
The messages can be exchanged between creditor and creditor agent or debtor and debtor agent and between creditor agent and debtor agent.
The message can also be used by an initiating party that has authority to send the message on behalf of the creditor or debtor.
The MandateCancellationRequest message can be used in domestic and cross-border scenarios.

Outline

The MandateCancellationRequest message is composed of 2 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime, Authorisation.

B. Underlying Cancellation Details

This building block is mandatory and present once. It contains elements that identify the existing mandate. These include, among others, OriginalMessageInformation, CancellationReason, OriginalMandate.

Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<MndtCxlReq>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.4	{Or	Code	<Cd>	[1..1]	Code	
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text	
1.6		InitiatingParty	<InitgPty>	[0..1]	+	
1.7		InstructingAgent	<InstgAgt>	[0..1]	+	
1.8		InstructedAgent	<InstdAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		UnderlyingCancellationDetails	<UndrlygCxlDtls>	[1..1]		
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	+	
2.2		CancellationReason	<CxlRsn>	[1..1]		
2.3		Originator	<Orgtr>	[0..1]	+	
2.4		Reason	<Rsn>	[1..1]		
2.5	{Or	Code	<Cd>	[1..1]	Code	
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.7		AdditionalInformation	<AddtlInf>	[0..n]	Text	
2.8		OriginalMandate	<OrgnlMndt>	[1..1]		
2.9	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text	
2.10	Or}	OriginalMandate	<OrgnlMndt>	[1..1]	+	

Message Items Description

*The following section identifies the elements of the **MandateCancellationRequestV01** message definition.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics to identify the message and parties playing a role in the cancellation of the mandate, but which are not part of the mandate.

Type: *The **GroupHeader** block is composed of the following **GroupHeader31** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	
1.6		InitiatingParty	<InitgPty>	[0..1]	+
1.7		InstructingAgent	<InstgAgt>	[0..1]	+

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.8		InstructedAgent	<InstdAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the instructed party, to unambiguously identify the message.
Usage: The instructing party has to make sure that MessageIdentification is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user key to be used to check the authority of the initiating party.

Usage: The content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios, payment initiations, payment returns or payment reversals that are initiated on behalf of a party different from the initiating party.

Type: *This message item is composed of one of the following **Authorisation1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.4	{Or	Code	<Cd>	[1..1]	Code
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

1.4 Code <Cd>

Presence: [1..1]

*This message item is part of choice **1.3 Authorisation**.*

Definition: Specifies the authorisation, in a coded form.

Data Type: Code

*One of the following **Authorisation1Code** values must be used:*

Code	Name	Definition
AUTH	PreAuthorisedFile	Indicates a file has been pre authorised or approved within the originating customer environment and no further approval is required.

Code	Name	Definition
FDET	FileLevelAuthorisationDetails	Indicates that a file requires additional file level approval, with the ability to view both the payment information block and supporting customer credit transaction detail.
FSUM	FileLevelAuthorisationSummary	Indicates that a file requires additional file level approval, with the ability to view only the payment information block level information.
ILEV	InstructionLevelAuthorisation	Indicates that a file requires all customer transactions to be authorised or approved.

1.5 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **1.3 Authorisation**.*
Definition: Specifies the authorisation, in a free text form.
Data Type: Max128Text
Format: maxLength: 128
minLength: 1

1.6 InitiatingParty <InitgPty>

Presence: [0..1]
Definition: Party that initiates the mandate message.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

1.7 InstructingAgent <InstgAgt>

Presence: [0..1]
Definition: Agent that instructs the next party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructing agent is the party sending the amendment and cancellation request message and not the party that sent the original mandate initiation request message.
In case of acceptance report message, the instructing agent is the party sending the acceptance report message and not the party that sent the original mandate request message.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification4** p.107 in 'Message Item Types' section.*

1.8 InstructedAgent <InstdAgt>

Presence: [0..1]
Definition: Agent that is instructed by the previous party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructed agent is the party receiving the amendment and cancellation request message and not the party that received the original mandate initiation request message.
In case of acceptance report message, the instructed agent is the party receiving the acceptance report message and not the party that received the original mandate request message.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification4** p.107 in 'Message Item Types' section.*

2.0 UnderlyingCancellationDetails <UndrlygCxlDtls>

Presence: [1..1]
Definition: Set of elements used to provide details on the cancellation request.
Type: *The **UnderlyingCancellationDetails** block is composed of the following **MandateCancellation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	+
2.2		CancellationReason	<CxlRsn>	[1..1]	
2.8		OriginalMandate	<OrgnlMndt>	[1..1]	

2.1 OriginalMessageInformation <OrgnlMsgInf>

Presence: [0..1]
Definition: Set of elements used to provide information on the original messsage.
Type: *This message item is composed of the following **OriginalMessageInformation1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	MessageIdentification	<MsgId>	[1..1]	Text
	MessageNameIdentification	<MsgNmId>	[1..1]	Text
	CreationDateTime	<CreDtTm>	[0..1]	DateTime

*For additional Type information, please refer to **OriginalMessageInformation1** p.202 in 'Message Item Types' section.*

2.2 CancellationReason <CxlRsn>

Presence: [1..1]
Definition: Set of elements used to provide detailed information on the cancellation reason.
Type: *This message item is composed of the following **CancellationReasonInformation2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.3		Originator	<Orgtr>	[0..1]	+
2.4		Reason	<Rsn>	[1..1]	
2.7		AdditionalInformation	<AddtlInf>	[0..n]	Text

2.3 Originator <Orgtr>

Presence: [0..1]
Definition: Party that issues the cancellation request.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

2.4 Reason <Rsn>

Presence: [1..1]
Definition: Specifies the reason for the cancellation request.
Type: *This message item is composed of one of the following **MandateReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.5	{Or	Code	<Cd>	[1..1]	Code
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text

2.5 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.4 Reason**.*
Definition: Reason, as published in an external reason code list.
Data Type: ExternalMandateReason1Code
Format: maxLength: 4
minLength: 1

2.6 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.4 Reason**.*
Definition: Reason, in a proprietary form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.7 AdditionalInformation <AddtlInf>

Presence: [0..n]
Definition: Further details on the cancellation request reason.
Data Type: Max105Text
Format: maxLength: 105
minLength: 1

2.8 OriginalMandate <OrgnlMndt>

Presence: [1..1]
Definition: Set of elements used to provide the original mandate data.
Type: *This message item is composed of one of the following **OriginalMandate1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.9	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text
2.10	Or}	OriginalMandate	<OrgnlMndt>	[1..1]	+

2.9 OriginalMandateIdentification <OrgnlMndtId>

Presence: [1..1]
*This message item is part of choice **2.8 OriginalMandate**.*
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the original mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.10 OriginalMandate <OrgnlMndt>

Presence: [1..1]
*This message item is part of choice **2.8 OriginalMandate**.*

Definition: Set of elements used to provide the original mandate data.

Type: *This message item is composed of the following **MandateInformation1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	MandateIdentification	<MndtId>	[1..1]	Text
	MandateRequestIdentification	<MndtReqId>	[0..1]	Text
	Type	<Tp>	[0..1]	
	Occurrences	<Ocrncs>	[0..1]	
	CollectionAmount	<ColltnAmt>	[0..1]	Amount
	MaximumAmount	<MaxAmt>	[0..1]	Amount
	CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	
	Creditor	<Cdtr>	[1..1]	
	CreditorAccount	<CdtrAcct>	[0..1]	
	CreditorAgent	<CdtrAgt>	[0..1]	
	UltimateCreditor	<UltmtCdtr>	[0..1]	
	Debtor	<Dbtr>	[1..1]	
	DebtorAccount	<DbtrAcct>	[0..1]	
	DebtorAgent	<DbtrAgt>	[1..1]	
	UltimateDebtor	<UltmtDbtr>	[0..1]	
	ReferredDocument	<RfrdDoc>	[0..1]	

*For additional Type information, please refer to **MandateInformation1** p.117 in 'Message Item Types' section.*

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

Business Example 1

Narrative

Debtor Jones (account number 44956) has send a MandateCancellationRequest message to his account servicer DDDDUS31, asking for the cancellation of his existing mandate, identification number 1633/05 with creditor Jeffersons Car Insurance Company (account number 33441), without listing a specific reason.
Debtor Agent DDDDUS31 sends a MandateCancellationRequest message to the account servicer of the creditor, MMMMUS29.

Business Description

MandateCancellationRequest message from DDDDUS31 to MMMMUS29.

Element	*<XMLTag>*	*Content*
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	ML12345

CreationDateTime	<CredDtTm>	2008-12-19T151:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Jones
InstructingAgent	<InstgAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	DDDDUS31
InstructedAgent	<InstdAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	MMMMUS29
UnderlyingCancellationDetails	**<UndrlygCxlDtls>**	
CancellationReason	<CxlRsn>	
Reason	<Rsn>	
Code	<Cd>	MD16
OriginalMandate	<OrgnlMndt>	
OriginalMandateIdentification	<OrglMndtId>	1633/05

XML Instance

```
<MndtCxlReq>
    <GrpHdr>
      <MsgId>ML12345</MsgId>
      <CreDtTm>2008-12-19T15:25:00</CreDtTm>
      <InitgPty>
        <Nm>Jones</Nm>
      </InitgPty>
      <InstgAgt>
        <FinInstnId>
          <BIC>DDDDUS31</BIC>
        </FinInstnId>
      </InstgAgt>
      <InstdAgt>
        <FinInstnId>
          <BIC>MMMMUS29</BIC>
        </FinInstnId>
      </InstdAgt>
    </GrpHdr>
    <UndrlygCxlDtls>
      <CxlRsn>
        <Rsn>
          <Cd>MD16</Cd>
        </Rsn>
      </CxlRsn>
      <OrgnlMndt>
        <OrgnlMndtId>1633/05</OrgnlMndtId>
      </OrgnlMndt>
    </UndrlygCxlDtls>
```

</MndtCxlReq>

Business Example 2

Narrative

Ultimate debtor Schneider and creditor Paris Solutions have agreed to end their contract as Schneider will no longer make use of the services provided by Paris Solutions. On this basis it is decided to cancel the existing mandate, identification number PS66678, between debtor Schmitt (account number DE89350700644570000) and creditor Paris Solutions (account number FR1420663338880500 21M05505).
Creditor Paris Solutions sends a MandateCancellationRequest message to its account servicer CCCCFR23. CCCCFR23 forwards the MandateCancellationRequest message to the account servicer of the creditor, TTTTDE48.

Business Description

MandateCancellationRequest message from Paris Solutions to CCCCFR23.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	FFRR5698
CreationDateTime	<CredDtTm>	2008-12-19T11:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Paris Solutions
UnderlyingCancellationDetails	**<UndrlygClxDtls>**	
CancellationReason	<CxlRsn>	
Reason	<Rsn>	
Proprietary	<Prtry>	End of contract
OriginalMandate	<OrgnlMndt>	
OriginalMandate	<OrgnlMndt>	
MandateIdentification	<MndtId>	PS66678
Creditor	<Cdtr>	
Name	<Nm>	Paris Solutions
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	FR1420663338880500 21M05505
Debtor	<Dbtr>	
Name	<Nm>	Schmitt
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	DE89350700644570000
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstId>	
BIC	<BIC>	TTTTDE48

UltimateDebtor	<UltmtDbtr>	
Name	<Nm>	Schneider

XML Instance


```
<MndtCxlReq>
    <GrpHdr>
      <MsgId>FFRR5698</MsgId>
      <CreDtTm>2008-12-19T11:25:00</CreDtTm>
      <InitgPty>
        <Nm>Paris Solutions</Nm>
      </InitgPty>
    </GrpHdr>
    <UndrlygCxlDtls>
      <CxlRsn>
        <Rsn>
          <Prtry>End of contract</Prtry>
        </Rsn>
      </CxlRsn>
      <OrgnlMndt>
        <OrgnlMndt>
          <MndtId>PS66678</MndtId>
          <Cdtr>
            <Nm>Paris Solutions</Nm>
          </Cdtr>
          <CdtrAcct>
            <Id>
              <IBAN>FR1420663338880500 21M05505</IBAN>
            </Id>
          </CdtrAcct>
          <Dbtr>
            <Nm>Schmitt</Nm>
          </Dbtr>
          <DbtrAcct>
            <Id>
              <IBAN>DE89350700644570000</IBAN>
            </Id>
          </DbtrAcct>
          <DbtrAgt>
            <FinInstnId>
              <BIC>TTTTDE48</BIC>
            </FinInstnId>
          </DbtrAgt>
          <UltmtDbtr>
            <Nm>Schneider</Nm>
          </UltmtDbtr>
        </OrgnlMndt>
      </OrgnlMndt>
    </UndrlygCxlDtls>
  </MndtCxlReq>
```

Business Example 3

Narrative

Debtor Stevens sends a MandateCancellationRequest message to his account servicer BBBBUS19 to cancel the existing mandate, identification number 88456, with creditor Williams for the reason that the delivered goods do no match the purchase order.
BBBBUS19 forwards the MandateCancellationRequest message to the account services of the creditor, DDDDUS56.

Business Description

MandateCancellationRequest message from Stevens to BBBBUS19.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	3455698
CreationDateTime	<CredDtTm>	2008-12-19T12:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Stevens
UnderlyingCancellationDetails	**<UndrlygClxDtls>**	
CancellationReason	<ClxRsn>	
Reason	<Rsn>	
Code	<Cd>	NARR
AdditionalInformation	<AddtlInf>	Delivery is not as agreed in purchase order 44558/06
OriginalMandate	<OrgnlMndt>	
OriginalMandateIdentification	<OrgnlMndtId>	88456

XML Instance

```
<MndtCxlReq>
    <GrpHdr>
      <MsgId>3455698</MsgId>
      <CreDtTm>2008-12-19T12:25:00</CreDtTm>
      <InitgPty>
        <Nm>Stevens</Nm>
      </InitgPty>
    </GrpHdr>
    <UndrlygCxlDtls>
      <CxlRsn>
        <Rsn>
          <Cd>NARR</Cd>
        </Rsn>
        <AddtlInf>Delivery is not as agreed in purchase order 44558/06</AddtlInf>
      </CxlRsn>
      <OrgnlMndt>
        <OrgnlMndtId>88456</OrgnlMndtId>
      </OrgnlMndt>
    </UndrlygCxlDtls>
```

```
</MndtCxlReq>
```

pain.012.001.01 MandateAcceptanceReportV01

Message Functionality

Scope

The MandateAcceptanceReport message is sent from the agent of the receiver (debtor or creditor) of the MandateRequest message (initiation, amendment or cancellation) to the agent of the initiator of the MandateRequest message (debtor or creditor).
A MandateAcceptanceReport message is used to confirm the acceptance or rejection of a MandateRequest message.
Where acceptance is part of the full process flow, a MandateRequest message only becomes valid after a confirmation of acceptance is received through a MandateAcceptanceReport message from the agent of the receiver.

Usage

The MandateAcceptanceReport message can contain only one confirmation of acceptance of rejection of one specific MandateRequest message.
The messages can be exchanged between debtor agent and creditor agent and between debtor agent and debtor and creditor agent and creditor.
The MandateAcceptanceReport message can be used in domestic and cross-border scenarios.

Outline

The MandateAcceptanceReport message is composed of 2 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime, Authorisation.

B. Underlying Acceptance Details

This building block is mandatory and present once. It contains elements that identify the MandateRequest message and mandate for which the MandateAcceptanceReport message holds the confirmation. These include, among others, OriginalMessageInformation, AcceptanceResult, OriginalMandate.

Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<MndtAccptncRpt>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.4	{Or	Code	<Cd>	[1..1]	Code	
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text	
1.6		InitiatingParty	<InitgPty>	[0..1]	+	
1.7		InstructingAgent	<InstgAgt>	[0..1]	+	
1.8		InstructedAgent	<InstdAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		UnderlyingAcceptanceDetails	<UndrlygAccptncDtls>	[1..1]		
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	+	
2.2		AcceptanceResult	<AccptncRslt>	[1..1]		
2.3		Accepted	<Accptd>	[1..1]	Indicator	
2.4		RejectReason	<RjctRsn>	[0..1]		
2.5	{Or	Code	<Cd>	[1..1]	Code	
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.7		AdditionalRejectReasonInformation	<AddtlRjctRsnInf>	[0..n]	Text	
2.8		OriginalMandate	<OrgnlMndt>	[1..1]		
2.9	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text	
2.10	Or}	OriginalMandate	<OrgnlMndt>	[1..1]	+	

Message Items Description

*The following section identifies the elements of the **MandateAcceptanceReportV01** message definition.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics to identify the message and parties playing a role in the mandate acceptance, but which are not part of the mandate.

Type: *The **GroupHeader** block is composed of the following **GroupHeader31** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	
1.6		InitiatingParty	<InitgPty>	[0..1]	+

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.7		InstructingAgent	<InstgAgt>	[0..1]	+
1.8		InstructedAgent	<InstdAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the instructed party, to unambiguously identify the message.
Usage: The instructing party has to make sure that MessageIdentification is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user key to be used to check the authority of the initiating party.

Usage: The content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios, payment initiations, payment returns or payment reversals that are initiated on behalf of a party different from the initiating party.

Type: *This message item is composed of one of the following **Authorisation1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.4	{Or	Code	<Cd>	[1..1]	Code
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

1.4 Code <Cd>

Presence: [1..1]

*This message item is part of choice **1.3 Authorisation**.*

Definition: Specifies the authorisation, in a coded form.

Data Type: Code

*One of the following **Authorisation1Code** values must be used:*

Code	Name	Definition
AUTH	PreAuthorisedFile	Indicates a file has been pre authorised or approved within the originating customer environment and no further approval is required.

Code	Name	Definition
FDET	FileLevelAuthorisationDetails	Indicates that a file requires additional file level approval, with the ability to view both the payment information block and supporting customer credit transaction detail.
FSUM	FileLevelAuthorisationSummary	Indicates that a file requires additional file level approval, with the ability to view only the payment information block level information.
ILEV	InstructionLevelAuthorisation	Indicates that a file requires all customer transactions to be authorised or approved.

1.5 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **1.3 Authorisation**.*
Definition: Specifies the authorisation, in a free text form.
Data Type: Max128Text
Format: maxLength: 128
minLength: 1

1.6 InitiatingParty <InitgPty>

Presence: [0..1]
Definition: Party that initiates the mandate message.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification32** p.203 in 'Message Item Types' section.*

1.7 InstructingAgent <InstgAgt>

Presence: [0..1]
Definition: Agent that instructs the next party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructing agent is the party sending the amendment and cancellation request message and not the party that sent the original mandate initiation request message.
In case of acceptance report message, the instructing agent is the party sending the acceptance report message and not the party that sent the original mandate request message.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification4** p.107 in 'Message Item Types' section.*

1.8 InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructed agent is the party receiving the amendment and cancellation request message and not the party that received the original mandate initiation request message.
In case of acceptance report message, the instructed agent is the party receiving the acceptance report message and not the party that received the original mandate request message.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification4** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification4** p.107 in 'Message Item Types' section.*

2.0 UnderlyingAcceptanceDetails <UndrlygAccptncDtls>

Presence: [1..1]

Definition: Set of elements used to provide information on the acception or rejection of the mandate request.

Type: *The **UnderlyingAcceptanceDetails** block is composed of the following **MandateAcceptance1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	+
2.2		AcceptanceResult	<AccptncRslt>	[1..1]	
2.8		OriginalMandate	<OrgnlMndt>	[1..1]	

2.1 OriginalMessageInformation <OrgnlMsgInf>

Presence: [0..1]

Definition: Set of elements used to provide information on the original messsage.

Type: *This message item is composed of the following **OriginalMessageInformation1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	MessageIdentification	<MsgId>	[1..1]	Text
	MessageNameIdentification	<MsgNmId>	[1..1]	Text
	CreationDateTime	<CreDtTm>	[0..1]	DateTime

*For additional Type information, please refer to **OriginalMessageInformation1** p.202 in 'Message Item Types' section.*

2.2 AcceptanceResult <AccptncRslt>

Presence: [1..1]
Definition: Set of elements used to provide detailed information on the acceptance result.
Type: *This message item is composed of the following **AcceptanceResult6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.3		Accepted	<Accptd>	[1..1]	Indicator
2.4		RejectReason	<RjctRsn>	[0..1]	
2.7		AdditionalRejectReasonInformation	<AddtlRjctRsnInf>	[0..n]	Text

2.3 Accepted <Accptd>

Presence: [1..1]
Definition: Indicates whether the mandate request was accepted or rejected.
Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

2.4 RejectReason <RjctRsn>

Presence: [0..1]
Definition: Specifies the reason for the rejection of a mandate request.
Type: *This message item is composed of one of the following **MandateReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.5	{Or	Code	<Cd>	[1..1]	Code
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text

2.5 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.4 RejectReason**.*
Definition: Reason, as published in an external reason code list.
Data Type: ExternalMandateReason1Code
Format: maxLength: 4
minLength: 1

2.6 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.4 RejectReason**.*
Definition: Reason, in a proprietary form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.7 AdditionalRejectReasonInformation <AddtlRjctRsnInf>

Presence: [0..n]
Definition: Further details on the reject reason.
Data Type: Max105Text
Format: maxLength: 105
minLength: 1

2.8 OriginalMandate <OrgnlMndt>

Presence: [1..1]
Definition: Set of elements used to provide the original mandate data.
Type: *This message item is composed of one of the following **OriginalMandate1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.9	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text
2.10	Or}	OriginalMandate	<OrgnlMndt>	[1..1]	+

2.9 OriginalMandateIdentification <OrgnlMndtId>

Presence: [1..1]
*This message item is part of choice **2.8 OriginalMandate**.*
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the original mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.10 OriginalMandate <OrgnlMndt>

Presence: [1..1]
*This message item is part of choice **2.8 OriginalMandate**.*
Definition: Set of elements used to provide the original mandate data.
Type: *This message item is composed of the following **MandateInformation1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	MandateIdentification	<MndtId>	[1..1]	Text
	MandateRequestIdentification	<MndtReqId>	[0..1]	Text
	Type	<Tp>	[0..1]	

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Occurrences	<Ocrncs>	[0..1]	
	CollectionAmount	<ColltnAmt>	[0..1]	Amount
	MaximumAmount	<MaxAmt>	[0..1]	Amount
	CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	
	Creditor	<Cdtr>	[1..1]	
	CreditorAccount	<CdtrAcct>	[0..1]	
	CreditorAgent	<CdtrAgt>	[0..1]	
	UltimateCreditor	<UltmtCdtr>	[0..1]	
	Debtor	<Dbtr>	[1..1]	
	DebtorAccount	<DbtrAcct>	[0..1]	
	DebtorAgent	<DbtrAgt>	[1..1]	
	UltimateDebtor	<UltmtDbtr>	[0..1]	
	ReferredDocument	<RfrdDoc>	[0..1]	

*For additional Type information, please refer to **MandateInformation1** p.117 in 'Message Item Types' section.*

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

Business Example 1

Narrative

On 19 December 2008, debtor Schmitt purchases goods from creditor GHF Electronics. Debtor Schmitt and creditor GHF Electronics agree that the purchased goods will be paid for via direct debit transactions in monthly payments. The number, assigned by GHF Electronics, with which this agreement is identified, is 09/172345.
Debtor Schmitt sends a MandateInitiationRequest message to its account servicer, AAAADE29. Creditor agent BBBBFR44 sends a MandateAcceptanceReport message to debtor agent BBBBFR44.
This MandateAcceptanceReport message holds the confirmation of the rejection of MandateInitiationRequest message with message identification 2233EFGHJK. The request can not be accepted as the debtor refused the MandateInitiationRequest message without any specific reason.

Business Description

MandateAcceptanceReport message from AAAADE29 to BBBBFR44.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	2345EFRTG
CreationDateTime	<CredDtTm>	2008-12-19T12:35:00
InstructingAgent	<InstgAgt>	
FinancialInstitutionIdentification	<FinInstnId>	

BIC	<BIC>	BBBBFR44
InstructedAgent	<InstdAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	AAAADE29
UnderlyingAcceptanceDetails	**<UndrlygAccptncDtls>**	
OriginalMessageInformation	<OrgnlMsgInf>	
MessageIdentification	<MsgId>	2233EFGHJK
MessageNameIdentification	<MsgNmId>	pain.009.001.01
CreationDateTime	<CreDtTm>	2008-12-19T12:25:00
AcceptanceResult	<AccptncRslt>	
Accepted	<Accptd>	FALSE
RejectReason	<RjctRsn>	
Code	<Cd>	MS02
OriginalMandate	<OrgnlMndt>	
OrignalMandateIdentification	<OrgnlMndtId>	09/172345

XML Instance

```
<MndtAccptncRpt>
    <GrpHdr>
      <MsgId>2345EFRTG</MsgId>
      <CreDtTm>2008-12-19T12:35:00</CreDtTm>
      <InstgAgt>
        <FinInstnId>
          <BIC>BBBBFR44</BIC>
        </FinInstnId>
      </InstgAgt>
      <InstdAgt>
        <FinInstnId>
          <BIC>AAAADE29</BIC>
        </FinInstnId>
      </InstdAgt>
    </GrpHdr>
    <UndrlygAccptncDtls>
      <OrgnlMsgInf>
        <MsgId>2233EFGHJK</MsgId>
        <MsgNmId>pain.009.001.01</MsgNmId>
        <CreDtTm>2008-12-19T12:25:00</CreDtTm>
      </OrgnlMsgInf>
      <AccptncRslt>
        <Accptd>false</Accptd>
        <RjctRsn>
          <Cd>MS02</Cd>
        </RjctRsn>
      </AccptncRslt>
      <OrgnlMndt>
```

```
            <OrgnlMndtId>09/172345</OrgnlMndtId>
          </OrgnlMndt>
        </UndrlygAccptncDtls>
      </MndtAccptncRpt>
```

Business Example 2

Narrative

On 9 June 2009, debtor Johnson purchases mobile phone services from creditor Jersey Mobile Phone. Debtor Johnson and creditor Jersey Mobile Phone agree that the services will be paid for via direct debit transactions in monthly payments for the amount calculated for a period of the past month, starting the first payment on 25 June 2009, from debtor account 5544732 at debtor agent FFFFUS91. It was agreed that the contract for these services would run until further notice. The mandate identification, assigned by creditor Jersey Mobile Phone is JMP06/3345. Debtor Johnson received a contractual agreement document on 11 June 2009 with reference number JMP/24653 which holds, among others, detailed information on the creditor account (76543) and the creditor agent (DDDDUS31).
Creditor Jersey Mobile Phone sends a MandateInitiationRequest message to its account servicer, DDDDUS31.
DDDDUS31 forwards the MandateInitiationRequest message to the account servicer of debtor Johnson, FFFFUS91.
Debtor Agent FFFFUS91 sends a MandateAcceptanceReport message to creditor agent DDDDUS31.
This MandateAcceptanceReport message holds the confirmation of the acceptance of the MandateInitiationRequest message with message identification BBBB654322.

Business Description

MandateAcceptanceReport message from FFFFUS91 to DDDDUS31.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	FF5678965
CreationDateTime	<CredDtTm>	2009-06-10T11:20:00
InstructingAgent	<InstgAgt>	
FinancialInstitutionsIdentification	<FinInstnId	
BIC	<BIC>	FFFFUS91
InstructedAgent	<InstdAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BIC	<BIC>	DDDDUS31
UnderlyingAcceptanceDetails	**<UndrlygAccptncDtls>**	
OriginalMessageInformation	<OrgnlMsgInf>	
MessageIdentification	<MsgId>	BBBB654322
MessageNameIdentification	<MsgNmId>	pain.009.001.01
CreationDateTime	<CredDtTm>	2009-06-10T11:00:00
AcceptanceResult	<AccptncRslt>	
Accepted	<Accptd>	TRUE
OriginalMandate	<OrgnlMndt>	
OriginalMandate	<OrgnlMndt>	
MandateIdentification	<MndtId>	JMP06/3345

Occurences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR
Frequency	<Frqcy>	MNTH
FirstCollectionDate	<FrstColltnDt>	2009-06-25
Creditor	<Cdtr>	
Name	<Nm>	Jersey Mobile Phone
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	76543
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
Identification	<Id>	
BIC	<BIC>	DDDDUS31
Debtor	<Dbtr>	
Name	<Nm>	Johnson
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	5544732
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstId>	
BIC	<BIC>	FFFFUS91
ReferredDocument	<RfrdDoc>	
Type	<Tp>	
CodeOrProprietary	<CdOrPrtry>	
Code	<Cd>	CMCN
Number	<Nb>	JMP/24653
RelatedDate	<RltdDt>	2009-06-11

XML Instance

```
<MndtAccptncRpt>
    <GrpHdr>
      <MsgId>FF5678965</MsgId>
      <CreDtTm>2009-06-10T11:20:00</CreDtTm>
      <InstgAgt>
        <FinInstnId>
          <BIC>FFFFUS91</BIC>
        </FinInstnId>
      </InstgAgt>
```

```
      <InstdAgt>
        <FinInstnId>
          <BIC>DDDDUS31</BIC>
        </FinInstnId>
      </InstdAgt>
    </GrpHdr>
    <UndrlygAccptncDtls>
      <OrgnlMsgInf>
        <MsgId>BBBB654322</MsgId>
        <MsgNmId>pain.009.001.01</MsgNmId>
        <CreDtTm>2009-06-10T11:00:00</CreDtTm>
      </OrgnlMsgInf>
      <AccptncRslt>
        <Accptd>true</Accptd>
      </AccptncRslt>
      <OrgnlMndt>
        <OrgnlMndt>
          <MndtId>JMP06/3345</MndtId>
          <Ocrncs>
            <SeqTp>RCUR</SeqTp>
            <Frqcy>MNTH</Frqcy>
            <FrstColltnDt>2009-06-25</FrstColltnDt>
          </Ocrncs>
          <Cdtr>
            <Nm>Jersey Mobile Phone</Nm>
          </Cdtr>
          <CdtrAcct>
            <Id>
              <Othr>
                <Id>76543</Id>
              </Othr>
            </Id>
          </CdtrAcct>
          <CdtrAgt>
            <FinInstnId>
              <BIC>DDDDUS31</BIC>
            </FinInstnId>
          </CdtrAgt>
          <Dbtr>
            <Nm>Johnson</Nm>
          </Dbtr>
          <DbtrAcct>
            <Id>
              <Othr>
                <Id>5544732</Id>
              </Othr>
            </Id>
          </DbtrAcct>
          <DbtrAgt>
            <FinInstnId>
              <BIC>FFFFUS91</BIC>
            </FinInstnId>
```

```
            </DbtrAgt>
            <RfrdDoc>
              <Tp>
                <CdOrPrtry>
                  <Cd>CMCN</Cd>
                </CdOrPrtry>
              </Tp>
              <Nb>JMP/24653</Nb>
              <RltdDt>2009-06-11</RltdDt>
            </RfrdDoc>
          </OrgnlMndt>
        </OrgnlMndt>
      </UndrlygAccptncDtls>
    </MndtAccptncRpt>
```

Business Example 3

Narrative

Debtor Johnson has a contract with creditor Jersey Mobile for the purchase of mobile phone services. It was agreed that the contract would run until further notice. Debtor Johnson wants to end the contract and has sent a MandateCancellationRequest message to its account servicer, FFFFUS91.
Debtor Agent FFFFUS91 forwards the MandateCancellationRequest message to the account servicer of the creditor, DDDDUS31. The outstanding mandate holds the details for the monthly payments for the amount calculated for a period of the past month, starting the first payment on 25 June 2009, from debtor account 5544732. The mandate identification, assigned by creditor Jersey Mobile Phone is JMP06/3345. Debtor Johnson received a contractual agreement document on 11 June 2009 with reference number JMP/24653 which holds, among others, detailed information on the creditor account (76543) and creditor agent (DDDDUS31).
Debtor agent FFFFUS91 received a MandateAcceptanceReport message from creditor agent DDDDUS31 and forwards the message to debtor Johnson.
This MandateAcceptanceReport message holds the confirmation of the acceptance of MandateCancellationRequest message with message identification CCCR27896.

Business Description

MandateAcceptanceReport message from FFFFUS91 to Debtor Johnson.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	AAAAR78965
CreationDateTime	<CredDtTm>	2008-09-10T11:20:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Jersey Mobile Phone
UnderlyingAcceptanceDetails	**<UndrlygAccptncDtls>**	
OriginalMessageInformation	<OrgnlMsgInf>	
MessageIdentification	<MsgId>	CCCR27896
MessageNameIdentification	<MsgNmId>	pain.011.001.01
CreationDateTime	<CredDtTm>	2009-06-10T11:00:00
AcceptanceResult	<AccptncRslt>	

Accepted	<Accptd>	TRUE
OriginalMandate	<OrgnlMndt>	
OriginalMandate	<OrgnlMndt>	
MandateIdentification	<MndtId>	JMP06/3345
Occurences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR
Frequency	<Frqcy>	MNTH
FirstCollectionDate	<FrstColltnDt>	2009-06-25
Creditor	<Cdtr>	
Name	<Nm>	Jersey Mobile Phone
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	76543
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
Identification	<Id>	
BIC	<BIC>	DDDDUS31
Debtor	<Dbtr>	
Name	<Nm>	Johnson
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	5544732
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstId>	
BIC	<BIC>	FFFFUS91
ReferredDocument	<RfrdDoc>	
Type	<Tp>	
CodeOrProprietary	<CdOrPrtry>	
Code	<Cd>	CMCN
Number	<Nb>	JMP/24653
RelatedDate	<RltdDt>	2009-06-11

XML Instance

```
<MndtAccptncRpt>
    <GrpHdr>
      <MsgId>AAAR78965</MsgId>
```

```
      <CreDtTm>2009-09-10T11:20:00</CreDtTm>
      <InitgPty>
        <Nm>Jersey Mobile Phone</Nm>
      </InitgPty>
    </GrpHdr>
    <UndrlygAccptncDtls>
      <OrgnlMsgInf>
        <MsgId>CCCR27896</MsgId>
        <MsgNmId>pain.011.001.01</MsgNmId>
        <CreDtTm>2009-06-10T11:00:00</CreDtTm>
      </OrgnlMsgInf>
      <AccptncRslt>
        <Accptd>true</Accptd>
      </AccptncRslt>
      <OrgnlMndt>
        <OrgnlMndt>
          <MndtId>JMP06/3345</MndtId>
          <Ocrncs>
            <SeqTp>RCUR</SeqTp>
            <Frqcy>MNTH</Frqcy>
            <FrstColltnDt>2009-06-25</FrstColltnDt>
          </Ocrncs>
          <Cdtr>
            <Nm>Jersey Mobile Phone</Nm>
          </Cdtr>
          <CdtrAcct>
            <Id>
              <Othr>
                <Id>76543</Id>
              </Othr>
            </Id>
          </CdtrAcct>
          <CdtrAgt>
            <FinInstnId>
              <BIC>DDDDUS31</BIC>
            </FinInstnId>
          </CdtrAgt>
          <Dbtr>
            <Nm>Johnson</Nm>
          </Dbtr>
          <DbtrAcct>
            <Id>
              <Othr>
                <Id>5544732</Id>
              </Othr>
            </Id>
          </DbtrAcct>
          <DbtrAgt>
            <FinInstnId>
              <BIC>FFFFUS91</BIC>
            </FinInstnId>
          </DbtrAgt>
```

```
            <RfrdDoc>
               <Tp>
                  <CdOrPrtry>
                     <Cd>CMCN</Cd>
                  </CdOrPrtry>
               </Tp>
               <Nb>JMP/24653</Nb>
               <RltdDt>2009-06-11</RltdDt>
            </RfrdDoc>
         </OrgnlMndt>
      </OrgnlMndt>
   </UndrlygAccptncDtls>
</MndtAccptncRpt>
```

Message Item Types

Data Types

Data Types Index

1 Amount

1.1 ActiveCurrencyAndAmount
1.2 ActiveOrHistoricCurrencyAndAmount
1.3 CurrencyAndAmount
1.4 ImpliedCurrencyAndAmount

2 Date Time

2.1 ISODate
2.2 ISODateTime
2.3 ISOTime

3 Identifier

3.1 ActiveCurrencyCode
3.2 ActiveOrHistoricCurrencyCode
3.3 AnyBICIdentifier
3.4 BBANIdentifier
3.5 BEIIdentifier
3.6 BICIdentifier
3.7 CHIPSUniversalIdentifier
3.8 CountryCode
3.9 CurrencyCode
3.10 DunsIdentifier
3.11 EANGLNIdentifier
3.12 ExternalAccountIdentification1Code
3.13 ExternalClearingSystemIdentification1Code
3.14 ExternalCode
3.15 ExternalFinancialInstitutionIdentification1Code
3.16 ExternalLocalInstrument1Code
3.17 ExternalMandateReason1Code
3.18 ExternalOrganisationIdentification1Code
3.19 ExternalPersonIdentification1Code
3.20 ExternalServiceLevel1Code
3.21 IBAN2007Identifier
3.22 IBANIdentifier
3.23 IBEIIdentifier
3.24 LanguageCode
3.25 MICIdentifier
3.26 NationalityCode
3.27 UPICIdentifier

4 Quantity: Number and Decimal Number

4.1 DecimalNumber

5 Rate

5.1 PercentageRate

6 Text

6.1 Max1025Text
6.2 Max105Text
6.3 Max128Text
6.4 Max140Text
6.5 Max15NumericText
6.6 Max16Text
6.7 Max2048Text
6.8 Max256Text
6.9 Max34Text
6.10 Max350Text
6.11 Max35Text
6.12 Max70Text
6.13 PhoneNumber

Data Types Description

1 Amount

1.1 ActiveCurrencyAndAmount

Definition:	A number of monetary units specified in an active currency where the unit of currency is explicit and compliant with ISO 4217.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***ActiveCurrencyCode****.*
Format:	**ActiveCurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **ActiveCurrencyCode** [A-Z]{3,3}
Rule(s):	**ActiveCurrencyAndAmount** CurrencyAmount The number of fractional digits (or minor unit of currency) must comply with ISO 4217. Note: The decimal separator is a dot. **ActiveCurrencyCode** ActiveCurrency The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.
Example:	6545.56 (Ccy='USD')

1.2 ActiveOrHistoricCurrencyAndAmount

Definition:	A number of monetary units specified in an active or a historic currency where the unit of currency is explicit and compliant with ISO 4217.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***ActiveOrHistoricCurrencyCode****.*
Format:	**ActiveOrHistoricCurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **ActiveOrHistoricCurrencyCode** [A-Z]{3,3}
Rule(s):	**ActiveOrHistoricCurrencyAndAmount** CurrencyAmount The number of fractional digits (or minor unit of currency) must comply with ISO 4217. Note: The decimal separator is a dot. **ActiveOrHistoricCurrencyCode** ActiveOrHistoricCurrency The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.
Example:	6284534 (Ccy='EUR')

1.3 CurrencyAndAmount

Definition:	Number of monetary units specified in a currency, where the unit of currency is explicit and compliant with ISO 4217. The decimal separator is a dot. Note: A zero amount is considered a positive amount.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***CurrencyCode****.*
Format:	**CurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **CurrencyCode** [A-Z]{3,3}
Rule(s):	**CurrencyCode** ValidationByTable
Example:	100000 (Ccy='EUR')

1.4 ImpliedCurrencyAndAmount

Definition:	Number of monetary units specified in a currency where the unit of currency is implied by the context and compliant with ISO 4217. The decimal separator is a dot. Note: a zero amount is considered a positive amount.
Format:	fractionDigits: 5 minInclusive: 0

	totalDigits: 18
Example:	500000

2 Date Time

2.1 ISODate

Definition:	A particular point in the progression of time in a calendar year expressed in the YYYY-MM-DD format. This representation is defined in "XML Schema Part 2: Datatypes Second Edition - W3C Recommendation 28 October 2004" which is aligned with ISO 8601.
Example:	2002-02-25

2.2 ISODateTime

Definition:	A particular point in the progression of time defined by a mandatory date and a mandatory time component, expressed in either UTC time format (YYYY-MM-DDThh:mm:ss.sssZ), local time with UTC offset format (YYYY-MM-DDThh:mm:ss.sss+/-hh:mm), or local time format (YYYY-MM-DDThh:mm:ss.sss). These representations are defined in "XML Schema Part 2: Datatypes Second Edition - W3C Recommendation 28 October 2004" which is aligned with ISO 8601. Note on the time format: 1) beginning / end of calendar day 00:00:00 = the beginning of a calendar day 24:00:00 = the end of a calendar day 2) fractions of second in time format Decimal fractions of seconds may be included. In this case, the involved parties shall agree on the maximum number of digits that are allowed.
Example:	2002-07-21T08:35:30

2.3 ISOTime

Definition:	A particular point in the progression of time in a calendar day expressed in either UTC time format (hh:mm:ss.sssZ), local time with UTC offset format (hh:mm:ss.sss+/-hh:mm), or local time format (hh:mm:ss.sss). These representations are defined in "XML Schema Part 2: Datatypes Second Edition - W3C Recommendation 28 October 2004" which is aligned with ISO 8601. Note on the time format: 1) beginning / end of calendar day 00:00:00 = the beginning of a calendar day 24:00:00 = the end of a calendar day 2) fractions of second in time format Decimal fractions of seconds may be included. In this case, the involved parties shall agree on the maximum number of digits that are allowed.
Example:	16:34:44

3 Identifier

3.1 ActiveCurrencyCode

Definition:	A code allocated to a currency by a Maintenance Agency under an international identification scheme as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds".

Format:	[A-Z]{3,3}
Rule(s):	ActiveCurrency The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.
Example:	EUR

3.2 ActiveOrHistoricCurrencyCode

Definition:	A code allocated to a currency by a Maintenance Agency under an international identification scheme, as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds".
Format:	[A-Z]{3,3}
Rule(s):	ActiveOrHistoricCurrency The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.
Example:	USD

3.3 AnyBICIdentifier

Definition:	A code allocated to a business entity or to a financial institution by a Registration Authority under an international identification scheme, as described in the latest edition of the international standard ISO 9362 "Banking - Banking telecommunication messages - Bank identifier codes".
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	AnyBIC Only a valid BIC or BEI is allowed. Valid BEI and BIC are registered with the ISO 9362 Registration Authority, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.
Example:	CHASUS33

3.4 BBANIdentifier

Definition:	Basic Bank Account Number (BBAN). Identifier used nationally by financial institutions, ie, in individual countries, generally as part of a National Account Numbering Scheme(s), which uniquely identifies the account of a customer.
Format:	[a-zA-Z0-9]{1,30}
Example:	BARC12345612345678

3.5 BEIIdentifier

Definition:	Business Entity Identifier. Code allocated to non-financial institutions by the ISO 9362 Registration Authority. The Business Entity Identifier (BEI) has the same format as the BIC code (8 up to 11 characters) as stipulated in the standard ISO 9362 Banking (Banking Telecommunication Messages, Bank Identifier Codes, BIC).
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BEI Only Business Entity Identifiers registered with the ISO 9362 Registration Authority and consisting of 8 or 11 contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE, are valid BEIs.
Example:	USINFRPP

3.6 BICIdentifier

Definition:	Bank Identifier Code. code allocated to a financial institution by a Registration Authority under an international identification scheme, as described in the latest edition of the international standard ISO 9362 "Banking - Banking telecommunication messages - Bank identifier codes".
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BIC Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.
Example:	CHASUS33

3.7 CHIPSUniversalIdentifier

Definition:	(United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID). Identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.
Format:	CH[0-9]{6,6}
Example:	CH123456

3.8 CountryCode

Definition:	Code to identify a country, a dependency, or another area of particular geopolitical interest, on the basis of country names obtained from the United Nations (ISO 3166, Alpha-2 code).
Format:	[A-Z]{2,2}
Rule(s):	Country The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

Example:	BE

3.9 CurrencyCode

Definition:	Code allocated to a currency, by a maintenance agency, under an international identification scheme as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds". Valid currency codes are registered with the ISO 4217 Maintenance Agency, and consist of three contiguous letters.
Format:	[A-Z]{3,3}
Rule(s):	ValidationByTable
Example:	AWG

3.10 DunsIdentifier

Definition:	Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.
Format:	[0-9]{9,9}
Example:	578942538

3.11 EANGLNIdentifier

Definition:	Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve the detailed information linked to it.
Format:	[0-9]{13,13}
Example:	7265658971233

3.12 ExternalAccountIdentification1Code

Definition:	Specifies the external account identification scheme name code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	BBAN

3.13 ExternalClearingSystemIdentification1Code

Definition:	Specifies the clearing system identification code, as published in an external clearing system identification code list.
Format:	maxLength: 5 minLength: 1
Example:	AUBSB

3.14 ExternalCode

Definition:	Specifies an external code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 35 minLength: 1
Example:	External Code 1

3.15 ExternalFinancialInstitutionIdentification1Code

Definition:	Specifies the external financial institution identification scheme name code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	EXC1

3.16 ExternalLocalInstrument1Code

Definition:	Specifies the external local instrument code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 35 minLength: 1
Example:	LOC1

3.17 ExternalMandateReason1Code

Definition:	Specifies the external mandate processing reason code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	AGNT

3.18 ExternalOrganisationIdentification1Code

Definition:	Specifies the external organisation identification scheme name code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	CUST

3.19 ExternalPersonIdentification1Code

Definition:	Specifies the external person identification scheme name code in the format of character string with a maximum length of 4 characters.

	The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	ARNU

3.20 ExternalServiceLevel1Code

Definition:	Specifies the external service level code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	SEPA

3.21 IBAN2007Identifier

Definition:	An identifier used internationally by financial institutions to uniquely identify the account of a customer at a financial institution, as described in the latest edition of the international standard ISO 13616:2007 - "Banking and related financial services - International Bank Account Number (IBAN)".
Format:	[A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
Rule(s):	IBAN A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.
Example:	AT611904300234573201

3.22 IBANIdentifier

Definition:	An identifier used internationally by financial institutions to uniquely identify the account of a customer at a financial institution, as described in the latest edition of the international standard ISO 13616. "Banking and related financial services - International Bank Account Number (IBAN)".
Format:	[a-zA-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
Rule(s):	IBAN A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.
Example:	AT611904300234573201

3.23 IBEIIdentifier

Definition:	International Business Entity Identifier to uniquely identify business entities playing a role in the lifecycle of and events related to a financial instrument. (tentative - to be confirmed).
Format:	[A-Z]{2,2}[B-DF-HJ-NP-TV-XZ0-9]{7,7}[0-9]{1,1}
Example:	DEXBC823N0

3.24 LanguageCode

Definition:	Specifies a language.
Rule(s):	ValidationByTable
Example:	ENG

3.25 MICIdentifier

Definition:	Market Identifier Code. The identification of a financial market, as stipulated in the norm ISO 10383 'Codes for exchanges and market identifications'.
Format:	[A-Z0-9]{4,4}
Example:	XTKS

3.26 NationalityCode

Definition:	Specifies the country where a person was born or is naturalised.
Rule(s):	ValidationByTable
Example:	US

3.27 UPICIdentifier

Definition:	Universal Payment Identification Code (UPIC). Identifier used by the New York Clearing House to mask confidential data, such as bank accounts and bank routing numbers. UPIC numbers remain with business customers, regardless of banking relationship changes.
Format:	[0-9]{8,17}
Example:	12345678

4 Quantity: Number and Decimal Number

4.1 DecimalNumber

Definition:	Number of objects represented as a decimal number, eg, 0.75 or 45.6.
Format:	fractionDigits: 17 totalDigits: 18
Example:	123456789.123456789

5 Rate

5.1 PercentageRate

Definition:	Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Format:	fractionDigits: 10 totalDigits: 11
Example:	35

6 Text

6.1 Max1025Text

Definition:	Specifies a character string with a maximum length of 1025 characters.
Format:	maxLength: 1025 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789

6.2 Max105Text

Definition:	Specifies a character string with a maximum length of 105 characters.
Format:	maxLength: 105 minLength: 1
Example:	azefgvgldfpgtvcvlmgovl;v ; :B;lgkdfwxcvljfqsifj

6.3 Max128Text

Definition:	Specifies a character string with a maximum length of 128 characters.
Format:	maxLength: 128 minLength: 1
Example:	A string value of maximum 128 characters.

6.4 Max140Text

Definition:	Specifies a character string with a maximum length of 140 characters.
Format:	maxLength: 140 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.5 Max15NumericText

Definition:	Specifies a numeric string with a maximum length of 15 digits.
Format:	[0-9]{1,15}
Example:	458793625148975

6.6 Max16Text

Definition:	Specifies a character string with a maximum length of 16 characters.
Format:	maxLength: 16 minLength: 1
Example:	ABCdEFghIJKLMNO?

6.7 Max2048Text

Definition:	Specifies a character string with a maximum length of 2048 characters.
Format:	maxLength: 2048

	minLength: 1
Example:	Sample1

6.8 Max256Text

Definition:	Specifies a character string with a maximum length of 256 characters.
Format:	maxLength: 256 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.9 Max34Text

Definition:	Specifies a character string with a maximum length of 34 characters.
Format:	maxLength: 34 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234

6.10 Max350Text

Definition:	Specifies a character string with a maximum length of 350 characters.
Format:	maxLength: 350 minLength: 1
Example:	1234567890

6.11 Max35Text

Definition:	Specifies a character string with a maximum length of 35 characters.
Format:	maxLength: 35 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST123456789012345

6.12 Max70Text

Definition:	Specifies a character string with a maximum length of 70characters.
Format:	maxLength: 70 minLength: 1
Example:	A string value of maximum 70 characters.

6.13 PhoneNumber

Definition:	The collection of information which identifies a specific phone or FAX number as defined by telecom services.

	It consists of a "+" followed by the country code (from 1 to 3 characters) then a "-" and finally, any combination of numbers, "(", ")", "+" and "-" (up to 30 characters).
Format:	\+[0-9]{1,3}-[0-9()+\-]{1,30}
Example:	+1-(465)432-123

End Points

End Points Index

1 Account

1.1 CashAccount16

2 Date period

2.1 DatePeriodDetails1

3 Financial institution identification

3.1 BranchAndFinancialInstitutionIdentification4

4 Mandate

4.1 MandateInformation1

5 Miscellaneous

5.1 OriginalMessageInformation1

6 Party identification

6.1 PartyIdentification32

End Points Description

1 Account

1.1 CashAccount16

CashAccount16 *is used in message definition* ***MandateAmendmentRequestV01*** *p.34, p.34, message definition* ***MandateInitiationRequestV01*** *p.9, p.9.*

Definition: Set of elements used to identify an account.

Type: *The following* ***CashAccount16*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.0		Identification	<Id>	[1..1]	
1.1.1	{Or	IBAN	<IBAN>	[1..1]	Identifier
1.1.2	Or}	Other	<Othr>	[1..1]	
1.1.3		Identification	<Id>	[1..1]	Text
1.1.4		SchemeName	<SchmeNm>	[0..1]	
1.1.5	{{Or	Code	<Cd>	[1..1]	Code

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.6	Or}}	Proprietary	<Prtry>	[1..1]	Text
1.1.7		Issuer	<Issr>	[0..1]	Text
1.1.8		Type	<Tp>	[0..1]	
1.1.9	{Or	Code	<Cd>	[1..1]	Code
1.1.10	Or}	Proprietary	<Prtry>	[1..1]	Text
1.1.11		Currency	<Ccy>	[0..1]	Code
1.1.12		Name	<Nm>	[0..1]	Text

1.1.0 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following* ***AccountIdentification4Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.1	{Or	IBAN	<IBAN>	[1..1]	Identifier
1.1.2	Or}	Other	<Othr>	[1..1]	

1.1.1 IBAN <IBAN>

Presence: [1..1]
This message item is part of choice ***1.1.0 Identification****.*
Definition: International Bank Account Number (IBAN) - identifier used internationally by financial institutions to uniquely identify the account of a customer. Further specifications of the format and content of the IBAN can be found in the standard ISO 13616 "Banking and related financial services - International Bank Account Number (IBAN)" version 1997-10-01, or later revisions.
Data Type: IBAN2007Identifier
Format: [A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
Rule(s): IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

1.1.2 Other <Othr>

Presence: [1..1]
This message item is part of choice ***1.1.0 Identification****.*
Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.
Type: *This message item is composed of the following* ***GenericAccountIdentification1*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.3		Identification	<Id>	[1..1]	Text
1.1.4		SchemeName	<SchmeNm>	[0..1]	

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.7		Issuer	<Issr>	[0..1]	Text

1.1.3 Identification <Id>

Presence: [1..1]
Definition: Identification assigned by an institution.
Data Type: Max34Text
Format: maxLength: 34
minLength: 1

1.1.4 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme
Type: *This message item is composed of one of the following **AccountSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.5	{Or	Code	<Cd>	[1..1]	Code
1.1.6	Or}	Proprietary	<Prtry>	[1..1]	Text

1.1.5 Code <Cd>

Presence: [1..1]
*This message item is part of choice **1.1.4 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalAccountIdentification1Code
Format: maxLength: 4
minLength: 1

1.1.6 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **1.1.4 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.1.7 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.1.8 Type <Tp>

Presence: [0..1]
Definition: Specifies the nature, or use of the account.
Type: *This message item is composed of one of the following* ***CashAccountType2*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.9	{Or	Code	<Cd>	[1..1]	Code
1.1.10	Or}	Proprietary	<Prtry>	[1..1]	Text

1.1.9 Code <Cd>

Presence: [1..1]
This message item is part of choice ***1.1.8 Type****.*
Definition: Account type, in a coded form.
Data Type: Code
One of the following ***CashAccountType4Code*** *values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
CISH	CashIncome	Account used for payment of income if different from the current cash account.
COMM	Commission	Account used for commission if different from the account for payment.
LOAN	Loan	Account used for loans.
MGLD	MarginalLending	Account used for a marginal lending facility.
MOMA	MoneyMarket	Account used for money markets if different from the cash account.
NREX	NonResidentExternal	Account used for non-resident external.
ODFT	Overdraft	Account is used for overdrafts.
ONDP	OverNightDeposit	Account used for overnight deposits.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SLRY	Salary	Accounts used for salary payments.
SVGS	Savings	Account used for savings.
TAXE	Tax	Account used for taxes if different from the account for payment.

Code	Name	Definition
TRAS	CashTrading	Account used for trading if different from the current cash account.

1.1.10 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **1.1.8 Type**.*

Definition: Nature or use of the account in a proprietary form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.1.11 Currency <Ccy>

Presence: [0..1]

Definition: Identification of the currency in which the account is held.

Usage: Currency should only be used in case one and the same account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: ActiveOrHistoricCurrencyCode

Format: [A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

1.1.12 Name <Nm>

Presence: [0..1]

Definition: Name of the account, as assigned by the account servicing institution, in agreement with the account owner in order to provide an additional means of identification of the account.

Usage: The account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2 Date period

2.1 DatePeriodDetails1

***DatePeriodDetails1** is used in message definition **MandateAmendmentRequestV01** p.34, message definition **MandateInitiationRequestV01** p.9.*

Definition: Range of time defined by a start date and an end date.

Type: *The following **DatePeriodDetails1** element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.0		FromDate	<FrDt>	[1..1]	DateTime
2.1.1		ToDate	<ToDt>	[0..1]	DateTime

2.1.0 FromDate <FrDt>

Presence: [1..1]
Definition: Start date of the range.
Data Type: ISODate

2.1.1 ToDate <ToDt>

Presence: [0..1]
Definition: End date of the range.
Data Type: ISODate

3 Financial institution identification

3.1 BranchAndFinancialInstitutionIdentification4

BranchAndFinancialInstitutionIdentification4 *is used in message definition* ***MandateAcceptanceReportV01*** *p.75, p.75, message definition* ***MandateAmendmentRequestV01*** *p.33, p.33, p.34, p.34, message definition* ***MandateCancellationRequestV01*** *p.62, p.62, message definition* ***MandateInitiationRequestV01*** *p.9, p.9, p.9, p.9.*

Definition: Set of elements used to uniquely and unambiguously identify a financial institution or a branch of a financial institution.
Type: *The following* ***BranchAndFinancialInstitutionIdentification4*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.0		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
3.1.1		BIC	<BIC>	[0..1]	Identifier
3.1.2		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
3.1.3		ClearingSystemIdentification	<ClrSysId>	[0..1]	
3.1.4	{Or	Code	<Cd>	[1..1]	Code
3.1.5	Or}	Proprietary	<Prtry>	[1..1]	Text
3.1.6		MemberIdentification	<MmbId>	[1..1]	Text
3.1.7		Name	<Nm>	[0..1]	Text
3.1.8		PostalAddress	<PstlAdr>	[0..1]	
3.1.9		AddressType	<AdrTp>	[0..1]	Code
3.1.10		Department	<Dept>	[0..1]	Text
3.1.11		SubDepartment	<SubDept>	[0..1]	Text
3.1.12		StreetName	<StrtNm>	[0..1]	Text
3.1.13		BuildingNumber	<BldgNb>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.14		PostCode	<PstCd>	[0..1]	Text
3.1.15		TownName	<TwnNm>	[0..1]	Text
3.1.16		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.17		Country	<Ctry>	[0..1]	Code
3.1.18		AddressLine	<AdrLine>	[0..7]	Text
3.1.19		Other	<Othr>	[0..1]	
3.1.20		Identification	<Id>	[1..1]	Text
3.1.21		SchemeName	<SchmeNm>	[0..1]	
3.1.22	{Or	Code	<Cd>	[1..1]	Code
3.1.23	Or}	Proprietary	<Prtry>	[1..1]	Text
3.1.24		Issuer	<Issr>	[0..1]	Text
3.1.25		BranchIdentification	<BrnchId>	[0..1]	
3.1.26		Identification	<Id>	[0..1]	Text
3.1.27		Name	<Nm>	[0..1]	Text
3.1.28		PostalAddress	<PstlAdr>	[0..1]	
3.1.29		AddressType	<AdrTp>	[0..1]	Code
3.1.30		Department	<Dept>	[0..1]	Text
3.1.31		SubDepartment	<SubDept>	[0..1]	Text
3.1.32		StreetName	<StrtNm>	[0..1]	Text
3.1.33		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.34		PostCode	<PstCd>	[0..1]	Text
3.1.35		TownName	<TwnNm>	[0..1]	Text
3.1.36		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.37		Country	<Ctry>	[0..1]	Code
3.1.38		AddressLine	<AdrLine>	[0..7]	Text

3.1.0 FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *This message item is composed of the following **FinancialInstitutionIdentification7** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.1		BIC	<BIC>	[0..1]	Identifier
3.1.2		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
3.1.7		Name	<Nm>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.8		PostalAddress	<PstlAdr>	[0..1]	
3.1.19		Other	<Othr>	[0..1]	

3.1.1 BIC <BIC>

Presence: [0..1]

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

3.1.2 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [0..1]

Definition: Information used to identify a member within a clearing system.

Type: *This message item is composed of the following **ClearingSystemMemberIdentification2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.3		ClearingSystemIdentification	<ClrSysId>	[0..1]	
3.1.6		MemberIdentification	<MmbId>	[1..1]	Text

3.1.3 ClearingSystemIdentification <ClrSysId>

Presence: [0..1]

Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.

Type: *This message item is composed of one of the following **ClearingSystemIdentification2Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.4	{Or	Code	<Cd>	[1..1]	Code
3.1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

3.1.4 Code <Cd>

Presence: [1..1]

*This message item is part of choice **3.1.3 ClearingSystemIdentification**.*

Definition: Identification of a clearing system, in a coded form as published in an external list.

Data Type: ExternalClearingSystemIdentification1Code
Format: maxLength: 5
minLength: 1

3.1.5 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **3.1.3 ClearingSystemIdentification**.*
Definition: Identification code for a clearing system, that has not yet been identified in the list of clearing systems.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.6 MemberIdentification <MmbId>

Presence: [1..1]
Definition: Identification of a member of a clearing system.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.7 Name <Nm>

Presence: [0..1]
Definition: Name by which an agent is known and which is usually used to identify that agent.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.1.8 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.9		AddressType	<AdrTp>	[0..1]	Code
3.1.10		Department	<Dept>	[0..1]	Text
3.1.11		SubDepartment	<SubDept>	[0..1]	Text
3.1.12		StreetName	<StrtNm>	[0..1]	Text
3.1.13		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.14		PostCode	<PstCd>	[0..1]	Text
3.1.15		TownName	<TwnNm>	[0..1]	Text
3.1.16		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.17		Country	<Ctry>	[0..1]	Code
3.1.18		AddressLine	<AdrLine>	[0..7]	Text

3.1.9 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

3.1.10 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.11 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.12 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.13 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

3.1.14 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

3.1.15 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.16 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country such as state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.17 Country <Ctry>

Presence: [0..1]

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

3.1.18 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

3.1.19 Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Type: *This message item is composed of the following **GenericFinancialIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.20		Identification	<Id>	[1..1]	Text
3.1.21		SchemeName	<SchmeNm>	[0..1]	
3.1.24		Issuer	<Issr>	[0..1]	Text

3.1.20 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.21 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following* ***FinancialIdentificationSchemeName1Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.22	{Or	Code	<Cd>	[1..1]	Code
3.1.23	Or}	Proprietary	<Prtry>	[1..1]	Text

3.1.22 Code <Cd>

Presence: [1..1]
This message item is part of choice ***3.1.21 SchemeName****.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalFinancialInstitutionIdentification1Code
Format: maxLength: 4
minLength: 1

3.1.23 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***3.1.21 SchemeName****.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.24 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.25 BranchIdentification <BrnchId>

Presence: [0..1]
Definition: Identifies a specific branch of a financial institution.

Usage: This component should be used in case the identification information in the financial institution component does not provide identification up to branch level.

Type: *This message item is composed of the following **BranchData2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.26		Identification	<Id>	[0..1]	Text
3.1.27		Name	<Nm>	[0..1]	Text
3.1.28		PostalAddress	<PstlAdr>	[0..1]	

3.1.26 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a branch of a financial institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.27 Name <Nm>

Presence: [0..1]
Definition: Name by which an agent is known and which is usually used to identify that agent.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.1.28 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.29		AddressType	<AdrTp>	[0..1]	Code
3.1.30		Department	<Dept>	[0..1]	Text
3.1.31		SubDepartment	<SubDept>	[0..1]	Text
3.1.32		StreetName	<StrtNm>	[0..1]	Text
3.1.33		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.34		PostCode	<PstCd>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.35		TownName	<TwnNm>	[0..1]	Text
3.1.36		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.37		Country	<Ctry>	[0..1]	Code
3.1.38		AddressLine	<AdrLine>	[0..7]	Text

3.1.29 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

3.1.30 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.31 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.32 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.33 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

3.1.34 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

3.1.35 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.36 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.37 Country <Ctry>

Presence: [0..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

3.1.38 AddressLine <AdrLine>

Presence: [0..7]
Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.
Data Type: Max70Text
Format: maxLength: 70

minLength: 1

4 Mandate

4.1 MandateInformation1

MandateInformation1 *is used in message definition* ***MandateAcceptanceReportV01*** *p.75, message definition* ***MandateAmendmentRequestV01*** *p.34, message definition* ***MandateCancellationRequestV01*** *p.62.*

Definition: Information that serves as a basis to debit an account.

Type: *The following* ***MandateInformation1*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.0		MandateIdentification	<MndtId>	[1..1]	Text
4.1.1		MandateRequestIdentification	<MndtReqId>	[0..1]	Text
4.1.2		Type	<Tp>	[0..1]	
4.1.3		ServiceLevel	<SvcLvl>	[0..1]	
4.1.4	{Or	Code	<Cd>	[1..1]	Code
4.1.5	Or}	Proprietary	<Prtry>	[1..1]	Text
4.1.6		LocalInstrument	<LclInstrm>	[0..1]	
4.1.7	{Or	Code	<Cd>	[1..1]	Code
4.1.8	Or}	Proprietary	<Prtry>	[1..1]	Text
4.1.9		Occurrences	<Ocrncs>	[0..1]	
4.1.10		SequenceType	<SeqTp>	[1..1]	Code
4.1.11		Frequency	<Frqcy>	[0..1]	Code
4.1.12		Duration	<Drtn>	[0..1]	
4.1.13		FromDate	<FrDt>	[1..1]	DateTime
4.1.14		ToDate	<ToDt>	[0..1]	DateTime
4.1.15		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
4.1.16		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime
4.1.17		CollectionAmount	<ColltnAmt>	[0..1]	Amount
4.1.18		MaximumAmount	<MaxAmt>	[0..1]	Amount
4.1.19		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	
4.1.20		Name	<Nm>	[0..1]	Text
4.1.21		PostalAddress	<PstlAdr>	[0..1]	
4.1.22		AddressType	<AdrTp>	[0..1]	Code
4.1.23		Department	<Dept>	[0..1]	Text
4.1.24		SubDepartment	<SubDept>	[0..1]	Text
4.1.25		StreetName	<StrtNm>	[0..1]	Text
4.1.26		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.27		PostCode	<PstCd>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.28		TownName	<TwnNm>	[0..1]	Text
4.1.29		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.30		Country	<Ctry>	[0..1]	Code
4.1.31		AddressLine	<AdrLine>	[0..7]	Text
4.1.32		Identification	<Id>	[0..1]	
4.1.33	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.34		BICOrBEI	<BICOrBEI>	[0..1]	Identifier
4.1.35		Other	<Othr>	[0..n]	
4.1.36		Identification	<Id>	[1..1]	Text
4.1.37		SchemeName	<SchmeNm>	[0..1]	
4.1.38	{{Or	Code	<Cd>	[1..1]	Code
4.1.39	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.40		Issuer	<Issr>	[0..1]	Text
4.1.41	Or}	PrivateIdentification	<PrvtId>	[1..1]	
4.1.42		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.43		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.44		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.45		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.46		CountryOfBirth	<CtryOfBirth>	[1..1]	Code
4.1.47		Other	<Othr>	[0..n]	
4.1.48		Identification	<Id>	[1..1]	Text
4.1.49		SchemeName	<SchmeNm>	[0..1]	
4.1.50	{{Or	Code	<Cd>	[1..1]	Code
4.1.51	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.52		Issuer	<Issr>	[0..1]	Text
4.1.53		CountryOfResidence	<CtryOfRes>	[0..1]	Code
4.1.54		ContactDetails	<CtctDtls>	[0..1]	
4.1.55		NamePrefix	<NmPrfx>	[0..1]	Code
4.1.56		Name	<Nm>	[0..1]	Text
4.1.57		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.58		MobileNumber	<MobNb>	[0..1]	Text
4.1.59		FaxNumber	<FaxNb>	[0..1]	Text
4.1.60		EmailAddress	<EmailAdr>	[0..1]	Text
4.1.61		Other	<Othr>	[0..1]	Text
4.1.62		Creditor	<Cdtr>	[1..1]	
4.1.63		Name	<Nm>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.64		PostalAddress	<PstlAdr>	[0..1]	
4.1.65		AddressType	<AdrTp>	[0..1]	Code
4.1.66		Department	<Dept>	[0..1]	Text
4.1.67		SubDepartment	<SubDept>	[0..1]	Text
4.1.68		StreetName	<StrtNm>	[0..1]	Text
4.1.69		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.70		PostCode	<PstCd>	[0..1]	Text
4.1.71		TownName	<TwnNm>	[0..1]	Text
4.1.72		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.73		Country	<Ctry>	[0..1]	Code
4.1.74		AddressLine	<AdrLine>	[0..7]	Text
4.1.75		Identification	<Id>	[0..1]	
4.1.76	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.77		BICOrBEI	<BICOrBEI>	[0..1]	Identifier
4.1.78		Other	<Othr>	[0..n]	
4.1.79		Identification	<Id>	[1..1]	Text
4.1.80		SchemeName	<SchmeNm>	[0..1]	
4.1.81	{{Or	Code	<Cd>	[1..1]	Code
4.1.82	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.83		Issuer	<Issr>	[0..1]	Text
4.1.84	Or}	PrivateIdentification	<PrvtId>	[1..1]	
4.1.85		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.86		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.87		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.88		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.89		CountryOfBirth	<CtryOfBirth>	[1..1]	Code
4.1.90		Other	<Othr>	[0..n]	
4.1.91		Identification	<Id>	[1..1]	Text
4.1.92		SchemeName	<SchmeNm>	[0..1]	
4.1.93	{{Or	Code	<Cd>	[1..1]	Code
4.1.94	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.95		Issuer	<Issr>	[0..1]	Text
4.1.96		CountryOfResidence	<CtryOfRes>	[0..1]	Code
4.1.97		ContactDetails	<CtctDtls>	[0..1]	
4.1.98		NamePrefix	<NmPrfx>	[0..1]	Code
4.1.99		Name	<Nm>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.100		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.101		MobileNumber	<MobNb>	[0..1]	Text
4.1.102		FaxNumber	<FaxNb>	[0..1]	Text
4.1.103		EmailAddress	<EmailAdr>	[0..1]	Text
4.1.104		Other	<Othr>	[0..1]	Text
4.1.105		CreditorAccount	<CdtrAcct>	[0..1]	
4.1.106		Identification	<Id>	[1..1]	
4.1.107	{Or	IBAN	<IBAN>	[1..1]	Identifier
4.1.108	Or}	Other	<Othr>	[1..1]	
4.1.109		Identification	<Id>	[1..1]	Text
4.1.110		SchemeName	<SchmeNm>	[0..1]	
4.1.111	{{Or	Code	<Cd>	[1..1]	Code
4.1.112	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.113		Issuer	<Issr>	[0..1]	Text
4.1.114		Type	<Tp>	[0..1]	
4.1.115	{Or	Code	<Cd>	[1..1]	Code
4.1.116	Or}	Proprietary	<Prtry>	[1..1]	Text
4.1.117		Currency	<Ccy>	[0..1]	Code
4.1.118		Name	<Nm>	[0..1]	Text
4.1.119		CreditorAgent	<CdtrAgt>	[0..1]	
4.1.120		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
4.1.121		BIC	<BIC>	[0..1]	Identifier
4.1.122		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
4.1.123		ClearingSystemIdentification	<ClrSysId>	[0..1]	
4.1.124	{Or	Code	<Cd>	[1..1]	Code
4.1.125	Or}	Proprietary	<Prtry>	[1..1]	Text
4.1.126		MemberIdentification	<MmbId>	[1..1]	Text
4.1.127		Name	<Nm>	[0..1]	Text
4.1.128		PostalAddress	<PstlAdr>	[0..1]	
4.1.129		AddressType	<AdrTp>	[0..1]	Code
4.1.130		Department	<Dept>	[0..1]	Text
4.1.131		SubDepartment	<SubDept>	[0..1]	Text
4.1.132		StreetName	<StrtNm>	[0..1]	Text
4.1.133		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.134		PostCode	<PstCd>	[0..1]	Text
4.1.135		TownName	<TwnNm>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.136		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.137		Country	<Ctry>	[0..1]	Code
4.1.138		AddressLine	<AdrLine>	[0..7]	Text
4.1.139		Other	<Othr>	[0..1]	
4.1.140		Identification	<Id>	[1..1]	Text
4.1.141		SchemeName	<SchmeNm>	[0..1]	
4.1.142	{Or	Code	<Cd>	[1..1]	Code
4.1.143	Or}	Proprietary	<Prtry>	[1..1]	Text
4.1.144		Issuer	<Issr>	[0..1]	Text
4.1.145		BranchIdentification	<BrnchId>	[0..1]	
4.1.146		Identification	<Id>	[0..1]	Text
4.1.147		Name	<Nm>	[0..1]	Text
4.1.148		PostalAddress	<PstlAdr>	[0..1]	
4.1.149		AddressType	<AdrTp>	[0..1]	Code
4.1.150		Department	<Dept>	[0..1]	Text
4.1.151		SubDepartment	<SubDept>	[0..1]	Text
4.1.152		StreetName	<StrtNm>	[0..1]	Text
4.1.153		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.154		PostCode	<PstCd>	[0..1]	Text
4.1.155		TownName	<TwnNm>	[0..1]	Text
4.1.156		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.157		Country	<Ctry>	[0..1]	Code
4.1.158		AddressLine	<AdrLine>	[0..7]	Text
4.1.159		UltimateCreditor	<UltmtCdtr>	[0..1]	
4.1.160		Name	<Nm>	[0..1]	Text
4.1.161		PostalAddress	<PstlAdr>	[0..1]	
4.1.162		AddressType	<AdrTp>	[0..1]	Code
4.1.163		Department	<Dept>	[0..1]	Text
4.1.164		SubDepartment	<SubDept>	[0..1]	Text
4.1.165		StreetName	<StrtNm>	[0..1]	Text
4.1.166		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.167		PostCode	<PstCd>	[0..1]	Text
4.1.168		TownName	<TwnNm>	[0..1]	Text
4.1.169		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.170		Country	<Ctry>	[0..1]	Code
4.1.171		AddressLine	<AdrLine>	[0..7]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.172		Identification	<Id>	[0..1]	
4.1.173	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.174		BICOrBEI	<BICOrBEI>	[0..1]	Identifier
4.1.175		Other	<Othr>	[0..n]	
4.1.176		Identification	<Id>	[1..1]	Text
4.1.177		SchemeName	<SchmeNm>	[0..1]	
4.1.178	{{Or	Code	<Cd>	[1..1]	Code
4.1.179	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.180		Issuer	<Issr>	[0..1]	Text
4.1.181	Or}	PrivateIdentification	<PrvtId>	[1..1]	
4.1.182		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.183		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.184		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.185		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.186		CountryOfBirth	<CtryOfBirth>	[1..1]	Code
4.1.187		Other	<Othr>	[0..n]	
4.1.188		Identification	<Id>	[1..1]	Text
4.1.189		SchemeName	<SchmeNm>	[0..1]	
4.1.190	{{Or	Code	<Cd>	[1..1]	Code
4.1.191	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.192		Issuer	<Issr>	[0..1]	Text
4.1.193		CountryOfResidence	<CtryOfRes>	[0..1]	Code
4.1.194		ContactDetails	<CtctDtls>	[0..1]	
4.1.195		NamePrefix	<NmPrfx>	[0..1]	Code
4.1.196		Name	<Nm>	[0..1]	Text
4.1.197		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.198		MobileNumber	<MobNb>	[0..1]	Text
4.1.199		FaxNumber	<FaxNb>	[0..1]	Text
4.1.200		EmailAddress	<EmailAdr>	[0..1]	Text
4.1.201		Other	<Othr>	[0..1]	Text
4.1.202		Debtor	<Dbtr>	[1..1]	
4.1.203		Name	<Nm>	[0..1]	Text
4.1.204		PostalAddress	<PstlAdr>	[0..1]	
4.1.205		AddressType	<AdrTp>	[0..1]	Code
4.1.206		Department	<Dept>	[0..1]	Text
4.1.207		SubDepartment	<SubDept>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.208		StreetName	<StrtNm>	[0..1]	Text
4.1.209		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.210		PostCode	<PstCd>	[0..1]	Text
4.1.211		TownName	<TwnNm>	[0..1]	Text
4.1.212		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.213		Country	<Ctry>	[0..1]	Code
4.1.214		AddressLine	<AdrLine>	[0..7]	Text
4.1.215		Identification	<Id>	[0..1]	
4.1.216	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.217		BICOrBEI	<BICOrBEI>	[0..1]	Identifier
4.1.218		Other	<Othr>	[0..n]	
4.1.219		Identification	<Id>	[1..1]	Text
4.1.220		SchemeName	<SchmeNm>	[0..1]	
4.1.221	{{Or	Code	<Cd>	[1..1]	Code
4.1.222	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.223		Issuer	<Issr>	[0..1]	Text
4.1.224	Or}	PrivateIdentification	<PrvtId>	[1..1]	
4.1.225		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.226		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.227		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.228		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.229		CountryOfBirth	<CtryOfBirth>	[1..1]	Code
4.1.230		Other	<Othr>	[0..n]	
4.1.231		Identification	<Id>	[1..1]	Text
4.1.232		SchemeName	<SchmeNm>	[0..1]	
4.1.233	{{Or	Code	<Cd>	[1..1]	Code
4.1.234	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.235		Issuer	<Issr>	[0..1]	Text
4.1.236		CountryOfResidence	<CtryOfRes>	[0..1]	Code
4.1.237		ContactDetails	<CtctDtls>	[0..1]	
4.1.238		NamePrefix	<NmPrfx>	[0..1]	Code
4.1.239		Name	<Nm>	[0..1]	Text
4.1.240		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.241		MobileNumber	<MobNb>	[0..1]	Text
4.1.242		FaxNumber	<FaxNb>	[0..1]	Text
4.1.243		EmailAddress	<EmailAdr>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.244		Other	<Othr>	[0..1]	Text
4.1.245		DebtorAccount	<DbtrAcct>	[0..1]	
4.1.246		Identification	<Id>	[1..1]	
4.1.247	{Or	IBAN	<IBAN>	[1..1]	Identifier
4.1.248	Or}	Other	<Othr>	[1..1]	
4.1.249		Identification	<Id>	[1..1]	Text
4.1.250		SchemeName	<SchmeNm>	[0..1]	
4.1.251	{{Or	Code	<Cd>	[1..1]	Code
4.1.252	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.253		Issuer	<Issr>	[0..1]	Text
4.1.254		Type	<Tp>	[0..1]	
4.1.255	{Or	Code	<Cd>	[1..1]	Code
4.1.256	Or}	Proprietary	<Prtry>	[1..1]	Text
4.1.257		Currency	<Ccy>	[0..1]	Code
4.1.258		Name	<Nm>	[0..1]	Text
4.1.259		DebtorAgent	<DbtrAgt>	[1..1]	
4.1.260		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
4.1.261		BIC	<BIC>	[0..1]	Identifier
4.1.262		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
4.1.263		ClearingSystemIdentification	<ClrSysId>	[0..1]	
4.1.264	{Or	Code	<Cd>	[1..1]	Code
4.1.265	Or}	Proprietary	<Prtry>	[1..1]	Text
4.1.266		MemberIdentification	<MmbId>	[1..1]	Text
4.1.267		Name	<Nm>	[0..1]	Text
4.1.268		PostalAddress	<PstlAdr>	[0..1]	
4.1.269		AddressType	<AdrTp>	[0..1]	Code
4.1.270		Department	<Dept>	[0..1]	Text
4.1.271		SubDepartment	<SubDept>	[0..1]	Text
4.1.272		StreetName	<StrtNm>	[0..1]	Text
4.1.273		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.274		PostCode	<PstCd>	[0..1]	Text
4.1.275		TownName	<TwnNm>	[0..1]	Text
4.1.276		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.277		Country	<Ctry>	[0..1]	Code
4.1.278		AddressLine	<AdrLine>	[0..7]	Text
4.1.279		Other	<Othr>	[0..1]	

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.280		Identification	<Id>	[1..1]	Text
4.1.281		SchemeName	<SchmeNm>	[0..1]	
4.1.282	{Or	Code	<Cd>	[1..1]	Code
4.1.283	Or}	Proprietary	<Prtry>	[1..1]	Text
4.1.284		Issuer	<Issr>	[0..1]	Text
4.1.285		BranchIdentification	<BrnchId>	[0..1]	
4.1.286		Identification	<Id>	[0..1]	Text
4.1.287		Name	<Nm>	[0..1]	Text
4.1.288		PostalAddress	<PstlAdr>	[0..1]	
4.1.289		AddressType	<AdrTp>	[0..1]	Code
4.1.290		Department	<Dept>	[0..1]	Text
4.1.291		SubDepartment	<SubDept>	[0..1]	Text
4.1.292		StreetName	<StrtNm>	[0..1]	Text
4.1.293		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.294		PostCode	<PstCd>	[0..1]	Text
4.1.295		TownName	<TwnNm>	[0..1]	Text
4.1.296		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.297		Country	<Ctry>	[0..1]	Code
4.1.298		AddressLine	<AdrLine>	[0..7]	Text
4.1.299		UltimateDebtor	<UltmtDbtr>	[0..1]	
4.1.300		Name	<Nm>	[0..1]	Text
4.1.301		PostalAddress	<PstlAdr>	[0..1]	
4.1.302		AddressType	<AdrTp>	[0..1]	Code
4.1.303		Department	<Dept>	[0..1]	Text
4.1.304		SubDepartment	<SubDept>	[0..1]	Text
4.1.305		StreetName	<StrtNm>	[0..1]	Text
4.1.306		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.307		PostCode	<PstCd>	[0..1]	Text
4.1.308		TownName	<TwnNm>	[0..1]	Text
4.1.309		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.310		Country	<Ctry>	[0..1]	Code
4.1.311		AddressLine	<AdrLine>	[0..7]	Text
4.1.312		Identification	<Id>	[0..1]	
4.1.313	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.314		BICOrBEI	<BICOrBEI>	[0..1]	Identifier
4.1.315		Other	<Othr>	[0..n]	

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.316		Identification	<Id>	[1..1]	Text
4.1.317		SchemeName	<SchmeNm>	[0..1]	
4.1.318	{{Or	Code	<Cd>	[1..1]	Code
4.1.319	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.320		Issuer	<Issr>	[0..1]	Text
4.1.321	Or}	PrivateIdentification	<PrvtId>	[1..1]	
4.1.322		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.323		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.324		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.325		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.326		CountryOfBirth	<CtryOfBirth>	[1..1]	Code
4.1.327		Other	<Othr>	[0..n]	
4.1.328		Identification	<Id>	[1..1]	Text
4.1.329		SchemeName	<SchmeNm>	[0..1]	
4.1.330	{{Or	Code	<Cd>	[1..1]	Code
4.1.331	Or}}	Proprietary	<Prtry>	[1..1]	Text
4.1.332		Issuer	<Issr>	[0..1]	Text
4.1.333		CountryOfResidence	<CtryOfRes>	[0..1]	Code
4.1.334		ContactDetails	<CtctDtls>	[0..1]	
4.1.335		NamePrefix	<NmPrfx>	[0..1]	Code
4.1.336		Name	<Nm>	[0..1]	Text
4.1.337		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.338		MobileNumber	<MobNb>	[0..1]	Text
4.1.339		FaxNumber	<FaxNb>	[0..1]	Text
4.1.340		EmailAddress	<EmailAdr>	[0..1]	Text
4.1.341		Other	<Othr>	[0..1]	Text
4.1.342		ReferredDocument	<RfrdDoc>	[0..1]	
4.1.343		Type	<Tp>	[0..1]	
4.1.344		CodeOrProprietary	<CdOrPrtry>	[1..1]	
4.1.345	{Or	Code	<Cd>	[1..1]	Code
4.1.346	Or}	Proprietary	<Prtry>	[1..1]	Text
4.1.347		Issuer	<Issr>	[0..1]	Text
4.1.348		Number	<Nb>	[0..1]	Text
4.1.349		RelatedDate	<RltdDt>	[0..1]	DateTime

Guideline(s): UltimateCreditorGuideline

UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

4.1.0 MandateIdentification <MndtId>

Presence: [1..1]
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.1 MandateRequestIdentification <MndtReqId>

Presence: [0..1]
Definition: Identification for the mandate request, as assigned by the initiating party.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.2 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of mandate, such as paper, electronic or scheme.
Type: *This message item is composed of the following **MandateTypeInformation1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.3		ServiceLevel	<SvcLvl>	[0..1]	
4.1.6		LocalInstrument	<LclInstrm>	[0..1]	

4.1.3 ServiceLevel <SvcLvl>

Presence: [0..1]
Definition: Agreement under which or rules under which the mandate resides.
Type: *This message item is composed of one of the following **ServiceLevel8Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.4	{Or	Code	<Cd>	[1..1]	Code
4.1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.4 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.3 ServiceLevel**.*
Definition: Specifies a pre-agreed service or level of service between the parties, as published in an external service level code list.
Data Type: ExternalServiceLevel1Code

Format: maxLength: 4
minLength: 1

4.1.5 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **4.1.3 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.6 LocalInstrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.
Usage: This element is used to specify a local instrument, local clearing option and/or further qualify the service or service level.

Type: *This message item is composed of one of the following **LocalInstrument2Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.7	{Or	Code	<Cd>	[1..1]	Code
4.1.8	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.7 Code <Cd>

Presence: [1..1]

*This message item is part of choice **4.1.6 LocalInstrument**.*

Definition: Specifies the local instrument, as published in an external local instrument code list.

Data Type: ExternalLocalInstrument1Code

Format: maxLength: 35
minLength: 1

4.1.8 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **4.1.6 LocalInstrument**.*

Definition: Specifies the local instrument, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.9 Occurrences <Ocrncs>

Presence: [0..1]

Definition: Set of elements used to provide details of the duration of the mandate and occurrence of the underlying transactions.

Type: *This message item is composed of the following **MandateOccurrences1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.10		SequenceType	<SeqTp>	[1..1]	Code
4.1.11		Frequency	<Frqcy>	[0..1]	Code
4.1.12		Duration	<Drtn>	[0..1]	
4.1.15		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
4.1.16		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime

4.1.10 SequenceType <SeqTp>

Presence: [1..1]
Definition: Identifies the underlying transaction sequence as either recurring or one-off.
Data Type: Code
*One of the following **SequenceType2Code** values must be used:*

Code	Name	Definition
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

4.1.11 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which instructions are to be created and processed.
Data Type: Code
*When this message item is present, one of the following **Frequency1Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

4.1.12 Duration <Drtn>

Presence: [0..1]
Definition: Length of time for which the mandate remains valid.
Type: *This message item is composed of the following **DatePeriodDetails1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.13		FromDate	<FrDt>	[1..1]	DateTime
4.1.14		ToDate	<ToDt>	[0..1]	DateTime

4.1.13 FromDate <FrDt>

Presence: [1..1]
Definition: Start date of the range.
Data Type: ISODate

4.1.14 ToDate <ToDt>

Presence: [0..1]
Definition: End date of the range.
Data Type: ISODate

4.1.15 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.
Data Type: ISODate

4.1.16 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.
Data Type: ISODate

4.1.17 CollectionAmount <ColltnAmt>

Presence: [0..1]
Definition: Fixed amount to be collected from the debtor's account.
Data Type: ActiveOrHistoricCurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency

The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

4.1.18 MaximumAmount <MaxAmt>

Presence: [0..1]

Definition: Maximum amount that may be collected from the debtor's account, per instruction.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

4.1.19 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]

Definition: Credit party that signs the mandate.

Type: *This message item is composed of the following* ***PartyIdentification32*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.20		Name	<Nm>	[0..1]	Text
4.1.21		PostalAddress	<PstlAdr>	[0..1]	
4.1.32		Identification	<Id>	[0..1]	
4.1.53		CountryOfResidence	<CtryOfRes>	[0..1]	Code
4.1.54		ContactDetails	<CtctDtls>	[0..1]	

4.1.20 Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Data Type: Max140Text

Format: maxLength: 140
minLength: 1

4.1.21 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.22		AddressType	<AdrTp>	[0..1]	Code
4.1.23		Department	<Dept>	[0..1]	Text
4.1.24		SubDepartment	<SubDept>	[0..1]	Text
4.1.25		StreetName	<StrtNm>	[0..1]	Text
4.1.26		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.27		PostCode	<PstCd>	[0..1]	Text
4.1.28		TownName	<TwnNm>	[0..1]	Text
4.1.29		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.30		Country	<Ctry>	[0..1]	Code
4.1.31		AddressLine	<AdrLine>	[0..7]	Text

4.1.22 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.23 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.24 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.25 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.26 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.27 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.28 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.29 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.30 Country <Ctry>

Presence: [0..1]

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.31 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.32 Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Type: *This message item is composed of one of the following **Party6Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.33	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.41	Or}	PrivateIdentification	<PrvtId>	[1..1]	

4.1.33 OrganisationIdentification <OrgId>

Presence: [1..1]

*This message item is part of choice **4.1.32 Identification**.*

Definition: Unique and unambiguous way to identify an organisation.

Type: *This message item is composed of the following **OrganisationIdentification4** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.34		BICOrBEI	<BICOrBEI>	[0..1]	Identifier
4.1.35		Other	<Othr>	[0..n]	

4.1.34 BICOrBEI <BICOrBEI>

Presence: [0..1]

Definition: Code allocated to organisations by the ISO 9362 Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).
The Ba

Data Type: AnyBICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): AnyBIC
Only a valid BIC or BEI is allowed. Valid BEI and BIC are registered with the ISO 9362 Registration Authority, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

4.1.35 Other <Othr>

Presence: [0..n]
Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following* ***GenericOrganisationIdentification1*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.36		Identification	<Id>	[1..1]	Text
4.1.37		SchemeName	<SchmeNm>	[0..1]	
4.1.40		Issuer	<Issr>	[0..1]	Text

4.1.36 Identification <Id>

Presence: [1..1]
Definition: Identification assigned by an institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.37 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following* ***OrganisationIdentificationSchemeName1Choice*** *element (s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.38	{Or	Code	<Cd>	[1..1]	Code
4.1.39	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.38 Code <Cd>

Presence: [1..1]
This message item is part of choice ***4.1.37 SchemeName****.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalOrganisationIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.39 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.37 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.40 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.41 PrivateIdentification <PrvtId>

Presence: [1..1]
*This message item is part of choice **4.1.32 Identification**.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification5** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.42		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.47		Other	<Othr>	[0..n]	

4.1.42 DateAndPlaceOfBirth <DtAndPlcOfBirth>

Presence: [0..1]
Definition: Date and place of birth of a person.
Type: *This message item is composed of the following **DateAndPlaceOfBirth** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.43		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.44		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.45		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.46		CountryOfBirth	<CtryOfBirth>	[1..1]	Code

4.1.43 BirthDate <BirthDt>

Presence: [1..1]
Definition: Date on which a person is born.
Data Type: ISODate

4.1.44 ProvinceOfBirth <PrvcOfBirth>

Presence: [0..1]
Definition: Province where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.45 CityOfBirth <CityOfBirth>

Presence: [1..1]
Definition: City where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.46 CountryOfBirth <CtryOfBirth>

Presence: [1..1]
Definition: Country where a person was born.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.47 Other <Othr>

Presence: [0..n]
Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following **GenericPersonIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.48		Identification	<Id>	[1..1]	Text
4.1.49		SchemeName	<SchmeNm>	[0..1]	
4.1.52		Issuer	<Issr>	[0..1]	Text

4.1.48 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.49 SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

Type: *This message item is composed of one of the following* ***PersonIdentificationSchemeName1Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.50	{Or	Code	<Cd>	[1..1]	Code
4.1.51	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.50 Code <Cd>

Presence: [1..1]

This message item is part of choice ***4.1.49 SchemeName****.*

Definition: Name of the identification scheme, in a coded form as published in an external list.

Data Type: ExternalPersonIdentification1Code

Format: maxLength: 4
minLength: 1

4.1.51 Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice ***4.1.49 SchemeName****.*

Definition: Name of the identification scheme, in a free text form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.52 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.53 CountryOfResidence <CtryOfRes>

Presence: [0..1]

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.54 ContactDetails <CtctDtls>

Presence: [0..1]

Definition: Set of elements used to indicate how to contact the party.

Type: *This message item is composed of the following* ***ContactDetails2*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.55		NamePrefix	<NmPrfx>	[0..1]	Code
4.1.56		Name	<Nm>	[0..1]	Text
4.1.57		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.58		MobileNumber	<MobNb>	[0..1]	Text
4.1.59		FaxNumber	<FaxNb>	[0..1]	Text
4.1.60		EmailAddress	<EmailAdr>	[0..1]	Text
4.1.61		Other	<Othr>	[0..1]	Text

4.1.55 NamePrefix <NmPrfx>

Presence: [0..1]
Definition: Specifies the terms used to formally address a person.
Data Type: Code
When this message item is present, one of the following ***NamePrefix1Code*** *values must be used:*

Code	Name	Definition
DOCT	Doctor	Title of the person is Doctor or Dr.
MADM	Madam	Title of the person is Madam.
MISS	Miss	Title of the person is Miss.
MIST	Mister	Title of the person is Mister or Mr.

4.1.56 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.57 PhoneNumber <PhneNb>

Presence: [0..1]
Definition: Collection of information that identifies a phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.58 MobileNumber <MobNb>

Presence: [0..1]
Definition: Collection of information that identifies a mobile phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.59 FaxNumber <FaxNb>

Presence: [0..1]
Definition: Collection of information that identifies a FAX number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.60 EmailAddress <EmailAdr>

Presence: [0..1]
Definition: Address for electronic mail (e-mail).
Data Type: Max2048Text
Format: maxLength: 2048
minLength: 1

4.1.61 Other <Othr>

Presence: [0..1]
Definition: Contact details in an other form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.62 Creditor <Cdtr>

Presence: [1..1]
Definition: Party that signs the mandate and to whom an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.63		Name	<Nm>	[0..1]	Text
4.1.64		PostalAddress	<PstlAdr>	[0..1]	
4.1.75		Identification	<Id>	[0..1]	
4.1.96		CountryOfResidence	<CtryOfRes>	[0..1]	Code
4.1.97		ContactDetails	<CtctDtls>	[0..1]	

4.1.63 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.64 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.

Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.65		AddressType	<AdrTp>	[0..1]	Code
4.1.66		Department	<Dept>	[0..1]	Text
4.1.67		SubDepartment	<SubDept>	[0..1]	Text
4.1.68		StreetName	<StrtNm>	[0..1]	Text
4.1.69		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.70		PostCode	<PstCd>	[0..1]	Text
4.1.71		TownName	<TwnNm>	[0..1]	Text
4.1.72		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.73		Country	<Ctry>	[0..1]	Code
4.1.74		AddressLine	<AdrLine>	[0..7]	Text

4.1.65 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.66 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.67 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.68 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.69 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.70 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.71 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.72 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.73 Country <Ctry>

Presence: [0..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.74 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.75 Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Type: *This message item is composed of one of the following **Party6Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.76	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.84	Or}	PrivateIdentification	<PrvtId>	[1..1]	

4.1.76 OrganisationIdentification <OrgId>

Presence: [1..1]

*This message item is part of choice **4.1.75 Identification**.*

Definition: Unique and unambiguous way to identify an organisation.

Type: *This message item is composed of the following **OrganisationIdentification4** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.77		BICOrBEI	<BICOrBEI>	[0..1]	Identifier
4.1.78		Other	<Othr>	[0..n]	

4.1.77 BICOrBEI <BICOrBEI>

Presence: [0..1]

Definition: Code allocated to organisations by the ISO 9362 Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).
The Ba

Data Type: AnyBICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): AnyBIC
Only a valid BIC or BEI is allowed. Valid BEI and BIC are registered with the ISO 9362 Registration Authority, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

4.1.78 Other <Othr>

Presence: [0..n]
Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following* ***GenericOrganisationIdentification1*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.79		Identification	<Id>	[1..1]	Text
4.1.80		SchemeName	<SchmeNm>	[0..1]	
4.1.83		Issuer	<Issr>	[0..1]	Text

4.1.79 Identification <Id>

Presence: [1..1]
Definition: Identification assigned by an institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.80 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following* ***OrganisationIdentificationSchemeName1Choice*** *element (s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.81	{Or	Code	<Cd>	[1..1]	Code
4.1.82	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.81 Code <Cd>

Presence: [1..1]
This message item is part of choice ***4.1.80 SchemeName****.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalOrganisationIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.82 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***4.1.80 SchemeName****.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.83 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.84 PrivateIdentification <PrvtId>

Presence: [1..1]
*This message item is part of choice **4.1.75 Identification**.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification5** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.85		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.90		Other	<Othr>	[0..n]	

4.1.85 DateAndPlaceOfBirth <DtAndPlcOfBirth>

Presence: [0..1]
Definition: Date and place of birth of a person.
Type: *This message item is composed of the following **DateAndPlaceOfBirth** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.86		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.87		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.88		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.89		CountryOfBirth	<CtryOfBirth>	[1..1]	Code

4.1.86 BirthDate <BirthDt>

Presence: [1..1]
Definition: Date on which a person is born.
Data Type: ISODate

4.1.87 ProvinceOfBirth <PrvcOfBirth>

Presence: [0..1]
Definition: Province where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.88 CityOfBirth <CityOfBirth>

Presence: [1..1]
Definition: City where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.89 CountryOfBirth <CtryOfBirth>

Presence: [1..1]
Definition: Country where a person was born.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.90 Other <Othr>

Presence: [0..n]
Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following* ***GenericPersonIdentification1*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.91		Identification	<Id>	[1..1]	Text
4.1.92		SchemeName	<SchmeNm>	[0..1]	
4.1.95		Issuer	<Issr>	[0..1]	Text

4.1.91 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.92 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following* ***PersonIdentificationSchemeName1Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.93	{Or	Code	<Cd>	[1..1]	Code
4.1.94	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.93 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.92 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalPersonIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.94 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.92 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.95 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.96 CountryOfResidence <CtryOfRes>

Presence: [0..1]
Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.97 ContactDetails <CtctDtls>

Presence: [0..1]
Definition: Set of elements used to indicate how to contact the party.
Type: *This message item is composed of the following **ContactDetails2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.98		NamePrefix	<NmPrfx>	[0..1]	Code
4.1.99		Name	<Nm>	[0..1]	Text
4.1.100		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.101		MobileNumber	<MobNb>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.102		FaxNumber	<FaxNb>	[0..1]	Text
4.1.103		EmailAddress	<EmailAdr>	[0..1]	Text
4.1.104		Other	<Othr>	[0..1]	Text

4.1.98 NamePrefix <NmPrfx>

Presence: [0..1]
Definition: Specifies the terms used to formally address a person.
Data Type: Code
*When this message item is present, one of the following **NamePrefix1Code** values must be used:*

Code	Name	Definition
DOCT	Doctor	Title of the person is Doctor or Dr.
MADM	Madam	Title of the person is Madam.
MISS	Miss	Title of the person is Miss.
MIST	Mister	Title of the person is Mister or Mr.

4.1.99 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.100 PhoneNumber <PhneNb>

Presence: [0..1]
Definition: Collection of information that identifies a phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.101 MobileNumber <MobNb>

Presence: [0..1]
Definition: Collection of information that identifies a mobile phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.102 FaxNumber <FaxNb>

Presence: [0..1]
Definition: Collection of information that identifies a FAX number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.103 EmailAddress <EmailAdr>

Presence: [0..1]
Definition: Address for electronic mail (e-mail).
Data Type: Max2048Text
Format: maxLength: 2048
minLength: 1

4.1.104 Other <Othr>

Presence: [0..1]
Definition: Contact details in an other form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.105 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.
Type: *This message item is composed of the following **CashAccount16** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.106		Identification	<Id>	[1..1]	
4.1.114		Type	<Tp>	[0..1]	
4.1.117		Currency	<Ccy>	[0..1]	Code
4.1.118		Name	<Nm>	[0..1]	Text

4.1.106 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following **AccountIdentification4Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.107	{Or	IBAN	<IBAN>	[1..1]	Identifier
4.1.108	Or}	Other	<Othr>	[1..1]	

4.1.107 IBAN <IBAN>

Presence: [1..1]
*This message item is part of choice **4.1.106 Identification**.*
Definition: International Bank Account Number (IBAN) - identifier used internationally by financial institutions to uniquely identify the account of a customer. Further specifications of the format and content of the IBAN can be found in the standard ISO 13616 "Banking and related financial services - International Bank Account Number (IBAN)" version 1997-10-01, or later revisions.

Data Type: IBAN2007Identifier
Format: [A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
Rule(s): IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

4.1.108 Other <Othr>

Presence: [1..1]
*This message item is part of choice **4.1.106 Identification**.*
Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.
Type: *This message item is composed of the following **GenericAccountIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.109		Identification	<Id>	[1..1]	Text
4.1.110		SchemeName	<SchmeNm>	[0..1]	
4.1.113		Issuer	<Issr>	[0..1]	Text

4.1.109 Identification <Id>

Presence: [1..1]
Definition: Identification assigned by an institution.
Data Type: Max34Text
Format: maxLength: 34
minLength: 1

4.1.110 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme
Type: *This message item is composed of one of the following **AccountSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.111	{Or	Code	<Cd>	[1..1]	Code
4.1.112	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.111 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.110 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalAccountIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.112 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.110 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.113 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.114 Type <Tp>

Presence: [0..1]
Definition: Specifies the nature, or use of the account.
Type: *This message item is composed of one of the following **CashAccountType2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.115	{Or	Code	<Cd>	[1..1]	Code
4.1.116	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.115 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.114 Type**.*
Definition: Account type, in a coded form.
Data Type: Code
*One of the following **CashAccountType4Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
CISH	CashIncome	Account used for payment of income if different from the current cash account.
COMM	Commission	Account used for commission if different from the account for payment.
LOAN	Loan	Account used for loans.
MGLD	MarginalLending	Account used for a marginal lending facility.

Code	Name	Definition
MOMA	MoneyMarket	Account used for money markets if different from the cash account.
NREX	NonResidentExternal	Account used for non-resident external.
ODFT	Overdraft	Account is used for overdrafts.
ONDP	OverNightDeposit	Account used for overnight deposits.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SLRY	Salary	Accounts used for salary payments.
SVGS	Savings	Account used for savings.
TAXE	Tax	Account used for taxes if different from the account for payment.
TRAS	CashTrading	Account used for trading if different from the current cash account.

4.1.116 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **4.1.114 Type**.*

Definition: Nature or use of the account in a proprietary form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.117 Currency <Ccy>

Presence: [0..1]

Definition: Identification of the currency in which the account is held.

Usage: Currency should only be used in case one and the same account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: ActiveOrHistoricCurrencyCode

Format: [A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

4.1.118 Name <Nm>

Presence: [0..1]

Definition: Name of the account, as assigned by the account servicing institution, in agreement with the account owner in order to provide an additional means of identification of the account.

Usage: The account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.119 CreditorAgent <CdtrAgt>

Presence: [0..1]

Definition: Financial institution servicing an account for the creditor.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification4*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.120		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
4.1.145		BranchIdentification	<BrnchId>	[0..1]	

4.1.120 FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *This message item is composed of the following* ***FinancialInstitutionIdentification7*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.121		BIC	<BIC>	[0..1]	Identifier
4.1.122		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
4.1.127		Name	<Nm>	[0..1]	Text
4.1.128		PostalAddress	<PstlAdr>	[0..1]	
4.1.139		Other	<Othr>	[0..1]	

4.1.121 BIC <BIC>

Presence: [0..1]

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

4.1.122 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [0..1]
Definition: Information used to identify a member within a clearing system.
Type: *This message item is composed of the following **ClearingSystemMemberIdentification2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.123		ClearingSystemIdentification	<ClrSysId>	[0..1]	
4.1.126		MemberIdentification	<MmbId>	[1..1]	Text

4.1.123 ClearingSystemIdentification <ClrSysId>

Presence: [0..1]
Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.
Type: *This message item is composed of one of the following **ClearingSystemIdentification2Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.124	{Or	Code	<Cd>	[1..1]	Code
4.1.125	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.124 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.123 ClearingSystemIdentification**.*
Definition: Identification of a clearing system, in a coded form as published in an external list.
Data Type: ExternalClearingSystemIdentification1Code
Format: maxLength: 5
minLength: 1

4.1.125 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.123 ClearingSystemIdentification**.*
Definition: Identification code for a clearing system, that has not yet been identified in the list of clearing systems.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.126 MemberIdentification <MmbId>

Presence: [1..1]
Definition: Identification of a member of a clearing system.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.127 Name <Nm>

Presence: [0..1]
Definition: Name by which an agent is known and which is usually used to identify that agent.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.128 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.129		AddressType	<AdrTp>	[0..1]	Code
4.1.130		Department	<Dept>	[0..1]	Text
4.1.131		SubDepartment	<SubDept>	[0..1]	Text
4.1.132		StreetName	<StrtNm>	[0..1]	Text
4.1.133		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.134		PostCode	<PstCd>	[0..1]	Text
4.1.135		TownName	<TwnNm>	[0..1]	Text
4.1.136		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.137		Country	<Ctry>	[0..1]	Code
4.1.138		AddressLine	<AdrLine>	[0..7]	Text

4.1.129 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.130 Department <Dept>

Presence: [0..1]

Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.131 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.132 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.133 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.134 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.135 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.136 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.137 Country <Ctry>

Presence: [0..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.138 AddressLine <AdrLine>

Presence: [0..7]
Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.139 Other <Othr>

Presence: [0..1]
Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following **GenericFinancialIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.140		Identification	<Id>	[1..1]	Text
4.1.141		SchemeName	<SchmeNm>	[0..1]	
4.1.144		Issuer	<Issr>	[0..1]	Text

4.1.140 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.141 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following **FinancialIdentificationSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.142	{Or	Code	<Cd>	[1..1]	Code
4.1.143	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.142 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.141 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalFinancialInstitutionIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.143 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.141 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.144 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.145 BranchIdentification <BrnchId>

Presence: [0..1]
Definition: Identifies a specific branch of a financial institution.

Usage: This component should be used in case the identification information in the financial institution component does not provide identification up to branch level.

Type: *This message item is composed of the following **BranchData2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.146		Identification	<Id>	[0..1]	Text
4.1.147		Name	<Nm>	[0..1]	Text
4.1.148		PostalAddress	<PstlAdr>	[0..1]	

4.1.146 Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a branch of a financial institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.147 Name <Nm>

Presence: [0..1]
Definition: Name by which an agent is known and which is usually used to identify that agent.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.148 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.149		AddressType	<AdrTp>	[0..1]	Code
4.1.150		Department	<Dept>	[0..1]	Text
4.1.151		SubDepartment	<SubDept>	[0..1]	Text
4.1.152		StreetName	<StrtNm>	[0..1]	Text
4.1.153		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.154		PostCode	<PstCd>	[0..1]	Text
4.1.155		TownName	<TwnNm>	[0..1]	Text
4.1.156		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.157		Country	<Ctry>	[0..1]	Code
4.1.158		AddressLine	<AdrLine>	[0..7]	Text

4.1.149 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.

Code	Name	Definition
PBOX	POBox	Address is a postal office (PO) box.

4.1.150 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.151 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.152 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.153 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.154 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.155 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35

minLength: 1

4.1.156 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.157 Country <Ctry>

Presence: [0..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.158 AddressLine <AdrLine>

Presence: [0..7]
Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.159 UltimateCreditor <UltmtCdtr>

Presence: [0..1]
Definition: Ultimate party to which an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.160		Name	<Nm>	[0..1]	Text
4.1.161		PostalAddress	<PstlAdr>	[0..1]	
4.1.172		Identification	<Id>	[0..1]	
4.1.193		CountryOfResidence	<CtryOfRes>	[0..1]	Code
4.1.194		ContactDetails	<CtctDtls>	[0..1]	

4.1.160 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text

Format: maxLength: 140
minLength: 1

4.1.161 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.162		AddressType	<AdrTp>	[0..1]	Code
4.1.163		Department	<Dept>	[0..1]	Text
4.1.164		SubDepartment	<SubDept>	[0..1]	Text
4.1.165		StreetName	<StrtNm>	[0..1]	Text
4.1.166		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.167		PostCode	<PstCd>	[0..1]	Text
4.1.168		TownName	<TwnNm>	[0..1]	Text
4.1.169		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.170		Country	<Ctry>	[0..1]	Code
4.1.171		AddressLine	<AdrLine>	[0..7]	Text

4.1.162 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.163 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.164 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.165 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.166 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.167 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.168 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.169 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.170 Country <Ctry>

Presence: [0..1]

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.171 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.172 Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Type: *This message item is composed of one of the following **Party6Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.173	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.181	Or}	PrivateIdentification	<PrvtId>	[1..1]	

4.1.173 OrganisationIdentification <OrgId>

Presence: [1..1]

*This message item is part of choice **4.1.172 Identification**.*

Definition: Unique and unambiguous way to identify an organisation.

Type: *This message item is composed of the following **OrganisationIdentification4** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.174		BICOrBEI	<BICOrBEI>	[0..1]	Identifier
4.1.175		Other	<Othr>	[0..n]	

4.1.174 BICOrBEI <BICOrBEI>

Presence: [0..1]

Definition: Code allocated to organisations by the ISO 9362 Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).
The Ba

Data Type: AnyBICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): AnyBIC
Only a valid BIC or BEI is allowed. Valid BEI and BIC are registered with the ISO 9362 Registration Authority, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

4.1.175 Other <Othr>

Presence: [0..n]
Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following* ***GenericOrganisationIdentification1*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.176		Identification	<Id>	[1..1]	Text
4.1.177		SchemeName	<SchmeNm>	[0..1]	
4.1.180		Issuer	<Issr>	[0..1]	Text

4.1.176 Identification <Id>

Presence: [1..1]
Definition: Identification assigned by an institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.177 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following* ***OrganisationIdentificationSchemeName1Choice*** *element (s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.178	{Or	Code	<Cd>	[1..1]	Code
4.1.179	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.178 Code <Cd>

Presence: [1..1]
This message item is part of choice ***4.1.177 SchemeName****.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalOrganisationIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.179 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.177 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.180 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.181 PrivateIdentification <PrvtId>

Presence: [1..1]
*This message item is part of choice **4.1.172 Identification**.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification5** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.182		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.187		Other	<Othr>	[0..n]	

4.1.182 DateAndPlaceOfBirth <DtAndPlcOfBirth>

Presence: [0..1]
Definition: Date and place of birth of a person.
Type: *This message item is composed of the following **DateAndPlaceOfBirth** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.183		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.184		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.185		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.186		CountryOfBirth	<CtryOfBirth>	[1..1]	Code

4.1.183 BirthDate <BirthDt>

Presence: [1..1]
Definition: Date on which a person is born.
Data Type: ISODate

4.1.184 ProvinceOfBirth <PrvcOfBirth>

Presence: [0..1]
Definition: Province where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.185 CityOfBirth <CityOfBirth>

Presence: [1..1]
Definition: City where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.186 CountryOfBirth <CtryOfBirth>

Presence: [1..1]
Definition: Country where a person was born.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.187 Other <Othr>

Presence: [0..n]
Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following **GenericPersonIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.188		Identification	<Id>	[1..1]	Text
4.1.189		SchemeName	<SchmeNm>	[0..1]	
4.1.192		Issuer	<Issr>	[0..1]	Text

4.1.188 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.189 SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

Type: *This message item is composed of one of the following* ***PersonIdentificationSchemeName1Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.190	{Or	Code	<Cd>	[1..1]	Code
4.1.191	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.190 Code <Cd>

Presence: [1..1]

This message item is part of choice ***4.1.189 SchemeName****.*

Definition: Name of the identification scheme, in a coded form as published in an external list.

Data Type: ExternalPersonIdentification1Code

Format: maxLength: 4
minLength: 1

4.1.191 Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice ***4.1.189 SchemeName****.*

Definition: Name of the identification scheme, in a free text form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.192 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.193 CountryOfResidence <CtryOfRes>

Presence: [0..1]

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.194 ContactDetails <CtctDtls>

Presence: [0..1]

Definition: Set of elements used to indicate how to contact the party.

Type: *This message item is composed of the following* ***ContactDetails2*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.195		NamePrefix	<NmPrfx>	[0..1]	Code
4.1.196		Name	<Nm>	[0..1]	Text
4.1.197		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.198		MobileNumber	<MobNb>	[0..1]	Text
4.1.199		FaxNumber	<FaxNb>	[0..1]	Text
4.1.200		EmailAddress	<EmailAdr>	[0..1]	Text
4.1.201		Other	<Othr>	[0..1]	Text

4.1.195 NamePrefix <NmPrfx>

Presence: [0..1]
Definition: Specifies the terms used to formally address a person.
Data Type: Code
When this message item is present, one of the following ***NamePrefix1Code*** *values must be used:*

Code	Name	Definition
DOCT	Doctor	Title of the person is Doctor or Dr.
MADM	Madam	Title of the person is Madam.
MISS	Miss	Title of the person is Miss.
MIST	Mister	Title of the person is Mister or Mr.

4.1.196 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.197 PhoneNumber <PhneNb>

Presence: [0..1]
Definition: Collection of information that identifies a phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.198 MobileNumber <MobNb>

Presence: [0..1]
Definition: Collection of information that identifies a mobile phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.199 FaxNumber <FaxNb>

Presence: [0..1]
Definition: Collection of information that identifies a FAX number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.200 EmailAddress <EmailAdr>

Presence: [0..1]
Definition: Address for electronic mail (e-mail).
Data Type: Max2048Text
Format: maxLength: 2048
minLength: 1

4.1.201 Other <Othr>

Presence: [0..1]
Definition: Contact details in an other form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.202 Debtor <Dbtr>

Presence: [1..1]
Definition: Party that signs the mandate and owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.203		Name	<Nm>	[0..1]	Text
4.1.204		PostalAddress	<PstlAdr>	[0..1]	
4.1.215		Identification	<Id>	[0..1]	
4.1.236		CountryOfResidence	<CtryOfRes>	[0..1]	Code
4.1.237		ContactDetails	<CtctDtls>	[0..1]	

4.1.203 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.204 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.

Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.205		AddressType	<AdrTp>	[0..1]	Code
4.1.206		Department	<Dept>	[0..1]	Text
4.1.207		SubDepartment	<SubDept>	[0..1]	Text
4.1.208		StreetName	<StrtNm>	[0..1]	Text
4.1.209		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.210		PostCode	<PstCd>	[0..1]	Text
4.1.211		TownName	<TwnNm>	[0..1]	Text
4.1.212		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.213		Country	<Ctry>	[0..1]	Code
4.1.214		AddressLine	<AdrLine>	[0..7]	Text

4.1.205 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.206 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.207 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.208 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.209 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.210 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.211 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.212 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.213 Country <Ctry>

Presence: [0..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.214 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.215 Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Type: *This message item is composed of one of the following **Party6Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.216	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.224	Or}	PrivateIdentification	<PrvtId>	[1..1]	

4.1.216 OrganisationIdentification <OrgId>

Presence: [1..1]

*This message item is part of choice **4.1.215 Identification**.*

Definition: Unique and unambiguous way to identify an organisation.

Type: *This message item is composed of the following **OrganisationIdentification4** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.217		BICOrBEI	<BICOrBEI>	[0..1]	Identifier
4.1.218		Other	<Othr>	[0..n]	

4.1.217 BICOrBEI <BICOrBEI>

Presence: [0..1]

Definition: Code allocated to organisations by the ISO 9362 Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).
The Ba

Data Type: AnyBICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): AnyBIC
Only a valid BIC or BEI is allowed. Valid BEI and BIC are registered with the ISO 9362 Registration Authority, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

4.1.218 Other <Othr>

Presence: [0..n]
Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following* ***GenericOrganisationIdentification1*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.219		Identification	<Id>	[1..1]	Text
4.1.220		SchemeName	<SchmeNm>	[0..1]	
4.1.223		Issuer	<Issr>	[0..1]	Text

4.1.219 Identification <Id>

Presence: [1..1]
Definition: Identification assigned by an institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.220 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following* ***OrganisationIdentificationSchemeName1Choice*** *element (s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.221	{Or	Code	<Cd>	[1..1]	Code
4.1.222	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.221 Code <Cd>

Presence: [1..1]
This message item is part of choice ***4.1.220 SchemeName****.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalOrganisationIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.222 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***4.1.220 SchemeName****.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.223 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.224 PrivateIdentification <PrvtId>

Presence: [1..1]
*This message item is part of choice **4.1.215 Identification**.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification5** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.225		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.230		Other	<Othr>	[0..n]	

4.1.225 DateAndPlaceOfBirth <DtAndPlcOfBirth>

Presence: [0..1]
Definition: Date and place of birth of a person.
Type: *This message item is composed of the following **DateAndPlaceOfBirth** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.226		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.227		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.228		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.229		CountryOfBirth	<CtryOfBirth>	[1..1]	Code

4.1.226 BirthDate <BirthDt>

Presence: [1..1]
Definition: Date on which a person is born.
Data Type: ISODate

4.1.227 ProvinceOfBirth <PrvcOfBirth>

Presence: [0..1]
Definition: Province where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.228 CityOfBirth <CityOfBirth>

Presence: [1..1]
Definition: City where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.229 CountryOfBirth <CtryOfBirth>

Presence: [1..1]
Definition: Country where a person was born.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.230 Other <Othr>

Presence: [0..n]
Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following **GenericPersonIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.231		Identification	<Id>	[1..1]	Text
4.1.232		SchemeName	<SchmeNm>	[0..1]	
4.1.235		Issuer	<Issr>	[0..1]	Text

4.1.231 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.232 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following **PersonIdentificationSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.233	{Or	Code	<Cd>	[1..1]	Code
4.1.234	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.233 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.232 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalPersonIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.234 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.232 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.235 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.236 CountryOfResidence <CtryOfRes>

Presence: [0..1]
Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.237 ContactDetails <CtctDtls>

Presence: [0..1]
Definition: Set of elements used to indicate how to contact the party.
Type: *This message item is composed of the following **ContactDetails2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.238		NamePrefix	<NmPrfx>	[0..1]	Code
4.1.239		Name	<Nm>	[0..1]	Text
4.1.240		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.241		MobileNumber	<MobNb>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.242		FaxNumber	<FaxNb>	[0..1]	Text
4.1.243		EmailAddress	<EmailAdr>	[0..1]	Text
4.1.244		Other	<Othr>	[0..1]	Text

4.1.238 NamePrefix <NmPrfx>

Presence: [0..1]
Definition: Specifies the terms used to formally address a person.
Data Type: Code
*When this message item is present, one of the following **NamePrefix1Code** values must be used:*

Code	Name	Definition
DOCT	Doctor	Title of the person is Doctor or Dr.
MADM	Madam	Title of the person is Madam.
MISS	Miss	Title of the person is Miss.
MIST	Mister	Title of the person is Mister or Mr.

4.1.239 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.240 PhoneNumber <PhneNb>

Presence: [0..1]
Definition: Collection of information that identifies a phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.241 MobileNumber <MobNb>

Presence: [0..1]
Definition: Collection of information that identifies a mobile phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.242 FaxNumber <FaxNb>

Presence: [0..1]
Definition: Collection of information that identifies a FAX number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.243 EmailAddress <EmailAdr>

Presence: [0..1]
Definition: Address for electronic mail (e-mail).
Data Type: Max2048Text
Format: maxLength: 2048
minLength: 1

4.1.244 Other <Othr>

Presence: [0..1]
Definition: Contact details in an other form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.245 DebtorAccount <DbtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the debtor, to which a debit entry will be made as a result of the transaction.
Type: *This message item is composed of the following **CashAccount16** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.246		Identification	<Id>	[1..1]	
4.1.254		Type	<Tp>	[0..1]	
4.1.257		Currency	<Ccy>	[0..1]	Code
4.1.258		Name	<Nm>	[0..1]	Text

4.1.246 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.
Type: *This message item is composed of one of the following **AccountIdentification4Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.247	{Or	IBAN	<IBAN>	[1..1]	Identifier
4.1.248	Or}	Other	<Othr>	[1..1]	

4.1.247 IBAN <IBAN>

Presence: [1..1]
*This message item is part of choice **4.1.246 Identification**.*
Definition: International Bank Account Number (IBAN) - identifier used internationally by financial institutions to uniquely identify the account of a customer. Further specifications of the format and content of the IBAN can be found in the standard ISO 13616 "Banking and related financial services - International Bank Account Number (IBAN)" version 1997-10-01, or later revisions.

Data Type: IBAN2007Identifier
Format: [A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
Rule(s): IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

4.1.248 Other <Othr>

Presence: [1..1]
*This message item is part of choice **4.1.246 Identification**.*
Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.
Type: *This message item is composed of the following **GenericAccountIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.249		Identification	<Id>	[1..1]	Text
4.1.250		SchemeName	<SchmeNm>	[0..1]	
4.1.253		Issuer	<Issr>	[0..1]	Text

4.1.249 Identification <Id>

Presence: [1..1]
Definition: Identification assigned by an institution.
Data Type: Max34Text
Format: maxLength: 34
minLength: 1

4.1.250 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme
Type: *This message item is composed of one of the following **AccountSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.251	{Or	Code	<Cd>	[1..1]	Code
4.1.252	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.251 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.250 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalAccountIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.252 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.250 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.253 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.254 Type <Tp>

Presence: [0..1]
Definition: Specifies the nature, or use of the account.
Type: *This message item is composed of one of the following **CashAccountType2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.255	{Or	Code	<Cd>	[1..1]	Code
4.1.256	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.255 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.254 Type**.*
Definition: Account type, in a coded form.
Data Type: Code
*One of the following **CashAccountType4Code** values must be used:*

Code	Name	Definition
CACC	Current	Account used to post debits and credits when no specific account has been nominated.
CASH	CashPayment	Account used for the payment of cash.
CHAR	Charges	Account used for charges if different from the account for payment.
CISH	CashIncome	Account used for payment of income if different from the current cash account.
COMM	Commission	Account used for commission if different from the account for payment.
LOAN	Loan	Account used for loans.
MGLD	MarginalLending	Account used for a marginal lending facility.

Code	Name	Definition
MOMA	MoneyMarket	Account used for money markets if different from the cash account.
NREX	NonResidentExternal	Account used for non-resident external.
ODFT	Overdraft	Account is used for overdrafts.
ONDP	OverNightDeposit	Account used for overnight deposits.
SACC	Settlement	Account used to post debit and credit entries, as a result of transactions cleared and settled through a specific clearing and settlement system.
SLRY	Salary	Accounts used for salary payments.
SVGS	Savings	Account used for savings.
TAXE	Tax	Account used for taxes if different from the account for payment.
TRAS	CashTrading	Account used for trading if different from the current cash account.

4.1.256 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **4.1.254 Type**.*

Definition: Nature or use of the account in a proprietary form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.257 Currency <Ccy>

Presence: [0..1]

Definition: Identification of the currency in which the account is held.

Usage: Currency should only be used in case one and the same account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: ActiveOrHistoricCurrencyCode

Format: [A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

4.1.258 Name <Nm>

Presence: [0..1]

Definition: Name of the account, as assigned by the account servicing institution, in agreement with the account owner in order to provide an additional means of identification of the account.

Usage: The account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.259 DebtorAgent <DbtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the debtor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification4** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.260		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
4.1.285		BranchIdentification	<BrnchId>	[0..1]	

4.1.260 FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *This message item is composed of the following **FinancialInstitutionIdentification7** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.261		BIC	<BIC>	[0..1]	Identifier
4.1.262		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
4.1.267		Name	<Nm>	[0..1]	Text
4.1.268		PostalAddress	<PstlAdr>	[0..1]	
4.1.279		Other	<Othr>	[0..1]	

4.1.261 BIC <BIC>

Presence: [0..1]

Definition: Bank Identifier Code. Code allocated to financial institutions by the Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).

Data Type: BICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BIC
Valid BICs are registered with the ISO 9362 Registration Authority, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

4.1.262 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [0..1]
Definition: Information used to identify a member within a clearing system.
Type: *This message item is composed of the following **ClearingSystemMemberIdentification2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.263		ClearingSystemIdentification	<ClrSysId>	[0..1]	
4.1.266		MemberIdentification	<MmbId>	[1..1]	Text

4.1.263 ClearingSystemIdentification <ClrSysId>

Presence: [0..1]
Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.
Type: *This message item is composed of one of the following **ClearingSystemIdentification2Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.264	{Or	Code	<Cd>	[1..1]	Code
4.1.265	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.264 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.263 ClearingSystemIdentification**.*
Definition: Identification of a clearing system, in a coded form as published in an external list.
Data Type: ExternalClearingSystemIdentification1Code
Format: maxLength: 5
minLength: 1

4.1.265 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.263 ClearingSystemIdentification**.*
Definition: Identification code for a clearing system, that has not yet been identified in the list of clearing systems.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.266 MemberIdentification <MmbId>

Presence: [1..1]
Definition: Identification of a member of a clearing system.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.267 Name <Nm>

Presence: [0..1]
Definition: Name by which an agent is known and which is usually used to identify that agent.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.268 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.269		AddressType	<AdrTp>	[0..1]	Code
4.1.270		Department	<Dept>	[0..1]	Text
4.1.271		SubDepartment	<SubDept>	[0..1]	Text
4.1.272		StreetName	<StrtNm>	[0..1]	Text
4.1.273		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.274		PostCode	<PstCd>	[0..1]	Text
4.1.275		TownName	<TwnNm>	[0..1]	Text
4.1.276		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.277		Country	<Ctry>	[0..1]	Code
4.1.278		AddressLine	<AdrLine>	[0..7]	Text

4.1.269 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.270 Department <Dept>

Presence: [0..1]

Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.271 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.272 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.273 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.274 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.275 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.276 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.277 Country <Ctry>

Presence: [0..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.278 AddressLine <AdrLine>

Presence: [0..7]
Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.279 Other <Othr>

Presence: [0..1]
Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following **GenericFinancialIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.280		Identification	<Id>	[1..1]	Text
4.1.281		SchemeName	<SchmeNm>	[0..1]	
4.1.284		Issuer	<Issr>	[0..1]	Text

4.1.280 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.281 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following **FinancialIdentificationSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.282	{Or	Code	<Cd>	[1..1]	Code
4.1.283	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.282 Code <Cd>

Presence: [1..1]
*This message item is part of choice **4.1.281 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalFinancialInstitutionIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.283 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.281 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.284 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.285 BranchIdentification <BrnchId>

Presence: [0..1]
Definition: Identifies a specific branch of a financial institution.

Usage: This component should be used in case the identification information in the financial institution component does not provide identification up to branch level.

Type: *This message item is composed of the following **BranchData2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.286		Identification	<Id>	[0..1]	Text
4.1.287		Name	<Nm>	[0..1]	Text
4.1.288		PostalAddress	<PstlAdr>	[0..1]	

4.1.286 Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a branch of a financial institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.287 Name <Nm>

Presence: [0..1]
Definition: Name by which an agent is known and which is usually used to identify that agent.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.288 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.289		AddressType	<AdrTp>	[0..1]	Code
4.1.290		Department	<Dept>	[0..1]	Text
4.1.291		SubDepartment	<SubDept>	[0..1]	Text
4.1.292		StreetName	<StrtNm>	[0..1]	Text
4.1.293		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.294		PostCode	<PstCd>	[0..1]	Text
4.1.295		TownName	<TwnNm>	[0..1]	Text
4.1.296		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.297		Country	<Ctry>	[0..1]	Code
4.1.298		AddressLine	<AdrLine>	[0..7]	Text

4.1.289 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.

Code	Name	Definition
PBOX	POBox	Address is a postal office (PO) box.

4.1.290 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.291 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.292 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.293 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.294 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.295 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35

minLength: 1

4.1.296 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.297 Country <Ctry>

Presence: [0..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.298 AddressLine <AdrLine>

Presence: [0..7]
Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.299 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification32** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.300		Name	<Nm>	[0..1]	Text
4.1.301		PostalAddress	<PstlAdr>	[0..1]	
4.1.312		Identification	<Id>	[0..1]	
4.1.333		CountryOfResidence	<CtryOfRes>	[0..1]	Code
4.1.334		ContactDetails	<CtctDtls>	[0..1]	

4.1.300 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text

Format: maxLength: 140
minLength: 1

4.1.301 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.302		AddressType	<AdrTp>	[0..1]	Code
4.1.303		Department	<Dept>	[0..1]	Text
4.1.304		SubDepartment	<SubDept>	[0..1]	Text
4.1.305		StreetName	<StrtNm>	[0..1]	Text
4.1.306		BuildingNumber	<BldgNb>	[0..1]	Text
4.1.307		PostCode	<PstCd>	[0..1]	Text
4.1.308		TownName	<TwnNm>	[0..1]	Text
4.1.309		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
4.1.310		Country	<Ctry>	[0..1]	Code
4.1.311		AddressLine	<AdrLine>	[0..7]	Text

4.1.302 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

4.1.303 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.304 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.305 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

4.1.306 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.307 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

4.1.308 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.309 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.310 Country <Ctry>

Presence: [0..1]

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.311 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4.1.312 Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Type: *This message item is composed of one of the following **Party6Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.313	{Or	OrganisationIdentification	<OrgId>	[1..1]	
4.1.321	Or}	PrivateIdentification	<PrvtId>	[1..1]	

4.1.313 OrganisationIdentification <OrgId>

Presence: [1..1]

*This message item is part of choice **4.1.312 Identification**.*

Definition: Unique and unambiguous way to identify an organisation.

Type: *This message item is composed of the following **OrganisationIdentification4** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.314		BICOrBEI	<BICOrBEI>	[0..1]	Identifier
4.1.315		Other	<Othr>	[0..n]	

4.1.314 BICOrBEI <BICOrBEI>

Presence: [0..1]

Definition: Code allocated to organisations by the ISO 9362 Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).
The Ba

Data Type: AnyBICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): AnyBIC
Only a valid BIC or BEI is allowed. Valid BEI and BIC are registered with the ISO 9362 Registration Authority, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

4.1.315 Other <Othr>

Presence: [0..n]
Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following* ***GenericOrganisationIdentification1*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.316		Identification	<Id>	[1..1]	Text
4.1.317		SchemeName	<SchmeNm>	[0..1]	
4.1.320		Issuer	<Issr>	[0..1]	Text

4.1.316 Identification <Id>

Presence: [1..1]
Definition: Identification assigned by an institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.317 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following* ***OrganisationIdentificationSchemeName1Choice*** *element (s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.318	{Or	Code	<Cd>	[1..1]	Code
4.1.319	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.318 Code <Cd>

Presence: [1..1]
This message item is part of choice ***4.1.317 SchemeName****.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalOrganisationIdentification1Code
Format: maxLength: 4
minLength: 1

4.1.319 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **4.1.317 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.320 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.321 PrivateIdentification <PrvtId>

Presence: [1..1]
*This message item is part of choice **4.1.312 Identification**.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification5** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.322		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
4.1.327		Other	<Othr>	[0..n]	

4.1.322 DateAndPlaceOfBirth <DtAndPlcOfBirth>

Presence: [0..1]
Definition: Date and place of birth of a person.
Type: *This message item is composed of the following **DateAndPlaceOfBirth** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.323		BirthDate	<BirthDt>	[1..1]	DateTime
4.1.324		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
4.1.325		CityOfBirth	<CityOfBirth>	[1..1]	Text
4.1.326		CountryOfBirth	<CtryOfBirth>	[1..1]	Code

4.1.323 BirthDate <BirthDt>

Presence: [1..1]
Definition: Date on which a person is born.
Data Type: ISODate

4.1.324 ProvinceOfBirth <PrvcOfBirth>

Presence: [0..1]
Definition: Province where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.325 CityOfBirth <CityOfBirth>

Presence: [1..1]
Definition: City where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.326 CountryOfBirth <CtryOfBirth>

Presence: [1..1]
Definition: Country where a person was born.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.327 Other <Othr>

Presence: [0..n]
Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following **GenericPersonIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.328		Identification	<Id>	[1..1]	Text
4.1.329		SchemeName	<SchmeNm>	[0..1]	
4.1.332		Issuer	<Issr>	[0..1]	Text

4.1.328 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.329 SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

Type: *This message item is composed of one of the following* ***PersonIdentificationSchemeName1Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.330	{Or	Code	<Cd>	[1..1]	Code
4.1.331	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.330 Code <Cd>

Presence: [1..1]

This message item is part of choice ***4.1.329 SchemeName****.*

Definition: Name of the identification scheme, in a coded form as published in an external list.

Data Type: ExternalPersonIdentification1Code

Format: maxLength: 4
minLength: 1

4.1.331 Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice ***4.1.329 SchemeName****.*

Definition: Name of the identification scheme, in a free text form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.332 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.333 CountryOfResidence <CtryOfRes>

Presence: [0..1]

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

4.1.334 ContactDetails <CtctDtls>

Presence: [0..1]

Definition: Set of elements used to indicate how to contact the party.

Type: *This message item is composed of the following* ***ContactDetails2*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.335		NamePrefix	<NmPrfx>	[0..1]	Code
4.1.336		Name	<Nm>	[0..1]	Text
4.1.337		PhoneNumber	<PhneNb>	[0..1]	Text
4.1.338		MobileNumber	<MobNb>	[0..1]	Text
4.1.339		FaxNumber	<FaxNb>	[0..1]	Text
4.1.340		EmailAddress	<EmailAdr>	[0..1]	Text
4.1.341		Other	<Othr>	[0..1]	Text

4.1.335 NamePrefix <NmPrfx>

Presence: [0..1]
Definition: Specifies the terms used to formally address a person.
Data Type: Code
When this message item is present, one of the following ***NamePrefix1Code*** *values must be used:*

Code	Name	Definition
DOCT	Doctor	Title of the person is Doctor or Dr.
MADM	Madam	Title of the person is Madam.
MISS	Miss	Title of the person is Miss.
MIST	Mister	Title of the person is Mister or Mr.

4.1.336 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

4.1.337 PhoneNumber <PhneNb>

Presence: [0..1]
Definition: Collection of information that identifies a phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.338 MobileNumber <MobNb>

Presence: [0..1]
Definition: Collection of information that identifies a mobile phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.339 FaxNumber <FaxNb>

Presence: [0..1]
Definition: Collection of information that identifies a FAX number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

4.1.340 EmailAddress <EmailAdr>

Presence: [0..1]
Definition: Address for electronic mail (e-mail).
Data Type: Max2048Text
Format: maxLength: 2048
minLength: 1

4.1.341 Other <Othr>

Presence: [0..1]
Definition: Contact details in an other form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

4.1.342 ReferredDocument <RfrdDoc>

Presence: [0..1]
Definition: Set of elements used to provide information to identify the underlying documents associated with the mandate.
Type: *This message item is composed of the following **ReferredDocumentInformation3** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.343		Type	<Tp>	[0..1]	
4.1.348		Number	<Nb>	[0..1]	Text
4.1.349		RelatedDate	<RltdDt>	[0..1]	DateTime

4.1.343 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of referred document.
Type: *This message item is composed of the following **ReferredDocumentType2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.344		CodeOrProprietary	<CdOrPrtry>	[1..1]	
4.1.347		Issuer	<Issr>	[0..1]	Text

4.1.344 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]

Definition: Provides the type details of the referred document.

Type: *This message item is composed of one of the following* ***ReferredDocumentType1Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.345	{Or	Code	<Cd>	[1..1]	Code
4.1.346	Or}	Proprietary	<Prtry>	[1..1]	Text

4.1.345 Code <Cd>

Presence: [1..1]

This message item is part of choice ***4.1.344 CodeOrProprietary****.*

Definition: Document type in a coded form.

Data Type: Code

One of the following ***DocumentType5Code*** *values must be used:*

Code	Name	Definition
AROI	AccountReceivableOpenItem	Document is a payment that applies to a specific source document.
BOLD	BillOfLading	Document is a shipping notice.
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.
TSUT	TradeServicesUtilityTransaction	Document is a transaction identifier as assigned by the Trade Services Utility.
VCHR	Voucher	Document is an electronic payment document.

4.1.346 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **4.1.344 CodeOrProprietary**.*

Definition: Proprietary identification of the type of the remittance document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.347 Issuer <Issr>

Presence: [0..1]

Definition: Identification of the issuer of the reference document type.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.348 Number <Nb>

Presence: [0..1]

Definition: Unique and unambiguous identification of the referred document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.349 RelatedDate <RltdDt>

Presence: [0..1]

Definition: Date associated with the referred document.

Data Type: ISODate

5 Miscellaneous

5.1 OriginalMessageInformation1

***OriginalMessageInformation1** is used in message definition **MandateAcceptanceReportV01** p.75, message definition **MandateAmendmentRequestV01** p.33, message definition **MandateCancellationRequestV01** p.62.*

Definition: Unique identification, as assigned by the original instructing party, to unambiguously identify the message.

Type: *The following **OriginalMessageInformation1** element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.0		MessageIdentification	<MsgId>	[1..1]	Text
5.1.1		MessageNameIdentification	<MsgNmId>	[1..1]	Text
5.1.2		CreationDateTime	<CreDtTm>	[0..1]	DateTime

5.1.0 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the original initiating party, to unambiguously identify the original mandate request message.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.1 MessageNameIdentification <MsgNmId>

Presence: [1..1]
Definition: Specifies the message name identifier to which the message refers.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.2 CreationDateTime <CreDtTm>

Presence: [0..1]
Definition: Date and time at which the message was created.
Data Type: ISODateTime

6 Party identification

6.1 PartyIdentification32

PartyIdentification32 *is used in message definition* ***MandateAcceptanceReportV01*** *p.75, message definition* ***MandateAmendmentRequestV01*** *p.33, p.33, p.34, p.34, p.34, p.34, p.34, message definition* ***MandateCancellationRequestV01*** *p.62, p.62, message definition* ***MandateInitiationRequestV01*** *p.9, p.9, p.9, p.9, p.9, p.10.*

Definition: Set of elements used to identify a person or an organisation.
Type: *The following* ***PartyIdentification32*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.0		Name	<Nm>	[0..1]	Text
6.1.1		PostalAddress	<PstlAdr>	[0..1]	
6.1.2		AddressType	<AdrTp>	[0..1]	Code
6.1.3		Department	<Dept>	[0..1]	Text
6.1.4		SubDepartment	<SubDept>	[0..1]	Text
6.1.5		StreetName	<StrtNm>	[0..1]	Text
6.1.6		BuildingNumber	<BldgNb>	[0..1]	Text
6.1.7		PostCode	<PstCd>	[0..1]	Text
6.1.8		TownName	<TwnNm>	[0..1]	Text
6.1.9		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
6.1.10		Country	<Ctry>	[0..1]	Code
6.1.11		AddressLine	<AdrLine>	[0..7]	Text
6.1.12		Identification	<Id>	[0..1]	
6.1.13	{Or	OrganisationIdentification	<OrgId>	[1..1]	
6.1.14		BICOrBEI	<BICOrBEI>	[0..1]	Identifier

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.15		Other	<Othr>	[0..n]	
6.1.16		Identification	<Id>	[1..1]	Text
6.1.17		SchemeName	<SchmeNm>	[0..1]	
6.1.18	{{Or	Code	<Cd>	[1..1]	Code
6.1.19	Or}}	Proprietary	<Prtry>	[1..1]	Text
6.1.20		Issuer	<Issr>	[0..1]	Text
6.1.21	Or}	PrivateIdentification	<PrvtId>	[1..1]	
6.1.22		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
6.1.23		BirthDate	<BirthDt>	[1..1]	DateTime
6.1.24		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
6.1.25		CityOfBirth	<CityOfBirth>	[1..1]	Text
6.1.26		CountryOfBirth	<CtryOfBirth>	[1..1]	Code
6.1.27		Other	<Othr>	[0..n]	
6.1.28		Identification	<Id>	[1..1]	Text
6.1.29		SchemeName	<SchmeNm>	[0..1]	
6.1.30	{{Or	Code	<Cd>	[1..1]	Code
6.1.31	Or}}	Proprietary	<Prtry>	[1..1]	Text
6.1.32		Issuer	<Issr>	[0..1]	Text
6.1.33		CountryOfResidence	<CtryOfRes>	[0..1]	Code
6.1.34		ContactDetails	<CtctDtls>	[0..1]	
6.1.35		NamePrefix	<NmPrfx>	[0..1]	Code
6.1.36		Name	<Nm>	[0..1]	Text
6.1.37		PhoneNumber	<PhneNb>	[0..1]	Text
6.1.38		MobileNumber	<MobNb>	[0..1]	Text
6.1.39		FaxNumber	<FaxNb>	[0..1]	Text
6.1.40		EmailAddress	<EmailAdr>	[0..1]	Text
6.1.41		Other	<Othr>	[0..1]	Text

6.1.0 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

6.1.1 PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following* ***PostalAddress6*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.2		AddressType	<AdrTp>	[0..1]	Code
6.1.3		Department	<Dept>	[0..1]	Text
6.1.4		SubDepartment	<SubDept>	[0..1]	Text
6.1.5		StreetName	<StrtNm>	[0..1]	Text
6.1.6		BuildingNumber	<BldgNb>	[0..1]	Text
6.1.7		PostCode	<PstCd>	[0..1]	Text
6.1.8		TownName	<TwnNm>	[0..1]	Text
6.1.9		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
6.1.10		Country	<Ctry>	[0..1]	Code
6.1.11		AddressLine	<AdrLine>	[0..7]	Text

6.1.2 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
When this message item is present, one of the following ***AddressType2Code*** *values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

6.1.3 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

6.1.4 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70

minLength: 1

6.1.5 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

6.1.6 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

6.1.7 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

6.1.8 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.9 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]
Definition: Identifies a subdivision of a country such as state, region, county.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.10 Country <Ctry>

Presence: [0..1]
Definition: Nation with its own government.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

6.1.11 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

6.1.12 Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Type: *This message item is composed of one of the following **Party6Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.13	{Or	OrganisationIdentification	<OrgId>	[1..1]	
6.1.21	Or}	PrivateIdentification	<PrvtId>	[1..1]	

6.1.13 OrganisationIdentification <OrgId>

Presence: [1..1]

*This message item is part of choice **6.1.12 Identification**.*

Definition: Unique and unambiguous way to identify an organisation.

Type: *This message item is composed of the following **OrganisationIdentification4** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.14		BICOrBEI	<BICOrBEI>	[0..1]	Identifier
6.1.15		Other	<Othr>	[0..n]	

6.1.14 BICOrBEI <BICOrBEI>

Presence: [0..1]

Definition: Code allocated to organisations by the ISO 9362 Registration Authority, under an international identification scheme, as described in the latest version of the standard ISO 9362 Banking (Banking telecommunication messages, Bank Identifier Codes).
The Ba

Data Type: AnyBICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): AnyBIC
Only a valid BIC or BEI is allowed. Valid BEI and BIC are registered with the ISO 9362 Registration Authority, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: BANK CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The bank code, country code and location code are mandatory, while the branch code is optional.

6.1.15 Other <Othr>

Presence: [0..n]
Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following* ***GenericOrganisationIdentification1*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.16		Identification	<Id>	[1..1]	Text
6.1.17		SchemeName	<SchmeNm>	[0..1]	
6.1.20		Issuer	<Issr>	[0..1]	Text

6.1.16 Identification <Id>

Presence: [1..1]
Definition: Identification assigned by an institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.17 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following* ***OrganisationIdentificationSchemeName1Choice*** *element (s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.18	{Or	Code	<Cd>	[1..1]	Code
6.1.19	Or}	Proprietary	<Prtry>	[1..1]	Text

6.1.18 Code <Cd>

Presence: [1..1]
This message item is part of choice ***6.1.17 SchemeName****.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalOrganisationIdentification1Code
Format: maxLength: 4
minLength: 1

6.1.19 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***6.1.17 SchemeName****.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.20 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.21 PrivateIdentification <PrvtId>

Presence: [1..1]
*This message item is part of choice **6.1.12 Identification**.*
Definition: Unique and unambiguous identification of a person, eg, passport.
Type: *This message item is composed of the following **PersonIdentification5** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.22		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
6.1.27		Other	<Othr>	[0..n]	

6.1.22 DateAndPlaceOfBirth <DtAndPlcOfBirth>

Presence: [0..1]
Definition: Date and place of birth of a person.
Type: *This message item is composed of the following **DateAndPlaceOfBirth** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.23		BirthDate	<BirthDt>	[1..1]	DateTime
6.1.24		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
6.1.25		CityOfBirth	<CityOfBirth>	[1..1]	Text
6.1.26		CountryOfBirth	<CtryOfBirth>	[1..1]	Code

6.1.23 BirthDate <BirthDt>

Presence: [1..1]
Definition: Date on which a person is born.
Data Type: ISODate

6.1.24 ProvinceOfBirth <PrvcOfBirth>

Presence: [0..1]
Definition: Province where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.25 CityOfBirth <CityOfBirth>

Presence: [1..1]
Definition: City where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.26 CountryOfBirth <CtryOfBirth>

Presence: [1..1]
Definition: Country where a person was born.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

6.1.27 Other <Othr>

Presence: [0..n]
Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following **GenericPersonIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.28		Identification	<Id>	[1..1]	Text
6.1.29		SchemeName	<SchmeNm>	[0..1]	
6.1.32		Issuer	<Issr>	[0..1]	Text

6.1.28 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.29 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following **PersonIdentificationSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.30	{Or	Code	<Cd>	[1..1]	Code
6.1.31	Or}	Proprietary	<Prtry>	[1..1]	Text

6.1.30 Code <Cd>

Presence: [1..1]
*This message item is part of choice **6.1.29 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalPersonIdentification1Code
Format: maxLength: 4
minLength: 1

6.1.31 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **6.1.29 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.32 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

6.1.33 CountryOfResidence <CtryOfRes>

Presence: [0..1]
Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

6.1.34 ContactDetails <CtctDtls>

Presence: [0..1]
Definition: Set of elements used to indicate how to contact the party.
Type: *This message item is composed of the following **ContactDetails2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.35		NamePrefix	<NmPrfx>	[0..1]	Code
6.1.36		Name	<Nm>	[0..1]	Text
6.1.37		PhoneNumber	<PhneNb>	[0..1]	Text
6.1.38		MobileNumber	<MobNb>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
6.1.39		FaxNumber	<FaxNb>	[0..1]	Text
6.1.40		EmailAddress	<EmailAdr>	[0..1]	Text
6.1.41		Other	<Othr>	[0..1]	Text

6.1.35 NamePrefix <NmPrfx>

Presence: [0..1]
Definition: Specifies the terms used to formally address a person.
Data Type: Code
*When this message item is present, one of the following **NamePrefix1Code** values must be used:*

Code	Name	Definition
DOCT	Doctor	Title of the person is Doctor or Dr.
MADM	Madam	Title of the person is Madam.
MISS	Miss	Title of the person is Miss.
MIST	Mister	Title of the person is Mister or Mr.

6.1.36 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

6.1.37 PhoneNumber <PhneNb>

Presence: [0..1]
Definition: Collection of information that identifies a phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

6.1.38 MobileNumber <MobNb>

Presence: [0..1]
Definition: Collection of information that identifies a mobile phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

6.1.39 FaxNumber <FaxNb>

Presence: [0..1]
Definition: Collection of information that identifies a FAX number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

6.1.40 EmailAddress <EmailAdr>

Presence: [0..1]
Definition: Address for electronic mail (e-mail).
Data Type: Max2048Text
Format: maxLength: 2048
minLength: 1

6.1.41 Other <Othr>

Presence: [0..1]
Definition: Contact details in an other form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

Indexes

Index of Message Items

A

AcceptanceResult: <AccptncRslt>
Message Definition MandateAcceptanceReportV01 75

Accepted: <Accptd>
Message Definition MandateAcceptanceReportV01 75

AdditionalInformation: <AddtlInf>
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62

AdditionalRejectReasonInformation: <AddtlRjctRsnInf>
Message Definition MandateAcceptanceReportV01 75

AddressLine: <AdrLine>
108, 108, 118, 119, 121, 121, 121, 123, 124, 125, 125, 203

AddressType: <AdrTp>
107, 108, 117, 119, 120, 121, 121, 122, 124, 125, 125, 203

AmendmentReason: <AmdmntRsn>
Message Definition MandateAmendmentRequestV01 33

Authorisation: <Authstn>
Message Definition MandateInitiationRequestV01 8
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 61
Message Definition MandateAcceptanceReportV01 74

B

BIC: <BIC>
107, 120, 124

BICOrBEI: <BICOrBEI>
118, 119, 122, 123, 125, 203

BirthDate: <BirthDt>
118, 119, 122, 123, 126, 204

BranchIdentification: <BrnchId>
108, 121, 125

BuildingNumber: <BldgNb>
107, 108, 117, 119, 120, 121, 121, 123, 124, 125, 125, 203

C

CancellationReason: <CxlRsn>
Message Definition MandateCancellationRequestV01 62

CityOfBirth: <CityOfBirth>
118, 119, 122, 123, 126, 204

ClearingSystemIdentification: <ClrSysId>
107, 120, 124

ClearingSystemMemberIdentification: <ClrSysMmbId>
107, 120, 124

Code: <Cd>
102, 103, 107, 108, 117, 117, 118, 118, 119, 119, 120, 120, 120, 121, 122, 122, 123, 123, 124, 124, 124, 125, 126, 126, 126, 204, 204
Message Definition MandateInitiationRequestV01 9, 9, 9, 10
Message Definition MandateAmendmentRequestV01 33, 33, 33, 33, 34
Message Definition MandateCancellationRequestV01 62, 62
Message Definition MandateAcceptanceReportV01 75, 75

CodeOrProprietary: <CdOrPrtry>
126
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

CollectionAmount: <ColltnAmt>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

ContactDetails: <CtctDtls>
118, 119, 122, 123, 126, 204

Country: <Ctry>
108, 108, 118, 119, 121, 121, 121, 123, 124, 125, 125, 203

CountryOfBirth: <CtryOfBirth>
118, 119, 122, 123, 126, 204

CountryOfResidence: <CtryOfRes>
118, 119, 122, 123, 126, 204

CountrySubDivision: <CtrySubDvsn>
108, 108, 118, 119, 121, 121, 121, 123, 124, 125, 125, 203

CreationDateTime: <CreDtTm>
202
Message Definition MandateInitiationRequestV01 8
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 61

Message Definition MandateAcceptanceReportV01 74

Creditor: <Cdtr>
118
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

CreditorAccount: <CdtrAcct>
120
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

CreditorAgent: <CdtrAgt>
120
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

CreditorSchemeIdentification: <CdtrSchmeId>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

Currency: <Ccy>
103, 120, 124

D

DateAndPlaceOfBirth: <DtAndPlcOfBirth>
118, 119, 122, 123, 126, 204

Debtor: <Dbtr>
122
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

DebtorAccount: <DbtrAcct>
124
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

DebtorAgent: <DbtrAgt>
124
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

Department: <Dept>
107, 108, 117, 119, 120, 121, 121, 122, 124, 125, 125, 203

Duration: <Drtn>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

E

EmailAddress: <EmailAdr>
118, 120, 122, 123, 126, 204

F

FaxNumber: <FaxNb>
118, 120, 122, 123, 126, 204

FinalCollectionDate: <FnlColltnDt>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

FinancialInstitutionIdentification: <FinInstnId>
107, 120, 124

FirstCollectionDate: <FrstColltnDt>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

Frequency: <Frqcy>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

FromDate: <FrDt>
107, 117

G

GroupHeader: <GrpHdr>
Message Definition MandateInitiationRequestV01 8
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 61
Message Definition MandateAcceptanceReportV01 74

I

IBAN: <IBAN>
102, 120, 124

Identification: <Id>
102, 102, 108, 108, 118, 118, 118, 119, 119, 119, 120, 120, 121, 121, 122, 122, 122, 123, 123, 123, 124, 124, 125, 125, 125, 126, 126, 203, 204, 204

InitiatingParty: <InitgPty>
Message Definition MandateInitiationRequestV01 9

Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

InstructedAgent: <InstdAgt>
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

InstructingAgent: <InstgAgt>
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

Issuer: <Issr>
103, 108, 118, 118, 119, 119, 120, 121, 122, 122, 123, 123, 124, 125, 126, 126, 126, 204, 204
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

L

LocalInstrument: <LclInstrm>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

M

Mandate: <Mndt>
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

MandateIdentification: <MndtId>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

MandateRequestIdentification: <MndtReqId>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

MaximumAmount: <MaxAmt>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

MemberIdentification: <MmbId>
107, 120, 124

MessageIdentification: <MsgId>
202
Message Definition MandateInitiationRequestV01 8
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 61
Message Definition MandateAcceptanceReportV01 74

MessageNameIdentification: <MsgNmId>
202

MobileNumber: <MobNb>
118, 120, 122, 123, 126, 204

N

Name: <Nm>
103, 107, 108, 117, 118, 118, 119, 120, 120, 121, 121, 122, 122, 123, 124, 124, 125, 125, 126, 203, 204

NamePrefix: <NmPrfx>
118, 119, 122, 123, 126, 204

Number: <Nb>
126
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

O

Occurrences: <Ocrncs>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

OrganisationIdentification: <OrgId>
118, 119, 122, 123, 125, 203

OriginalMandate: <OrgnlMndt>
Message Definition MandateAmendmentRequestV01 34, 34
Message Definition MandateCancellationRequestV01 62, 62
Message Definition MandateAcceptanceReportV01 75, 75

OriginalMandateIdentification: <OrgnlMndtId>
Message Definition MandateAmendmentRequestV01 34
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

OriginalMessageInformation: <OrgnlMsgInf>
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

Originator: <Orgtr>
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62

Other: <Othr>
102, 108, 118, 118, 118, 119, 119, 120, 120, 121, 122, 122, 122, 123, 123, 124, 124, 124, 125, 126, 126, 204, 204, 204

P

PhoneNumber: <PhneNb>
118, 120, 122, 123, 126, 204

PostalAddress: <PstlAdr>
107, 108, 117, 119, 120, 121, 121, 122, 124, 125, 125, 203

PostCode: <PstCd>
108, 108, 117, 119, 120, 121, 121, 123, 124, 125, 125, 203

PrivateIdentification: <PrvtId>
118, 119, 122, 123, 126, 204

Proprietary: <Prtry>
103, 103, 107, 108, 117, 117, 118, 118, 119, 119, 120, 120, 120, 121, 122, 122, 123, 123, 124, 124, 124, 125, 126, 126, 126, 204, 204
Message Definition MandateInitiationRequestV01 9, 9, 9, 10
Message Definition MandateAmendmentRequestV01 33, 33, 33, 33, 34
Message Definition MandateCancellationRequestV01 62, 62
Message Definition MandateAcceptanceReportV01 75, 75

ProvinceOfBirth: <PrvcOfBirth>
118, 119, 122, 123, 126, 204

R

Reason: <Rsn>
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62

ReferredDocument: <RfrdDoc>
126
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

RejectReason: <RjctRsn>
Message Definition MandateAcceptanceReportV01 75

RelatedDate: <RltdDt>
126
Message Definition MandateInitiationRequestV01 10

Message Definition MandateAmendmentRequestV01 34

S

SchemeName: <SchmeNm>
102, 108, 118, 118, 119, 119, 120, 121, 122, 122, 123, 123, 124, 125, 126, 126, 204, 204

SequenceType: <SeqTp>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

ServiceLevel: <SvcLvl>
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

StreetName: <StrtNm>
107, 108, 117, 119, 120, 121, 121, 123, 124, 125, 125, 203

SubDepartment: <SubDept>
107, 108, 117, 119, 120, 121, 121, 122, 124, 125, 125, 203

T

ToDate: <ToDt>
107, 117

TownName: <TwnNm>
108, 108, 118, 119, 120, 121, 121, 123, 124, 125, 125, 203

Type: <Tp>
103, 117, 120, 124, 126
Message Definition MandateInitiationRequestV01 9, 10
Message Definition MandateAmendmentRequestV01 33, 34

U

UltimateCreditor: <UltmtCdtr>
121
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

UltimateDebtor: <UltmtDbtr>
125
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

UnderlyingAcceptanceDetails: <UndrlygAccptncDtls>
Message Definition MandateAcceptanceReportV01 75

UnderlyingAmendmentDetails: <UndrlygAmdmntDtls>
Message Definition MandateAmendmentRequestV01 33

UnderlyingCancellationDetails: <UndrlygCxlDtls>
Message Definition MandateCancellationRequestV01 62

Index of XML tags

A

<Accptd>: Accepted
Message Definition MandateAcceptanceReportV01 75

<AccptncRslt>: AcceptanceResult
Message Definition MandateAcceptanceReportV01 75

<AddtlInf>: AdditionalInformation
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62

<AddtlRjctRsnInf>: AdditionalRejectReasonInformation
Message Definition MandateAcceptanceReportV01 75

<AdrLine>: AddressLine
108, 108, 118, 119, 121, 121, 121, 123, 124, 125, 125, 203

<AdrTp>: AddressType
107, 108, 117, 119, 120, 121, 121, 122, 124, 125, 125, 203

<AmdmntRsn>: AmendmentReason
Message Definition MandateAmendmentRequestV01 33

<Authstn>: Authorisation
Message Definition MandateInitiationRequestV01 8
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 61
Message Definition MandateAcceptanceReportV01 74

B

<BIC>: BIC
107, 120, 124

<BICOrBEI>: BICOrBEI
118, 119, 122, 123, 125, 203

<BirthDt>: BirthDate
118, 119, 122, 123, 126, 204

<BldgNb>: BuildingNumber
107, 108, 117, 119, 120, 121, 121, 123, 124, 125, 125, 203

<BrnchId>: BranchIdentification
108, 121, 125

C

<Ccy>: Currency
103, 120, 124

<Cd>: Code
102, 103, 107, 108, 117, 117, 118, 118, 119, 119, 120, 120, 120, 121, 122, 122, 123, 123, 124, 124, 124, 125, 126, 126, 126, 204, 204
Message Definition MandateInitiationRequestV01 9, 9, 9, 10
Message Definition MandateAmendmentRequestV01 33, 33, 33, 33, 34
Message Definition MandateCancellationRequestV01 62, 62
Message Definition MandateAcceptanceReportV01 75, 75

<CdOrPrtry>: CodeOrProprietary
126
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

<Cdtr>: Creditor
118
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

<CdtrAcct>: CreditorAccount
120
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

<CdtrAgt>: CreditorAgent
120
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

<CdtrSchmeId>: CreditorSchemeIdentification
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

<CityOfBirth>: CityOfBirth
118, 119, 122, 123, 126, 204

<ClrSysId>: ClearingSystemIdentification
107, 120, 124

<ClrSysMmbId>: ClearingSystemMemberIdentification
107, 120, 124

<ColltnAmt>: CollectionAmount

117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

<CreDtTm>: CreationDateTime
202
Message Definition MandateInitiationRequestV01 8
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 61
Message Definition MandateAcceptanceReportV01 74

<CtctDtls>: ContactDetails
118, 119, 122, 123, 126, 204

<Ctry>: Country
108, 108, 118, 119, 121, 121, 121, 123, 124, 125, 125, 203

<CtryOfBirth>: CountryOfBirth
118, 119, 122, 123, 126, 204

<CtryOfRes>: CountryOfResidence
118, 119, 122, 123, 126, 204

<CtrySubDvsn>: CountrySubDivision
108, 108, 118, 119, 121, 121, 121, 123, 124, 125, 125, 203

<CxlRsn>: CancellationReason
Message Definition MandateCancellationRequestV01 62

D

<Dbtr>: Debtor
122
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

<DbtrAcct>: DebtorAccount
124
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

<DbtrAgt>: DebtorAgent
124
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

<Dept>: Department
107, 108, 117, 119, 120, 121, 121, 122, 124, 125, 125, 203

<Drtn>: Duration
117
Message Definition MandateInitiationRequestV01 9

Message Definition MandateAmendmentRequestV01 34

<DtAndPlcOfBirth>: DateAndPlaceOfBirth
118, 119, 122, 123, 126, 204

E

<EmailAdr>: EmailAddress
118, 120, 122, 123, 126, 204

F

<FaxNb>: FaxNumber
118, 120, 122, 123, 126, 204

<FinInstnId>: FinancialInstitutionIdentification
107, 120, 124

<FnlColltnDt>: FinalCollectionDate
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

<FrDt>: FromDate
107, 117

<Frqcy>: Frequency
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

<FrstColltnDt>: FirstCollectionDate
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

G

<GrpHdr>: GroupHeader
Message Definition MandateInitiationRequestV01 8
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 61
Message Definition MandateAcceptanceReportV01 74

I

<IBAN>: IBAN
102, 120, 124

<Id>: Identification

102, 102, 108, 108, 118, 118, 118, 119, 119, 119, 120, 120, 121, 121, 122, 122, 122, 123, 123, 123, 124, 124, 125, 125, 125, 126, 126, 203, 204, 204

<InitgPty>: InitiatingParty
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

<InstdAgt>: InstructedAgent
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

<InstgAgt>: InstructingAgent
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

<Issr>: Issuer
103, 108, 118, 118, 119, 119, 120, 121, 122, 122, 123, 123, 124, 125, 126, 126, 126, 204, 204
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

L

<LclInstrm>: LocalInstrument
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

M

<MaxAmt>: MaximumAmount
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

<MmbId>: MemberIdentification
107, 120, 124

<Mndt>: Mandate
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

<MndtId>: MandateIdentification
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

<MndtReqId>: MandateRequestIdentification
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

<MobNb>: MobileNumber
118, 120, 122, 123, 126, 204

<MsgId>: MessageIdentification
202
Message Definition MandateInitiationRequestV01 8
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 61
Message Definition MandateAcceptanceReportV01 74

<MsgNmId>: MessageNameIdentification
202

N

<Nb>: Number
126
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

<Nm>: Name
103, 107, 108, 117, 118, 118, 119, 120, 120, 121, 121, 122, 122, 123, 124, 124, 125, 125, 126, 203, 204

<NmPrfx>: NamePrefix
118, 119, 122, 123, 126, 204

O

<Ocrncs>: Occurrences
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

<OrgId>: OrganisationIdentification
118, 119, 122, 123, 125, 203

<OrgnlMndt>: OriginalMandate
Message Definition MandateAmendmentRequestV01 34, 34
Message Definition MandateCancellationRequestV01 62, 62
Message Definition MandateAcceptanceReportV01 75, 75

<OrgnlMndtId>: OriginalMandateIdentification
Message Definition MandateAmendmentRequestV01 34
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

<OrgnlMsgInf>: OriginalMessageInformation
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

<Orgtr>: Originator
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62

<Othr>: Other
102, 108, 118, 118, 118, 119, 119, 120, 120, 121, 122, 122, 122, 123, 123, 124, 124, 124, 125, 126, 126, 204, 204, 204

P

<PhneNb>: PhoneNumber
118, 120, 122, 123, 126, 204

<Prtry>: Proprietary
103, 103, 107, 108, 117, 117, 118, 118, 119, 119, 120, 120, 120, 121, 122, 122, 123, 123, 124, 124, 124, 125, 126, 126, 126, 204, 204
Message Definition MandateInitiationRequestV01 9, 9, 9, 10
Message Definition MandateAmendmentRequestV01 33, 33, 33, 33, 34
Message Definition MandateCancellationRequestV01 62, 62
Message Definition MandateAcceptanceReportV01 75, 75

<PrvcOfBirth>: ProvinceOfBirth
118, 119, 122, 123, 126, 204

<PrvtId>: PrivateIdentification
118, 119, 122, 123, 126, 204

<PstCd>: PostCode
108, 108, 117, 119, 120, 121, 121, 123, 124, 125, 125, 203

<PstlAdr>: PostalAddress
107, 108, 117, 119, 120, 121, 121, 122, 124, 125, 125, 203

R

<RfrdDoc>: ReferredDocument
126
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

<RjctRsn>: RejectReason
Message Definition MandateAcceptanceReportV01 75

<RltdDt>: RelatedDate
126

Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

<Rsn>: Reason
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62

S

<SchmeNm>: SchemeName
102, 108, 118, 118, 119, 119, 120, 121, 122, 122, 123, 123, 124, 125, 126, 126, 204, 204

<SeqTp>: SequenceType
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

<StrtNm>: StreetName
107, 108, 117, 119, 120, 121, 121, 123, 124, 125, 125, 203

<SubDept>: SubDepartment
107, 108, 117, 119, 120, 121, 121, 122, 124, 125, 125, 203

<SvcLvl>: ServiceLevel
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

T

<ToDt>: ToDate
107, 117

<Tp>: Type
103, 117, 120, 124, 126
Message Definition MandateInitiationRequestV01 9, 10
Message Definition MandateAmendmentRequestV01 33, 34

<TwnNm>: TownName
108, 108, 118, 119, 120, 121, 121, 123, 124, 125, 125, 203

U

<UltmtCdtr>: UltimateCreditor
121
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

<UltmtDbtr>: UltimateDebtor
125
Message Definition MandateInitiationRequestV01 10

Message Definition MandateAmendmentRequestV01 34

<UndrlygAccptncDtls>: UnderlyingAcceptanceDetails
Message Definition MandateAcceptanceReportV01 75

<UndrlygAmdmntDtls>: UnderlyingAmendmentDetails
Message Definition MandateAmendmentRequestV01 33

<UndrlygCxlDtls>: UnderlyingCancellationDetails
Message Definition MandateCancellationRequestV01 62

Index of Message Item Types

A

AcceptanceResult6
Message Definition MandateAcceptanceReportV01 75

AccountIdentification4Choice
102, 120, 124

AccountSchemeName1Choice
102, 120, 124

ActiveCurrencyAndAmount
91
Message Definition MandateInitiationRequestV01 9, 9
Message Definition MandateAmendmentRequestV01 34, 34

ActiveCurrencyCode
93
Message Definition MandateInitiationRequestV01 9, 9
Message Definition MandateAmendmentRequestV01 34, 34

ActiveOrHistoricCurrencyAndAmount
92, 117, 117

ActiveOrHistoricCurrencyCode
94, 103, 117, 117, 120, 124

AddressType2Code
107, 108, 117, 119, 120, 121, 121, 122, 124, 125, 125, 203

AmendmentReasonInformation1
Message Definition MandateAmendmentRequestV01 33

AnyBICIdentifier
94, 118, 119, 122, 123, 125, 203

Authorisation1Choice
Message Definition MandateInitiationRequestV01 8
Message Definition MandateAmendmentRequestV01 33

Message Definition MandateCancellationRequestV01 61
Message Definition MandateAcceptanceReportV01 74

Authorisation1Code
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

B

BBANIdentifier
94

BEIIdentifier
95

BICIdentifier
95, 107, 120, 124

BranchAndFinancialInstitutionIdentification4
107, 120, 124
Message Definition MandateInitiationRequestV01 9, 9, 9, 9
Message Definition MandateAmendmentRequestV01 33, 33, 34, 34
Message Definition MandateCancellationRequestV01 62, 62
Message Definition MandateAcceptanceReportV01 75, 75

BranchData2
108, 121, 125

C

CancellationReasonInformation2
Message Definition MandateCancellationRequestV01 62

CashAccount16
102, 120, 124
Message Definition MandateInitiationRequestV01 9, 9
Message Definition MandateAmendmentRequestV01 34, 34

CashAccountType2
103, 120, 124

CashAccountType4Code
103, 120, 124

CHIPSUniversalIdentifier
95

ClearingSystemIdentification2Choice
107, 120, 124

ClearingSystemMemberIdentification2
107, 120, 124

ContactDetails2
118, 119, 122, 123, 126, 204

CountryCode
95, 108, 108, 118, 118, 118, 119, 119, 119, 121, 121, 121, 122, 122, 123, 123, 123, 124, 125, 125, 126, 126, 203, 204, 204

CurrencyAndAmount
92

CurrencyCode
96

D

DateAndPlaceOfBirth
118, 119, 122, 123, 126, 204

DatePeriodDetails1
106, 117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 34

DecimalNumber
99

DocumentType5Code
126
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

DunsIdentifier
96

E

EANGLNIdentifier
96

ExternalAccountIdentification1Code
96, 102, 120, 124

ExternalClearingSystemIdentification1Code
96, 107, 120, 124

ExternalCode
97

ExternalFinancialInstitutionIdentification1Code
97, 108, 121, 125

ExternalLocalInstrument1Code
97, 117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

ExternalMandateReason1Code
97
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

ExternalOrganisationIdentification1Code
97, 118, 119, 122, 123, 126, 204

ExternalPersonIdentification1Code
97, 118, 119, 122, 123, 126, 204

ExternalServiceLevel1Code
98, 117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

F

FinancialIdentificationSchemeName1Choice
108, 121, 125

FinancialInstitutionIdentification7
107, 120, 124

Frequency1Code
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

G

GenericAccountIdentification1
102, 120, 124

GenericFinancialIdentification1
108, 121, 124

GenericOrganisationIdentification1
118, 119, 122, 123, 125, 204

GenericPersonIdentification1

118, 119, 122, 123, 126, 204

GroupHeader31
Message Definition MandateInitiationRequestV01 8
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 61
Message Definition MandateAcceptanceReportV01 74

I

IBAN2007Identifier
98, 102, 120, 124

IBANIdentifier
98

IBEIIdentifier
98

ImpliedCurrencyAndAmount
92

ISODate
93, 107, 107, 117, 117, 117, 117, 118, 119, 122, 123, 126, 126, 204
Message Definition MandateInitiationRequestV01 9, 9, 10
Message Definition MandateAmendmentRequestV01 34, 34, 34

ISODateTime
93, 202
Message Definition MandateInitiationRequestV01 8
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 61
Message Definition MandateAcceptanceReportV01 74

ISOTime
93

L

LanguageCode
99

LocalInstrument2Choice
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

M

MandateAcceptance1
Message Definition MandateAcceptanceReportV01 75

MandateAmendment1
Message Definition MandateAmendmentRequestV01 33

MandateCancellation1
Message Definition MandateCancellationRequestV01 62

MandateInformation1
117
Message Definition MandateAmendmentRequestV01 34
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

MandateInformation2
Message Definition MandateInitiationRequestV01 9

MandateInformation3
Message Definition MandateAmendmentRequestV01 33

MandateOccurrences1
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

MandateReason1Choice
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

MandateTypeInformation1
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

Max1025Text
100

Max105Text
100
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

Max128Text
100
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

Max140Text
100, 107, 108, 117, 118, 118, 119, 120, 121, 121, 122, 122, 123, 124, 125, 125, 126, 203, 204

Max15NumericText
100

Max16Text
100, 107, 108, 108, 108, 117, 117, 119, 119, 120, 120, 121, 121, 121, 121, 123, 123, 124, 124, 125, 125, 125, 125, 203, 203

Max2048Text
100, 118, 120, 122, 123, 126, 204

Max256Text
101

Max34Text
101, 102, 120, 124

Max350Text
101

Max35Text
101, 103, 103, 103, 107, 107, 108, 108, 108, 108, 108, 108, 108, 108, 117, 117, 117, 117, 118, 118, 118, 118, 118, 118, 118, 118, 118, 118, 118, 118, 119, 119, 119, 119, 119, 119, 119, 119, 119, 119, 120, 120, 120, 120, 120, 120, 120, 121, 121, 121, 121, 121, 121, 121, 121, 121, 122, 122, 122, 122, 122, 122, 122, 122, 122, 123, 123, 123, 123, 123, 123, 123, 123, 123, 123, 124, 124, 124, 124, 124, 124, 124, 124, 125, 125, 125, 125, 125, 125, 125, 125, 126, 126, 126, 126, 126, 126, 126, 126, 126, 126, 126, 202, 202, 203, 203, 204, 204, 204, 204, 204, 204, 204, 204, 204
Message Definition MandateInitiationRequestV01 8, 9, 9, 9, 9, 10, 10, 10
Message Definition MandateAmendmentRequestV01 33, 33, 33, 33, 33, 33, 34, 34, 34, 34
Message Definition MandateCancellationRequestV01 61, 62, 62
Message Definition MandateAcceptanceReportV01 74, 75, 75

Max70Text
101, 103, 107, 107, 107, 108, 108, 108, 108, 108, 117, 117, 117, 118, 119, 119, 119, 119, 120, 120, 120, 120, 121, 121, 121, 121, 121, 121, 121, 121, 121, 122, 122, 123, 123, 124, 124, 124, 124, 124, 125, 125, 125, 125, 125, 125, 125, 125, 203, 203, 203, 203

MICIdentifier
99

N

NamePrefix1Code
118, 119, 122, 123, 126, 204

NationalityCode
99

O

OrganisationIdentification4
118, 119, 122, 123, 125, 203

OrganisationIdentificationSchemeName1Choice
118, 119, 122, 123, 126, 204

OriginalMandate1Choice
Message Definition MandateAmendmentRequestV01 34
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

OriginalMessageInformation1
202
Message Definition MandateAmendmentRequestV01 33
Message Definition MandateCancellationRequestV01 62
Message Definition MandateAcceptanceReportV01 75

P

Party6Choice
118, 119, 122, 123, 125, 203

PartyIdentification32
117, 118, 121, 122, 125, 203
Message Definition MandateInitiationRequestV01 9, 9, 9, 9, 9, 10
Message Definition MandateAmendmentRequestV01 33, 33, 34, 34, 34, 34, 34
Message Definition MandateCancellationRequestV01 62, 62
Message Definition MandateAcceptanceReportV01 75

PercentageRate
99

PersonIdentification5
118, 119, 122, 123, 126, 204

PersonIdentificationSchemeName1Choice
118, 119, 122, 123, 126, 204

PhoneNumber
101, 118, 118, 118, 120, 120, 120, 122, 122, 122, 123, 123, 123, 126, 126, 126, 204, 204, 204

PostalAddress6
107, 108, 117, 119, 120, 121, 121, 122, 124, 125, 125, 203

R

ReferredDocumentInformation3
126
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

ReferredDocumentType1Choice
126

Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

ReferredDocumentType2
126
Message Definition MandateInitiationRequestV01 10
Message Definition MandateAmendmentRequestV01 34

S

SequenceType2Code
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

ServiceLevel8Choice
117
Message Definition MandateInitiationRequestV01 9
Message Definition MandateAmendmentRequestV01 33

U

UPICIdentifier
99

Y

YesNoIndicator
Message Definition MandateAcceptanceReportV01 75

Revision Record

Revision	Date	Author	Description	Sections affected
1.0	17/08/2009	ISO 20022 RA	Initial version	All
1.1	21/08/2009	ISO 20022 RA	Added "Message Functionality" sections	Message definition sections

Disclaimer:
Although the Registration Authority has used all reasonable efforts to ensure accuracy of the contents of the iso20022.org website and the information published thereon, the Registration Authority assumes no liability whatsoever for any inadvertent errors or omissions that may appear thereon. Moreover, the information is provided on an "as is" basis. The Registration Authority disclaims all warranties and conditions, either express or implied, including but not limited to implied warranties of merchantability, title, non-infringement and fitness for a particular purpose. The Registration Authority shall not be liable for any direct, indirect, special or consequential damages arising out of the use of the information published on the iso20022.org website, even if the Registration Authority has been advised of the possibility of such damages.

Intellectual Property Rights:
The ISO 20022 Message Definitions described in this document were contributed by SWIFT. The ISO 20022 IPR policy is available at www.ISO20022.org > Intellectual Property Rights Policy.

Copyright:
Copyright © S.W.I.F.T. SCRL ("SWIFT"), avenue Adèle 1, B-1310 La Hulpe, Belgium, or its licensors, 2009. All rights reserved. SWIFTStandards are licensed subject to the terms and conditions of the SWIFTStandards IPR Policy - End-User License Agreement, available at www.ISO20022.org > Intellectual Property Rights Policy > SWIFT.