ISO 20022

Payments Mandate - Maintenance 2012

Approved by the Payments SEG on 03 April 2012

Message Definition Report

Edition June 2012

Table Of Contents

Overview **1**
Scope 1
List of change requests 1
Message Flow **2**
Mandate scenarios 2
pain.009.001.02 MandateInitiationRequestV02 ..... **8**
Message Functionality 8
Structure 8
Rules and Guidelines 10
Message Items Description 11
Business Example 1 26
Business Example 2 28
Business Example 3 31
pain.010.001.02 MandateAmendmentRequestV02 ..... **34**
Message Functionality 34
Structure 34
Rules and Guidelines 38
Message Items Description 39
Business Example 1 66
Business Example 2 69
Business Example 3 71
pain.011.001.02 MandateCancellationRequestV02 ..... **75**
Message Functionality 75
Structure 75
Rules and Guidelines 77
Message Items Description 78
Business Example 1 95
Business Example 2 96
Business Example 3 98
pain.012.001.02 MandateAcceptanceReportV02 ..... **100**
Message Functionality 100
Structure 100
Rules and Guidelines 102
Message Items Description 103
Business Example 1 120
Business Example 2 121
Business Example 3 124
Message Item Types **128**
Data Types 128
End Points 145
Indexes **171**
Index of Message Items 171
Index of XML tags 180
Index of Message Item Types 189
Revision Record **201**

Overview

Scope

This document describes a set Mandate message definitions, defined in the Payments Initiation area, and approved by the ISO 20022 Payments Standards Evaluation Group as ISO 20022 messages on 03 April 2012, as a result of the Maintenance 2011/2012.
The messages were originally developed and approved in August 2009.
The messages can be exchanged between creditor and creditor agent or debtor and debtor agent AND between creditor agent and debtor agent as there is no clearing and settlement involved in the process flow.

This set includes the following message definitions:

Three mandate messages:

- **The MandateInitiationRequest message**: used to request the set-up of an instruction that allows the debtor agent to accept instructions from the creditor, through the creditor agent, to debit the account of the debtor (mandate);
- **The MandateAmendmentRequest message**: used to request the amendment of specific information in an existing mandate;
- **The MandateCancellationRequest message**: used to request the cancellation of an existing mandate.

One related messages

- **The MandateAcceptanceReport message**: used to respond on any of the MandateRequest messages, holding the confirmation of either acceptance or rejection of the request.

  Note: Where acceptance is part of the full process flow, a MandateRequest message only becomes valid after a confirmation of acceptance is received through a MandateAcceptanceReport message from the agent of the receiver.

List of change requests

A complete list of change requests with their approved implementation can be found in the Maintenance Change Request document, to be downloaded from the ISO 20022 website (www.iso20022.org) as follows:
- On the ISO 20022 website, go to Development and Maintenance > Status of Submissions section;
- Download the History Log document on line 63 MCR Payments Maintenance 2011/2012;
- Open the document and follow the link to download the Maintenance Change Request.

Message Flow

Mandate scenarios

Mandate Initiation Request

Introduction

The MandateInitiationRequest message is used to request the set-up of an instruction that allows the debtor agent to accept instructions from the creditor, through the creditor agent, to debit the account of the debtor. The MandateInitiationRequest message contains a single request to set-up one specific mandate. The initiator of a MandateInitiationRequest message can be either the debtor or the creditor.
The MandateInitiationRequest message is sent from the initiator of the request to his agent. The MandateInitiationRequest message is forwarded by the agent of the initiator to the agent of the counterparty.
The message flow of the MandateAcceptanceReport message has been included to illustrate the complete end-to-end process of the MandateInitiationRequest message.

A Mandate is identified through a unique identification, MandateIdentification. In the MandateInitiationRequest message at a minimum the MandateRequestIdentification must be present, to cater for those cases where at the point of sending a MandateInitiationRequest message the MandateIdentification is not yet available. Practice should be that if Mandate/MandateIdentification is available at the moment of sending the MandateInitiationRequest message then Mandate/Mandate Identification should be given. In this case Mandate/MandateRequestIdentification may be a copy of Mandate Identification.

Message Flows

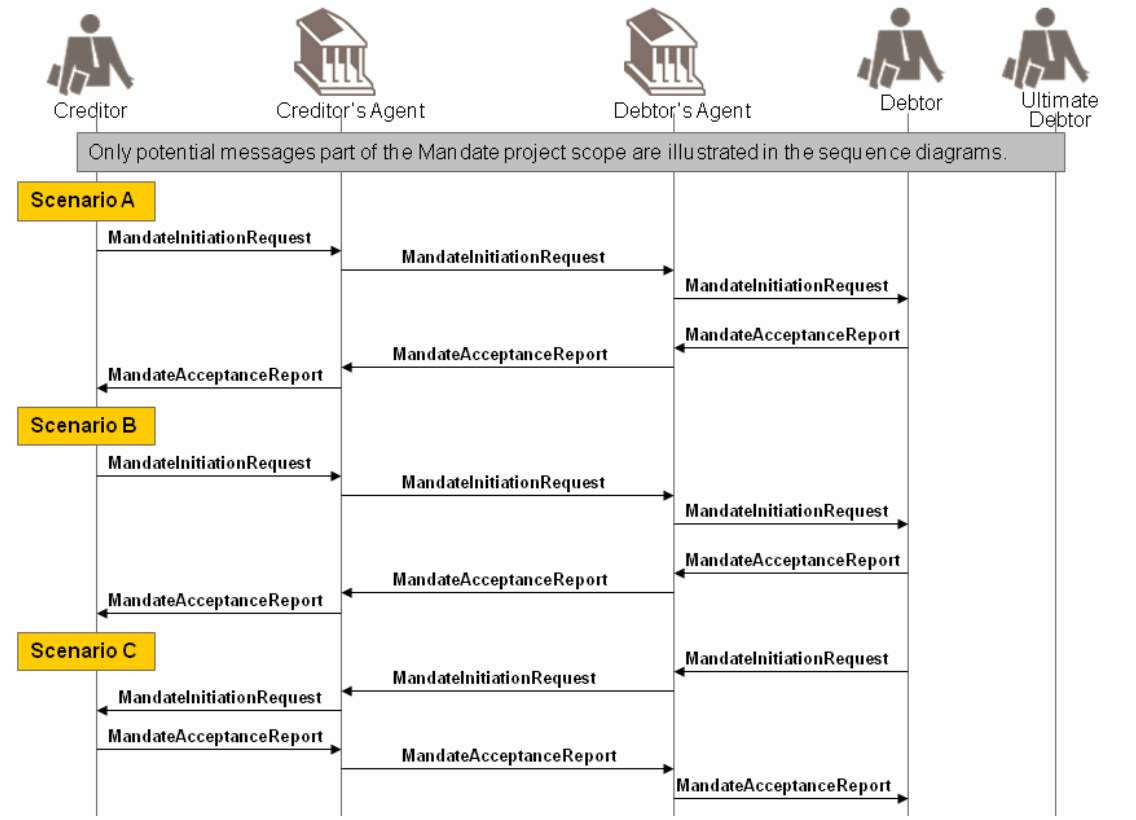

Scenario A:

One party playing the roles of initiating party, creditor and ultimate creditor and one party playing the roles of debtor and ultimate debtor.

Scenario B:

One party playing the roles of initiating party, creditor and ultimate creditor and one party playing role of debtor and a different party for the role of ultimate debtor.

Scenario C:

One party playing the roles of initiating party, debtor and ultimate debtor and one party playing the roles of creditor and ultimate creditor.

Narrative and Scenarios

The scenarios illustrate the different customer roles that can be played on the initiating side and receiving side of the MandateInitiationRequest message. These roles can be played by one and the same party, or they can be played by different parties.

Scenario A:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same as the party playing the role of creditor and ultimate creditor. The party playing the role of debtor is the same as the party playing the role of ultimate debtor. The debtor either accepts or rejects the MandateInitiationRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the creditor through the debtor agent and creditor agent.

Scenario B:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same party playing the role of creditor and ultimate creditor. One party is playing the role of debtor and the role of ultimate debtor is played by a different party. The debtor either accepts or rejects the MandateInitiationRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the creditor through the debtor agent and creditor agent.

Scenario C:

The message is sent by an initiating party to the debtor agent. The party playing the role of initiating party is the same as the party playing the role of debtor and ultimate debtor. The party playing the role of creditor is the same as the party playing the role of ultimate creditor. The creditor either accepts or rejects the MandateInitiationRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the debtor through the creditor agent and the debtor agent.

Mandate Amendment Request

Introduction

A MandateAmendmentRequest message is used to request the amendment of specific information in an existing mandate. The MandateAmendmentRequest message must reflect the new data of the element(s) to be amended and at a minimum the unique reference to the existing mandate. The MandateAmendmentRequest message contains a single request to amend one specific mandate.
The MandateAmendmentRequest message is sent from the initiator of the request to his agent. The MandateAmendmentRequest message is forwarded by the agent of the initiator to the agent of the counterparty.
The initiator of a MandateAmendmentRequest message can be either the debtor or the creditor and where appropriate the debtor agent.

The message flow of the MandateAcceptanceReport message has been included to illustrate the complete end-to-end process of the MandateAmendmentRequest message.

Message Flows

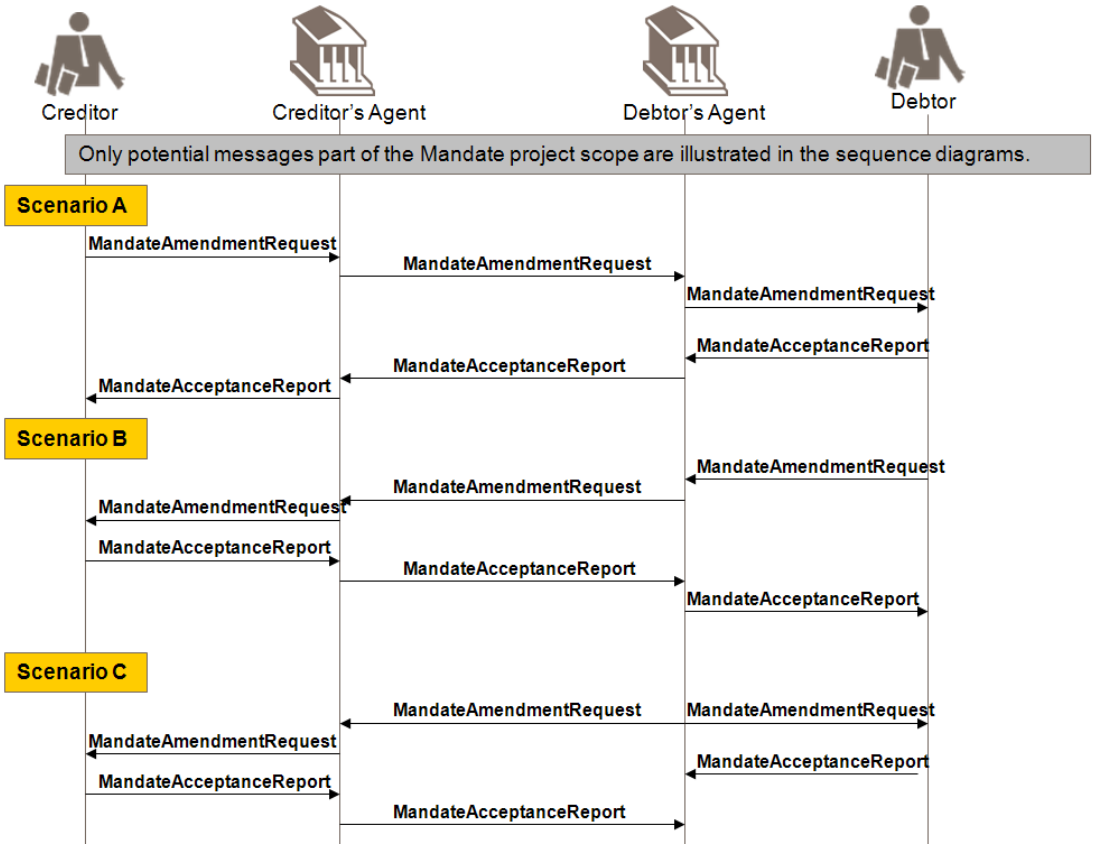

Scenario A:

One party playing the roles of initiating party, creditor and ultimate creditor and one party playing roles of debtor and ultimate debtor.

Scenario B:

One party playing the roles of initiating party, debtor and ultimate debtor and one party playing roles of creditor and ultimate creditor.

Scenario C:

One party playing the roles of initiating party and debtor bank.

Narrative and Scenarios

The scenarios illustrate the different customer roles that can be played on the initiating side and receiving side of the MandateAmendmentRequest message. These roles can be played by one and the same party, or they can be played by different parties.

Scenario A:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same as the party playing the role of creditor and ultimate creditor. The party playing the role of debtor is the same as the party playing the role of ultimate debtor. The debtor either accepts or rejects the MandateAmendmentRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the creditor through the debtor agent and creditor agent.

Scenario B:

The message is sent by an initiating party to the debtor agent. The party playing the role of initiating party is the same as the party playing the role of debtor and ultimate debtor. The party playing the role of creditor is the same as the party playing the role of ultimate creditor. The creditor either accepts or rejects the MandateAmendmentRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the debtor through the creditor agent and the debtor agent.

Scenario C:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same as the party playing the role of debtor agent. The debtor agent informs in this way that information owned by the debtor agent and essential to the mandate, such as structure of an account number, has changed. The creditor agent may confirm his response to this request through the MandateAcceptanceReport message which will be sent from the creditor agent to the debtor agent.

Mandate Cancellation Request

Introduction

A MandateCancellationRequest message is used to request the cancellation of an existing mandate. The MandateCancellationRequest message contains a single request to cancel one specific mandate.
The MandateCancellationRequest message is sent from the initiator of the request to his agent. The MandateCancellationRequest message is forwarded by the agent of the initiator to the agent of the counterparty. The initiator of a MandateCancellationRequest message can be either the debtor or the creditor.
The message flow of the MandateAcceptanceReport message has been included to illustrate the complete end-to-end process of the MandateCancellationRequest message.

Message Flows

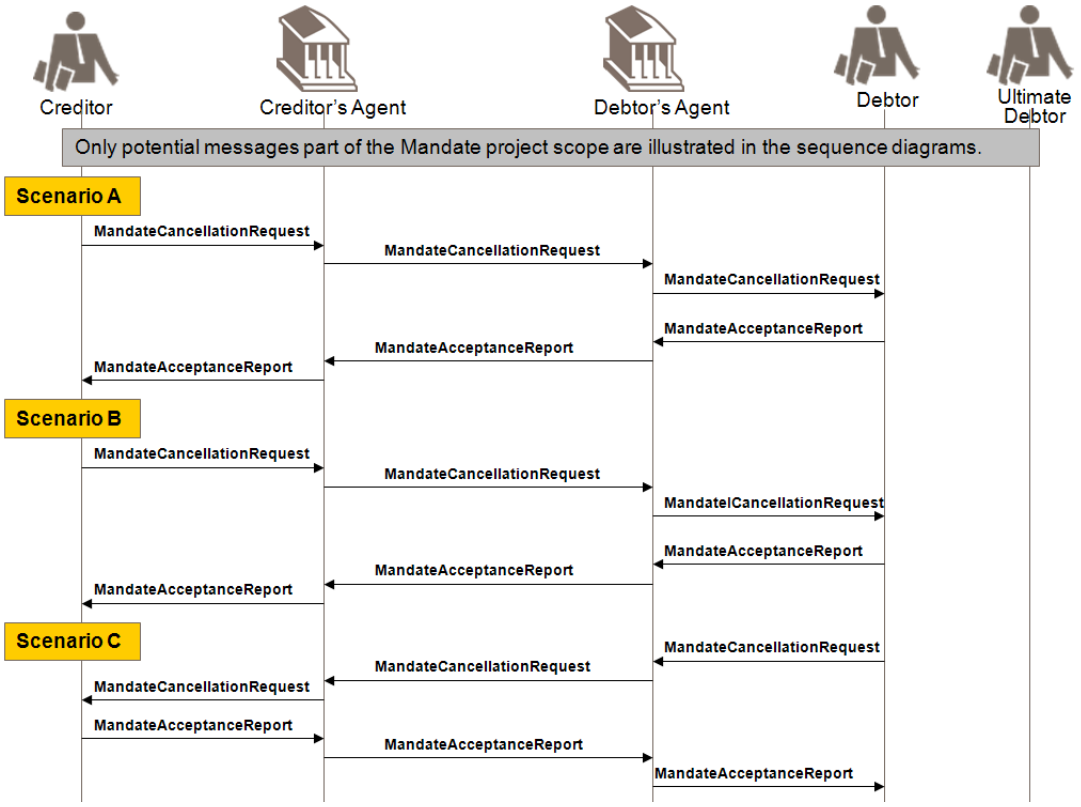

Scenario A:

One party playing the roles of initiating party, creditor and ultimate creditor and one party playing the roles of debtor and ultimate debtor.

Scenario B:

One party playing the roles of initiating party and creditor and of ultimate creditor and one party playing the roles of debtor and a different party for the role of ultimate debtor.

Scenario C:

One party playing the roles of initiating party, debtor and ultimate debtor and one party playing the roles of creditor and ultimate creditor.

Narrative and Scenarios

The scenarios illustrate the different customer roles that can be played on the initiating side and receiving side of the MandateCancellationRequest message. These roles can be played by one and the same party, or they can be played by different parties.

Scenario A:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same as the party playing the role of creditor and ultimate creditor. The party playing the role of debtor is the same as the party playing the role of ultimate debtor. The debtor either accepts or rejects the MandateCancellationRequest message

and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the creditor through the debtor agent and creditor agent.

Scenario B:

The message is sent by an initiating party to the creditor agent. The party playing the role of initiating party is the same party playing the role of creditor and ultimate creditor. One party is playing the role of debtor and another party is playing the role of ultimate debtor. The debtor either accepts or rejects the MandateCancellationRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the creditor through the debtor agent and creditor agent.

Scenario C:

The message is sent by an initiating party to the debtor agent. The party playing the role of initiating party is the same as the party playing the role of debtor and ultimate debtor. The party playing the role of creditor is the same as the party playing the role of ultimate creditor. The creditor either accepts or rejects the MandateCancellationRequest message and confirms this outcome through the MandateAcceptanceReport message which will be forwarded to the debtor through the creditor agent and the debtor agent.

Mandate Acceptance Report

Introduction

A MandateAcceptanceReport message is used to respond on any of the Mandate Request messages (initiation, amendment or cancellation) holding the confirmation of either acceptance or rejection of the request. The MandateAcceptanceReport message contains a single reply to one specific request.
The MandateAcceptanceReport message can be sent from the recipient or recipients agent to the agent of the initiator of the request. The MandateAcceptanceReport message can be forwarded by the agent of the initiator to the initiator of the Mandate Request message.

Narrative and Scenarios

The scenarios illustrate the different customer roles that can be played on the initiating side and receiving side of the MandateAcceptanceReport message. These roles can be played by one party, or they can be played by different parties.

Scenario A:

The message is sent by the debtor agent to the creditor agent. The debtor has rejected a MandateInitiationRequest message from the creditor.

Scenario B:

The message is sent by the creditor agent to the debtor agent. The creditor has accepted a MandateInitiationRequest message from the debtor.

Scenario C:

The message is sent by the debtor agent to the debtor. The creditor has accepted a MandateCancellationRequest message from the debtor.

pain.009.001.02 MandateInitiationRequestV02

Message Functionality

Scope

The MandateInitiationRequest message is sent by the initiator of the request to his agent. The initiator can either be the debtor or the creditor.
The MandateInitiationRequest message is forwarded by the agent of the initiator to the agent of the counterparty.
The MandateInitiationRequest message is used to set-up the instruction that allows the debtor agent to accept instructions from the creditor, through the creditor agent, to debit the account of the debtor.

Usage

The MandateInitiationRequest message can contain only one request to set-up one specific mandate.
The messages can be exchanged between creditor and creditor agent or debtor and debtor agent and between creditor agent and debtor agent.
The message can also be used by an initiating party that has authority to send the message on behalf of the creditor or debtor.
The MandateInitiationRequest message can be used in domestic and cross-border scenarios.

Outline

The MandateInitiationRequest message is composed of 2 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime, Authorisation.

B. Mandate

This building block is mandatory and present once. It contains elements that make up a mandate and allow for the set-up and/or recognition of transactions underlying to the mandate. These elements include, among others, MandateIdentification, Occurrences, CreditorSchemeIdentification, CollectionAmount.

Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<MndtInitnReq>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.4	{Or	Code	<Cd>	[1..1]	Code	
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text	
1.6		InitiatingParty	<InitgPty>	[0..1]	+	
1.7		InstructingAgent	<InstgAgt>	[0..1]	+	
1.8		InstructedAgent	<InstdAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		Mandate	<Mndt>	[1..1]		G1, G2
2.1		MandateIdentification	<MndtId>	[0..1]	Text	
2.2		MandateRequestIdentification	<MndtReqId>	[1..1]	Text	
2.3		Type	<Tp>	[0..1]		
2.4		ServiceLevel	<SvcLvl>	[0..1]		
2.5	{Or	Code	<Cd>	[1..1]	Code	
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.7		LocalInstrument	<LclInstrm>	[0..1]		
2.8	{Or	Code	<Cd>	[1..1]	Code	
2.9	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.10		Occurrences	<Ocrncs>	[0..1]		
2.11		SequenceType	<SeqTp>	[1..1]	Code	
2.12		Frequency	<Frqcy>	[0..1]	Code	
2.13		Duration	<Drtn>	[0..1]	+	
2.14		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	
2.15		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
2.16		CollectionAmount	<ColltnAmt>	[0..1]	Amount	R4, R5
2.17		MaximumAmount	<MaxAmt>	[0..1]	Amount	R4, R5
2.18		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
2.19		Creditor	<Cdtr>	[1..1]	+	
2.20		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.21		CreditorAgent	<CdtrAgt>	[0..1]	+	
2.22		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.23		Debtor	<Dbtr>	[1..1]	+	
2.24		DebtorAccount	<DbtrAcct>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.25		DebtorAgent	<DbtrAgt>	[1..1]	+	
2.26		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.27		ReferredDocument	<RfrdDoc>	[0..1]		
2.28		Type	<Tp>	[0..1]		
2.29		CodeOrProprietary	<CdOrPrtry>	[1..1]		
2.30	{Or	Code	<Cd>	[1..1]	Code	
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.32		Issuer	<Issr>	[0..1]	Text	
2.33		Number	<Nb>	[0..1]	Text	
2.34		RelatedDate	<RltdDt>	[0..1]	DateTime	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.0		SupplementaryData	<SplmtryData>	[0..*]		R8
3.1		PlaceAndName	<PlcAndNm>	[0..1]	Text	
3.2		Envelope	<Envlp>	[1..1]		
3.3		Contents	(User Defined)	[1..1]		

Rules and Guidelines

Rules

R1 Country

The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.160 for additional information.*

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.150 for additional information.*

R2 AnyBIC

Only a valid Business identifier code is allowed. Business identifier codes for financial or non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.160 for additional information.*

R3 BICFI
Valid BICs for financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.150 for additional information.*

R4 CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

R5 ActiveCurrency
The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.

R6 IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

*This Rule also impacts **CashAccount24** Type. Please refer to 'Message Item Types' section p.145 for additional information.*

R7 ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

*This Rule also impacts **CashAccount24** Type. Please refer to 'Message Item Types' section p.145 for additional information.*

R8 SupplementaryDataRule
This component may not be used without the explicit approval of a SEG and submission to the RA of ISO 20022 compliant structure(s) to be used in the Envelope element.

Guidelines

G1 UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

G2 UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

Message Items Description

*The following section identifies the elements of the **MandateInitiationRequestV02** message definition.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics to identify the message and parties playing a role in the mandate initiation, but which are not part of the mandate.

Type: *The **GroupHeader** block is composed of the following **GroupHeader47** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.3		Authorisation	<Authstn>	[0..2]	
1.6		InitiatingParty	<InitgPty>	[0..1]	+
1.7		InstructingAgent	<InstgAgt>	[0..1]	+
1.8		InstructedAgent	<InstdAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the instructed party, to unambiguously identify the message.
Usage: The instructing party has to make sure that MessageIdentification is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user key to be used to check the authority of the initiating party.

Usage: The content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios, payment initiations, payment returns or payment reversals that are initiated on behalf of a party different from the initiating party.

Type: *This message item is composed of one of the following **Authorisation1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.4	{Or	Code	<Cd>	[1..1]	Code
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

1.4 Code <Cd>

Presence: [1..1]

*This message item is part of choice **1.3 Authorisation**.*

Definition: Specifies the authorisation, in a coded form.

Data Type: Code

*One of the following **Authorisation1Code** values must be used:*

Code	Name	Definition
AUTH	PreAuthorisedFile	Indicates a file has been pre authorised or approved within the originating customer environment and no further approval is required.
FDET	FileLevelAuthorisationDetails	Indicates that a file requires additional file level approval, with the ability to view both the payment information block and supporting customer credit transaction detail.
FSUM	FileLevelAuthorisationSummary	Indicates that a file requires additional file level approval, with the ability to view only the payment information block level information.
ILEV	InstructionLevelAuthorisation	Indicates that a file requires all customer transactions to be authorised or approved.

1.5 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **1.3 Authorisation**.*

Definition: Specifies the authorisation, in a free text form.

Data Type: Max128Text

Format: maxLength: 128
minLength: 1

1.6 InitiatingParty <InitgPty>

Presence: [0..1]

Definition: Party that initiates the mandate message.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

1.7 InstructingAgent <InstgAgt>

Presence: [0..1]

Definition: Agent that instructs the next party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructing agent is the party sending the amendment and cancellation request message and not the party that sent the original mandate initiation request message.
In case of acceptance report message, the instructing agent is the party sending the acceptance report message and not the party that sent the original mandate request message.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.150 in 'Message Item Types' section.*

1.8 InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructed agent is the party receiving the amendment and cancellation request message and not the party that received the original mandate initiation request message.
In case of acceptance report message, the instructed agent is the party receiving the acceptance report message and not the party that received the original mandate request message.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.150 in 'Message Item Types' section.*

2.0 Mandate <Mndt>

Presence: [1..1]

Impacted by: G1, G2

Definition: Set of elements used to provide the details of the mandate signed between the (ultimate) creditor and the (ultimate) debtor.

Type: *The **Mandate** block is composed of the following **Mandate2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		MandateIdentification	<MndtId>	[0..1]	Text

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.2		MandateRequestIdentification	<MndtReqId>	[1..1]	Text
2.3		Type	<Tp>	[0..1]	
2.10		Occurrences	<Ocrncs>	[0..1]	
2.16		CollectionAmount	<ColltnAmt>	[0..1]	Amount
2.17		MaximumAmount	<MaxAmt>	[0..1]	Amount
2.18		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
2.19		Creditor	<Cdtr>	[1..1]	+
2.20		CreditorAccount	<CdtrAcct>	[0..1]	+
2.21		CreditorAgent	<CdtrAgt>	[0..1]	+
2.22		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.23		Debtor	<Dbtr>	[1..1]	+
2.24		DebtorAccount	<DbtrAcct>	[0..1]	+
2.25		DebtorAgent	<DbtrAgt>	[1..1]	+
2.26		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.27		ReferredDocument	<RfrdDoc>	[0..1]	

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.1 MandateIdentification <MndtId>

Presence: [0..1]
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.2 MandateRequestIdentification <MndtReqId>

Presence: [1..1]
Definition: Identification for the mandate request, as assigned by the initiating party.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.3 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of mandate, such as paper, electronic or scheme.
Type: *This message item is composed of the following **MandateTypeInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.4		ServiceLevel	<SvcLvl>	[0..1]	
2.7		LocalInstrument	<LclInstrm>	[0..1]	

2.4 ServiceLevel <SvcLvl>

Presence: [0..1]

Definition: Agreement under which or rules under which the mandate resides.

Type: *This message item is composed of one of the following **ServiceLevel8Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.5	{Or	Code	<Cd>	[1..1]	Code
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text

2.5 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.4 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as published in an external service level code list.

Data Type: ExternalServiceLevel1Code

Format: maxLength: 4
minLength: 1

2.6 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.4 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.7 LocalInstrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.
Usage: This element is used to specify a local instrument, local clearing option and/or further qualify the service or service level.

Type: *This message item is composed of one of the following **LocalInstrument2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.8	{Or	Code	<Cd>	[1..1]	Code
2.9	Or}	Proprietary	<Prtry>	[1..1]	Text

2.8 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.7 LocalInstrument**.*

Definition: Specifies the local instrument, as published in an external local instrument code list.

Data Type: ExternalLocalInstrument1Code

Format: maxLength: 35
minLength: 1

2.9 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.7 LocalInstrument**.*

Definition: Specifies the local instrument, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.10 Occurrences <Ocrncs>

Presence: [0..1]

Definition: Provides details of the duration of the mandate and occurrence of the underlying transactions.

Type: *This message item is composed of the following **MandateOccurrences2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.11		SequenceType	<SeqTp>	[1..1]	Code
2.12		Frequency	<Frqcy>	[0..1]	Code
2.13		Duration	<Drtn>	[0..1]	+
2.14		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
2.15		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime

2.11 SequenceType <SeqTp>

Presence: [1..1]

Definition: Identifies the underlying transaction sequence as either recurring or one-off.

Data Type: Code

*One of the following **SequenceType2Code** values must be used:*

Code	Name	Definition
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

2.12 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which instructions are to be created and processed.
Data Type: Code
*When this message item is present, one of the following **Frequency6Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
FRTN	Fortnightly	Event takes place every two weeks.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

2.13 Duration <Drtn>

Presence: [0..1]
Definition: Length of time for which the mandate remains valid.
Type: *This message item is composed of the following **DatePeriodDetails1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDate	<FrDt>	[1..1]	DateTime
	ToDate	<ToDt>	[0..1]	DateTime

*For additional Type information, please refer to **DatePeriodDetails1** p.149 in 'Message Item Types' section.*

2.14 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.
Data Type: ISODate

2.15 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.
Data Type: ISODate

2.16 CollectionAmount <ColltnAmt>

Presence: [0..1]
Impacted by: R4, R5

Definition: Fixed amount to be collected from the debtor's account.

Data Type: ActiveCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveCurrencyCode****.*

Format: **ActiveCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveCurrencyCode
ActiveCurrency
The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.

2.17 MaximumAmount <MaxAmt>

Presence: [0..1]

Impacted by: R4, R5

Definition: Maximum amount that may be collected from the debtor's account, per instruction.

Data Type: ActiveCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveCurrencyCode****.*

Format: **ActiveCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveCurrencyCode
ActiveCurrency
The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.

2.18 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]

Definition: Credit party that signs the mandate.

Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.19 Creditor <Cdtr>

Presence: [1..1]
Definition: Party that signs the mandate and to whom an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.20 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.
Type: *This message item is composed of the following **CashAccount24** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount24** p.145 in 'Message Item Types' section.*

2.21 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification5*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to ***BranchAndFinancialInstitutionIdentification5*** *p.150 in 'Message Item Types' section.*

2.22 UltimateCreditor <UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

For additional Type information, please refer to ***PartyIdentification43*** *p.160 in 'Message Item Types' section.*

2.23 Debtor <Dbtr>

Presence: [1..1]

Definition: Party that signs the mandate and owes an amount of money to the (ultimate) creditor.

Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

For additional Type information, please refer to ***PartyIdentification43*** *p.160 in 'Message Item Types' section.*

2.24 DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor, to which a debit entry will be made as a result of the transaction.

Type: *This message item is composed of the following* ***CashAccount24*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount24** p.145 in 'Message Item Types' section.*

2.25 DebtorAgent <DbtrAgt>

Presence: [1..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.150 in 'Message Item Types' section.*

2.26 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.27 ReferredDocument <RfrdDoc>

Presence: [0..1]
Definition: Provides information to identify the underlying documents associated with the mandate.
Type: *This message item is composed of the following **ReferredDocumentInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.28		Type	<Tp>	[0..1]	
2.33		Number	<Nb>	[0..1]	Text
2.34		RelatedDate	<RltdDt>	[0..1]	DateTime

2.28 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of referred document.
Type: *This message item is composed of the following **ReferredDocumentType2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.29		CodeOrProprietary	<CdOrPrtry>	[1..1]	
2.32		Issuer	<Issr>	[0..1]	Text

2.29 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]
Definition: Provides the type details of the referred document.
Type: *This message item is composed of one of the following **ReferredDocumentType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.30	{Or	Code	<Cd>	[1..1]	Code
2.31	Or}	Proprietary	<Prtry>	[1..1]	Text

2.30 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.29 CodeOrProprietary**.*
Definition: Document type in a coded form.
Data Type: Code
*One of the following **DocumentType5Code** values must be used:*

Code	Name	Definition
AROI	AccountReceivableOpenItem	Document is a payment that applies to a specific source document.
BOLD	BillOfLading	Document is a shipping notice.
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.

Code	Name	Definition
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.
TSUT	TradeServicesUtilityTransaction	Document is a transaction identifier as assigned by the Trade Services Utility.
VCHR	Voucher	Document is an electronic payment document.

2.31 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.29 CodeOrProprietary**.*
Definition: Proprietary identification of the type of the remittance document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.32 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the reference document type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.33 Number <Nb>

Presence: [0..1]
Definition: Unique and unambiguous identification of the referred document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.34 RelatedDate <RltdDt>

Presence: [0..1]
Definition: Date associated with the referred document.

Data Type: ISODate

3.0 SupplementaryData <SplmtryData>

Presence: [0..*]

Impacted by: R8

Definition: Additional information that cannot be captured in the structured elements and/or any other specific block.

Type: *The **SupplementaryData** block is composed of the following **SupplementaryData1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1		PlaceAndName	<PlcAndNm>	[0..1]	Text
3.2		Envelope	<Envlp>	[1..1]	

Rule(s): SupplementaryDataRule
This component may not be used without the explicit approval of a SEG and submission to the RA of ISO 20022 compliant structure(s) to be used in the Envelope element.

3.1 PlaceAndName <PlcAndNm>

Presence: [0..1]

Definition: Unambiguous reference to the location where the supplementary data must be inserted in the message instance.
In the case of XML, this is expressed by a valid XPath.

Data Type: Max350Text

Format: maxLength: 350
minLength: 1

3.2 Envelope <Envlp>

Presence: [1..1]

Definition: Technical element wrapping the supplementary data.

Type: *This message item is composed of the following **SupplementaryDataEnvelope1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.3		Contents	(User Defined)	[1..1]	

3.3 Contents (User Defined)

Presence: [1..1]

Definition: Technical element that specifies the supplementary data.

Type: (User Defined)

This content will be validated on a can do basis.

It may contain any XML structure.

Business Example 1

Narrative

On 9 June 2012, debtor Johnson purchases mobile phone services from creditor Jersey Mobile Phone. Debtor Johnson and creditor Jersey Mobile Phone agree that the services will be paid for via direct debit transactions in monthly payments for the amount calculated for a period of the past month, starting the first payment on 25 June 2012, from debtor account 5544732 at debtor agent FFFFUS91. It was agreed that the contract for these services will run until further notice.
Creditor Jersey Mobile Phone informs debtor Johnson that the mandate identification will only be available in their administration at the first collection, in the meantime creditor Jersey Mobile Phone will use the number Johns/005 as means of identification of the mandate. Debtor Johnson receives a contractual agreement document on 11 June 2012 with reference number JMP/24653 which holds, among others, detailed information on creditor account (76543) and creditor agent (DDDDUS31).
Creditor Jersey Mobile Phone sends a MandateInitiationRequest message to its account servicer, DDDDUS31.
DDDDUS31 forwards the MandateInitiationRequest message to the account servicer of debtor Johnson, FFFFUS91.

Business Description

MandateInitiationRequest message from Jersey Mobile Phone to DDDDUS31.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	BBBB654322
CreationDateTime	<CredDtTm>	2012-06-10T11:00:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Jersey Mobile Phone
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Virginia Lane
BuildingNumber	<BldgNb>	36
PostCode	<PstCd>	NJ 07311
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
Mandate	**<Mndt>**	
MandateRequestIdentification	<MndtReqId>	Johns/005
Occurrences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR
Frequency	<Frqcy>	MNTH
FirstCollectionDate	<FrstColltnDt>	2012-06-25
Creditor	<Cdtr>	
Name	<Nm>	Jersey Mobile Phone
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
Other	<Othr>	

Identification	<Id>	76543
CreditorAgent	<CdtrAcct>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	DDDDUS31
Debtor	<Dbtr>	
Name	<Nm>	Johnson
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	5544732
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	FFFFUS91
ReferredDocument	<RfrdDoc>	
Type	<Tp>	
CodeOrProprietary	<CdOrPrtry>	
Code	<Cd>	DISP
Number	<Nb>	JMP/24653
RelatedDate	<RltdDt>	2012-06-11

XML Instance


```
<MndtInitnReq>
    <GrpHdr>
      <MsgId>BBBB654322</MsgId>
      <CreDtTm>2012-06-10T11:00:00</CreDtTm>
      <InitgPty>
        <Nm>Jersey Mobile Phone</Nm>
        <PstlAdr>
          <StrtNm>Virginia Lane</StrtNm>
          <BldgNb>36</BldgNb>
          <PstCd>NJ 07311</PstCd>
          <TwnNm>Jersey City</TwnNm>
          <Ctry>US</Ctry>
        </PstlAdr>
      </InitgPty>
    </GrpHdr>
    <Mndt>
      <MndtReqId>Johns/005</MndtReqId>
      <Ocrncs>
        <SeqTp>RCUR</SeqTp>
        <Frqcy>MNTH</Frqcy>
        <FrstColltnDt>2012-06-25</FrstColltnDt>
      </Ocrncs>
      <Cdtr>
```

```
        <Nm>Jersey Mobile Phone</Nm>
      </Cdtr>
      <CdtrAcct>
        <Id>
          <Othr>
            <Id>76543</Id>
          </Othr>
        </Id>
      </CdtrAcct>
      <CdtrAgt>
        <FinInstnId>
          <BICFI>DDDDUS31</BICFI>
        </FinInstnId>
      </CdtrAgt>
      <Dbtr>
        <Nm>Johnson</Nm>
      </Dbtr>
      <DbtrAcct>
        <Id>
          <Othr>
            <Id>5544732</Id>
          </Othr>
        </Id>
      </DbtrAcct>
      <DbtrAgt>
        <FinInstnId>
          <BICFI>FFFFUS91</BICFI>
        </FinInstnId>
      </DbtrAgt>
      <RfrdDoc>
        <Tp>
          <CdOrPrtry>
            <Cd>DISP</Cd>
          </CdOrPrtry>
        </Tp>
        <Nb>JMP/24653</Nb>
        <RltdDt>2012-06-11</RltdDt>
      </RfrdDoc>
    </Mndt>
  </MndtInitnReq>
```


Business Example 2

Narrative

On 16 December 2011, debtor Schneider purchases goods from creditor Paris Solutions, on behalf of ultimate debtor Fischer. Debtor Schneider and creditor Paris Solutions agree that the purchased goods will be paid for via direct debit transactions in monthly payments of EUR 50 for a period of 10 months, starting the first payment on 4 February 2012, from debtor account DE89350700644570000 at debtor agent BBBBFR39.
Creditor Paris Solutions informs debtor Schneider that the number with which he will identify this agreement in his system is 09/345 this number will be quoted as the mandate identification. Debtor Schneider receives an electronic invoice with reference number DE-09/345/79801 which holds detailed information on the creditor account (FR1430041020030300015M02606) and the creditor agent (BBBBFR39).

Creditor Paris Solutions sends a MandateInitiationRequest message to its account servicer, BBBBFR39. BBBBFR39 forwards the MandateInitiationRequest message to the account servicer of debtor Schneider, AAAADE29.

Business Description

MandateInitiationRequest message from Paris Solutions to BBBBFR39.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	AAAA123456
CreationDateTime	<CredDtTm>	2011-12-16T14:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Paris Solutions
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Rue Dante
BuildingNumber	<BldgNb>	16
PostCode	<PstCd>	75004
TownName	<TwnNm>	Paris
Country	<Ctry>	FR
Mandate	**<Mndt>**	
MandateIdentification	<MndtId>	09/345
MandateRequestIdentification	<MndtReqId>	09/345
Type	<Tp>	
ServiceLevel	<SvcLvl>	
Code	<Cd>	SEPA
LocalInstrument	<LclInstrm>	
Code	<Cd>	CORE
Occurrences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR
Frequency	<Frqcy>	MNTH
FirstCollectionDate	<FrstColltnDt>	2012-02-04
FinalCollectionDate	<FnlColltnDt>	2012-11-04
CollectionAmount	<ClltnAmt>	EUR 50
Creditor	<Cdtr>	
Name	<Nm>	Paris Solutions
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	FR1430041020030300015M02606
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	

BICFI	<BICFI>	BBBBFR39
Debtor	<Dbtr>	
Name	<Nm>	Schneider
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	AAAADE29
Ultimate Debtor	<UltmDbtr	
Name	<Nm>	Fischer
ReferredDocument	<RfrdDoc>	
Number	<Nb>	DE-09/345/79801
RelatedDate	<RltdDt>	2011-12-16

XML Instance

```
<MndtInitnReq>
    <GrpHdr>
      <MsgId>AAAA123456</MsgId>
      <CreDtTm>2011-12-16T14:25:00</CreDtTm>
      <InitgPty>
        <Nm>Paris Solutions</Nm>
        <PstlAdr>
          <StrtNm>Rue Dante</StrtNm>
          <BldgNb>16</BldgNb>
          <PstCd>75004</PstCd>
          <TwnNm>Paris</TwnNm>
          <Ctry>FR</Ctry>
        </PstlAdr>
      </InitgPty>
    </GrpHdr>
    <Mndt>
      <MndtId>09/345</MndtId>
      <MndtReqId>09/345</MndtReqId>
      <Tp>
        <SvcLvl>
          <Cd>SEPA</Cd>
        </SvcLvl>
        <LclInstrm>
          <Cd>CORE</Cd>
        </LclInstrm>
      </Tp>
      <Ocrncs>
        <SeqTp>RCUR</SeqTp>
        <Frqcy>MNTH</Frqcy>
        <FrstColltnDt>2012-02-04</FrstColltnDt>
        <FnlColltnDt>2012-11-04</FnlColltnDt>
      </Ocrncs>
      <ColltnAmt Ccy="EUR">50</ColltnAmt>
      <Cdtr>
```

```
        <Nm>Paris Solutions</Nm>
      </Cdtr>
      <CdtrAcct>
        <Id>
          <IBAN>FR1430041020030300015M02606</IBAN>
        </Id>
      </CdtrAcct>
      <CdtrAgt>
        <FinInstnId>
          <BICFI>BBBBFR39</BICFI>
        </FinInstnId>
      </CdtrAgt>
      <Dbtr>
        <Nm>Schneider</Nm>
      </Dbtr>
      <DbtrAgt>
        <FinInstnId>
          <BICFI>AAAADE29</BICFI>
        </FinInstnId>
      </DbtrAgt>
      <UltmtDbtr>
        <Nm>Fischer</Nm>
      </UltmtDbtr>
      <RfrdDoc>
        <Nb>DE-09/345/79801</Nb>
        <RltdDt>2011-12-16</RltdDt>
      </RfrdDoc>
    </Mndt>
  </MndtInitnReq>
```


Business Example 3

Narrative

On 5 January 2012, debtor Gilles purchases goods from creditor Jones Inc. Debtor Gilles and creditor Jones Inc agree that the purchased goods will be paid for via a direct debit transaction in one payment of the total sum of EUR 1200, from debtor account FR1420063030070500 21M05405 at debtor agent JJJJFR35.
Creditor Jones Inc. informs debtor Gilles that the number with which he will identify this agreement in his system is 55513 this number will be quoted as the mandate identification.
Creditor Jones Inc. informs debtor Gilles on the details of its account (5566771) and agent (GGGGUS32). Debtor Gilles sends a MandateInitiationRequest message to its account servicer, JJJJFR35. JJJJFR35 forwards the MandateInitiationRequest message to the account servicer of creditor Jones and Son Inc., GGGGUS32.

Business Description

MandateInitiationRequest message from Gilles to JJJJFR35.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	BBA969789
CreationDateTime	<CredDtTm>	2012-01-06T16:25:00
InitiatingParty	<InitgPty>	

Name	<Nm>	Gilles
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Rue Cler
BuildingNumber	<BldgNb>	11
PostCode	<PstCd>	75005
TownName	<TwnNm>	Paris
Country	<Ctry>	FR
Mandate	**<Mndt>**	
MandateIdentification	<MndtId>	55513
MandateRequestIdentification	<MndtReqId>	55513
Type	<Tp>	
Occurrences	<Ocrncs>	
SequenceType	<SeqTp>	OOFF
Frequency	<Frqcy>	
CollectionAmount	<ClltnAmt>	EUR 1200
Creditor	<Cdtr>	
Name	<Nm>	Jones Inc
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	5566771
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	GGGGUS32
Debtor	<Dbtr>	
Name	<Nm>	Gilles
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	FR1420063030070500 21M05405
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	JJJJFR35

XML Instance

```
<MndtInitnReq>
    <GrpHdr>
      <MsgId>BBA969789</MsgId>
      <CreDtTm>2012-01-06T16:25:00</CreDtTm>
      <InitgPty>
```

```
            <Nm>Gilles</Nm>
            <PstlAdr>
                <StrtNm>Rue Cler</StrtNm>
                <BldgNb>11</BldgNb>
                <PstCd>75005</PstCd>
                <TwnNm>Paris</TwnNm>
                <Ctry>FR</Ctry>
            </PstlAdr>
        </InitgPty>
    </GrpHdr>
    <Mndt>
        <MndtId>55513</MndtId>
        <MndtReqId>55513</MndtReqId>
        <Ocrncs>
            <SeqTp>OOFF</SeqTp>
        </Ocrncs>
        <ColltnAmt Ccy="EUR">1200</ColltnAmt>
        <Cdtr>
            <Nm>Jones Inc.</Nm>
        </Cdtr>
        <CdtrAcct>
            <Id>
                <Othr>
                    <Id>5566771</Id>
                </Othr>
            </Id>
        </CdtrAcct>
        <CdtrAgt>
            <FinInstnId>
                <BICFI>GGGGUS32</BICFI>
            </FinInstnId>
        </CdtrAgt>
        <Dbtr>
            <Nm>Gilles</Nm>
        </Dbtr>
        <DbtrAcct>
            <Id>
                <IBAN>FR1420063030070500 21M05405</IBAN>
            </Id>
        </DbtrAcct>
        <DbtrAgt>
            <FinInstnId>
                <BICFI>JJJJFR35</BICFI>
            </FinInstnId>
        </DbtrAgt>
    </Mndt>
</MndtInitnReq>
```

pain.010.001.02 MandateAmendmentRequestV02

Message Functionality

Scope

The MandateAmendmentRequest message is sent by the initiator of the request to his agent and/or counterparty. The initiator can both be the debtor or the creditor (or where appropriate the debtor agent).
The MandateAmendmentRequest message is forwarded by the agent of the initiator to the agent of the counterparty.
A MandateAmendmentRequest message is used to request the amendment of specific information in an existing mandate. The MandateAmendmentRequest message must reflect the new data of the element(s) to be amended and at a minimum a unique reference to the existing mandate. If accepted, this MandateAmendmentRequest message together with the MandateAcceptanceReport message confirming the acceptance will be considered as a valid amendment on an existing mandate, agreed upon by all parties. The amended mandate will from then on be considered the valid mandate.

Usage

The MandateAmendmentRequest message can contain only one request to amend one specific mandate.
The messages can be exchanged between creditor and creditor agent or debtor and debtor agent and between creditor agent and debtor agent.
The message can also be used by an initiating party that has authority to send the message on behalf of the creditor or debtor.
The MandateAmendmentRequest message can be used in domestic and cross-border scenarios.
If all elements in the existing Mandate need to be amended or the underlying contract is different, then the MandateAmendmentRequest message should not be used. The existing Mandate has to be cancelled and a new Mandate has to be initiated.

Outline

The MandateAmendmentRequest message is composed of 2 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime, Authorisation.

B. Underlying Amendment Details

This building block is mandatory and present once. It contains elements that identify the existing mandate and reflects the data of the element(s) to be amended. These include, among others, OriginalMessageInformation, AmendmentReason, OriginalMandate.

Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<MndtAmdmntReq>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]		
1.4	{Or	Code	<Cd>	[1..1]	Code	
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text	
1.6		InitiatingParty	<InitgPty>	[0..1]	+	
1.7		InstructingAgent	<InstgAgt>	[0..1]	+	
1.8		InstructedAgent	<InstdAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		UnderlyingAmendmentDetails	<UndrlygAmdmntDtls>	[1..1]		
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	+	
2.2		AmendmentReason	<AmdmntRsn>	[1..1]		
2.3		Originator	<Orgtr>	[0..1]	+	
2.4		Reason	<Rsn>	[1..1]		
2.5	{Or	Code	<Cd>	[1..1]	Code	
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.7		AdditionalInformation	<AddtlInf>	[0..*]	Text	
2.8		Mandate	<Mndt>	[1..1]		G1, G2
2.9		MandateIdentification	<MndtId>	[1..1]	Text	
2.10		MandateRequestIdentification	<MndtReqId>	[0..1]	Text	
2.11		Type	<Tp>	[0..1]		
2.12		ServiceLevel	<SvcLvl>	[0..1]		
2.13	{Or	Code	<Cd>	[1..1]	Code	
2.14	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.15		LocalInstrument	<LclInstrm>	[0..1]		
2.16	{Or	Code	<Cd>	[1..1]	Code	
2.17	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.18		Occurrences	<Ocrncs>	[0..1]		
2.19		SequenceType	<SeqTp>	[1..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.20		Frequency	<Frqcy>	[0..1]	Code	
2.21		Duration	<Drtn>	[0..1]	+	
2.22		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	
2.23		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
2.24		CollectionAmount	<ColltnAmt>	[0..1]	Amount	R4, R5
2.25		MaximumAmount	<MaxAmt>	[0..1]	Amount	R4, R5
2.26		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
2.27		Creditor	<Cdtr>	[0..1]	+	
2.28		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.29		CreditorAgent	<CdtrAgt>	[0..1]	+	
2.30		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.31		Debtor	<Dbtr>	[0..1]	+	
2.32		DebtorAccount	<DbtrAcct>	[0..1]	+	
2.33		DebtorAgent	<DbtrAgt>	[0..1]	+	
2.34		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.35		ReferredDocument	<RfrdDoc>	[0..1]		
2.36		Type	<Tp>	[0..1]		
2.37		CodeOrProprietary	<CdOrPrtry>	[1..1]		
2.38	{Or	Code	<Cd>	[1..1]	Code	
2.39	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.40		Issuer	<Issr>	[0..1]	Text	
2.41		Number	<Nb>	[0..1]	Text	
2.42		RelatedDate	<RltdDt>	[0..1]	DateTime	
2.43		OriginalMandate	<OrgnlMndt>	[1..1]		
2.44	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text	
2.45	Or}	OriginalMandate	<OrgnlMndt>	[1..1]		G3, G4
2.46		MandateIdentification	<MndtId>	[1..1]	Text	
2.47		MandateRequestIdentification	<MndtReqId>	[0..1]	Text	
2.48		Type	<Tp>	[0..1]		
2.49		ServiceLevel	<SvcLvl>	[0..1]		
2.50	{{Or	Code	<Cd>	[1..1]	Code	
2.51	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.52		LocalInstrument	<LclInstrm>	[0..1]		
2.53	{{Or	Code	<Cd>	[1..1]	Code	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.54	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.55		Occurrences	<Ocrncs>	[0..1]		
2.56		SequenceType	<SeqTp>	[1..1]	Code	
2.57		Frequency	<Frqcy>	[0..1]	Code	
2.58		Duration	<Drtn>	[0..1]	+	
2.59		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	
2.60		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
2.61		CollectionAmount	<ColltnAmt>	[0..1]	Amount	R7, R8
2.62		MaximumAmount	<MaxAmt>	[0..1]	Amount	R7, R8
2.63		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
2.64		Creditor	<Cdtr>	[1..1]	+	
2.65		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.66		CreditorAgent	<CdtrAgt>	[0..1]	+	
2.67		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.68		Debtor	<Dbtr>	[1..1]	+	
2.69		DebtorAccount	<DbtrAcct>	[0..1]	+	
2.70		DebtorAgent	<DbtrAgt>	[1..1]	+	
2.71		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.72		ReferredDocument	<RfrdDoc>	[0..1]		
2.73		Type	<Tp>	[0..1]		
2.74		CodeOrProprietary	<CdOrPrtry>	[1..1]		
2.75	{{Or	Code	<Cd>	[1..1]	Code	
2.76	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.77		Issuer	<Issr>	[0..1]	Text	
2.78		Number	<Nb>	[0..1]	Text	
2.79		RelatedDate	<RltdDt>	[0..1]	DateTime	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.0		SupplementaryData	<SplmtryData>	[0..*]		R9
3.1		PlaceAndName	<PlcAndNm>	[0..1]	Text	
3.2		Envelope	<Envlp>	[1..1]		
3.3		Contents	(User Defined)	[1..1]		

Rules and Guidelines

Rules

R1 Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.160 for additional information.*

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.150 for additional information.*

R2 AnyBIC
Only a valid Business identifier code is allowed. Business identifier codes for financial or non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.160 for additional information.*

R3 BICFI
Valid BICs for financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.150 for additional information.*

R4 CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

R5 ActiveCurrency
The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.

R6 IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

*This Rule also impacts **CashAccount24** Type. Please refer to 'Message Item Types' section p.145 for additional information.*

R7 ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

*This Rule also impacts **CashAccount24** Type. Please refer to 'Message Item Types' section p.145 for additional information.*

R8 CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

R9 SupplementaryDataRule
This component may not be used without the explicit approval of a SEG and submission to the RA of ISO 20022 compliant structure(s) to be used in the Envelope element.

Guidelines

G1 UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

G2 UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

G3 UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

G4 UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

Message Items Description

*The following section identifies the elements of the **MandateAmendmentRequestV02** message definition.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics to identify the message and parties playing a role in the amendment of the mandate, but which are not part of the mandate.

Type: *The **GroupHeader** block is composed of the following **GroupHeader47** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	
1.6		InitiatingParty	<InitgPty>	[0..1]	+
1.7		InstructingAgent	<InstgAgt>	[0..1]	+
1.8		InstructedAgent	<InstdAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the instructed party, to unambiguously identify the message.
Usage: The instructing party has to make sure that MessageIdentification is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user key to be used to check the authority of the initiating party.

Usage: The content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios, payment initiations, payment returns or payment reversals that are initiated on behalf of a party different from the initiating party.

Type: *This message item is composed of one of the following **Authorisation1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.4	{Or	Code	<Cd>	[1..1]	Code
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

1.4 Code <Cd>

Presence: [1..1]

*This message item is part of choice **1.3 Authorisation**.*

Definition: Specifies the authorisation, in a coded form.

Data Type: Code

*One of the following **Authorisation1Code** values must be used:*

Code	Name	Definition
AUTH	PreAuthorisedFile	Indicates a file has been pre authorised or approved within the originating customer environment and no further approval is required.
FDET	FileLevelAuthorisationDetails	Indicates that a file requires additional file level approval, with the ability to view both the payment information block and supporting customer credit transaction detail.
FSUM	FileLevelAuthorisationSummary	Indicates that a file requires additional file level approval, with the ability to view only the payment information block level information.
ILEV	InstructionLevelAuthorisation	Indicates that a file requires all customer transactions to be authorised or approved.

1.5 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **1.3 Authorisation**.*

Definition: Specifies the authorisation, in a free text form.

Data Type: Max128Text

Format: maxLength: 128
minLength: 1

1.6 InitiatingParty <InitgPty>

Presence: [0..1]

Definition: Party that initiates the mandate message.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

1.7 InstructingAgent <InstgAgt>

Presence: [0..1]

Definition: Agent that instructs the next party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructing agent is the party sending the amendment and cancellation request message and not the party that sent the original mandate initiation request message.
In case of acceptance report message, the instructing agent is the party sending the acceptance report message and not the party that sent the original mandate request message.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.150 in 'Message Item Types' section.*

1.8 InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructed agent is the party receiving the amendment and cancellation request message and not the party that received the original mandate initiation request message.
In case of acceptance report message, the instructed agent is the party receiving the acceptance report message and not the party that received the original mandate request message.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.150 in 'Message Item Types' section.*

2.0 UnderlyingAmendmentDetails <UndrlygAmdmntDtls>

Presence: [1..1]
Definition: Set of elements used to provide details on the amendment request.
Type: *The **UnderlyingAmendmentDetails** block is composed of the following **MandateAmendment2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	+
2.2		AmendmentReason	<AmdmntRsn>	[1..1]	
2.8		Mandate	<Mndt>	[1..1]	
2.43		OriginalMandate	<OrgnlMndt>	[1..1]	

2.1 OriginalMessageInformation <OrgnlMsgInf>

Presence: [0..1]
Definition: Provides information on the original message.
Type: *This message item is composed of the following **OriginalMessageInformation1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	MessageIdentification	<MsgId>	[1..1]	Text
	MessageNameIdentification	<MsgNmId>	[1..1]	Text
	CreationDateTime	<CreDtTm>	[0..1]	DateTime

*For additional Type information, please refer to **OriginalMessageInformation1** p.159 in 'Message Item Types' section.*

2.2 AmendmentReason <AmdmntRsn>

Presence: [1..1]
Definition: Provides detailed information on the amendment reason.
Type: *This message item is composed of the following **MandateAmendmentReason1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.3		Originator	<Orgtr>	[0..1]	+
2.4		Reason	<Rsn>	[1..1]	
2.7		AdditionalInformation	<AddtlInf>	[0..*]	Text

2.3 Originator <Orgtr>

Presence: [0..1]

Definition: Party that issues the amendment request.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.4 Reason <Rsn>

Presence: [1..1]

Definition: Specifies the reason for the amendment request.

Type: *This message item is composed of one of the following **MandateReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.5	{Or	Code	<Cd>	[1..1]	Code
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text

2.5 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.4 Reason**.*

Definition: Reason, as published in an external reason code list.

Data Type: ExternalMandateReason1Code

Format: maxLength: 4
minLength: 1

2.6 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.4 Reason**.*

Definition: Reason, in a proprietary form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.7 AdditionalInformation <AddtlInf>

Presence: [0..*]

Definition: Further details on the amendment request reason.
Data Type: Max105Text
Format: maxLength: 105
minLength: 1

2.8 Mandate <Mndt>

Presence: [1..1]
Impacted by: G1, G2
Definition: Provides the amended mandate data.
Type: *This message item is composed of the following **Mandate3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.9		MandateIdentification	<MndtId>	[1..1]	Text
2.10		MandateRequestIdentification	<MndtReqId>	[0..1]	Text
2.11		Type	<Tp>	[0..1]	
2.18		Occurrences	<Ocrncs>	[0..1]	
2.24		CollectionAmount	<ColltnAmt>	[0..1]	Amount
2.25		MaximumAmount	<MaxAmt>	[0..1]	Amount
2.26		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
2.27		Creditor	<Cdtr>	[0..1]	+
2.28		CreditorAccount	<CdtrAcct>	[0..1]	+
2.29		CreditorAgent	<CdtrAgt>	[0..1]	+
2.30		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.31		Debtor	<Dbtr>	[0..1]	+
2.32		DebtorAccount	<DbtrAcct>	[0..1]	+
2.33		DebtorAgent	<DbtrAgt>	[0..1]	+
2.34		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.35		ReferredDocument	<RfrdDoc>	[0..1]	

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.9 MandateIdentification <MndtId>

Presence: [1..1]
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.10 MandateRequestIdentification <MndtReqId>

Presence: [0..1]

Definition: Identification for the mandate request, as assigned by the initiating party.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.11 Type <Tp>

Presence: [0..1]

Definition: Specifies the type of mandate, such as paper, electronic or scheme.

Type: *This message item is composed of the following **MandateTypeInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.12		ServiceLevel	<SvcLvl>	[0..1]	
2.15		LocalInstrument	<LclInstrm>	[0..1]	

2.12 ServiceLevel <SvcLvl>

Presence: [0..1]

Definition: Agreement under which or rules under which the mandate resides.

Type: *This message item is composed of one of the following **ServiceLevel8Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.13	{Or	Code	<Cd>	[1..1]	Code
2.14	Or}	Proprietary	<Prtry>	[1..1]	Text

2.13 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.12 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as published in an external service level code list.

Data Type: ExternalServiceLevel1Code

Format: maxLength: 4
minLength: 1

2.14 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.12 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.15 LocalInstrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.
Usage: This element is used to specify a local instrument, local clearing option and/or further qualify the service or service level.

Type: *This message item is composed of one of the following **LocalInstrument2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.16	{Or	Code	<Cd>	[1..1]	Code
2.17	Or}	Proprietary	<Prtry>	[1..1]	Text

2.16 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.15 LocalInstrument**.*

Definition: Specifies the local instrument, as published in an external local instrument code list.

Data Type: ExternalLocalInstrument1Code

Format: maxLength: 35
minLength: 1

2.17 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.15 LocalInstrument**.*

Definition: Specifies the local instrument, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.18 Occurrences <Ocrncs>

Presence: [0..1]

Definition: Provides details of the duration of the mandate and occurrence of the underlying transactions.

Type: *This message item is composed of the following **MandateOccurrences2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.19		SequenceType	<SeqTp>	[1..1]	Code
2.20		Frequency	<Frqcy>	[0..1]	Code
2.21		Duration	<Drtn>	[0..1]	+
2.22		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
2.23		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime

2.19 SequenceType <SeqTp>

Presence: [1..1]

Definition: Identifies the underlying transaction sequence as either recurring or one-off.
Data Type: Code
*One of the following **SequenceType2Code** values must be used:*

Code	Name	Definition
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

2.20 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which instructions are to be created and processed.
Data Type: Code
*When this message item is present, one of the following **Frequency6Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
FRTN	Fortnightly	Event takes place every two weeks.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

2.21 Duration <Drtn>

Presence: [0..1]
Definition: Length of time for which the mandate remains valid.
Type: *This message item is composed of the following **DatePeriodDetails1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDate	<FrDt>	[1..1]	DateTime
	ToDate	<ToDt>	[0..1]	DateTime

*For additional Type information, please refer to **DatePeriodDetails1** p.149 in 'Message Item Types' section.*

2.22 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.

Data Type: ISODate

2.23 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.
Data Type: ISODate

2.24 CollectionAmount <ColltnAmt>

Presence: [0..1]
Impacted by: R4, R5
Definition: Fixed amount to be collected from the debtor's account.
Data Type: ActiveCurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveCurrencyCode****.*
Format: **ActiveCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveCurrencyCode
[A-Z]{3,3}
Rule(s): **ActiveCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveCurrencyCode
ActiveCurrency
The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.

2.25 MaximumAmount <MaxAmt>

Presence: [0..1]
Impacted by: R4, R5
Definition: Maximum amount that may be collected from the debtor's account, per instruction.
Data Type: ActiveCurrencyAndAmount
This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveCurrencyCode****.*
Format: **ActiveCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveCurrencyCode
ActiveCurrency
The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.

2.26 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]

Definition: Credit party that signs the mandate.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.27 Creditor <Cdtr>

Presence: [0..1]

Definition: Party that signs the mandate and to whom an amount of money is due.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.28 CreditorAccount <CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Type: *This message item is composed of the following* ***CashAccount24*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to ***CashAccount24*** *p.145 in 'Message Item Types' section.*

2.29 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification5*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to ***BranchAndFinancialInstitutionIdentification5*** *p.150 in 'Message Item Types' section.*

2.30 UltimateCreditor <UltmtCdtr>

Presence: [0..1]
Definition: Ultimate party to which an amount of money is due.
Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

For additional Type information, please refer to ***PartyIdentification43*** *p.160 in 'Message Item Types' section.*

2.31 Debtor <Dbtr>

Presence: [0..1]
Definition: Party that signs the mandate and owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.32 DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor, to which a debit entry will be made as a result of the transaction.

Type: *This message item is composed of the following **CashAccount24** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount24** p.145 in 'Message Item Types' section.*

2.33 DebtorAgent <DbtrAgt>

Presence: [0..1]

Definition: Financial institution servicing an account for the debtor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.150 in 'Message Item Types' section.*

2.34 UltimateDebtor <UltmtDbtr>

Presence: [0..1]

Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.35 ReferredDocument <RfrdDoc>

Presence: [0..1]
Definition: Provides information to identify the underlying documents associated with the mandate.
Type: *This message item is composed of the following **ReferredDocumentInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.36		Type	<Tp>	[0..1]	
2.41		Number	<Nb>	[0..1]	Text
2.42		RelatedDate	<RltdDt>	[0..1]	DateTime

2.36 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of referred document.
Type: *This message item is composed of the following **ReferredDocumentType2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.37		CodeOrProprietary	<CdOrPrtry>	[1..1]	
2.40		Issuer	<Issr>	[0..1]	Text

2.37 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]
Definition: Provides the type details of the referred document.
Type: *This message item is composed of one of the following **ReferredDocumentType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.38	{Or	Code	<Cd>	[1..1]	Code
2.39	Or}	Proprietary	<Prtry>	[1..1]	Text

2.38 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.37 CodeOrProprietary**.*

Definition: Document type in a coded form.

Data Type: Code

*One of the following **DocumentType5Code** values must be used:*

Code	Name	Definition
AROI	AccountReceivableOpenItem	Document is a payment that applies to a specific source document.
BOLD	BillOfLading	Document is a shipping notice.
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.
TSUT	TradeServicesUtilityTransaction	Document is a transaction identifier as assigned by the Trade Services Utility.
VCHR	Voucher	Document is an electronic payment document.

2.39 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.37 CodeOrProprietary**.*

Definition: Proprietary identification of the type of the remittance document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.40 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the reference document type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.41 Number <Nb>

Presence: [0..1]
Definition: Unique and unambiguous identification of the referred document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.42 RelatedDate <RltdDt>

Presence: [0..1]
Definition: Date associated with the referred document.
Data Type: ISODate

2.43 OriginalMandate <OrgnlMndt>

Presence: [1..1]
Definition: Provides the original mandate data.
Type: *This message item is composed of one of the following **OriginalMandate2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.44	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text
2.45	Or}	OriginalMandate	<OrgnlMndt>	[1..1]	

2.44 OriginalMandateIdentification <OrgnlMndtId>

Presence: [1..1]
*This message item is part of choice **2.43 OriginalMandate**.*
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the original mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.45 OriginalMandate <OrgnlMndt>

Presence: [1..1]
Impacted by: G3, G4
*This message item is part of choice **2.43 OriginalMandate**.*
Definition: Provides the original mandate data.
Type: *This message item is composed of the following **Mandate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.46		MandateIdentification	<MndtId>	[1..1]	Text
2.47		MandateRequestIdentification	<MndtReqId>	[0..1]	Text
2.48		Type	<Tp>	[0..1]	
2.55		Occurrences	<Ocrncs>	[0..1]	
2.61		CollectionAmount	<ColltnAmt>	[0..1]	Amount
2.62		MaximumAmount	<MaxAmt>	[0..1]	Amount
2.63		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
2.64		Creditor	<Cdtr>	[1..1]	+
2.65		CreditorAccount	<CdtrAcct>	[0..1]	+
2.66		CreditorAgent	<CdtrAgt>	[0..1]	+
2.67		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.68		Debtor	<Dbtr>	[1..1]	+
2.69		DebtorAccount	<DbtrAcct>	[0..1]	+
2.70		DebtorAgent	<DbtrAgt>	[1..1]	+
2.71		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.72		ReferredDocument	<RfrdDoc>	[0..1]	

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.46 MandateIdentification <MndtId>

Presence: [1..1]

Definition: Unique identification, as assigned by the creditor, to unambiguously identify the mandate.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.47 MandateRequestIdentification <MndtReqId>

Presence: [0..1]

Definition: Identification for the mandate request, as assigned by the initiating party.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.48 Type <Tp>

Presence: [0..1]

Definition: Specifies the type of mandate, such as paper, electronic or scheme.

Type: *This message item is composed of the following* ***MandateTypeInformation1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.49		ServiceLevel	<SvcLvl>	[0..1]	
2.52		LocalInstrument	<LclInstrm>	[0..1]	

2.49 ServiceLevel <SvcLvl>

Presence: [0..1]

Definition: Agreement under which or rules under which the mandate resides.

Type: *This message item is composed of one of the following* ***ServiceLevel8Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.50	{Or	Code	<Cd>	[1..1]	Code
2.51	Or}	Proprietary	<Prtry>	[1..1]	Text

2.50 Code <Cd>

Presence: [1..1]

This message item is part of choice ***2.49 ServiceLevel****.*

Definition: Specifies a pre-agreed service or level of service between the parties, as published in an external service level code list.

Data Type: ExternalServiceLevel1Code

Format: maxLength: 4
minLength: 1

2.51 Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice ***2.49 ServiceLevel****.*

Definition: Specifies a pre-agreed service or level of service between the parties, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.52 LocalInstrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.
Usage: This element is used to specify a local instrument, local clearing option and/or further qualify the service or service level.

Type: *This message item is composed of one of the following* ***LocalInstrument2Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.53	{Or	Code	<Cd>	[1..1]	Code
2.54	Or}	Proprietary	<Prtry>	[1..1]	Text

2.53 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.52 LocalInstrument**.*

Definition: Specifies the local instrument, as published in an external local instrument code list.

Data Type: ExternalLocalInstrument1Code

Format: maxLength: 35
minLength: 1

2.54 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.52 LocalInstrument**.*

Definition: Specifies the local instrument, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.55 Occurrences <Ocrncs>

Presence: [0..1]

Definition: Provides details of the duration of the mandate and occurrence of the underlying transactions.

Type: *This message item is composed of the following **MandateOccurrences2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.56		SequenceType	<SeqTp>	[1..1]	Code
2.57		Frequency	<Frqcy>	[0..1]	Code
2.58		Duration	<Drtn>	[0..1]	+
2.59		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
2.60		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime

2.56 SequenceType <SeqTp>

Presence: [1..1]

Definition: Identifies the underlying transaction sequence as either recurring or one-off.

Data Type: Code

*One of the following **SequenceType2Code** values must be used:*

Code	Name	Definition
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

2.57 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which instructions are to be created and processed.
Data Type: Code
*When this message item is present, one of the following **Frequency6Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
FRTN	Fortnightly	Event takes place every two weeks.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

2.58 Duration <Drtn>

Presence: [0..1]
Definition: Length of time for which the mandate remains valid.
Type: *This message item is composed of the following **DatePeriodDetails1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDate	<FrDt>	[1..1]	DateTime
	ToDate	<ToDt>	[0..1]	DateTime

*For additional Type information, please refer to **DatePeriodDetails1** p.149 in 'Message Item Types' section.*

2.59 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.
Data Type: ISODate

2.60 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.
Data Type: ISODate

2.61 CollectionAmount <ColltnAmt>

Presence: [0..1]
Impacted by: R7, R8

Definition: Fixed amount to be collected from the debtor's account.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.62 MaximumAmount <MaxAmt>

Presence: [0..1]

Impacted by: R7, R8

Definition: Maximum amount that may be collected from the debtor's account, per instruction.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.63 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]

Definition: Credit party that signs the mandate.

Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.64 Creditor <Cdtr>

Presence: [1..1]
Definition: Party that signs the mandate and to whom an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.65 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.
Type: *This message item is composed of the following **CashAccount24** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount24** p.145 in 'Message Item Types' section.*

2.66 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification5*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to ***BranchAndFinancialInstitutionIdentification5*** *p.150 in 'Message Item Types' section.*

2.67 UltimateCreditor <UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

For additional Type information, please refer to ***PartyIdentification43*** *p.160 in 'Message Item Types' section.*

2.68 Debtor <Dbtr>

Presence: [1..1]

Definition: Party that signs the mandate and owes an amount of money to the (ultimate) creditor.

Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

For additional Type information, please refer to ***PartyIdentification43*** *p.160 in 'Message Item Types' section.*

2.69 DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor, to which a debit entry will be made as a result of the transaction.

Type: *This message item is composed of the following* ***CashAccount24*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount24** p.145 in 'Message Item Types' section.*

2.70 DebtorAgent <DbtrAgt>

Presence: [1..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.150 in 'Message Item Types' section.*

2.71 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.72 ReferredDocument <RfrdDoc>

Presence: [0..1]
Definition: Provides information to identify the underlying documents associated with the mandate.
Type: *This message item is composed of the following **ReferredDocumentInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.73		Type	<Tp>	[0..1]	
2.78		Number	<Nb>	[0..1]	Text
2.79		RelatedDate	<RltdDt>	[0..1]	DateTime

2.73 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of referred document.
Type: *This message item is composed of the following **ReferredDocumentType2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.74		CodeOrProprietary	<CdOrPrtry>	[1..1]	
2.77		Issuer	<Issr>	[0..1]	Text

2.74 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]
Definition: Provides the type details of the referred document.
Type: *This message item is composed of one of the following **ReferredDocumentType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.75	{Or	Code	<Cd>	[1..1]	Code
2.76	Or}	Proprietary	<Prtry>	[1..1]	Text

2.75 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.74 CodeOrProprietary**.*
Definition: Document type in a coded form.
Data Type: Code
*One of the following **DocumentType5Code** values must be used:*

Code	Name	Definition
AROI	AccountReceivableOpenItem	Document is a payment that applies to a specific source document.
BOLD	BillOfLading	Document is a shipping notice.
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.

Code	Name	Definition
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.
TSUT	TradeServicesUtilityTransaction	Document is a transaction identifier as assigned by the Trade Services Utility.
VCHR	Voucher	Document is an electronic payment document.

2.76 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.74 CodeOrProprietary**.*
Definition: Proprietary identification of the type of the remittance document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.77 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the reference document type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.78 Number <Nb>

Presence: [0..1]
Definition: Unique and unambiguous identification of the referred document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.79 RelatedDate <RltdDt>

Presence: [0..1]
Definition: Date associated with the referred document.

Data Type: ISODate

3.0 SupplementaryData <SplmtryData>

Presence: [0..*]

Impacted by: R9

Definition: Additional information that cannot be captured in the structured elements and/or any other specific block.

Type: *The **SupplementaryData** block is composed of the following **SupplementaryData1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1		PlaceAndName	<PlcAndNm>	[0..1]	Text
3.2		Envelope	<Envlp>	[1..1]	

Rule(s): SupplementaryDataRule
This component may not be used without the explicit approval of a SEG and submission to the RA of ISO 20022 compliant structure(s) to be used in the Envelope element.

3.1 PlaceAndName <PlcAndNm>

Presence: [0..1]

Definition: Unambiguous reference to the location where the supplementary data must be inserted in the message instance.
In the case of XML, this is expressed by a valid XPath.

Data Type: Max350Text

Format: maxLength: 350
minLength: 1

3.2 Envelope <Envlp>

Presence: [1..1]

Definition: Technical element wrapping the supplementary data.

Type: *This message item is composed of the following **SupplementaryDataEnvelope1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.3		Contents	(User Defined)	[1..1]	

3.3 Contents (User Defined)

Presence: [1..1]

Definition: Technical element that specifies the supplementary data.

Type: (User Defined)

This content will be validated on a can do basis.

It may contain any XML structure.

Business Example 1

Narrative

Debtor Carter has an existing mandate, identification number 3344/54, with creditor Virgay Insurance Company for a yearly recurring direct debit transaction for a car insurance premium for an amount of USD 1200.
Debtor Carter and creditor Virgay have agreed to change the frequency of the direct debit transaction from yearly to monthly for an amount of EUR 100. All other existing information remains the same: debtor account 33445, debtor agent MMMMUS31, and creditor agent BBBBUS21.
Creditor Virgay Insurance Company has sent a MandateAmendmentRequest message to its account servicer, BBBBUS21. BBBBUS21 forward the MandateAmendmentRequest message to the account servicer of debtor Carter, MMMMUS31.

Business Description

MandateAmendmentRequest message from BBBBUS21 to MMMMUS31.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	DDFF12345
CreationDateTime	<CredDtTm>	2011-12-16T11:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Virgay Insurance Company
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	High Street
BuildingNumber	<BldgNb>	12
PostCode	<PstCd>	NJ 65005
TownName	<TwnNm>	Jersey City
Country	<Ctry>	US
InstructingAgent	<InstgAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	BBBBUS21
InstructedAgent	<InstdAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	MMMMUS31
UnderlyingAmendmentDetails	**<UndrlygAmdmntDtls>**	
AmendmentReason	<AmdlntRsn>	
Reason	<Rsn>	
Proprietary	<Prtry>	Change on the contract
Mandate	<Mndt>	
MandateIdentification	<MndtId>	3344/54
Occurrences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR

Frequency	<Frqcy>	MNTH
CollectionAmount	<ColltnAmt>	USD 100
Creditor	<Cdtr>	
Name	<Nm>	Virgay Insurance Company
Debtor	<Dbtr>	
Name	<Nm>	Carter
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	33445
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	MMMMUS31
OriginalMandate	<OrgnMndt>	
OriginalMandate	<OrgnMndt>	
MandateIdentification	<MndtId>	3344/54
Occurrences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR
Frequency	<Frqcy>	YEAR
CollectionAmount	<ColltnAmt>	USD 1200
Creditor	<Cdtr>	
Name	<Nm>	Virgay Insurance Company
Debtor	<Dbtr>	
Name	<Nm>	Carter
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	MMMMUS31

XML Instance

```
<MndtAmdmntReq>
    <GrpHdr>
      <MsgId>DDFF12345</MsgId>
      <CreDtTm>2011-12-16T11:25:00</CreDtTm>
      <InitgPty>
        <Nm>Virgay Insurance Company</Nm>
        <PstlAdr>
          <StrtNm>High Street</StrtNm>
          <BldgNb>12</BldgNb>
          <PstCd>NJ 65005</PstCd>
          <TwnNm>Jersey City</TwnNm>
```

```
            <Ctry>US</Ctry>
          </PstlAdr>
        </InitgPty>
        <InstgAgt>
          <FinInstnId>
            <BICFI>BBBBUS21</BICFI>
          </FinInstnId>
        </InstgAgt>
        <InstdAgt>
          <FinInstnId>
            <BICFI>MMMMUS31</BICFI>
          </FinInstnId>
        </InstdAgt>
      </GrpHdr>
      <UndrlygAmdmntDtls>
        <AmdmntRsn>
          <Rsn>
            <Prtry>Change on the contract</Prtry>
          </Rsn>
        </AmdmntRsn>
        <Mndt>
          <MndtId>3344/54</MndtId>
          <Ocrncs>
            <SeqTp>RCUR</SeqTp>
            <Frqcy>MNTH</Frqcy>
          </Ocrncs>
          <ColltnAmt Ccy="USD">100</ColltnAmt>
          <Cdtr>
            <Nm>Virgay Insurance Company</Nm>
          </Cdtr>
          <Dbtr>
            <Nm>Carter</Nm>
          </Dbtr>
          <DbtrAcct>
            <Id>
              <Othr>
                <Id>33445</Id>
              </Othr>
            </Id>
          </DbtrAcct>
          <DbtrAgt>
            <FinInstnId>
              <BICFI>MMMMUS31</BICFI>
            </FinInstnId>
          </DbtrAgt>
        </Mndt>
        <OrgnlMndt>
          <OrgnlMndt>
            <MndtId>3344/54</MndtId>
            <Ocrncs>
              <SeqTp>RCUR</SeqTp>
              <Frqcy>YEAR</Frqcy>
```

```
            </Ocrncs>
            <ColltnAmt Ccy="USD">1200</ColltnAmt>
            <Cdtr>
              <Nm>Virgay Insurance Company</Nm>
            </Cdtr>
            <Dbtr>
              <Nm>Carter</Nm>
            </Dbtr>
            <DbtrAgt>
              <FinInstnId>
                <BICFI>MMMMUS31</BICFI>
              </FinInstnId>
            </DbtrAgt>
          </OrgnlMndt>
        </OrgnlMndt>
      </UndrlygAmdmntDtls>
    </MndtAmdmntReq>
```

Business Example 2

Narrative

Debtor Moulin et Cie. has an existing mandate, identification number 66613/06, with creditor Jacquelin Freres for a monthly recurring direct debit for the amount of EUR 25.
Debtor Moulin et Cie is changing account numbers from FR1420663338880500 21M05505 to FR1310052030060400 10M04304 with the same debtor agent MMMMFR23 because of a cash management optimization.
Debtor Moulin et Cie. sends a MandateAmendmentRequest message to its account servicer, MMMMFR23.
MMMMFR23 forwards the MandateAmendmentRequest message, unchanged, to the account servicer of the creditor Jacquelin Freres, GGGGUS31.

Business Description

MandateAmendmentRequest message from Moulin et Cie to MMMMFR23.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	CFFC33445
CreationDateTime	<CredDtTm>	2011-12-15T16:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Moulin et Cie
PostalAddress	<PstlAdr>	
StreetName	<StrtNm>	Rue de Bretagne
BuildingNumber	<BldgNb>	10
PostCode	<PstCd>	75005
TownName	<TwnNm>	Paris
Country	<Ctry>	FR
UnderlyingAmendmentDetails	**<UndrlygAmdmntDtls>**	

AmendmentReason	<AmdlntRsn>	
Originator	<Orgtr>	
Name	<Nm>	Moulin et Cie
Reason	<Rsn>	
Proprietary	<Prtry>	Change account for optimization
Mandate	<Mndt>	
MandateIdentification	<MndtId>	66613/06
Creditor	<Cdtr>	
Name	<Nm>	Jacquelin Freres
Debtor	<Dbtr>	
Name	<Nm>	Moulin et Cie
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	FR1310052030060400 10M04304
OriginalMandate	<OrgnMndt>	
OriginalMandate	<OrgnMndt>	
MandateIdentification	<MndtId>	66613/06
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	FR1420663338880500 21M05505
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	MMMMFR23

XML Instance

```
<MndtAmdmntReq>
  <GrpHdr>
    <MsgId>CFFC33445</MsgId>
    <CreDtTm>2011-12-15T16:25:00</CreDtTm>
    <InitgPty>
      <Nm>Moulin et Cie</Nm>
      <PstlAdr>
        <StrtNm>Rue de Bretagne</StrtNm>
        <BldgNb>10</BldgNb>
        <PstCd>75005</PstCd>
        <TwnNm>Paris</TwnNm>
        <Ctry>FR</Ctry>
      </PstlAdr>
    </InitgPty>
  </GrpHdr>
  <UndrlygAmdmntDtls>
    <AmdmntRsn>
```

```
        <Orgtr>
          <Nm>Moulin et Cie</Nm>
        </Orgtr>
        <Rsn>
          <Prtry>Change account for optimization</Prtry>
        </Rsn>
      </AmdmntRsn>
      <Mndt>
        <MndtId>66613/06</MndtId>
        <DbtrAcct>
          <Id>
            <IBAN>FR1310052030060400 10M04304</IBAN>
          </Id>
        </DbtrAcct>
      </Mndt>
      <OrgnlMndt>
        <OrgnlMndt>
          <MndtId>66613/06</MndtId>
          <Cdtr>
            <Nm>Jacquelin Freres</Nm>
          </Cdtr>
          <Dbtr>
            <Nm>Moulin et Cie</Nm>
          </Dbtr>
          <DbtrAcct>
            <Id>
              <IBAN>FR1420663338880500 21M05505</IBAN>
            </Id>
          </DbtrAcct>
          <DbtrAgt>
            <FinInstnId>
              <BICFI>MMMMFR23</BICFI>
            </FinInstnId>
          </DbtrAgt>
        </OrgnlMndt>
      </OrgnlMndt>
    </UndrlygAmdmntDtls>
  </MndtAmdmntReq>
```


Business Example 3

Narrative

Debtor Agent (Best Bank) AAAAUS22 has recently merged with another agent, one of the consequences of this merger is that the structure of the account numbers in the books of AAAAUS22 will change.
AAAAUS22 is offering the service to its clients to inform their creditors, through the creditor agent, in this case BBBBB56, of this change.
The existing mandate, identification number 55512/04, is a mandate between debtor Williams and creditor Stevens and Son (account number 558823). The account number of debtor Williams will change from 445568 to 33144568.

Business Description

MandateAmendmentRequest message from AAAAUS22 to BBBBUS56.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	FGH7945
CreationDateTime	<CredDtTm>	2011-12-16T11:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Best Bank
InstructingAgent	<InstgAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	AAAAUS22
InstructedAgent	<InstdAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	BBBBUS56
UnderlyingAmendmentDetails	**<UndrlygAmdmntDtls>**	
AmendmentReason	<AmdlntRsn>	
OriginalMessageInformation	<OrgnlMsgInf>	
MessageIdentification	<MsgId>	FGH7930
MessageNameIdentification	<MsgNmId>	pain.009.001.02
CreationDateTime	<CreDtTm>	2011-06-28T10:00:00
Originator	<Orgtr>	
Name	<Nm>	Best Bank
Reason	<Rsn>	
Proprietary	<Prtry>	Account structure change
Mandate	<Mndt>	
MandateIdentification	<MndtId>	55512/04
Creditor	<Cdtr>	
Name	<Nm>	Stevens and Son
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	558823
Debtor	<Dbtr>	
Name	<Nm>	Williams
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	33144568
OriginalMandate	<OrgnlMndt>	

OriginalMandate	<OrgnlMndt>	
MandateIdentification	<MndtId>	55512/04
Creditor	<Cdtr>	
Name	<Nm>	Stevens and Son
Debtor	<Dbtr>	
Name	<Nm>	Williams
DebtorAccount	<DbtrAcct>	
Other	<Othr>	
Identification	<Id>	445568
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstId>	
BICFI	<BICFI>	AAAAUS22

XML Instance

```
<MndtAmdmntReq>
    <GrpHdr>
      <MsgId>FGH7945</MsgId>
      <CreDtTm>2011-12-16T11:25:00</CreDtTm>
      <InitgPty>
        <Nm>Best Bank</Nm>
      </InitgPty>
      <InstgAgt>
        <FinInstnId>
          <BICFI>AAAAUS22</BICFI>
        </FinInstnId>
      </InstgAgt>
      <InstdAgt>
        <FinInstnId>
          <BICFI>BBBBUS56</BICFI>
        </FinInstnId>
      </InstdAgt>
    </GrpHdr>
    <UndrlygAmdmntDtls>
      <OrgnlMsgInf>
        <MsgId>FGH7930</MsgId>
        <MsgNmId>pain.009.001.02</MsgNmId>
        <CreDtTm>2011-06-28T10:00:00</CreDtTm>
      </OrgnlMsgInf>
      <AmdmntRsn>
        <Orgtr>
          <Nm>Best Bank</Nm>
        </Orgtr>
        <Rsn>
          <Prtry>Account structure change</Prtry>
        </Rsn>
      </AmdmntRsn>
```

```
        <Mndt>
          <MndtId>55512/04</MndtId>
          <Cdtr>
            <Nm>Stevens and Son</Nm>
          </Cdtr>
          <CdtrAcct>
            <Id>
              <Othr>
                <Id>558823</Id>
              </Othr>
            </Id>
          </CdtrAcct>
          <Dbtr>
            <Nm>Williams</Nm>
          </Dbtr>
          <DbtrAcct>
            <Id>
              <Othr>
                <Id>33144568</Id>
              </Othr>
            </Id>
          </DbtrAcct>
        </Mndt>
        <OrgnlMndt>
          <OrgnlMndt>
            <MndtId>55512/04</MndtId>
            <Cdtr>
              <Nm>Stevens and Son</Nm>
            </Cdtr>
            <Dbtr>
              <Nm>Williams</Nm>
            </Dbtr>
            <DbtrAcct>
              <Id>
                <Othr>
                  <Id>445568</Id>
                </Othr>
              </Id>
            </DbtrAcct>
            <DbtrAgt>
              <FinInstnId>
                <BICFI>AAAAUS22</BICFI>
              </FinInstnId>
            </DbtrAgt>
          </OrgnlMndt>
        </OrgnlMndt>
      </UndrlygAmdmntDtls>
    </MndtAmdmntReq>
```

pain.011.001.02 MandateCancellationRequestV02

Message Functionality

Scope

The MandateCancellationRequest message is sent by the initiator of the request to his agent. The initiator can either be the debtor or the creditor.
The MandateCancellationRequest message is forwarded by the agent of the initiator to the agent of the counterparty.
A MandateCancellationRequest message is used to request the cancellation of an existing mandate. If accepted, this MandateCancellationRequest message together with the MandateAcceptanceReport message confirming the acceptance will be considered a valid cancellation of an existing mandate, agreed upon by all parties.

Usage

The MandateCancellationRequest message can contain only one request to cancel one specific mandate.
The messages can be exchanged between creditor and creditor agent or debtor and debtor agent and between creditor agent and debtor agent.
The message can also be used by an initiating party that has authority to send the message on behalf of the creditor or debtor.
The MandateCancellationRequest message can be used in domestic and cross-border scenarios.

Outline

The MandateCancellationRequest message is composed of 2 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime, Authorisation.

B. Underlying Cancellation Details

This building block is mandatory and present once. It contains elements that identify the existing mandate. These include, among others, OriginalMessageInformation, CancellationReason, OriginalMandate.

Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<MndtCxlReq>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.4	{Or	Code	<Cd>	[1..1]	Code	
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text	
1.6		InitiatingParty	<InitgPty>	[0..1]	+	
1.7		InstructingAgent	<InstgAgt>	[0..1]	+	
1.8		InstructedAgent	<InstdAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		UnderlyingCancellationDetails	<UndrlygCxlDtls>	[1..1]		
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	+	
2.2		CancellationReason	<CxlRsn>	[1..1]		
2.3		Originator	<Orgtr>	[0..1]	+	
2.4		Reason	<Rsn>	[1..1]		
2.5	{Or	Code	<Cd>	[1..1]	Code	
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.7		AdditionalInformation	<AddtlInf>	[0..*]	Text	
2.8		OriginalMandate	<OrgnlMndt>	[1..1]		
2.9	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text	
2.10	Or}	OriginalMandate	<OrgnlMndt>	[1..1]		G1, G2
2.11		MandateIdentification	<MndtId>	[1..1]	Text	
2.12		MandateRequestIdentification	<MndtReqId>	[0..1]	Text	
2.13		Type	<Tp>	[0..1]		
2.14		ServiceLevel	<SvcLvl>	[0..1]		
2.15	{{Or	Code	<Cd>	[1..1]	Code	
2.16	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.17		LocalInstrument	<LclInstrm>	[0..1]		
2.18	{{Or	Code	<Cd>	[1..1]	Code	
2.19	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.20		Occurrences	<Ocrncs>	[0..1]		
2.21		SequenceType	<SeqTp>	[1..1]	Code	
2.22		Frequency	<Frqcy>	[0..1]	Code	
2.23		Duration	<Drtn>	[0..1]	+	
2.24		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.25		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
2.26		CollectionAmount	<ColltnAmt>	[0..1]	Amount	R4, R5
2.27		MaximumAmount	<MaxAmt>	[0..1]	Amount	R4, R5
2.28		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
2.29		Creditor	<Cdtr>	[1..1]	+	
2.30		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.31		CreditorAgent	<CdtrAgt>	[0..1]	+	
2.32		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.33		Debtor	<Dbtr>	[1..1]	+	
2.34		DebtorAccount	<DbtrAcct>	[0..1]	+	
2.35		DebtorAgent	<DbtrAgt>	[1..1]	+	
2.36		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.37		ReferredDocument	<RfrdDoc>	[0..1]		
2.38		Type	<Tp>	[0..1]		
2.39		CodeOrProprietary	<CdOrPrtry>	[1..1]		
2.40	{{Or	Code	<Cd>	[1..1]	Code	
2.41	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.42		Issuer	<Issr>	[0..1]	Text	
2.43		Number	<Nb>	[0..1]	Text	
2.44		RelatedDate	<RltdDt>	[0..1]	DateTime	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.0		SupplementaryData	<SplmtryData>	[0..*]		R7
3.1		PlaceAndName	<PlcAndNm>	[0..1]	Text	
3.2		Envelope	<Envlp>	[1..1]		
3.3		Contents	(User Defined)	[1..1]		

Rules and Guidelines

Rules

R1 Country

The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.160 for additional information.*

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.150 for additional information.*

R2 AnyBIC
Only a valid Business identifier code is allowed. Business identifier codes for financial or non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.160 for additional information.*

R3 BICFI
Valid BICs for financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.150 for additional information.*

R4 CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

R5 ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

*This Rule also impacts **CashAccount24** Type. Please refer to 'Message Item Types' section p.145 for additional information.*

R6 IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

*This Rule also impacts **CashAccount24** Type. Please refer to 'Message Item Types' section p.145 for additional information.*

R7 SupplementaryDataRule
This component may not be used without the explicit approval of a SEG and submission to the RA of ISO 20022 compliant structure(s) to be used in the Envelope element.

Guidelines

G1 UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

G2 UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

Message Items Description

*The following section identifies the elements of the **MandateCancellationRequestV02** message definition.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics to identify the message and parties playing a role in the cancellation of the mandate, but which are not part of the mandate.

Type: *The **GroupHeader** block is composed of the following **GroupHeader47** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	
1.6		InitiatingParty	<InitgPty>	[0..1]	+
1.7		InstructingAgent	<InstgAgt>	[0..1]	+
1.8		InstructedAgent	<InstdAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the instructed party, to unambiguously identify the message.
Usage: The instructing party has to make sure that MessageIdentification is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user key to be used to check the authority of the initiating party.

Usage: The content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios, payment initiations, payment returns or payment reversals that are initiated on behalf of a party different from the initiating party.

Type: *This message item is composed of one of the following **Authorisation1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.4	{Or	Code	<Cd>	[1..1]	Code
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

1.4 Code <Cd>

Presence: [1..1]

*This message item is part of choice **1.3 Authorisation**.*

Definition: Specifies the authorisation, in a coded form.

Data Type: Code

*One of the following **Authorisation1Code** values must be used:*

Code	Name	Definition
AUTH	PreAuthorisedFile	Indicates a file has been pre authorised or approved within the originating customer environment and no further approval is required.
FDET	FileLevelAuthorisationDetails	Indicates that a file requires additional file level approval, with the ability to view both the payment information block and supporting customer credit transaction detail.
FSUM	FileLevelAuthorisationSummary	Indicates that a file requires additional file level approval, with the ability to view only the payment information block level information.
ILEV	InstructionLevelAuthorisation	Indicates that a file requires all customer transactions to be authorised or approved.

1.5 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **1.3 Authorisation**.*
Definition: Specifies the authorisation, in a free text form.
Data Type: Max128Text
Format: maxLength: 128
minLength: 1

1.6 InitiatingParty <InitgPty>

Presence: [0..1]
Definition: Party that initiates the mandate message.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

1.7 InstructingAgent <InstgAgt>

Presence: [0..1]

Definition: Agent that instructs the next party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructing agent is the party sending the amendment and cancellation request message and not the party that sent the original mandate initiation request message.
In case of acceptance report message, the instructing agent is the party sending the acceptance report message and not the party that sent the original mandate request message.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification5*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to ***BranchAndFinancialInstitutionIdentification5*** *p.150 in 'Message Item Types' section.*

1.8 InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructed agent is the party receiving the amendment and cancellation request message and not the party that received the original mandate initiation request message.
In case of acceptance report message, the instructed agent is the party receiving the acceptance report message and not the party that received the original mandate request message.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification5*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to ***BranchAndFinancialInstitutionIdentification5*** *p.150 in 'Message Item Types' section.*

2.0 UnderlyingCancellationDetails <UndrlygCxlDtls>

Presence: [1..1]

Definition: Set of elements used to provide details on the cancellation request.

Type: *The* ***UnderlyingCancellationDetails*** *block is composed of the following* ***MandateCancellation2*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	+
2.2		CancellationReason	<CxlRsn>	[1..1]	
2.8		OriginalMandate	<OrgnlMndt>	[1..1]	

2.1 OriginalMessageInformation <OrgnlMsgInf>

Presence: [0..1]
Definition: Provides information on the original message.
Type: *This message item is composed of the following **OriginalMessageInformation1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	MessageIdentification	<MsgId>	[1..1]	Text
	MessageNameIdentification	<MsgNmId>	[1..1]	Text
	CreationDateTime	<CreDtTm>	[0..1]	DateTime

*For additional Type information, please refer to **OriginalMessageInformation1** p.159 in 'Message Item Types' section.*

2.2 CancellationReason <CxlRsn>

Presence: [1..1]
Definition: Provides detailed information on the cancellation reason.
Type: *This message item is composed of the following **PaymentCancellationReason1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.3		Originator	<Orgtr>	[0..1]	+
2.4		Reason	<Rsn>	[1..1]	
2.7		AdditionalInformation	<AddtlInf>	[0..*]	Text

2.3 Originator <Orgtr>

Presence: [0..1]
Definition: Party that issues the cancellation request.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.4 Reason <Rsn>

Presence: [1..1]
Definition: Specifies the reason for the cancellation request.
Type: *This message item is composed of one of the following **MandateReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.5	{Or	Code	<Cd>	[1..1]	Code
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text

2.5 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.4 Reason**.*

Definition: Reason, as published in an external reason code list.

Data Type: ExternalMandateReason1Code

Format: maxLength: 4
minLength: 1

2.6 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.4 Reason**.*

Definition: Reason, in a proprietary form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.7 AdditionalInformation <AddtlInf>

Presence: [0..*]

Definition: Further details on the cancellation request reason.

Data Type: Max105Text

Format: maxLength: 105
minLength: 1

2.8 OriginalMandate <OrgnlMndt>

Presence: [1..1]

Definition: Provides the original mandate data.

Type: *This message item is composed of one of the following **OriginalMandate2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.9	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text
2.10	Or}	OriginalMandate	<OrgnlMndt>	[1..1]	

2.9 OriginalMandateIdentification <OrgnlMndtId>

Presence: [1..1]

*This message item is part of choice **2.8 OriginalMandate**.*

Definition: Unique identification, as assigned by the creditor, to unambiguously identify the original mandate.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.10 OriginalMandate <OrgnlMndt>

Presence: [1..1]
Impacted by: G1, G2
*This message item is part of choice **2.8 OriginalMandate**.*
Definition: Provides the original mandate data.
Type: *This message item is composed of the following **Mandate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.11		MandateIdentification	<MndtId>	[1..1]	Text
2.12		MandateRequestIdentification	<MndtReqId>	[0..1]	Text
2.13		Type	<Tp>	[0..1]	
2.20		Occurrences	<Ocrncs>	[0..1]	
2.26		CollectionAmount	<ColltnAmt>	[0..1]	Amount
2.27		MaximumAmount	<MaxAmt>	[0..1]	Amount
2.28		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
2.29		Creditor	<Cdtr>	[1..1]	+
2.30		CreditorAccount	<CdtrAcct>	[0..1]	+
2.31		CreditorAgent	<CdtrAgt>	[0..1]	+
2.32		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.33		Debtor	<Dbtr>	[1..1]	+
2.34		DebtorAccount	<DbtrAcct>	[0..1]	+
2.35		DebtorAgent	<DbtrAgt>	[1..1]	+
2.36		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.37		ReferredDocument	<RfrdDoc>	[0..1]	

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.11 MandateIdentification <MndtId>

Presence: [1..1]
Definition: Unique identification, as assigned by the creditor, to unambiguously identify the mandate.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.12 MandateRequestIdentification <MndtReqId>

Presence: [0..1]

Definition: Identification for the mandate request, as assigned by the initiating party.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.13 Type <Tp>

Presence: [0..1]

Definition: Specifies the type of mandate, such as paper, electronic or scheme.

Type: *This message item is composed of the following **MandateTypeInformation1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.14		ServiceLevel	<SvcLvl>	[0..1]	
2.17		LocalInstrument	<LclInstrm>	[0..1]	

2.14 ServiceLevel <SvcLvl>

Presence: [0..1]

Definition: Agreement under which or rules under which the mandate resides.

Type: *This message item is composed of one of the following **ServiceLevel8Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.15	{Or	Code	<Cd>	[1..1]	Code
2.16	Or}	Proprietary	<Prtry>	[1..1]	Text

2.15 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.14 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as published in an external service level code list.

Data Type: ExternalServiceLevel1Code

Format: maxLength: 4
minLength: 1

2.16 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.14 ServiceLevel**.*

Definition: Specifies a pre-agreed service or level of service between the parties, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.17 LocalInstrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.
Usage: This element is used to specify a local instrument, local clearing option and/or further qualify the service or service level.

Type: *This message item is composed of one of the following **LocalInstrument2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.18	{Or	Code	<Cd>	[1..1]	Code
2.19	Or}	Proprietary	<Prtry>	[1..1]	Text

2.18 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.17 LocalInstrument**.*

Definition: Specifies the local instrument, as published in an external local instrument code list.

Data Type: ExternalLocalInstrument1Code

Format: maxLength: 35
minLength: 1

2.19 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.17 LocalInstrument**.*

Definition: Specifies the local instrument, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.20 Occurrences <Ocrncs>

Presence: [0..1]

Definition: Provides details of the duration of the mandate and occurrence of the underlying transactions.

Type: *This message item is composed of the following **MandateOccurrences2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.21		SequenceType	<SeqTp>	[1..1]	Code
2.22		Frequency	<Frqcy>	[0..1]	Code
2.23		Duration	<Drtn>	[0..1]	+
2.24		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
2.25		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime

2.21 SequenceType <SeqTp>

Presence: [1..1]

Definition: Identifies the underlying transaction sequence as either recurring or one-off.
Data Type: Code
*One of the following **SequenceType2Code** values must be used:*

Code	Name	Definition
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

2.22 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which instructions are to be created and processed.
Data Type: Code
*When this message item is present, one of the following **Frequency6Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
FRTN	Fortnightly	Event takes place every two weeks.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

2.23 Duration <Drtn>

Presence: [0..1]
Definition: Length of time for which the mandate remains valid.
Type: *This message item is composed of the following **DatePeriodDetails1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDate	<FrDt>	[1..1]	DateTime
	ToDate	<ToDt>	[0..1]	DateTime

*For additional Type information, please refer to **DatePeriodDetails1** p.149 in 'Message Item Types' section.*

2.24 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.

Data Type: ISODate

2.25 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]

Definition: Date of the final collection of a direct debit as per the mandate.

Data Type: ISODate

2.26 CollectionAmount <ColltnAmt>

Presence: [0..1]

Impacted by: R4, R5

Definition: Fixed amount to be collected from the debtor's account.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.27 MaximumAmount <MaxAmt>

Presence: [0..1]

Impacted by: R4, R5

Definition: Maximum amount that may be collected from the debtor's account, per instruction.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.28 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]
Definition: Credit party that signs the mandate.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.29 Creditor <Cdtr>

Presence: [1..1]
Definition: Party that signs the mandate and to whom an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.30 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Type: *This message item is composed of the following* ***CashAccount24*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

For additional Type information, please refer to ***CashAccount24*** *p.145 in 'Message Item Types' section.*

2.31 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.
Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification5*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to ***BranchAndFinancialInstitutionIdentification5*** *p.150 in 'Message Item Types' section.*

2.32 UltimateCreditor <UltmtCdtr>

Presence: [0..1]
Definition: Ultimate party to which an amount of money is due.
Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

For additional Type information, please refer to ***PartyIdentification43*** *p.160 in 'Message Item Types' section.*

2.33 Debtor <Dbtr>

Presence: [1..1]
Definition: Party that signs the mandate and owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.34 DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor, to which a debit entry will be made as a result of the transaction.

Type: *This message item is composed of the following **CashAccount24** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount24** p.145 in 'Message Item Types' section.*

2.35 DebtorAgent <DbtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the debtor.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.150 in 'Message Item Types' section.*

2.36 UltimateDebtor <UltmtDbtr>

Presence: [0..1]

Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.37 ReferredDocument <RfrdDoc>

Presence: [0..1]
Definition: Provides information to identify the underlying documents associated with the mandate.
Type: *This message item is composed of the following **ReferredDocumentInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.38		Type	<Tp>	[0..1]	
2.43		Number	<Nb>	[0..1]	Text
2.44		RelatedDate	<RltdDt>	[0..1]	DateTime

2.38 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of referred document.
Type: *This message item is composed of the following **ReferredDocumentType2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.39		CodeOrProprietary	<CdOrPrtry>	[1..1]	
2.42		Issuer	<Issr>	[0..1]	Text

2.39 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]
Definition: Provides the type details of the referred document.
Type: *This message item is composed of one of the following **ReferredDocumentType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.40	{Or	Code	<Cd>	[1..1]	Code
2.41	Or}	Proprietary	<Prtry>	[1..1]	Text

2.40 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.39 CodeOrProprietary**.*

Definition: Document type in a coded form.

Data Type: Code

*One of the following **DocumentType5Code** values must be used:*

Code	Name	Definition
AROI	AccountReceivableOpenItem	Document is a payment that applies to a specific source document.
BOLD	BillOfLading	Document is a shipping notice.
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.
TSUT	TradeServicesUtilityTransaction	Document is a transaction identifier as assigned by the Trade Services Utility.
VCHR	Voucher	Document is an electronic payment document.

2.41 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.39 CodeOrProprietary**.*

Definition: Proprietary identification of the type of the remittance document.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.42 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the reference document type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.43 Number <Nb>

Presence: [0..1]
Definition: Unique and unambiguous identification of the referred document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.44 RelatedDate <RltdDt>

Presence: [0..1]
Definition: Date associated with the referred document.
Data Type: ISODate

3.0 SupplementaryData <SplmtryData>

Presence: [0..*]
Impacted by: R7
Definition: Additional information that cannot be captured in the structured elements and/or any other specific block.
Type: *The **SupplementaryData** block is composed of the following **SupplementaryData1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1		PlaceAndName	<PlcAndNm>	[0..1]	Text
3.2		Envelope	<Envlp>	[1..1]	

Rule(s): SupplementaryDataRule
This component may not be used without the explicit approval of a SEG and submission to the RA of ISO 20022 compliant structure(s) to be used in the Envelope element.

3.1 PlaceAndName <PlcAndNm>

Presence: [0..1]
Definition: Unambiguous reference to the location where the supplementary data must be inserted in the message instance.
In the case of XML, this is expressed by a valid XPath.
Data Type: Max350Text
Format: maxLength: 350
minLength: 1

3.2 Envelope <Envlp>

Presence: [1..1]

Definition: Technical element wrapping the supplementary data.

Type: *This message item is composed of the following **SupplementaryDataEnvelope1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.3		Contents	(User Defined)	[1..1]	

3.3 Contents (User Defined)

Presence: [1..1]

Definition: Technical element that specifies the supplementary data.

Type: (User Defined)

This content will be validated on a can do basis.

It may contain any XML structure.

Business Example 1

Narrative

Debtor Jones (account number 44956) has send a MandateCancellationRequest message to his account servicer DDDDUS31, asking for the cancellation of his existing mandate, identification number 1633/05 with creditor Jeffersons Car Insurance Company (account number 33441), without listing a specific reason.
Debtor Agent DDDDUS31 sends a MandateCancellationRequest message to the account servicer of the creditor, MMMMUS29.

Business Description

MandateCancellationRequest message from DDDDUS31 to MMMMUS29.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	ML12345
CreationDateTime	<CredDtTm>	2011-12-19T151:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Jones
InstructingAgent	<InstgAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	DDDDUS31
InstructedAgent	<InstdAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	MMMMUS29
UnderlyingCancellationDetails	**<UndrlygCxlDtls>**	
CancellationReason	<CxlRsn>	
Reason	<Rsn>	
Code	<Cd>	MD16
OriginalMandate	<OrgnlMndt>	

OriginalMandateIdentification	<OrglMndtId>	1633/05

XML Instance

```
<MndtCxlReq>
  <GrpHdr>
    <MsgId>ML12345</MsgId>
    <CreDtTm>2011-12-19T15:25:00</CreDtTm>
    <InitgPty>
      <Nm>Jones</Nm>
    </InitgPty>
    <InstgAgt>
      <FinInstnId>
        <BICFI>DDDDUS31</BICFI>
      </FinInstnId>
    </InstgAgt>
    <InstdAgt>
      <FinInstnId>
        <BICFI>MMMMUS29</BICFI>
      </FinInstnId>
    </InstdAgt>
  </GrpHdr>
  <UndrlygCxlDtls>
    <CxlRsn>
      <Rsn>
        <Cd>MD16</Cd>
      </Rsn>
    </CxlRsn>
    <OrgnlMndt>
      <OrgnlMndtId>1633/05</OrgnlMndtId>
    </OrgnlMndt>
  </UndrlygCxlDtls>
</MndtCxlReq>
```

Business Example 2

Narrative

Ultimate debtor Schneider and creditor Paris Solutions have agreed to end their contract as Schneider will no longer make use of the services provided by Paris Solutions. On this basis it is decided to cancel the existing mandate, identification number PS66678, between debtor Schmitt (account number DE89350700644570000) and creditor Paris Solutions (account number FR1420663338880500021M05505).
Creditor Paris Solutions sends a MandateCancellationRequest message to its account servicer CCCCFR23.
CCCCFR23 forwards the MandateCancellationRequest message to the account servicer of the debtor, TTTTDE48.

Business Description

MandateCancellationRequest message from Paris Solutions to CCCCFR23.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	FFRR5698

CreationDateTime	<CredDtTm>	2011-12-19T11:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Paris Solutions
UnderlyingCancellationDetails	**<UndrlygClxDtls>**	
CancellationReason	<CxlRsn>	
Reason	<Rsn>	
Proprietary	<Prtry>	End of contract
OriginalMandate	<OrgnlMndt>	
OriginalMandate	<OrgnlMndt>	
MandateIdentification	<MndtId>	PS66678
Creditor	<Cdtr>	
Name	<Nm>	Paris Solutions
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	FR1420663338880500 21M05505
Debtor	<Dbtr>	
Name	<Nm>	Schmitt
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
IBAN	<IBAN>	DE89350700644570000
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstId>	
BICFI	<BICFI>	TTTTDE48
UltimateDebtor	<UltmtDbtr>	
Name	<Nm>	Schneider

XML Instance

```
<MndtCxlReq>
    <GrpHdr>
      <MsgId>FFRR5698</MsgId>
      <CreDtTm>2011-12-19T11:25:00</CreDtTm>
      <InitgPty>
        <Nm>Paris Solutions</Nm>
      </InitgPty>
    </GrpHdr>
    <UndrlygCxlDtls>
      <CxlRsn>
        <Rsn>
          <Prtry>End of contract</Prtry>
        </Rsn>
      </CxlRsn>
```

```
        <OrgnlMndt>
          <OrgnlMndt>
            <MndtId>PS66678</MndtId>
            <Cdtr>
              <Nm>Paris Solutions</Nm>
            </Cdtr>
            <CdtrAcct>
              <Id>
                <IBAN>FR1420663338880500 21M05505</IBAN>
              </Id>
            </CdtrAcct>
            <Dbtr>
              <Nm>Schmitt</Nm>
            </Dbtr>
            <DbtrAcct>
              <Id>
                <IBAN>DE89350700644570000</IBAN>
              </Id>
            </DbtrAcct>
            <DbtrAgt>
              <FinInstnId>
                <BICFI>TTTTDE48</BICFI>
              </FinInstnId>
            </DbtrAgt>
            <UltmtDbtr>
              <Nm>Schneider</Nm>
            </UltmtDbtr>
          </OrgnlMndt>
        </OrgnlMndt>
      </UndrlygCxlDtls>
    </MndtCxlReq>
```


Business Example 3

Narrative

Debtor Stevens sends a MandateCancellationRequest message to his account servicer BBBBUS19 to cancel the existing mandate, identification number 88456, with creditor Williams for the reason that the delivered goods do no match the purchase order.
BBBBUS19 forwards the MandateCancellationRequest message to the account services of the creditor, DDDDUS56.

Business Description

MandateCancellationRequest message from Stevens to BBBBUS19.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	3455698
CreationDateTime	<CredDtTm>	2011-12-19T12:25:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Stevens

UnderlyingCancellationDetails	**<UndrlygClxDtls>**	
CancellationReason	<ClxRsn>	
Reason	<Rsn>	
Code	<Cd>	NARR
AdditionalInformation	<AddtlInf>	Delivery is not as agreed in purchase order 44558/06
OriginalMandate	<OrgnlMndt>	
OriginalMandateIdentification	<OrgnlMndtId>	88456

XML Instance

```
<MndtCxlReq>
    <GrpHdr>
      <MsgId>3455698</MsgId>
      <CreDtTm>2011-12-19T12:25:00</CreDtTm>
      <InitgPty>
        <Nm>Stevens</Nm>
      </InitgPty>
    </GrpHdr>
    <UndrlygCxlDtls>
      <CxlRsn>
        <Rsn>
          <Cd>NARR</Cd>
        </Rsn>
        <AddtlInf>Delivery is not as agreed in purchase order 44558/06</AddtlInf>
      </CxlRsn>
      <OrgnlMndt>
        <OrgnlMndtId>88456</OrgnlMndtId>
      </OrgnlMndt>
    </UndrlygCxlDtls>
  </MndtCxlReq>
```

pain.012.001.02 MandateAcceptanceReportV02

Message Functionality

Scope

The MandateAcceptanceReport message is sent from the agent of the receiver (debtor or creditor) of the MandateRequest message (initiation, amendment or cancellation) to the agent of the initiator of the MandateRequest message (debtor or creditor).
A MandateAcceptanceReport message is used to confirm the acceptance or rejection of a MandateRequest message. Where acceptance is part of the full process flow, a MandateRequest message only becomes valid after a confirmation of acceptance is received through a MandateAcceptanceReport message from the agent of the receiver.

Usage

The MandateAcceptanceReport message can contain only one confirmation of acceptance of rejection of one specific MandateRequest message.
The messages can be exchanged between debtor agent and creditor agent and between debtor agent and debtor and creditor agent and creditor.
The MandateAcceptanceReport message can be used in domestic and cross-border scenarios.

Outline

The MandateAcceptanceReport message is composed of 2 building blocks:

A. Group Header

This building block is mandatory and present once. It contains elements such as MessageIdentification, CreationDateAndTime, Authorisation.

B. Underlying Acceptance Details

This building block is mandatory and present once. It contains elements that identify the MandateRequest message and mandate for which the MandateAcceptanceReport message holds the confirmation. These include, among others, OriginalMessageInformation, AcceptanceResult, OriginalMandate.

Structure

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
		Message root	<MndtAccptncRpt>	[1..1]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.0		GroupHeader	<GrpHdr>	[1..1]		
1.1		MessageIdentification	<MsgId>	[1..1]	Text	
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime	
1.3		Authorisation	<Authstn>	[0..2]		

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
1.4	{Or	Code	<Cd>	[1..1]	Code	
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text	
1.6		InitiatingParty	<InitgPty>	[0..1]	+	
1.7		InstructingAgent	<InstgAgt>	[0..1]	+	
1.8		InstructedAgent	<InstdAgt>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.0		UnderlyingAcceptanceDetails	<UndrlygAccptncDtls>	[1..1]		
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	+	
2.2		AcceptanceResult	<AccptncRslt>	[1..1]		
2.3		Accepted	<Accptd>	[1..1]	Indicator	
2.4		RejectReason	<RjctRsn>	[0..1]		
2.5	{Or	Code	<Cd>	[1..1]	Code	
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text	
2.7		AdditionalRejectReasonInformation	<AddtlRjctRsnInf>	[0..*]	Text	
2.8		OriginalMandate	<OrgnlMndt>	[1..1]		
2.9	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text	
2.10	Or}	OriginalMandate	<OrgnlMndt>	[1..1]		G1, G2
2.11		MandateIdentification	<MndtId>	[1..1]	Text	
2.12		MandateRequestIdentification	<MndtReqId>	[0..1]	Text	
2.13		Type	<Tp>	[0..1]		
2.14		ServiceLevel	<SvcLvl>	[0..1]		
2.15	{{Or	Code	<Cd>	[1..1]	Code	
2.16	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.17		LocalInstrument	<LclInstrm>	[0..1]		
2.18	{{Or	Code	<Cd>	[1..1]	Code	
2.19	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.20		Occurrences	<Ocrncs>	[0..1]		
2.21		SequenceType	<SeqTp>	[1..1]	Code	
2.22		Frequency	<Frqcy>	[0..1]	Code	
2.23		Duration	<Drtn>	[0..1]	+	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
2.24		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime	
2.25		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime	
2.26		CollectionAmount	<ColltnAmt>	[0..1]	Amount	R4, R5
2.27		MaximumAmount	<MaxAmt>	[0..1]	Amount	R4, R5
2.28		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+	
2.29		Creditor	<Cdtr>	[1..1]	+	
2.30		CreditorAccount	<CdtrAcct>	[0..1]	+	
2.31		CreditorAgent	<CdtrAgt>	[0..1]	+	
2.32		UltimateCreditor	<UltmtCdtr>	[0..1]	+	
2.33		Debtor	<Dbtr>	[1..1]	+	
2.34		DebtorAccount	<DbtrAcct>	[0..1]	+	
2.35		DebtorAgent	<DbtrAgt>	[1..1]	+	
2.36		UltimateDebtor	<UltmtDbtr>	[0..1]	+	
2.37		ReferredDocument	<RfrdDoc>	[0..1]		
2.38		Type	<Tp>	[0..1]		
2.39		CodeOrProprietary	<CdOrPrtry>	[1..1]		
2.40	{{Or	Code	<Cd>	[1..1]	Code	
2.41	Or}}	Proprietary	<Prtry>	[1..1]	Text	
2.42		Issuer	<Issr>	[0..1]	Text	
2.43		Number	<Nb>	[0..1]	Text	
2.44		RelatedDate	<RltdDt>	[0..1]	DateTime	

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type	Rule/ Guid. No.
3.0		SupplementaryData	<SplmtryData>	[0..*]		R7
3.1		PlaceAndName	<PlcAndNm>	[0..1]	Text	
3.2		Envelope	<Envlp>	[1..1]		
3.3		Contents	(User Defined)	[1..1]		

Rules and Guidelines

Rules

R1 Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.160 for additional information.*

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.150 for additional information.*

R2 AnyBIC

Only a valid Business identifier code is allowed. Business identifier codes for financial or non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **PartyIdentification43** Type. Please refer to 'Message Item Types' section p.160 for additional information.*

R3 BICFI

Valid BICs for financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

*This Rule also impacts **BranchAndFinancialInstitutionIdentification5** Type. Please refer to 'Message Item Types' section p.150 for additional information.*

R4 CurrencyAmount

The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

R5 ActiveOrHistoricCurrency

The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

*This Rule also impacts **CashAccount24** Type. Please refer to 'Message Item Types' section p.145 for additional information.*

R6 IBAN

A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

*This Rule also impacts **CashAccount24** Type. Please refer to 'Message Item Types' section p.145 for additional information.*

R7 SupplementaryDataRule

This component may not be used without the explicit approval of a SEG and submission to the RA of ISO 20022 compliant structure(s) to be used in the Envelope element.

Guidelines

G1 UltimateDebtorGuideline

UltimateDebtor may only be present if different from Debtor.

G2 UltimateCreditorGuideline

UltimateCreditor may only be present if different from Creditor.

Message Items Description

*The following section identifies the elements of the **MandateAcceptanceReportV02** message definition.*

1.0 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics to identify the message and parties playing a role in the mandate acceptance, but which are not part of the mandate.

Type: *The **GroupHeader** block is composed of the following **GroupHeader47** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1		MessageIdentification	<MsgId>	[1..1]	Text
1.2		CreationDateTime	<CreDtTm>	[1..1]	DateTime
1.3		Authorisation	<Authstn>	[0..2]	
1.6		InitiatingParty	<InitgPty>	[0..1]	+
1.7		InstructingAgent	<InstgAgt>	[0..1]	+
1.8		InstructedAgent	<InstdAgt>	[0..1]	+

1.1 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the instructed party, to unambiguously identify the message.
Usage: The instructing party has to make sure that MessageIdentification is unique per instructed party for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.2 CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Data Type: ISODateTime

1.3 Authorisation <Authstn>

Presence: [0..2]

Definition: User identification or any user key to be used to check the authority of the initiating party.

Usage: The content is not of a technical nature, but reflects the organisational structure at the initiating side. The authorisation element can typically be used in relay scenarios, payment initiations, payment returns or payment reversals that are initiated on behalf of a party different from the initiating party.

Type: *This message item is composed of one of the following **Authorisation1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.4	{Or	Code	<Cd>	[1..1]	Code
1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

1.4 Code <Cd>

Presence: [1..1]

*This message item is part of choice **1.3 Authorisation**.*

Definition: Specifies the authorisation, in a coded form.

Data Type: Code

*One of the following **Authorisation1Code** values must be used:*

Code	Name	Definition
AUTH	PreAuthorisedFile	Indicates a file has been pre authorised or approved within the originating customer environment and no further approval is required.
FDET	FileLevelAuthorisationDetails	Indicates that a file requires additional file level approval, with the ability to view both the payment information block and supporting customer credit transaction detail.
FSUM	FileLevelAuthorisationSummary	Indicates that a file requires additional file level approval, with the ability to view only the payment information block level information.
ILEV	InstructionLevelAuthorisation	Indicates that a file requires all customer transactions to be authorised or approved.

1.5 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **1.3 Authorisation**.*

Definition: Specifies the authorisation, in a free text form.

Data Type: Max128Text

Format: maxLength: 128
minLength: 1

1.6 InitiatingParty <InitgPty>

Presence: [0..1]

Definition: Party that initiates the mandate message.

Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

1.7 InstructingAgent <InstgAgt>

Presence: [0..1]

Definition: Agent that instructs the next party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructing agent is the party sending the amendment and cancellation request message and not the party that sent the original mandate initiation request message.
In case of acceptance report message, the instructing agent is the party sending the acceptance report message and not the party that sent the original mandate request message.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.150 in 'Message Item Types' section.*

1.8 InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out an instruction.

Usage Rule:
In case of amendment and cancellation request messages, the instructed agent is the party receiving the amendment and cancellation request message and not the party that received the original mandate initiation request message.
In case of acceptance report message, the instructed agent is the party receiving the acceptance report message and not the party that received the original mandate request message.

Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.150 in 'Message Item Types' section.*

2.0 UnderlyingAcceptanceDetails <UndrlygAccptncDtls>

Presence: [1..1]

Definition: Set of elements used to provide information on the acception or rejection of the mandate request.

Type: *The **UnderlyingAcceptanceDetails** block is composed of the following **MandateAcceptance2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1		OriginalMessageInformation	<OrgnlMsgInf>	[0..1]	+
2.2		AcceptanceResult	<AccptncRslt>	[1..1]	
2.8		OriginalMandate	<OrgnlMndt>	[1..1]	

2.1 OriginalMessageInformation <OrgnlMsgInf>

Presence: [0..1]
Definition: Provides information on the original message.
Type: *This message item is composed of the following **OriginalMessageInformation1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	MessageIdentification	<MsgId>	[1..1]	Text
	MessageNameIdentification	<MsgNmId>	[1..1]	Text
	CreationDateTime	<CreDtTm>	[0..1]	DateTime

*For additional Type information, please refer to **OriginalMessageInformation1** p.159 in 'Message Item Types' section.*

2.2 AcceptanceResult <AccptncRslt>

Presence: [1..1]
Definition: Provides detailed information on the acceptance result.
Type: *This message item is composed of the following **AcceptanceResult6** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.3		Accepted	<Accptd>	[1..1]	Indicator
2.4		RejectReason	<RjctRsn>	[0..1]	
2.7		AdditionalRejectReasonInformation	<AddtlRjctRsnInf>	[0..*]	Text

2.3 Accepted <Accptd>

Presence: [1..1]
Definition: Indicates whether the mandate request was accepted or rejected.
Data Type: *One of the following **YesNoIndicator** values must be used:*
MeaningWhenTrue: Yes
MeaningWhenFalse: No

2.4 RejectReason <RjctRsn>

Presence: [0..1]
Definition: Specifies the reason for the rejection of a mandate request.
Type: *This message item is composed of one of the following **MandateReason1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.5	{Or	Code	<Cd>	[1..1]	Code
2.6	Or}	Proprietary	<Prtry>	[1..1]	Text

2.5 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.4 RejectReason**.*

Definition: Reason, as published in an external reason code list.

Data Type: ExternalMandateReason1Code

Format: maxLength: 4
minLength: 1

2.6 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.4 RejectReason**.*

Definition: Reason, in a proprietary form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.7 AdditionalRejectReasonInformation <AddtlRjctRsnInf>

Presence: [0..*]

Definition: Further details on the reject reason.

Data Type: Max105Text

Format: maxLength: 105
minLength: 1

2.8 OriginalMandate <OrgnlMndt>

Presence: [1..1]

Definition: Provides the original mandate data.

Type: *This message item is composed of one of the following **OriginalMandate2Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.9	{Or	OriginalMandateIdentification	<OrgnlMndtId>	[1..1]	Text
2.10	Or}	OriginalMandate	<OrgnlMndt>	[1..1]	

2.9 OriginalMandateIdentification <OrgnlMndtId>

Presence: [1..1]

*This message item is part of choice **2.8 OriginalMandate**.*

Definition: Unique identification, as assigned by the creditor, to unambiguously identify the original mandate.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.10 OriginalMandate <OrgnlMndt>

Presence: [1..1]

Impacted by: G1, G2

*This message item is part of choice **2.8 OriginalMandate**.*

Definition: Provides the original mandate data.

Type: *This message item is composed of the following **Mandate1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.11		MandateIdentification	<MndtId>	[1..1]	Text
2.12		MandateRequestIdentification	<MndtReqId>	[0..1]	Text
2.13		Type	<Tp>	[0..1]	
2.20		Occurrences	<Ocrncs>	[0..1]	
2.26		CollectionAmount	<ColltnAmt>	[0..1]	Amount
2.27		MaximumAmount	<MaxAmt>	[0..1]	Amount
2.28		CreditorSchemeIdentification	<CdtrSchmeId>	[0..1]	+
2.29		Creditor	<Cdtr>	[1..1]	+
2.30		CreditorAccount	<CdtrAcct>	[0..1]	+
2.31		CreditorAgent	<CdtrAgt>	[0..1]	+
2.32		UltimateCreditor	<UltmtCdtr>	[0..1]	+
2.33		Debtor	<Dbtr>	[1..1]	+
2.34		DebtorAccount	<DbtrAcct>	[0..1]	+
2.35		DebtorAgent	<DbtrAgt>	[1..1]	+
2.36		UltimateDebtor	<UltmtDbtr>	[0..1]	+
2.37		ReferredDocument	<RfrdDoc>	[0..1]	

Guideline(s): UltimateCreditorGuideline
UltimateCreditor may only be present if different from Creditor.

UltimateDebtorGuideline
UltimateDebtor may only be present if different from Debtor.

2.11 MandateIdentification <MndtId>

Presence: [1..1]

Definition: Unique identification, as assigned by the creditor, to unambiguously identify the mandate.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.12 MandateRequestIdentification <MndtReqId>

Presence: [0..1]

Definition: Identification for the mandate request, as assigned by the initiating party.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.13 Type <Tp>

Presence: [0..1]

Definition: Specifies the type of mandate, such as paper, electronic or scheme.

Type: *This message item is composed of the following* ***MandateTypeInformation1*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.14		ServiceLevel	<SvcLvl>	[0..1]	
2.17		LocalInstrument	<LclInstrm>	[0..1]	

2.14 ServiceLevel <SvcLvl>

Presence: [0..1]
Definition: Agreement under which or rules under which the mandate resides.
Type: *This message item is composed of one of the following* ***ServiceLevel8Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.15	{Or	Code	<Cd>	[1..1]	Code
2.16	Or}	Proprietary	<Prtry>	[1..1]	Text

2.15 Code <Cd>

Presence: [1..1]
This message item is part of choice ***2.14 ServiceLevel****.*
Definition: Specifies a pre-agreed service or level of service between the parties, as published in an external service level code list.
Data Type: ExternalServiceLevel1Code
Format: maxLength: 4
minLength: 1

2.16 Proprietary <Prtry>

Presence: [1..1]
This message item is part of choice ***2.14 ServiceLevel****.*
Definition: Specifies a pre-agreed service or level of service between the parties, as a proprietary code.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.17 LocalInstrument <LclInstrm>

Presence: [0..1]
Definition: User community specific instrument.
Usage: This element is used to specify a local instrument, local clearing option and/or further qualify the service or service level.
Type: *This message item is composed of one of the following* ***LocalInstrument2Choice*** *element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.18	{Or	Code	<Cd>	[1..1]	Code
2.19	Or}	Proprietary	<Prtry>	[1..1]	Text

2.18 Code <Cd>

Presence: [1..1]

*This message item is part of choice **2.17 LocalInstrument**.*

Definition: Specifies the local instrument, as published in an external local instrument code list.

Data Type: ExternalLocalInstrument1Code

Format: maxLength: 35
minLength: 1

2.19 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **2.17 LocalInstrument**.*

Definition: Specifies the local instrument, as a proprietary code.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

2.20 Occurrences <Ocrncs>

Presence: [0..1]

Definition: Provides details of the duration of the mandate and occurrence of the underlying transactions.

Type: *This message item is composed of the following **MandateOccurrences2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.21		SequenceType	<SeqTp>	[1..1]	Code
2.22		Frequency	<Frqcy>	[0..1]	Code
2.23		Duration	<Drtn>	[0..1]	+
2.24		FirstCollectionDate	<FrstColltnDt>	[0..1]	DateTime
2.25		FinalCollectionDate	<FnlColltnDt>	[0..1]	DateTime

2.21 SequenceType <SeqTp>

Presence: [1..1]

Definition: Identifies the underlying transaction sequence as either recurring or one-off.

Data Type: Code

*One of the following **SequenceType2Code** values must be used:*

Code	Name	Definition
OOFF	OneOff	Direct debit instruction where the debtor's authorisation is used to initiate one single direct debit transaction.
RCUR	Recurring	Direct debit instruction where the debtor's authorisation is used for regular direct debit transactions initiated by the creditor.

2.22 Frequency <Frqcy>

Presence: [0..1]
Definition: Regularity with which instructions are to be created and processed.
Data Type: Code
*When this message item is present, one of the following **Frequency6Code** values must be used:*

Code	Name	Definition
ADHO	Adhoc	Event takes place on request or as necessary.
DAIL	Daily	Event takes place every day.
FRTN	Fortnightly	Event takes place every two weeks.
INDA	IntraDay	Event takes place several times a day.
MIAN	SemiAnnual	Event takes place every six months or two times a year.
MNTH	Monthly	Event takes place every month or once a month.
QURT	Quarterly	Event takes place every three months or four times a year.
WEEK	Weekly	Event takes place once a week.
YEAR	Annual	Event takes place every year or once a year.

2.23 Duration <Drtn>

Presence: [0..1]
Definition: Length of time for which the mandate remains valid.
Type: *This message item is composed of the following **DatePeriodDetails1** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FromDate	<FrDt>	[1..1]	DateTime
	ToDate	<ToDt>	[0..1]	DateTime

*For additional Type information, please refer to **DatePeriodDetails1** p.149 in 'Message Item Types' section.*

2.24 FirstCollectionDate <FrstColltnDt>

Presence: [0..1]
Definition: Date of the first collection of a direct debit as per the mandate.
Data Type: ISODate

2.25 FinalCollectionDate <FnlColltnDt>

Presence: [0..1]
Definition: Date of the final collection of a direct debit as per the mandate.
Data Type: ISODate

2.26 CollectionAmount <ColltnAmt>

Presence: [0..1]
Impacted by: R4, R5

Definition: Fixed amount to be collected from the debtor's account.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.27 MaximumAmount <MaxAmt>

Presence: [0..1]

Impacted by: R4, R5

Definition: Maximum amount that may be collected from the debtor's account, per instruction.

Data Type: ActiveOrHistoricCurrencyAndAmount

This data type must be used with the following XML Attribute: ***Currency (Ccy)*** *which is typed by* ***ActiveOrHistoricCurrencyCode****.*

Format: **ActiveOrHistoricCurrencyAndAmount**
fractionDigits: 5
minInclusive: 0
totalDigits: 18
ActiveOrHistoricCurrencyCode
[A-Z]{3,3}

Rule(s): **ActiveOrHistoricCurrencyAndAmount**
CurrencyAmount
The number of fractional digits (or minor unit of currency) must comply with ISO 4217.
Note: The decimal separator is a dot.

ActiveOrHistoricCurrencyCode
ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

2.28 CreditorSchemeIdentification <CdtrSchmeId>

Presence: [0..1]

Definition: Credit party that signs the mandate.

Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.29 Creditor <Cdtr>

Presence: [1..1]
Definition: Party that signs the mandate and to whom an amount of money is due.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.30 CreditorAccount <CdtrAcct>

Presence: [0..1]
Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.
Type: *This message item is composed of the following **CashAccount24** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount24** p.145 in 'Message Item Types' section.*

2.31 CreditorAgent <CdtrAgt>

Presence: [0..1]
Definition: Financial institution servicing an account for the creditor.

Type: *This message item is composed of the following* ***BranchAndFinancialInstitutionIdentification5*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

For additional Type information, please refer to ***BranchAndFinancialInstitutionIdentification5*** *p.150 in 'Message Item Types' section.*

2.32 UltimateCreditor <UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

For additional Type information, please refer to ***PartyIdentification43*** *p.160 in 'Message Item Types' section.*

2.33 Debtor <Dbtr>

Presence: [1..1]

Definition: Party that signs the mandate and owes an amount of money to the (ultimate) creditor.

Type: *This message item is composed of the following* ***PartyIdentification43*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

For additional Type information, please refer to ***PartyIdentification43*** *p.160 in 'Message Item Types' section.*

2.34 DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor, to which a debit entry will be made as a result of the transaction.

Type: *This message item is composed of the following* ***CashAccount24*** *element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Identification	<Id>	[1..1]	
	Type	<Tp>	[0..1]	
	Currency	<Ccy>	[0..1]	Code
	Name	<Nm>	[0..1]	Text

*For additional Type information, please refer to **CashAccount24** p.145 in 'Message Item Types' section.*

2.35 DebtorAgent <DbtrAgt>

Presence: [1..1]
Definition: Financial institution servicing an account for the debtor.
Type: *This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
	BranchIdentification	<BrnchId>	[0..1]	

*For additional Type information, please refer to **BranchAndFinancialInstitutionIdentification5** p.150 in 'Message Item Types' section.*

2.36 UltimateDebtor <UltmtDbtr>

Presence: [0..1]
Definition: Ultimate party that owes an amount of money to the (ultimate) creditor.
Type: *This message item is composed of the following **PartyIdentification43** element(s):*

Or	Message Item	<XML Tag>	Mult.	Represent./ Type
	Name	<Nm>	[0..1]	Text
	PostalAddress	<PstlAdr>	[0..1]	
	Identification	<Id>	[0..1]	
	CountryOfResidence	<CtryOfRes>	[0..1]	Code
	ContactDetails	<CtctDtls>	[0..1]	

*For additional Type information, please refer to **PartyIdentification43** p.160 in 'Message Item Types' section.*

2.37 ReferredDocument <RfrdDoc>

Presence: [0..1]
Definition: Provides information to identify the underlying documents associated with the mandate.
Type: *This message item is composed of the following **ReferredDocumentInformation3** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.38		Type	<Tp>	[0..1]	
2.43		Number	<Nb>	[0..1]	Text
2.44		RelatedDate	<RltdDt>	[0..1]	DateTime

2.38 Type <Tp>

Presence: [0..1]
Definition: Specifies the type of referred document.
Type: *This message item is composed of the following **ReferredDocumentType2** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.39		CodeOrProprietary	<CdOrPrtry>	[1..1]	
2.42		Issuer	<Issr>	[0..1]	Text

2.39 CodeOrProprietary <CdOrPrtry>

Presence: [1..1]
Definition: Provides the type details of the referred document.
Type: *This message item is composed of one of the following **ReferredDocumentType1Choice** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.40	{Or	Code	<Cd>	[1..1]	Code
2.41	Or}	Proprietary	<Prtry>	[1..1]	Text

2.40 Code <Cd>

Presence: [1..1]
*This message item is part of choice **2.39 CodeOrProprietary**.*
Definition: Document type in a coded form.
Data Type: Code
*One of the following **DocumentType5Code** values must be used:*

Code	Name	Definition
AROI	AccountReceivableOpenItem	Document is a payment that applies to a specific source document.
BOLD	BillOfLading	Document is a shipping notice.
CINV	CommercialInvoice	Document is an invoice.
CMCN	CommercialContract	Document is an agreement between the parties, stipulating the terms and conditions of the delivery of goods or services.
CNFA	CreditNoteRelatedToFinancialAdjustment	Document is a credit note for the final amount settled for a commercial transaction.

Code	Name	Definition
CREN	CreditNote	Document is a credit note.
DEBN	DebitNote	Document is a debit note.
DISP	DispatchAdvice	Document is a dispatch advice.
DNFA	DebitNoteRelatedToFinancialAdjustment	Document is a debit note for the final amount settled for a commercial transaction.
HIRI	HireInvoice	Document is an invoice for the hiring of human resources or renting goods or equipment.
MSIN	MeteredServiceInvoice	Document is an invoice claiming payment for the supply of metered services, eg, gas or electricity, supplied to a fixed meter.
SBIN	SelfBilledInvoice	Document is an invoice issued by the debtor.
SOAC	StatementOfAccount	Document is a statement of the transactions posted to the debtor's account at the supplier.
TSUT	TradeServicesUtilityTransaction	Document is a transaction identifier as assigned by the Trade Services Utility.
VCHR	Voucher	Document is an electronic payment document.

2.41 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **2.39** **CodeOrProprietary**.*
Definition: Proprietary identification of the type of the remittance document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.42 Issuer <Issr>

Presence: [0..1]
Definition: Identification of the issuer of the reference document type.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.43 Number <Nb>

Presence: [0..1]
Definition: Unique and unambiguous identification of the referred document.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

2.44 RelatedDate <RltdDt>

Presence: [0..1]
Definition: Date associated with the referred document.

Data Type: ISODate

3.0 SupplementaryData <SplmtryData>

Presence: [0..*]

Impacted by: R7

Definition: Additional information that cannot be captured in the structured elements and/or any other specific block.

Type: *The **SupplementaryData** block is composed of the following **SupplementaryData1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1		PlaceAndName	<PlcAndNm>	[0..1]	Text
3.2		Envelope	<Envlp>	[1..1]	

Rule(s): SupplementaryDataRule
This component may not be used without the explicit approval of a SEG and submission to the RA of ISO 20022 compliant structure(s) to be used in the Envelope element.

3.1 PlaceAndName <PlcAndNm>

Presence: [0..1]

Definition: Unambiguous reference to the location where the supplementary data must be inserted in the message instance.
In the case of XML, this is expressed by a valid XPath.

Data Type: Max350Text

Format: maxLength: 350
minLength: 1

3.2 Envelope <Envlp>

Presence: [1..1]

Definition: Technical element wrapping the supplementary data.

Type: *This message item is composed of the following **SupplementaryDataEnvelope1** element(s):*

Index	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.3		Contents	(User Defined)	[1..1]	

3.3 Contents (User Defined)

Presence: [1..1]

Definition: Technical element that specifies the supplementary data.

Type: (User Defined)

This content will be validated on a can do basis.

It may contain any XML structure.

Business Example 1

Narrative

On 19 December 2011, debtor Schmitt purchases goods from creditor GHF Electronics. Debtor Schmitt and creditor GHF Electronics agree that the purchased goods will be paid for via direct debit transactions in monthly payments. The number, assigned by GHF Electronics, with which this agreement is identified, is 09/172345.
Debtor Schmitt sends a MandateInitiationRequest message to its account servicer, AAAADE29. Creditor agent BBBBFR44 sends a MandateAcceptanceReport message to debtor agent AAAADE29.
This MandateAcceptanceReport message holds the confirmation of the rejection of MandateInitiationRequest message with message identification 2233EFGHJK. The request can not be accepted as the debtor refused the MandateInitiationRequest message without any specific reason.

Business Description

MandateAcceptanceReport message from BBBBFR44 to AAAADE29.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	2345EFRTG
CreationDateTime	<CredDtTm>	2011-12-19T12:35:00
InstructingAgent	<InstgAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	BBBBFR44
InstructedAgent	<InstdAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	AAAADE29
UnderlyingAcceptanceDetails	**<UndrlygAccptncDtls>**	
OriginalMessageInformation	<OrgnlMsgInf>	
MessageIdentification	<MsgId>	2233EFGHJK
MessageNameIdentification	<MsgNmId>	pain.009.001.02
CreationDateTime	<CreDtTm>	2011-12-19T12:25:00
AcceptanceResult	<AccptncRslt>	
Accepted	<Accptd>	FALSE
RejectReason	<RjctRsn>	
Code	<Cd>	MS02
OriginalMandate	<OrgnlMndt>	
OrignalMandateIdentification	<OrgnlMndtId>	09/172345

XML Instance

```
<MndtAccptncRpt>
  <GrpHdr>
    <MsgId>2345EFRTG</MsgId>
    <CreDtTm>2011-12-19T12:35:00</CreDtTm>
```

```
      <InstgAgt>
        <FinInstnId>
          <BICFI>BBBBFR44</BICFI>
        </FinInstnId>
      </InstgAgt>
      <InstdAgt>
        <FinInstnId>
          <BICFI>AAAADE29</BICFI>
        </FinInstnId>
      </InstdAgt>
    </GrpHdr>
    <UndrlygAccptncDtls>
      <OrgnlMsgInf>
        <MsgId>2233EFGHJK</MsgId>
        <MsgNmId>pain.009.001.02</MsgNmId>
        <CreDtTm>2011-12-19T12:25:00</CreDtTm>
      </OrgnlMsgInf>
      <AccptncRslt>
        <Accptd>false</Accptd>
        <RjctRsn>
          <Cd>MS02</Cd>
        </RjctRsn>
      </AccptncRslt>
      <OrgnlMndt>
        <OrgnlMndtId>09/172345</OrgnlMndtId>
      </OrgnlMndt>
    </UndrlygAccptncDtls>
  </MndtAccptncRpt>
```


Business Example 2

Narrative

On 9 June 2012, debtor Johnson purchases mobile phone services from creditor Jersey Mobile Phone. Debtor Johnson and creditor Jersey Mobile Phone agree that the services will be paid for via direct debit transactions in monthly payments for the amount calculated for a period of the past month, starting the first payment on 25 June 2012, from debtor account 5544732 at debtor agent FFFFUS91. It was agreed that the contract for these services would run until further notice. The mandate identification, assigned by creditor Jersey Mobile Phone is JMP06/3345. Debtor Johnson received a contractual agreement document on 11 June 2012 with reference number JMP/24653 which holds, among others, detailed information on the creditor account (76543) and the creditor agent (DDDDUS31).
Creditor Jersey Mobile Phone sends a MandateInitiationRequest message to its account servicer, DDDDUS31.
DDDDUS31 forwards the MandateInitiationRequest message to the account servicer of debtor Johnson, FFFFUS91.
Debtor Agent FFFFUS91 sends a MandateAcceptanceReport message to creditor agent DDDDUS31.
This MandateAcceptanceReport message holds the confirmation of the acceptance of the MandateInitiationRequest message with message identification BBBB654322.

Business Description

MandateAcceptanceReport message from FFFFUS91 to DDDDUS31.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	FF5678965

CreationDateTime	<CredDtTm>	2012-06-10T11:20:00
InstructingAgent	<InstgAgt>	
FinancialInstitutionsIdentification	<FinInstnId	
BICFI	<BICFI>	FFFFUS91
InstructedAgent	<InstdAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
BICFI	<BICFI>	DDDDUS31
UnderlyingAcceptanceDetails	**<UndrlygAccptncDtls>**	
OriginalMessageInformation	<OrgnlMsgInf>	
MessageIdentification	<MsgId>	BBBB654322
MessageNameIdentification	<MsgNmId>	pain.009.001.02
CreationDateTime	<CredDtTm>	2012-06-10T11:00:00
AcceptanceResult	<AccptncRslt>	
Accepted	<Accptd>	TRUE
OriginalMandate	<OrgnlMndt>	
OriginalMandate	<OrgnlMndt>	
MandateIdentification	<MndtId>	JMP06/3345
Occurences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR
Frequency	<Frqcy>	MNTH
FirstCollectionDate	<FrstColltnDt>	2012-06-25
Creditor	<Cdtr>	
Name	<Nm>	Jersey Mobile Phone
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	76543
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
Identification	<Id>	
BICFI	<BICFI>	DDDDUS31
Debtor	<Dbtr>	
Name	<Nm>	Johnson
DebtorAccount	<DbtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	5544732

DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstId>	
BICFI	<BICFI>	FFFFUS91
ReferredDocument	<RfrdDoc>	
Type	<Tp>	
CodeOrProprietary	<CdOrPrtry>	
Code	<Cd>	CMCN
Number	<Nb>	JMP/24653
RelatedDate	<RltdDt>	2012-06-11

XML Instance


```
<MndtAccptncRpt>
    <GrpHdr>
      <MsgId>FF5678965</MsgId>
      <CreDtTm>2012-06-10T11:20:00</CreDtTm>
      <InstgAgt>
        <FinInstnId>
          <BICFI>FFFFUS91</BICFI>
        </FinInstnId>
      </InstgAgt>
      <InstdAgt>
        <FinInstnId>
          <BICFI>DDDDUS31</BICFI>
        </FinInstnId>
      </InstdAgt>
    </GrpHdr>
    <UndrlygAccptncDtls>
      <OrgnlMsgInf>
        <MsgId>BBBB654322</MsgId>
        <MsgNmId>pain.009.001.02</MsgNmId>
        <CreDtTm>2012-06-10T11:00:00</CreDtTm>
      </OrgnlMsgInf>
      <AccptncRslt>
        <Accptd>true</Accptd>
      </AccptncRslt>
      <OrgnlMndt>
        <OrgnlMndt>
          <MndtId>JMP06/3345</MndtId>
          <Ocrncs>
            <SeqTp>RCUR</SeqTp>
            <Frqcy>MNTH</Frqcy>
            <FrstColltnDt>2012-06-25</FrstColltnDt>
          </Ocrncs>
          <Cdtr>
            <Nm>Jersey Mobile Phone</Nm>
          </Cdtr>
          <CdtrAcct>
            <Id>
```

```
                <Othr>
                  <Id>76543</Id>
                </Othr>
              </Id>
            </CdtrAcct>
            <CdtrAgt>
              <FinInstnId>
                <BICFI>DDDDUS31</BICFI>
              </FinInstnId>
            </CdtrAgt>
            <Dbtr>
              <Nm>Johnson</Nm>
            </Dbtr>
            <DbtrAcct>
              <Id>
                <Othr>
                  <Id>5544732</Id>
                </Othr>
              </Id>
            </DbtrAcct>
            <DbtrAgt>
              <FinInstnId>
                <BICFI>FFFFUS91</BICFI>
              </FinInstnId>
            </DbtrAgt>
            <RfrdDoc>
              <Tp>
                <CdOrPrtry>
                  <Cd>CMCN</Cd>
                </CdOrPrtry>
              </Tp>
              <Nb>JMP/24653</Nb>
              <RltdDt>2012-06-11</RltdDt>
            </RfrdDoc>
          </OrgnlMndt>
        </OrgnlMndt>
      </UndrlygAccptncDtls>
    </MndtAccptncRpt>
```


Business Example 3

Narrative

Debtor Johnson has a contract with creditor Jersey Mobile for the purchase of mobile phone services. It was agreed that the contract would run until further notice. Debtor Johnson wants to end the contract and has sent a MandateCancellationRequest message to its account servicer, FFFFUS91.
Debtor Agent FFFFUS91 forwards the MandateCancellationRequest message to the account servicer of the creditor, DDDDUS31. The outstanding mandate holds the details for the monthly payments for the amount calculated for a period of the past month, starting the first payment on 25 June 2012, from debtor account 5544732. The mandate identification, assigned by creditor Jersey Mobile Phone is JMP06/3345. Debtor Johnson received a contractual agreement document on 11 June 2012 with reference number JMP/24653 which holds, among others, detailed information on the creditor account (76543) and creditor agent (DDDDUS31).

Debtor agent FFFFUS91 received a MandateAcceptanceReport message from creditor agent DDDDUS31 and forwards the message to debtor Johnson.
This MandateAcceptanceReport message holds the confirmation of the acceptance of MandateCancellationRequest message with message identification CCCR27896.

Business Description

MandateAcceptanceReport message from FFFFUS91 to Debtor Johnson.

Element	***<XMLTag>***	***Content***
Group Header	**<GrpHdr>**	
MessageIdentification	<MsgId>	AAAAR78965
CreationDateTime	<CredDtTm>	2012-06-10T11:20:00
InitiatingParty	<InitgPty>	
Name	<Nm>	Jersey Mobile Phone
UnderlyingAcceptanceDetails	**<UndrlygAccptncDtls>**	
OriginalMessageInformation	<OrgnlMsgInf>	
MessageIdentification	<MsgId>	CCCR27896
MessageNameIdentification	<MsgNmId>	pain.011.001.02
CreationDateTime	<CredDtTm>	2012-06-10T11:00:00
AcceptanceResult	<AccptncRslt>	
Accepted	<Accptd>	TRUE
OriginalMandate	<OrgnlMndt>	
OriginalMandate	<OrgnlMndt>	
MandateIdentification	<MndtId>	JMP06/3345
Occurences	<Ocrncs>	
SequenceType	<SeqTp>	RCUR
Frequency	<Frqcy>	MNTH
FirstCollectionDate	<FrstColltnDt>	2012-06-25
Creditor	<Cdtr>	
Name	<Nm>	Jersey Mobile Phone
CreditorAccount	<CdtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	76543
CreditorAgent	<CdtrAgt>	
FinancialInstitutionIdentification	<FinInstnId>	
Identification	<Id>	
BICFI	<BICFI>	DDDDUS31
Debtor	<Dbtr>	
Name	<Nm>	Johnson

DebtorAccount	<DbtrAcct>	
Identification	<Id>	
Other	<Othr>	
Identification	<Id>	5544732
DebtorAgent	<DbtrAgt>	
FinancialInstitutionIdentification	<FinInstId>	
BICFI	<BICFI>	FFFFUS91
ReferredDocument	<RfrdDoc>	
Type	<Tp>	
CodeOrProprietary	<CdOrPrtry>	
Code	<Cd>	CMCN
Number	<Nb>	JMP/24653
RelatedDate	<RltdDt>	2012-06-11

XML Instance


```
<MndtAccptncRpt>
    <GrpHdr>
      <MsgId>AAAR78965</MsgId>
      <CreDtTm>2012-06-10T11:20:00</CreDtTm>
      <InitgPty>
        <Nm>Jersey Mobile Phone</Nm>
      </InitgPty>
    </GrpHdr>
    <UndrlygAccptncDtls>
      <OrgnlMsgInf>
        <MsgId>CCCR27896</MsgId>
        <MsgNmId>pain.011.001.02</MsgNmId>
        <CreDtTm>2012-06-10T11:00:00</CreDtTm>
      </OrgnlMsgInf>
      <AccptncRslt>
        <Accptd>true</Accptd>
      </AccptncRslt>
      <OrgnlMndt>
        <OrgnlMndt>
          <MndtId>JMP06/3345</MndtId>
          <Ocrncs>
            <SeqTp>RCUR</SeqTp>
            <Frqcy>MNTH</Frqcy>
            <FrstColltnDt>2012-06-25</FrstColltnDt>
          </Ocrncs>
          <Cdtr>
            <Nm>Jersey Mobile Phone</Nm>
          </Cdtr>
          <CdtrAcct>
            <Id>
              <Othr>
```

```
                <Id>76543</Id>
              </Othr>
            </Id>
          </CdtrAcct>
          <CdtrAgt>
            <FinInstnId>
              <BICFI>DDDDUS31</BICFI>
            </FinInstnId>
          </CdtrAgt>
          <Dbtr>
            <Nm>Johnson</Nm>
          </Dbtr>
          <DbtrAcct>
            <Id>
              <Othr>
                <Id>5544732</Id>
              </Othr>
            </Id>
          </DbtrAcct>
          <DbtrAgt>
            <FinInstnId>
              <BICFI>FFFFUS91</BICFI>
            </FinInstnId>
          </DbtrAgt>
          <RfrdDoc>
            <Tp>
              <CdOrPrtry>
                <Cd>CMCN</Cd>
              </CdOrPrtry>
            </Tp>
            <Nb>JMP/24653</Nb>
            <RltdDt>2012-06-11</RltdDt>
          </RfrdDoc>
        </OrgnlMndt>
      </OrgnlMndt>
    </UndrlygAccptncDtls>
  </MndtAccptncRpt>
```

Message Item Types

Data Types

Data Types Index

1 Amount

1.1 ActiveCurrencyAndAmount
1.2 ActiveOrHistoricCurrencyAndAmount
1.3 CurrencyAndAmount
1.4 ImpliedCurrencyAndAmount

2 Date Time

2.1 ISODate
2.2 ISODateTime

3 Identifier

3.1 ActiveCurrencyCode
3.2 ActiveOrHistoricCurrencyCode
3.3 AnyBICIdentifier
3.4 AustrianBankleitzahlIdentifier
3.5 BBANIdentifier
3.6 BICFIIdentifier
3.7 BICNonFIIdentifier
3.8 BelgianIdentifier
3.9 BloombergIdentifier
3.10 CHIPSParticipantIdentifier
3.11 CHIPSUniversalIdentifier
3.12 CUSIPIdentifier
3.13 CanadianPaymentsARNIdentifier
3.14 ConsolidatedTapeAssociationIdentifier
3.15 CountryCode
3.16 CurrencyCode
3.17 DunsIdentifier
3.18 DutchIdentifier
3.19 EANGLNIdentifier
3.20 EuroclearClearstreamIdentifier
3.21 ExternalAccountIdentification1Code
3.22 ExternalCashAccountType1Code
3.23 ExternalClearingSystemIdentification1Code
3.24 ExternalCode
3.25 ExternalFinancialInstitutionIdentification1Code
3.26 ExternalLocalInstrument1Code
3.27 ExternalMandateReason1Code
3.28 ExternalOrganisationIdentification1Code
3.29 ExternalPersonIdentification1Code
3.30 ExternalServiceLevel1Code
3.31 ExternalStatusReason1Code
3.32 FedwireRoutingNumberIdentifier
3.33 GermanBankleitzahlIdentifier

3.34 HellenicBankIdentificationCodeIdentifier
3.35 HongKongBankIdentifier
3.36 IBAN2007Identifier
3.37 ISINIdentifier
3.38 IndianFinancialSystemCodeIdentifier
3.39 IrishNSCIdentifier
3.40 ItalianDomesticIdentifier
3.41 LanguageCode
3.42 MICIdentifier
3.43 NewZealandNCCIdentifier
3.44 PolishNationalClearingCodeIdentifier
3.45 PortugueseNCCIdentifier
3.46 QUICKIdentifier
3.47 RICIdentifier
3.48 RussianCentralBankIdentificationCodeIdentifier
3.49 SEDOLIdentifier
3.50 SicovamIdentifier
3.51 SouthAfricanNCCIdentifier
3.52 SpanishDomesticInterbankingIdentifier
3.53 SwissBCIdentifier
3.54 SwissSICIdentifier
3.55 TickerIdentifier
3.56 UKDomesticSortCodeIdentifier
3.57 UPICIdentifier
3.58 ValorenIdentifier
3.59 WertpapierIdentifier

4 Quantity: Number and Decimal Number

4.1 Number

5 Rate

5.1 PercentageRate

6 Text

6.1 Max105Text
6.2 Max128Text
6.3 Max140Text
6.4 Max15NumericText
6.5 Max16Text
6.6 Max2048Text
6.7 Max256Text
6.8 Max34Text
6.9 Max350Text
6.10 Max35Text
6.11 Max3NumericText
6.12 Max70Text
6.13 PhoneNumber

Data Types Description

1 Amount

1.1 ActiveCurrencyAndAmount

Definition:	A number of monetary units specified in an active currency where the unit of currency is explicit and compliant with ISO 4217.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***ActiveCurrencyCode****.*
Format:	**ActiveCurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **ActiveCurrencyCode** [A-Z]{3,3}
Rule(s):	**ActiveCurrencyAndAmount** CurrencyAmount The number of fractional digits (or minor unit of currency) must comply with ISO 4217. Note: The decimal separator is a dot. **ActiveCurrencyCode** ActiveCurrency The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.
Example:	6545.56 (Ccy='USD')

1.2 ActiveOrHistoricCurrencyAndAmount

Definition:	A number of monetary units specified in an active or a historic currency where the unit of currency is explicit and compliant with ISO 4217.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***ActiveOrHistoricCurrencyCode****.*
Format:	**ActiveOrHistoricCurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **ActiveOrHistoricCurrencyCode** [A-Z]{3,3}

Rule(s):	**ActiveOrHistoricCurrencyAndAmount** CurrencyAmount The number of fractional digits (or minor unit of currency) must comply with ISO 4217. Note: The decimal separator is a dot. **ActiveOrHistoricCurrencyCode** ActiveOrHistoricCurrency The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.
Example:	6284534 (Ccy='EUR')

1.3 CurrencyAndAmount

Definition:	Number of monetary units specified in a currency, where the unit of currency is explicit and compliant with ISO 4217. The decimal separator is a dot. Note: A zero amount is considered a positive amount.
XML Attribute:	Currency (Ccy). *This XML Attribute is typed by* ***CurrencyCode****.*
Format:	**CurrencyAndAmount** fractionDigits: 5 minInclusive: 0 totalDigits: 18 **CurrencyCode** [A-Z]{3,3}
Rule(s):	**CurrencyCode** ValidationByTable
Example:	100000 (Ccy='EUR')

1.4 ImpliedCurrencyAndAmount

Definition:	Number of monetary units specified in a currency where the unit of currency is implied by the context and compliant with ISO 4217. The decimal separator is a dot. Note: a zero amount is considered a positive amount.
Format:	fractionDigits: 5 minInclusive: 0 totalDigits: 18
Example:	500000

2 Date Time

2.1 ISODate

Definition:	A particular point in the progression of time in a calendar year expressed in the YYYY-MM-DD format. This representation is defined in "XML Schema Part 2: Datatypes Second Edition - W3C Recommendation 28 October 2004" which is aligned with ISO 8601.
Example:	2002-02-25

2.2 ISODateTime

Definition:	A particular point in the progression of time defined by a mandatory date and a mandatory time component, expressed in either UTC time format (YYYY-MM-DDThh:mm:ss.sssZ), local time with UTC offset format (YYYY-MM-DDThh:mm:ss.sss +/-hh:mm), or local time format (YYYY-MM-DDThh:mm:ss.sss). These representations are defined in "XML Schema Part 2: Datatypes Second Edition - W3C Recommendation 28 October 2004" which is aligned with ISO 8601. Note on the time format: 1) beginning / end of calendar day 00:00:00 = the beginning of a calendar day 24:00:00 = the end of a calendar day 2) fractions of second in time format Decimal fractions of seconds may be included. In this case, the involved parties shall agree on the maximum number of digits that are allowed.
Example:	2002-07-21T08:35:30

3 Identifier

3.1 ActiveCurrencyCode

Definition:	A code allocated to a currency by a Maintenance Agency under an international identification scheme as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds".
Format:	[A-Z]{3,3}
Rule(s):	ActiveCurrency The currency code must be a valid active currency code, not yet withdrawn on the day the message containing the currency is exchanged. Valid active currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and are not yet withdrawn on the day the message containing the Currency is exchanged.
Example:	EUR

3.2 ActiveOrHistoricCurrencyCode

Definition:	A code allocated to a currency by a Maintenance Agency under an international identification scheme, as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds".
Format:	[A-Z]{3,3}
Rule(s):	ActiveOrHistoricCurrency The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.
Example:	USD

3.3 AnyBICIdentifier

Definition:	Code allocated to a financial or non-financial institution by the ISO 9362 Registration Authority, as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)".
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	AnyBIC Only a valid Business identifier code is allowed. Business identifier codes for financial or non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.
Example:	CHASUS33

3.4 AustrianBankleitzahlIdentifier

Definition:	Austrian Bankleitzahl. Identifies Austrian financial institutions on the Austrian national clearing system.
Format:	AT[0-9]{5,5}
Example:	AT12345

3.5 BBANIdentifier

Definition:	Basic Bank Account Number (BBAN). Identifier used nationally by financial institutions, ie, in individual countries, generally as part of a National Account Numbering Scheme(s), which uniquely identifies the account of a customer.
Format:	[a-zA-Z0-9]{1,30}
Example:	BARC12345612345678

3.6 BICFIIdentifier

Definition:	Code allocated to a financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)".
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BICFI Valid BICs for financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.
Example:	CHASUS33

3.7 BICNonFIIdentifier

Definition:	Code allocated to a non-financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)".
Format:	[A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}
Rule(s):	BICNonFI Valid BICs for non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.
Example:	USINFRPP

3.8 BelgianIdentifier

Definition:	Identifier for Belgian securities.
Example:	359203

3.9 BloombergIdentifier

Definition:	An identifier of a security assigned by the Bloomberg organisation.
Format:	maxLength: 35 minLength: 1
Example:	GGF.FP

3.10 CHIPSParticipantIdentifier

Definition:	(United States) Clearing House Interbank Payment System (CHIPS) Participant Identifier (ID). Identifies financial institutions participating on CHIPS. The CHIPS Participant ID is assigned by the New York Clearing House.
Format:	CP[0-9]{4,4}
Example:	CP1234

3.11 CHIPSUniversalIdentifier

Definition:	(United States) Clearing House Interbank Payments System (CHIPS) Universal Identification (UID). Identifies entities that own accounts at CHIPS participating financial institutions, through which CHIPS payments are effected. The CHIPS UID is assigned by the New York Clearing House.
Format:	CH[0-9]{6,6}
Example:	CH123456

3.12 CUSIPIdentifier

Definition:	Committee on Uniform Securities and Identification Procedures (CUSIP). The standards body that created and maintains the securities classification system in the US. Non-US securities have a similar number called the CINS number.

Example:	3134A33L8

3.13 CanadianPaymentsARNIdentifier

Definition:	Canadian Payments Association Routing Number. Identifies Canadian financial institutions on the Canadian national clearing system.
Format:	CA[0-9]{9,9}
Example:	CA123456789

3.14 ConsolidatedTapeAssociationIdentifier

Definition:	Identifier of a security assigned by the Consolidated Tape Association.
Format:	maxLength: 35 minLength: 1
Example:	483894

3.15 CountryCode

Definition:	Code to identify a country, a dependency, or another area of particular geopolitical interest, on the basis of country names obtained from the United Nations (ISO 3166, Alpha-2 code).
Format:	[A-Z]{2,2}
Rule(s):	Country The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).
Example:	BE

3.16 CurrencyCode

Definition:	Code allocated to a currency, by a maintenance agency, under an international identification scheme as described in the latest edition of the international standard ISO 4217 "Codes for the representation of currencies and funds". Valid currency codes are registered with the ISO 4217 Maintenance Agency, and consist of three contiguous letters.
Format:	[A-Z]{3,3}
Rule(s):	ValidationByTable
Example:	AWG

3.17 DunsIdentifier

Definition:	Data Universal Numbering System. A unique identification number provided by Dun & Bradstreet to identify an organization.
Format:	[0-9]{9,9}
Example:	578942538

3.18 DutchIdentifier

Definition:	Identifier for Dutch securities.

Example:	234123

3.19 EANGLNIdentifier

Definition:	Global Location Number. A non-significant reference number used to identify legal entities, functional entities or physical entities according to the European Association for Numbering (EAN) numbering scheme rules. The number is used to retrieve the detailed information linked to it.
Format:	[0-9]{13,13}
Example:	7265658971233

3.20 EuroclearClearstreamIdentifier

Definition:	Identifier of securities issued in Luxembourg. The common code is a 9-digit code that replaces the CEDEL (Clearstream) and Euroclear codes.
Format:	maxLength: 12 minLength: 1
Example:	12197

3.21 ExternalAccountIdentification1Code

Definition:	Specifies the external account identification scheme name code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	BBAN

3.22 ExternalCashAccountType1Code

Definition:	Specifies the nature, or use, of the cash account in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	BBAN

3.23 ExternalClearingSystemIdentification1Code

Definition:	Specifies the clearing system identification code, as published in an external clearing system identification code list.
Format:	maxLength: 5 minLength: 1
Example:	AUBSB

3.24 ExternalCode

Definition:	Specifies an external code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.

Format:	maxLength: 35 minLength: 1
Example:	External Code 1

3.25 ExternalFinancialInstitutionIdentification1Code

Definition:	Specifies the external financial institution identification scheme name code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	EXC1

3.26 ExternalLocalInstrument1Code

Definition:	Specifies the external local instrument code in the format of character string with a maximum length of 35 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 35 minLength: 1
Example:	LOC1

3.27 ExternalMandateReason1Code

Definition:	Specifies the external mandate processing reason code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	AGNT

3.28 ExternalOrganisationIdentification1Code

Definition:	Specifies the external organisation identification scheme name code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	CUST

3.29 ExternalPersonIdentification1Code

Definition:	Specifies the external person identification scheme name code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	ARNU

3.30 ExternalServiceLevel1Code

Definition:	Specifies the external service level code in the format of character string with a maximum length of 4 characters. The list of valid codes is an external code list published separately.
Format:	maxLength: 4 minLength: 1
Example:	SEPA

3.31 ExternalStatusReason1Code

Definition:	Specifies the status reason, as published in an external status reason code list.
Format:	maxLength: 4 minLength: 1
Example:	AC01

3.32 FedwireRoutingNumberIdentifier

Definition:	Fedwire Routing Number. Identifies financial institutions, in the US, on the FedWire system. The routing number is assigned by the American Bankers Association (ABA).
Format:	FW[0-9]{9,9}
Example:	FW123456789

3.33 GermanBankleitzahlIdentifier

Definition:	German Bankleitzahl. Identifies German financial institutions on the German national clearing systems.
Format:	BL[0-9]{8,8}
Example:	BL12345678

3.34 HellenicBankIdentificationCodeIdentifier

Definition:	Hellenic Bank Identification Code Identifier. Identifies Greek financial institutions on the greek national clearing system.
Format:	GR[0-9]{7,7}
Example:	GR1234567

3.35 HongKongBankIdentifier

Definition:	Hong Kong Bank Code. Identifies Hong Kong financial institutions on the Hong Kong local clearing system.
Format:	HK[0-9]{3,3}
Example:	HK123

3.36 IBAN2007Identifier

Definition:	An identifier used internationally by financial institutions to uniquely identify the account of a customer at a financial institution, as described in the latest edition of the international standard ISO 13616:2007 - "Banking and related financial services - International Bank Account Number (IBAN)".
Format:	[A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}
Rule(s):	IBAN A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.
Example:	AT611904300234573201

3.37 ISINIdentifier

Definition:	International Securities Identification Number (ISIN). A numbering system designed by the United Nation's International Organisation for Standardisation (ISO). The ISIN is composed of a 2-character prefix representing the country of issue, followed by the national security number (if one exists), and a check digit. Each country has a national numbering agency that assigns ISIN numbers for securities in that country.
Format:	[A-Z0-9]{12,12}
Example:	US3134A33L82

3.38 IndianFinancialSystemCodeIdentifier

Definition:	Indian Financial System Code Identifier. Identifies Indian financial institutions on the Indian national clearing system.
Format:	IN[a-zA-Z0-9]{11,11}
Example:	IN12azBX12345

3.39 IrishNSCIdentifier

Definition:	Irish National Sorting Code. Identifies Irish financial institutions on the Irish national clearing system.
Format:	IE[0-9]{6,6}
Example:	IE123456

3.40 ItalianDomesticIdentifier

Definition:	Italian Domestic Identification Code. Identifies Italian financial institutions on the Italian national clearing system. The code is assigned by the Associazione Bancaria Italiana (ABI).
Format:	IT[0-9]{10,10}
Example:	IT1234567890

3.41 LanguageCode

Definition:	Specifies a language.
Rule(s):	ValidationByTable

Example:	ENG

3.42 MICIdentifier

Definition:	Market Identifier Code. The identification of a financial market, as stipulated in the norm ISO 10383 'Codes for exchanges and market identifications'.
Format:	[A-Z0-9]{4,4}
Example:	XTKS

3.43 NewZealandNCCIdentifier

Definition:	New Zealand Bank/Branch Code. Identifies New Zealand institutions on the New Zealand national clearing system. The code is assigned by the New Zealand Bankers' Association (NZBA).
Format:	NZ[0-9]{6,6}
Example:	NZ123456

3.44 PolishNationalClearingCodeIdentifier

Definition:	Polish National Clearing Code Identifier. Identifies Polish financial institutions on the Polish national clearing system.
Format:	PL[0-9]{8,8}
Example:	PL12345678

3.45 PortugueseNCCIdentifier

Definition:	Portuguese National Clearing Code. Identifies Portuguese financial institutions on the Portuguese national clearing system.
Format:	PT[0-9]{8,8}
Example:	PT12345678

3.46 QUICKIdentifier

Definition:	Identifier of a security assigned by the Japanese QUICK identification scheme for financial instruments.
Example:	97334

3.47 RICIdentifier

Definition:	Reuters Identification Code (RIC). A numbering system used within the Reuters system to identify instruments worldwide. The RIC contains an X-character market specific code (can be the CUSIP or EPIC codes) followed by a full stop, then the two-digit ISO country code, eg, IBM in UK is IBM.UK.
Format:	maxLength: 35 minLength: 1
Example:	TDVd.CR

3.48 RussianCentralBankIdentificationCodeIdentifier

Definition:	Russian Central Bank Identification Code. Identifies Russian financial institutions on the Russian national clearing system.
Format:	RU[0-9]{9,9}
Example:	RU123456789

3.49 SEDOLIdentifier

Definition:	Stock Exchange Daily Official List (SEDOL) number. A code used by the London Stock Exchange to identify foreign stocks, especially those that aren't actively traded in the US and don't have a CUSIP number.
Example:	5719210

3.50 SicovamIdentifier

Definition:	Identifier for French securities assigned by the Societe Interprofessionnelle Pour La Compensation des Valeurs Mobilieres in France. The Sicovam is composed of 5-digits.
Example:	12777

3.51 SouthAfricanNCCIdentifier

Definition:	South African National Clearing Code (NCC). Identifies South African financial institutions on the South African national clearing system. The code is assigned by the South African Bankers Services Company Ltd. (BankServ).
Format:	ZA[0-9]{6,6}
Example:	ZA123456

3.52 SpanishDomesticInterbankingIdentifier

Definition:	Spanish Domestic Interbanking Code. Identifies Spanish financial institutions on the Spanish national clearing system. The code is assigned by the Centro de Cooperacion Interbancaria (CCI).
Format:	ES[0-9]{8,9}
Example:	ES12345678

3.53 SwissBCIdentifier

Definition:	Swiss Bank Code. Identifies Swiss institutions on the Swiss national clearing system.
Format:	SW[0-9]{3,5}
Example:	SW123

3.54 SwissSICIdentifier

Definition:	Swiss Interbank Clearing (SIC) Code. Identifies Swiss financial institutions domestically, on the Swiss national clearing system.
Format:	SW[0-9]{6,6}
Example:	SW123456

3.55 TickerIdentifier

Definition:	Letters that identify a stock traded on a stock exchange. The Ticker Symbol is a short and convenient way of identifying a stock, eg, RTR.L for Reuters quoted in London.
Format:	maxLength: 35 minLength: 1
Example:	SOL

3.56 UKDomesticSortCodeIdentifier

Definition:	United Kingdom (UK) Sort Code. Identifies British financial institutions on the British national clearing systems. The sort code is assigned by the Association for Payments and Clearing Services (APACS).
Format:	SC[0-9]{6,6}
Example:	SC123456

3.57 UPICIdentifier

Definition:	Universal Payment Identification Code (UPIC). Identifier used by the New York Clearing House to mask confidential data, such as bank accounts and bank routing numbers. UPIC numbers remain with business customers, regardless of banking relationship changes.
Format:	[0-9]{8,17}
Example:	12345678

3.58 ValorenIdentifier

Definition:	Identifier for Swiss securities assigned by Telekurs Financial, the Swiss numbering agency.
Example:	832614

3.59 WertpapierIdentifier

Definition:	Wertpapier Kenn-nummer. A number issued in Germany by the Wertpapier Mitteilungen.The Wertpapier Kenn-nummer, sometimes called WPK, contains 6-digits, but no check digit. There are different ranges of numbers representing different classes of securities.
Example:	911958

4 Quantity: Number and Decimal Number

4.1 Number

Definition:	Number of objects represented as an integer.
Format:	fractionDigits: 0 totalDigits: 18
Example:	123456789012345678

5 Rate

5.1 PercentageRate

Definition:	Rate expressed as a percentage, ie, in hundredths, eg, 0.7 is 7/10 of a percent, and 7.0 is 7%.
Format:	fractionDigits: 10 totalDigits: 11
Example:	35

6 Text

6.1 Max105Text

Definition:	Specifies a character string with a maximum length of 105 characters.
Format:	maxLength: 105 minLength: 1
Example:	azefgvgldfpgtvcvlmgovl;v ; :B;lgkdfwxcvljfqsifj

6.2 Max128Text

Definition:	Specifies a character string with a maximum length of 128 characters.
Format:	maxLength: 128 minLength: 1
Example:	A string value of maximum 128 characters.

6.3 Max140Text

Definition:	Specifies a character string with a maximum length of 140 characters.
Format:	maxLength: 140 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.4 Max15NumericText

Definition:	Specifies a numeric string with a maximum length of 15 digits.
Format:	[0-9]{1,15}
Example:	458793625148975

6.5 Max16Text

Definition:	Specifies a character string with a maximum length of 16 characters.
Format:	maxLength: 16 minLength: 1
Example:	ABCdEFghIJKLMNO?

6.6 Max2048Text

Definition:	Specifies a character string with a maximum length of 2048 characters.
Format:	maxLength: 2048 minLength: 1
Example:	Sample1

6.7 Max256Text

Definition:	Specifies a character string with a maximum length of 256 characters.
Format:	maxLength: 256 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

6.8 Max34Text

Definition:	Specifies a character string with a maximum length of 34 characters.
Format:	maxLength: 34 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST12345678901234

6.9 Max350Text

Definition:	Specifies a character string with a maximum length of 350 characters.
Format:	maxLength: 350 minLength: 1
Example:	1234567890

6.10 Max35Text

Definition:	Specifies a character string with a maximum length of 35 characters.
Format:	maxLength: 35 minLength: 1
Example:	ABCDEFGHIJKLMNOPQRST123456789012345

6.11 Max3NumericText

Definition:	Specifies a numeric string with a maximum length of 3 digits.
Format:	[0-9]{1,3}
Example:	003

6.12 Max70Text

Definition:	Specifies a character string with a maximum length of 70characters.
Format:	maxLength: 70 minLength: 1
Example:	A string value of maximum 70 characters.

6.13 PhoneNumber

Definition:	The collection of information which identifies a specific phone or FAX number as defined by telecom services. It consists of a "+" followed by the country code (from 1 to 3 characters) then a "-" and finally, any combination of numbers, "(", ")", "+" and "-" (up to 30 characters).
Format:	\+[0-9]{1,3}-[0-9()+\-]{1,30}
Example:	+1-(465)432-123

End Points

End Points Index

1 Account

1.1 CashAccount24

2 Date period

2.1 DatePeriodDetails1

3 Financial institution identification

3.1 BranchAndFinancialInstitutionIdentification5

4 Miscellaneous

4.1 OriginalMessageInformation1

5 Organisation identification

5.1 PartyIdentification43

End Points Description

1 Account

1.1 CashAccount24

CashAccount24 *is used in message definition* ***MandateAcceptanceReportV02*** *p.102, p.102, message definition* ***MandateAmendmentRequestV02*** *p.36, p.36, p.37, p.37, message definition* ***MandateCancellationRequestV02*** *p.77, p.77, message definition* ***MandateInitiationRequestV02*** *p.9, p.9.*

Definition: Provides the details to identify an account.

Type: *The following* ***CashAccount24*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.0		Identification	<Id>	[1..1]	
1.1.1	{Or	IBAN	<IBAN>	[1..1]	Identifier
1.1.2	Or}	Other	<Othr>	[1..1]	
1.1.3		Identification	<Id>	[1..1]	Text
1.1.4		SchemeName	<SchmeNm>	[0..1]	
1.1.5	{{Or	Code	<Cd>	[1..1]	Code
1.1.6	Or}}	Proprietary	<Prtry>	[1..1]	Text
1.1.7		Issuer	<Issr>	[0..1]	Text
1.1.8		Type	<Tp>	[0..1]	
1.1.9	{Or	Code	<Cd>	[1..1]	Code
1.1.10	Or}	Proprietary	<Prtry>	[1..1]	Text
1.1.11		Currency	<Ccy>	[0..1]	Code
1.1.12		Name	<Nm>	[0..1]	Text

1.1.0 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Type: *This message item is composed of one of the following **AccountIdentification4Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.1	{Or	IBAN	<IBAN>	[1..1]	Identifier
1.1.2	Or}	Other	<Othr>	[1..1]	

1.1.1 IBAN <IBAN>

Presence: [1..1]

*This message item is part of choice **1.1.0 Identification**.*

*Impacted by **R6** in message definition **MandateAcceptanceReportV02**, **R6** in message definition **MandateAmendmentRequestV02**, **R6** in message definition **MandateCancellationRequestV02**, **R6** in message definition **MandateInitiationRequestV02**. Please refer to p.103, p.38, p.78, p.11 for additional information.*

Definition: International Bank Account Number (IBAN) - identifier used internationally by financial institutions to uniquely identify the account of a customer. Further specifications of the format and content of the IBAN can be found in the standard ISO 13616 "Banking and related financial services - International Bank Account Number (IBAN)" version 1997-10-01, or later revisions.

Data Type: IBAN2007Identifier

Format: [A-Z]{2,2}[0-9]{2,2}[a-zA-Z0-9]{1,30}

Rule(s): IBAN
A valid IBAN consists of all three of the following components: Country Code, check digits and BBAN.

1.1.2 Other <Othr>

Presence: [1..1]

*This message item is part of choice **1.1.0 Identification**.*

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Type: *This message item is composed of the following **GenericAccountIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.3		Identification	<Id>	[1..1]	Text
1.1.4		SchemeName	<SchmeNm>	[0..1]	
1.1.7		Issuer	<Issr>	[0..1]	Text

1.1.3 Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Data Type: Max34Text

Format: maxLength: 34
minLength: 1

1.1.4 SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme

Type: *This message item is composed of one of the following **AccountSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.5	{Or	Code	<Cd>	[1..1]	Code
1.1.6	Or}	Proprietary	<Prtry>	[1..1]	Text

1.1.5 Code <Cd>

Presence: [1..1]

*This message item is part of choice **1.1.4 SchemeName**.*

Definition: Name of the identification scheme, in a coded form as published in an external list.

Data Type: ExternalAccountIdentification1Code

Format: maxLength: 4
minLength: 1

1.1.6 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **1.1.4 SchemeName**.*

Definition: Name of the identification scheme, in a free text form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

1.1.7 Issuer <Issr>

Presence: [0..1]
Definition: Entity that assigns the identification.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.1.8 Type <Tp>

Presence: [0..1]
Definition: Specifies the nature, or use of the account.
Type: *This message item is composed of one of the following **CashAccountType2Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
1.1.9	{Or	Code	<Cd>	[1..1]	Code
1.1.10	Or}	Proprietary	<Prtry>	[1..1]	Text

1.1.9 Code <Cd>

Presence: [1..1]
*This message item is part of choice **1.1.8 Type**.*
Definition: Account type, in a coded form.
Data Type: ExternalCashAccountType1Code
Format: maxLength: 4
minLength: 1

1.1.10 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **1.1.8 Type**.*
Definition: Nature or use of the account in a proprietary form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

1.1.11 Currency <Ccy>

Presence: [0..1]
*Impacted by **R5** in message definition **MandateAcceptanceReportV02**, **R7** in message definition **MandateAmendmentRequestV02**, **R5** in message definition **MandateCancellationRequestV02**, **R7** in message definition **MandateInitiationRequestV02**. Please refer to p.103, p.38, p.78, p.11 for additional information.*

Definition: Identification of the currency in which the account is held.

Usage: Currency should only be used in case one and the same account number covers several currencies and the initiating party needs to identify which currency needs to be used for settlement on the account.

Data Type: ActiveOrHistoricCurrencyCode

Format: [A-Z]{3,3}

Rule(s): ActiveOrHistoricCurrency
The Currency Code must be registered, or have already been registered. Valid active or historic currency codes are registered with the ISO 4217 Maintenance Agency, consist of three (3) contiguous letters, and may be or not be withdrawn on the day the message containing the Currency is exchanged.

1.1.12 Name <Nm>

Presence: [0..1]

Definition: Name of the account, as assigned by the account servicing institution, in agreement with the account owner in order to provide an additional means of identification of the account.

Usage: The account name is different from the account owner name. The account name is used in certain user communities to provide a means of identifying the account, in addition to the account owner's identity and the account number.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

2 Date period

2.1 DatePeriodDetails1

DatePeriodDetails1 *is used in message definition* ***MandateAcceptanceReportV02*** *p.101, message definition* ***MandateAmendmentRequestV02*** *p.36, p.37, message definition* ***MandateCancellationRequestV02*** *p.76, message definition* ***MandateInitiationRequestV02*** *p.9.*

Definition: Range of time defined by a start date and an end date.

Type: *The following* ***DatePeriodDetails1*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
2.1.0		FromDate	<FrDt>	[1..1]	DateTime
2.1.1		ToDate	<ToDt>	[0..1]	DateTime

2.1.0 FromDate <FrDt>

Presence: [1..1]

Definition: Start date of the range.

Data Type: ISODate

2.1.1 ToDate <ToDt>

Presence: [0..1]

Definition: End date of the range.

Data Type: ISODate

3 Financial institution identification

3.1 BranchAndFinancialInstitutionIdentification5

BranchAndFinancialInstitutionIdentification5 *is used in message definition* ***MandateAcceptanceReportV02*** *p.101, p.101, p.102, p.102, message definition* ***MandateAmendmentRequestV02*** *p.35, p.35, p.36, p.36, p.37, p.37, message definition* ***MandateCancellationRequestV02*** *p.76, p.76, p.77, p.77, message definition* ***MandateInitiationRequestV02*** *p.9, p.9, p.9, p.10.*

Definition: Set of elements used to uniquely and unambiguously identify a financial institution or a branch of a financial institution.

Type: *The following* ***BranchAndFinancialInstitutionIdentification5*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.0		FinancialInstitutionIdentification	<FinInstnId>	[1..1]	
3.1.1		BICFI	<BICFI>	[0..1]	Identifier
3.1.2		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
3.1.3		ClearingSystemIdentification	<ClrSysId>	[0..1]	
3.1.4	{Or	Code	<Cd>	[1..1]	Code
3.1.5	Or}	Proprietary	<Prtry>	[1..1]	Text
3.1.6		MemberIdentification	<MmbId>	[1..1]	Text
3.1.7		Name	<Nm>	[0..1]	Text
3.1.8		PostalAddress	<PstlAdr>	[0..1]	
3.1.9		AddressType	<AdrTp>	[0..1]	Code
3.1.10		Department	<Dept>	[0..1]	Text
3.1.11		SubDepartment	<SubDept>	[0..1]	Text
3.1.12		StreetName	<StrtNm>	[0..1]	Text
3.1.13		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.14		PostCode	<PstCd>	[0..1]	Text
3.1.15		TownName	<TwnNm>	[0..1]	Text
3.1.16		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.17		Country	<Ctry>	[0..1]	Code
3.1.18		AddressLine	<AdrLine>	[0..7]	Text
3.1.19		Other	<Othr>	[0..1]	
3.1.20		Identification	<Id>	[1..1]	Text
3.1.21		SchemeName	<SchmeNm>	[0..1]	
3.1.22	{Or	Code	<Cd>	[1..1]	Code
3.1.23	Or}	Proprietary	<Prtry>	[1..1]	Text
3.1.24		Issuer	<Issr>	[0..1]	Text
3.1.25		BranchIdentification	<BrnchId>	[0..1]	

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.26		Identification	<Id>	[0..1]	Text
3.1.27		Name	<Nm>	[0..1]	Text
3.1.28		PostalAddress	<PstlAdr>	[0..1]	
3.1.29		AddressType	<AdrTp>	[0..1]	Code
3.1.30		Department	<Dept>	[0..1]	Text
3.1.31		SubDepartment	<SubDept>	[0..1]	Text
3.1.32		StreetName	<StrtNm>	[0..1]	Text
3.1.33		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.34		PostCode	<PstCd>	[0..1]	Text
3.1.35		TownName	<TwnNm>	[0..1]	Text
3.1.36		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.37		Country	<Ctry>	[0..1]	Code
3.1.38		AddressLine	<AdrLine>	[0..7]	Text

3.1.0 FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

Type: *This message item is composed of the following **FinancialInstitutionIdentification8** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.1		BICFI	<BICFI>	[0..1]	Identifier
3.1.2		ClearingSystemMemberIdentification	<ClrSysMmbId>	[0..1]	
3.1.7		Name	<Nm>	[0..1]	Text
3.1.8		PostalAddress	<PstlAdr>	[0..1]	
3.1.19		Other	<Othr>	[0..1]	

3.1.1 BICFI <BICFI>

Presence: [0..1]

*Impacted by **R3** in message definition **MandateAcceptanceReportV02**, **R3** in message definition **MandateAmendmentRequestV02**, **R3** in message definition **MandateCancellationRequestV02**, **R3** in message definition **MandateInitiationRequestV02**. Please refer to p.103, p.38, p.78, p.11 for additional information.*

Definition: Code allocated to a financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)".

Data Type: BICFIIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): BICFI
Valid BICs for financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consist of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

3.1.2 ClearingSystemMemberIdentification <ClrSysMmbId>

Presence: [0..1]

Definition: Information used to identify a member within a clearing system.

Type: *This message item is composed of the following **ClearingSystemMemberIdentification2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.3		ClearingSystemIdentification	<ClrSysId>	[0..1]	
3.1.6		MemberIdentification	<MmbId>	[1..1]	Text

3.1.3 ClearingSystemIdentification <ClrSysId>

Presence: [0..1]

Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.

Type: *This message item is composed of one of the following **ClearingSystemIdentification2Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.4	{Or	Code	<Cd>	[1..1]	Code
3.1.5	Or}	Proprietary	<Prtry>	[1..1]	Text

3.1.4 Code <Cd>

Presence: [1..1]

*This message item is part of choice **3.1.3 ClearingSystemIdentification**.*

Definition: Identification of a clearing system, in a coded form as published in an external list.

Data Type: ExternalClearingSystemIdentification1Code

Format: maxLength: 5
minLength: 1

3.1.5 Proprietary <Prtry>

Presence: [1..1]

*This message item is part of choice **3.1.3 ClearingSystemIdentification**.*

Definition: Identification code for a clearing system, that has not yet been identified in the list of clearing systems.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.6 MemberIdentification <MmbId>

Presence: [1..1]
Definition: Identification of a member of a clearing system.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.7 Name <Nm>

Presence: [0..1]
Definition: Name by which an agent is known and which is usually used to identify that agent.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.1.8 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.9		AddressType	<AdrTp>	[0..1]	Code
3.1.10		Department	<Dept>	[0..1]	Text
3.1.11		SubDepartment	<SubDept>	[0..1]	Text
3.1.12		StreetName	<StrtNm>	[0..1]	Text
3.1.13		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.14		PostCode	<PstCd>	[0..1]	Text
3.1.15		TownName	<TwnNm>	[0..1]	Text
3.1.16		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.17		Country	<Ctry>	[0..1]	Code
3.1.18		AddressLine	<AdrLine>	[0..7]	Text

3.1.9 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.

Code	Name	Definition
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

3.1.10 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.11 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.12 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.13 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

3.1.14 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

3.1.15 TownName <TwnNm>

Presence: [0..1]
Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.16 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country such as state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.17 Country <Ctry>

Presence: [0..1]

*Impacted by **R1** in message definition **MandateAcceptanceReportV02**, **R1** in message definition **MandateAmendmentRequestV02**, **R1** in message definition **MandateCancellationRequestV02**, **R1** in message definition **MandateInitiationRequestV02**. Please refer to p.102, p.38, p.77, p.10 for additional information.*

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

3.1.18 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

3.1.19 Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Type: *This message item is composed of the following **GenericFinancialIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.20		Identification	<Id>	[1..1]	Text
3.1.21		SchemeName	<SchmeNm>	[0..1]	
3.1.24		Issuer	<Issr>	[0..1]	Text

3.1.20 Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.21 SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

Type: *This message item is composed of one of the following* ***FinancialIdentificationSchemeName1Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.22	{Or	Code	<Cd>	[1..1]	Code
3.1.23	Or}	Proprietary	<Prtry>	[1..1]	Text

3.1.22 Code <Cd>

Presence: [1..1]

This message item is part of choice ***3.1.21 SchemeName****.*

Definition: Name of the identification scheme, in a coded form as published in an external list.

Data Type: ExternalFinancialInstitutionIdentification1Code

Format: maxLength: 4
minLength: 1

3.1.23 Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice ***3.1.21 SchemeName****.*

Definition: Name of the identification scheme, in a free text form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.24 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.25 BranchIdentification <BrnchId>

Presence: [0..1]

Definition: Identifies a specific branch of a financial institution.

Usage: This component should be used in case the identification information in the financial institution component does not provide identification up to branch level.

Type: *This message item is composed of the following* ***BranchData2*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.26		Identification	<Id>	[0..1]	Text
3.1.27		Name	<Nm>	[0..1]	Text
3.1.28		PostalAddress	<PstlAdr>	[0..1]	

3.1.26 Identification <Id>

Presence: [0..1]
Definition: Unique and unambiguous identification of a branch of a financial institution.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

3.1.27 Name <Nm>

Presence: [0..1]
Definition: Name by which an agent is known and which is usually used to identify that agent.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

3.1.28 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following* ***PostalAddress6*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
3.1.29		AddressType	<AdrTp>	[0..1]	Code
3.1.30		Department	<Dept>	[0..1]	Text
3.1.31		SubDepartment	<SubDept>	[0..1]	Text
3.1.32		StreetName	<StrtNm>	[0..1]	Text
3.1.33		BuildingNumber	<BldgNb>	[0..1]	Text
3.1.34		PostCode	<PstCd>	[0..1]	Text
3.1.35		TownName	<TwnNm>	[0..1]	Text
3.1.36		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
3.1.37		Country	<Ctry>	[0..1]	Code
3.1.38		AddressLine	<AdrLine>	[0..7]	Text

3.1.29 AddressType <AdrTp>

Presence: [0..1]

Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.
PBOX	POBox	Address is a postal office (PO) box.

3.1.30 Department <Dept>

Presence: [0..1]
Definition: Identification of a division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.31 SubDepartment <SubDept>

Presence: [0..1]
Definition: Identification of a sub-division of a large organisation or building.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.32 StreetName <StrtNm>

Presence: [0..1]
Definition: Name of a street or thoroughfare.
Data Type: Max70Text
Format: maxLength: 70
minLength: 1

3.1.33 BuildingNumber <BldgNb>

Presence: [0..1]
Definition: Number that identifies the position of a building on a street.
Data Type: Max16Text
Format: maxLength: 16
minLength: 1

3.1.34 PostCode <PstCd>

Presence: [0..1]
Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

3.1.35 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.36 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country such as state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

3.1.37 Country <Ctry>

Presence: [0..1]

*Impacted by **R1** in message definition **MandateAcceptanceReportV02**, **R1** in message definition **MandateAmendmentRequestV02**, **R1** in message definition **MandateCancellationRequestV02**, **R1** in message definition **MandateInitiationRequestV02**. Please refer to p.102, p.38, p.77, p.10 for additional information.*

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

3.1.38 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

4 Miscellaneous

4.1 OriginalMessageInformation1

***OriginalMessageInformation1** is used in message definition **MandateAcceptanceReportV02** p.101, message definition **MandateAmendmentRequestV02** p.35, message definition **MandateCancellationRequestV02** p.76.*

Definition: Unique identification, as assigned by the original instructing party, to unambiguously identify the message.

Type: *The following **OriginalMessageInformation1** element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
4.1.0		MessageIdentification	<MsgId>	[1..1]	Text
4.1.1		MessageNameIdentification	<MsgNmId>	[1..1]	Text
4.1.2		CreationDateTime	<CreDtTm>	[0..1]	DateTime

4.1.0 MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the original initiating party, to unambiguously identify the original mandate request message.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.1 MessageNameIdentification <MsgNmId>

Presence: [1..1]

Definition: Specifies the message name identifier to which the message refers.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

4.1.2 CreationDateTime <CreDtTm>

Presence: [0..1]

Definition: Date and time at which the message was created.

Data Type: ISODateTime

5 Organisation identification

5.1 PartyIdentification43

PartyIdentification43 *is used in message definition* ***MandateAcceptanceReportV02*** *p.101, p.102, p.102, p.102, p.102, p.102, message definition* ***MandateAmendmentRequestV02*** *p.35, p.35, p.36, p.36, p.36, p.36, p.36, p.37, p.37, p.37, p.37, p.37, message definition* ***MandateCancellationRequestV02*** *p.76, p.76, p.77, p.77, p.77, p.77, p.77, message definition* ***MandateInitiationRequestV02*** *p.9, p.9, p.9, p.9, p.9, p.10.*

Definition: Set of elements used to identify a person or an organisation.

Type: *The following* ***PartyIdentification43*** *element(s) must be used:*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.0		Name	<Nm>	[0..1]	Text
5.1.1		PostalAddress	<PstlAdr>	[0..1]	
5.1.2		AddressType	<AdrTp>	[0..1]	Code
5.1.3		Department	<Dept>	[0..1]	Text
5.1.4		SubDepartment	<SubDept>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.5		StreetName	<StrtNm>	[0..1]	Text
5.1.6		BuildingNumber	<BldgNb>	[0..1]	Text
5.1.7		PostCode	<PstCd>	[0..1]	Text
5.1.8		TownName	<TwnNm>	[0..1]	Text
5.1.9		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
5.1.10		Country	<Ctry>	[0..1]	Code
5.1.11		AddressLine	<AdrLine>	[0..7]	Text
5.1.12		Identification	<Id>	[0..1]	
5.1.13	{Or	OrganisationIdentification	<OrgId>	[1..1]	
5.1.14		AnyBIC	<AnyBIC>	[0..1]	Identifier
5.1.15		Other	<Othr>	[0..*]	
5.1.16		Identification	<Id>	[1..1]	Text
5.1.17		SchemeName	<SchmeNm>	[0..1]	
5.1.18	{{Or	Code	<Cd>	[1..1]	Code
5.1.19	Or}}	Proprietary	<Prtry>	[1..1]	Text
5.1.20		Issuer	<Issr>	[0..1]	Text
5.1.21	Or}	PrivateIdentification	<PrvtId>	[1..1]	
5.1.22		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
5.1.23		BirthDate	<BirthDt>	[1..1]	DateTime
5.1.24		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
5.1.25		CityOfBirth	<CityOfBirth>	[1..1]	Text
5.1.26		CountryOfBirth	<CtryOfBirth>	[1..1]	Code
5.1.27		Other	<Othr>	[0..*]	
5.1.28		Identification	<Id>	[1..1]	Text
5.1.29		SchemeName	<SchmeNm>	[0..1]	
5.1.30	{{Or	Code	<Cd>	[1..1]	Code
5.1.31	Or}}	Proprietary	<Prtry>	[1..1]	Text
5.1.32		Issuer	<Issr>	[0..1]	Text
5.1.33		CountryOfResidence	<CtryOfRes>	[0..1]	Code
5.1.34		ContactDetails	<CtctDtls>	[0..1]	
5.1.35		NamePrefix	<NmPrfx>	[0..1]	Code
5.1.36		Name	<Nm>	[0..1]	Text
5.1.37		PhoneNumber	<PhneNb>	[0..1]	Text
5.1.38		MobileNumber	<MobNb>	[0..1]	Text
5.1.39		FaxNumber	<FaxNb>	[0..1]	Text
5.1.40		EmailAddress	<EmailAdr>	[0..1]	Text

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.41		Other	<Othr>	[0..1]	Text

5.1.0 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

5.1.1 PostalAddress <PstlAdr>

Presence: [0..1]
Definition: Information that locates and identifies a specific address, as defined by postal services.
Type: *This message item is composed of the following **PostalAddress6** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.2		AddressType	<AdrTp>	[0..1]	Code
5.1.3		Department	<Dept>	[0..1]	Text
5.1.4		SubDepartment	<SubDept>	[0..1]	Text
5.1.5		StreetName	<StrtNm>	[0..1]	Text
5.1.6		BuildingNumber	<BldgNb>	[0..1]	Text
5.1.7		PostCode	<PstCd>	[0..1]	Text
5.1.8		TownName	<TwnNm>	[0..1]	Text
5.1.9		CountrySubDivision	<CtrySubDvsn>	[0..1]	Text
5.1.10		Country	<Ctry>	[0..1]	Code
5.1.11		AddressLine	<AdrLine>	[0..7]	Text

5.1.2 AddressType <AdrTp>

Presence: [0..1]
Definition: Identifies the nature of the postal address.
Data Type: Code
*When this message item is present, one of the following **AddressType2Code** values must be used:*

Code	Name	Definition
ADDR	Postal	Address is the complete postal address.
BIZZ	Business	Address is the business address.
DLVY	DeliveryTo	Address is the address to which delivery is to take place.
HOME	Residential	Address is the home address.
MLTO	MailTo	Address is the address to which mail is sent.

Code	Name	Definition
PBOX	POBox	Address is a postal office (PO) box.

5.1.3 Department <Dept>

Presence: [0..1]

Definition: Identification of a division of a large organisation or building.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

5.1.4 SubDepartment <SubDept>

Presence: [0..1]

Definition: Identification of a sub-division of a large organisation or building.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

5.1.5 StreetName <StrtNm>

Presence: [0..1]

Definition: Name of a street or thoroughfare.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

5.1.6 BuildingNumber <BldgNb>

Presence: [0..1]

Definition: Number that identifies the position of a building on a street.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

5.1.7 PostCode <PstCd>

Presence: [0..1]

Definition: Identifier consisting of a group of letters and/or numbers that is added to a postal address to assist the sorting of mail.

Data Type: Max16Text

Format: maxLength: 16
minLength: 1

5.1.8 TownName <TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.9 CountrySubDivision <CtrySubDvsn>

Presence: [0..1]

Definition: Identifies a subdivision of a country such as state, region, county.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.10 Country <Ctry>

Presence: [0..1]

*Impacted by **R1** in message definition **MandateAcceptanceReportV02**, **R1** in message definition **MandateAmendmentRequestV02**, **R1** in message definition **MandateCancellationRequestV02**, **R1** in message definition **MandateInitiationRequestV02**. Please refer to p.102, p.38, p.77, p.10 for additional information.*

Definition: Nation with its own government.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

5.1.11 AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Data Type: Max70Text

Format: maxLength: 70
minLength: 1

5.1.12 Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Type: *This message item is composed of one of the following **Party11Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.13	{Or	OrganisationIdentification	<OrgId>	[1..1]	
5.1.21	Or}	PrivateIdentification	<PrvtId>	[1..1]	

5.1.13 OrganisationIdentification <OrgId>

Presence: [1..1]

*This message item is part of choice **5.1.12 Identification**.*

Definition: Unique and unambiguous way to identify an organisation.

Type: *This message item is composed of the following* ***OrganisationIdentification8*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.14		AnyBIC	<AnyBIC>	[0..1]	Identifier
5.1.15		Other	<Othr>	[0..*]	

5.1.14 AnyBIC <AnyBIC>

Presence: [0..1]

Impacted by ***R2*** *in message definition* ***MandateAcceptanceReportV02****,* ***R2*** *in message definition* ***MandateAmendmentRequestV02****,* ***R2*** *in message definition* ***MandateCancellationRequestV02****,* ***R2*** *in message definition* ***MandateInitiationRequestV02****. Please refer to p.103, p.38, p.78, p.10 for additional information.*

Definition: Code allocated to a financial institution or non financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)".

Data Type: AnyBICIdentifier

Format: [A-Z]{6,6}[A-Z2-9][A-NP-Z0-9]([A-Z0-9]{3,3}){0,1}

Rule(s): AnyBIC
Only a valid Business identifier code is allowed. Business identifier codes for financial or non-financial institutions are registered by the ISO 9362 Registration Authority in the BIC directory, and consists of eight (8) or eleven (11) contiguous characters comprising the first three or all four of the following components: INSTITUTION CODE, COUNTRY CODE, LOCATION CODE, BRANCH CODE. The institution code, country code and location code are mandatory, while the branch code is optional.

5.1.15 Other <Othr>

Presence: [0..*]

Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme.

Type: *This message item is composed of the following* ***GenericOrganisationIdentification1*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.16		Identification	<Id>	[1..1]	Text
5.1.17		SchemeName	<SchmeNm>	[0..1]	
5.1.20		Issuer	<Issr>	[0..1]	Text

5.1.16 Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.17 SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

Type: *This message item is composed of one of the following* ***OrganisationIdentificationSchemeName1Choice*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.18	{Or	Code	<Cd>	[1..1]	Code
5.1.19	Or}	Proprietary	<Prtry>	[1..1]	Text

5.1.18 Code <Cd>

Presence: [1..1]

This message item is part of choice ***5.1.17 SchemeName****.*

Definition: Name of the identification scheme, in a coded form as published in an external list.

Data Type: ExternalOrganisationIdentification1Code

Format: maxLength: 4
minLength: 1

5.1.19 Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice ***5.1.17 SchemeName****.*

Definition: Name of the identification scheme, in a free text form.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.20 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.21 PrivateIdentification <PrvtId>

Presence: [1..1]

This message item is part of choice ***5.1.12 Identification****.*

Definition: Unique and unambiguous identification of a person, eg, passport.

Type: *This message item is composed of the following* ***PersonIdentification5*** *element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.22		DateAndPlaceOfBirth	<DtAndPlcOfBirth>	[0..1]	
5.1.27		Other	<Othr>	[0..*]	

5.1.22 DateAndPlaceOfBirth <DtAndPlcOfBirth>

Presence: [0..1]
Definition: Date and place of birth of a person.
Type: *This message item is composed of the following **DateAndPlaceOfBirth** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.23		BirthDate	<BirthDt>	[1..1]	DateTime
5.1.24		ProvinceOfBirth	<PrvcOfBirth>	[0..1]	Text
5.1.25		CityOfBirth	<CityOfBirth>	[1..1]	Text
5.1.26		CountryOfBirth	<CtryOfBirth>	[1..1]	Code

5.1.23 BirthDate <BirthDt>

Presence: [1..1]
Definition: Date on which a person is born.
Data Type: ISODate

5.1.24 ProvinceOfBirth <PrvcOfBirth>

Presence: [0..1]
Definition: Province where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.25 CityOfBirth <CityOfBirth>

Presence: [1..1]
Definition: City where a person was born.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.26 CountryOfBirth <CtryOfBirth>

Presence: [1..1]
*Impacted by **R1** in message definition **MandateAcceptanceReportV02**, **R1** in message definition **MandateAmendmentRequestV02**, **R1** in message definition **MandateCancellationRequestV02**, **R1** in message definition **MandateInitiationRequestV02**. Please refer to p.102, p.38, p.77, p.10 for additional information.*

Definition: Country where a person was born.
Data Type: CountryCode
Format: [A-Z]{2,2}
Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

5.1.27 Other <Othr>

Presence: [0..*]
Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.
Type: *This message item is composed of the following **GenericPersonIdentification1** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.28		Identification	<Id>	[1..1]	Text
5.1.29		SchemeName	<SchmeNm>	[0..1]	
5.1.32		Issuer	<Issr>	[0..1]	Text

5.1.28 Identification <Id>

Presence: [1..1]
Definition: Unique and unambiguous identification of a person.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.29 SchemeName <SchmeNm>

Presence: [0..1]
Definition: Name of the identification scheme.
Type: *This message item is composed of one of the following **PersonIdentificationSchemeName1Choice** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.30	{Or	Code	<Cd>	[1..1]	Code
5.1.31	Or}	Proprietary	<Prtry>	[1..1]	Text

5.1.30 Code <Cd>

Presence: [1..1]
*This message item is part of choice **5.1.29 SchemeName**.*
Definition: Name of the identification scheme, in a coded form as published in an external list.
Data Type: ExternalPersonIdentification1Code
Format: maxLength: 4
minLength: 1

5.1.31 Proprietary <Prtry>

Presence: [1..1]
*This message item is part of choice **5.1.29 SchemeName**.*
Definition: Name of the identification scheme, in a free text form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

5.1.32 Issuer <Issr>

Presence: [0..1]

Definition: Entity that assigns the identification.

Data Type: Max35Text

Format: maxLength: 35
minLength: 1

5.1.33 CountryOfResidence <CtryOfRes>

Presence: [0..1]

*Impacted by **R1** in message definition **MandateAcceptanceReportV02**, **R1** in message definition **MandateAmendmentRequestV02**, **R1** in message definition **MandateCancellationRequestV02**, **R1** in message definition **MandateInitiationRequestV02**. Please refer to p.102, p.38, p.77, p.10 for additional information.*

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Data Type: CountryCode

Format: [A-Z]{2,2}

Rule(s): Country
The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

5.1.34 ContactDetails <CtctDtls>

Presence: [0..1]

Definition: Set of elements used to indicate how to contact the party.

Type: *This message item is composed of the following **ContactDetails2** element(s):*

Ref	Or	Message Item	<XML Tag>	Mult.	Represent./ Type
5.1.35		NamePrefix	<NmPrfx>	[0..1]	Code
5.1.36		Name	<Nm>	[0..1]	Text
5.1.37		PhoneNumber	<PhneNb>	[0..1]	Text
5.1.38		MobileNumber	<MobNb>	[0..1]	Text
5.1.39		FaxNumber	<FaxNb>	[0..1]	Text
5.1.40		EmailAddress	<EmailAdr>	[0..1]	Text
5.1.41		Other	<Othr>	[0..1]	Text

5.1.35 NamePrefix <NmPrfx>

Presence: [0..1]

Definition: Specifies the terms used to formally address a person.

Data Type: Code

*When this message item is present, one of the following **NamePrefix1Code** values must be used:*

Code	Name	Definition
DOCT	Doctor	Title of the person is Doctor or Dr.

Code	Name	Definition
MADM	Madam	Title of the person is Madam.
MISS	Miss	Title of the person is Miss.
MIST	Mister	Title of the person is Mister or Mr.

5.1.36 Name <Nm>

Presence: [0..1]
Definition: Name by which a party is known and which is usually used to identify that party.
Data Type: Max140Text
Format: maxLength: 140
minLength: 1

5.1.37 PhoneNumber <PhneNb>

Presence: [0..1]
Definition: Collection of information that identifies a phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

5.1.38 MobileNumber <MobNb>

Presence: [0..1]
Definition: Collection of information that identifies a mobile phone number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

5.1.39 FaxNumber <FaxNb>

Presence: [0..1]
Definition: Collection of information that identifies a FAX number, as defined by telecom services.
Data Type: PhoneNumber
Format: \+[0-9]{1,3}-[0-9()+\-]{1,30}

5.1.40 EmailAddress <EmailAdr>

Presence: [0..1]
Definition: Address for electronic mail (e-mail).
Data Type: Max2048Text
Format: maxLength: 2048
minLength: 1

5.1.41 Other <Othr>

Presence: [0..1]
Definition: Contact details in an other form.
Data Type: Max35Text
Format: maxLength: 35
minLength: 1

Indexes

Index of Message Items

A

AcceptanceResult: <AccptncRslt>
Message Definition MandateAcceptanceReportV02 101

Accepted: <Accptd>
Message Definition MandateAcceptanceReportV02 101

AdditionalInformation: <AddtlInf>
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76

AdditionalRejectReasonInformation: <AddtlRjctRsnInf>
Message Definition MandateAcceptanceReportV02 101

AddressLine: <AdrLine>
150, 151, 161

AddressType: <AdrTp>
150, 151, 160

AmendmentReason: <AmdmntRsn>
Message Definition MandateAmendmentRequestV02 35

AnyBIC: <AnyBIC>
161

Authorisation: <Authstn>
Message Definition MandateInitiationRequestV02 8
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 75
Message Definition MandateAcceptanceReportV02 100

B

BICFI: <BICFI>
150

BirthDate: <BirthDt>
161

BranchIdentification: <BrnchId>
150

BuildingNumber: <BldgNb>
150, 151, 161

C

CancellationReason: <CxlRsn>
Message Definition MandateCancellationRequestV02 76

CityOfBirth: <CityOfBirth>
161

ClearingSystemIdentification: <ClrSysId>
150

ClearingSystemMemberIdentification: <ClrSysMmbId>
150

Code: <Cd>
146, 146, 150, 150, 161, 161
Message Definition MandateInitiationRequestV02 9, 9, 9, 10
Message Definition MandateAmendmentRequestV02 35, 35, 35, 35, 36, 36, 36, 37
Message Definition MandateCancellationRequestV02 76, 76, 76, 76, 77
Message Definition MandateAcceptanceReportV02 101, 101, 101, 101, 102

CodeOrProprietary: <CdOrPrtry>
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

CollectionAmount: <ColltnAmt>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

ContactDetails: <CtctDtls>
161

Contents: (User Defined)
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

Country: <Ctry>
150, 151, 161

CountryOfBirth: <CtryOfBirth>
161

CountryOfResidence: <CtryOfRes>
161

CountrySubDivision: <CtrySubDvsn>

150, 151, 161

CreationDateTime: <CreDtTm>
160
Message Definition MandateInitiationRequestV02 8
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 75
Message Definition MandateAcceptanceReportV02 100

Creditor: <Cdtr>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

CreditorAccount: <CdtrAcct>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

CreditorAgent: <CdtrAgt>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

CreditorSchemeIdentification: <CdtrSchmeId>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

Currency: <Ccy>
146

D

DateAndPlaceOfBirth: <DtAndPlcOfBirth>
161

Debtor: <Dbtr>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

DebtorAccount: <DbtrAcct>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

DebtorAgent: <DbtrAgt>
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

Department: <Dept>
150, 151, 160

Duration: <Drtn>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

E

EmailAddress: <EmailAdr>
161

Envelope: <Envlp>
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

F

FaxNumber: <FaxNb>
161

FinalCollectionDate: <FnlColltnDt>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

FinancialInstitutionIdentification: <FinInstnId>
150

FirstCollectionDate: <FrstColltnDt>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 102

Frequency: <Frqcy>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 76

Message Definition MandateAcceptanceReportV02 101

FromDate: <FrDt>
149

G

GroupHeader: <GrpHdr>
Message Definition MandateInitiationRequestV02 8
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 75
Message Definition MandateAcceptanceReportV02 100

I

IBAN: <IBAN>
146

Identification: <Id>
146, 146, 150, 151, 161, 161, 161

InitiatingParty: <InitgPty>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

InstructedAgent: <InstdAgt>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

InstructingAgent: <InstgAgt>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

Issuer: <Issr>
146, 150, 161, 161
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

L

LocalInstrument: <LclInstrm>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36

Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

M

Mandate: <Mndt>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35

MandateIdentification: <MndtId>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

MandateRequestIdentification: <MndtReqId>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

MaximumAmount: <MaxAmt>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

MemberIdentification: <MmbId>
150

MessageIdentification: <MsgId>
160
Message Definition MandateInitiationRequestV02 8
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 75
Message Definition MandateAcceptanceReportV02 100

MessageNameIdentification: <MsgNmId>
160

MobileNumber: <MobNb>
161

N

Name: <Nm>
146, 150, 151, 160, 161

NamePrefix: <NmPrfx>
161

Number: <Nb>
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

O

Occurrences: <Ocrncs>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

OrganisationIdentification: <OrgId>
161

OriginalMandate: <OrgnlMndt>
Message Definition MandateAmendmentRequestV02 36, 36
Message Definition MandateCancellationRequestV02 76, 76
Message Definition MandateAcceptanceReportV02 101, 101

OriginalMandateIdentification: <OrgnlMndtId>
Message Definition MandateAmendmentRequestV02 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

OriginalMessageInformation: <OrgnlMsgInf>
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

Originator: <Orgtr>
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76

Other: <Othr>
146, 150, 161, 161, 162

P

PhoneNumber: <PhneNb>
161

PlaceAndName: <PlcAndNm>
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

PostalAddress: <PstlAdr>

150, 151, 160

PostCode: <PstCd>
150, 151, 161

PrivateIdentification: <PrvtId>
161

Proprietary: <Prtry>
146, 146, 150, 150, 161, 161
Message Definition MandateInitiationRequestV02 9, 9, 9, 10
Message Definition MandateAmendmentRequestV02 35, 35, 35, 35, 36, 36, 37, 37
Message Definition MandateCancellationRequestV02 76, 76, 76, 76, 77
Message Definition MandateAcceptanceReportV02 101, 101, 101, 101, 102

ProvinceOfBirth: <PrvcOfBirth>
161

R

Reason: <Rsn>
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76

ReferredDocument: <RfrdDoc>
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

RejectReason: <RjctRsn>
Message Definition MandateAcceptanceReportV02 101

RelatedDate: <RltdDt>
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

S

SchemeName: <SchmeNm>
146, 150, 161, 161

SequenceType: <SeqTp>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

ServiceLevel: <SvcLvl>

Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

StreetName: <StrtNm>
150, 151, 161

SubDepartment: <SubDept>
150, 151, 160

SupplementaryData: <SplmtryData>
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

T

ToDate: <ToDt>
149

TownName: <TwnNm>
150, 151, 161

Type: <Tp>
146
Message Definition MandateInitiationRequestV02 9, 10
Message Definition MandateAmendmentRequestV02 35, 36, 36, 37
Message Definition MandateCancellationRequestV02 76, 77
Message Definition MandateAcceptanceReportV02 101, 102

U

UltimateCreditor: <UltmtCdtr>
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

UltimateDebtor: <UltmtDbtr>
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

UnderlyingAcceptanceDetails: <UndrlygAccptncDtls>
Message Definition MandateAcceptanceReportV02 101

UnderlyingAmendmentDetails: <UndrlygAmdmntDtls>
Message Definition MandateAmendmentRequestV02 35

UnderlyingCancellationDetails: <UndrlygCxlDtls>
Message Definition MandateCancellationRequestV02 76

Index of XML tags

A

<Accptd>: Accepted
Message Definition MandateAcceptanceReportV02 101

<AccptncRslt>: AcceptanceResult
Message Definition MandateAcceptanceReportV02 101

<AddtlInf>: AdditionalInformation
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76

<AddtlRjctRsnInf>: AdditionalRejectReasonInformation
Message Definition MandateAcceptanceReportV02 101

<AdrLine>: AddressLine
150, 151, 161

<AdrTp>: AddressType
150, 151, 160

<AmdmntRsn>: AmendmentReason
Message Definition MandateAmendmentRequestV02 35

<AnyBIC>: AnyBIC
161

<Authstn>: Authorisation
Message Definition MandateInitiationRequestV02 8
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 75
Message Definition MandateAcceptanceReportV02 100

B

<BICFI>: BICFI
150

<BirthDt>: BirthDate
161

<BldgNb>: BuildingNumber
150, 151, 161

<BrnchId>: BranchIdentification

150

C

<Ccy>: Currency
146

<Cd>: Code
146, 146, 150, 150, 161, 161
Message Definition MandateInitiationRequestV02 9, 9, 9, 10
Message Definition MandateAmendmentRequestV02 35, 35, 35, 35, 36, 36, 36, 37
Message Definition MandateCancellationRequestV02 76, 76, 76, 76, 77
Message Definition MandateAcceptanceReportV02 101, 101, 101, 101, 102

<CdOrPrtry>: CodeOrProprietary
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<Cdtr>: Creditor
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<CdtrAcct>: CreditorAccount
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<CdtrAgt>: CreditorAgent
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<CdtrSchmeId>: CreditorSchemeIdentification
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<CityOfBirth>: CityOfBirth
161

<ClrSysId>: ClearingSystemIdentification
150

<ClrSysMmbId>: ClearingSystemMemberIdentification
150

<ColltnAmt>: CollectionAmount
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<CreDtTm>: CreationDateTime
160
Message Definition MandateInitiationRequestV02 8
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 75
Message Definition MandateAcceptanceReportV02 100

<CtctDtls>: ContactDetails
161

<Ctry>: Country
150, 151, 161

<CtryOfBirth>: CountryOfBirth
161

<CtryOfRes>: CountryOfResidence
161

<CtrySubDvsn>: CountrySubDivision
150, 151, 161

<CxlRsn>: CancellationReason
Message Definition MandateCancellationRequestV02 76

D

<Dbtr>: Debtor
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<DbtrAcct>: DebtorAccount
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<DbtrAgt>: DebtorAgent
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<Dept>: Department
150, 151, 160

<Drtn>: Duration
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

<DtAndPlcOfBirth>: DateAndPlaceOfBirth
161

E

<EmailAdr>: EmailAddress
161

<Envlp>: Envelope
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

F

<FaxNb>: FaxNumber
161

<FinInstnId>: FinancialInstitutionIdentification
150

<FnlColltnDt>: FinalCollectionDate
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<FrDt>: FromDate
149

<Frqcy>: Frequency
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

<FrstColltnDt>: FirstCollectionDate
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 102

G

<GrpHdr>: GroupHeader
Message Definition MandateInitiationRequestV02 8
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 75
Message Definition MandateAcceptanceReportV02 100

I

<IBAN>: IBAN
146

<Id>: Identification
146, 146, 150, 151, 161, 161, 161

<InitgPty>: InitiatingParty
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

<InstdAgt>: InstructedAgent
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

<InstgAgt>: InstructingAgent
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

<Issr>: Issuer
146, 150, 161, 161
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

L

<LclInstrm>: LocalInstrument
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

M

<MaxAmt>: MaximumAmount
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<MmbId>: MemberIdentification
150

<Mndt>: Mandate
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35

<MndtId>: MandateIdentification
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

<MndtReqId>: MandateRequestIdentification
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

<MobNb>: MobileNumber
161

<MsgId>: MessageIdentification
160
Message Definition MandateInitiationRequestV02 8
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 75
Message Definition MandateAcceptanceReportV02 100

<MsgNmId>: MessageNameIdentification
160

N

<Nb>: Number
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<Nm>: Name
146, 150, 151, 160, 161

<NmPrfx>: NamePrefix

161

O

<Ocrncs>: Occurrences
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

<OrgId>: OrganisationIdentification
161

<OrgnlMndt>: OriginalMandate
Message Definition MandateAmendmentRequestV02 36, 36
Message Definition MandateCancellationRequestV02 76, 76
Message Definition MandateAcceptanceReportV02 101, 101

<OrgnlMndtId>: OriginalMandateIdentification
Message Definition MandateAmendmentRequestV02 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

<OrgnlMsgInf>: OriginalMessageInformation
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

<Orgtr>: Originator
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76

<Othr>: Other
146, 150, 161, 161, 162

P

<PhneNb>: PhoneNumber
161

<PlcAndNm>: PlaceAndName
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<Prtry>: Proprietary
146, 146, 150, 150, 161, 161
Message Definition MandateInitiationRequestV02 9, 9, 9, 10
Message Definition MandateAmendmentRequestV02 35, 35, 35, 35, 36, 36, 37, 37
Message Definition MandateCancellationRequestV02 76, 76, 76, 76, 77

Message Definition MandateAcceptanceReportV02 101, 101, 101, 101, 102

<PrvcOfBirth>: ProvinceOfBirth
161

<PrvtId>: PrivateIdentification
161

<PstCd>: PostCode
150, 151, 161

<PstlAdr>: PostalAddress
150, 151, 160

R

<RfrdDoc>: ReferredDocument
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<RjctRsn>: RejectReason
Message Definition MandateAcceptanceReportV02 101

<RltdDt>: RelatedDate
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<Rsn>: Reason
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76

S

<SchmeNm>: SchemeName
146, 150, 161, 161

<SeqTp>: SequenceType
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

<SplmtryData>: SupplementaryData
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<StrtNm>: StreetName
150, 151, 161

<SubDept>: SubDepartment
150, 151, 160

<SvcLvl>: ServiceLevel
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

T

<ToDt>: ToDate
149

<Tp>: Type
146
Message Definition MandateInitiationRequestV02 9, 10
Message Definition MandateAmendmentRequestV02 35, 36, 36, 37
Message Definition MandateCancellationRequestV02 76, 77
Message Definition MandateAcceptanceReportV02 101, 102

<TwnNm>: TownName
150, 151, 161

U

<UltmtCdtr>: UltimateCreditor
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<UltmtDbtr>: UltimateDebtor
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

<UndrlygAccptncDtls>: UnderlyingAcceptanceDetails
Message Definition MandateAcceptanceReportV02 101

<UndrlygAmdmntDtls>: UnderlyingAmendmentDetails
Message Definition MandateAmendmentRequestV02 35

<UndrlygCxlDtls>: UnderlyingCancellationDetails
Message Definition MandateCancellationRequestV02 76

Index of Message Item Types

A

AcceptanceResult6
Message Definition MandateAcceptanceReportV02 101

AccountIdentification4Choice
146

AccountSchemeName1Choice
146

ActiveCurrencyAndAmount
130
Message Definition MandateInitiationRequestV02 9, 9
Message Definition MandateAmendmentRequestV02 36, 36

ActiveCurrencyCode
132
Message Definition MandateInitiationRequestV02 9, 9
Message Definition MandateAmendmentRequestV02 36, 36

ActiveOrHistoricCurrencyAndAmount
130
Message Definition MandateAmendmentRequestV02 37, 37
Message Definition MandateCancellationRequestV02 77, 77
Message Definition MandateAcceptanceReportV02 102, 102

ActiveOrHistoricCurrencyCode
132, 146
Message Definition MandateAmendmentRequestV02 37, 37
Message Definition MandateCancellationRequestV02 77, 77
Message Definition MandateAcceptanceReportV02 102, 102

AddressType2Code
150, 151, 160

AnyBICIdentifier
133, 161

AustrianBankleitzahlIdentifier
133

Authorisation1Choice
Message Definition MandateInitiationRequestV02 8
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 75
Message Definition MandateAcceptanceReportV02 100

Authorisation1Code
Message Definition MandateInitiationRequestV02 9

Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

B

BBANIdentifier
133

BelgianIdentifier
134

BICFIIdentifier
133, 150

BICNonFIIdentifier
134

BloombergIdentifier
134

BranchAndFinancialInstitutionIdentification5
150
Message Definition MandateInitiationRequestV02 9, 9, 9, 10
Message Definition MandateAmendmentRequestV02 35, 35, 36, 36, 37, 37
Message Definition MandateCancellationRequestV02 76, 76, 77, 77
Message Definition MandateAcceptanceReportV02 101, 101, 102, 102

BranchData2
150

C

CanadianPaymentsARNIdentifier
135

CashAccount24
145
Message Definition MandateInitiationRequestV02 9, 9
Message Definition MandateAmendmentRequestV02 36, 36, 37, 37
Message Definition MandateCancellationRequestV02 77, 77
Message Definition MandateAcceptanceReportV02 102, 102

CashAccountType2Choice
146

CHIPSParticipantIdentifier
134

CHIPSUniversalIdentifier
134

ClearingSystemIdentification2Choice
150

ClearingSystemMemberIdentification2
150

ConsolidatedTapeAssociationIdentifier
135

ContactDetails2
161

CountryCode
135, 150, 151, 161, 161, 161

CurrencyAndAmount
131

CurrencyCode
135

CUSIPIdentifier
134

D

DateAndPlaceOfBirth
161

DatePeriodDetails1
149
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

DocumentType5Code
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

DunsIdentifier
135

DutchIdentifier
135

E

EANGLNIdentifier
136

EuroclearClearstreamIdentifier
136

ExternalAccountIdentification1Code
136, 146

ExternalCashAccountType1Code
136, 146

ExternalClearingSystemIdentification1Code
136, 150

ExternalCode
136

ExternalFinancialInstitutionIdentification1Code
137, 150

ExternalLocalInstrument1Code
137
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

ExternalMandateReason1Code
137
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

ExternalOrganisationIdentification1Code
137, 161

ExternalPersonIdentification1Code
137, 161

ExternalServiceLevel1Code
138
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

ExternalStatusReason1Code
138

F

FedwireRoutingNumberIdentifier
138

FinancialIdentificationSchemeName1Choice
150

FinancialInstitutionIdentification8
150

Frequency6Code
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

G

GenericAccountIdentification1
146

GenericFinancialIdentification1
150

GenericOrganisationIdentification1
161

GenericPersonIdentification1
161

GermanBankleitzahlIdentifier
138

GroupHeader47
Message Definition MandateInitiationRequestV02 8
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 75
Message Definition MandateAcceptanceReportV02 100

H

HellenicBankIdentificationCodeIdentifier
138

HongKongBankIdentifier
138

I

IBAN2007Identifier

139, 146

ImpliedCurrencyAndAmount
131

IndianFinancialSystemCodeIdentifier
139

IrishNSCIdentifier
139

ISINIdentifier
139

ISODate
131, 149, 149, 161
Message Definition MandateInitiationRequestV02 9, 9, 10
Message Definition MandateAmendmentRequestV02 36, 36, 36, 37, 37, 37
Message Definition MandateCancellationRequestV02 76, 77, 77
Message Definition MandateAcceptanceReportV02 102, 102, 102

ISODateTime
132, 160
Message Definition MandateInitiationRequestV02 8
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 75
Message Definition MandateAcceptanceReportV02 100

ItalianDomesticIdentifier
139

L

LanguageCode
139

LocalInstrument2Choice
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

M

Mandate1
Message Definition MandateAmendmentRequestV02 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

Mandate2
Message Definition MandateInitiationRequestV02 9

Mandate3
Message Definition MandateAmendmentRequestV02 35

MandateAcceptance2
Message Definition MandateAcceptanceReportV02 101

MandateAmendment2
Message Definition MandateAmendmentRequestV02 35

MandateAmendmentReason1
Message Definition MandateAmendmentRequestV02 35

MandateCancellation2
Message Definition MandateCancellationRequestV02 76

MandateOccurrences2
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

MandateReason1Choice
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

MandateTypeInformation1
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

Max105Text
143
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

Max128Text
143
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

Max140Text
143, 150, 151, 160, 161

Max15NumericText
143

Max16Text
143, 150, 150, 151, 151, 161, 161

Max2048Text
144, 161

Max256Text
144

Max34Text
144, 146

Max350Text
144
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

Max35Text
144, 146, 146, 146, 150, 150, 150, 150, 150, 150, 150, 151, 151, 151, 160, 160, 161, 161, 161, 161, 161, 161, 161, 161, 161, 161, 162
Message Definition MandateInitiationRequestV02 8, 9, 9, 9, 9, 10, 10, 10
Message Definition MandateAmendmentRequestV02 35, 35, 35, 35, 35, 35, 36, 36, 36, 36, 36, 36, 36, 37, 37, 37, 37
Message Definition MandateCancellationRequestV02 75, 76, 76, 76, 76, 76, 76, 77, 77, 77
Message Definition MandateAcceptanceReportV02 100, 101, 101, 101, 101, 101, 101, 102, 102, 102

Max3NumericText
144

Max70Text
145, 146, 150, 150, 150, 150, 151, 151, 151, 151, 160, 160, 161, 161

MICIdentifier
140

N

NamePrefix1Code
161

NewZealandNCCIdentifier
140

Number
142

O

OrganisationIdentification8
161

OrganisationIdentificationSchemeName1Choice
161

OriginalMandate2Choice
Message Definition MandateAmendmentRequestV02 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

OriginalMessageInformation1
159
Message Definition MandateAmendmentRequestV02 35
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

P

Party11Choice
161

PartyIdentification43
160
Message Definition MandateInitiationRequestV02 9, 9, 9, 9, 9, 10
Message Definition MandateAmendmentRequestV02 35, 35, 36, 36, 36, 36, 36, 37, 37, 37, 37, 37
Message Definition MandateCancellationRequestV02 76, 76, 77, 77, 77, 77, 77
Message Definition MandateAcceptanceReportV02 101, 102, 102, 102, 102, 102

PaymentCancellationReason1
Message Definition MandateCancellationRequestV02 76

PercentageRate
143

PersonIdentification5
161

PersonIdentificationSchemeName1Choice
161

PhoneNumber
145, 161, 161, 161

PolishNationalClearingCodeIdentifier
140

PortugueseNCCIdentifier
140

PostalAddress6
150, 151, 160

Q

QUICKIdentifier
140

R

ReferredDocumentInformation3
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

ReferredDocumentType1Choice
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

ReferredDocumentType2
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 36, 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

RICIdentifier
140

RussianCentralBankIdentificationCodeIdentifier
141

S

SEDOLIdentifier
141

SequenceType2Code
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 37
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

ServiceLevel8Choice
Message Definition MandateInitiationRequestV02 9
Message Definition MandateAmendmentRequestV02 35, 36
Message Definition MandateCancellationRequestV02 76
Message Definition MandateAcceptanceReportV02 101

SicovamIdentifier
141

SouthAfricanNCCIdentifier
141

SpanishDomesticInterbankingIdentifier
141

SupplementaryData1
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

SupplementaryDataEnvelope1
Message Definition MandateInitiationRequestV02 10
Message Definition MandateAmendmentRequestV02 37
Message Definition MandateCancellationRequestV02 77
Message Definition MandateAcceptanceReportV02 102

SwissBCIdentifier
141

SwissSICIdentifier
141

T

TickerIdentifier
142

U

UKDomesticSortCodeIdentifier
142

UPICIdentifier
142

V

ValorenIdentifier
142

W

WertpapierIdentifier
142

Y

YesNoIndicator

Message Definition MandateAcceptanceReportV02 101

Revision Record

Revision	Date	Author	Description	Sections affected
1.0	11/06/2012	ISO 20022 RA	Initial version	All

Disclaimer:
Although the Registration Authority has used all reasonable efforts to ensure accuracy of the contents of the iso20022.org website and the information published thereon, the Registration Authority assumes no liability whatsoever for any inadvertent errors or omissions that may appear thereon. Moreover, the information is provided on an "as is" basis. The Registration Authority disclaims all warranties and conditions, either express or implied, including but not limited to implied warranties of merchantability, title, non-infringement and fitness for a particular purpose. The Registration Authority shall not be liable for any direct, indirect, special or consequential damages arising out of the use of the information published on the iso20022.org website, even if the Registration Authority has been advised of the possibility of such damages.

Intellectual Property Rights:
The ISO 20022 Message Definitions described in this document were contributed by SWIFT. The ISO 20022 IPR policy is available at www.ISO20022.org > About ISO20022 >Intellectual Property Rights.