


Agenda:

create context (default val)
(provide value) \Rightarrow

- 1) example of context API \rightarrow $\begin{cases} \text{read} \equiv \text{use} \\ \text{write} \equiv \text{update} \end{cases}$
- 2) assignments $\Leftarrow \frac{1}{3}$

- 3) redux $\begin{cases} \text{base project} \\ \text{mini project} \end{cases}$ hands on

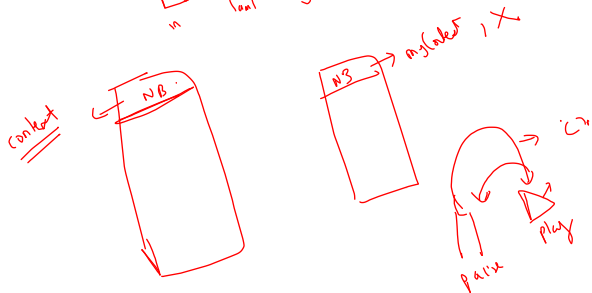

UseRef -
I updated = user
input is first
need to refer on
object and stay
for lifetime of
the component
2) re-render

what
why
how \rightarrow access DOM

- 3) useRef has a property "current". It is used to retrieve the value of the referenced obj

useRef is a hook

why - to access the DOM

what \rightarrow "used to make reference to an object changes \rightarrow re-rendering. It would stay lifetime of component."

'current' \rightarrow used to retrieve the value of referenced object.
we can use current to change the value of referenced obj

< HTML elem
{ 3
{ 3 }