

Extracting human interpretable structure-property relationships in chemistry using XAI and large language models

Geemi P. Wellawatte and Philippe Schwaller*

Laboratory of Artificial Chemical Intelligence

Institute of Chemical Sciences and Engineering

Ecole Polytechnique Fédérale de Lausanne (EPFL)

Lausanne, Switzerland

E-mail: {geemi.wellawatte,philippe.schwaller}@epfl.ch

Abstract

Explainable Artificial Intelligence (XAI) is an emerging field in AI that aims to address the opaque nature of machine learning models. Furthermore, it has been shown that XAI can be used to extract input-output relationships, making them a useful tool in chemistry to understand structure-property relationships. However, one of the main limitations of XAI methods is that they are developed for technically oriented users. We propose the XpertAI framework that integrates XAI methods with large language models (LLMs) accessing scientific literature to generate accessible natural language explanations of raw chemical data automatically. We conducted 5 case studies to evaluate the performance of XpertAI. Our results show that XpertAI combines the strengths of LLMs and XAI tools in generating specific, scientific, and interpretable explanations.

Introduction

Understanding structure–property relationships has been a long-standing challenge in chemistry^{1–3} Seybold et al.² highlight a fundamental concept in chemistry: the “properties and behaviors of molecules follow from their structures”. Therefore, elucidating these relationships facilitates the manipulation of molecules to achieve desired properties. Machine learning (ML) is a routinely used tool to complement human expertise, which solves complex tasks in chemistry by modeling structure–property relationships.^{4–8} While ML has been proven to be successful in solving such tasks in chemistry,^{9–15} experimental chemists often harbor skepticism toward predictions generated by such models, primarily due to the inherent opacity of these models. In essence, these ML models usually do not provide a rationale as to why a certain prediction was made. EXplainable Artificial Intelligence (XAI) is a new branch of AI that is rapidly growing and aims to explain the opacity nature of ML models. Therefore, developing XAI tools for chemistry is critical for increasing trust in ML models and expanding the possibilities of experimental and computational chemistry.

Justifications, explanations, and interpretability are three terms associated with XAI.^{16–18} While a justification simply provides evidence for a prediction,¹⁹ an explanation describes the rationale for the prediction.²⁰ However, the true potency of XAI lies in its interpretability, which concerns the extent to which a human can comprehend the provided explanation.²¹ In a recent survey, Cambria et al.²² emphasized that there is a pressing need to refine the presentation of explanations. This means that although XAI addresses the opacity of ML models, they are not user-friendly for non-domain experts or non-technical users. Therefore, there is growing interest in incorporating natural language (NL) with XAI to produce more accessible explanations.^{22,23} Furthermore, it's worth noting that existing XAI methods often lack the flexibility to address specific user queries – can usually answer only one specific question, impeding their adaptability.^{24–27} To meet this demand for creating intelligent, adaptable, and user-friendly XAI tools for chemistry, we introduce a Python package named “XpertAI”. Our tool combines XAI methods with large language models (LLMs) to extract structure–property relationships from raw data.

LLMs are generative models which can predict an output sequence given an input sequence. LLMs can be made into powerful agents that query databases, scrape and summarize literature, interpret, and generate text in NL.²⁸ Currently, there has been a surge in LLM-based research in chemistry and related sciences. For example, Zhiling et al.²⁹ showed that ChatGPT can be used to accelerate text-mining and to predict metal-organic framework (MOF) synthesis using prompt engineering. Kan et al.³⁰ showed that GPT-4³¹ language model can be used in parameter selection of polymer informatics. Furthermore, the authors highlight the importance of LLMs in research domains plagued with data scarcity. Boiko et al.³² introduced Coscientist, an AI system based on natural language, to design, plan and execute chemical experiments. However, LLMs in isolation can be limited in addressing domain-specific problems within the field of chemistry. To circumvent such challenges at the intersection of chemistry and LLMs, Jablonka et al.³³ demonstrated that finetuning LLMs could provide a solution to this. Relatedly, DARWIN³⁴ is a series of finetuned open-source LLMs tailored for natural sciences. PMC-LLaMA,³⁵ Galactica³⁶ and, Med-PaLM³⁷ are a few more examples of finetuned LLMs for scientific research. Following a different approach, Bran et al.³⁸ showed LLMs can be enhanced to tackle tasks such as organic synthesis, drug discovery, and materials design by integrating external tools rather than finetuning.

Motivation

Previously, it has been suggested that “black-box modeling first, followed by XAI” as a means to establish structure-property relationships without compromising accuracy or interpretability.¹⁸ In this work, we present XpertAI, a framework that aims to establish connections between black-box models, XAI tools, and literature through LLMs to uncover relationships between molecular features and target properties. In a previous study, Seshadri et al.³⁹ showed that LLMs combined with XAI can generate human interpretable explanations. Unlike our approach, this work used LLMs only to summarize the findings from the XAI analysis in natural language. However, we show that LLMs combined with XAI tools and literature evidence, play a powerful role in generating

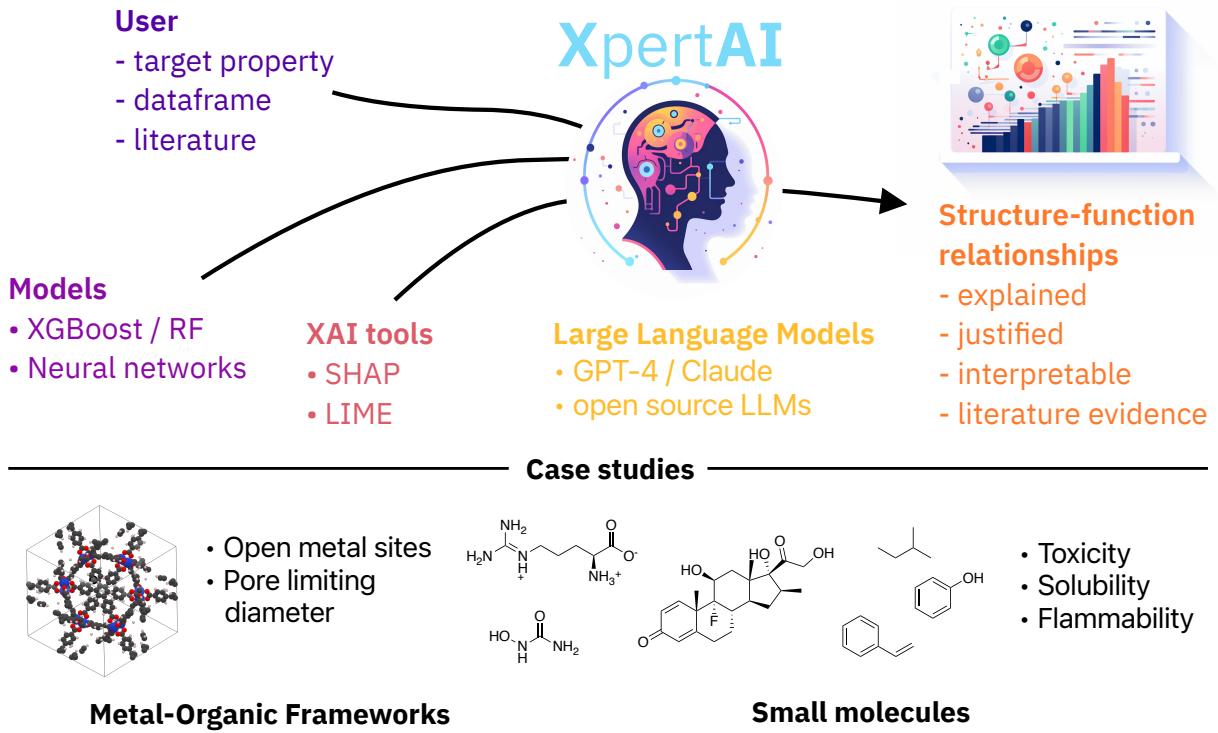


Figure 1: Overview of XpertAI. The proposed tool combines XAI with LLMs to uncover human interpretable structure-property relationships from raw data.

both interpretable and scientifically accurate explanations. This work demonstrates that combining XAI with LLMs can be effectively used for hypothesis generation, marking a pioneering effort in this direction.

As shown in Figure 1, given a raw dataset, XpertAI employs XAI methods to identify crucial structural features that are correlated with the target property. Next, it draws on scientific evidence from literature to articulate structure-property connections based on these features. One key advantage of XpertAI is its ability to deliver precise natural language explanations (NLEs) tailored to specific datasets, as opposed to providing generalized explanations drawn from the broader literature. As illustrated in Figure 2 XpertAI combines the strengths of XAI and LLMs in terms of specificity (to given data), interpretability, accessibility, and scientific nature of the explanations. In other words, XAI only directs the users to a trained model's rationale and does not provide scientific reasoning, although the explanations may be interpretable. We show that LLMs can

be used to address this limitation, thereby mimicking the practices that a scientist will follow to establish a hypothesis given raw data. To the best of our knowledge currently, there is no such tool in chemistry, which extracts NL structure-property relationships from user-given raw data. Furthermore, our application is generalizable to any domain that requires extracting input-output relationships as NLEs.

| | Interpretable | Targeted explanations | Literature evidence | Accessible to non-technical users |
|-------------------|---------------|-----------------------|---------------------|-----------------------------------|
| XAI | ✓ | ✓ | ✗ | ✗ |
| LLMs | ✓ | ✗ | ✗ | ✓ |
| LLMs + Literature | ✓ | ✗ | ✓ | ✓ |
| XpertAI | ✓ | ✓ | ✓ | ✓ |

Figure 2: Attributes of XpertAI explanations in comparison to baseline methods.

Method

We begin the workflow by training an ML model using the initial raw data. This model serves as a surrogate for mapping input to output. The initial dataframe includes featurized molecular structures and target labels for training. Note that these features must be human-interpretable (e.g., molecular descriptors/properties, MACCS keys). However, XpertAI will also improve feature readability by default. Currently, we employ gradient-boosting decision trees with the XGBoost framework, utilizing the Scikit-learn API for regression and classification tasks.^{40,41} We selected XGBoost as our default surrogate model because it has been shown to outperform many general neural network architectures regardless of its simplicity.⁴² Additionally, this choice is motivated by training and inference efficiency, comparably higher interpretability, and ease of integration with XAI methods. Once the model is trained, users can select from SHAP,⁴³ LIME,⁴⁴ or both to

estimate the “most impactful” features correlated with the molecular properties.

SHAP and LIME are possibly the most commonly used XAI methods to generate local explanations. They have been used in previous studies to interpret relevant features that contribute most towards the target properties in chemistry and adjacent domains^{39,45–47} In this study, we compute the mean SHAP values and Z-scores for LIME explanations to extract globally impactful features rather than generating local explanations. For the LIME analysis, we only use a sample of the initial dataset due to time and resource constraints. The default sample size is either 500 or the entire dataset if its length is less than 500. After identifying impactful features, we draw knowledge from the literature to elucidate physicochemical relationships between these features and the target property.

As seen in the overview of our proposed workflow (Figure 1) LLMs are used to unite the backend modules generating human interpretable explanations. More technically, XpertAI makes use of the retrieval augmented generation (RAG)⁴⁸ approach to reliably generate scientific explanations using evidence gathered from the literature. ~~Sawarkar et al.⁴⁹ state that an RAG method is versatile because it generates text and combines knowledge from external sources. This way it reduces hallucinations and misleading information.~~ LLMs' inherent knowledge can be limiting in knowledge-intensive, data-sparse fields such as chemistry and materials science.⁵⁰ Therefore, LLMs are prone to generate misinformation and hallucinate answers in such cases. RAG approach is commonly used to avoid such limitations in LLMs as it augments the LLM's internal knowledge with external data sources.⁴⁹ It fundamentally consists of a retriever and a generator (the LLM). Usually, given a query, relevant chunks of text are retrieved based on a distance metric. We leverage on LangChain python package (<https://github.com/langchain-ai/langchain>) Chroma vector database (<https://github.com/chroma-core/chroma>) (the retriever) and, OpenAI's GPT-4GPT-4o³¹ language model (the generator) in this workflow. This GPT-4o version (gpt-4o-2024-08-06 at the time of publication) was trained on data up to October 2023(<https://platform.openai.com/docs/models/gpt-4o>). Users have the flexibility to provide a literature dataset or scrape arxiv.org to gather relevant literature information. The latter is enabled via

the arXiv python API.

We used a similar approach as the “StuffDocumentsChain” in LangChain to refine the explanations. First, we select the most related literature excerpts using maximal marginal relevance search (MMR). Then, the text excerpts are “stuffed” to a specialized prompt to generate the final explanation. We utilize the chain-of-thought prompting approach⁵¹ where a series of intermediate steps and examples are provided in the prompt to improve the output’s interpretability. Prompts are given in Appendix B. XpertAI also generates and adds citations in the final NLEs to improve the accountability of the explanations. We would like to highlight that, in addition to the NLEs, XpertAI also provides the surrogate model’s evaluation plot (error plot) and XAI analysis plots for the users. To streamline this complete workflow, we have deployed a Streamlit App (<https://xpert-ai.streamlit.app/>) that can be used with an OpenAI API key. More technically oriented users can implement XpertAI locally using our GitHub repository: <https://github.com/geemi725/XpertAI>.

Results

We used the XpertAI tool to suggest structure-property relationships for five case studies in chemistry; 1) the presence of open metal sites in metal-organic frameworks (classification), 2) pore limiting diameter in metal-organic frameworks (regression), 3) toxicity of small molecules (classification), 4) solubility of small molecules (regression), and 5) upper flammability limit of organic molecules (regression). Please note that we used the SHAP method as the chosen XAI method and its default hyperparameters to generate NLEs in the following case studies. We chose the SHAP method due to its consistency in generating global explanations in comparison to LIME. Complete NLEs and SHAP plots for each case study from XpertAI are provided in Appendices A and E in SI respectively. ~~For each case study, a collection of journal~~ A set of published articles was uploaded for each case study to draw scientific evidence. These articles were manually curated based on relevance, number of citations, and the impact factor of the published journal. However,

the relevance of the article to the task at hand was prioritized over other criteria. We only included peer-reviewed articles in this step to ensure scientific accountability. An additional technical benefit is the lower recall within the RAG framework. The references to the articles used in this work can be found in the XpertAI GitHub repository. Please note that XpertAI provides the option to automatically scrape articles from arxiv.org in place or in addition to uploading user-preferred literature.

Case studies 1 and 2: Structure-property relationships in Metal-organic frameworks (MOFs).

MOFs, a hybrid class of materials in chemistry, consist of metal nodes connected by organic linkers.⁵² Their porous nature lends them versatile properties such as gas separation and storage,^{53–55} catalysis,^{56,57} and drug delivery.^{58,59} Understanding MOF structure-property relationships is crucial for optimizing their design in specific applications. Open metal sites, characterized by coordinative-unsaturation, find valuable use in catalysis.⁵² Additionally, the pore-limiting diameter is a key feature for screening them in selective gas capture applications.⁶⁰ However, the precise relationship between MOF atomic structure and open metal sites or pore-limiting diameter remains incompletely understood.

In case study 1, we sampled 3734 4000 MOFs from the CoRE MOF 2019 database⁶¹ –that contained labels for the presence of open metal sites and pore-limiting diameter. After input validation and the featurization step, we ended up with 3734 structures. These crystal structures obtained as CIF files were then featurized using the CrystalFeatures tool.⁶² Generated features are interpretable descriptors encompassing atomic and crystal characteristics, geometry features, and one-shot ab initio descriptors. Next, we uploaded the featurized inputs and (binary) target labels as a CSV dataframe along with a pre-selected literature dataset containing 28 41 publications to our XpertAI Streamlit App. The list of publications can be found in our GitHub repository. The generated NLE from XpertAI explains how a) metals fraction, b) density of solid, c) average cationic radius correlate with the presence of open metal sites. Additionally, it suggests type of metal ions used, the coordination environment, and the presence of structural defects may be

~~correlated with the presence of open metal sites. Although the input raw dataset did not include these features, XpertAI suggests these features to be correlated with the open metal sites based on literature data.~~ The XpertAI explanation aligns with the findings of Hall et al.,⁵² where the authors identify metal identity and oxidation state, defect density, and site proximity ~~to be as~~ impactful structural components. Note that we ~~did not include omitted~~ this review paper⁵² in the literature dataset uploaded to XpertAI to avoid data ~~tampering leakage~~.

Following a similar approach in case study 2, we used the same MOF dataset but with pore-limiting diameters as the label. Unlike case study 1, this is a regression-type problem. We uploaded a literature dataset with ~~17–24~~ journal articles to support XpertAI explanations. The pore size characterized by the pore limiting diameter is an important property in MOFs that can control charge transfer and direct air capture.⁶³ According to ~~the XpertAI explanation, XpertAI, key factors influencing the pore-limiting diameter include~~ volume per atom, symmetry function G, and unoccupied energy levels at the conduction band~~influence the pore-limiting diameter. For example, XpertAI states that “the Volume Per Atom can influence the . For instance, XpertAI hypothesizes that “Symmetry Function G1 may impact the pore limiting diameter in MOFs as it provides an indication of the by influencing the spatial arrangement of atoms, potentially affecting the uniformity and size of the atoms that make up the MOF. Larger atoms may result in larger pores, while smaller atoms may result in smaller pores (Haldoupis et al. , 2010).⁶⁴” Therefore, we show that XpertAI is a powerful tool that can generate credible explanations of structure-function relationships. XpertAI not only lists pores”. It continues to state that “an explicit relationship between Symmetry Function G1 and the pore limiting diameter was not found in the given documents. However, the documents discuss the geometric properties of MOFs, which are inherently related to symmetry⁶⁴”. This highlights XpertAI’s capability to produce insightful and plausible explanations while maintaining scientific rigor, avoiding speculative conclusions when supporting evidence is absent. We prompted XpertAI to go beyond merely identifying the most relevant molecular features ~~in a target property, but explains how they are related, just as a scientist would. Please see SI associated with the target property. It also hypothesizes potential~~~~

structure-property relationships and offers scientific reasoning, drawing on insights from the provided literature, emulating the approach a human scientist would take. For a comprehensive textual explanation, please refer to the Supporting Information (Appendix A) ~~for the complete textual explanation~~.

Case study 3: Small molecule toxicity. Toxicity prediction of small molecules is a benchmark task in chemistry, particularly in drug discovery.^{65,66} Despite the extensive research in this area, a precise understanding of the relationship between molecular structure and toxicity remains elusive. In this case study, we ~~used sampled and validated~~ 1478 molecules from the Tox21 database⁶⁵ where binary labels indicate toxicity (a classification task). Then we featurized the input molecules in SMILES format using MACCS descriptors⁶⁶ implemented in the RDKit package.⁶⁷ These descriptors are human-interpretable binary features containing 167 yes/no questions regarding molecular structure. Additionally, we used ~~32-45~~ manually curated journal articles to gather scientific evidence for the XAI observations. ~~XpertAI identifies the presence of a heteroatom bonded to three oxygen atoms, tertiary amine and carbon-oxygen single bond to be associated with the toxicity of molecules.~~ The generated XpertAI explanation summarizes: “The ~~analysis of~~ features identified by ~~the XAI analysis that affect XAI in relation to~~ the toxicity of small molecules ~~are the~~ reveals several key insights. ~~The~~ presence of a heteroatom bonded to three ~~Oxygen atoms, the presence of an Aminomethyl Group, and the presence of a Tertiary Amine. Other features that may be correlated with the toxicity of small molecules include the presence of unsubstituted bonded heteroatoms, aromatic amines, and Michael receptors (Bhanushee Sharma et al., 2023)~~⁶⁸ oxygen atoms, such as in phosphate groups, is associated with increased chemical reactivity due to the electronegative nature of oxygen atoms, potentially influencing toxicity. Tertiary amines, known for their nucleophilic properties, may interact with electrophilic sites in biological systems, contributing to toxicity. Additionally, carbon-oxygen single bonds, prevalent in functional groups like alcohols and ethers, can affect the solubility and reactivity of molecules, thereby impacting their toxicity. These features highlight the complex interplay between chemical structure and biological activity, underscoring the importance of understanding molecular interactions in toxicity

predictions.” We note that the XpertAI explanation aligns with the findings in work by Meanwell 69 and, Limban et al.⁷⁰ which state that aromatic amines and nitro groups are associated with increasing molecular toxicity. These references were not included in the literature dataset uploaded to XpertAI. The complete XpertAI NLE can be found in SI (Appendix A). While XpertAI suggests that these features can alter toxicity as they affect the reactivity of the molecules and their ability to form reactive species, it’s important to note that toxicity is a complex property that is likely influenced by a combination of many features. ~~Therefore, one must be mindful that changing one feature may not necessarily lead to a predictable change in toxicity.~~

Case study 4: Small molecule solubility. Aqueous solubility of small molecules is a critical property in drug discovery as solubility determines the interaction of the drug in a biological environment.⁷¹ To explain the relationship between the molecular structure and its solubility, we used a sample dataset with 9982 molecules from the AqSolDB⁷² dataset for training. Once again, we used MACCS descriptors to convert the molecules into a binary vector.

[Example XpertAT Explanation] - Case study 4: Solubility

Features Identified by XAI Analysis

- Presence of a heteroatom bonded to three oxygen atoms
- Presence of a tertiary amine
- Presence of a carbon-oxygen single bond

Presence of a heteroatom bonded to three oxygen atoms:

Explanation: The presence of a heteroatom bonded to three oxygen atoms, such as in a phosphate group, is often associated with significant chemical reactivity due to the electronegative nature of oxygen atoms. This can influence the molecular structure and reactivity, potentially affecting the toxicity of small molecules.

Scientific Evidence: The document discusses the role of oxygen lone pairs in chemical reactivity, particularly in anomeric systems where oxygen atoms interact with strong sigma-acceptors (Alabugin et al., 2021). This suggests that the presence of multiple oxygen atoms bonded to a heteroatom can lead to increased reactivity and potentially influence toxicity.

Hypothesis: The presence of a heteroatom bonded to three oxygen atoms may increase the reactivity of a molecule, thereby influencing its toxicity profile due to potential interactions with biological targets.

...

Figure 3: An excerpt from the XpertAI explanation

We uploaded a literature dataset with 25–27 related publications. References to these can be found in our GitHub repository. XpertAI explains the structure-solubility relationship as follows. “The features identified by the XAI analysisthat affect the solubility of small molecules include the, such as the presence of an atom at an aromatic/non-aromatic boundary, the

~~presence of~~ two heteroatoms bonded ~~together, and the presence of~~ to each other, and an atom with three ~~different atom~~ neighbors. Additional features that may be correlated with the solubility of small molecules include the size of the molecule, the number of hydrogen bond acceptors/donors, and the basicity/acidity of the molecule (~~heteroatom~~ neighbors, all show strong negative correlations with solubility. These features likely influence solubility by affecting molecular planarity, symmetry, electronic distribution, and hydrogen bonding potential. The presence of aromatic boundaries and heteroatom interactions can maintain molecular structures that are less favorable for solubility, as supported by the SHAP analysis and literature on molecular modifications for solubility enhancement (XpertAI, 2024; Ishikawa & Hashimoto, 2011; Walker, 2017)⁷³. The complete explanation draws scientific evidence from 4 journal articles. Once again, we demonstrate XpertAI's is an accessible tool that provide credible natural language.^{73,74} Figure 3 is an additional expert from the XpertAI explanation with its native formatting. Complete explanations can be found in SI (Appendix A). This further demonstrates XpertAI's accessibility as a tool that generates credible, natural language explanations of molecular structure-property relationships. XpertAI is To the best of our knowledge, XpertAI is currently the only tool that combines XAI and LLMs explainable AI (XAI) with large language models (LLMs) to interpret such relationships to the best of our knowledge.

Case study 5: Compound flammability. The upper flammability limit (UFL) of an organic compound is an important characteristic that determines the hazardous nature of the compound.⁷⁵ This is an interesting topic of study in both experimental and computational studies.⁷⁶⁻⁷⁹ We used the UFL dataset used by Yuan et al.,⁷⁵ which was extracted from reference Crowl and Louvar.⁸⁰ This dataset only contained 79 organic compounds. We used the same quantum and non-quantum molecular descriptor set used in reference 75 to featurize the molecules. After uploading the initial dataset and 15 curated publications, we obtained the following explanation. “The features identified by the XAI analysis~~that affect the~~, including the Structural Information Content Index (Neighborhood Symmetry of Zero-Order), Information Content Index (Neighborhood Symmetry of Order), and Dipole Moment, all play significant roles in determining

the upper flammability limit in organic molecules are the Neighborhood Symmetry Index (UFL) of organic molecules. The Structural Information Content Index (Neighborhood Symmetry of Zero-Order Structural Information Content and the) and its generalized form, Information Content Index (Zero-Order Neighborhood Symmetry) Neighborhood Symmetry of Order), quantify molecular symmetry, which influences molecular stability and reactivity. These factors can be crucial in determining how easily a molecule can ignite and sustain combustion. The dipole moment, although not explicitly discussed in the provided documents, could affect molecular interactions and stability, thereby influencing flammability. These features collectively provide a comprehensive understanding of the molecular characteristics that impact the UFL of organic compounds. The energy of the highest occupied molecular orbital is another feature that has a significant impact on the upper flammability limit in organic molecules.”

We use this case study as our This case study is intentionally used as a negative example. We purposefully deliberately selected a smaller dataset. Therefore, we expect with limited supporting literature, anticipating that the surrogate model to not be trained fully, thereby yielding a false relationship from the data. While would not be fully trained and may potentially produce spurious relationships. Furthermore, cross-referencing revealed that the provided literature did not explicitly identify any correlations between the features examined and the upper flammability limit (UFL). As provided in SI Appendix A, XpertAI provides a complete, textual explanation extracted from raw data. However, this may not correctly reflect the underlying molecular structure-property relationship. We conducted further evaluations to assess the accuracy, relevance and interpretability of each explanation.

Evaluation

Firstly, to evaluate the explanations for the listed case studies, we compared three different explanations from; 1) XpertAI 2) ChatGPT (GPT-4GPT-4o), and 3) Graphical plots from the XAI analysis. The aim was to evaluate if XpertAI can leverage the advantages of both XAI

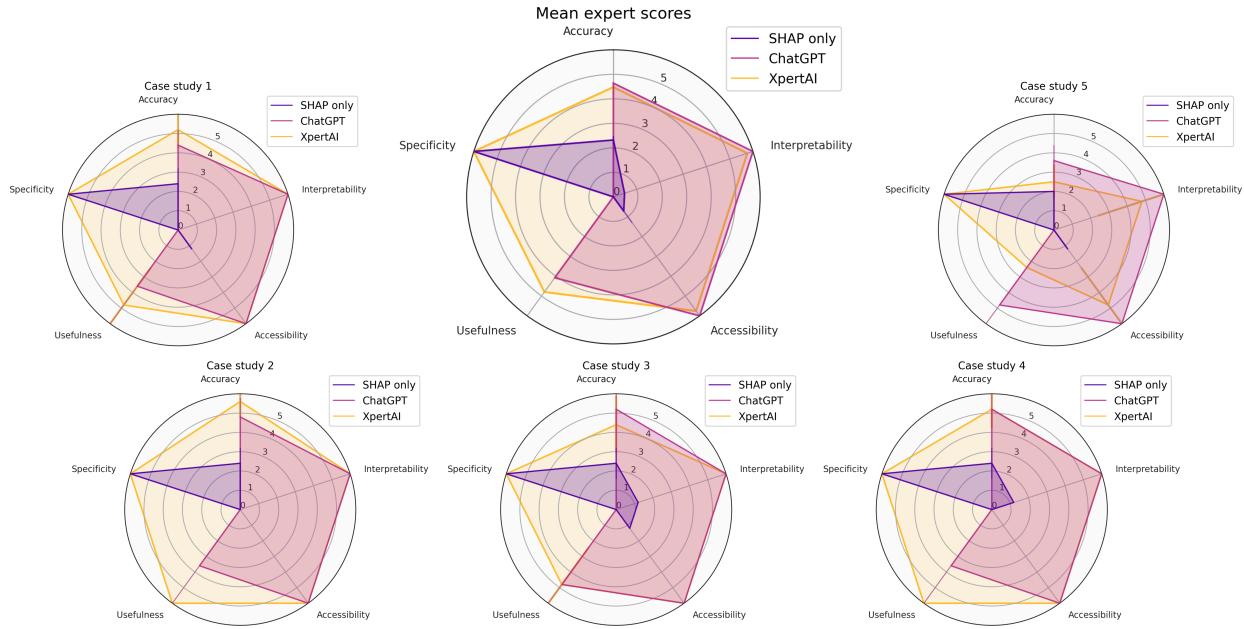


Figure 4: Human expert consensus for all case studies and the mean scores. 5 human experts (graduate students in chemistry) were asked to evaluate explanations from XpertAI, ChatGPT, and SHAP plots for each case study based on accuracy, interpretability, accessibility, usefulness in research, and specificity to given data. Each category was given a maximum score of 6.

and LLMs, rather than using one alone. We asked five expert chemists (graduate students in chemistry) to score 15 explanations in total ($5 \text{ tasks} \times 3 \text{ explanations}$). The experts were given a scorecard (given in SI's Appendix D) to evaluate each answer based on accuracy, interpretability, accessibility, usefulness in research, and specificity to given data. Each category was given an arbitrarily selected maximum score of 6 for evaluation purposes. Values per answer are given next to answers in Appendix D.

As seen in Figure 4, on average evaluators scored XpertAI NLEs highly under each category. In all 5 tasks, experts identified that ChatGPT explanations are not tailored to the given ~~data~~dataset. Contrastively, evaluators agreed that while XAI results (SHAP plots in this case) are specific to given data, these lack accessibility and interpretability. Often, XAI plots were labeled as not useful for further research. On the other hand, it can be inferred from Figure 4 that XpertAI ~~outperforms both LLMs and XAI by generating explanations that are interpretable, reliable, and tailored~~explanations were preferred in terms of interpretability, reliability, and specificity. As summarized in Figure 2,

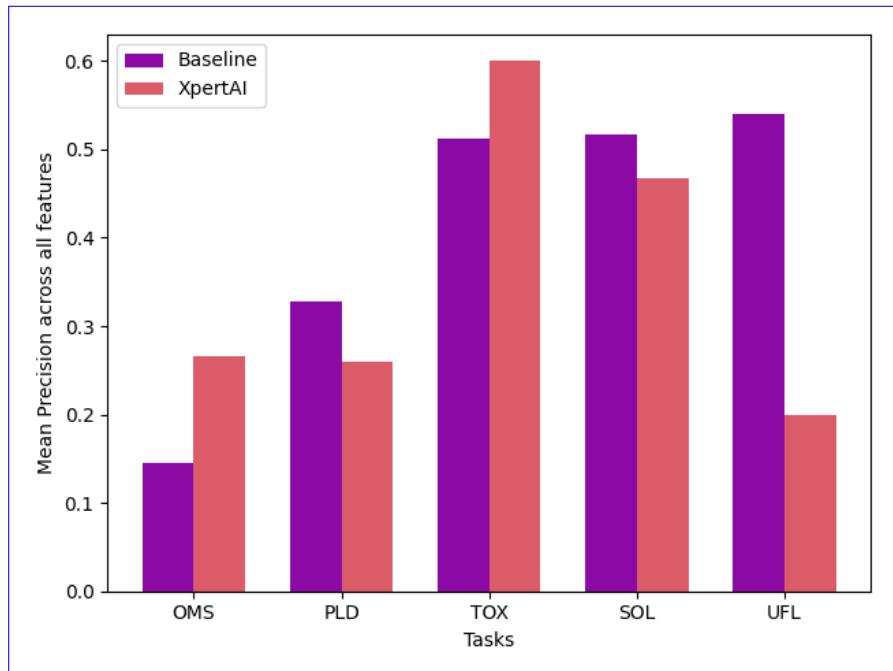


Figure 5: Variation among Mean precision of hypotheses generated explanations computed (↑). XpertAI-generated hypotheses are compared with RougeL metric⁸¹ baseline GPT-4o. 5 explanations were generated using XpertAI and ChatGPT Equation (GPT-41) per task. “Mean” bar indicates was used to compute the mean of all 5 tasks and the varianceprecision ∈ 0, 1. Error bars represent the variance among results.

the evaluations conclude that XpertAI effectively combines the advantages of both ChatGPT and XAI to provide a complete explanation. The expert scores further validate the accomplishment of our goal to extract accessible and interpretable structure-property relationships in chemistry from raw data. Based on expert scores for individual studies, we noted that for case studies 1-4 XpertAI’s explanations always scored better or as equally as ChatGPT, in terms of interpretability, accessibility, and usefulness. As expected, for our negative case study, experts scored XpertAI lower than ChatGPT in all categories except for specificity. We point out that, this is possibly due to inadequate training of the surrogate model used in the XAI study. We highlight that XpertAI’s success is dependent upon both the XAI method and LLM’s capabilities. A surrogate model that can capture the “True” relationship as closely as possible can accurately identify the most impactful molecular features, LLM’s performance determines the interpretability and credibility of the generated explanations. Additionally, it should be emphasized that the quality of the generated explanations is also dependent on the quality of the literature dataset provided. In all 5 case studies, we used manually curated, peer-reviewed journal articles only. These were selected based on the number of citations, relevance, and the impact factor of the journal. Note that a systematic selection of literature articles balances the precision and recall of the generated references. The lists of references used can be found in our GitHub repository.

Additionally, we observe that XpertAI scored comparatively less in case study 3. We argue this is because human experts excel at validating ~~generalized scientific hypotheses~~broad scientific understanding and not knowledge specific to a given dataset. However, XpertAI’s explanations are specific to relationships established from provided datasets, which may be different from familiar concepts in chemistry. While ChatGPT can generate broad explanations that can resemble general chemical understanding, these explanations are vulnerable to hallucinations and misinformation. ~~In XpertAI we avoid~~The advantage of XpertAI is that it overcomes these vulnerabilities by using ~~a RAG technique. To evaluate this, we generated 5 explanations per case study while keeping all hyperparameters constant. If the explanations significantly vary among different runs, we can conclude the explanations are prone to hallucination.~~the RAG approach.

We further evaluated the precision of the generated hypotheses by XpertAI and compared with GPT-4o explanations. For each task and each feature that is identified in the XpertAI explanation, we extracted each proposed hypothesis and labeled the correlation of the feature with the property under study (OMS, PLD etc.) as positive, negative, or unclear. An example of an unclear correlation is “Metal ions with favorable redox properties might be more likely to form stable open metal sites.” We used the RougeL metric⁸¹ following formula to compute the pairwise similarities between the explanations. Mean RougeL scores for all 5 case studies are given in figure ???. As indicated in the “mean” bar, we notice that the mean RougeL scores of all 5 case studies are higher and have a lower variance for XpertAI explanations. However, these scores vary significantly for ChatGPT explanations. This is a clear indication that ChatGPT explanations are more prone to hallucinations when compared with XpertAI. Additionally, the XpertAI’s RougeL is comparatively lower for the precision.

$$\text{precision} = \frac{1}{N_{\text{features}} \times N_{\text{runs}}} \sum_i^{N_{\text{features}}} \left| (1) \times n_{i,\text{positive}} + (-1) \times n_{i,\text{negative}} + (0) \times n_{i,\text{unclear}} \right| \quad (1)$$

Here N_{features} is the total number of unique features listed in the explanations and $N_{\text{runs}} = 5$. assigned arbitrary weights of +1, -1 and 0 to calculate precision $\in [0, 1]$. These weights allow us to assess whether the generated explanations align or diverge at the feature level. The results shown in Figure 5 reflect this analysis. XpertAI either outperforms or is comparable to the baseline at the feature level, except for case study 5(Upper flammability limit). This indicates that XpertAI is inherently uncertain of the result, further validating our observations from expert evaluations. However, it must be noted that RougeL metric is only a quantitative measure of overlap between two paragraphs, and this is not a reflection of the quality of the content., our negative example. In instances where XpertAI scores lower, the majority of per-feature correlations were classified as unclear, reflecting the absence of explicit correlations in the literature. This suggests that XpertAI avoids generating speculative or unfounded conclusions. Conversely, while the GPT-4o baseline model demonstrated more consistency in its claims across the five runs, there is no

assurance that these claims or correlations are free from hallucinations.

Next, to assess the overall content of XpertAI and ChatGPT explanations we asked Claude AI assistant (<https://claude.ai/>) by Anthropic <https://www.anthropic.com/> to compare the two explanations based on relevance, accuracy, and interpretability. The complete responses from Claude are given in SI (Appendix C). Based on the responses, Claude rates the explanations from XpertAI higher than ChatGPT's for all case studies except for case study 5. We summarize the evaluations by Claude for ranking XpertAI's explanations higher. Note that we anonymized the two explanations during the scoring; Explanation A is by XpertAI and Explanation B is by ChatGPT. Each evaluation was run independently to avoid model biases.

- Explanation A directly discusses the specific features identified by the XAI analysis and provides concrete examples of how changing those features affect the target property, indicating high relevance for research. Explanation B provides a more general background on how molecular structure influences the target properties. While still relevant, it does not directly address the specific features called out in the XAI analysis.
- By extensively referencing multiple recent studies on the topic, Explanation A establishes accuracy in its explanations. The research evidence lends credibility and precision to the statements made. Explanation B does not provide any citations, making its accuracy more uncertain.
- Explanation A is more narrowly tailored to the specific question of how the features identified in the XAI analysis impact target properties. It provides mechanistic interpretations, examples, and literature references. This level of relevance, interpretability, and accuracy makes Explanation A better suited for guiding further research compared to the more general background provided in Explanation B.

However, for case study 5, Claude ranked the ChatGPT explanation higher. This is similar to the observations from expert evaluations. According to Claude, Explanation B provides a more thorough and relevant discussion of how molecular structure impacts upper flammability

limit. It covers key structural factors and give useful insight into the research question. However, Explanation A while relevant, lacks the comprehensive coverage of Explanation B. We hypothesize this is due to the underperformance of the trained XGBoost model, as evidenced by a higher root-mean-square error (RMSE) during testing, which results in XpertAI's lower-rated explanation. This possibly stems from the limited size of the training dataset (only 63 data points for training). As a result, the XAI analysis reveals the model could have learned non-causal correlations within the dataset. Therefore, the essential features may not be faithfully represented, thereby leading XpertAI to generate a flawed explanation.

We also evaluated the generated references to the literature using an independent ChatGPT-4o model. This is a newer and better-performing model compared to GPT-4 (). In this comparison, ChatGPT-4o was used to cross-reference each citation with their respective papers. The complete analysis and the prompt are given in Appendix G. Summarized results are given in table 1 . The aim is to see if XpertAI can provide precise explanations based on the provided literature. Note that precision = $\frac{\text{num. true positive}}{\text{num. predicted positives}}$. Next, we validated the accuracy of the citations. Based on the results given in Table 1 we see that XpertAI's citations are accurate and relevant. Although XpertAI incorrectly cites reference 61 in case study 2:PLD, the text mentions the acronym PLD. However, in cases where XpertAI does not find explicit relationships in the text, it highlights this and avoids false citations.

Based on this analysis Based on our analyses, we conclude that XpertAI's overall performance on cross-referencing is satisfactory. However, we observed that one of the main causes of failure stems from the absence of feature labels in the scientific text. For example, in case studies 2 and 4, XpertAI attempts to cross-reference features such as feature label such as "symmetry function G1," "unoccupied energy levels at conduction band minimum," and "presence of an atom with three different atom neighbors within heteroatom neighbors" in the provided literature corpus. Therefore, we emphasize We therefore underscore the importance of carefully selecting feature descriptions. A quick way to enhance the precision of references is Although XpertAI can search for synonymous descriptors when the exact label is unavailable, this process can result

Table 1: Quantitative analysis of ~~citations~~ citation accuracy in XpertAI explanations.

| height | Case study Case Study | Total Number of citations | Citation Accuracy | Precision $\in \{0, 1\}$ | Comments |
|---------|----------------------------------|---------------------------|-------------------|--------------------------|---|
| 1 | OMS | 8 | 0.752/3 | 0.5 | The reference was neither correct nor relevant. |
| 3 | PLD | 1 | 1/2 | 1 | The reference mentioned the citation was incorrect. |
| 4 | TOX | 5 | 1/1 | 0.6 | No issues with citations. |
| 5 | SOL | 1 | 2/2 | 1 | No issues with citations. |
| Average | UFL | 4.8 | 2/2 | 0.77 | No issues with citation |

in deviations from the original XAI findings. We note significant room for improvement within the XpertAI framework by increasing the number of provided literature articles, although this would lead to increased recall. ~~We note significant room for improvement within the XpertAI framework. For example~~ Additionally, providing XpertAI access to ~~a broader array of automated literature scraping~~ tools can significantly enhance its capacity for scientific explanation. This expanded toolkit allows the agent to perform more comprehensive analyses, utilize specialized resources, and deliver more accurate and nuanced interpretations of complex scientific concepts. There are numerous leading works investigating this specific problem, which are beyond the scope of this study.

Open-XpertAI: exploring open-source LLMs

In the previous sections, we demonstrated that XAI combined with ~~GPT-4~~ GPT-4o garners significant advantages in explaining structure-property relationships in molecules. However, a notable limitation of this approach lies in the proprietary nature of ~~GPT-4~~ GPT-4o, necessitating a paid license for its utilization. Conversely, there exists a substantial array of open-source LLMs that have demonstrated remarkable prowess in text generation. In addition to the financial

benefits, open-source LLMs also provide transparency, flexibility, and the benefit of community contributions. Nonetheless, it is important to acknowledge that despite these advantages, the overall performance of these models still trails behind that of GPT-4GPT-4o.

To investigate the feasibility of integrating open-source LLMs into XpertAI we conducted a brief study. We assessed the performance ~~of 4~~ of 4 open-source LLMs that have demonstrated comparable capabilities to GPT-4, focusing on the accuracy of their generated explanations. The selected LLMs were: Llama2:7b,⁸² ~~mixtral~~Mixtral:8x7b-instruct-v0.1-q5_0,⁸³ ~~starling-lm~~Starling-lm:7b-alpha⁸⁵ and ~~phiPhi~~PhiPhi:2.7b.⁸⁴ These open-source LLMs were configured and executed locally utilizing Ollama, a streamlined AI tool designed for local deployment of open-source LLMs. For all LLMs except Mixtral:8x7b-instruct, Q4_0 quantization level was used. While we utilized a selection of open-source LLMs available at the time of research, we acknowledge that more advanced models may be available at the time of publication, and future studies could benefit from these enhanced versions. Detailed performance metrics of each LLM against benchmark datasets can be found in the respective references.

This study aims to assess the ability of open-source LLMs to accurately generate explanations within an RAG system like XpertAI as an alternative to proprietary LLMs. We generated explanations from these LLMs using the same molecular features and literature data employed in previous case studies. Then a human evaluator was asked to assess the accuracy of the generated explanations for all 5 case studies. The evaluator assigned a score of 1 for accurate explanations and 0 for inaccurate ones. The scores for references were averaged by the number of references in each explanation before totaling. Please see Table 2 for the summarized results. ~~Following a similar approach as before, we~~We generated 5 explanations per case study and computed RougeL scores to gauge the variation among explanations. The average RougeL scores over the 5 case studies are give in Table 2. Please see SI (Appendix FG) for RougeL scores for individual case studies. From the results, we observe that both mixtral (8x7b-instruct-v0.1-q5_0) and starling (7b) models demonstrate performance comparable to GPT-4. Specifically, the small size of the latter makes it an attractive option to be implemented in RAG pipelines. However, it's worth noting that

Table 2: Evaluation of open-source LLM generated explanations in XpertAI. Evaluation metric= accuracy, Highest score= 5. GPT-4 is the default in XpertAI.

| LLM | Size & (Ollama quant. level) | Accurately describes each feature and how it is related to the target | Accurately describes how the target can be altered w.r.t each feature | Lists and explains additional features | Accuracy of generated references | Average RougeL score \pm SD |
|---|---|---|---|--|----------------------------------|-------------------------------|
| Llama2 ⁸² | 3.8 GB 7B (Q4_0) | 0 | 1 | 2 | 0.3 | 0.52±0.05 |
| mixtral:8x7b-instruct-v0.1-q5 ⁸³ | 8x7B (Q5_0⁸³) | 32 GB -4 | 5 | 5 | 1.25 | 0.49±0.04 |
| Phi:2.7bPhi-2 ⁸⁴ | 1.6 GB 7B (Q4_0) | 1 | 0 | 3 | 0 | 0.38±0.06 |
| starling-lm:7b-alpha ⁸⁵ | 4.1 GB 7B (Q4_0) | 5 | 2 | 4 | 1.6 | 0.46±0.02 |
| GPT-4 ³¹ GPT-4o ³¹ | $\geq 2T$ (default in XpertAI) | N/A-5 | 5 | 5 | 5 | 0.64±0.05 |

none of the open-source models excelled in generating references accurately. Frequently, these models provided incorrect references or failed to generate references altogether. Based on these observations, we conclude that we can be optimistic about using open-source LLMs in place of proprietary models. Note that these open-source explanations can further be improved with other techniques, such as prompt engineering and/or finetuning. We did not investigate this aspect as it is beyond the scope of our study.

Conclusion & Outlook

XAI is becoming increasingly important in ML workflows due to developmental, scientific, and regulatory needs. In this context, we addressed a key challenge in applying XAI to chemistry — the lack of interpretability [and scientific grounding](#) of explanations generated by XAI tools. Generally, XAI tools are developed with technical experts in mind, thereby reducing usability. We proposed “XpertAI”, a framework leveraging XAI and LLMs to generate intelligent natural language explanations of structure-property relationships from raw chemistry data. In other words, XpertAI can be perceived as an LLM agent for hypotheses generation that consists of two main components; 1) XAI methods and, 2) a RAG model. XpertAI produces readily interpretable and specific explanations while uncovering structure-property relationships. We showed [combining integrating](#) XAI and LLMs is more powerful than using either alone. Furthermore, we demonstrated that this combination can accurately explain input-output relationships, not just model predictions.

We would like to highlight that XpertAI’s performance is limited by; a) surrogate model’s fit, b) feature descriptions, and c) RAG model’s performance (literature retrieval and augmented text generation). Firstly, if the surrogate model has acquired spurious data relationships, it will inevitably yield an inaccurate explanation. In the current version of XpertAI, hyperparameters are hardcoded to enhance non-expert usability. In our upcoming work, we plan to integrate automated hyperparameter optimization. Additionally, we aim to incorporate other ML models and enable user-provided models, giving more flexibility. However, if a user intends to implement an existing

model, they can do so easily using the GitHub codebase.

On the other hand, the quality of the explanations is governed by the descriptions of the feature labels and the RAG model’s performance. For instance, if the features are not found in the literature, the precision of the generated explanations will be low. However, XpertAI is prompted to output “an explicit relationship was not found in the given documents” if it failed to find literature evidence. It is important to note that feature selection significantly impacts the fit of the surrogate model. Therefore, careful selection of input features is crucial within the XpertAI framework. Enhancing the performance and efficiency of the RAG model is an ongoing topic of investigation that is beyond the scope of our work. However, we anticipate that improvements in existing tools and methodologies will enhance XpertAI’s overall performance. For example, better-performing retrievers and LLMs will undoubtedly improve XpertAI’s capabilities. Moving in this direction, we plan to upgrade XpertAI’s default LLM from GPT-4 to the latest state-of-the-art model in the next version The current version of XpertAI serves as a proof of concept that XAI integrated with LLMs can be a proxy for hypothesis generation in Chemistry. XpertAI mimicks the workflow a scientist would follow to arrive at a hypothesis – following an observation, a hypothesis is generated and supported with literature evidence. Given the growth of tools and methodologies based on LLMs, we aim that XpertAI can become a powerful hypothesis-generating agent in the future.

As we showed previously, open-source LLMs exhibit encouraging signs to be used in place of GPT-4 proprietary GPT models in RAG models. Therefore, our future work will incorporate streamlining the use of open-source LLMs into XpertAI as an alternative to GPT-4 dependencies. This will further increase XpertAI’s accessibility to generate accurate explanations.

Despite current limitations, XpertAI demonstrates potential as an interpretable approach that combines XAI and LLMS, for uncovering novel structure-property relationships and generating scientific insights in chemistry. By leveraging AI’s strengths in explanation and language, XpertAI accelerates scientific progress through chemical knowledge extraction and hypothesis generation. This exciting advancement elucidates meaningful chemical structure-property relationships, thereby

propelling discovery.

Code and Data Availability

Code to XpertAI can be found at: <https://github.com/geemi725/XpertAI> and the XpertAI App can be found at: <https://xpert-ai.streamlit.app/>

Acknowledgments

We thank the expert evaluators for their contributions to this work. GPW acknowledges funding from the EPFL large-scale Solutions4Sustainability demonstrator project (SusEcoCCUS). PS acknowledges support from the NCCR Catalysis (grant number 180544), a National Centre of Competence in Research funded by the Swiss National Science Foundation.

References

- (1) Wiener, H. Structural determination of paraffin boiling points. *Journal of the American chemical society* **1947**, *69*, 17–20.
- (2) Seybold, P. G.; May, M.; Bagal, U. A. Molecular structure: Property relationships. *Journal of Chemical Education* **1987**, *64*, 575.
- (3) Mihalić, Z.; Trinajstić, N. A graph-theoretical approach to structure–property relationships. *Journal of Chemical Education* **1992**, *69*, 701.
- (4) Ren, F.; Ding, X.; Zheng, M.; Korzinkin, M.; Cai, X.; Zhu, W.; Mantsyzov, A.; Aliper, A.; Aladinskiy, V.; Cao, Z.; others AlphaFold accelerates artificial intelligence powered drug discovery: efficient discovery of a novel CDK20 small molecule inhibitor. *Chemical Science* **2023**, *14*, 1443–1452.
- (5) Kim, J.-Y.; Oh, D.; Sung, K.; Choi, H.; Paeng, J. C.; Cheon, G. J.; Kang, K. W.; Lee, D. Y.; Lee, D. S. Visual interpretation of [18 F] Flortetaben PET supported by deep learning–based estimation of amyloid burden. *European Journal of Nuclear Medicine and Molecular Imaging* **2021**, *48*, 1116–1123.
- (6) Gawehn, E.; Hiss, J. A.; Schneider, G. Deep learning in drug discovery. *Molecular informatics* **2016**, *35*, 3–14.
- (7) Lysenko, A.; Sharma, A.; Boroevich, K. A.; Tsunoda, T. An integrative machine learning approach for prediction of toxicity-related drug safety. *Life science alliance* **2018**, *1*.
- (8) Jaiswal, A.; Gianchandani, N.; Singh, D.; Kumar, V.; Kaur, M. Classification of the COVID-19 infected patients using DenseNet201 based deep transfer learning. *Journal of Biomolecular Structure and Dynamics* **2021**, *39*, 5682–5689.
- (9) Deringer, V. L.; Caro, M. A.; Csányi, G. Machine Learning Interatomic Potentials as Emerging Tools for Materials Science. *Advanced Materials* **2019**, *31*, 1902765.

- (10) Faber, F. A.; Hutchison, L.; Huang, B.; Gilmer, J.; Schoenholz, S. S.; Dahl, G. E.; Vinyals, O.; Kearnes, S.; Riley, P. F.; von Lilienfeld, O. A. Prediction Errors of Molecular Machine Learning Models Lower than Hybrid DFT Error. *Journal of Chemical Theory and Computation* **2017**, *13*, 5255–5264, PMID: 28926232.
- (11) Gupta, R.; Srivastava, D.; Sahu, M.; Tiwari, S.; Ambasta, R. K.; Kumar, P. Artificial intelligence to deep learning: machine intelligence approach for drug discovery. *Molecular diversity* **2021**, *25*, 1315–1360.
- (12) Duch, W.; Swaminathan, K.; Meller, J. Artificial Intelligence Approaches for Rational Drug Design and Discovery. *Current Pharmaceutical Design* **2007**, *13*, 1497–1508.
- (13) Dara, S.; Dhamercherla, S.; Jadav, S. S.; Babu, C. M.; Ahsan, M. J.; darasuresh, S. D.; Dara, S. Machine Learning in Drug Discovery: A Review. *Artificial Intelligence Review* **2022**, *55*, 1947–1999.
- (14) Gormley, A. J.; Webb, M. A. Machine learning in combinatorial polymer chemistry. *Nature Reviews Materials* **2021**, *6*, 642–644.
- (15) Gomes, C. P.; Fink, D.; Van Dover, R. B.; Gregoire, J. M. Computational sustainability meets materials science. *Nature Reviews Materials* **2021**, *6*, 645–647.
- (16) Murdoch, W. J.; Singh, C.; Kumbier, K.; Abbasi-Asl, R.; Yu, B. Definitions, methods, and applications in interpretable machine learning. *Proceedings of the National Academy of Sciences* **2019**, *116*, 22071–22080.
- (17) Schwalbe, G.; Finzel, B. A comprehensive taxonomy for explainable artificial intelligence: a systematic survey of surveys on methods and concepts. *Data Mining and Knowledge Discovery* **2023**, 1–59.
- (18) Wellawatte, G. P.; Gandhi, H. A.; Seshadri, A.; White, A. D. A Perspective on Explanations of Molecular Prediction Models. *Journal of Chemical Theory and Computation* **2023**, *19*, 2149–2160, PMID: 36972469.
- (19) Miller, T. Explanation in artificial intelligence: Insights from the social sciences. *Artificial intelligence* **2019**, *267*, 1–38.

- (20) Biran, O.; Cotton, C. Explanation and justification in machine learning: A survey. IJCAI-17 workshop on explainable AI (XAI). 2017; pp 8–13.
- (21) Murdoch, W. J.; Singh, C.; Kumbier, K.; Abbasi-Asl, R.; Yu, B. Definitions, methods, and applications in interpretable machine learning. *Proceedings of the National Academy of Sciences* **2019**, *116*, 22071–22080.
- (22) Cambria, E.; Malandri, L.; Mercurio, F.; Mezzanzanica, M.; Nobani, N. A survey on XAI and natural language explanations. *Information Processing & Management* **2023**, *60*, 103111.
- (23) Mariotti, E.; Alonso, J. M.; Gatt, A. Towards harnessing natural language generation to explain black-box models. 2nd Workshop on Interactive Natural Language Technology for Explainable Artificial Intelligence. 2020; pp 22–27.
- (24) Kanehira, A.; Harada, T. Learning to explain with complementary examples. Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 2019; pp 8603–8611.
- (25) Sheridan, R. P. Interpretation of QSAR Models by Coloring Atoms According to Changes in Predicted Activity: How Robust Is It? *Journal of Chemical Information and Modeling* **2019**, *59*, 1324–1337.
- (26) Russell, C. Efficient search for diverse coherent explanations. Proceedings of the Conference on Fairness, Accountability, and Transparency. 2019; pp 20–28.
- (27) Wellawatte, G. P.; Seshadri, A.; White, A. D. Model agnostic generation of counterfactual explanations for molecules. *Chemical Science* **2022**, *13*, 3697–3705.
- (28) White, A. D. The future of chemistry is language. *Nature Reviews Chemistry* **2023**, *1*–2.
- (29) Zheng, Z.; Zhang, O.; Borgs, C.; Chayes, J. T.; Yaghi, O. M. ChatGPT Chemistry Assistant for Text Mining and the Prediction of MOF Synthesis. *Journal of the American Chemical Society* **2023**, *145*, 18048–18062, PMID: 37548379.

- (30) Hatakeyama-Sato, K.; Watanabe, S.; Yamane, N.; Igarashi, Y.; Oyaizu, K. Using GPT-4 in parameter selection of polymer informatics: improving predictive accuracy amidst data scarcity and ‘Ugly Duckling’ dilemma. *Digital Discovery* **2023**, *2*, 1548–1557.
- (31) OpenAI GPT-4TechnicalReport. *ArXiv* **2023**,
- (32) Boiko, D. A.; MacKnight, R.; Kline, B.; Gomes, G. Autonomous chemical research with large language models. *Nature* **2023**, *624*, 570–578.
- (33) Jablonka, K. M.; Schwaller, P.; Ortega-Guerrero, A.; Smit, B. Leveraging Large Language Models for Predictive Chemistry. *ChemRxiv* **2023**,
- (34) Xie, T.; Wan, Y.; Huang, W.; Yin, Z.; Liu, Y.; Wang, S.; Linghu, Q.; Kit, C.; Grazian, C.; Zhang, W.; others DARWIN Series: Domain Specific Large Language Models for Natural Science. *arXiv preprint arXiv:2308.13565* **2023**,
- (35) Wu, C.; Zhang, X.; Zhang, Y.; Wang, Y.; Xie, W. Pmc-llama: Further finetuning llama on medical papers. *arXiv preprint arXiv:2304.14454* **2023**,
- (36) Taylor, R.; Kardas, M.; Cucurull, G.; Scialom, T.; Hartshorn, A.; Saravia, E.; Poult, A.; Kerkez, V.; Stojnic, R. Galactica: A large language model for science. *arXiv preprint arXiv:2211.09085* **2022**,
- (37) Singhal, K.; Azizi, S.; Tu, T.; Mahdavi, S. S.; Wei, J.; Chung, H. W.; Scales, N.; Tanwani, A.; Cole-Lewis, H.; Pfohl, S.; others Large language models encode clinical knowledge. *Nature* **2023**, *620*, 172–180.
- (38) Bran, A. M.; Cox, S.; White, A. D.; Schwaller, P. ChemCrow: Augmenting large-language models with chemistry tools. *arXiv preprint arXiv:2304.05376* **2023**,
- (39) Seshadri, A.; Gandhi, H. A.; Wellawatte, G. P.; White, A. D. Why does that molecule smell? *ChemRxiv* **2022**,
- (40) Chen, T.; Guestrin, C. XGBoost: A Scalable Tree Boosting System. Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining. New York, NY, USA, 2016; pp 785–794.

- (41) Pedregosa, F.; Varoquaux, G.; Gramfort, A.; Michel, V.; Thirion, B.; Grisel, O.; Blondel, M.; Prettenhofer, P.; Weiss, R.; Dubourg, V.; others Scikit-learn: Machine learning in Python. *Journal of machine learning research* **2011**, *12*, 2825–2830.
- (42) Borisov, V.; Leemann, T.; Seßler, K.; Haug, J.; Pawelczyk, M.; Kasneci, G. Deep neural networks and tabular data: A survey. *IEEE Transactions on Neural Networks and Learning Systems* **2022**,
- (43) Lundberg, S. M.; Lee, S.-I. A Unified Approach to Interpreting Model Predictions. *Advances in Neural Information Processing Systems*. 2017.
- (44) Ribeiro, M. T.; Singh, S.; Guestrin, C. "Why Should I Trust You?": Explaining the Predictions of Any Classifier. Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining. New York, NY, USA, 2016; p 1135–1144.
- (45) Rodríguez-Pérez, R.; Bajorath, J. Interpretation of Compound Activity Predictions from Complex Machine Learning Models Using Local Approximations and Shapley Values. *Journal of Medicinal Chemistry* **2020**, *63*, 8761–8777, PMID: 31512867.
- (46) Alsuradi, H.; Park, W.; Eid, M. Explainable classification of EEG data for an active touch task using Shapley values. International Conference on Human-Computer Interaction. 2020; pp 406–416.
- (47) Gandhi, H. A.; White, A. D. Explaining molecular properties with natural language. **2022**,
- (48) Gao, Y.; Xiong, Y.; Gao, X.; Jia, K.; Pan, J.; Bi, Y.; Dai, Y.; Sun, J.; Wang, H. Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997* **2023**,
- (49) Sawarkar, K.; Mangal, A.; Solanki, S. R. Blended RAG: Improving RAG (Retriever-Augmented Generation) Accuracy with Semantic Search and Hybrid Query-Based Retriever. *arXiv preprint arXiv:2404.07220* **2024**,
- (50) Xu, W.; Agrawal, S.; Briakou, E.; Martindale, M. J.; Carpuat, M. Understanding and detecting hallucinations in neural machine translation via model introspection. *Transactions of the Association for Computational Linguistics* **2023**, *11*, 546–564.

- (51) Wei, J.; Wang, X.; Schuurmans, D.; Bosma, M.; Xia, F.; Chi, E.; Le, Q. V.; Zhou, D.; others Chain-of-thought prompting elicits reasoning in large language models. *Advances in Neural Information Processing Systems* **2022**, *35*, 24824–24837.
- (52) Hall, J. N.; Bollini, P. Structure, characterization, and catalytic properties of open-metal sites in metal organic frameworks. *Reaction Chemistry & Engineering* **2019**, *4*, 207–222.
- (53) Ding, M.; Flaig, R. W.; Jiang, H.-L.; Yaghi, O. M. Carbon capture and conversion using metal–organic frameworks and MOF-based materials. *Chem. Soc. Rev.* **2019**, *48*, 2783–2828.
- (54) Schoedel, A.; Ji, Z.; Yaghi, O. M. The role of metal–organic frameworks in a carbon-neutral energy cycle. *Nature Energy* **2016**, *1*, 1–13.
- (55) Wang, S.; Wang, X. Imidazolium ionic liquids, imidazolylidene heterocyclic carbenes, and zeolitic imidazolate frameworks for CO₂ capture and photochemical reduction. *Angewandte Chemie International Edition* **2016**, *55*, 2308–2320.
- (56) Lee, J.; Farha, O. K.; Roberts, J.; Scheidt, K. A.; Nguyen, S. T.; Hupp, J. T. Metal–organic framework materials as catalysts. *Chemical Society Reviews* **2009**, *38*, 1450–1459.
- (57) Yang, D.; Gates, B. C. Catalysis by metal organic frameworks: perspective and suggestions for future research. *Acs Catalysis* **2019**, *9*, 1779–1798.
- (58) Horcajada, P.; Serre, C.; Maurin, G.; Ramsahye, N. A.; Balas, F.; Vallet-Regí, M.; Sebban, M.; Taulelle, F.; Férey, G. Flexible porous metal-organic frameworks for a controlled drug delivery. *Journal of the American Chemical Society* **2008**, *130*, 6774–6780.
- (59) Horcajada, P.; Gref, R.; Baati, T.; Allan, P. K.; Maurin, G.; Couvreur, P.; Férey, G.; Morris, R. E.; Serre, C. Metal–organic frameworks in biomedicine. *Chemical reviews* **2012**, *112*, 1232–1268.
- (60) Hung, T.-H.; Lyu, Q.; Lin, L.-C.; Kang, D.-Y. Transport-Relevant Pore Limiting Diameter for Molecular Separations in Metal–Organic Framework Membranes. *The Journal of Physical Chemistry C* **2021**, *125*, 20416–20425.

- (61) Chung, Y. G.; Haldoupis, E.; Bucior, B. J.; Haranczyk, M.; Lee, S.; Zhang, H.; Vogiatzis, K. D.; Milisavljevic, M.; Ling, S.; Camp, J. S.; others Advances, updates, and analytics for the computation-ready, experimental metal–organic framework database: CoRE MOF 2019. *Journal of Chemical & Engineering Data* **2019**, *64*, 5985–5998.
- (62) Tawfik, S. A.; Russo, S. P. Naturally-meaningful and efficient descriptors: machine learning of material properties based on robust one-shot ab initio descriptors. *Journal of Cheminformatics* **2022**, *14*, 1–11.
- (63) Cai, M.; Loague, Q.; Morris, A. J. Design rules for efficient charge transfer in metal–organic framework films: the pore size effect. *The journal of physical chemistry letters* **2020**, *11*, 702–709.
- (64) Haldoupis, E.; Nair, S.; Sholl, D. S. Efficient calculation of diffusion limitations in metal organic framework materials: a tool for identifying materials for kinetic separations. *Journal of the American Chemical Society* **2010**, *132*, 7528–7539.
- (65) Huang, R.; Xia, M.; Nguyen, D.-T.; Zhao, T.; Sakamuru, S.; Zhao, J.; Shahane, S. A.; Rossoshek, A.; Simeonov, A. Tox21Challenge to build predictive models of nuclear receptor and stress response pathways as mediated by exposure to environmental chemicals and drugs. *Frontiers in Environmental Science* **2016**, *3*, 85.
- (66) Durant, J. L.; Leland, B. A.; Henry, D. R.; Nourse, J. G. Reoptimization of MDL keys for use in drug discovery. *Journal of chemical information and computer sciences* **2002**, *42*, 1273–1280.
- (67) Landrum, G. RDKit: open-source cheminformatics <http://www.rdkit.org>. *Google Scholar There is no corresponding record for this reference* **2016**, *3*.
- (68) Sharma, B.; Chenthamarakshan, V.; Dhurandhar, A.; Pereira, S.; Hendler, J. A.; Dordick, J. S.; Das, P. Accurate clinical toxicity prediction using multi-task deep neural nets and contrastive molecular explanations. *Scientific Reports* **2023**, *13*, 4908.
- (69) Meanwell, N. A. The influence of bioisosteres in drug design: tactical applications to address developability problems. *Tactics in Contemporary Drug Design* **2015**, 283–381.

- (70) Limban, C.; Nuță, D. C.; Chiriță, C.; Negres, S.; Arsene, A. L.; Goumenou, M.; Karakitsios, S. P.; Tsatsakis, A. M.; Sarigiannis, D. A. The use of structural alerts to avoid the toxicity of pharmaceuticals. *Toxicology reports* **2018**, *5*, 943–953.
- (71) Peterson, D. L.; Yalkowsky, S. H. Comparison of two methods for predicting aqueous solubility. *Journal of chemical information and computer sciences* **2001**, *41*, 1531–1534.
- (72) Sorkun, M. C.; Khetan, A.; Er, S. AqSolDB, a curated reference set of aqueous solubility and 2D descriptors for a diverse set of compounds. *Scientific data* **2019**, *6*, 143.
- (73) Walker, M. A. Improvement in aqueous solubility achieved via small molecular changes. *Bioorganic & medicinal chemistry letters* **2017**, *27*, 5100–5108.
- (74) Ishikawa, M.; Hashimoto, Y. Improvement in aqueous solubility in small molecule drug discovery programs by disruption of molecular planarity and symmetry. *Journal of medicinal chemistry* **2011**, *54*, 1539–1554.
- (75) Yuan, S.; Jiao, Z.; Quddus, N.; Kwon, J. S.-I.; Mashuga, C. V. Developing quantitative structure–property relationship models to predict the upper flammability limit using machine learning. *Industrial & Engineering Chemistry Research* **2019**, *58*, 3531–3537.
- (76) Mannan, S. *Lees' Loss Prevention in the Process Industries (Fourth Edition)*, fourth edition ed.; Butterworth-Heinemann: Oxford, 2012; pp 204–283.
- (77) Vidal, M.; Rogers, W.; Holste, J.; Mannan, M. A review of estimation methods for flash points and flammability limits. *Process safety progress* **2004**, *23*, 47–55.
- (78) Gharagheizi, F. Prediction of upper flammability limit percent of pure compounds from their molecular structures. *Journal of Hazardous Materials* **2009**, *167*, 507–510.
- (79) Pan, Y.; Jiang, J.; Wang, R.; Cao, H.; Cui, Y. Prediction of the upper flammability limits of organic compounds from molecular structures. *Industrial & engineering chemistry research* **2009**, *48*, 5064–5069.

- (80) Crowl, D. A.; Louvar, J. F. *Chemical process safety: fundamentals with applications*; Pearson Education, 2001.
- (81) Lin, C.-Y. Rouge: A package for automatic evaluation of summaries. Text summarization branches out. 2004; pp 74–81.
- (82) Touvron, H.; Martin, L.; Stone, K.; Albert, P.; Almahairi, A.; Babaei, Y.; Bashlykov, N.; Batra, S.; Bhargava, P.; Bhosale, S.; others Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288* 2023,
- (83) AI, M. Mixtral of Experts. 2023; <https://mistral.ai/news/mixtral-of-experts/>.
- (84) Microsoft Microsoft Phi-2. 2023; <https://ai.azure.com/explore/models/microsoft-phi-2/version/4/registry/azureml-msr?reloadCount=1>.
- (85) Zhu, B.; Frick, E.; Wu, T.; Zhu, H.; Jiao, J. Starling-7B: Improving LLM Helpfulness & Harmlessness with RLAIF. 2023.