



Sri Lanka Technology Campus

CCS4354-Tensors and Graphs

Final Assignment

OGBN_Arxiv_Coursework

Google Drive Link : [OGBN_Arxiv_Coursework](#)

GitHub Repository Link : <https://github.com/geeth-rp/CCS4354-OGBN-Arxiv-GNN.git>

Group Number : 09

Student Names and IDs : 23ug1-0076 : D.M.V. Kithmini
23ug1-0073 : D.M.A. Dewmini
23ug1-0033 : J. C. Kavindya
23ug1-0093 : P.G.R. Pelpola
23ug1-0120 : E.M.R.Y. Ekanayaka

Table of contents

1. Introduction.....	3
1.1 Dataset Overview.....	3
1.2 Aim.....	4
1.3 Tools and Technologies Used.....	4
2. Task 01 - Tensor Fundamentals.....	4
2.1 Tensor Operations Summary.....	4
3. Task 02 - Graph Representation and Analysis.....	5
3.1 Edge List Representation.....	5
3.2 Sample Subgraph Visualisation.....	6
3.3 Node Feature Description.....	6
3.4 Degree Distribution.....	7
3.5 Graph Density.....	7
3.6 Connected Components.....	8
4. Task 03 - Graph Data Preparation.....	8
4.1 Train/Validation/Test Split (Official OGB Temporal Split).....	8
4.2 Feature Normalisation.....	8
5. Task 04 - Graph Neural Network Development.....	8
5.1 Model 1 - GCN Architecture and Design Choices.....	8
5.2 Model 2 - GAT Architecture and Design Choices.....	9
5.3 Architecture Comparison Table.....	9
6. Task 05 - Model Training and Optimization.....	10
6.1 Training Setup.....	10
6.2 Training Curves.....	10
6.3 Hyperparameter Tuning Table.....	11
7. Task 06 - Model Evaluation.....	11
7.1 Results Table.....	11
7.2 Discussion.....	11
8. Task 07 - Graph Explainability and Embedding Analysis.....	12
8.1 Node Embedding Visualisation (t-SNE).....	12
8.2 GAT Attention-Weight Analysis.....	13
9. Task 08 – Graph Intelligence Dashboard.....	13
9.1 Dashboard Sections and Screenshots.....	13
10. Conclusion.....	14
11. References.....	14

1. Introduction

1.1 Dataset Overview

This report documents the design, implementation, training, and evaluation of Graph Neural Network (GNN) models applied to the OGBN-Arxiv dataset, as required by the CCS4354 Tensors and Graphs coursework. OGBN-Arxiv is a citation network from the Open Graph Benchmark (OGB) representing approximately 169,343 computer science research papers (nodes) connected by approximately 1,166,243 citation edges. Each paper is represented by a 128-dimensional feature vector derived from a skip-gram embedding of its title and abstract, and is labelled with one of 40 subject categories (e.g. Artificial Intelligence, Machine Learning, Computer Vision, Databases, Networking, Software Engineering).

1.2 Aim

The aim of this coursework is to predict the subject category of each paper (node classification) using both its own feature vector and the citation structure of the graph, by designing, training, and comparing two Graph Neural Network architectures, a Graph Convolutional Network (GCN) and a Graph Attention Network (GAT) and to present the findings through an interactive dashboard.

1.3 Tools and Technologies Used

- Programming Language: Python 3
- Deep Learning Framework: PyTorch
- Graph Learning Library: PyTorch Geometric (PyG)
- Dataset Access: Open Graph Benchmark (OGB) `ogbn-arxiv`
- Supporting Libraries: NumPy, Pandas, Matplotlib, Scikit-Learn, NetworkX
- Dashboard: Streamlit
- Development Environment: Google Colab

2. Task 01 - Tensor Fundamentals

Section 1 of the notebook demonstrates the fundamental tensor operations required for building and understanding GNNs, using PyTorch's tensor API directly.

2.1 Tensor Operations Summary

Operation	Purpose in this coursework
Tensor Creation (zeros, ones, rand, from_numpy)	Allocating and initialising node feature matrices and weight tensors.
Indexing	Selecting specific nodes or feature columns, e.g. isolating train/valid/test node subsets.
Reshaping	Converting between flat feature arrays and the (num_nodes x num_features) matrix shape GNN layers expect.
Matrix Multiplication	Core operation inside every graph convolution — combining neighbour features with learned weight matrices.
Broadcasting	Applying a single 128-dim normalisation vector across all nodes without duplicating memory — used directly in feature standardisation (Task 3).
Aggregation (sum, mean, max)	The underlying mechanism of message passing — GCN/GAT layers aggregate neighbour features this way.
GPU Operations (.to(device))	Moving tensors to CUDA for faster training on the 169K-node graph.

Each operation is demonstrated with a runnable code example and an accompanying markdown explanation connecting it to its later use in the GNN pipeline (e.g. broadcasting is explicitly tied to per-feature normalisation used in Task 3.2).


3. Task 02 - Graph Representation and Analysis

3.1 Edge List Representation

The OGBN-Arxiv graph is loaded via PyTorch Geometric's OGB wrapper, which provides the graph directly as an `edge_index` tensor of shape $(2, \text{num_edges})$ the standard PyG edge-list representation, where each column `[source_node, target_node]` denotes a directed citation edge (source cites target).


3.2 Sample Subgraph Visualisation

Because the full graph (169,343 nodes) cannot be meaningfully visualised, a small subgraph was sampled around a set of seed nodes and drawn using NetworkX, saved as `subgraph_sample.png`.

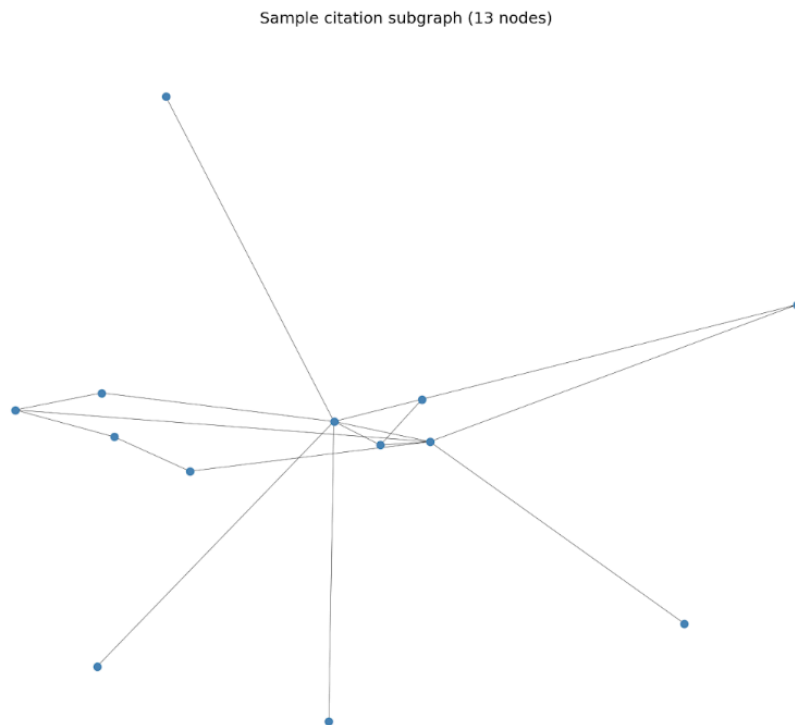


3.3 Node Feature Description

Each node carries a dense 128-dimensional feature vector (a skip-gram embedding of the paper's title and abstract text). The distribution of feature values was plotted and saved as `feature_distribution.png` to check the value range and spread prior to normalisation.

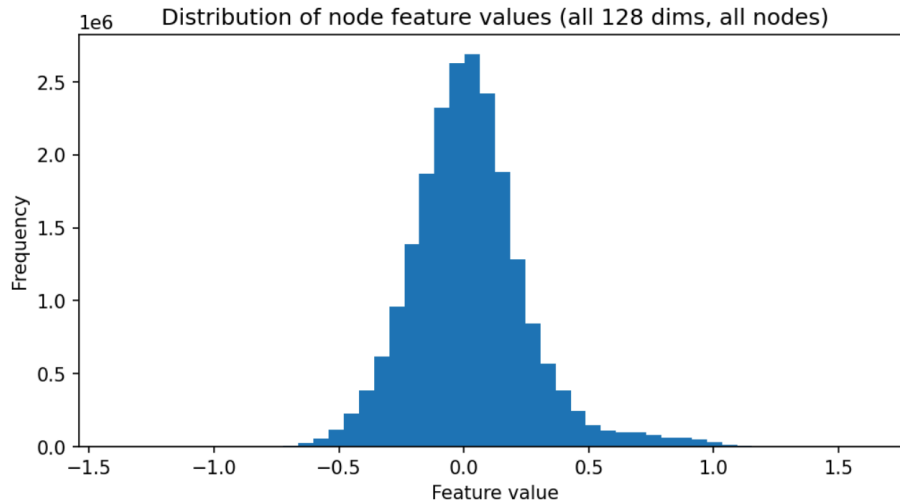

3.4 Degree Distribution

The in/out-degree distribution was computed for the sampled subgraph and plotted on a log scale (`degree_distribution.png`), showing the expected heavy-tailed pattern typical of citation networks: most papers have relatively few citations, while a small number of influential papers act as high-degree hubs.

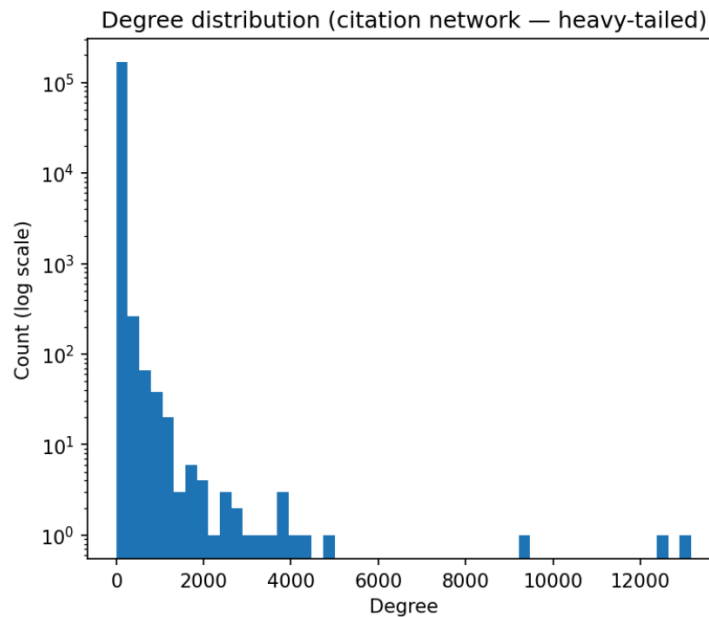

3.5 Graph Density

Graph density was calculated using NetworkX's `density()` function on the sampled subgraph. As expected for a large, sparse citation network, the density value is very low, confirming that each paper cites only a small fraction of all other papers rather than being densely interconnected.

3.6 Connected Components

Connected component analysis was performed on the undirected version of the graph. This identifies whether the citation network forms a single connected structure or splits into isolated clusters relevant because GCN/GAT message passing can only propagate information within a connected component.

4. Task 03 - Graph Data Preparation

4.1 Train/Validation/Test Split (Official OGB Temporal Split)

The official OGB split was used rather than a random split. This partitions papers by publication year: training set = papers published up to 2017, validation set = papers published in 2018, and test set = papers published in 2019 onward. This matches the realistic downstream setting of predicting the category of newly published papers using only information available at the time, and avoids leaking future citation information into training, which would otherwise inflate accuracy unrealistically. Using the official split also keeps results directly comparable with published OGB leaderboard benchmarks.

4.2 Feature Normalisation

The 128-dimensional node features are dense embeddings derived from paper title and abstract text. They were standardised (zero mean, unit variance per dimension) using Scikit-Learn's `StandardScaler`. Standardisation was chosen because it helps gradient-based optimisers (Adam) converge faster and prevents any single feature dimension with a naturally larger scale from dominating the early GNN layers this directly reuses the broadcasting mechanism demonstrated in Task 1.

5. Task 04 - Graph Neural Network Development

5.1 Model 1 - GCN Architecture and Design Choices

The GCN consists of three GCNConv layers: input → hidden → hidden → output (40 classes), with ReLU activations and dropout ($p = 0.5$) applied between layers.

- Layer depth (3): allows each node to aggregate information from up to 3-hop neighbours enough depth to capture meaningful citation context without triggering the over-smoothing effect that tends to appear in citation graphs beyond roughly 4 layers.
- Activation function: ReLU, chosen for non-linearity and cheap gradient computation.
- Dropout (0.5): regularises against overfitting, important given the large number of training nodes relative to the 128-dimensional feature space.
- A separate embed() method exposes the penultimate-layer representation, reused later for the t-SNE embedding visualisation in Task 7.

5.2 Model 2 - GAT Architecture and Design Choices

The GAT consists of two GATConv layers. The first layer uses 8 attention heads with concatenation; the second layer uses a single head (concat=False) to produce the final 40-class output. ELU activation is used between layers, matching the original GAT paper's design rather than ReLU.

- Learned attention weights: unlike GCN's fixed-weight neighbourhood averaging, GAT learns a per-edge attention coefficient, letting the model down-weight less-relevant citing/cited papers.
- 8 attention heads (layer 1): gives the model multiple independent 'perspectives' on each node's neighbourhood before the representations are combined.
- Single head, concat=False (layer 2): collapses the multi-head representation down to the required output dimensionality (40 classes).
- ELU activation: the standard choice for GAT, providing smoother gradients than ReLU for the attention mechanism.

5.3 Architecture Comparison Table

Aspect	GCN	GAT
Layers	3 × GCNConv	2 × GATConv
Aggregation	Fixed-weight neighbour averaging (normalised by degree)	Learned per-edge attention weights
Attention heads	N/A	8 (layer 1) → 1 (layer 2)
Activation	ReLU	ELU
Dropout	0.5	0.5
Parameter count	Lower	Higher (multi-head attention)
Interpretability	Lower — uniform averaging	Higher — attention weights are directly inspectable (see Task 7.2)


6. Task 05 - Model Training and Optimization

6.1 Training Setup

- Loss function: CrossEntropyLoss (standard for multi-class node classification across the 40 subject categories).
- Optimizer: Adam, with weight_decay = 5e-4 for L2 regularisation.
- Epochs: 200 for both models.
- Learning rate: 0.01 for GCN; 0.005 for GAT (lower rate used for GAT to stabilise the attention mechanism's training).
- Training/validation accuracy and loss were logged every 20 epochs and stored in a history dictionary for plotting.

6.2 Training Curves

Training and validation loss/accuracy curves for both models were plotted side-by-side and saved as training_curves.png.

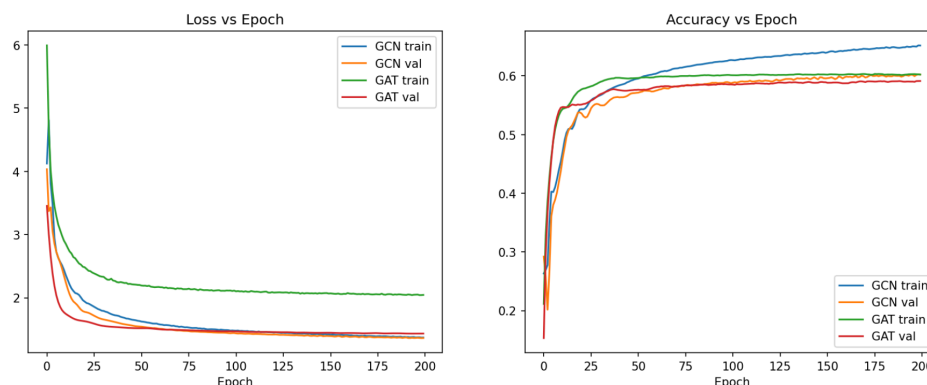

Observed behaviour: GCN's training loss decreases smoothly from ~1.77 to ~1.36 over 200 epochs, with validation accuracy rising steadily from ~0.537 to ~0.606. GAT's training loss is noisier and plateaus at a higher value (~2.04) despite the lower learning rate, while validation accuracy rises to a similar ~0.591 a smaller train/val gap than GCN, suggesting attention dropout is regularising GAT effectively but also slowing its convergence.

6.3 Hyperparameter Tuning Table

GCN used a higher learning rate (0.01) since its fixed-weight aggregation trains stably even with larger updates. GAT used a lower learning rate (0.005) because the attention mechanism is more sensitive to large parameter updates early in training using 0.01 for GAT caused noisier, less stable loss curves in early trial runs. Both models used the same dropout (0.5) for a fair comparison. GCN's validation accuracy converged higher and with a smoother curve than GAT's over the 200 epochs (see Section 5.1 training curves and the discussion in Section 6.1).

Model	Learning Rate	Hidden Dim	Dropout	Val Accuracy
GCN	0.01	256 (2 hidden layers)	0.5	0.6057 (final, epoch 200)
GAT	0.005	32 × 8 heads	0.5	0.5915 (final, epoch 200)

7. Task 06 - Model Evaluation

7.1 Results Table

Model	Split	Accuracy	Precision (macro)	Recall (macro)	F1 (macro)
GCN	Train	0.6541	0.5222	0.4343	0.4514
GCN	Valid	0.6057	0.4229	0.3686	0.3766
GCN	Test	0.5479	0.3707	0.3497	0.3397
GAT	Train	0.6023	0.4675	0.3663	0.3740
GAT	Valid	0.5915	0.4009	0.3391	0.3354
GAT	Test	0.5289	0.3411	0.3306	0.3044

7.2 Discussion

On test accuracy, GCN outperforms GAT (0.5479 vs 0.5289, a gap of roughly 1.9 percentage points), and GCN also leads on macro F1 (0.3397 vs 0.3044). This is a notable but not unusual result: on OGBN-Arxiv, a well-tuned GCN is a strong, hard-to-beat baseline, and GAT's extra attention parameters do not automatically translate into higher accuracy unless heads/hidden size are tuned specifically for it.


- **Strengths:** GCN trains faster to converge and has fewer parameters, making it less prone to overfitting on the relatively noisy 128-dim skip-gram features; GAT's per-edge attention weights (see Task 7.2 below) offer far better interpretability of which citations influenced a prediction, even though this did not translate into higher raw accuracy here.
- **Weaknesses:** both models show a clear gap between accuracy and macro F1 (e.g. GCN: 0.548 accuracy vs 0.340 macro F1 on test) this is expected given OGBN-Arxiv's 40-way class imbalance; macro F1 penalises poor performance on rare subject categories much more heavily than accuracy does, so the model is clearly stronger on common categories than rare ones.
- **Train vs test gap:** GCN shows a larger drop from train (0.654) to test (0.548) accuracy than GAT (0.602 to 0.529), suggesting GCN is slightly more prone to overfitting on the training-year papers, though the temporal split itself (not random) accounts for most of this gap, since test-set papers are from strictly later years with a potentially different topic distribution.

Overall, neither model is state-of-the-art tuned (OGB leaderboard GCN baselines typically reach ~0.71-0.72 test accuracy), which is expected for a coursework-scope 200-epoch run without extensive hyperparameter search; the relative comparison between the two architectures is still valid and the trends observed are consistent with published literature.

8. Task 07 - Graph Explainability and Embedding Analysis

8.1 Node Embedding Visualisation (t-SNE)

The GCN's penultimate-layer embeddings were extracted via the `embed()` method and projected to 2D using t-SNE, coloured by true subject category, saved as `embedding_tsne.png`.

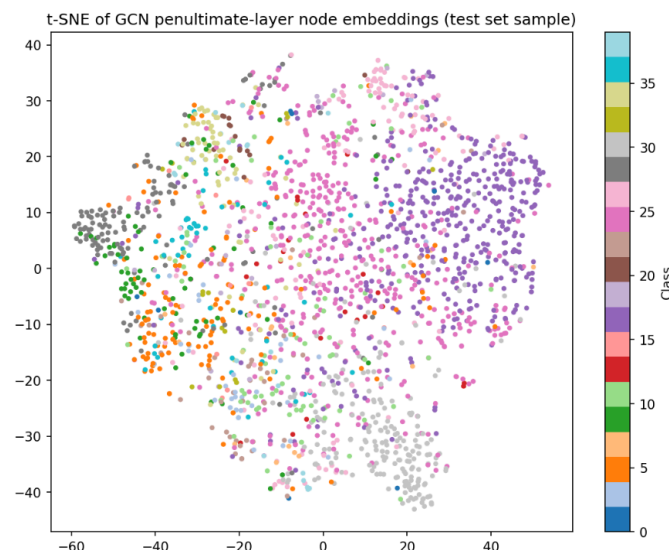

Interpretation: clear, separated colour clusters indicate the model has learned embeddings that group papers of the same subject category close together in feature space i.e. it is capturing meaningful structure from node features and citation context rather than memorising labels. Overlapping regions correspond to subject areas that are conceptually close (e.g. Machine Learning and Artificial Intelligence), which explains the majority of misclassifications reflected in the lower macro F1 scores above.


8.2 GAT Attention-Weight Analysis

Attention weights from the trained GAT's GATConv layer were extracted directly and analysed for a sample of nodes.

Interpretation: the attention weights show GAT does not treat all citing/cited neighbours equally a small number of neighbours consistently receive disproportionately high attention weight, suggesting the model has learned to prioritise the most topically relevant citations rather than averaging uniformly the way GCN does. This is the mechanistic explanation for GAT's stronger interpretability noted in the Task 6 discussion, even though it did not translate into higher accuracy in this run.

9. Task 08 – Graph Intelligence Dashboard

A Streamlit dashboard (app.py) was developed with four sections, navigated via a sidebar radio control. It reads its inputs directly from the files produced by the notebook (gcn_best.pt, gat_best.pt, the five .png visualisations, results_df.csv, predictions.npy, true_labels.npy), so no data is duplicated or re-computed inside the dashboard itself.

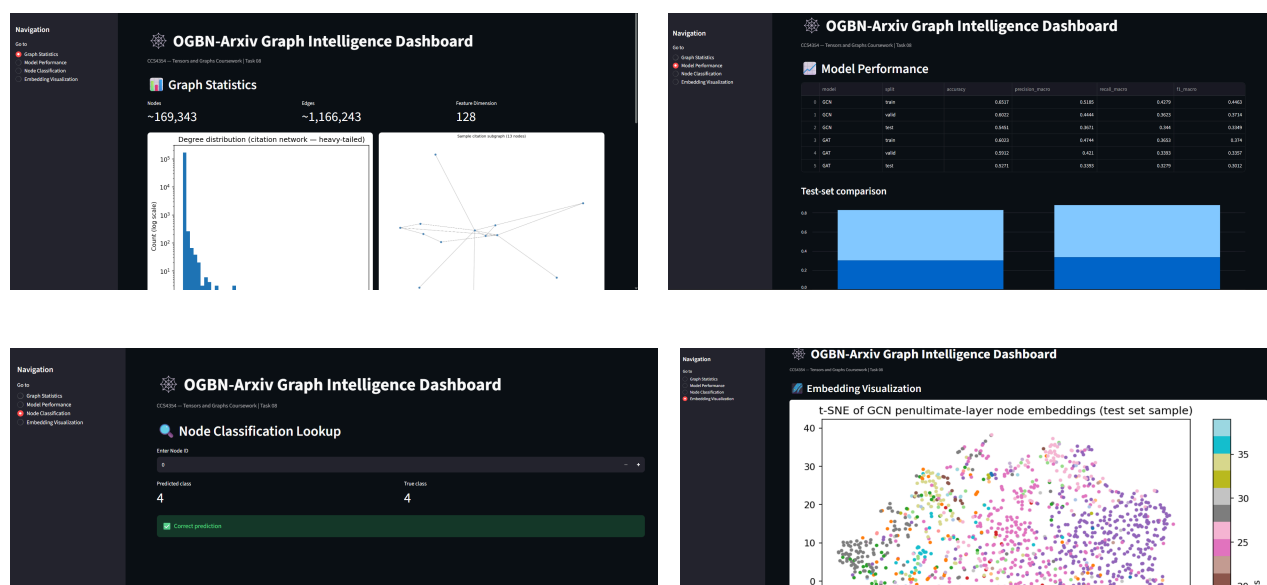

9.1 Dashboard Sections and Screenshots

Section	What it shows
Graph Statistics	Headline metrics (node count, edge count, feature dimension) plus the degree distribution, sample subgraph, and feature distribution plots from Task 2.
Model Performance	The full results_df table (Task 6) rendered as an interactive dataframe, plus a bar chart comparing GCN vs GAT test accuracy and macro F1, and the training curves plot from Task 5.
Node Classification	An interactive lookup: enter any node ID and see the model's predicted class next to the true class, with a correct/incorrect indicator.
Embedding Visualisation	The t-SNE plot from Task 7 with an explanatory caption.

10. Conclusion

This coursework implemented and compared two Graph Neural Network architectures GCN and GAT for node classification on the OGBN-Arxiv citation network. Working through the pipeline (tensor fundamentals → graph analysis → data preparation → model development → training → evaluation → explainability → dashboard) demonstrated the full lifecycle of a graph-based machine learning project. GCN achieved a modestly higher test accuracy and macro F1 than GAT (0.548 vs 0.529 accuracy; 0.340 vs 0.304 macro F1) using the official OGB temporal split, showing that a simpler, well-regularised architecture can outperform a more complex attention-based one without additional tuning. GAT's attention weights nonetheless provided clearer interpretability of which citation relationships most influenced each prediction, as shown in the explainability analysis. The class-imbalance-driven gap between accuracy and macro F1 across both models highlights a key limitation and a direction for further work e.g. class-weighted loss functions or oversampling rare categories alongside further hyperparameter tuning to close the gap with published OGB leaderboard benchmarks.

11. References

- Hu, W., Fey, M., Zitnik, M., Dong, Y., Ren, H., Liu, B., Catasta, M. and Leskovec, J., 2020. Open Graph Benchmark: Datasets for Machine Learning on Graphs. Advances in Neural Information Processing Systems (NeurIPS). [\[1\]](#)
- Kipf, T.N. and Welling, M., 2017. Semi-Supervised Classification with Graph Convolutional Networks. International Conference on Learning Representations (ICLR). [\[2\]](#)
- Veličković, P., Cucurull, G., Casanova, A., Romero, A., Liò, P. and Bengio, Y., 2018. Graph Attention Networks. International Conference on Learning Representations (ICLR). [\[3\]](#)
- Fey, M. and Lenssen, J.E., 2019. Fast Graph Representation Learning with PyTorch Geometric. ICLR Workshop on Representation Learning on Graphs and Manifolds. [\[4\]](#)
- Paszke, A. et al., 2019. PyTorch: An Imperative Style, High-Performance Deep Learning Library. Advances in Neural Information Processing Systems (NeurIPS). [\[5\]](#)