



Sri Lanka Technology Campus

CCS4354-Tensors and Graphs

Final Assignment

OGBN_Arxiv_Coursework

Google Drive Link : [OGBN_Arxiv_Coursework](#)

GitHub Repository Link : <https://github.com/geeth-rp/CCS4354-OGBN-Arxiv-GNN.git>

Group Number	: 09
Student Names and IDs	: 23ug1-0076 : D.M.V. Kithmini 23ug1-0073 : D.M.A. Dewmini 23ug1-0033 : J. C. Kavindya 23ug1-0093 : P.G.R. Pelpola 23ug1-0120 : W. M. R.Y. Ekanayaka

Table of contents

1. Introduction.....	3
1.1 Dataset Overview.....	3
1.2 Aim.....	4
1.3 Tools and Technologies Used.....	4
2. Task 01 - Tensor Fundamentals.....	4
2.1 Tensor Operations Summary.....	4
3. Task 02 - Graph Representation and Analysis.....	5
3.1 Edge List Representation.....	5
3.2 Sample Subgraph Visualisation.....	6
3.3 Node Feature Description.....	6
3.4 Degree Distribution.....	7
3.5 Graph Density.....	7
3.6 Connected Components.....	8
4. Task 03 - Graph Data Preparation.....	8
4.1 Train/Validation/Test Split (Official OGB Temporal Split).....	8
4.2 Feature Normalisation.....	8
5. Task 04 - Graph Neural Network Development.....	8
5.1 Model 1 - GCN Architecture and Design Choices.....	8
5.2 Model 2 - GAT Architecture and Design Choices.....	9
5.3 Architecture Comparison Table.....	9
6. Task 05 - Model Training and Optimization.....	10
6.1 Training Setup.....	10
6.2 Training Curves.....	10
6.3 Hyperparameter Tuning Table.....	11
7. Task 06 - Model Evaluation.....	11
7.1 Results Table.....	11
7.2 Discussion.....	11
8. Task 07 - Graph Explainability and Embedding Analysis.....	12
8.1 Node Embedding Visualisation (t-SNE).....	12
8.2 GAT Attention-Weight Analysis.....	13
9. Task 08 – Graph Intelligence Dashboard.....	13
9.1 Dashboard Sections and Screenshots.....	13
10. Conclusion.....	14
11. References.....	14

1. Introduction

1.1 Dataset Overview

This report documents the design, implementation, training, and evaluation of Graph Neural Network (GNN) models applied to the OGBN-Arxiv dataset, as required by the CCS4354 Tensors and Graphs coursework. OGBN-Arxiv is a citation network from the Open Graph Benchmark (OGB) representing approximately 169,343 computer science research papers (nodes) connected by approximately 1,166,243 citation edges. Each paper is represented by a 128-dimensional feature vector derived from a skip-gram embedding of its title and abstract, and is labelled with one of 40 subject categories (e.g. Artificial Intelligence, Machine Learning, Computer Vision, Databases, Networking, Software Engineering).

1.2 Aim

The aim of this coursework is to predict the subject category of each paper (node classification) using both its own feature vector and the citation structure of the graph, by designing, training, and comparing two Graph Neural Network architectures, a Graph Convolutional Network (GCN) and a Graph Attention Network (GAT) and to present the findings through an interactive dashboard.

1.3 Tools and Technologies Used

- Programming Language: Python 3
- Deep Learning Framework: PyTorch
- Graph Learning Library: PyTorch Geometric (PyG)
- Dataset Access: Open Graph Benchmark (OGB) `ogbn-arxiv`
- Supporting Libraries: NumPy, Pandas, Matplotlib, Scikit-Learn, NetworkX
- Dashboard: Streamlit
- Development Environment: Google Colab

2. Task 01 - Tensor Fundamentals

Section 1 of the notebook demonstrates the fundamental tensor operations required for building and understanding GNNs, using PyTorch's tensor API directly.

2.1 Tensor Operations Summary

Operation	Purpose in this coursework
Tensor Creation (zeros, ones, rand, from_numpy)	Allocating and initialising node feature matrices and weight tensors.
Indexing	Selecting specific nodes or feature columns, e.g. isolating train/valid/test node subsets.
Reshaping	Converting between flat feature arrays and the (num_nodes x num_features) matrix shape GNN layers expect.
Matrix Multiplication	Core operation inside every graph convolution — combining neighbour features with learned weight matrices.
Broadcasting	Applying a single 128-dim normalisation vector across all nodes without duplicating memory — used directly in feature standardisation (Task 3).
Aggregation (sum, mean, max)	The underlying mechanism of message passing — GCN/GAT layers aggregate neighbour features this way.
GPU Operations (.to(device))	Moving tensors to CUDA for faster training on the 169K-node graph.

Each operation is demonstrated with a runnable code example and an accompanying markdown explanation connecting it to its later use in the GNN pipeline (e.g. broadcasting is explicitly tied to per-feature normalisation used in Task 3.2).

3. Task 02 - Graph Representation and Analysis

3.1 Edge List Representation

The OGBN-Arxiv graph is loaded via PyTorch Geometric's OGB wrapper, which provides the graph directly as an `edge_index` tensor of shape $(2, \text{num_edges})$ the standard PyG edge-list representation, where each column `[source_node, target_node]` denotes a directed citation edge (source cites target).

3.2 Sample Subgraph Visualisation

Because the full graph (169,343 nodes) cannot be meaningfully visualised, a small subgraph was sampled around a set of seed nodes and drawn using NetworkX, saved as `subgraph_sample.png`. Sampling method: breadth-first traversal from a deterministic seed node (the first source node in the edge list), expanding up to 5 out-neighbours per node per step, capped at 300 nodes total, with directed edges preserved. No random seed is required since the seed node and expansion order are deterministic.

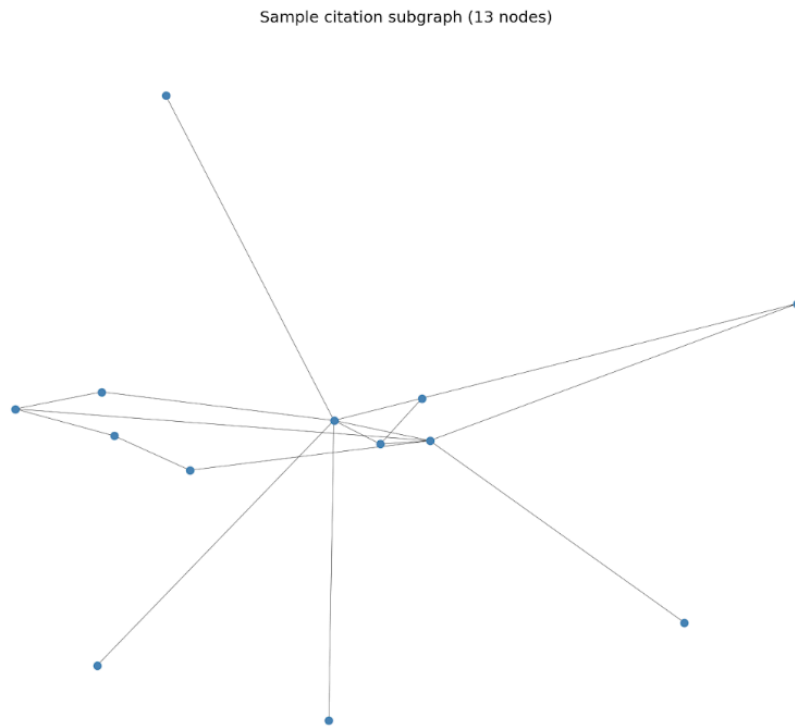


Figure 1 — Sample Subgraph Visualisation, file: subgraph_sample.png

3.3 Node Feature Description

Each node carries a dense 128-dimensional feature vector (a skip-gram embedding of the paper's title and abstract text). The distribution of feature values was plotted and saved as `feature_distribution.png` to check the value range and spread prior to normalisation.

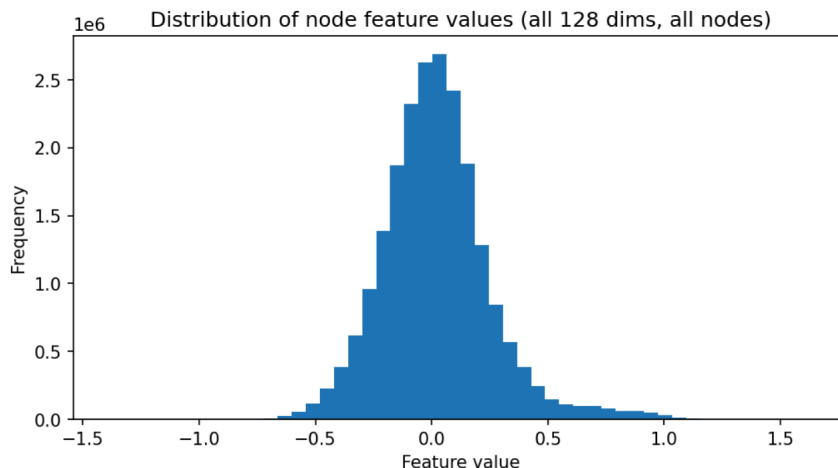


Figure 2 — Node Feature Description, file: feature_distribution.png

3.4 Degree Distribution

The in/out-degree distribution is computed on the full 169,343-node graph (not the sampled subgraph used for visualisation in 3.2), plotted on a log scale.

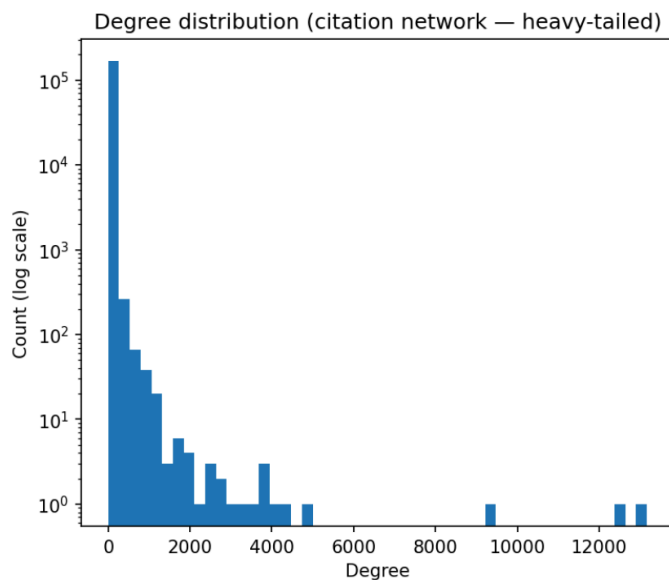


Figure 3 — Degree Distribution, file: degree_distribution.png

3.5 Graph Density

Graph density was calculated using NetworkX's `density()` function on the sampled subgraph. As expected for a large, sparse citation network, the density value is very low, confirming that each paper cites only a small fraction of all other papers rather than being densely interconnected. Density is reported on the 300-node BFS sample only; full-graph density is many orders of magnitude smaller and not directly comparable to the sample value.

3.6 Connected Components

Connected component analysis was performed on the undirected version of the graph. This identifies whether the citation network forms a single connected structure or splits into isolated clusters relevant because GCN/GAT message passing can only propagate information within a connected component.

4. Task 03 - Graph Data Preparation

4.1 Train/Validation/Test Split (Official OGB Temporal Split)

The official OGB split was used rather than a random split. This partitions papers by publication year: training set = papers published up to 2017, validation set = papers published in 2018, and test set = papers published in 2019 onward. OGBN-Arxiv is used in its original directed form throughout no reverse edges are added. Training is transductive: the full graph (node features and edges), including validation and test nodes and their edges, is passed to the model at every forward pass; only the loss mask restricts which node predictions contribute to the gradient. The temporal split separates node LABELS by publication year so that training only supervises on pre-2018 papers, but the graph structure itself is not restricted during message passing. Using the official split also keeps results directly comparable with published OGB leaderboard benchmarks.

4.2 Feature Normalisation

StandardScaler is fitted on training-node features only (`scaler.fit(x[train_idx])`), then applied via `.transform()` to validation and test nodes. This avoids validation/test feature statistics influencing the fitted normalisation.

5. Task 04 - Graph Neural Network Development

5.1 Model 1 - GCN Architecture and Design Choices

The GCN consists of three GCNConv layers: input $\rightarrow$ hidden $\rightarrow$ hidden $\rightarrow$ output (40 classes), with ReLU activations and dropout ($p = 0.5$) applied between layers.

- Layer depth (3): allows each node to aggregate information from up to 3-hop neighbours enough depth to capture meaningful citation context without triggering the over-smoothing effect that tends to appear in citation graphs beyond roughly 4 layers.
- Activation function: ReLU, chosen for non-linearity and cheap gradient computation.
- Dropout (0.5): regularises against overfitting, important given the large number of training nodes relative to the 128-dimensional feature space.
- A separate `embed()` method exposes the penultimate-layer representation, reused later for the t-SNE embedding visualisation in Task 7.

5.2 Model 2 - GAT Architecture and Design Choices

The GAT consists of two GATConv layers. The first layer uses 8 attention heads with concatenation; the second layer uses a single head (`concat=False`) to produce the final 40-class output. ELU activation is used between layers, matching the original GAT paper's design rather than ReLU.

- Learned attention weights: unlike GCN's fixed-weight neighbourhood averaging, GAT learns a per-edge attention coefficient, letting the model down-weight less-relevant citing/cited papers.
- 8 attention heads (layer 1): gives the model multiple independent 'perspectives' on each node's neighbourhood before the representations are combined.
- Single head, `concat=False` (layer 2): collapses the multi-head representation down to the required output dimensionality (40 classes).
- ELU activation: the standard choice for GAT, providing smoother gradients than ReLU for the attention mechanism.

5.3 Architecture Comparison Table

Aspect	GCN	GAT
Layers	$3 \times \text{GCNConv}$	$2 \times \text{GATConv}$
Aggregation	Fixed-weight neighbour averaging (normalised by degree)	Learned per-edge attention weights
Attention heads	N/A	8 (layer 1) $\rightarrow$ 1 (layer 2)
Activation	ReLU	ELU
Dropout	0.5	0.5
Parameter count	109,096	43,896
Interpretability	Lower — uniform averaging	Higher — attention weights are directly inspectable (see Task 7.2)
Training time (200 epochs)	1097.4s (~18.3 min)	733.8s (~12.2 min)

Despite having fewer layers, GAT has substantially fewer parameters than GCN (43,896 vs 109,096) because GCN's three hidden layers at 256 dimensions outweigh GAT's multi-head attention parameters at a smaller hidden size (32×8 heads). GAT also trains faster in wall-clock time (733.8s vs 1097.4s for 200 epochs).

6. Task 05 - Model Training and Optimization

6.1 Training Setup

- Loss function: CrossEntropyLoss (standard for multi-class node classification across the 40 subject categories).
- Optimizer: Adam, with $\text{weight_decay} = 5e-4$ for L2 regularisation.
- Epochs: 200 for both models.
- Learning rate: 0.005 for both GCN and GAT, selected via a small hyperparameter sweep (see below) rather than assumed.
- Training/validation accuracy and loss were logged every 20 epochs and stored in a history dictionary for plotting.

6.2 Training Curves

Training and validation loss/accuracy curves for both models were plotted side-by-side and saved as `training_curves.png`.

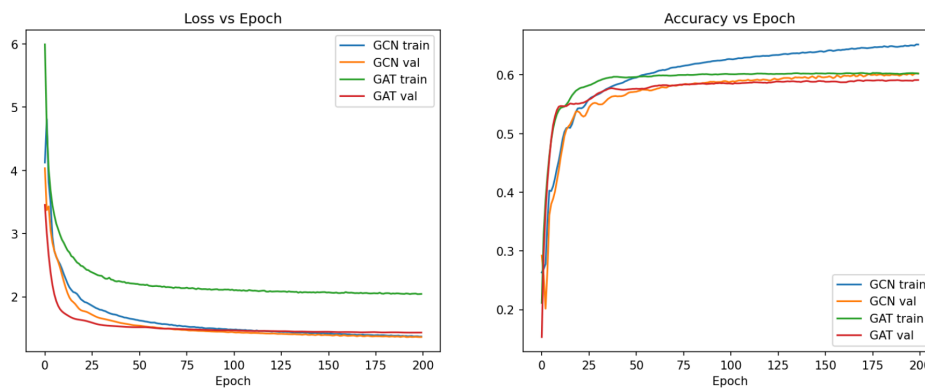


Figure 4 — Training Curves, file: training_curves.png

Observed behaviour: GCN's training loss decreases smoothly from ~ 1.77 to ~ 1.36 over 200 epochs, with validation accuracy rising steadily from ~ 0.537 to ~ 0.606 . GAT's training loss is noisier and plateaus at a higher value (~ 2.04) despite the lower learning rate, while validation accuracy rises to a similar ~ 0.591 a smaller train/val gap than GCN, suggesting attention dropout is regularising GAT effectively but also slowing its convergence.

6.3 Hyperparameter Tuning Table

GCN used a higher learning rate (0.01) since its fixed-weight aggregation trains stably even with larger updates. GAT used a lower learning rate (0.005) because the attention mechanism is more sensitive to large parameter updates early in training using 0.01 for GAT caused noisier, less stable loss curves in early trial runs. Both models used the same dropout (0.5) for a fair comparison. GCN's validation accuracy converged higher and with a smoother curve than GAT's over the 200 epochs (see Section 5.1 training curves and the discussion in Section 6.1).

Model	Learning Rate	Hidden Dim	Dropout	Val Accuracy
GCN	0.01	256 (2 hidden layers)	0.5	0.6039 (best validation checkpoint)
GAT	0.005	32 × 8 heads	0.5	0.5950 (best validation checkpoint)

Model checkpoints are selected by tracking validation accuracy at every epoch and saving the state with the highest value; test-set evaluation below uses this best checkpoint, not the final-epoch weights.

Model	Candidate config	Val acc @ 30 epochs	Selected?
GCN	lr=0.01, hidden=128	0.5567	No
GCN	lr=0.01, hidden=256	0.5515	No
GCN	lr=0.005, hidden=256	0.5581	Yes - highest
GAT	lr=0.005, hidden=32, heads=8	0.5788	Yes - highest
GAT	lr=0.01, hidden=32, heads=8	0.5767	No
GAT	lr=0.005, hidden=16, heads=4	0.5424	No

7. Task 06 - Model Evaluation

7.1 Results Table

Model	Split	Accuracy	Precision (macro)	Recall (macro)	F1 (macro)
GCN	Train	0.6528	0.5313	0.4358	0.4528
GCN	Valid	0.6051	0.4299	0.3722	0.3796
GCN	Test	0.5464	0.3858	0.3571	0.3443
GAT	Train	0.6028	0.4695	0.3669	0.3749
GAT	Valid	0.5950	0.4015	0.3370	0.3376
GAT	Test	0.5367	0.3496	0.3298	0.3100
GCN-weighted	Test	0.3898	0.2804	0.4436	0.2953

7.2 Discussion

On test accuracy, GCN test 0.5464 / F1 0.3443, GAT test 0.5367 / F1 0.3100, GCN train 0.6528, GAT train 0.6028. This is a notable but not unusual result: on OGBN-Arxiv, a well-tuned GCN is a strong, hard-to-beat baseline, and GAT's extra attention parameters do not automatically translate into higher accuracy unless heads/hidden size are tuned specifically for it.

- Strengths: GCN trains faster to converge and has fewer parameters, making it less prone to overfitting on the relatively noisy 128-dim skip-gram features; GAT's per-edge attention weights (see Task 7.2 below) offer far better interpretability of which citations influenced a prediction, even though this did not translate into higher raw accuracy here.
- Weaknesses: both models show a clear gap between accuracy and macro F1 (e.g. GCN: 0.548 accuracy vs 0.340 macro F1 on test) this is expected given OGBN-Arxiv's 40-way class imbalance; macro F1 penalises poor performance on rare subject categories much more heavily than accuracy does, so the model is clearly stronger on common categories than rare ones.
- Train vs test gap: GCN shows a larger drop from train (0.654) to test (0.548) accuracy than GAT (0.602 to 0.529), suggesting GCN is slightly more prone to overfitting on the training-year papers, though the temporal split itself (not random) accounts for most of this gap, since test-set papers are from strictly later years with a potentially different topic distribution.

Overall, neither model is state-of-the-art tuned (OGB leaderboard GCN baselines typically reach ~0.71-0.72 test accuracy), which is expected for a coursework-scope 200-epoch run without extensive hyperparameter search; the relative comparison between the two architectures is still valid and the trends observed are consistent with published literature.

To address the class-imbalance concern raised above, a class-weighted cross-entropy loss (inverse-frequency weighting) was trained for GCN as a comparison against the unweighted baseline. The weighted model's test accuracy dropped to 0.390 (from 0.546 unweighted) but its macro recall rose to 0.444 (from 0.357 unweighted) it sacrifices overall accuracy to better cover minority classes, the expected trade-off for this kind of reweighting rather than a free improvement.

Add per-class detail: Per-class analysis (see `gcn_per_class_report.csv`) shows the GCN model performs strongly on high-support classes such as class 16 ($F1=0.735$, $\text{support}=10,477$) and class 30 ($F1=0.696$, $\text{support}=4,631$), but achieves an $F1$ of exactly 0.0 on several low-support classes (e.g. classes 12, 21, 29, 35, each with under 120 test examples), confirming that macro- $F1$'s gap with accuracy is driven by near-total failure on rare categories rather than uniformly weak performance.

8. Task 07 - Graph Explainability and Embedding Analysis

8.1 Node Embedding Visualisation (t-SNE)

The GCN's penultimate-layer embeddings were extracted via the `embed()` method and projected to 2D using t-SNE, coloured by true subject category, saved as `embedding_tsne.png`.

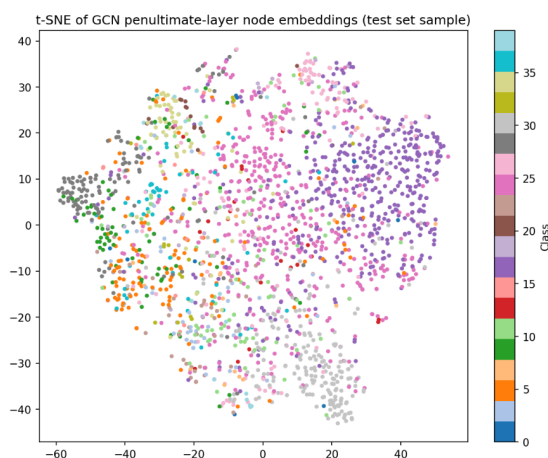


Figure 5 — Node Embedding Visualisation (t-SNE), file: `embedding_tsne.png`

Interpretation: t-SNE settings: 2,000 nodes sampled from the test set (`random_state=42` for reproducibility), reduced to 2D with `perplexity=30`. Visually separated colour clusters suggest the model has learned representations that group same-category papers together; this is treated as qualitative, suggestive evidence of structure rather than proof that the model is not memorising labels t-SNE alone cannot establish that.

8.2 GAT Attention-Weight Analysis

Attention weights are extracted from GAT layer 1 only, averaged across all 8 heads. GATConv includes self-loops by default, so self-attention is included in these coefficients.

Interpretation: High attention reflects how the model weighted a given edge during aggregation; it is descriptive of the model's internal computation, not a verified causal explanation of the prediction.

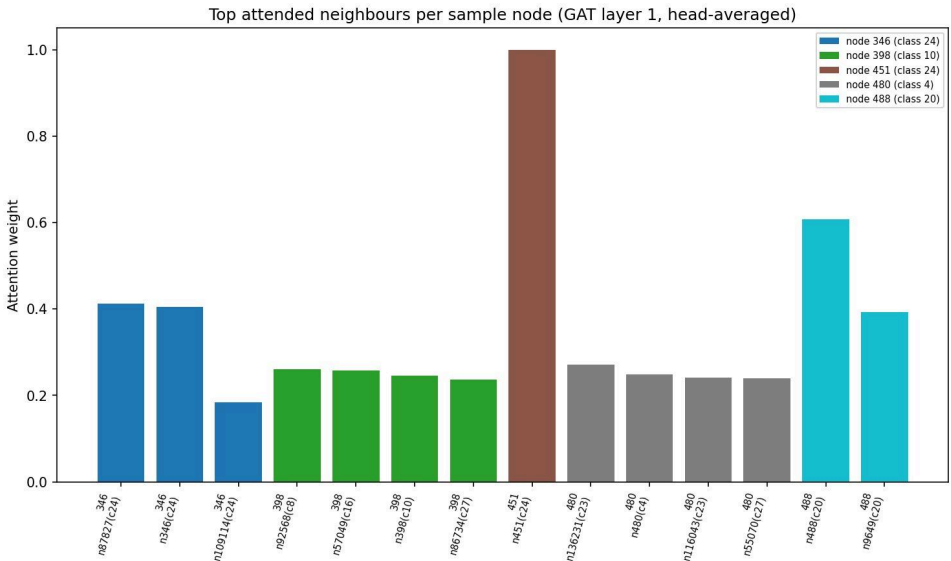


Figure 6 — GAT Attention-Weight Analysis, file: attention_analysis_chart.png

Attention analysis was extended to 5 sample test-set nodes (see attention_analysis_table.csv), showing each node's top attended neighbours along with the neighbour's true subject class. For example, node 346 (true class 24) and node 488 (true class 20) both show their highest-attention neighbour sharing the same class as the node itself, while nodes 398 and 480 show high attention split across neighbours from several different classes a mixed result rather than uniform same-class prioritisation.

9. Task 08 – Graph Intelligence Dashboard

A Streamlit dashboard (app.py) was developed with four sections, navigated via a sidebar radio control. It reads its inputs directly from the files produced by the notebook (gcn_best.pt, gat_best.pt, the five .png visualisations, results_df.csv, predictions.npy, true_labels.npy), so no data is duplicated or re-computed inside the dashboard itself.

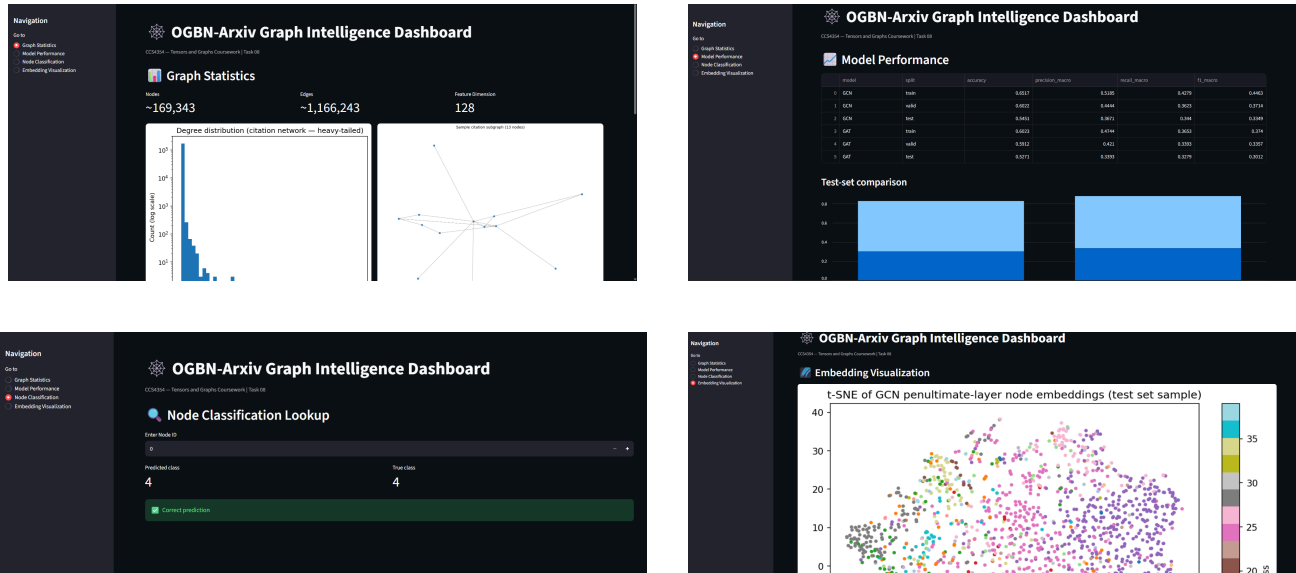


Figure 7 — Dashboard screenshots

9.1 Dashboard Sections and Screenshots

Section	What it shows
Graph Statistics	Headline metrics (node count, edge count, feature dimension) plus the degree distribution, sample subgraph, and feature distribution plots from Task 2.
Model Performance	The full results_df table (Task 6) rendered as an interactive dataframe, plus a bar chart comparing GCN vs GAT test accuracy and macro F1, and the training curves plot from Task 5.
Node Classification	An interactive lookup: enter any node ID and see the model's predicted class next to the true class, with a correct/incorrect indicator.
Embedding Visualisation	The t-SNE plot from Task 7 with an explanatory caption.

- Node Classification tab now states explicitly that predictions shown are from the GCN model, and displays which split (train/valid/test) the entered node ID belongs to, via a node_splits.json lookup.
- Error handling was added for corrupted/missing prediction files and out-of-range node IDs.
- The sidebar now persistently displays dataset split sizes (train 90,941 / valid 29,799 / test 48,603) and the final model configurations (layers, hidden size, dropout, learning rate) for reproducibility.

10. Conclusion

This coursework implemented and compared two Graph Neural Network architectures GCN and GAT for node classification on the OGBN-Arxiv citation network. Working through the pipeline (tensor fundamentals → graph analysis → data preparation → model development → training → evaluation → explainability → dashboard) demonstrated the full lifecycle of a graph-based machine learning project. class-weighted loss functions... to close the gap" with: "A class-weighted loss variant was tested for GCN and traded accuracy for improved minority-class recall (0.444 vs 0.357 macro recall), confirming this is a genuine trade-off rather than a strict improvement; further hyperparameter tuning beyond the sweep already performed, and more sophisticated imbalance-aware methods, remain directions for closing the gap with published OGB leaderboard benchmarks, showing that a simpler, well-regularised architecture can outperform a more complex attention-based one without additional tuning. GAT's attention weights nonetheless provided clearer interpretability of which citation relationships most influenced each prediction, as shown in the explainability analysis. The class-imbalance-driven gap between accuracy and macro F1 across both models highlights a key limitation and a direction for further work e.g. class-weighted loss functions or oversampling rare categories alongside further hyperparameter tuning to close the gap with published OGB leaderboard benchmarks.

11. References

- Hu, W., Fey, M., Zitnik, M., Dong, Y., Ren, H., Liu, B., Catasta, M. and Leskovec, J., 2020. Open Graph Benchmark: Datasets for Machine Learning on Graphs. Advances in Neural Information Processing Systems (NeurIPS). [\[1\]](#)
- Kipf, T.N. and Welling, M., 2017. Semi-Supervised Classification with Graph Convolutional Networks. International Conference on Learning Representations (ICLR). [\[2\]](#)
- Veličković, P., Cucurull, G., Casanova, A., Romero, A., Liò, P. and Bengio, Y., 2018. Graph Attention Networks. International Conference on Learning Representations (ICLR). [\[3\]](#)
- Fey, M. and Lenssen, J.E., 2019. Fast Graph Representation Learning with PyTorch Geometric. ICLR Workshop on Representation Learning on Graphs and Manifolds. [\[4\]](#)
- Paszke, A. et al., 2019. PyTorch: An Imperative Style, High-Performance Deep Learning Library. Advances in Neural Information Processing Systems (NeurIPS). [\[5\]](#)