Binary Trees and Binary Search Trees (BST)

William Fiset

Outline

- Discussion & examples
 - What is a Binary Tree (BT)?
 - What is a Binary Search Tree (BST)?
 - Where are BTs and BSTs used?
- Complexity Analysis


Outline

- How to insert nodes into a BST
- How to remove nodes from a BST
- Binary tree traversals
 - preorder, inorder, postorder, and level order traversals
- A glance at some source code :)

Discussion and Examples

A tree is an undirected graph which satisfies any of the following definitions:

- An acyclic connected graph
- A connected graph with N nodes and N-1 edges.
- An graph in which any two vertices are connected by *exactly* one path.

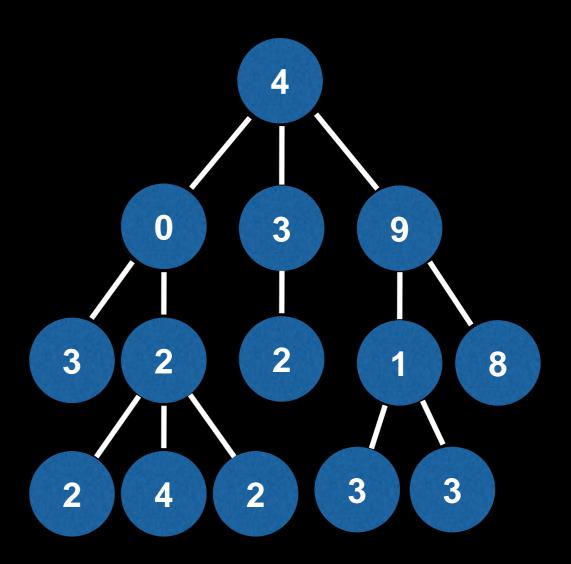


Root node If we have a rooted tree then we will want to have a reference to the root node of our tree. It does not always matter which node is selected to be the root node because

any node can root the tree!


A **child** is a node extending from another node. A **parent** is the inverse of this.

Q: What is the parent of the root node?

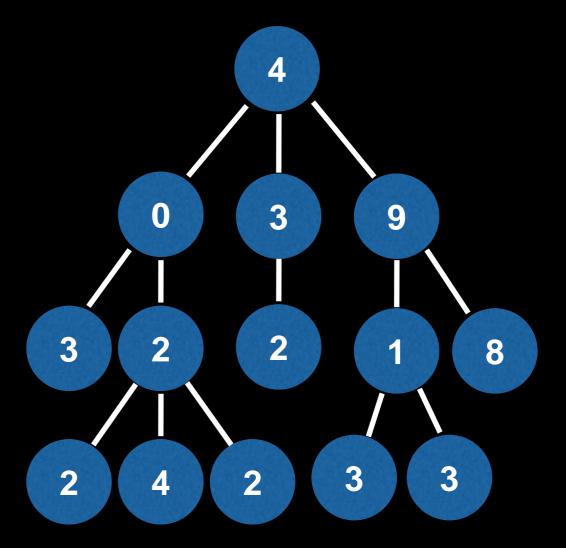

A **child** is a node extending from another node. A **parent** is the inverse of this.


Q: What is the parent of the root node?

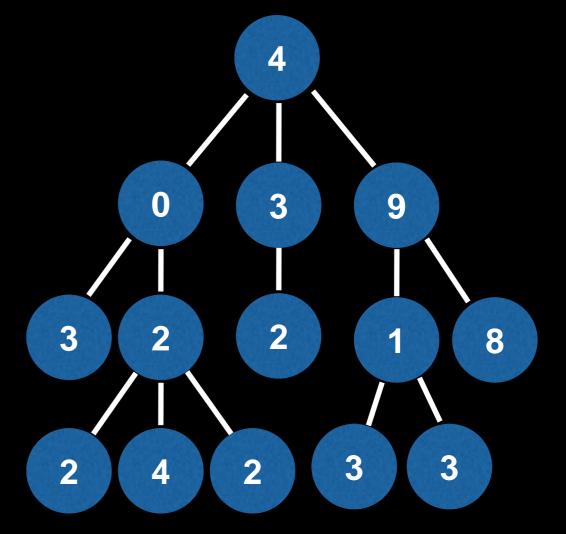


A: It has no parent, although it may be useful to assign the parent of the root node to be itself (e.g. filesystem tree).

A **child** is a node extending from another node. A **parent** is the inverse of this.


0 has two children (3 and 2) and a parent (4)

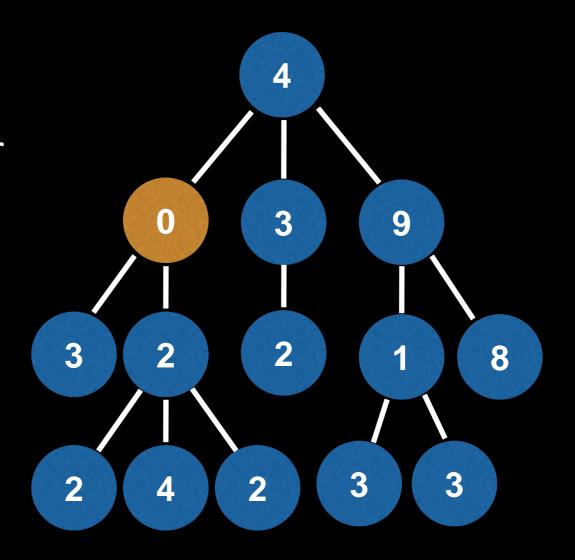


A leaf node is a node with no children. These have been highlighted in orange.

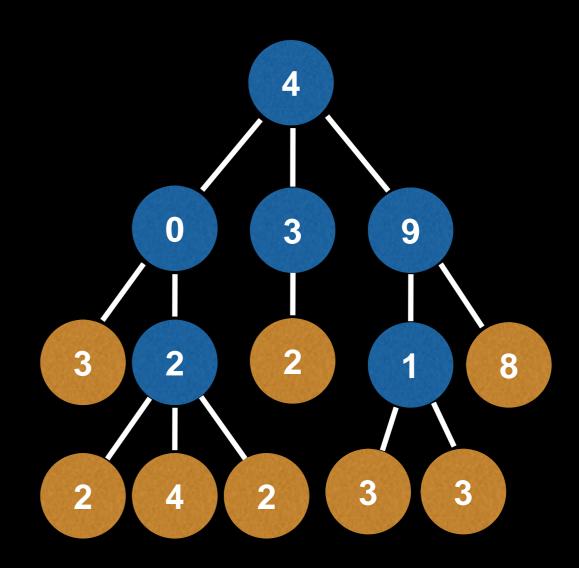



A **subtree** is a tree entirely contained within another. They are usually denoted using triangles.





Note: Subtrees may consist of a single node!





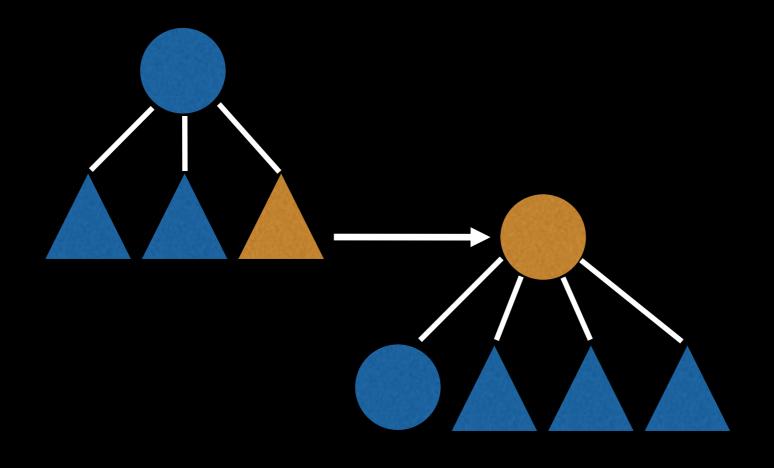


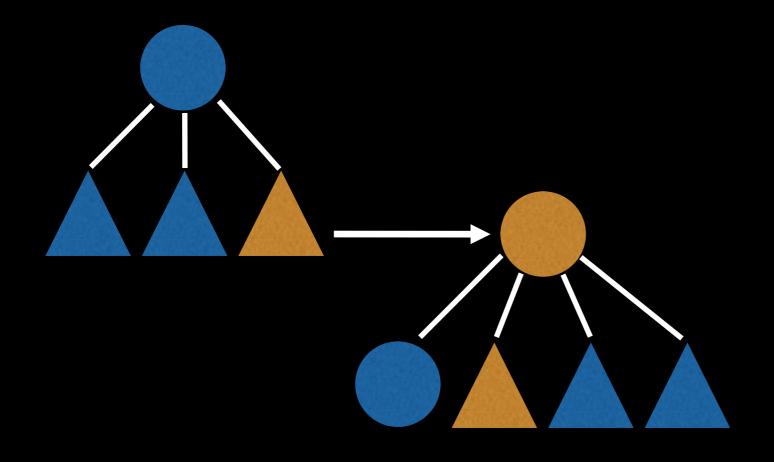

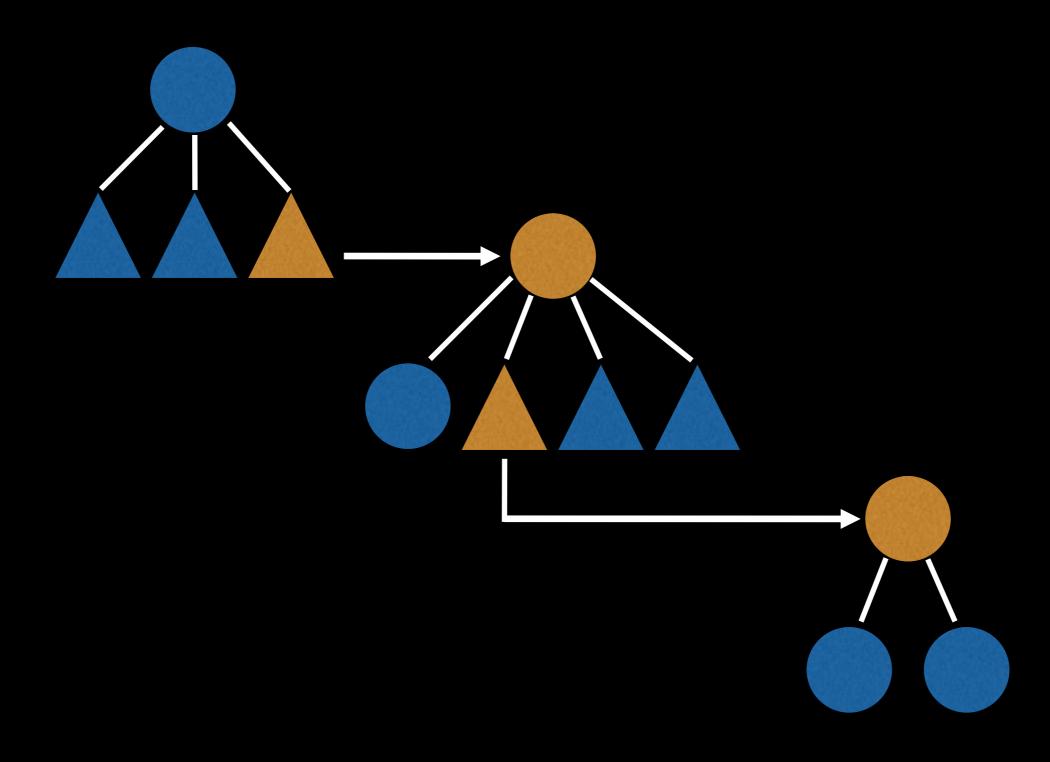


What is a Binary Tree (BT)?


A binary tree is a tree for which every node has at most two child nodes.

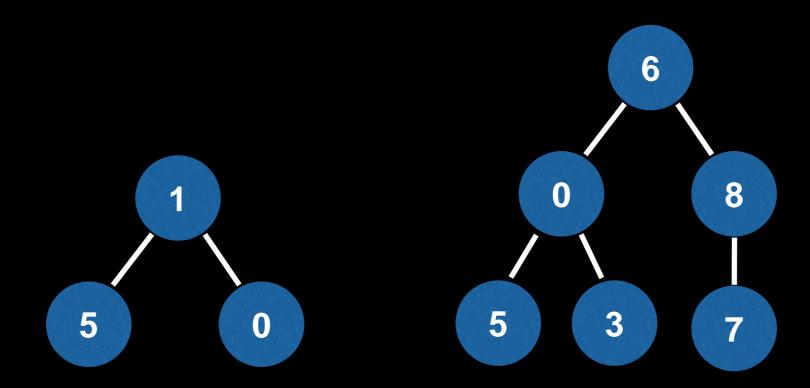



What is a Binary Tree (BT)?


A binary tree is a tree for which every node has at most two child nodes.

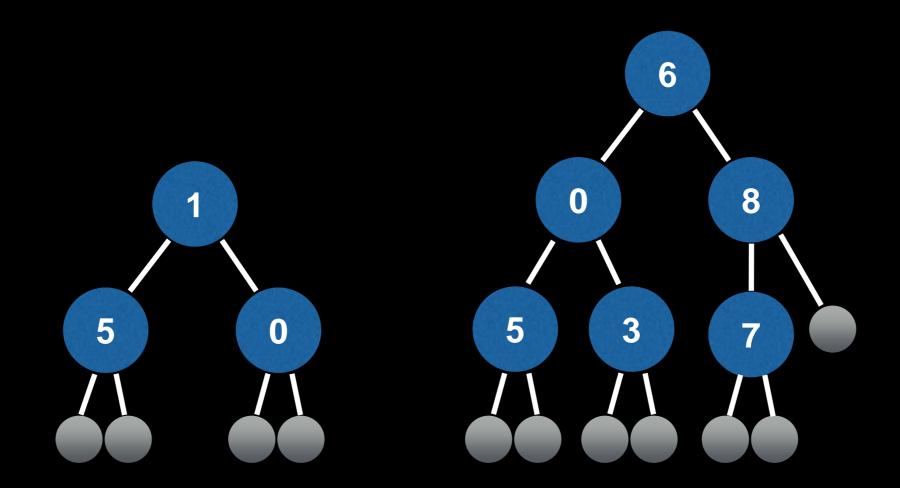

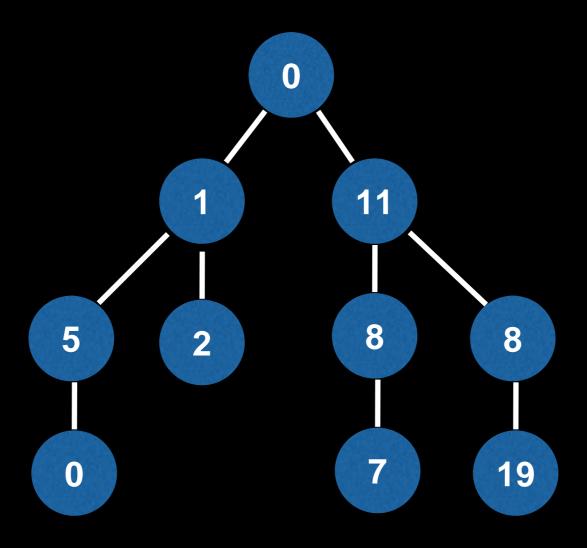


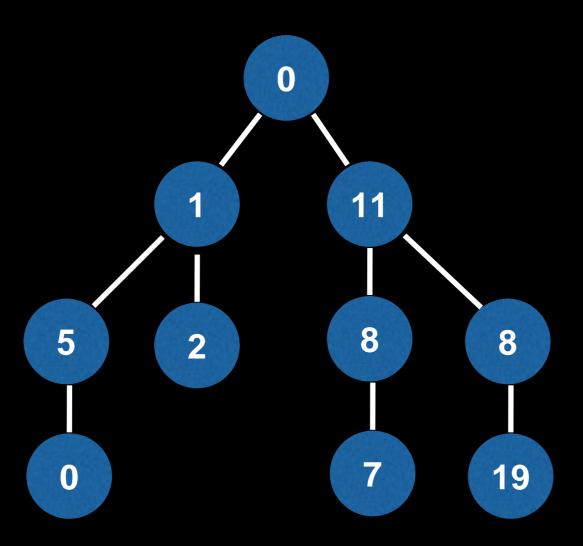


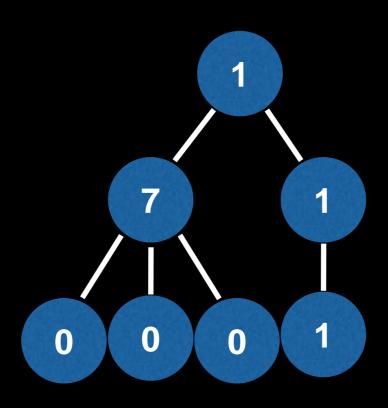

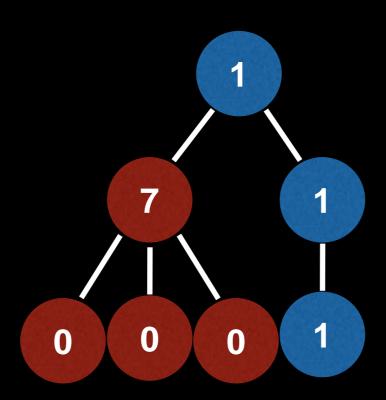

No, there is a node with three children!








Yes! A degenerate one, but a BT nonetheless

What is a Binary Search Tree (BST)?


A binary search tree is a binary tree that satisfies the BST invariant: left subtree has smaller elements and right subtree has larger elements.

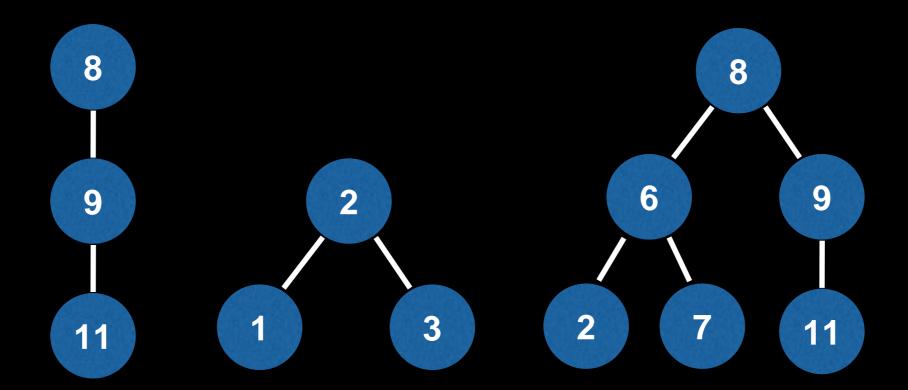








llues in your tree. BST operations allow for duplicate values, but most of the time we are only

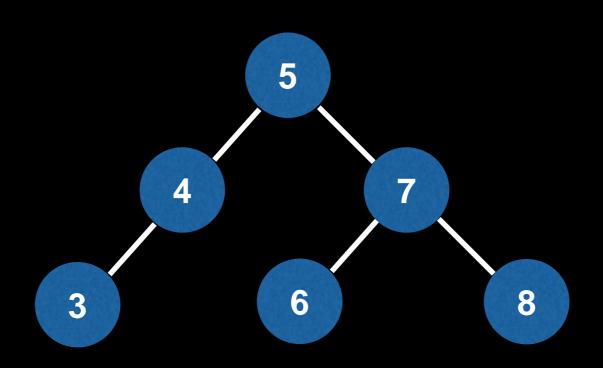

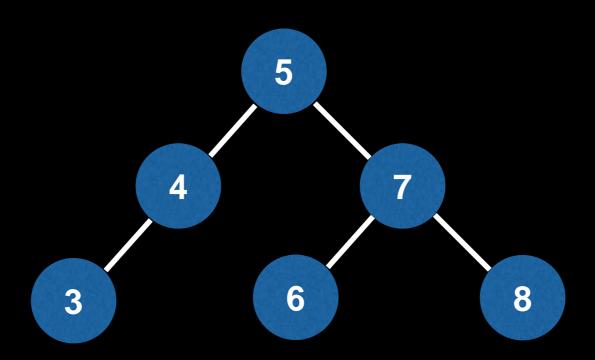



Yes!

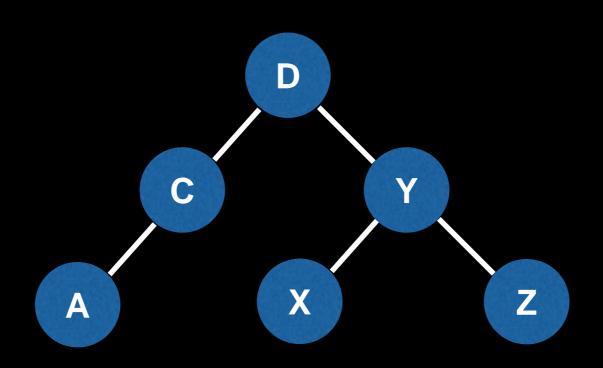

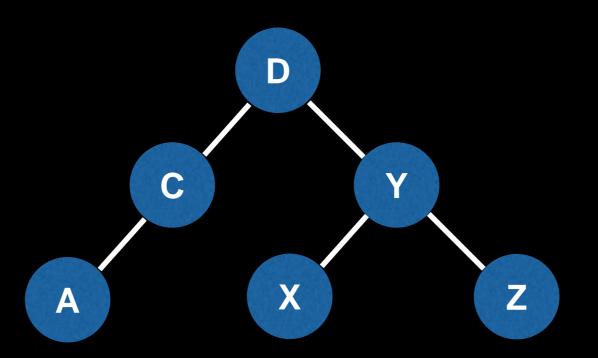



Yes! We are not limited to only using numbers. Any data that can be ordered can be placed inside a BST.

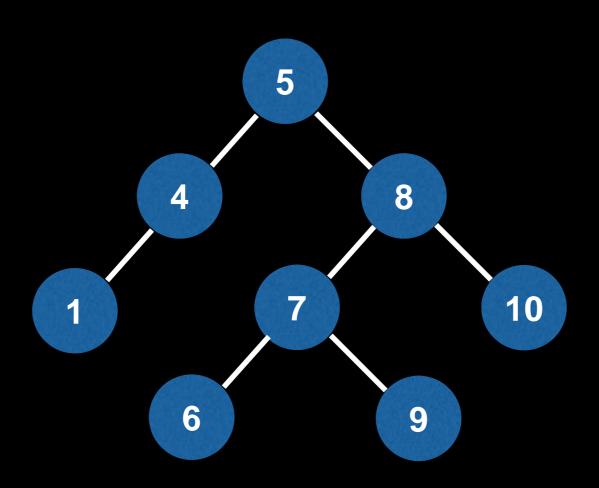

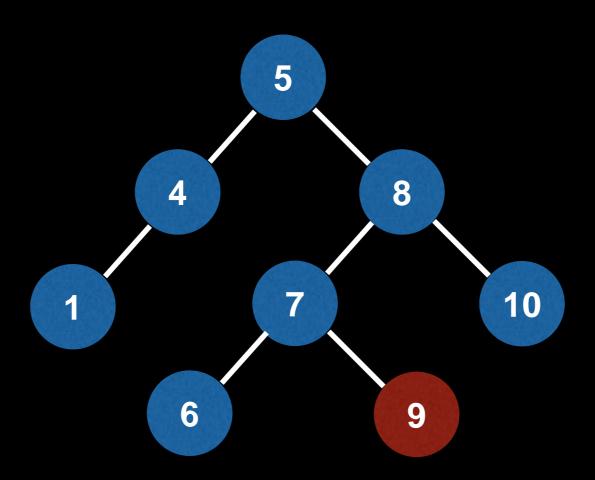


No! Since 9 is larger than 8 then it should be in the right subtree of 8.

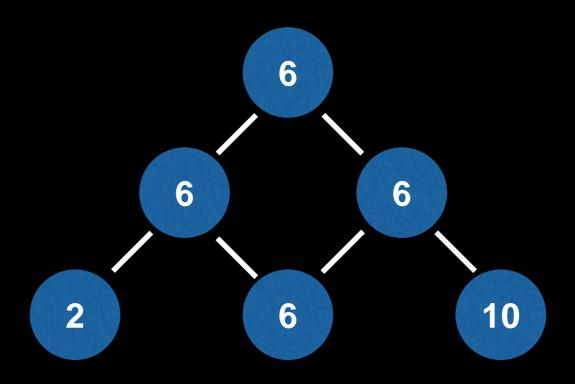


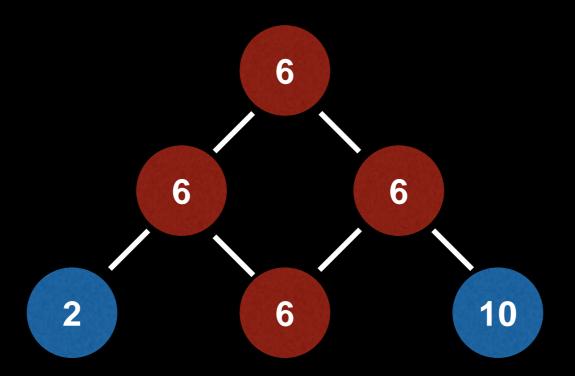

No! This structure is not a tree because it contains a cycle, and all BSTs must be trees.

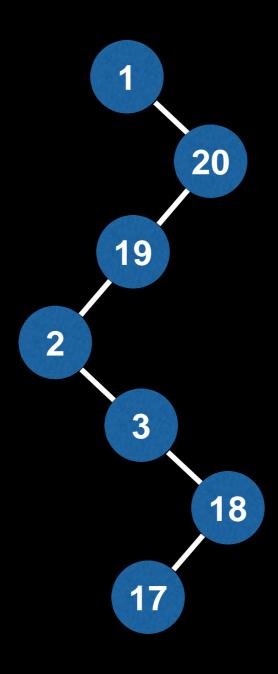

Is this a valid BST?

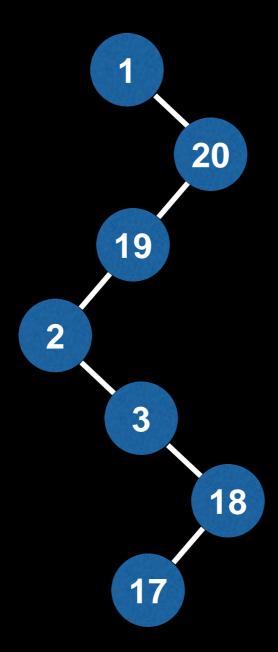

Yes! This structure satisfies the BST invariant.

When and where are Binary Trees used?

- Binary Search Trees (BSTs)
 - Implementation of some map and set ADTs
 - Red Black Trees
 - AVL Trees
 - Splay Trees
 - etc...
- Used in the implementation of binary heaps
- Syntax trees (used by compiler and calculators)
- Treap a probabilistic DS (uses a randomized BST)

Complexity of BSTs

Operation	Average	Worst
Insert	O(log(n))	O(n)
Delete	O(log(n))	O(n)
Remove	O(log(n))	O(n)
Search	O(log(n))	O(n)

Inserting elements into a Binary Search Tree (BST)

Binary Search Tree (BST) elements must be comparable so that we can order them inside the tree.

When inserting an element we want to compare its value to the value stored in the current node we're considering to decide on one of the following:

- Recurse down left subtree (< case)
- Recurse down right subtree (> case)
- Handle finding a duplicate value (= case)
- Create a new node (found a null leaf)

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)

insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)

insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

insert(6)

7

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)

insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

insert(6)

7

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)



Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)



Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)



Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

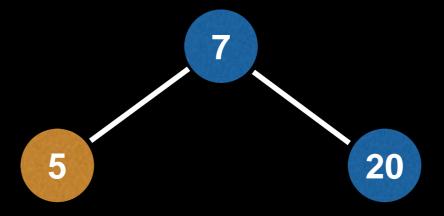

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

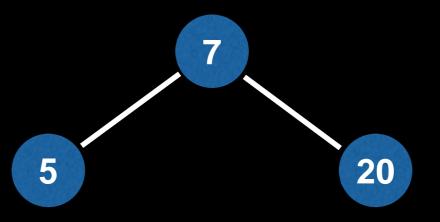

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

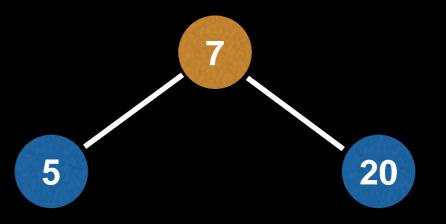

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

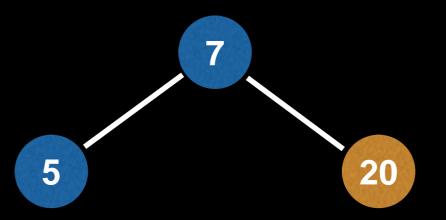

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

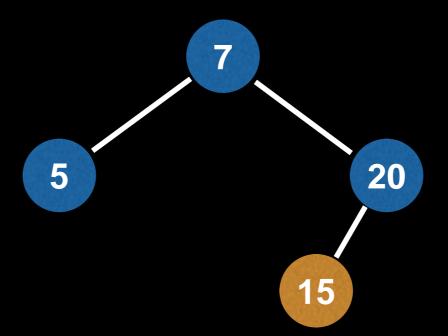

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

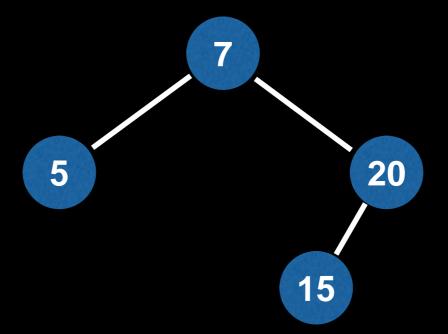

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

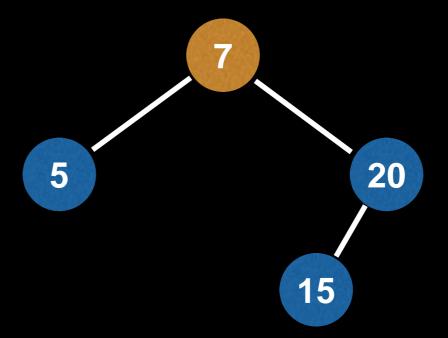

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

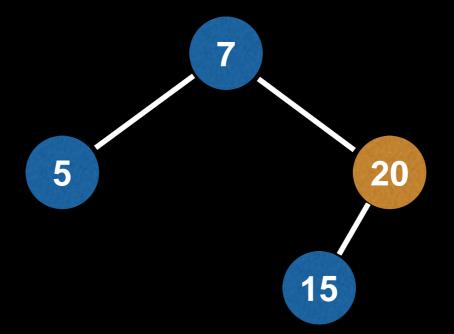

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

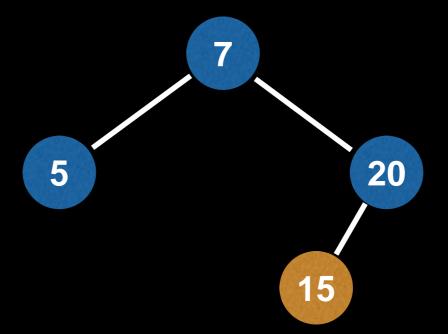

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

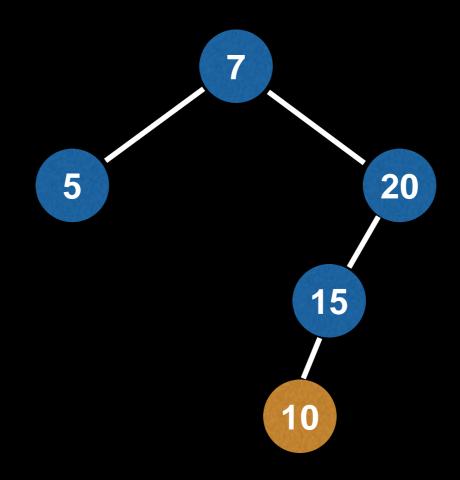

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

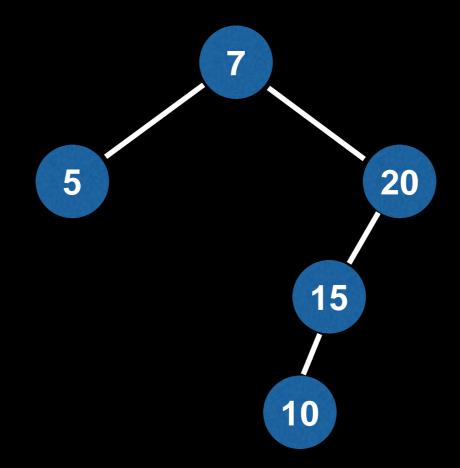

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

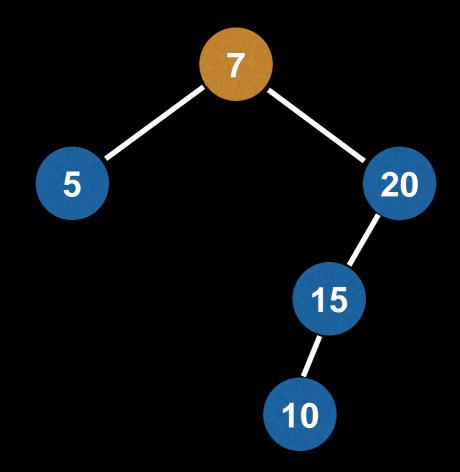

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

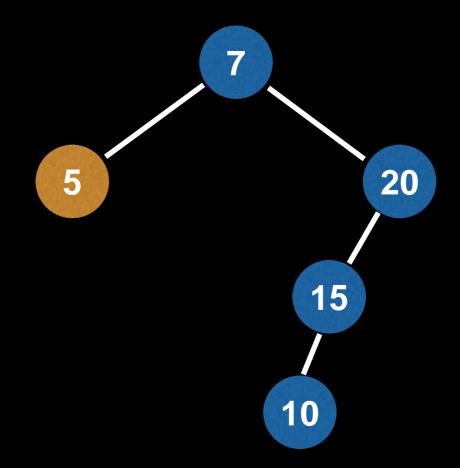

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

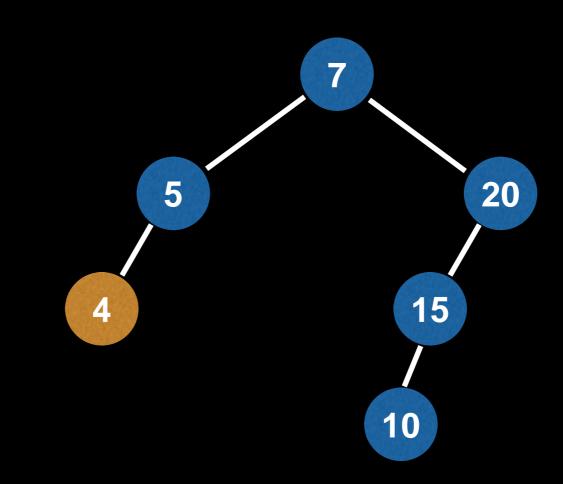

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

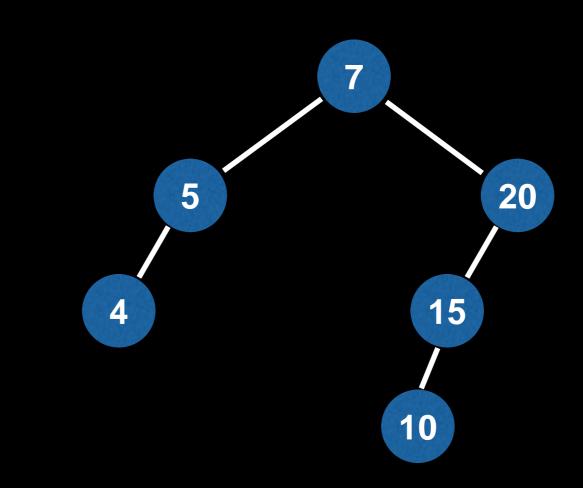

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

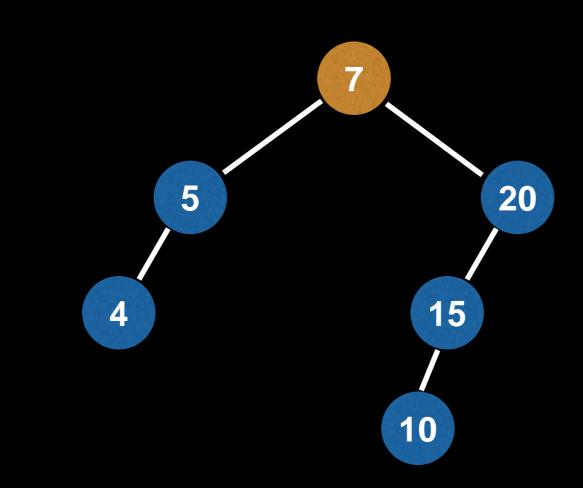

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

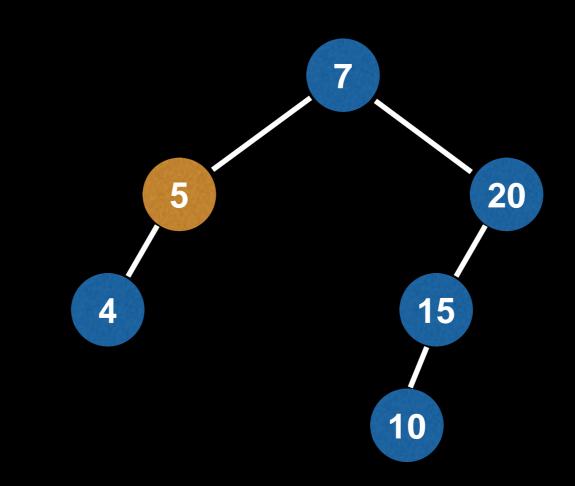

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)

insert(4)


insert(4)

insert(33)

insert(2)

insert(25)

insert(6)

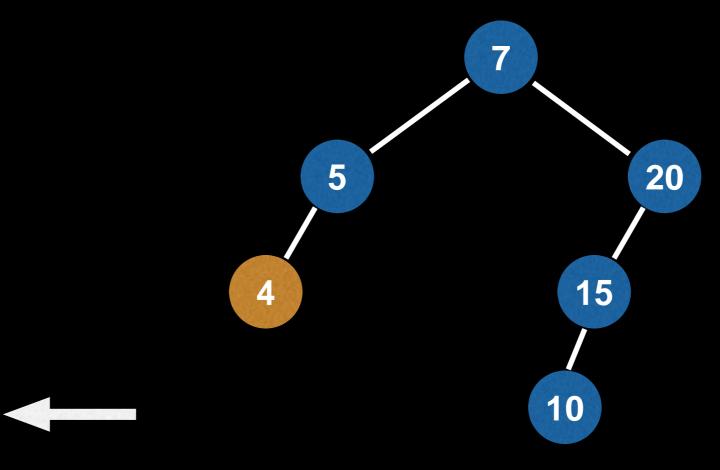

We have encountered a value that is already in the tree. If your tree supports duplicate values then add another node, otherwise do nothing.

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

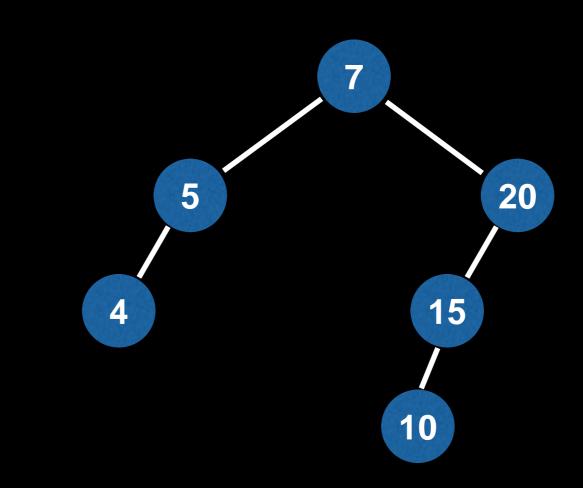

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

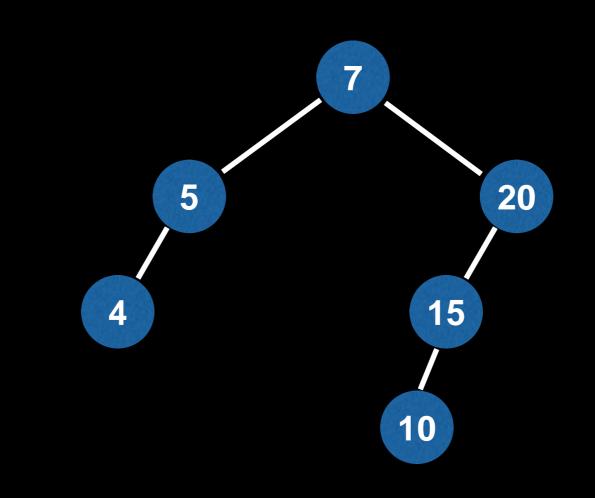

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

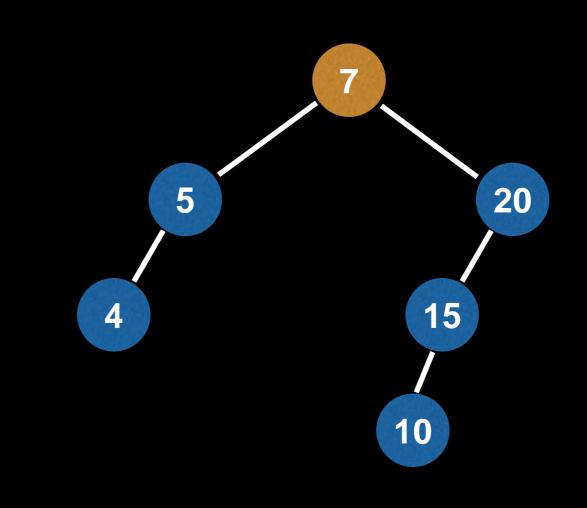

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

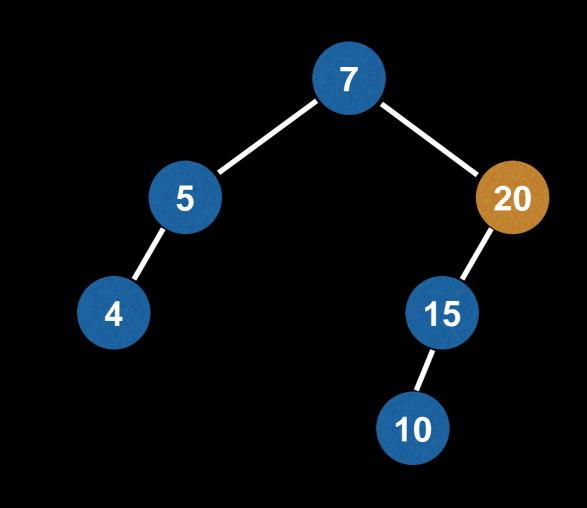

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

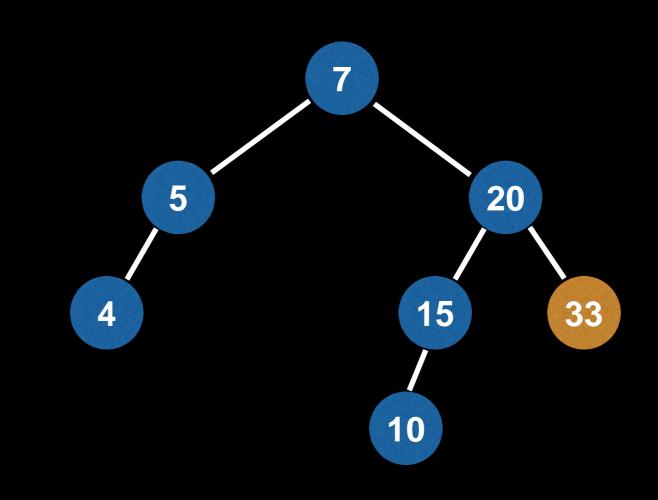

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

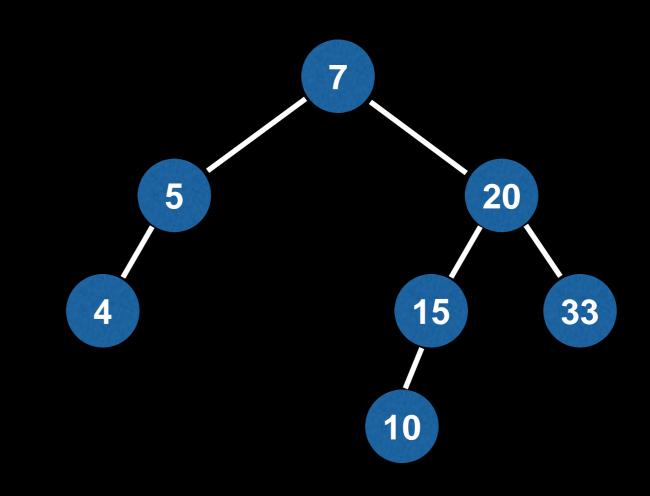

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

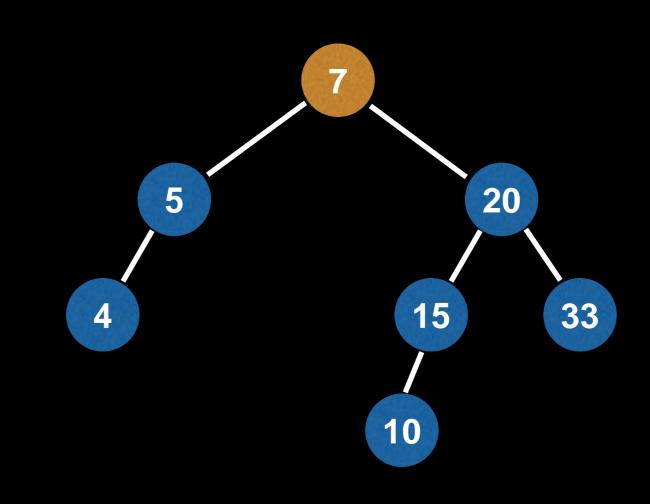

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

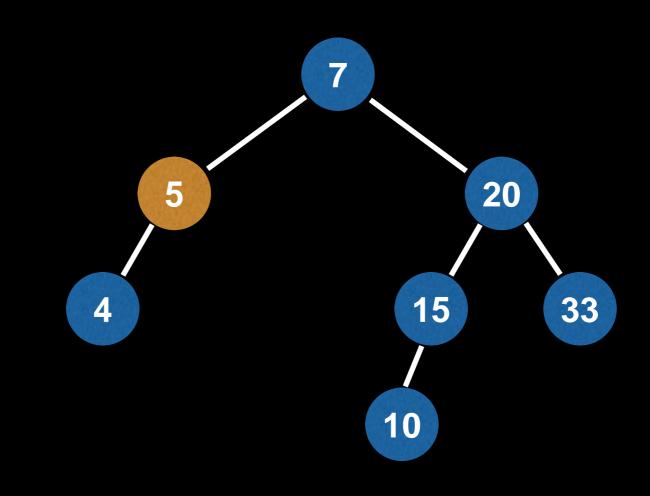

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

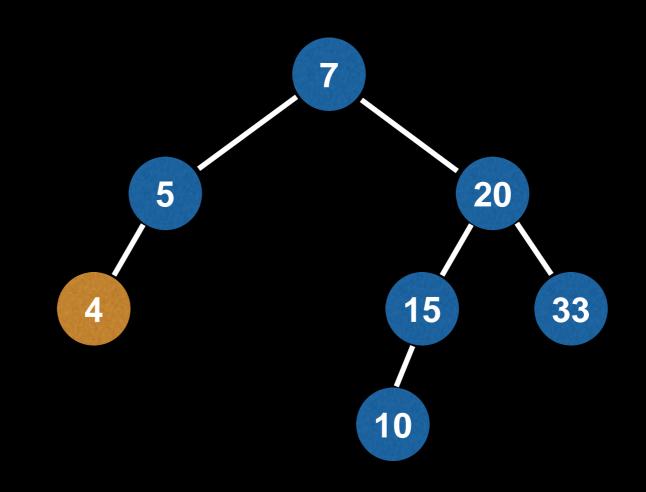

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

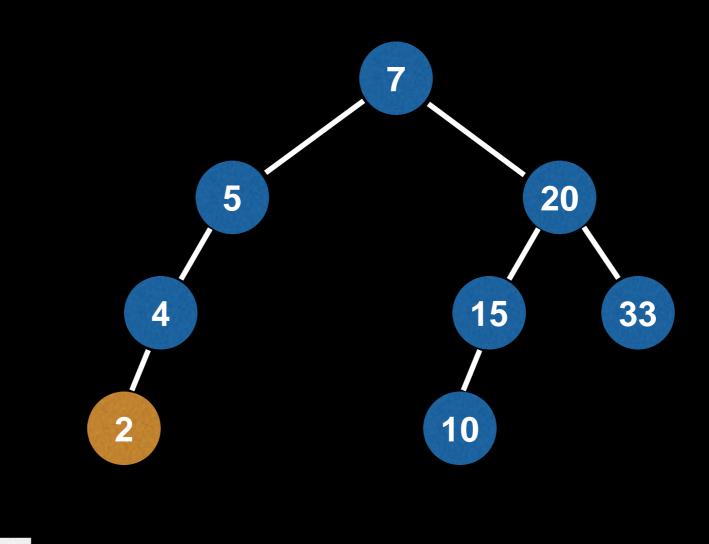

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

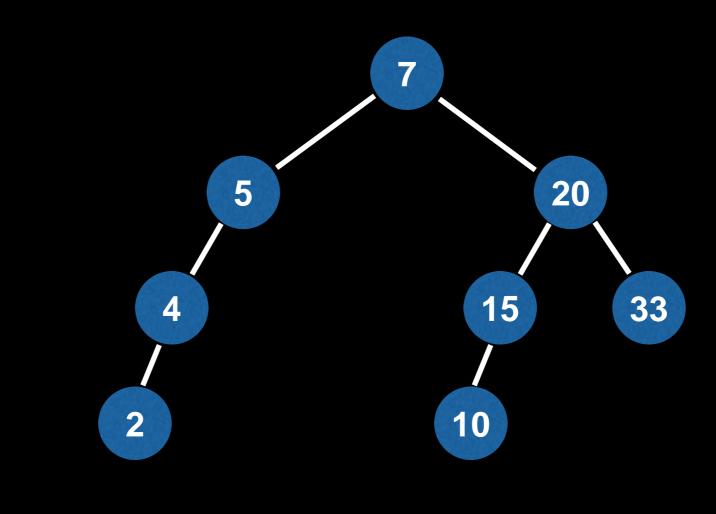

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

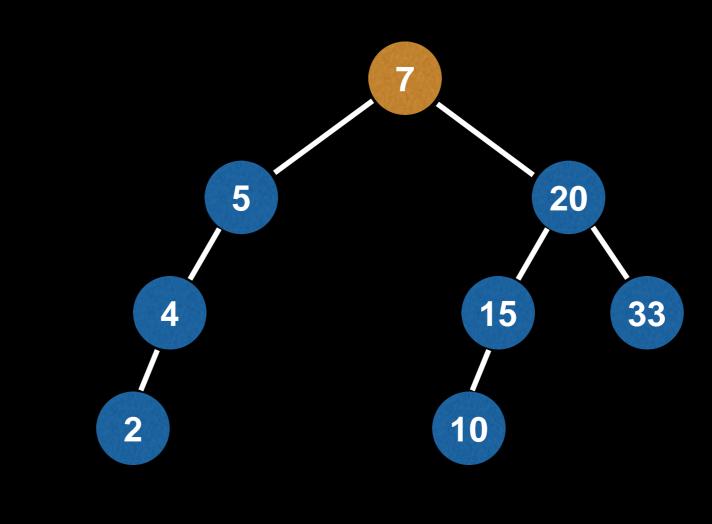

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

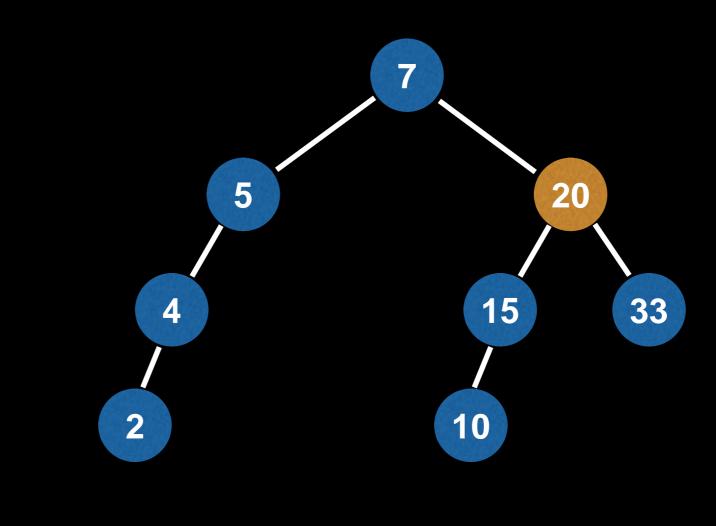

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

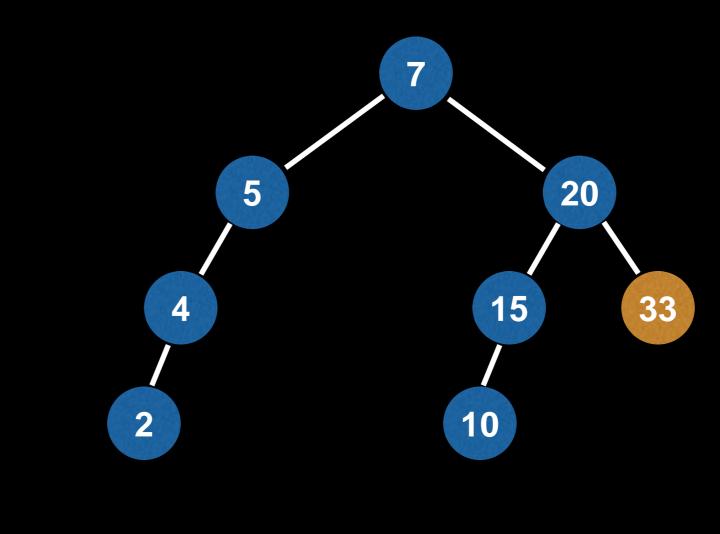

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

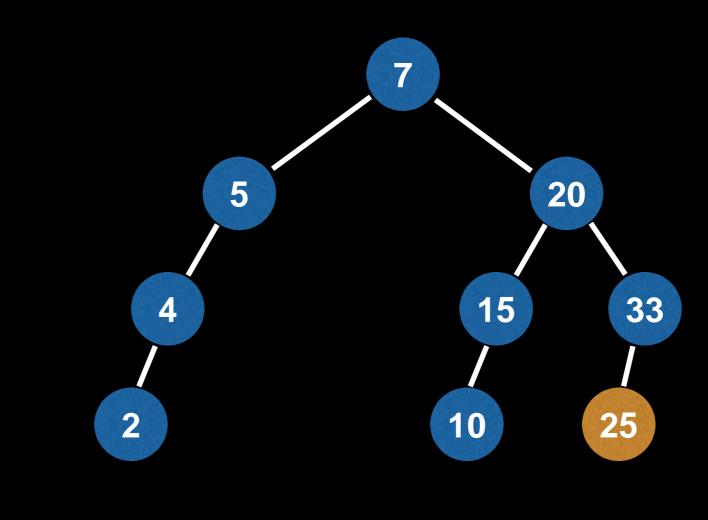

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

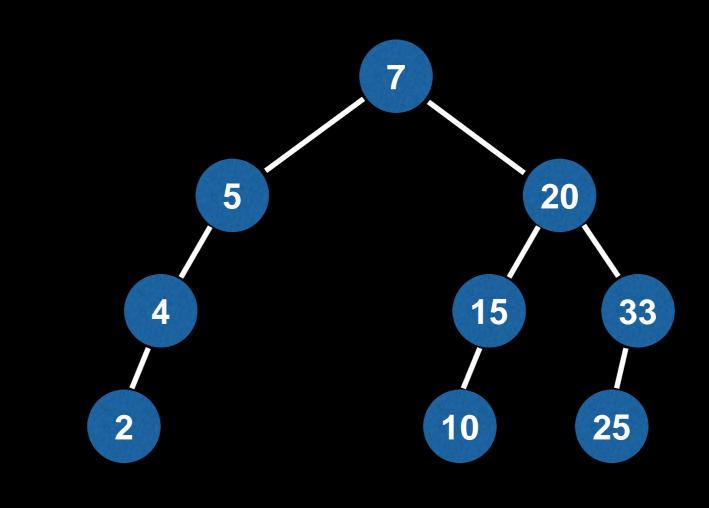

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

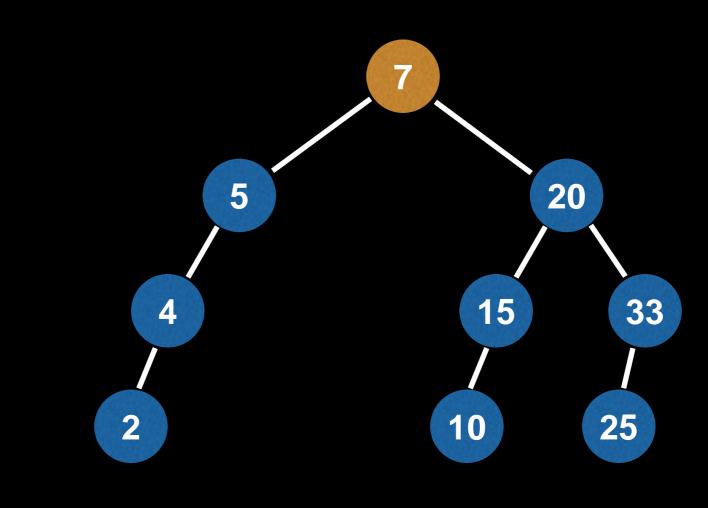

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

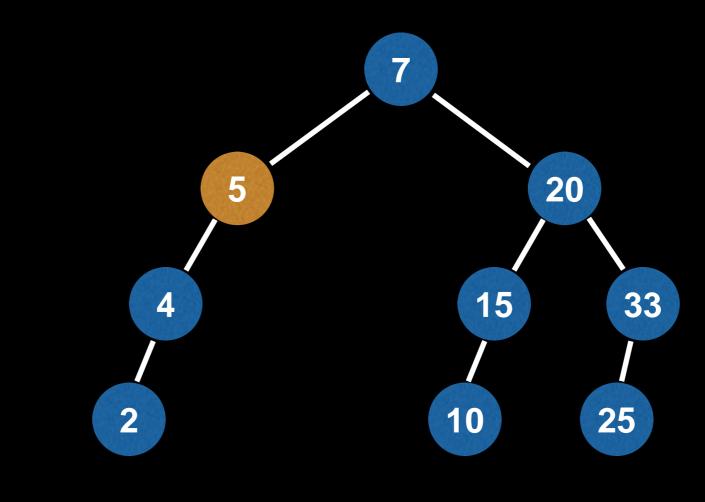

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

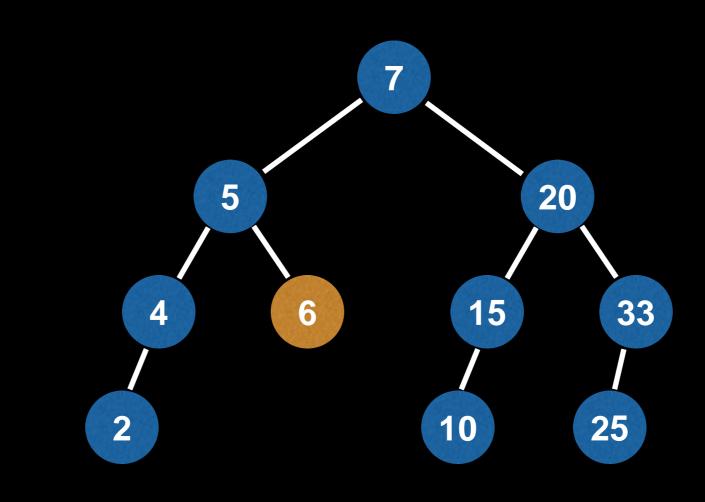

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)


insert(4)

insert(4)

insert(33)

insert(2)

insert(25)

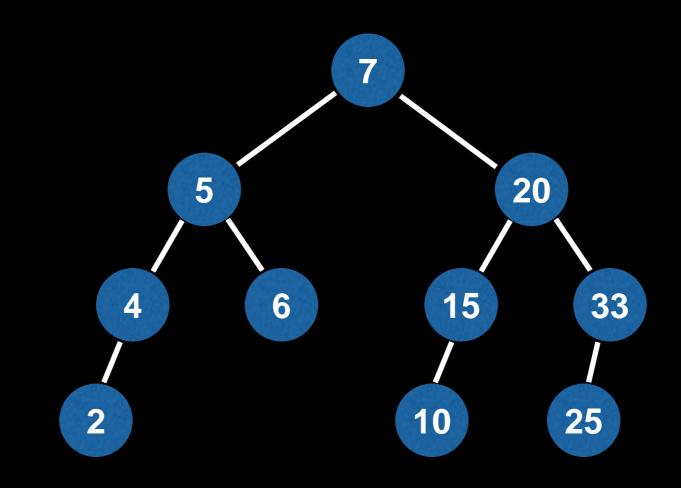

Instructions:

insert(7)

insert(20)

insert(5)

insert(15)

insert(10)

insert(4)


insert(4)

insert(33)

insert(2)

insert(25)

insert(6)

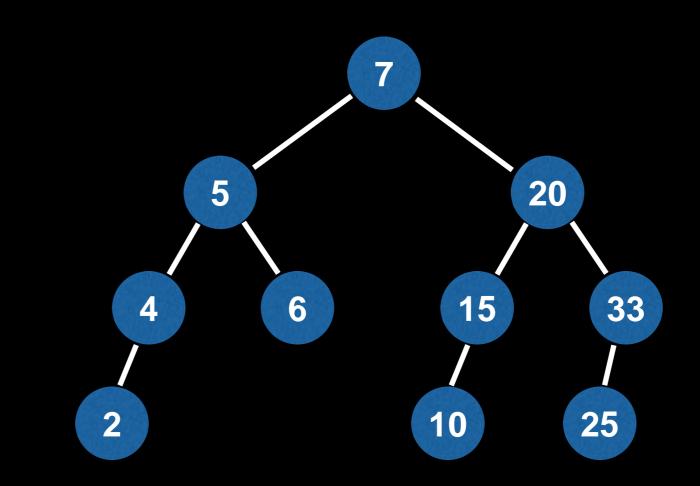

On average the insertion time will be logarithmic, but in the worst case this could degrade to linear time.

Instructions:

- insert(1)
- insert(2)
- insert(3)
- insert(4)
- insert(5)
- insert(6)

Instructions:

1

insert(1)

insert(2)

insert(3)

insert(4)

insert(5)

Instructions:

1

insert(1)

insert(2)

insert(3)

insert(4)

insert(5)

Instructions:

1


insert(1)


insert(2)


insert(3)


insert(4)


insert(5)

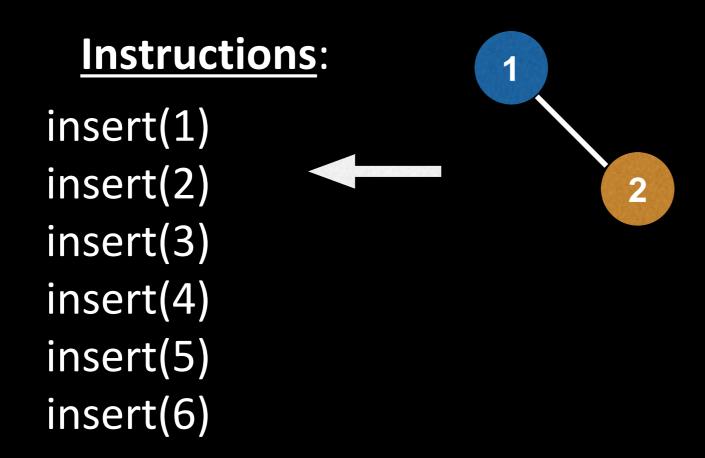


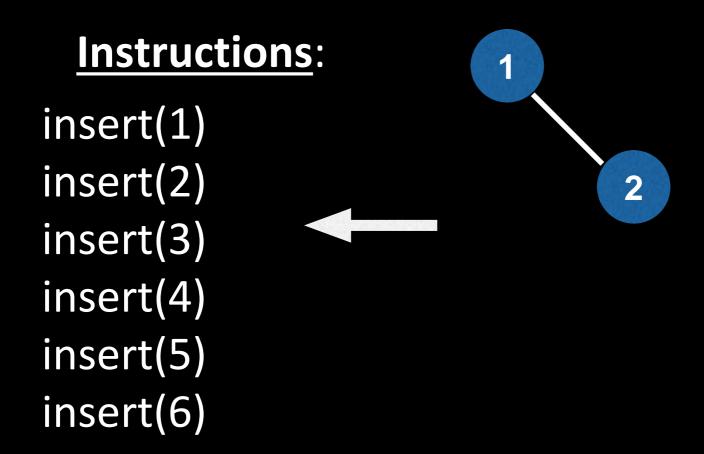


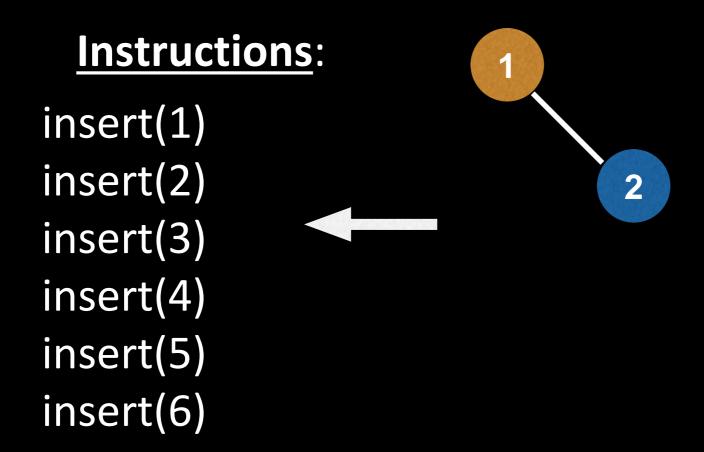


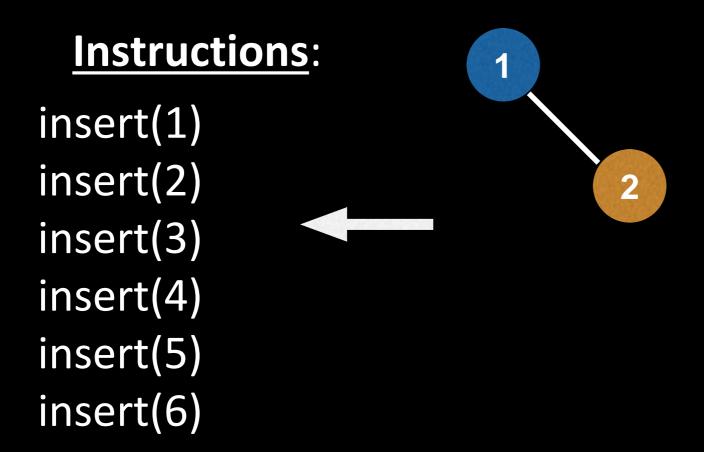


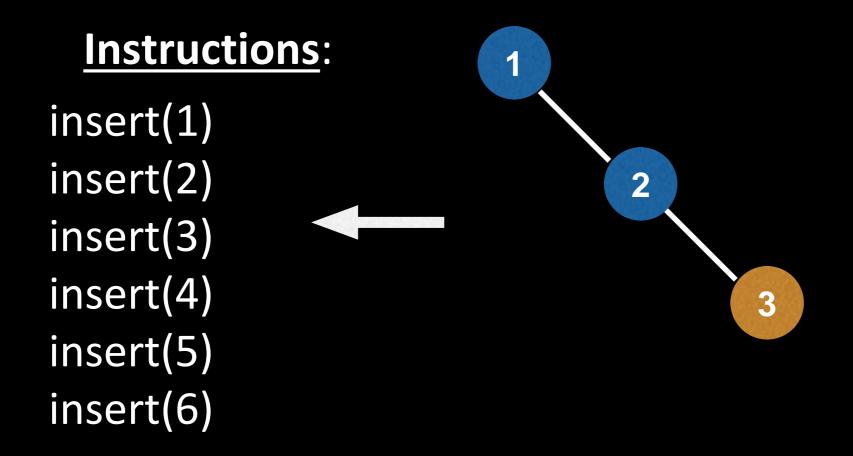


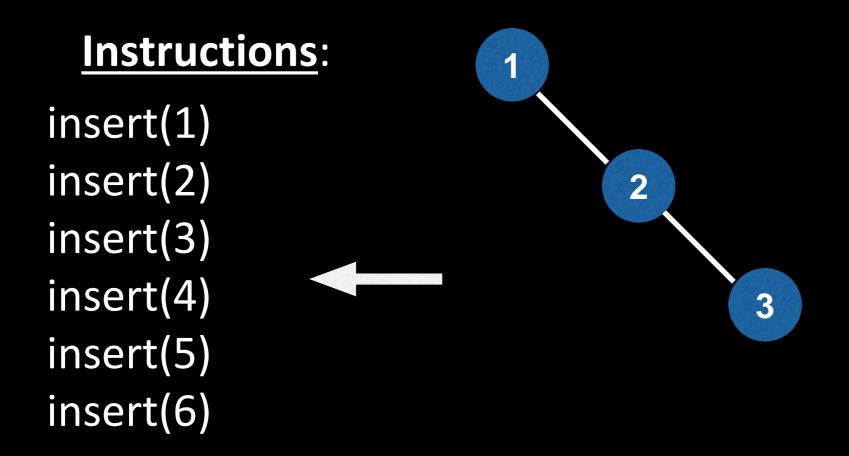


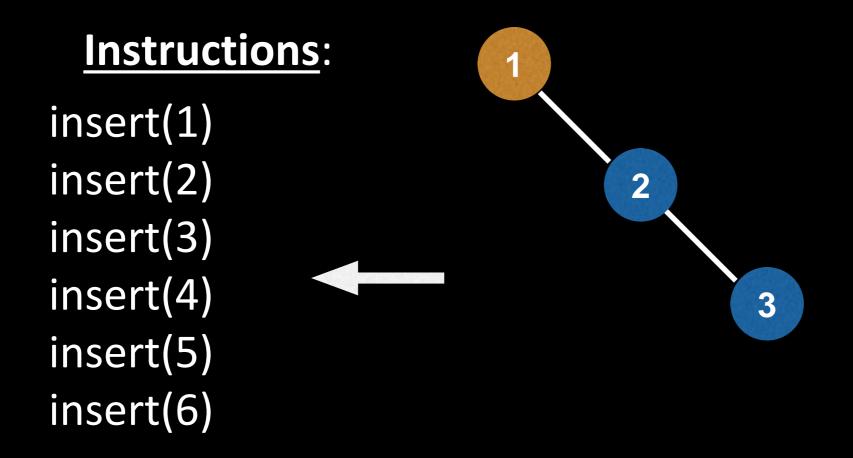


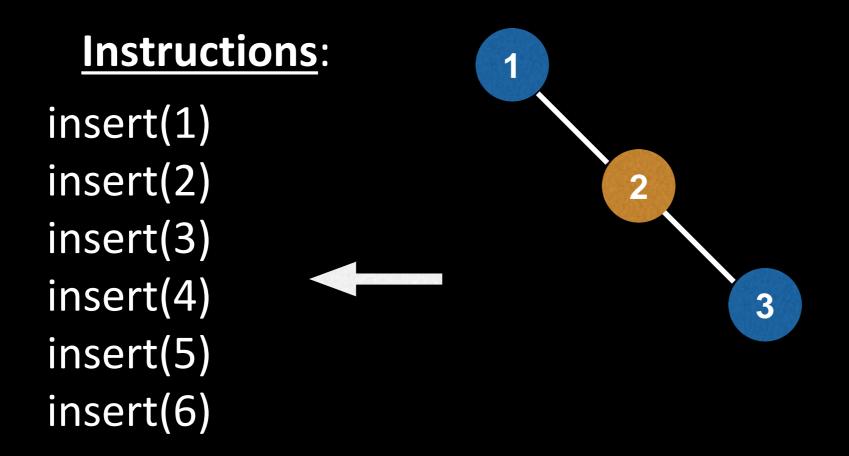


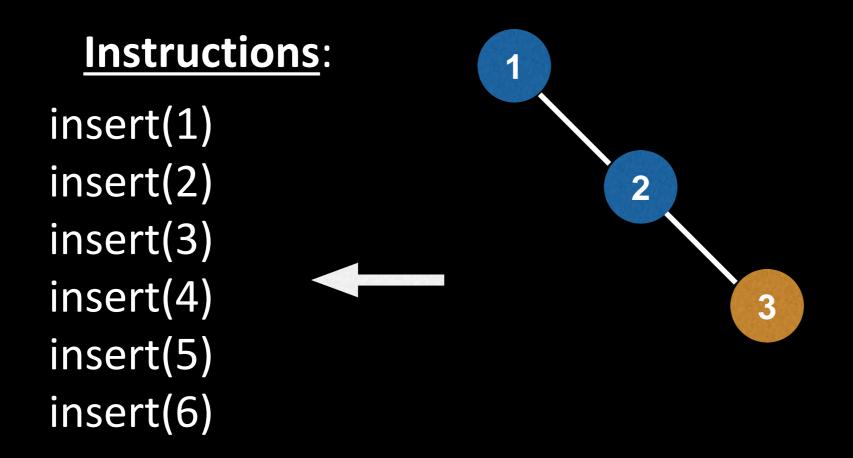


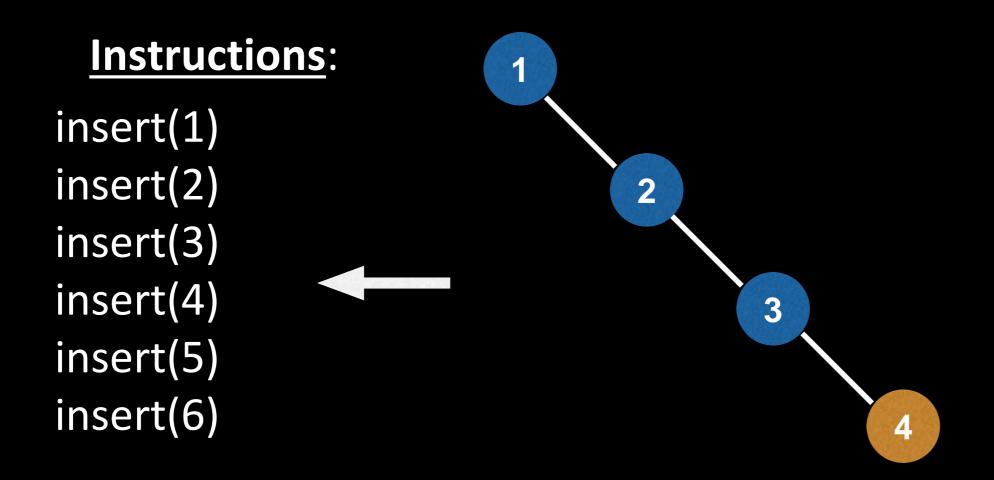


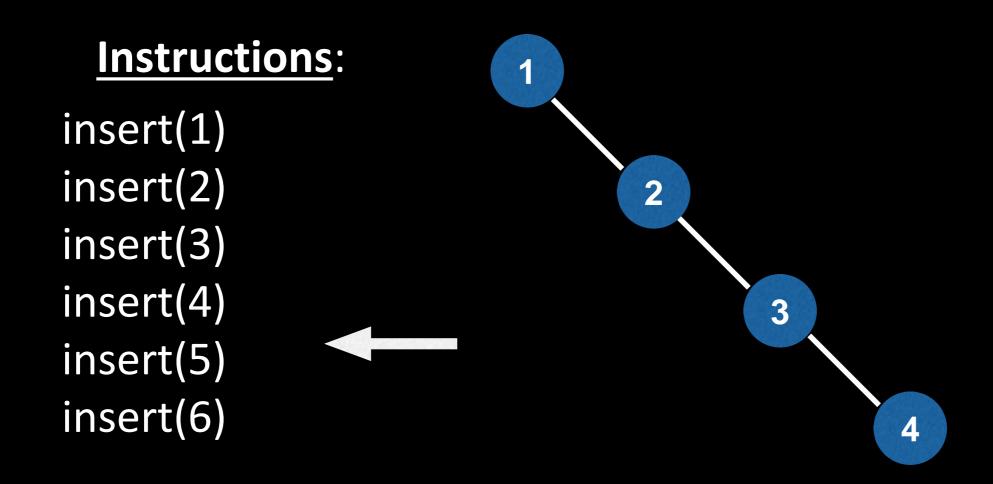


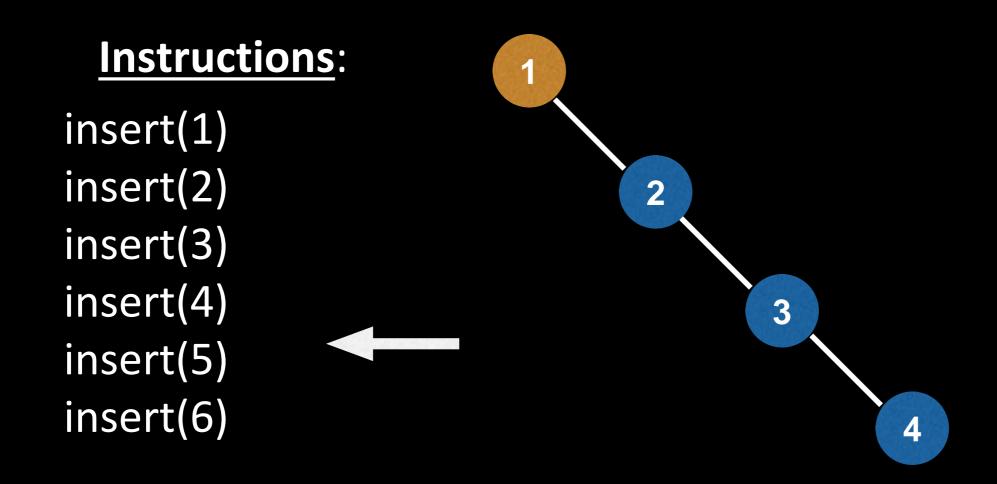


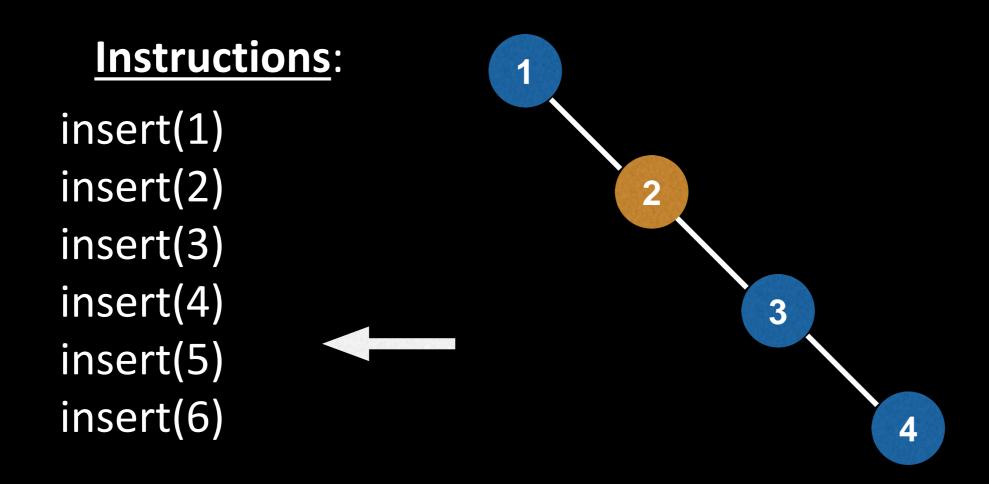


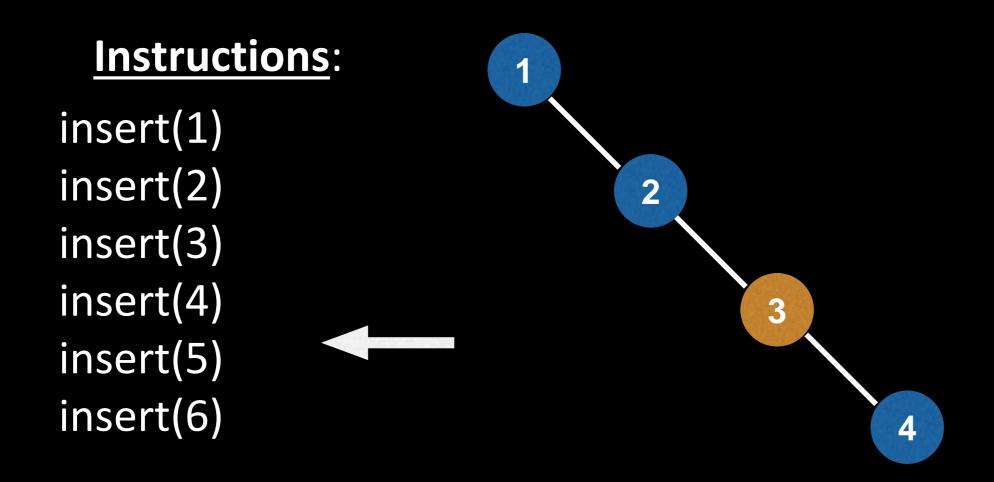


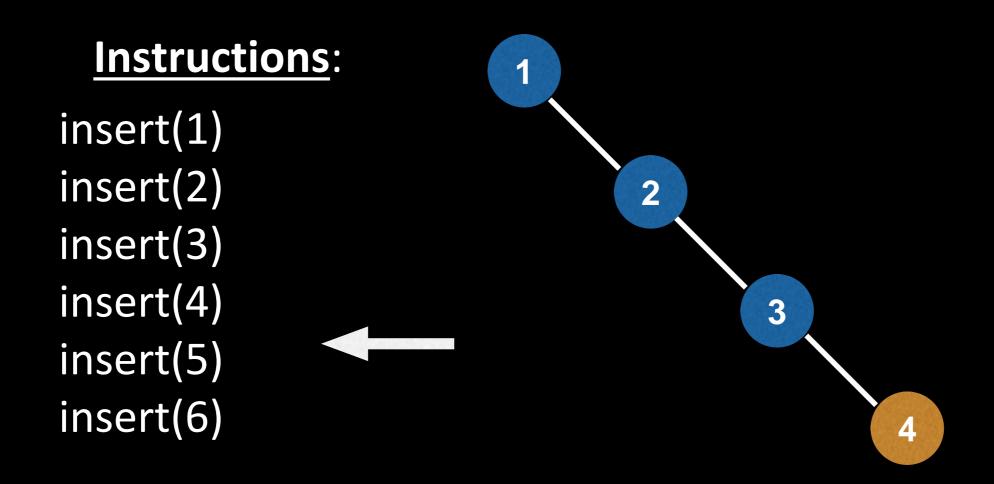


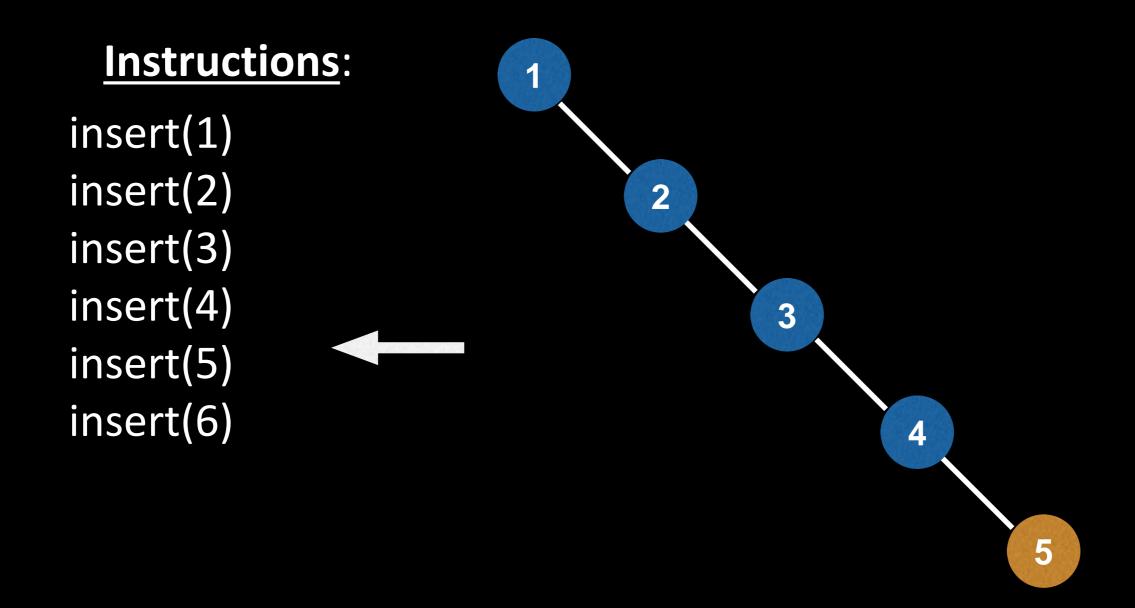


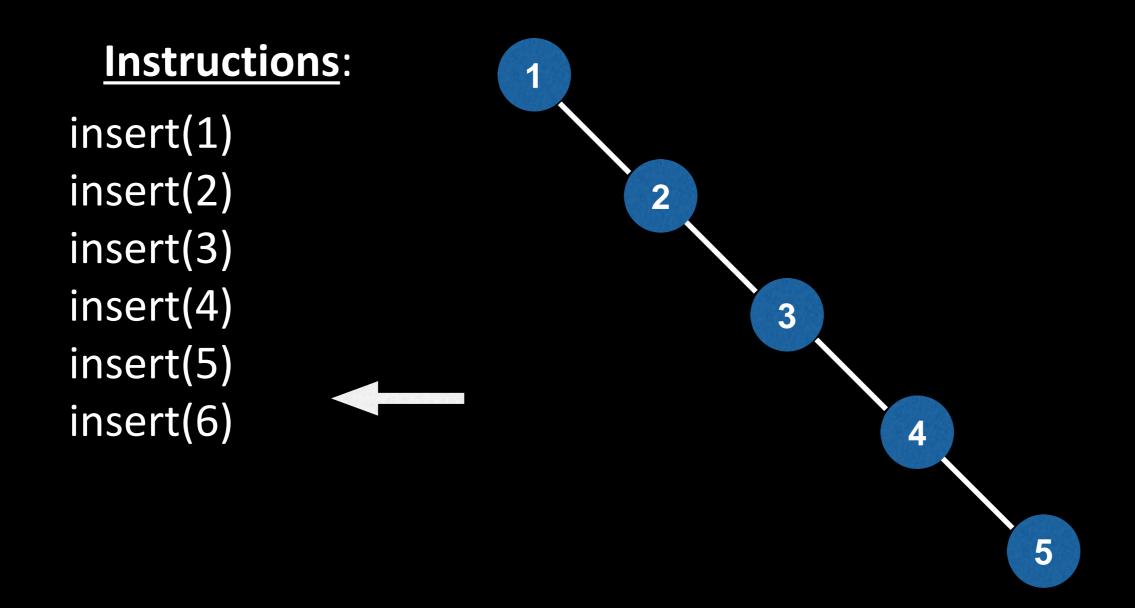


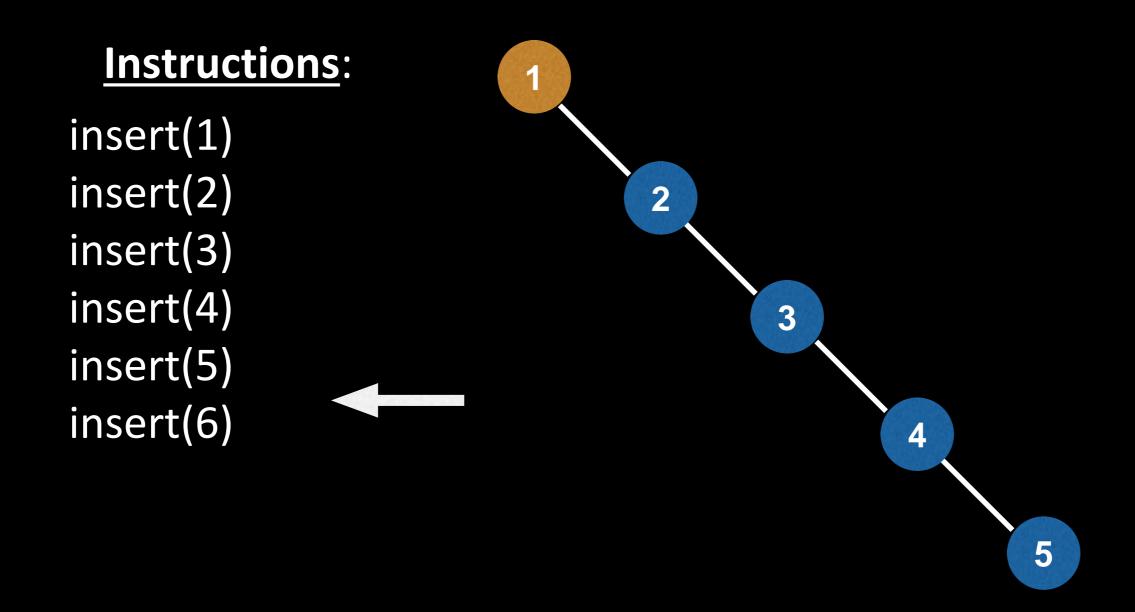


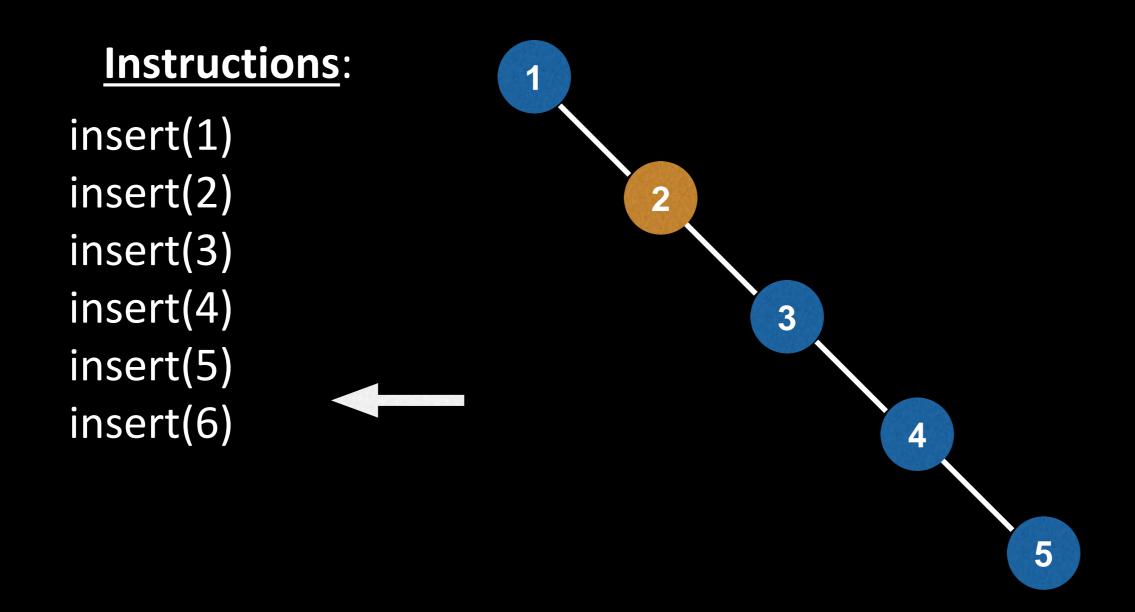


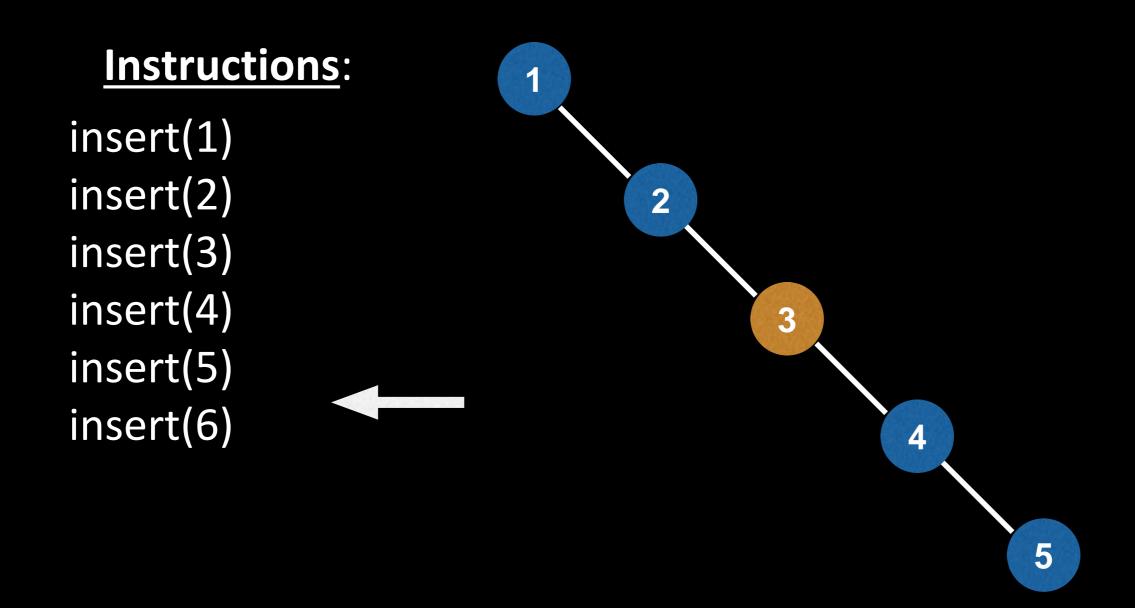

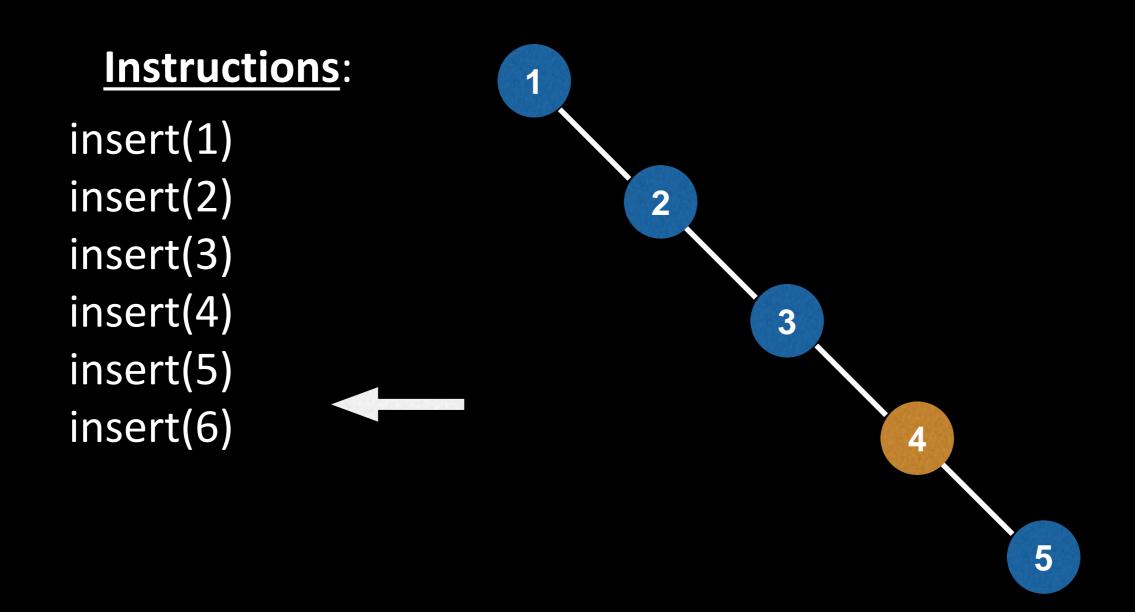

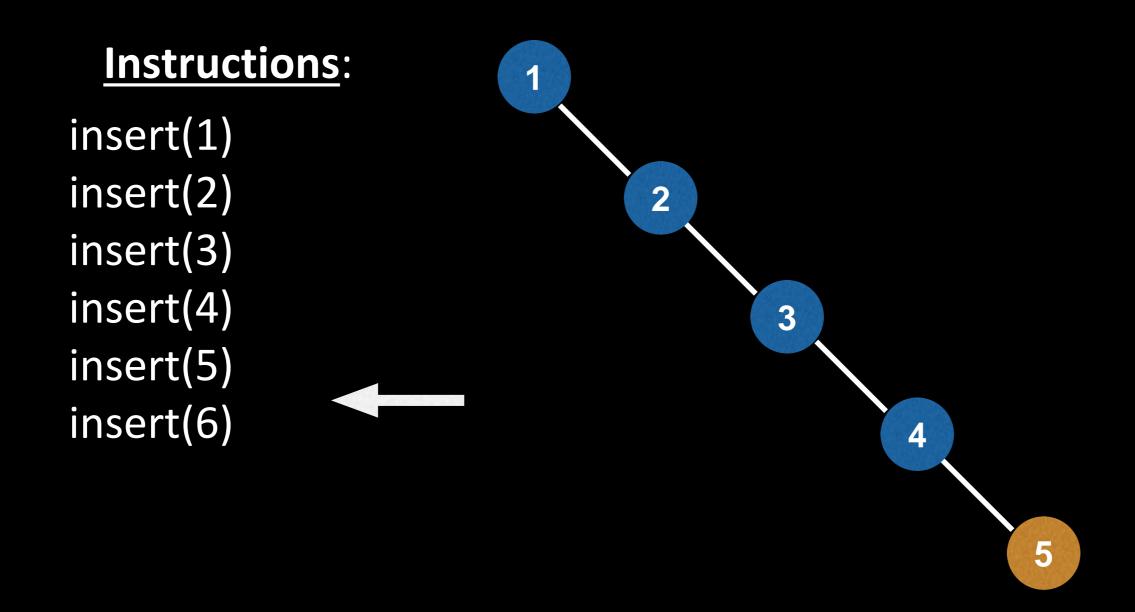

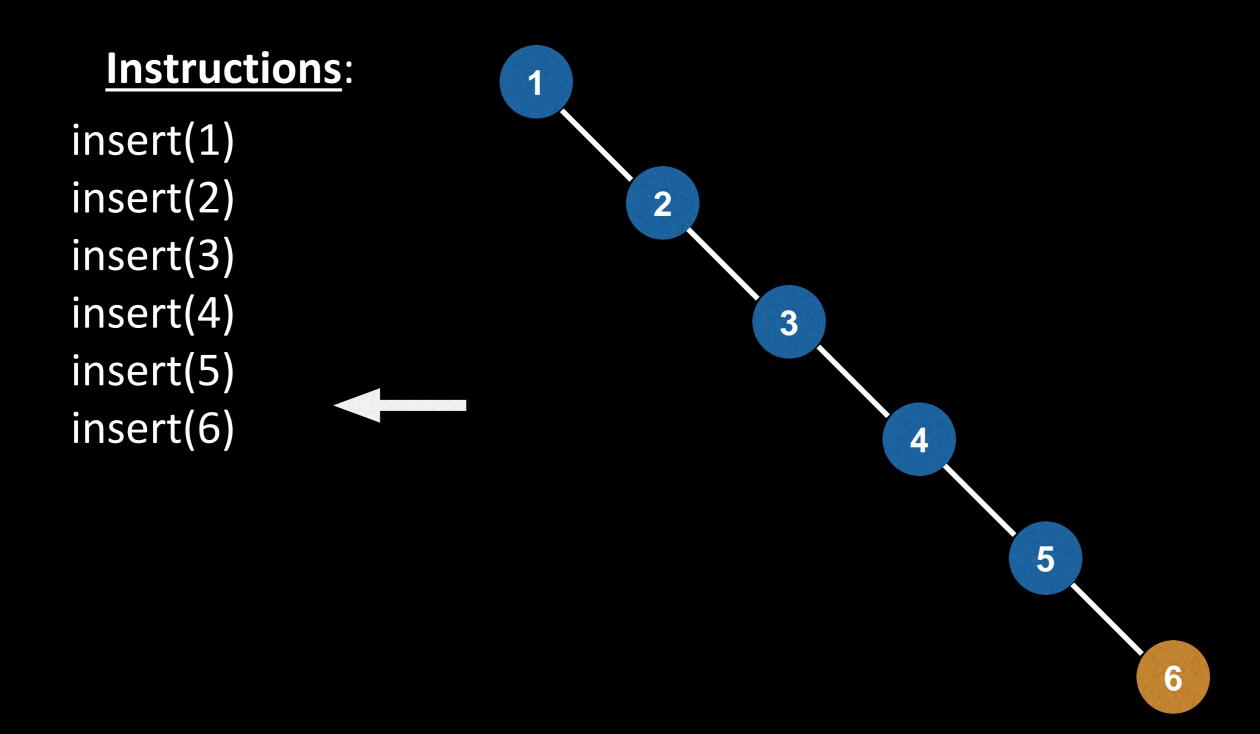

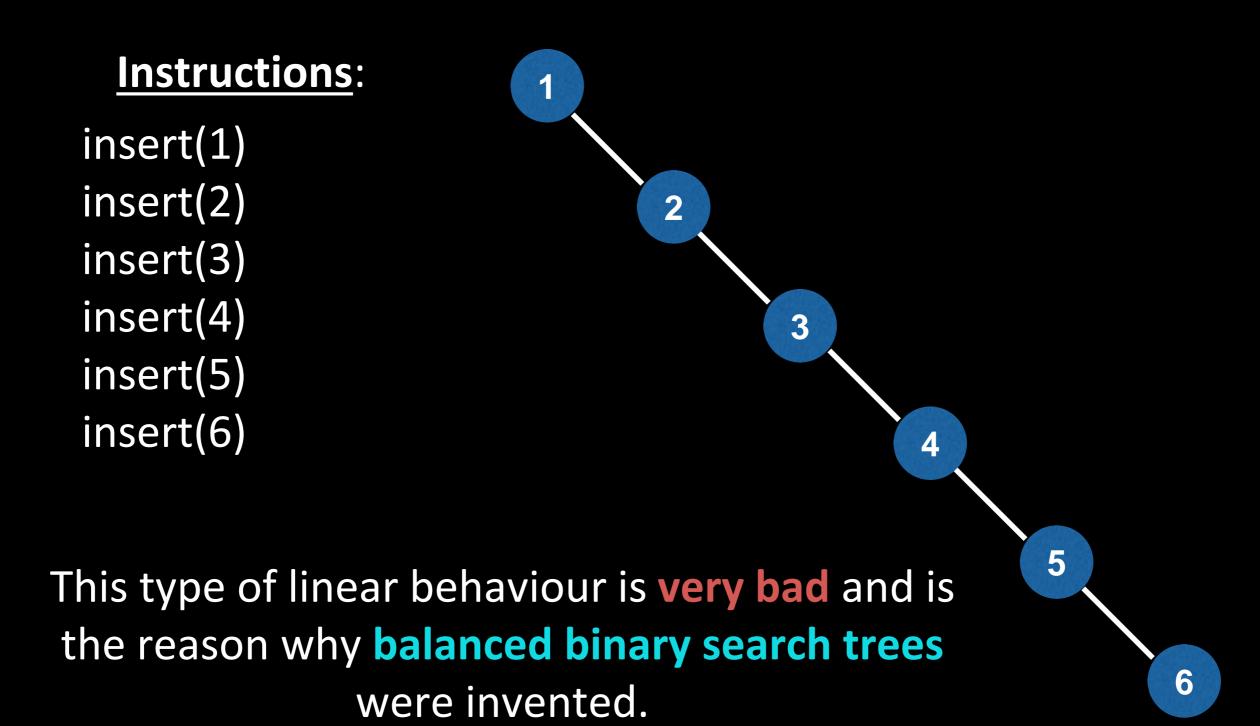

Removing elements from a Binary Search Tree (BST)

Removing elements from a BST

Removing elements from a Binary Search Tree (BST) can be seen as a two step process.

1) Find the element we wish to remove (if it exists)

2) Replace the node we want to remove with its successor (if any) to maintain the BST invariant.

Recall the **BST invariant**: left subtree has smaller elements and right subtree has larger elements.

When searching our BST for a node with a particular value one of four things will happen:

- 1) We hit a **null node** at which point we know the value does not exist within our <u>BST</u>
- 2) Comparator value equal to 0 (found it!)
- 3) Comparator value less than 0 (the value, if it exists, is in the left subtree)
- 4) Comparator value greater than 0 (the value, if it exists, is in the right subtree)


Find queries:


find(14)


find(25)


find(37)


find(17)

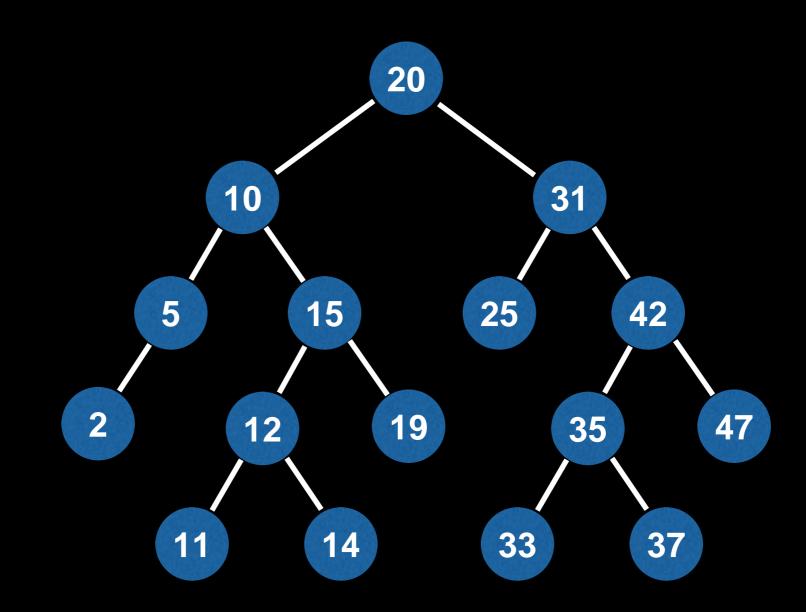


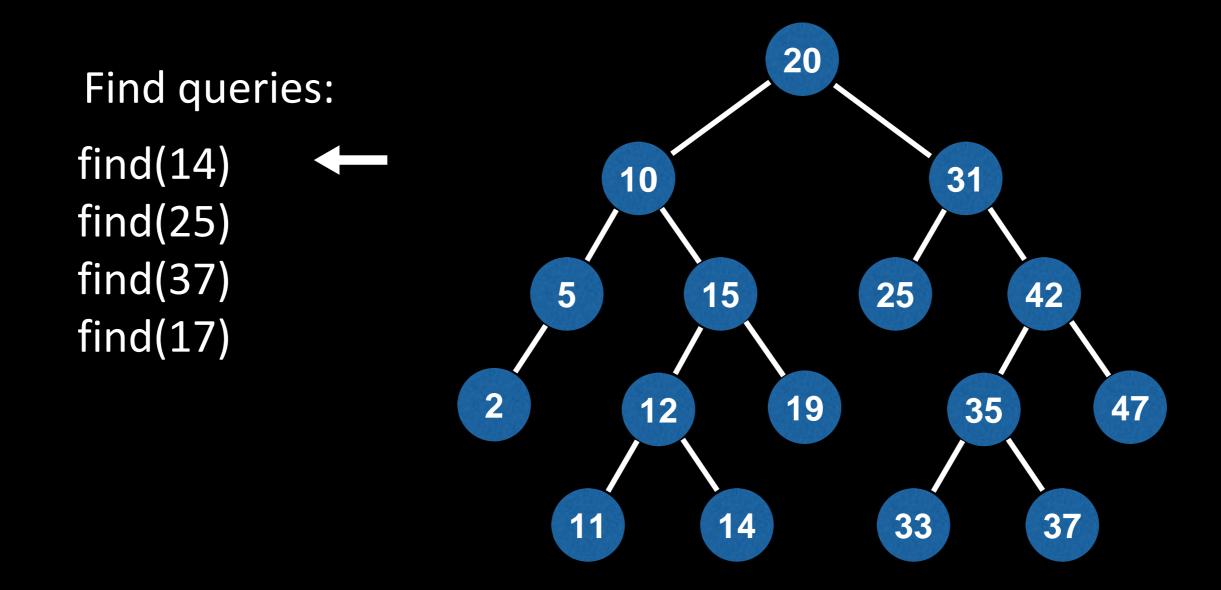


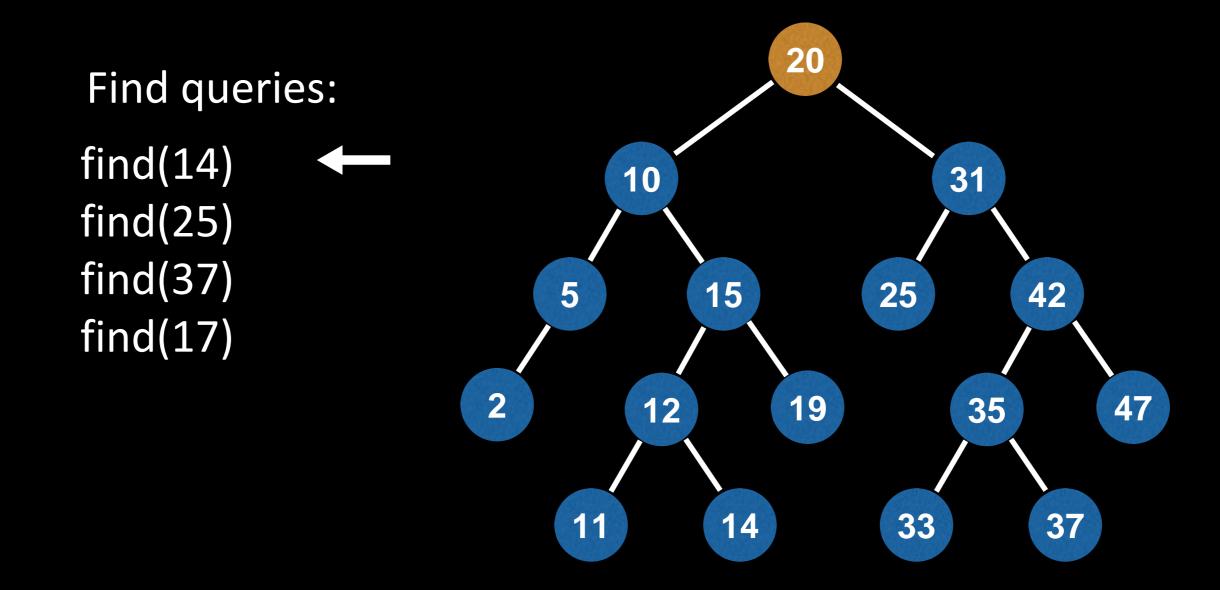


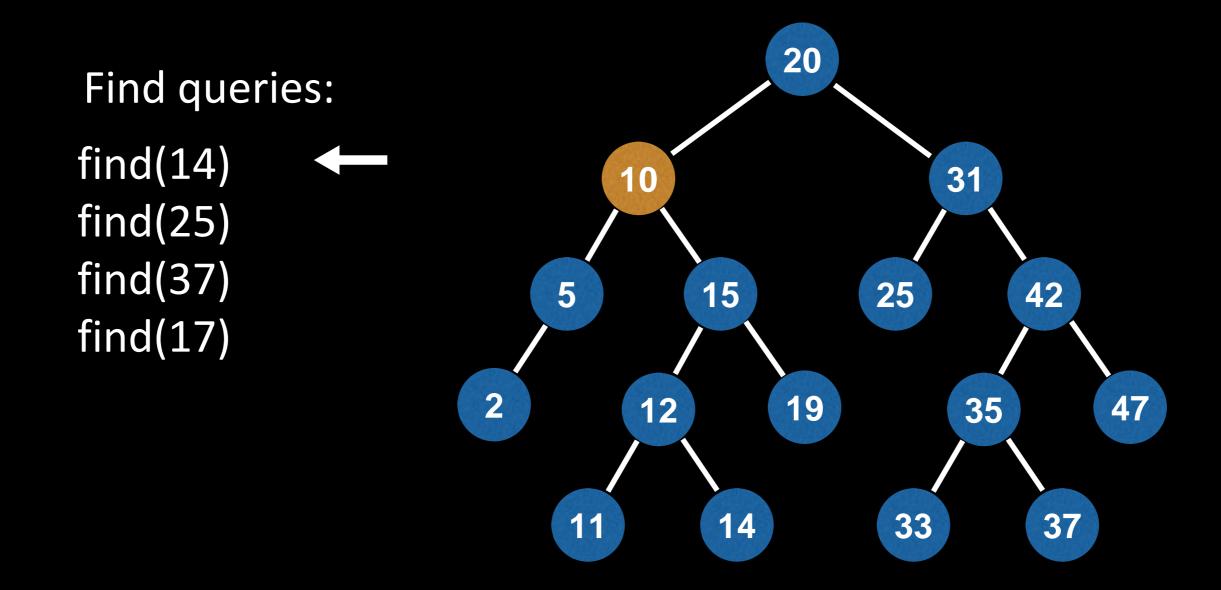


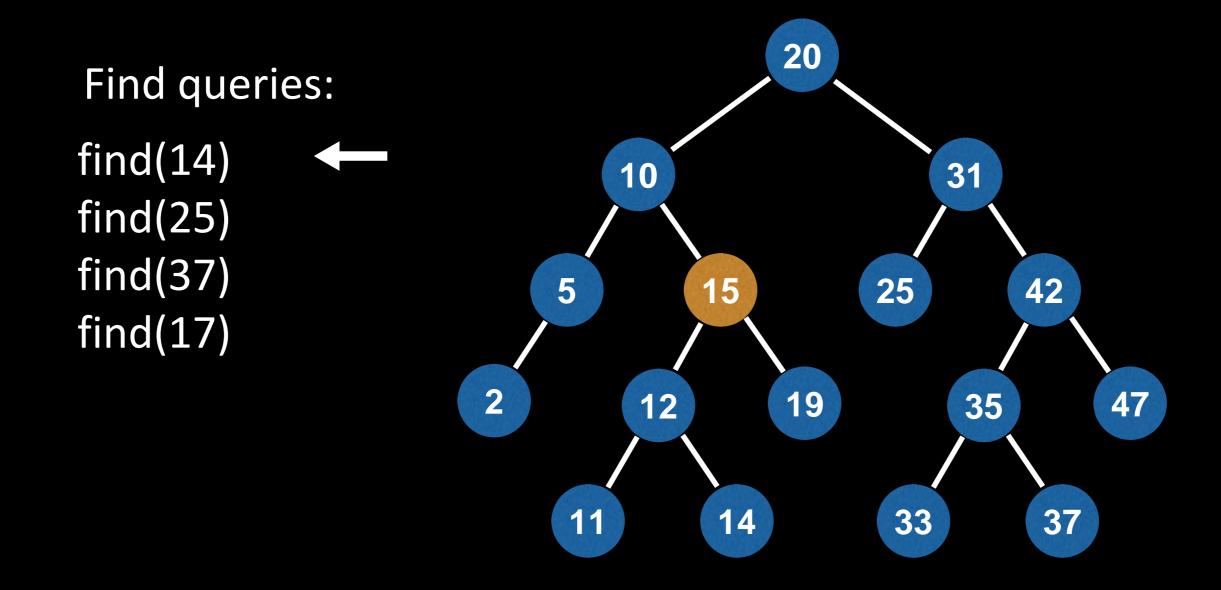


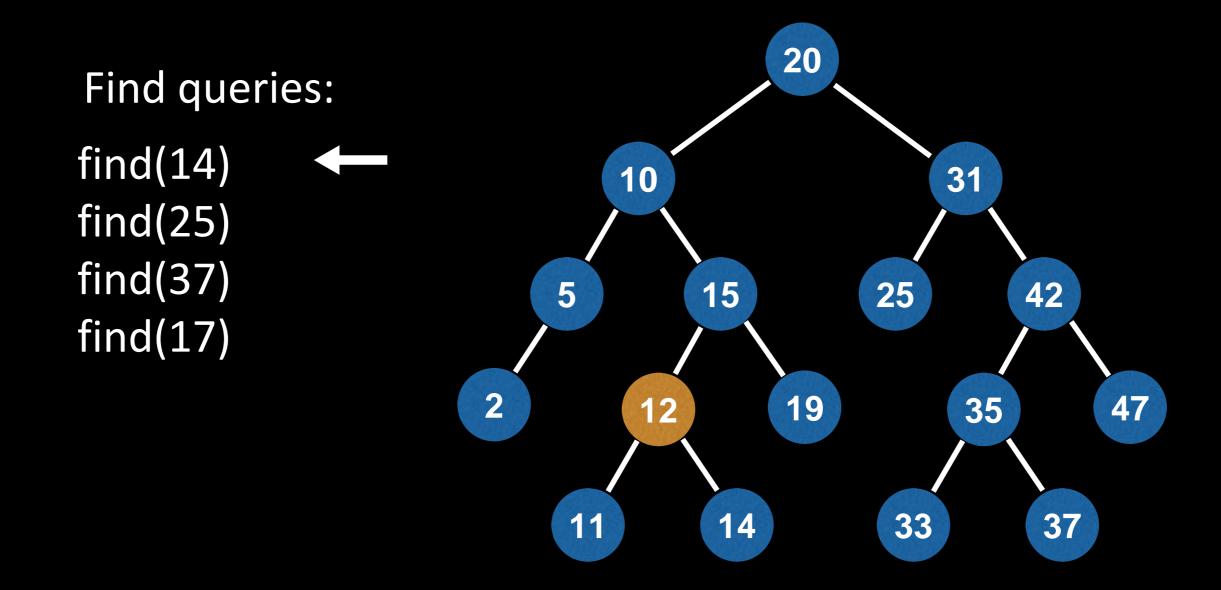


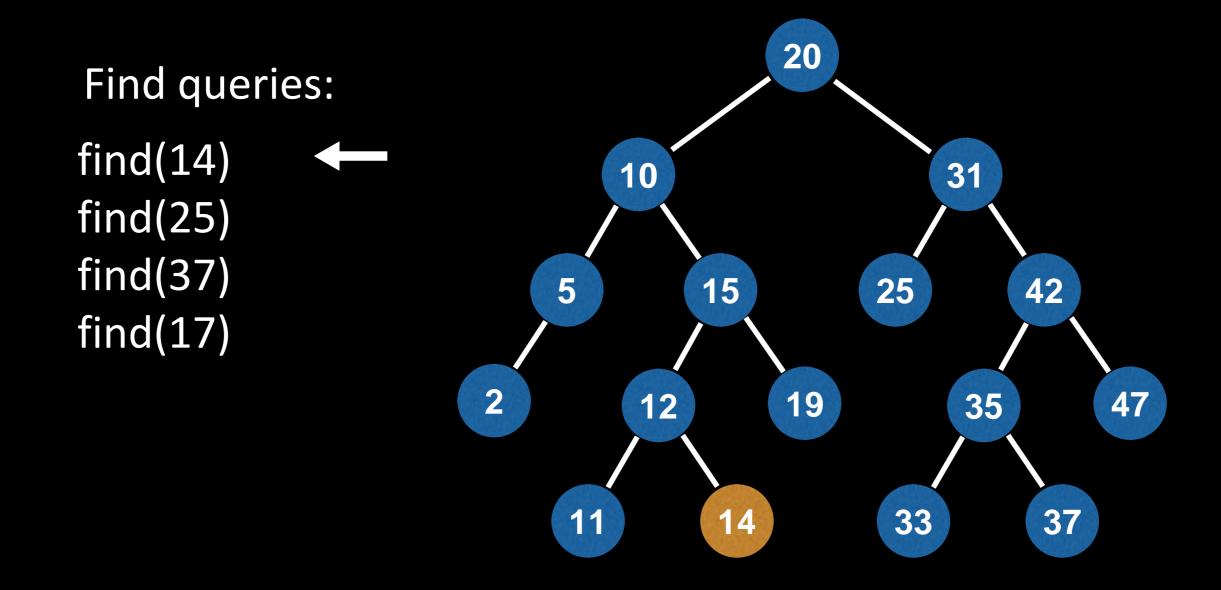


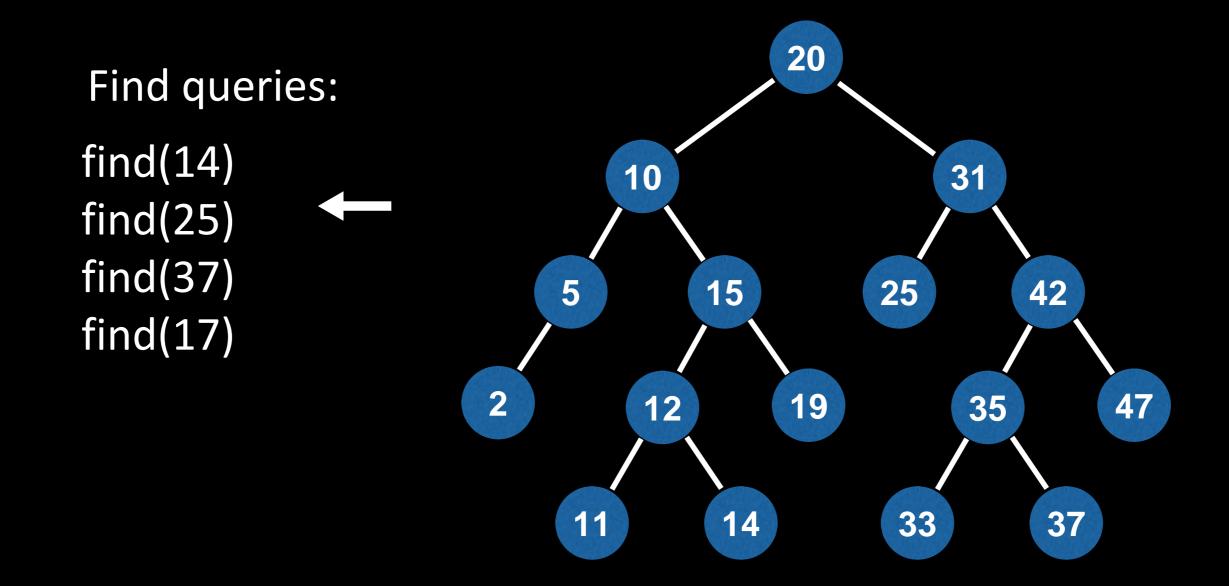


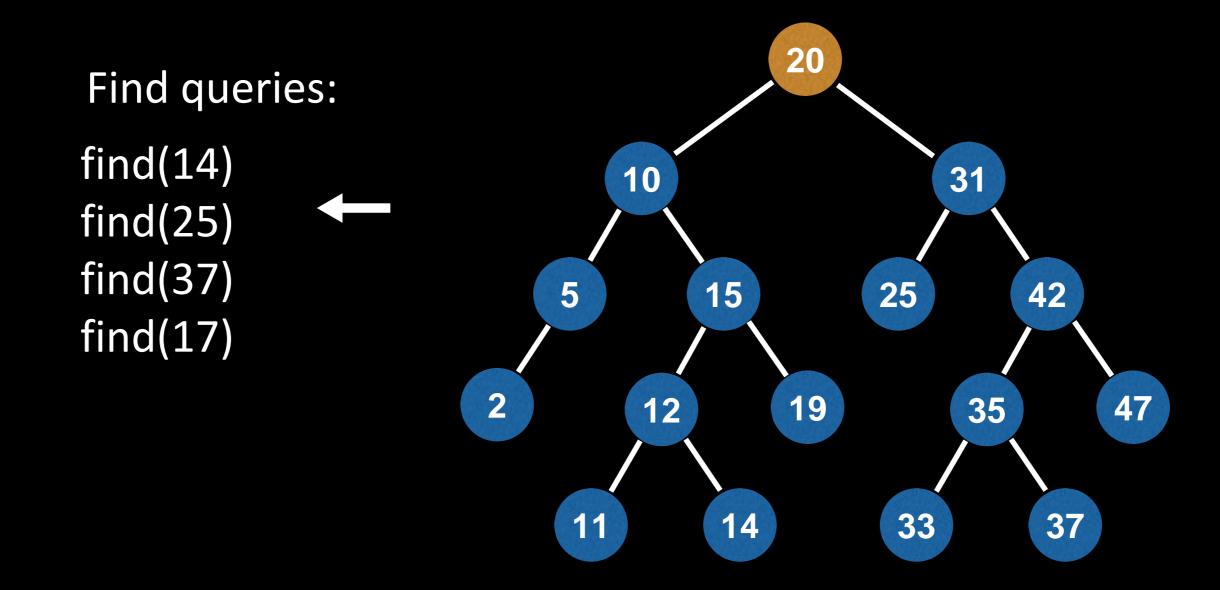


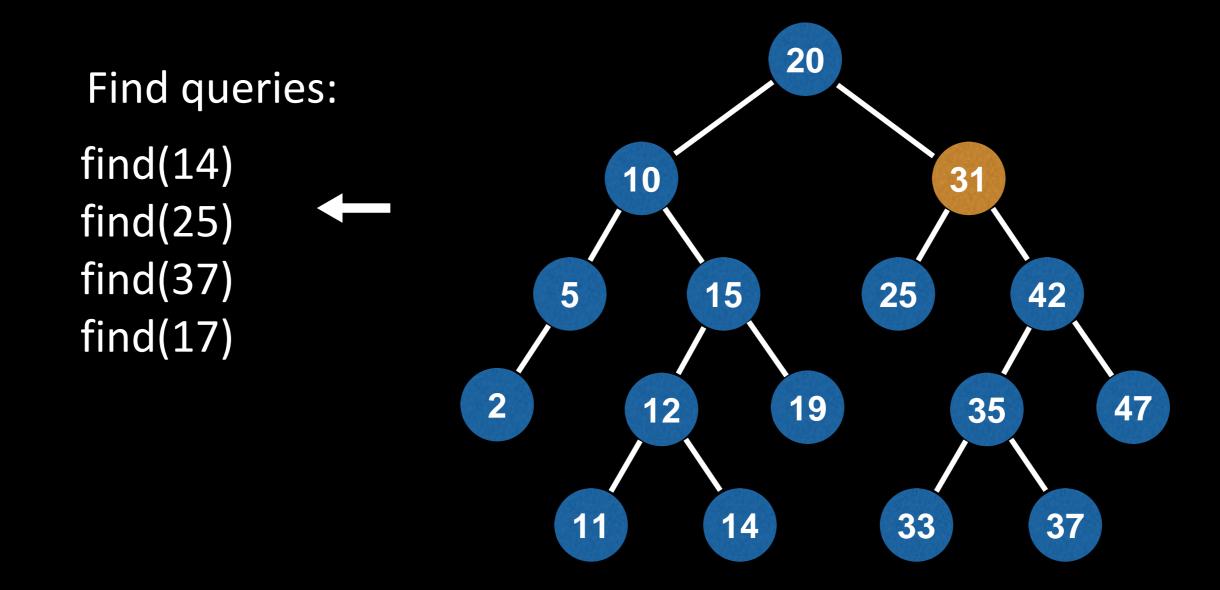


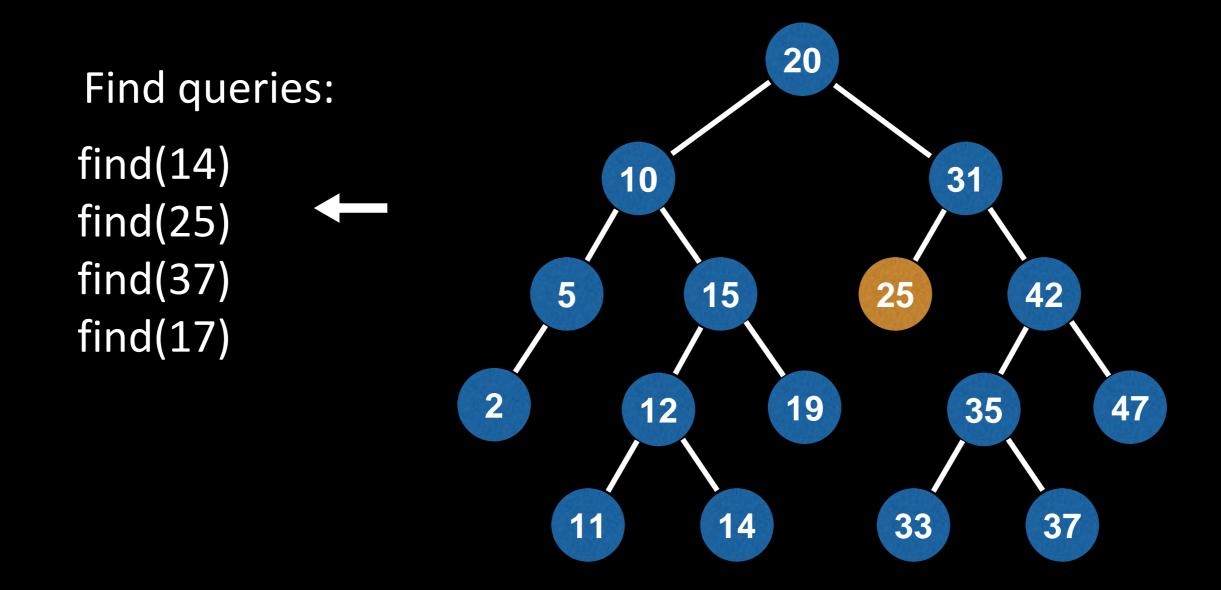


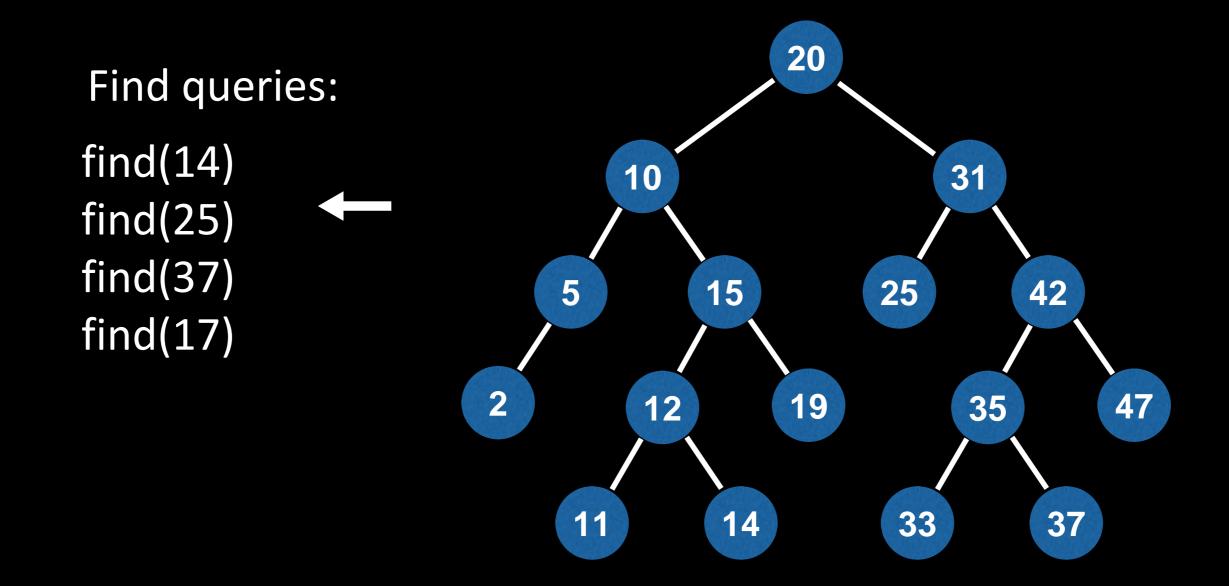


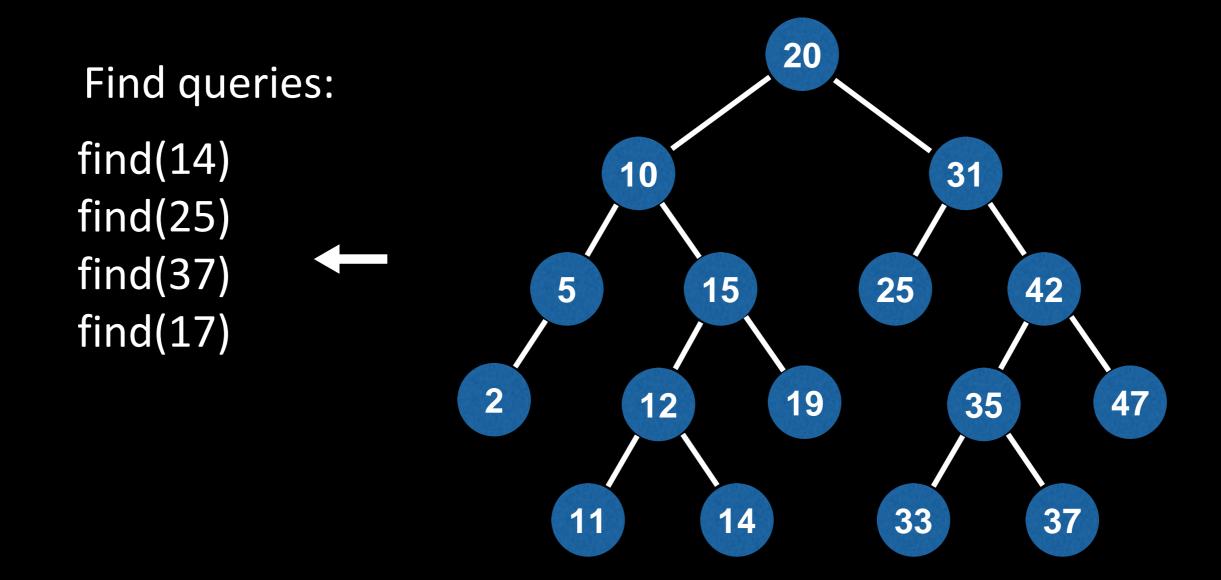


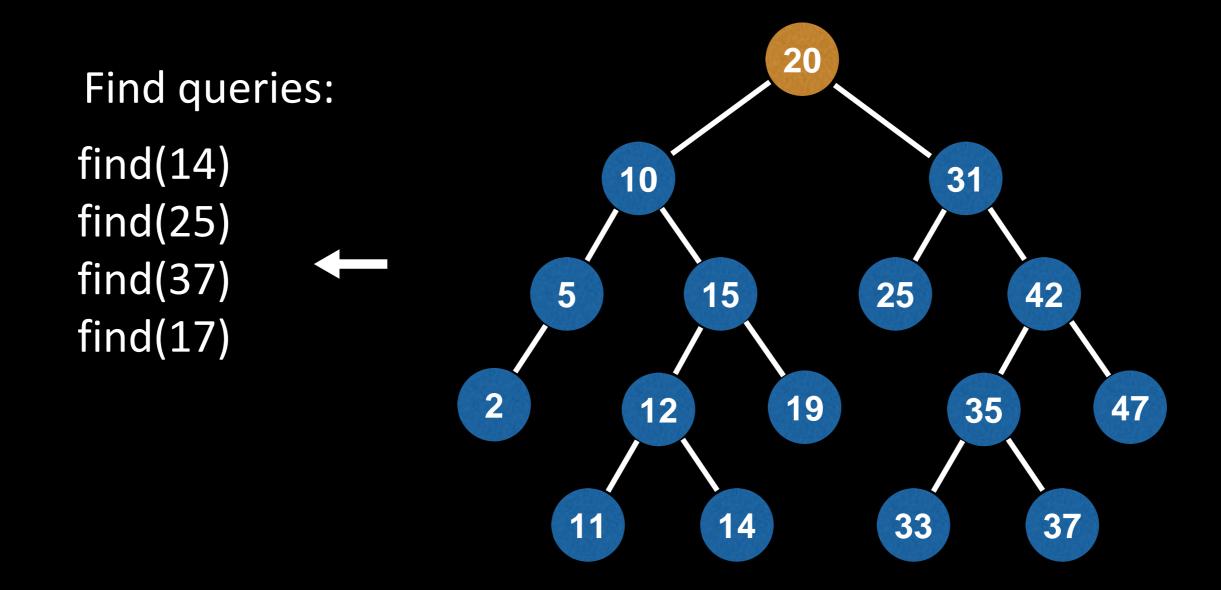


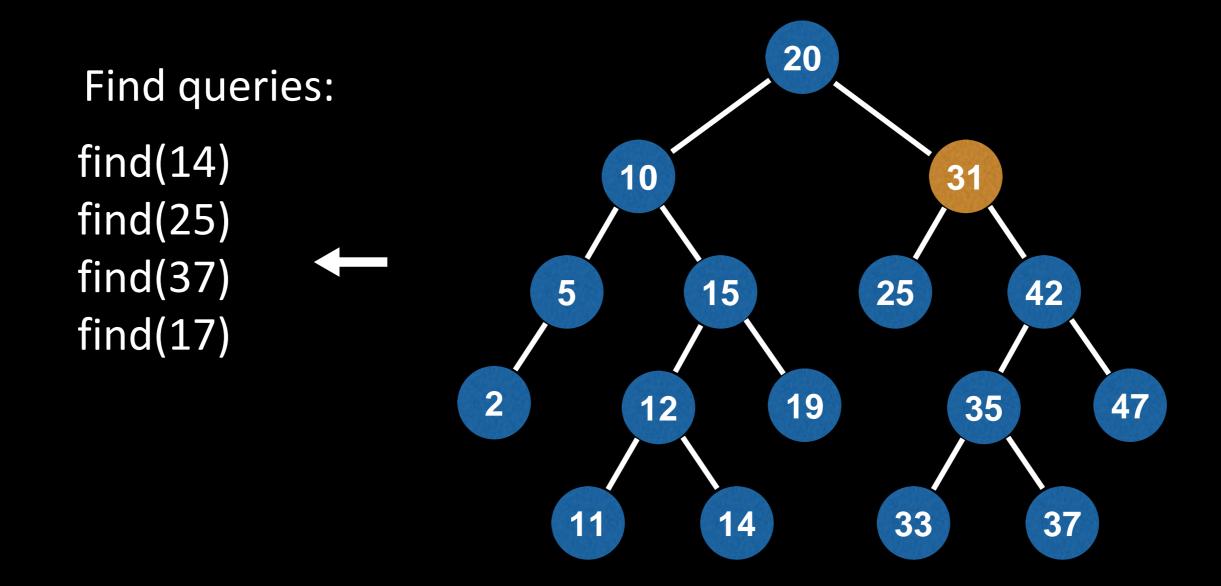


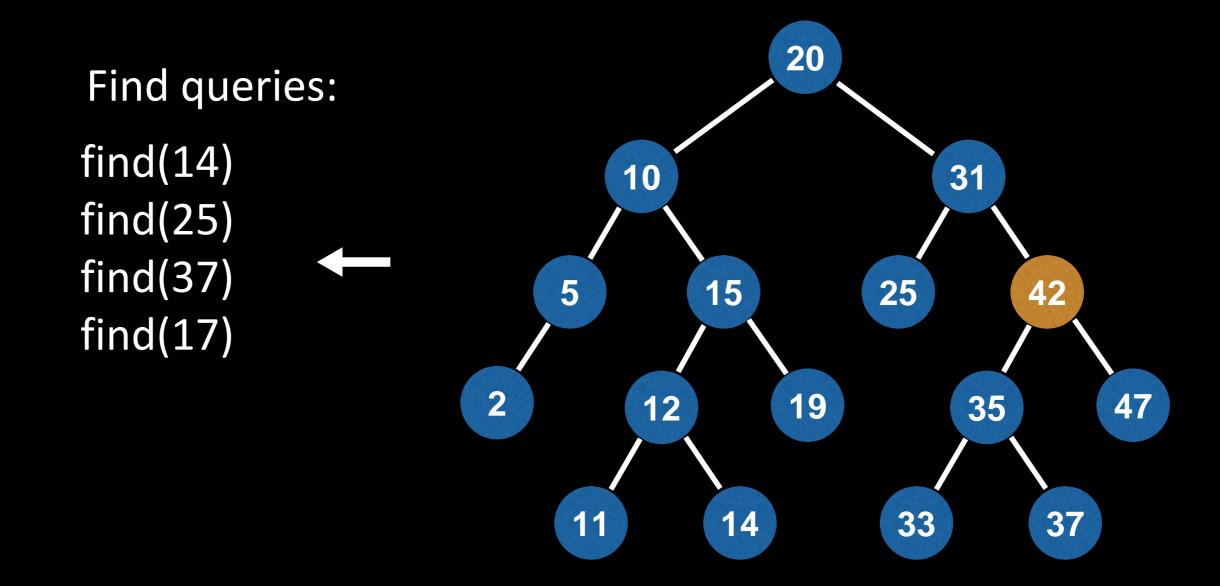


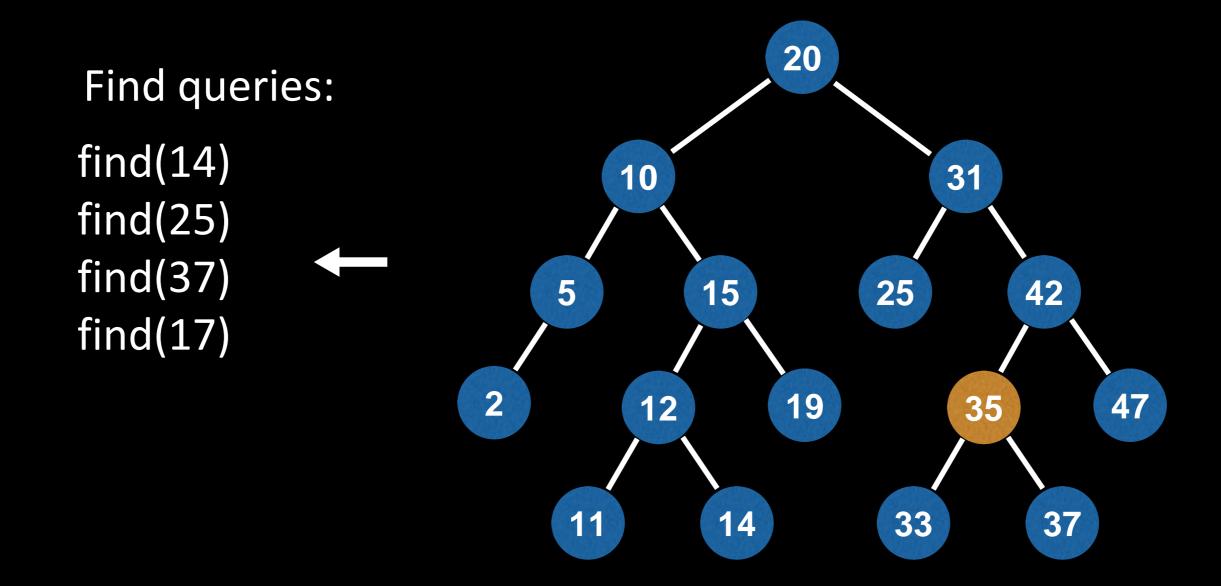


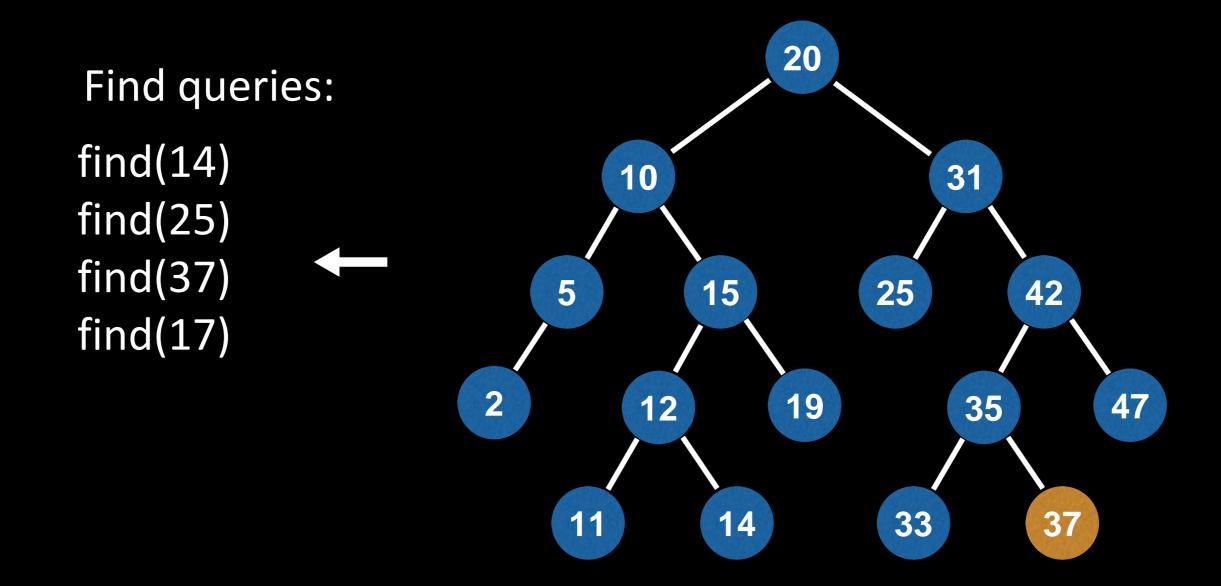


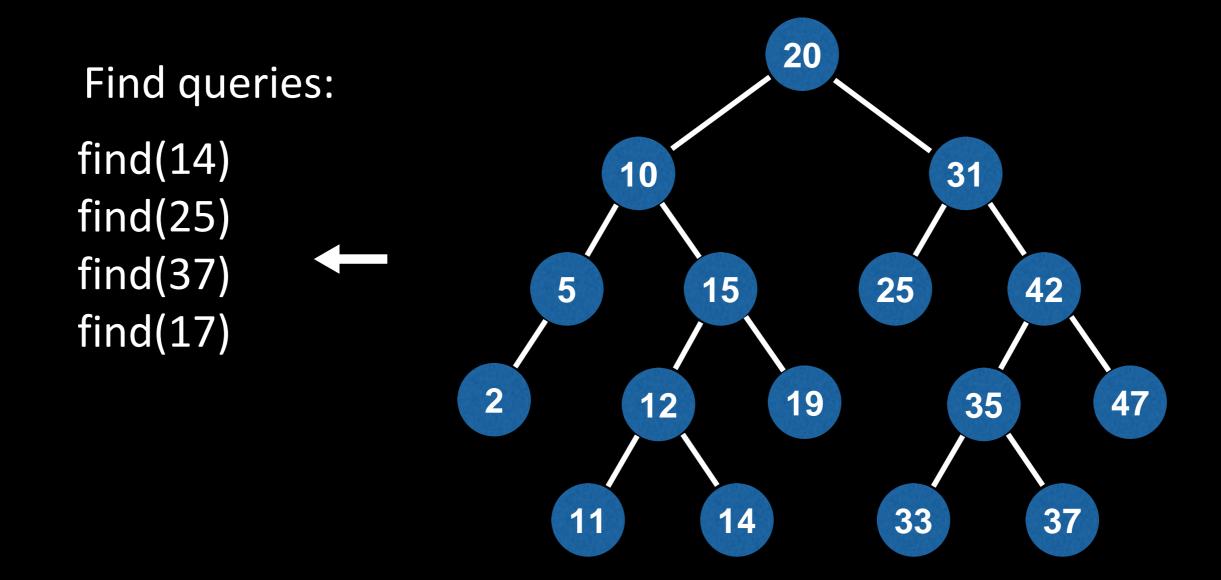


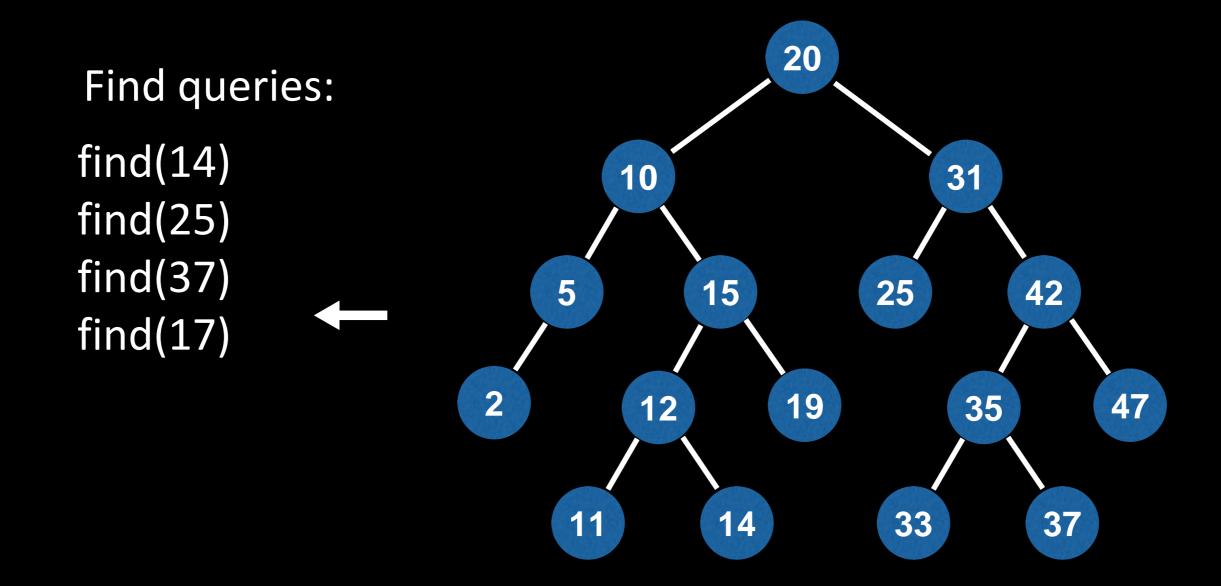


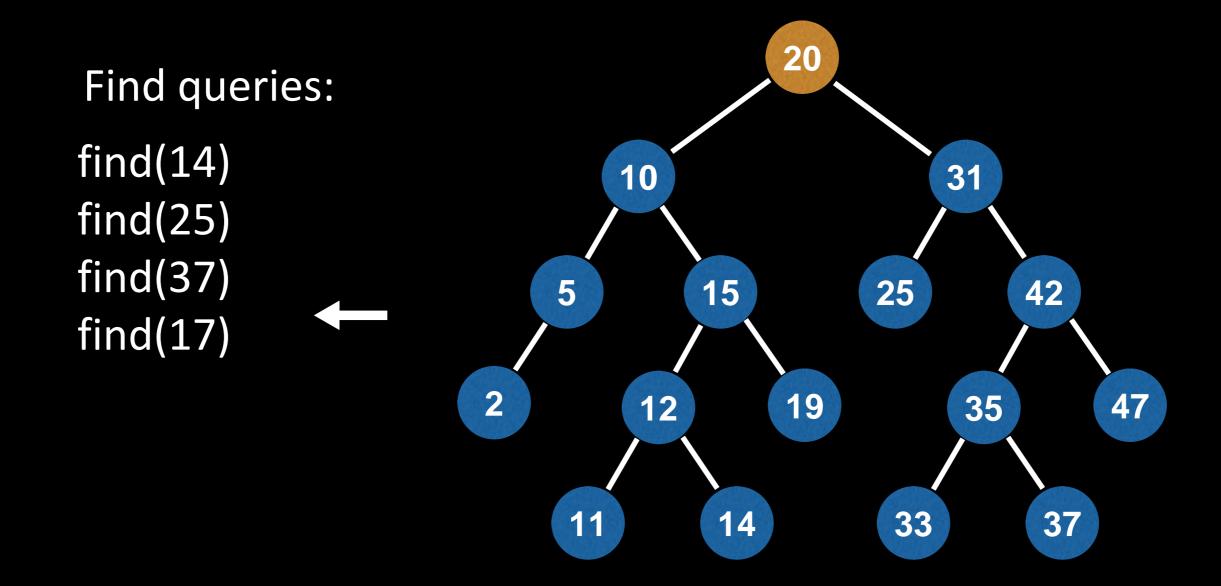

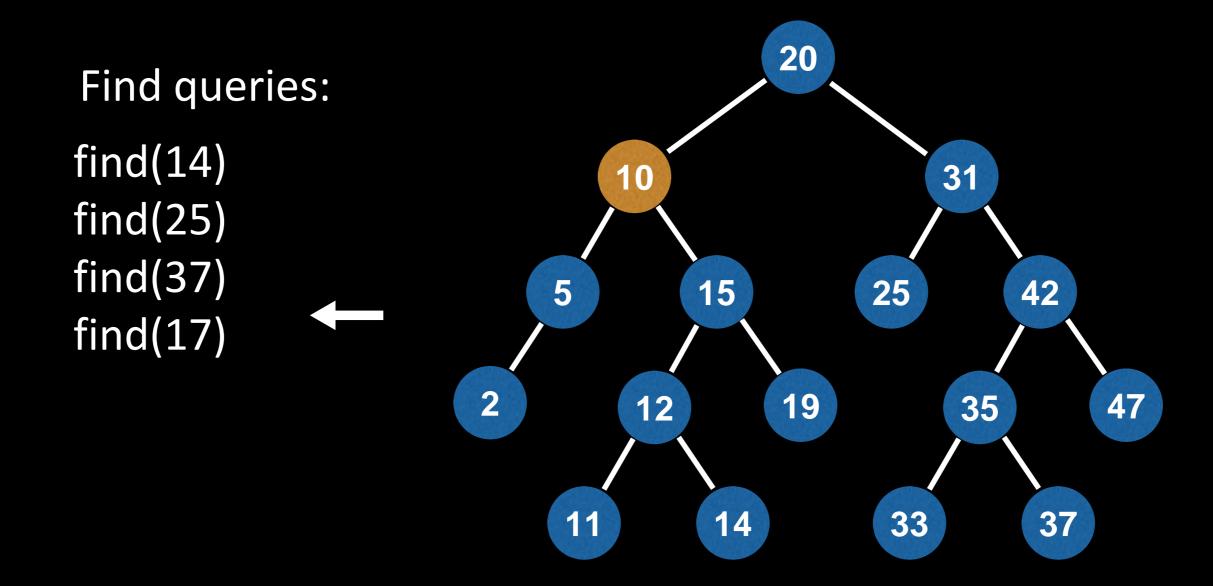

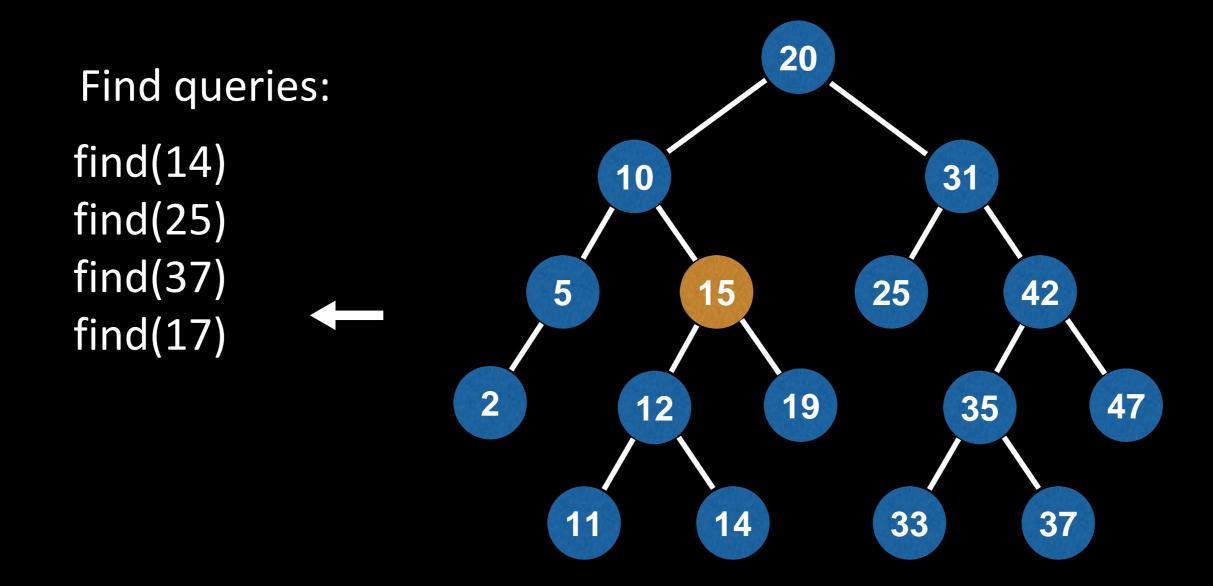


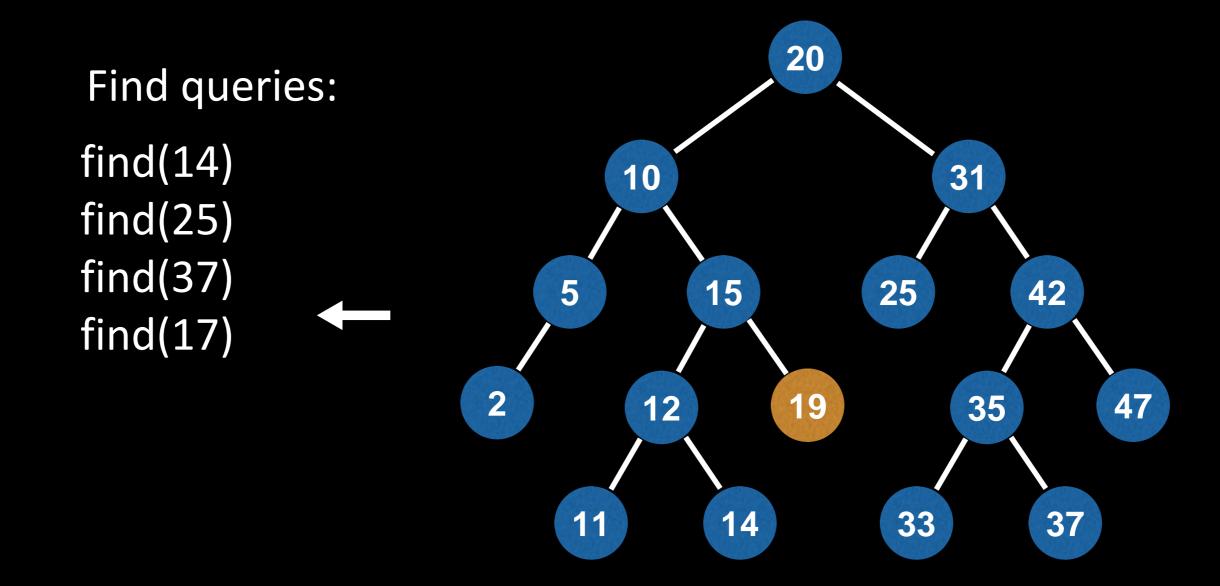

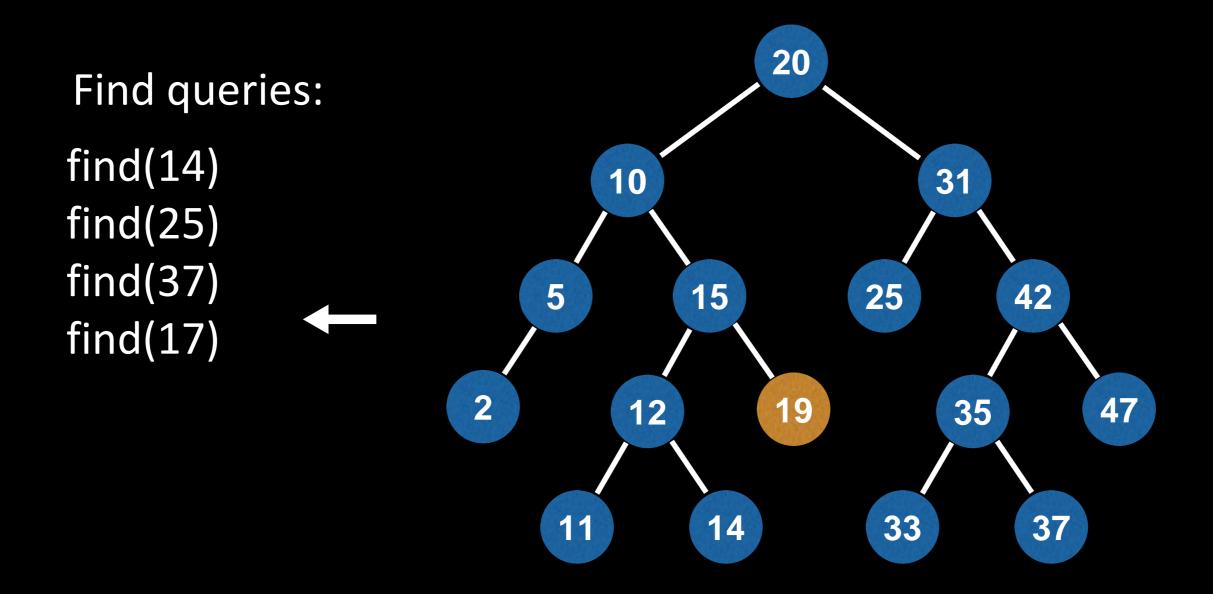

At this point we discover that 17 does not exist!

Remove phase

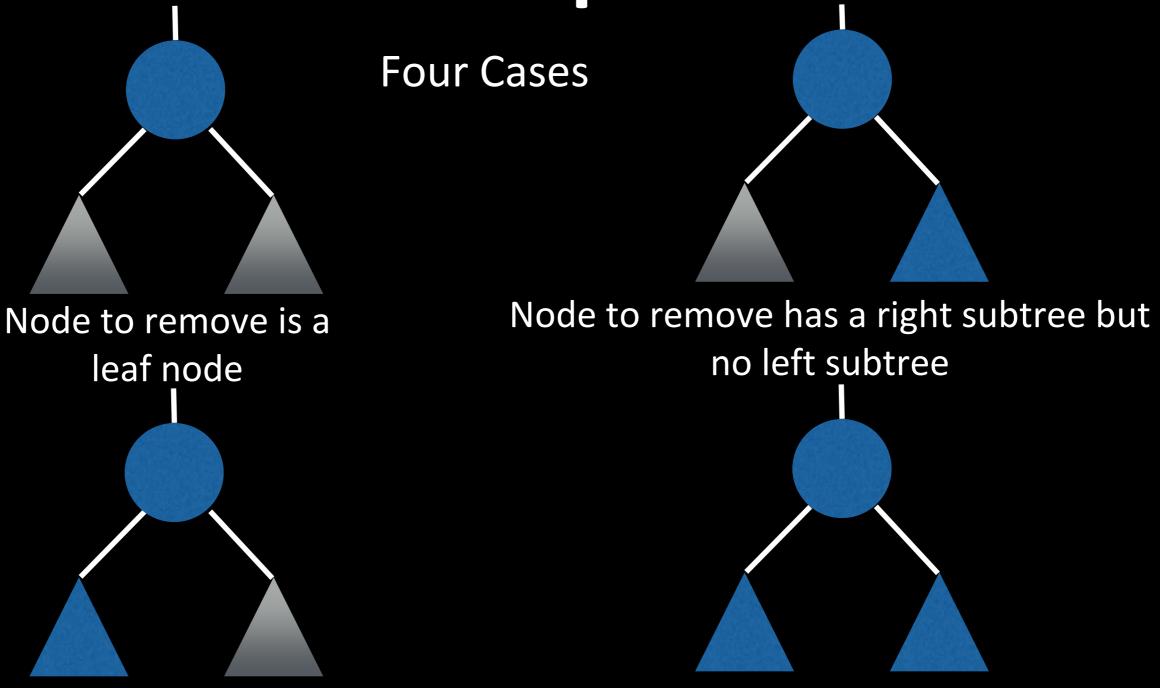


Node to remove has a left subtree but no right subtree


Node to remove has a both a left subtree and a right subtree

Remove phase

Case I: Leaf node


If the node we wish to remove is a leaf node then we may do so without side effect :)

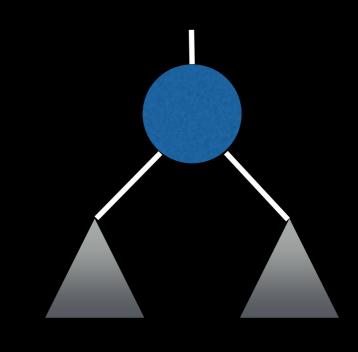

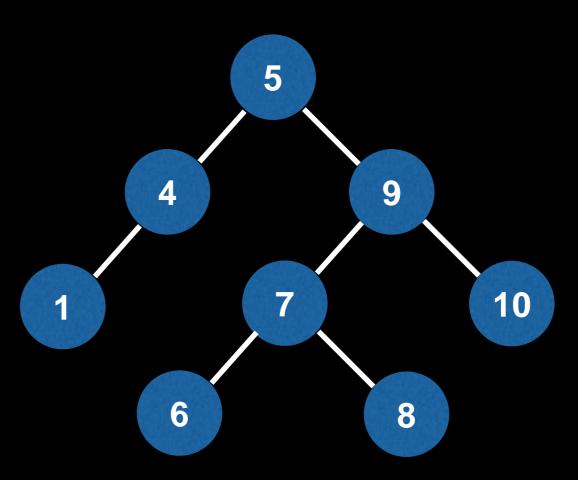


Case I: Leaf node

If the node we wish to remove is a leaf node then we may do so without side effect :)

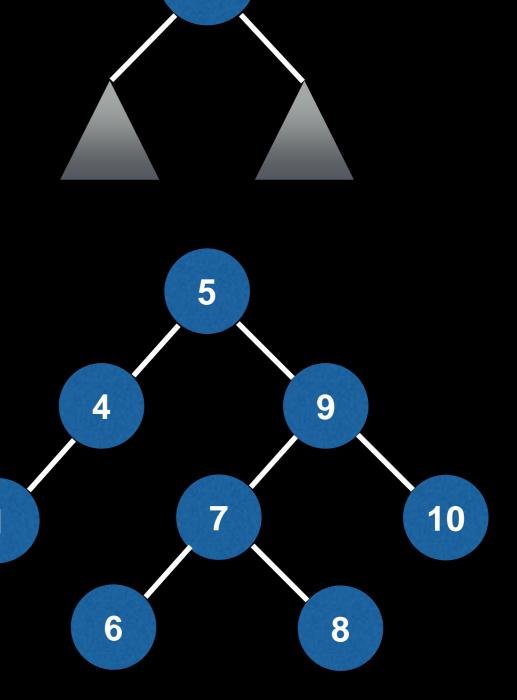


Case I: Leaf node

If the node we wish to remove is a leaf node then we may do so without side effect :)

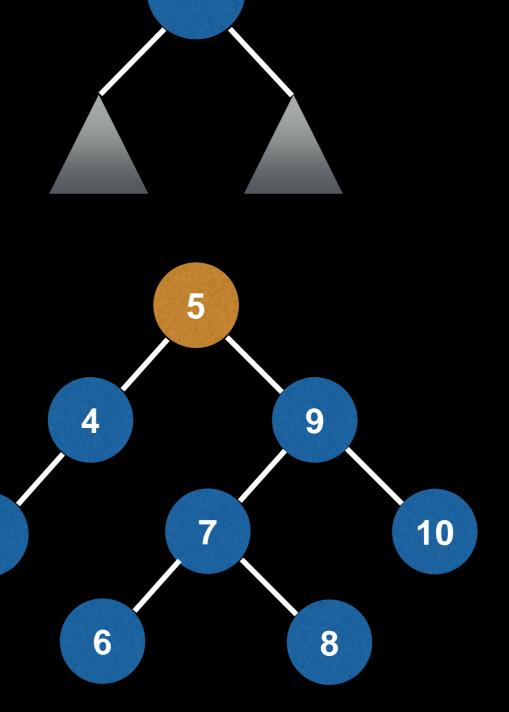


Case I: Leaf node

If the node we wish to remove is a leaf node then we may do so without side effect :)

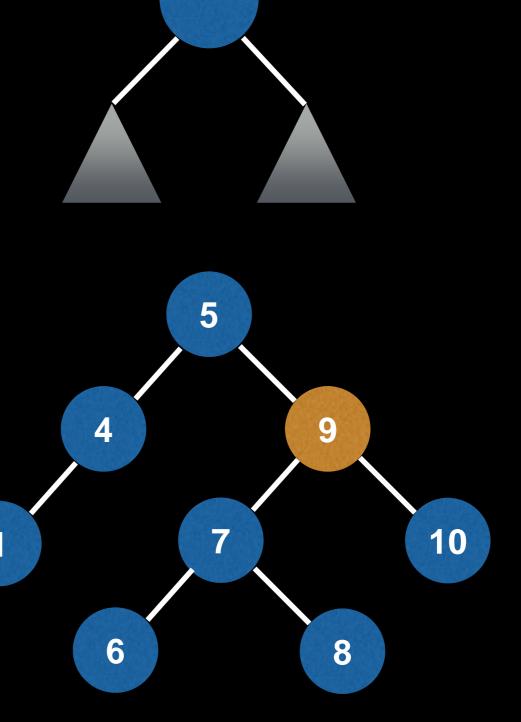


Case I: Leaf node

If the node we wish to remove is a leaf node then we may do so without side effect :)

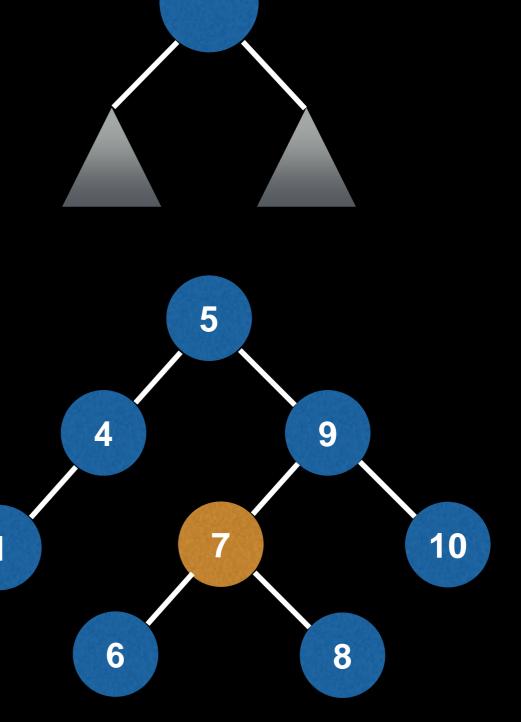


Case I: Leaf node

If the node we wish to remove is a leaf node then we may do so without side effect :)

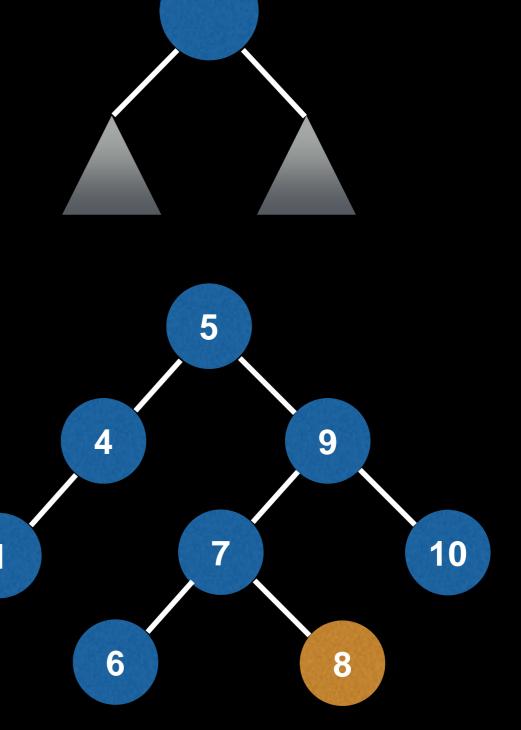


Case I: Leaf node

If the node we wish to remove is a leaf node then we may do so without side effect :)

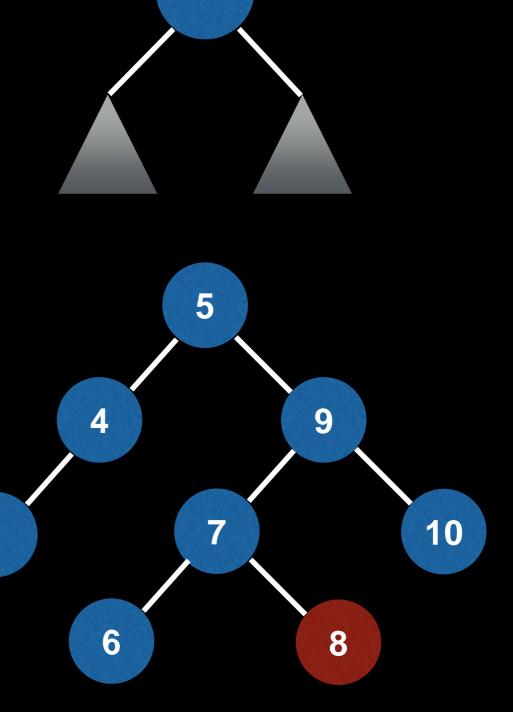


Case I: Leaf node

If the node we wish to remove is a leaf node then we may do so without side effect :)

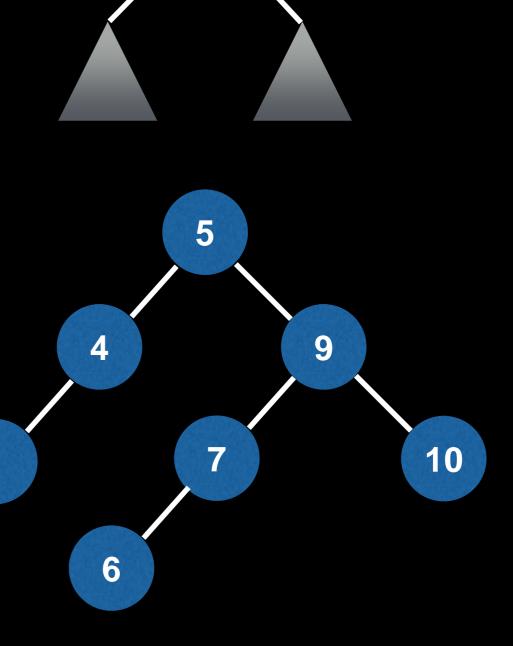



Cases II & III: either the left/right child node is a subtree

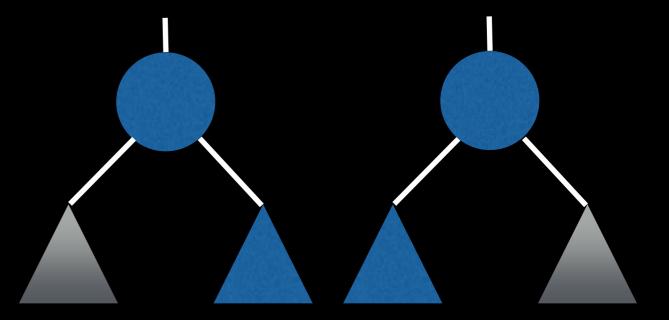



The successor of the node we are trying to remove in these cases will be the root node of the left/right subtree.


hat you are removing the root node of the BST in which case its immediate child becomes the new root a

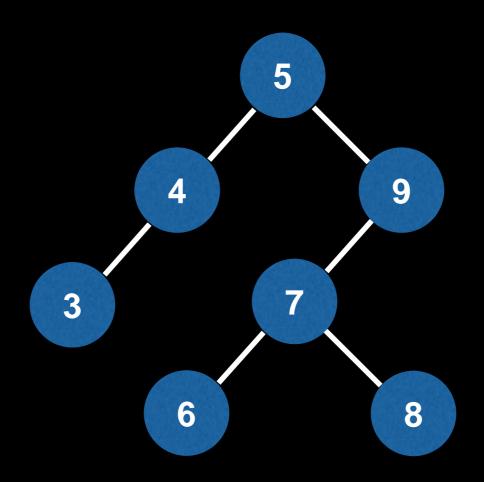


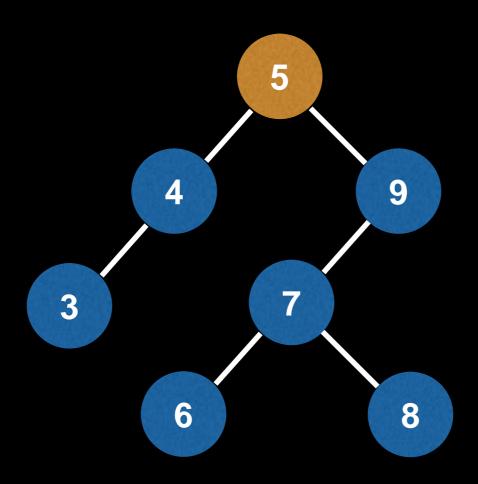


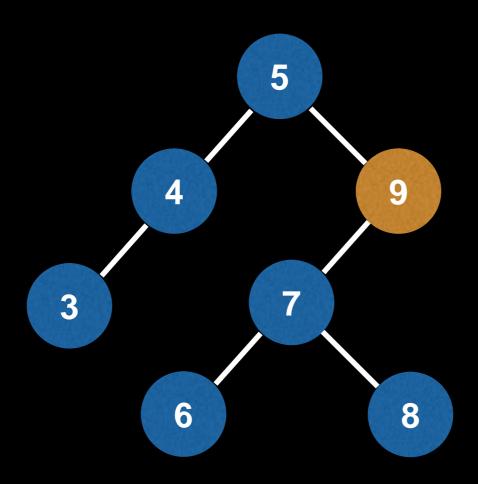


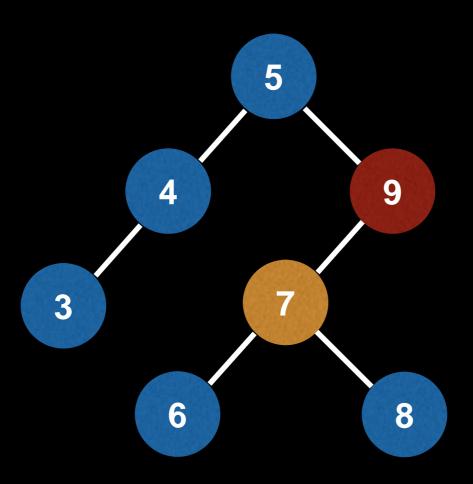


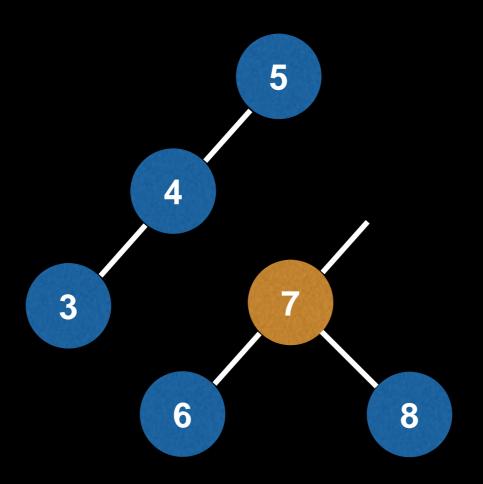


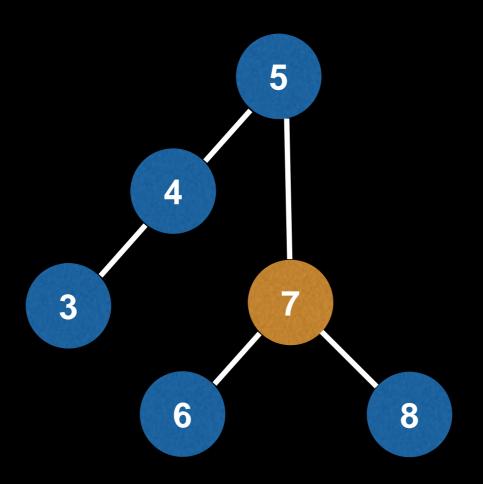


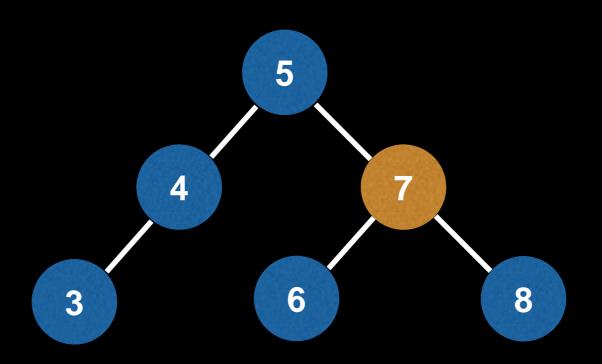


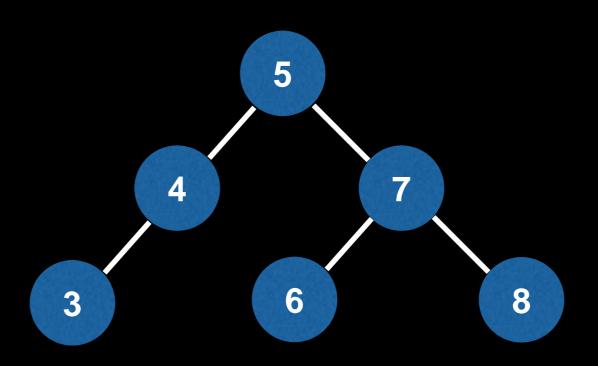


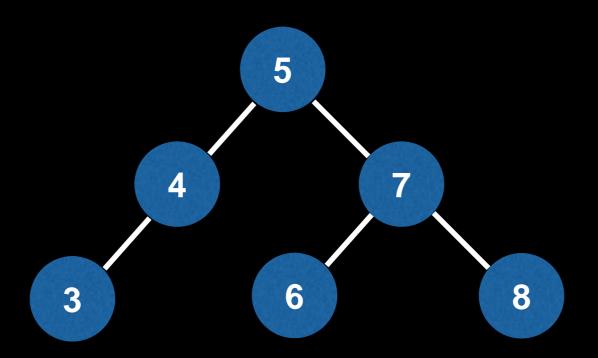


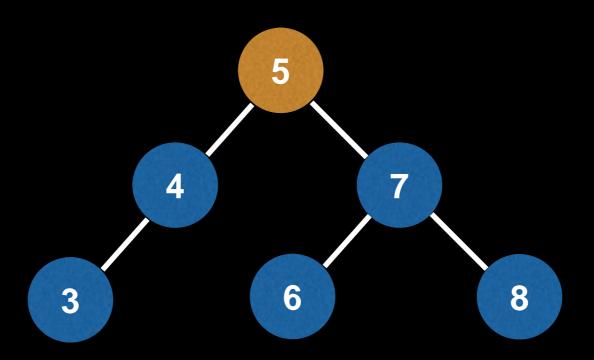


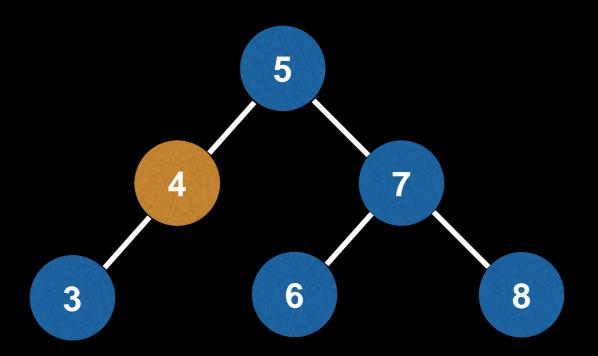


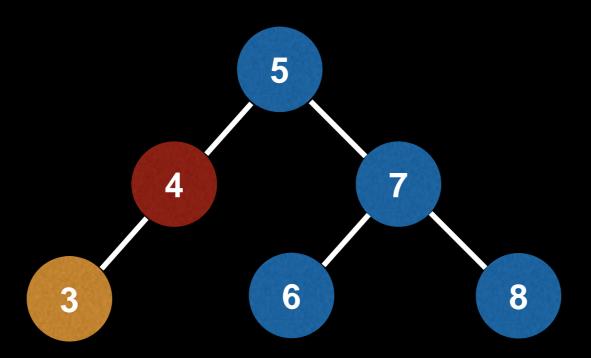

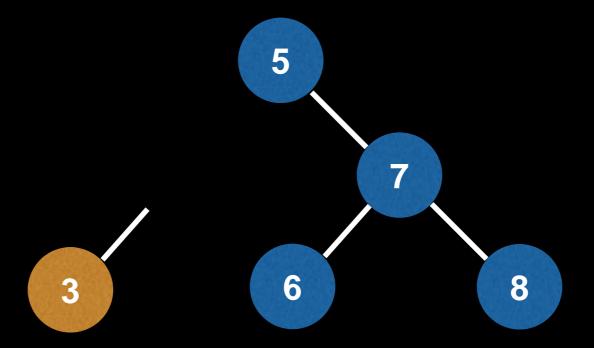


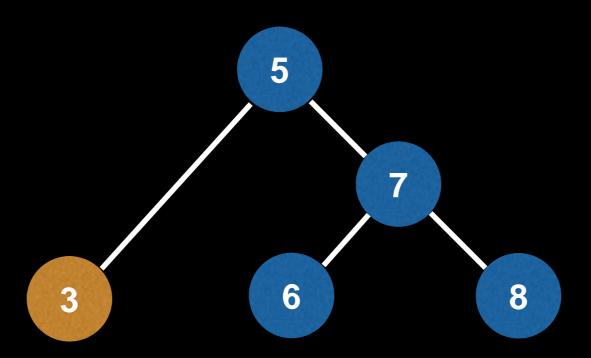

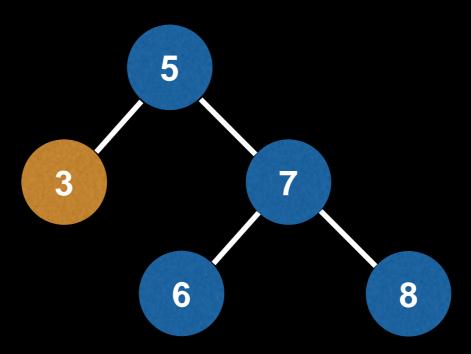

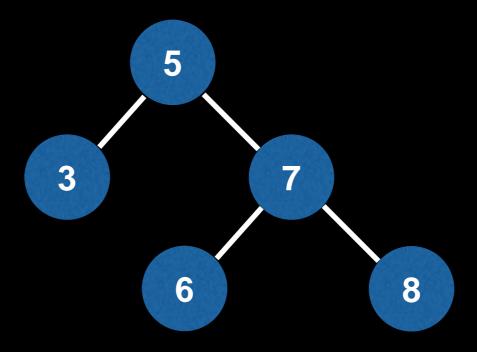


Case IV: Node to remove has both a left subtree and a right subtree



Q: In which subtree will the successor of the node we are trying to remove be?

Case IV: Node to remove has both a left subtree and a right subtree



Q: In which subtree will the successor of the node we are trying to remove be?

A: The answer is both! The successor can either be the largest value in the left subtree OR the smallest value in the right subtree.

A justification for why there could be more than one successor is:

The largest value in the left subtree satisfies the BST invariant since it:

- 1) Is larger than everything in left subtree. This follows immediately from the definition of being the largest.
- 2) Is smaller than everything in right subtree because it was found in the left subtree


but also...

The **smallest value** in the **right subtree** satisfies the BST invariant since it:


- 1) Is smaller than everything in right subtree. This follows immediately from the definition of being the smallest.
- 2) Is larger than everything in left subtree because it was found in the right subtree


So there are two possible successors, yea!


Let's remove 7

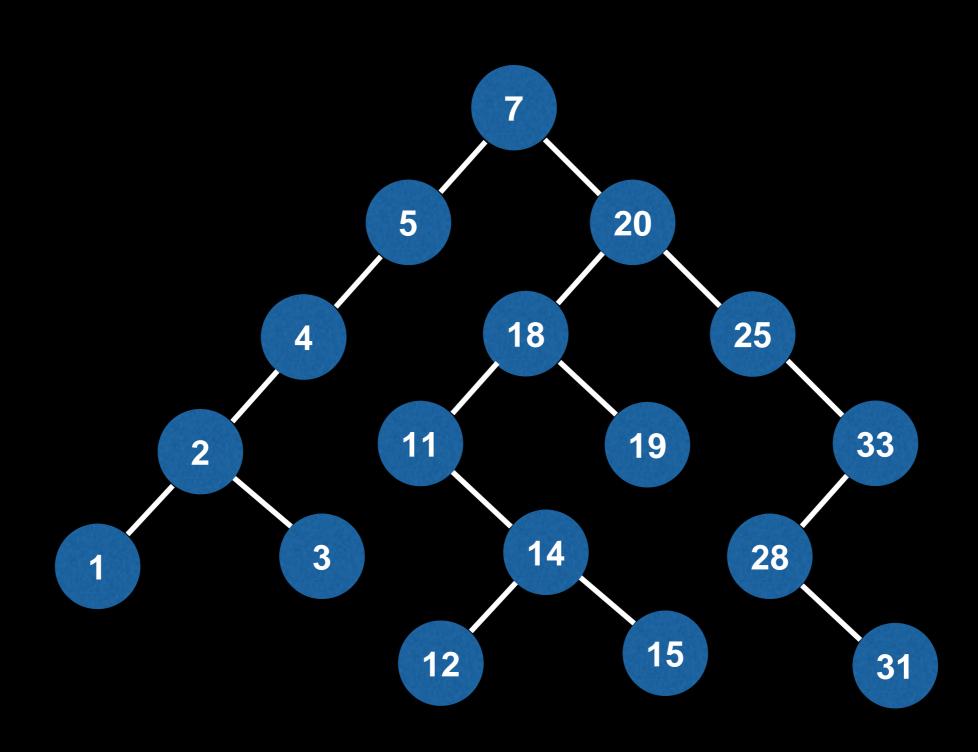



Let's remove 7

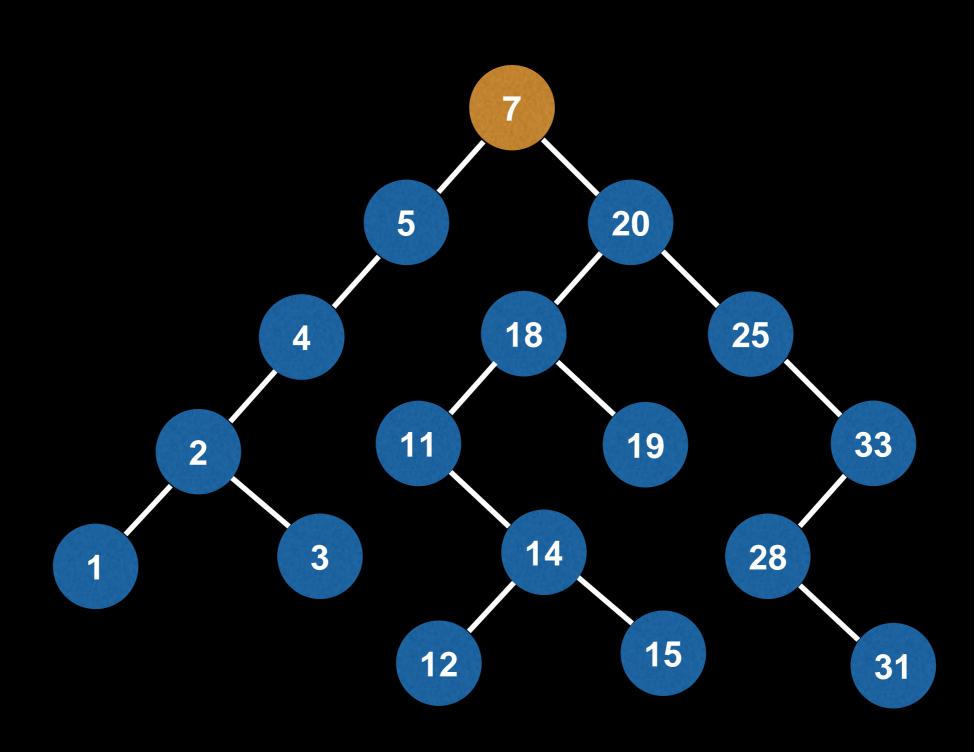

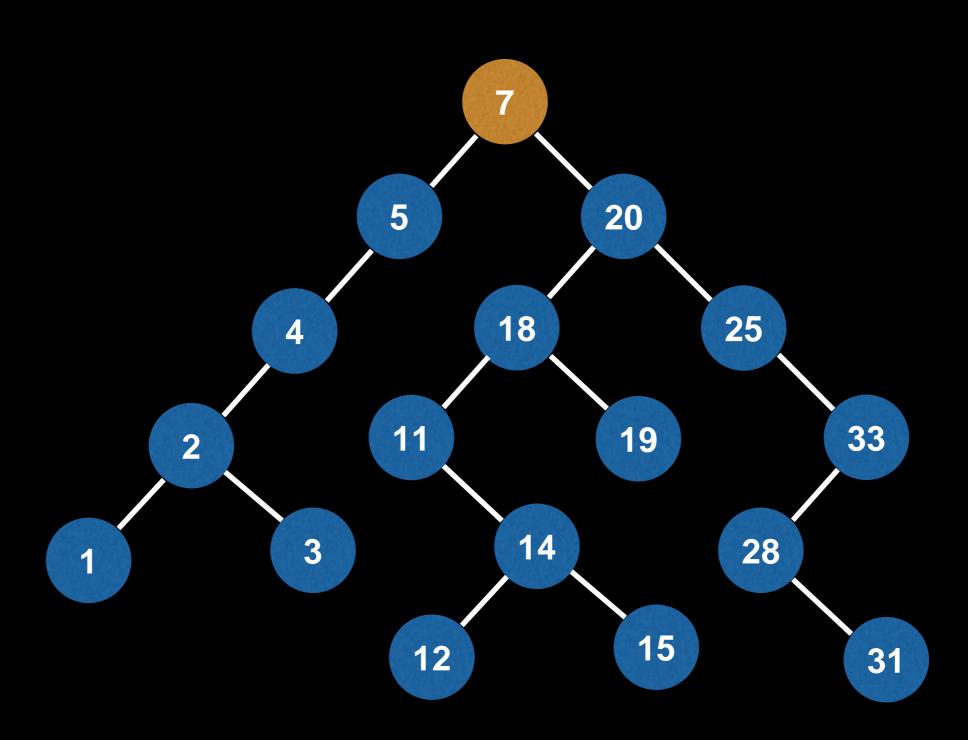


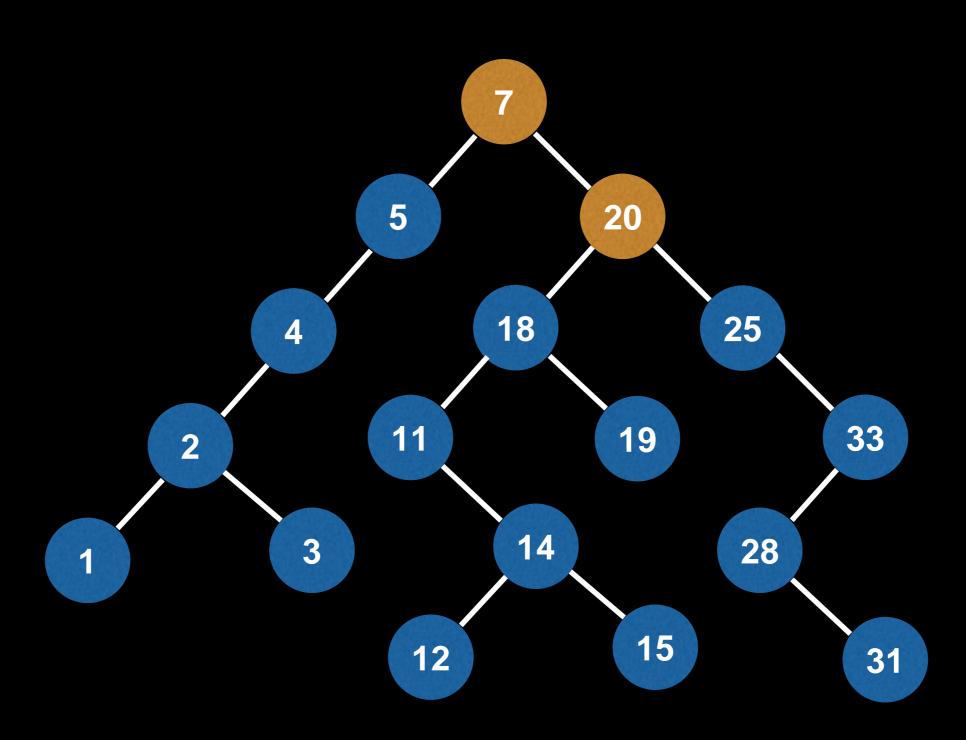

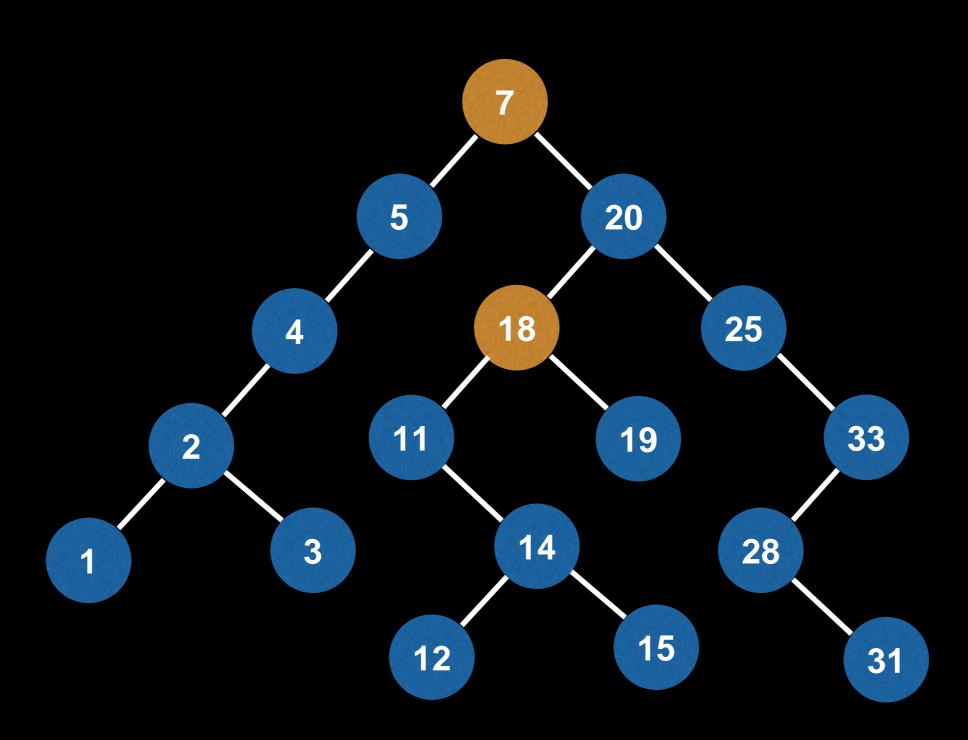


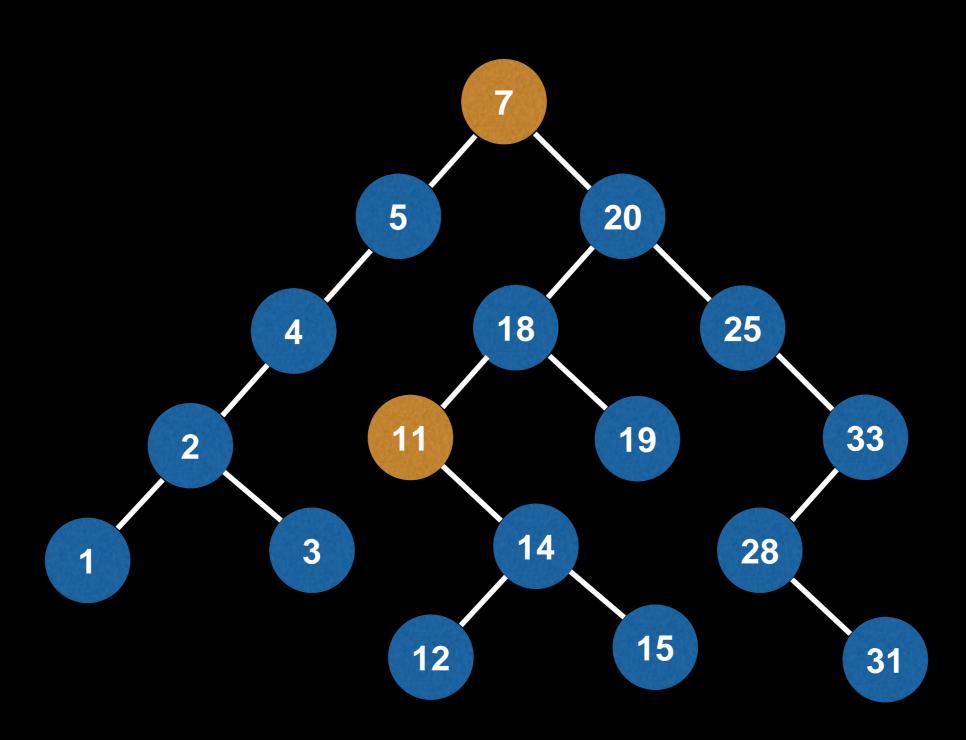



Copy the value from the node found in right subtree (11) to the node we want to remove.

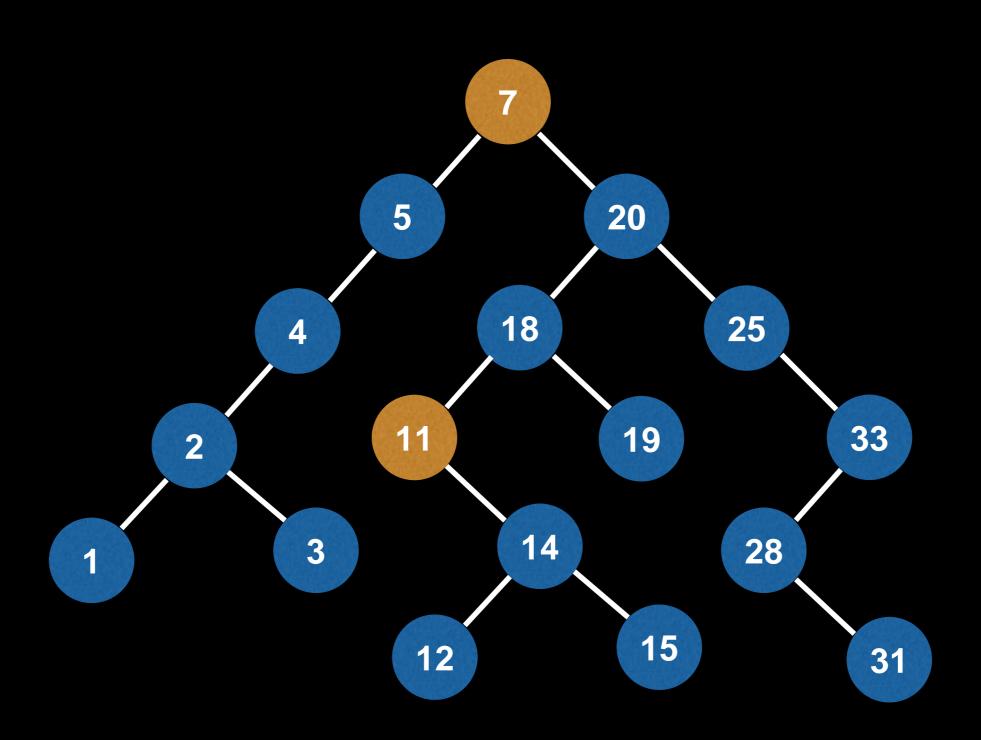



Copy the value from the node found in right subtree (11) to the node we want to remove.

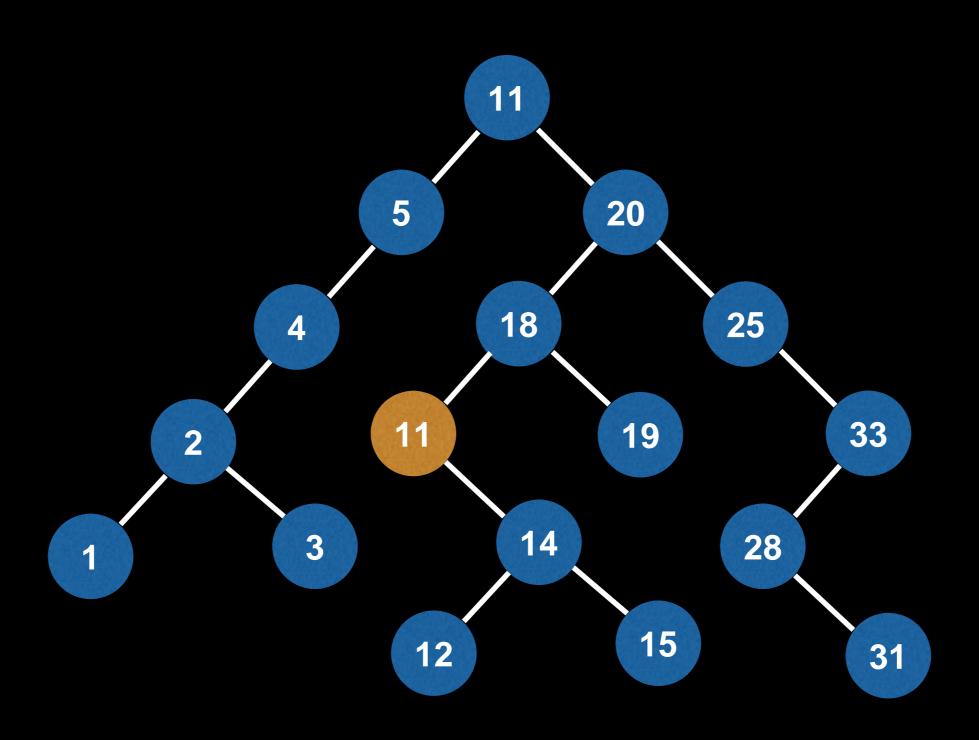


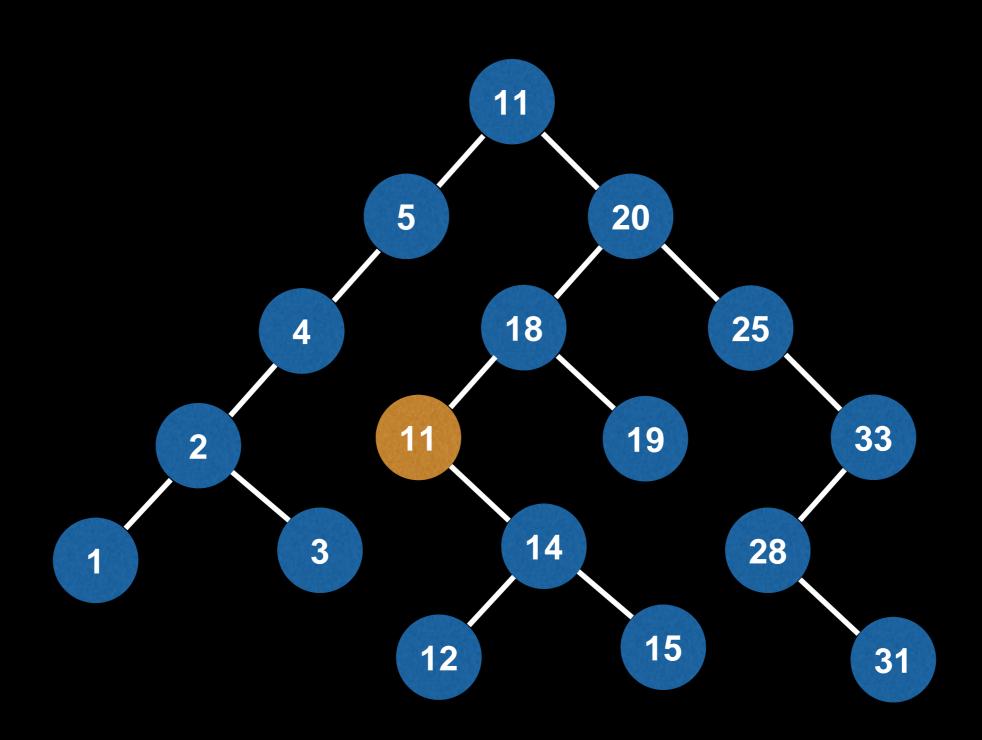


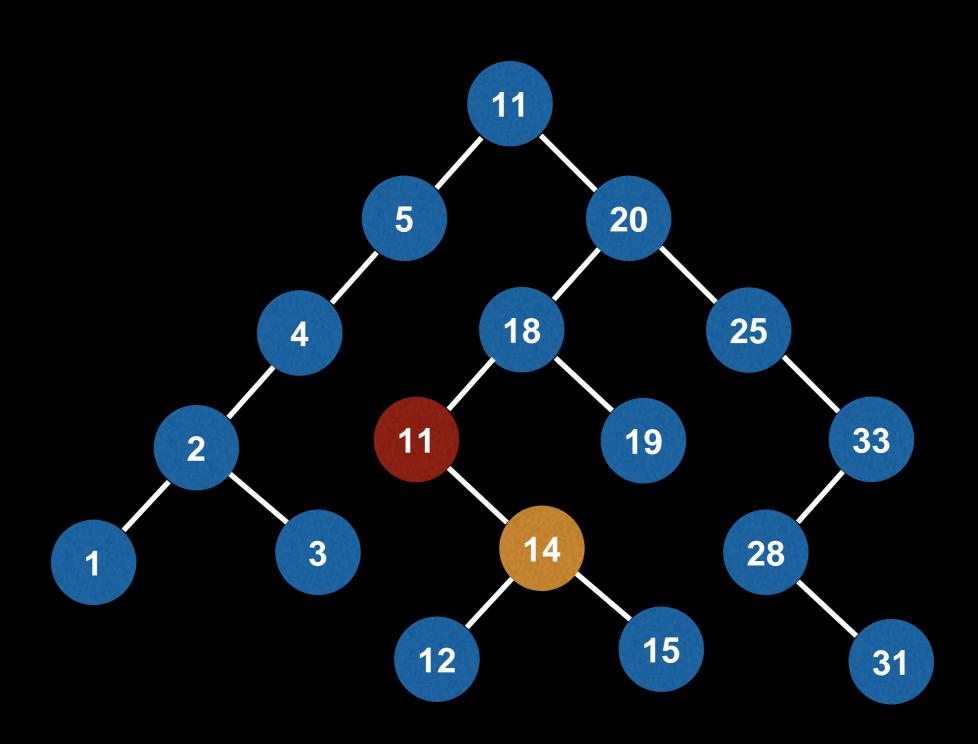

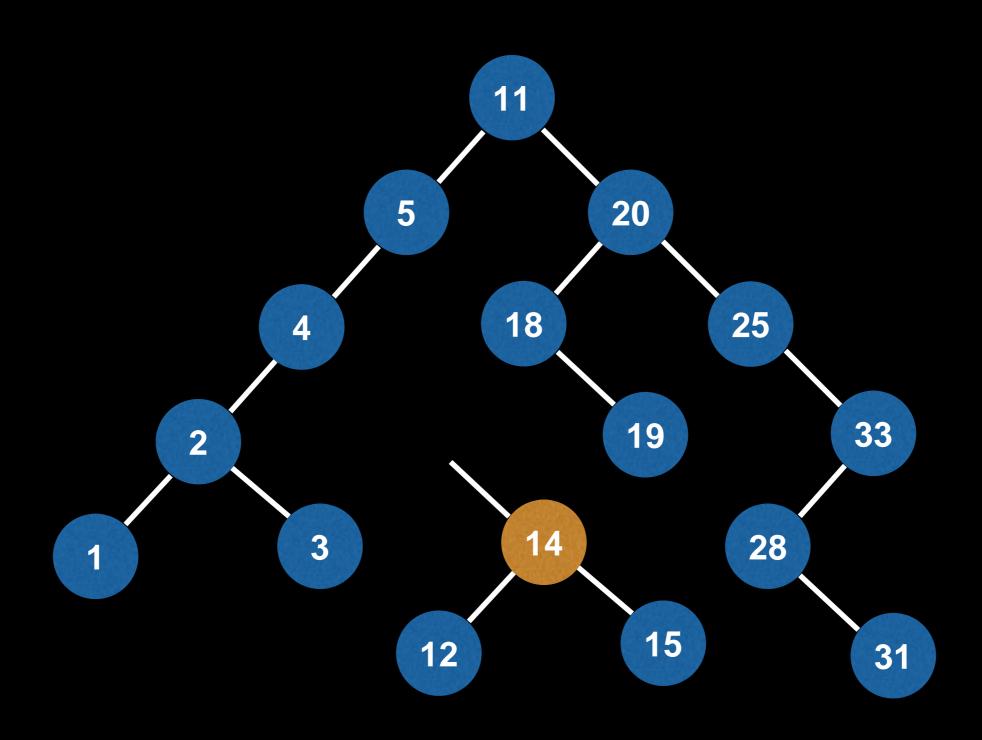


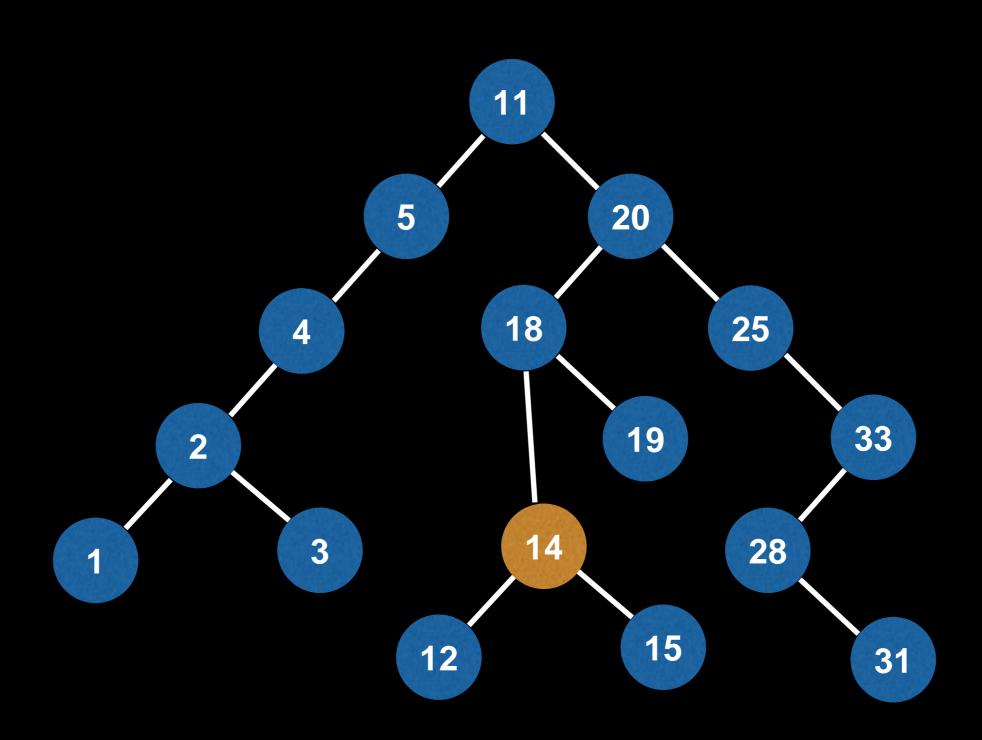

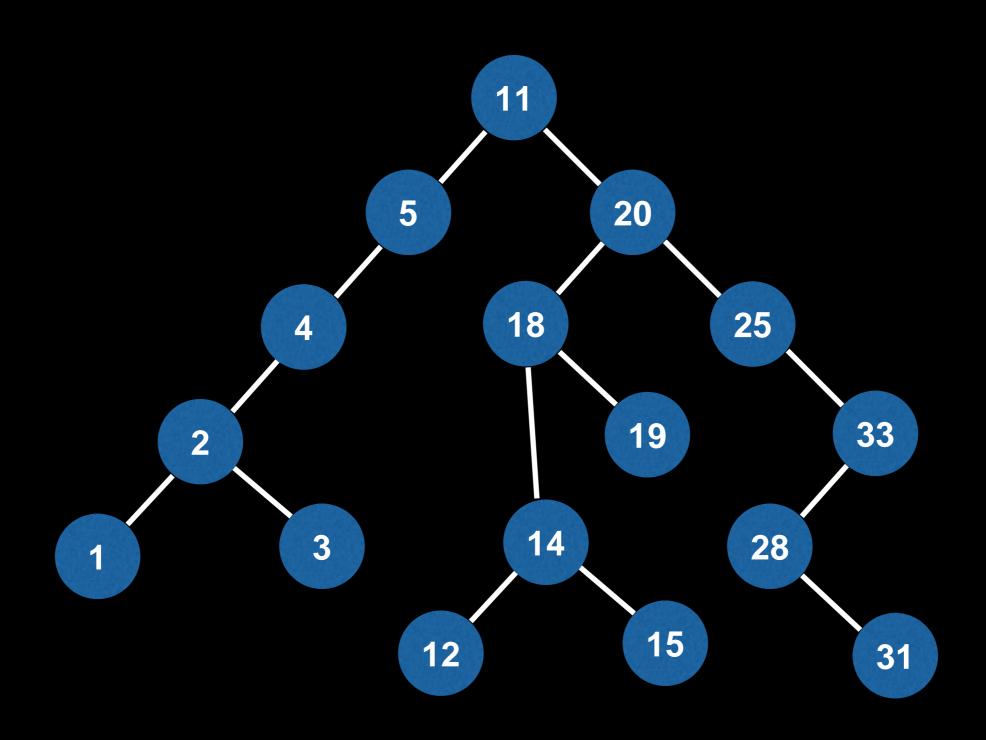


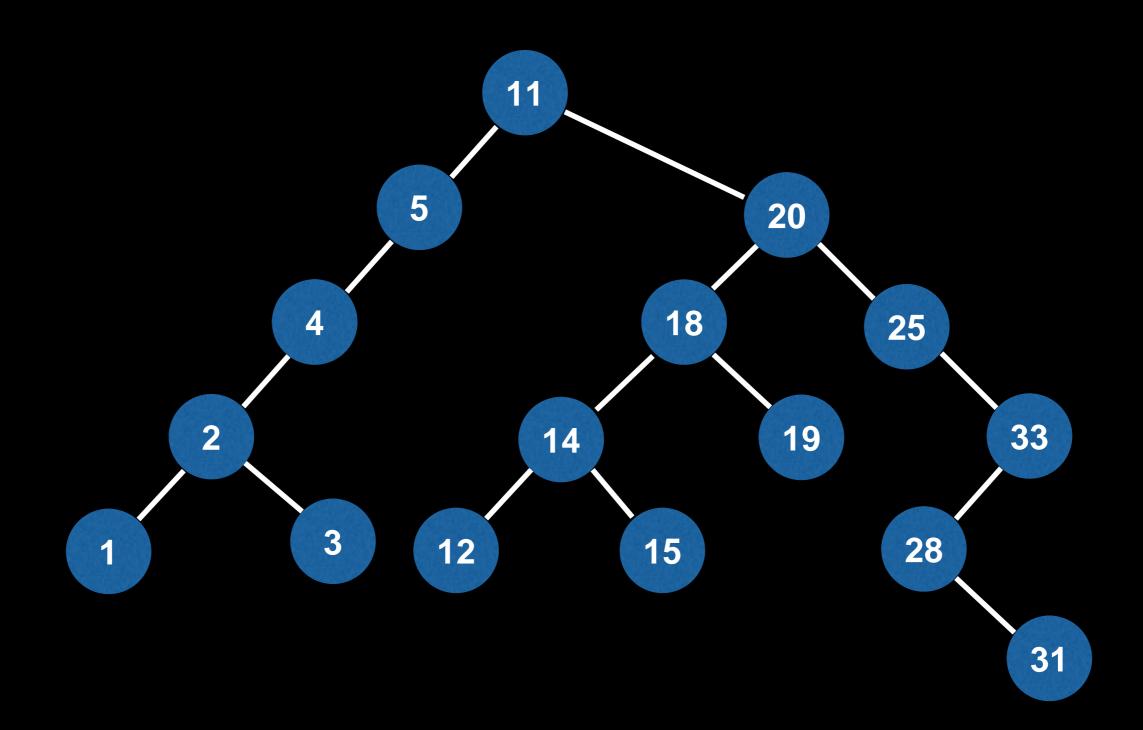


In this example let's remove 14. First begin by finding where 14 is located.

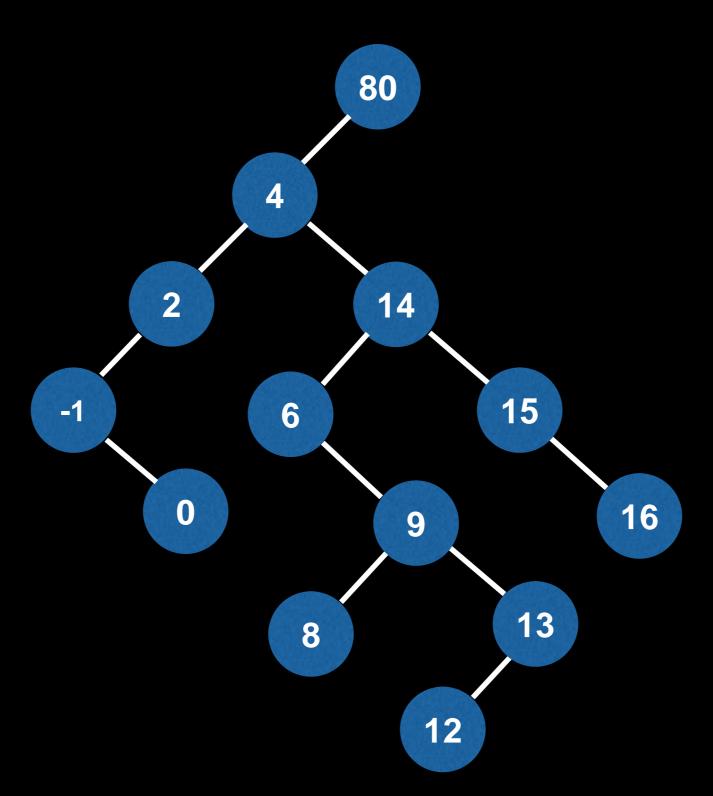


In this example let's remove 14. First begin by finding where 14 is located.

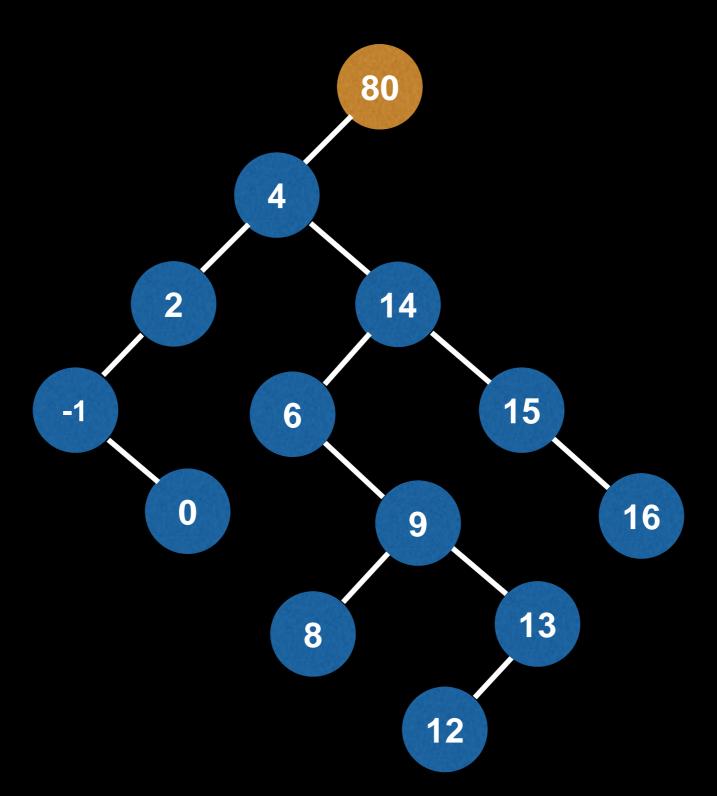


In this example let's remove 14. First begin by finding where 14 is located.

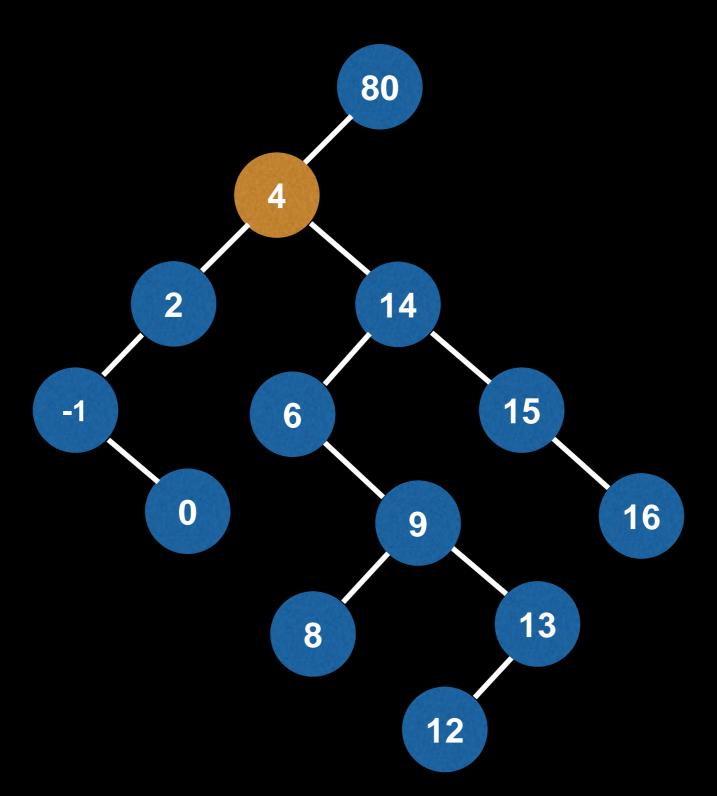



In this example let's remove 14. First begin by finding where 14 is located.

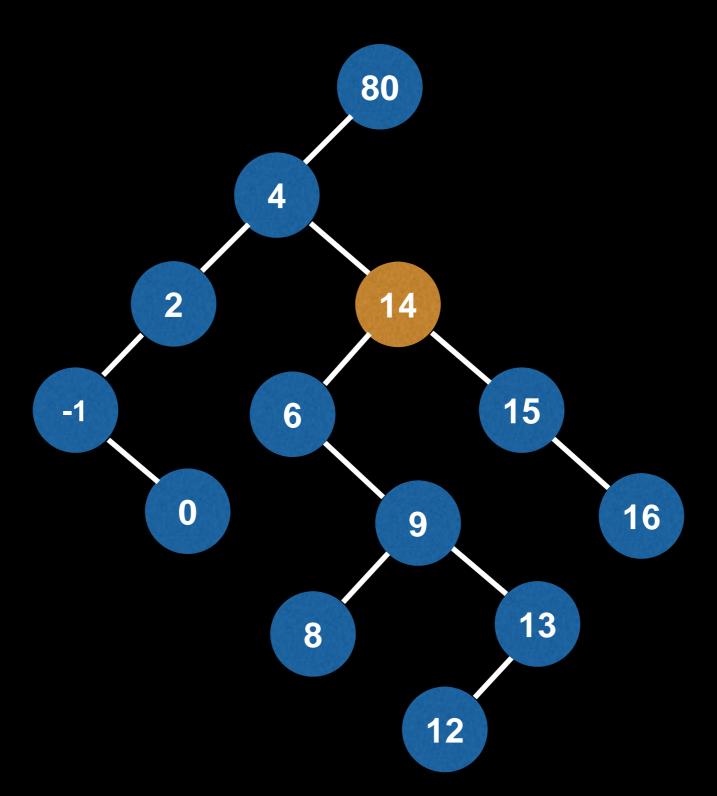



Now find either the smallest value in right subtree or largest in left subtree. Let's do the latter.

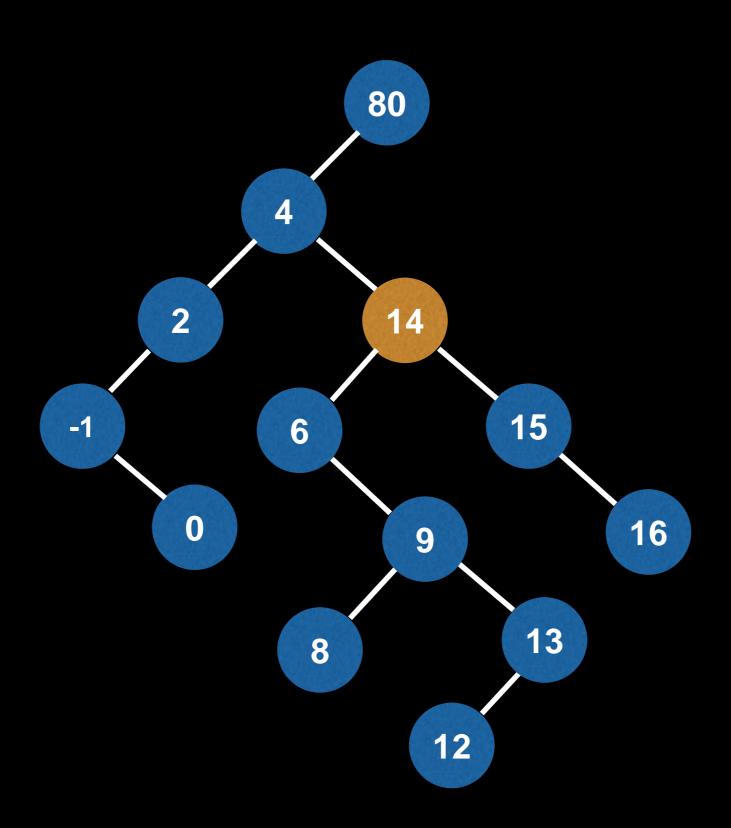


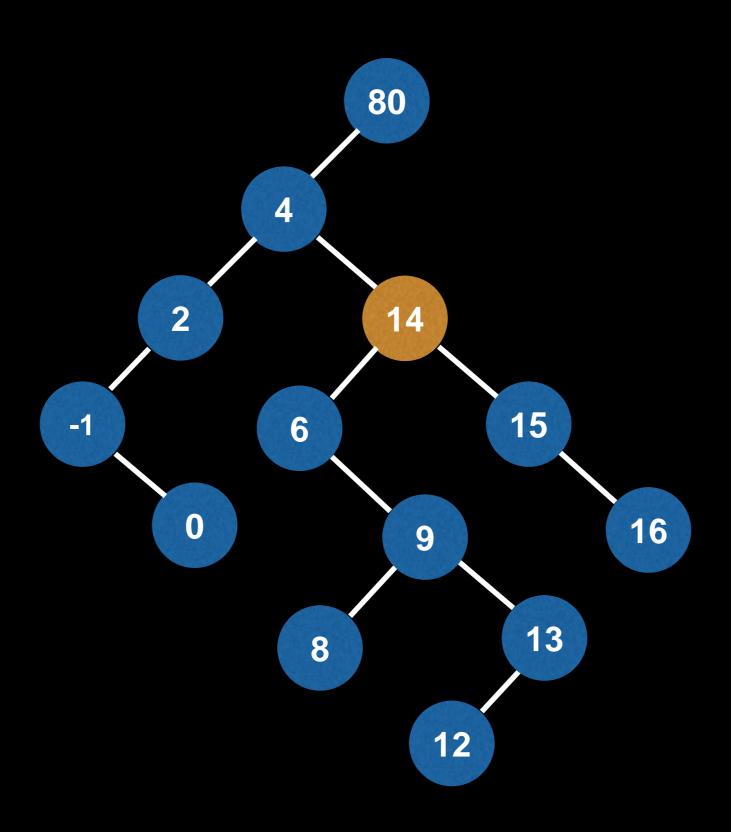


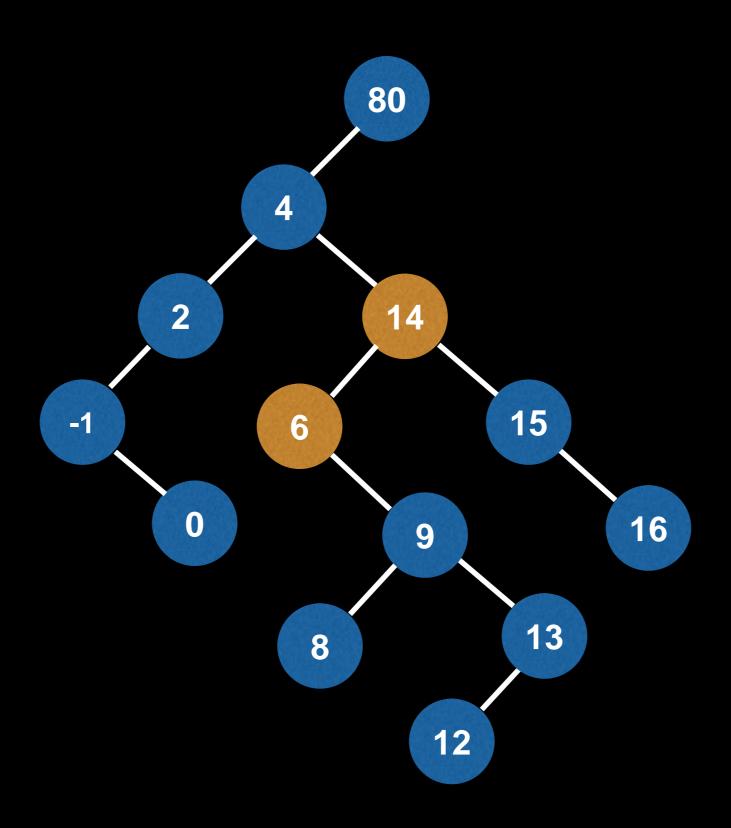


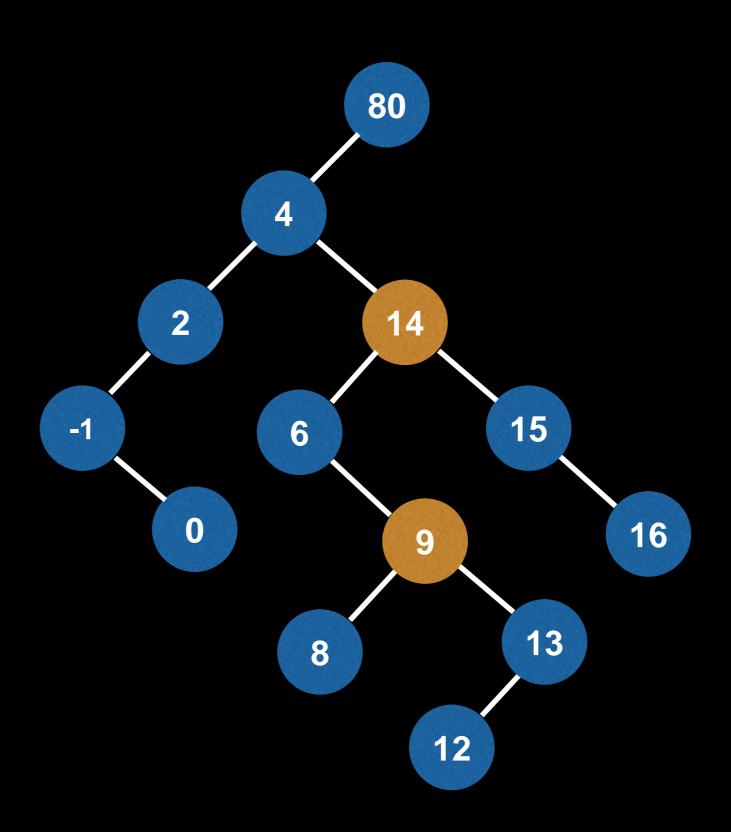


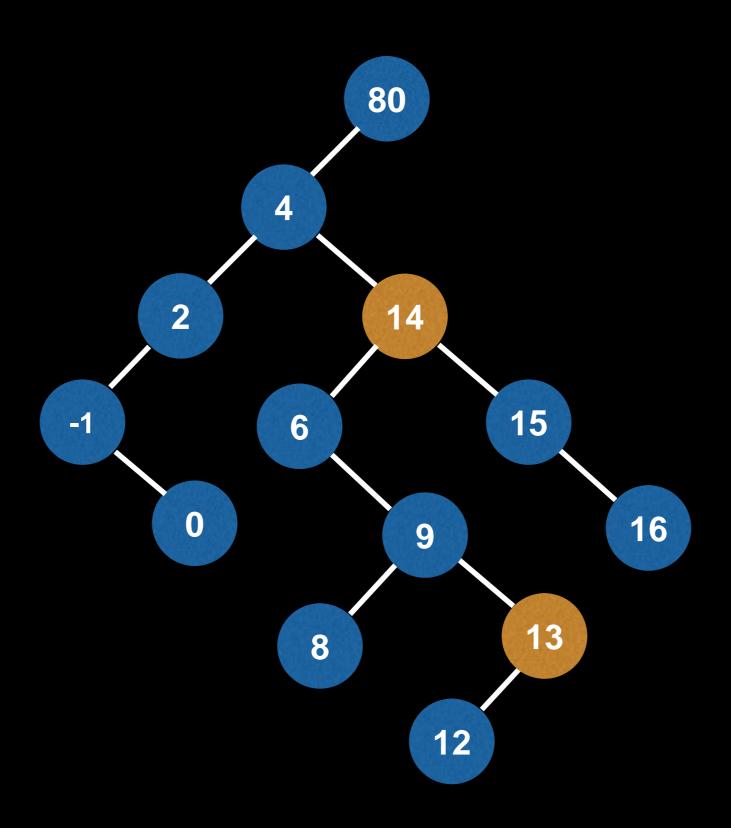


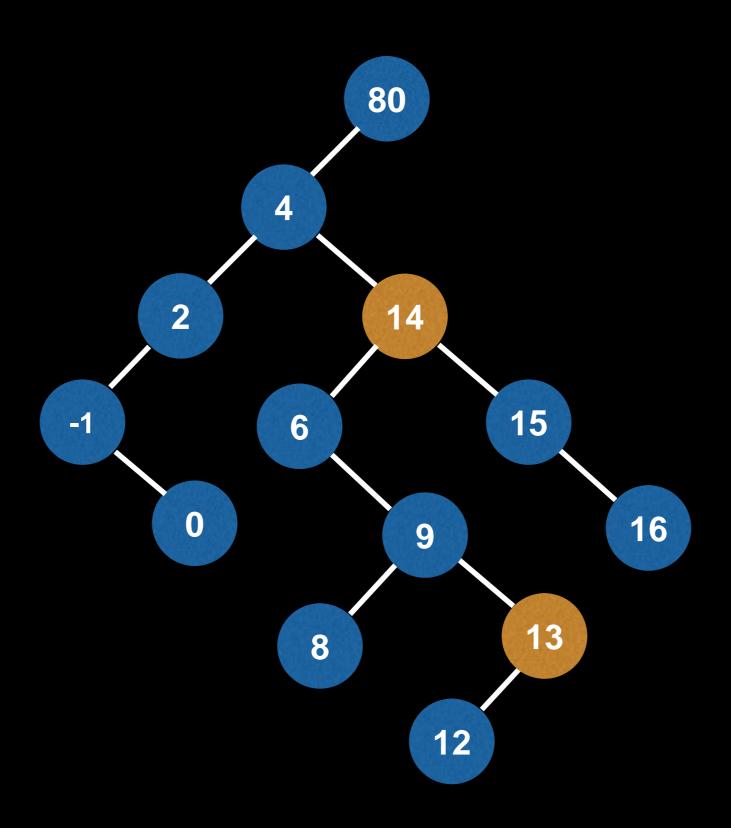


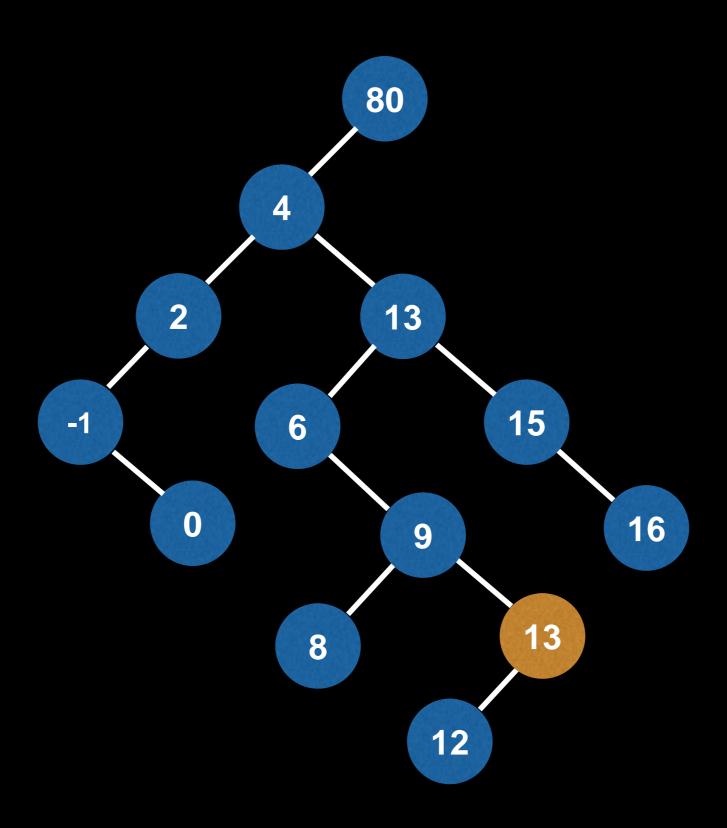


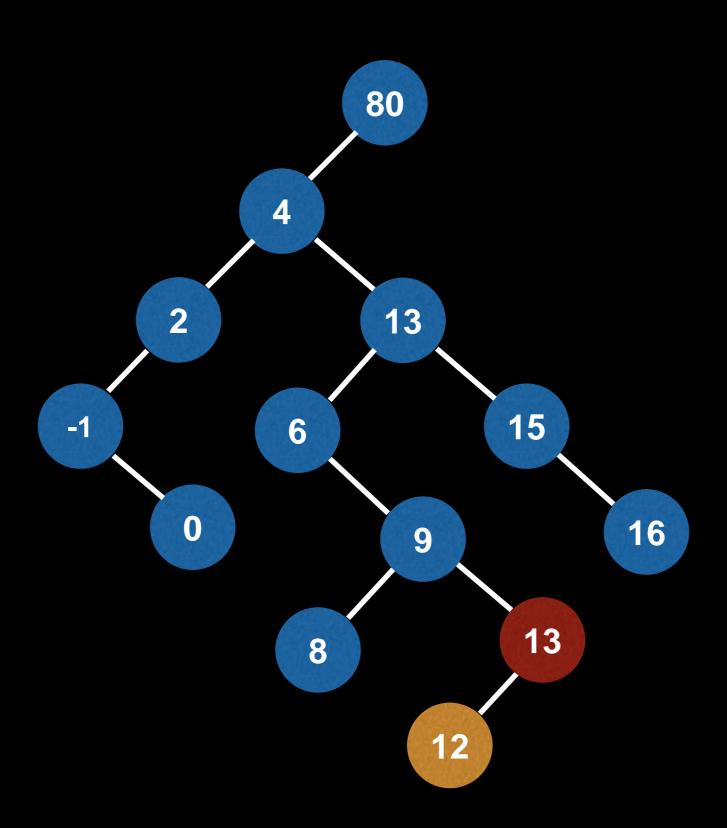


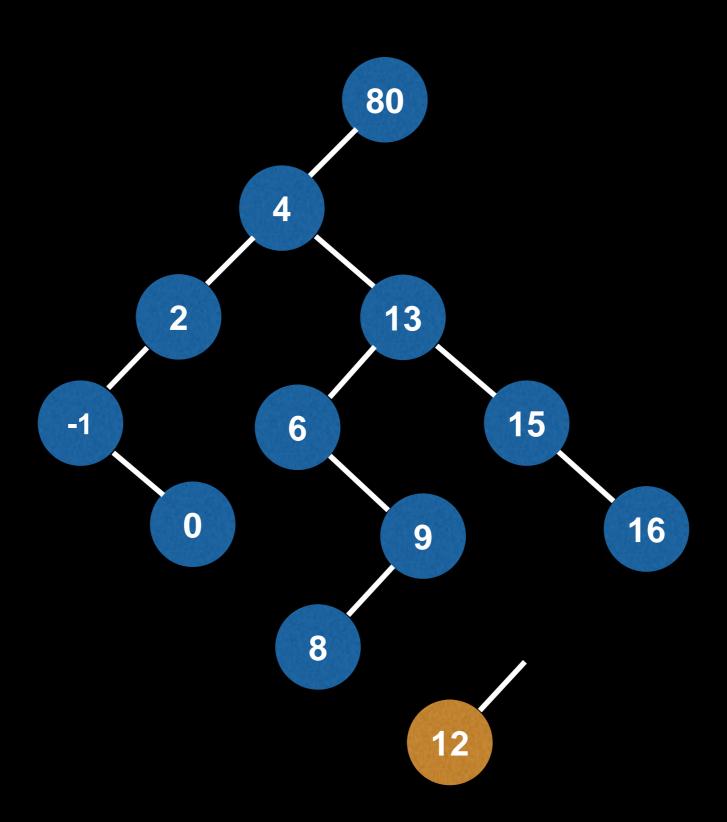


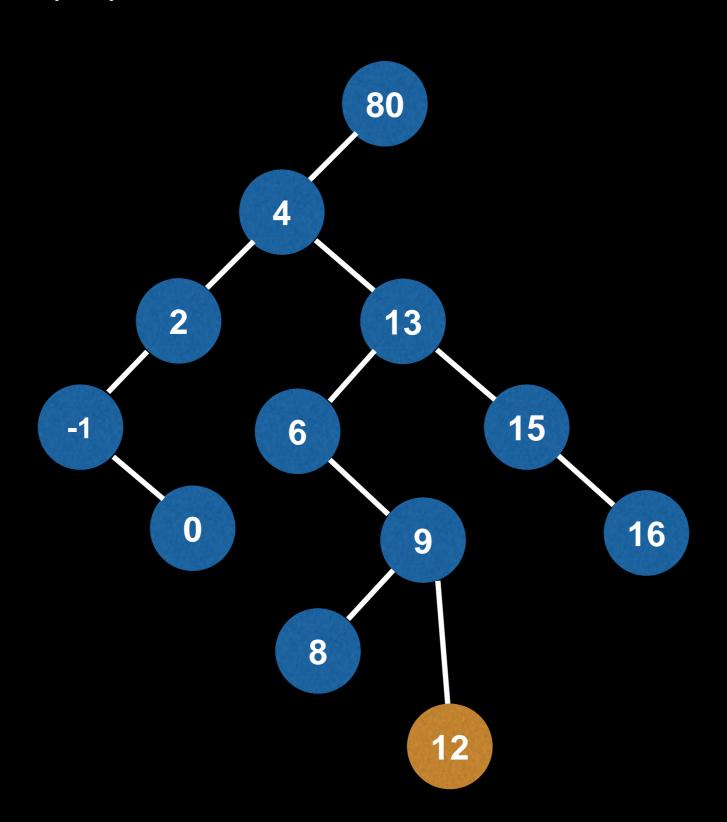


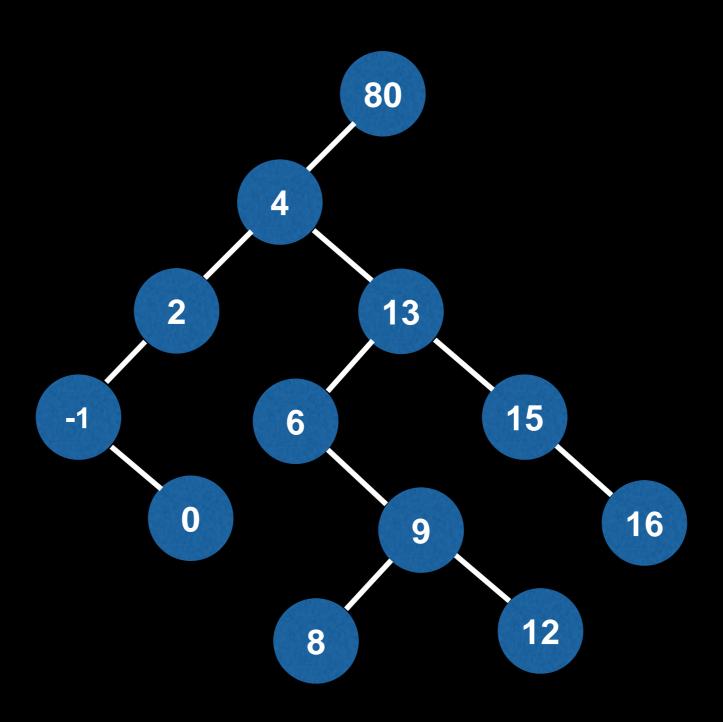


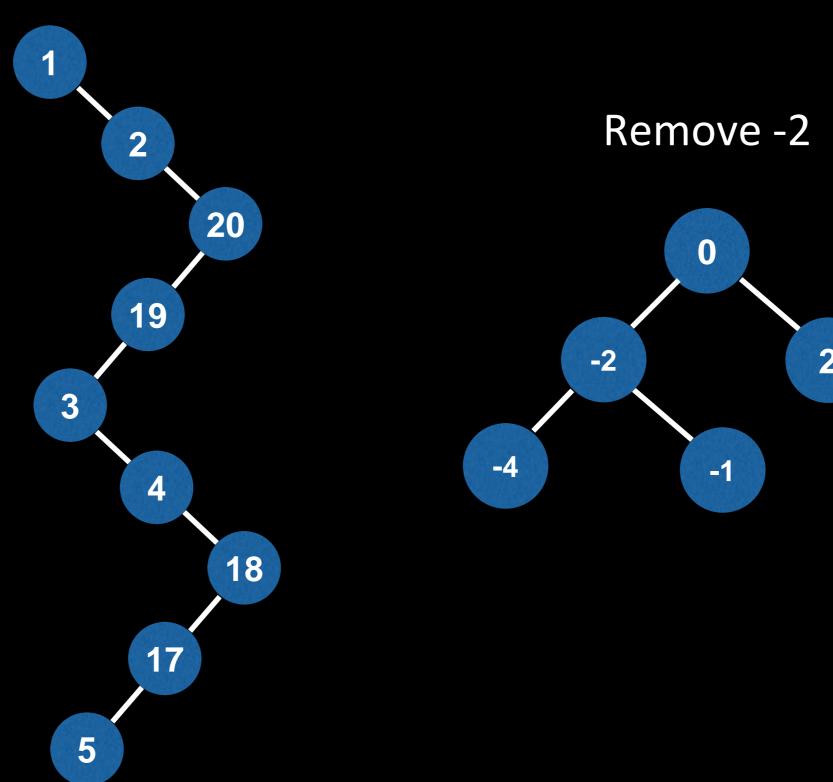


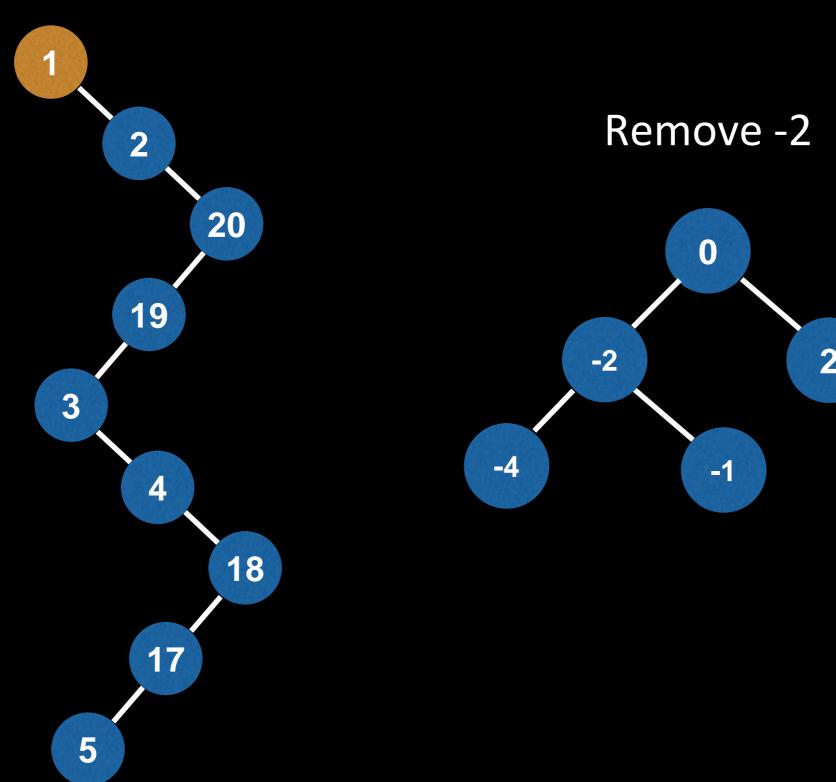


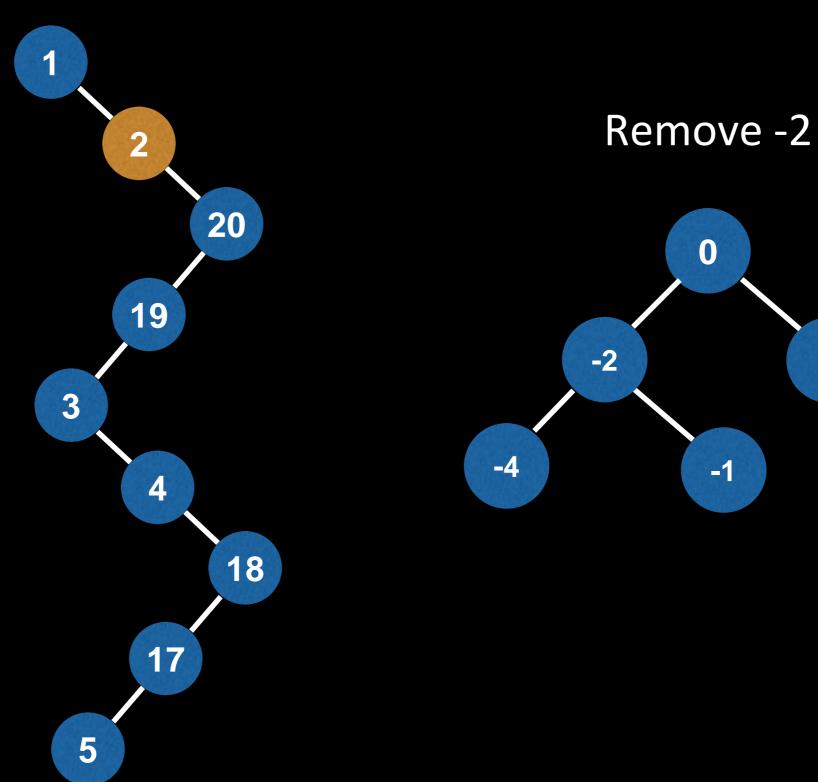


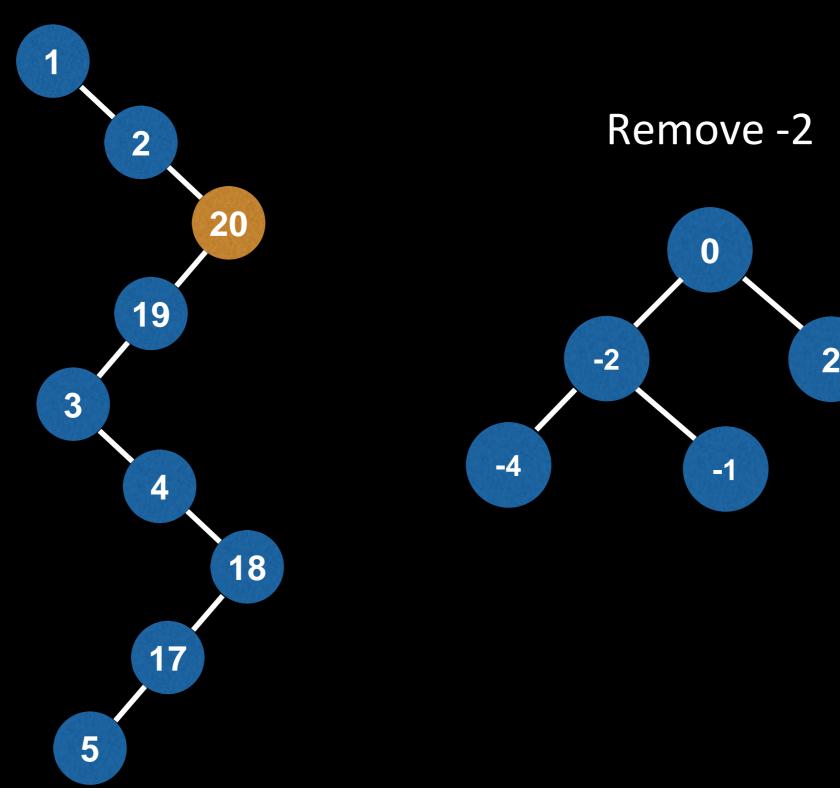


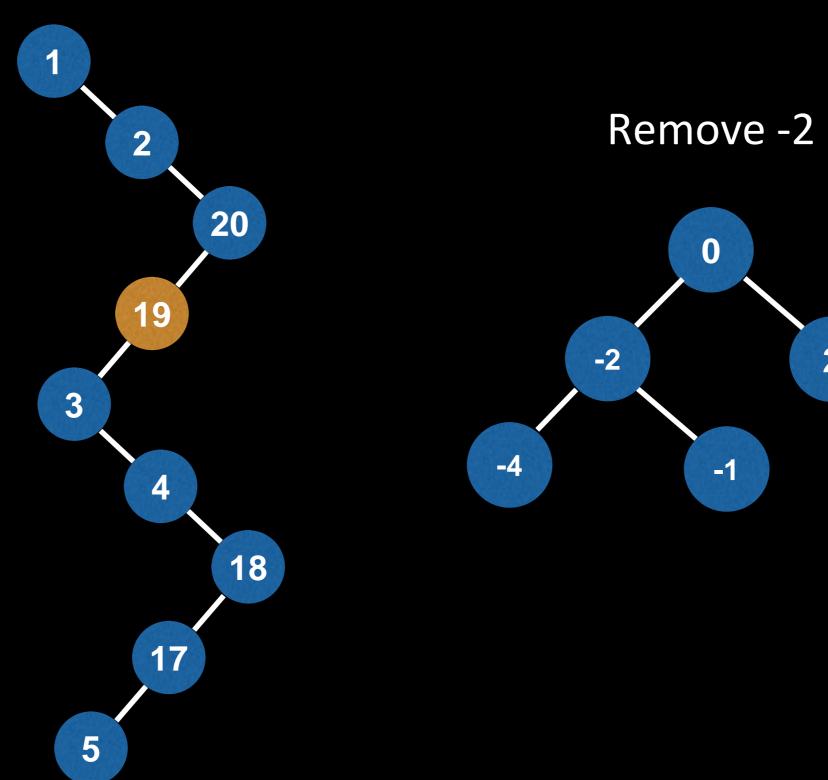


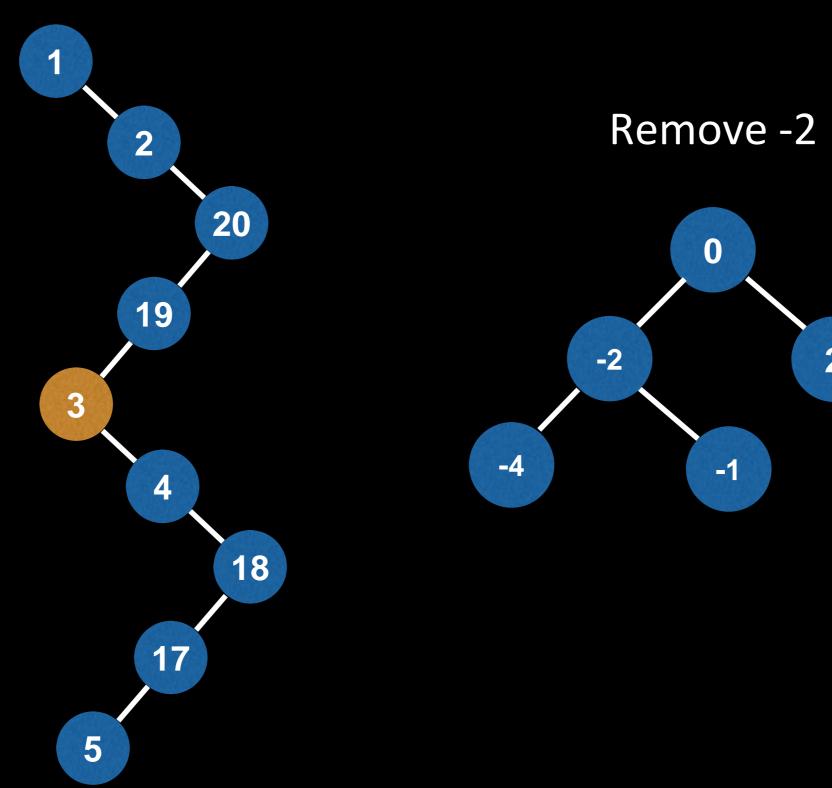


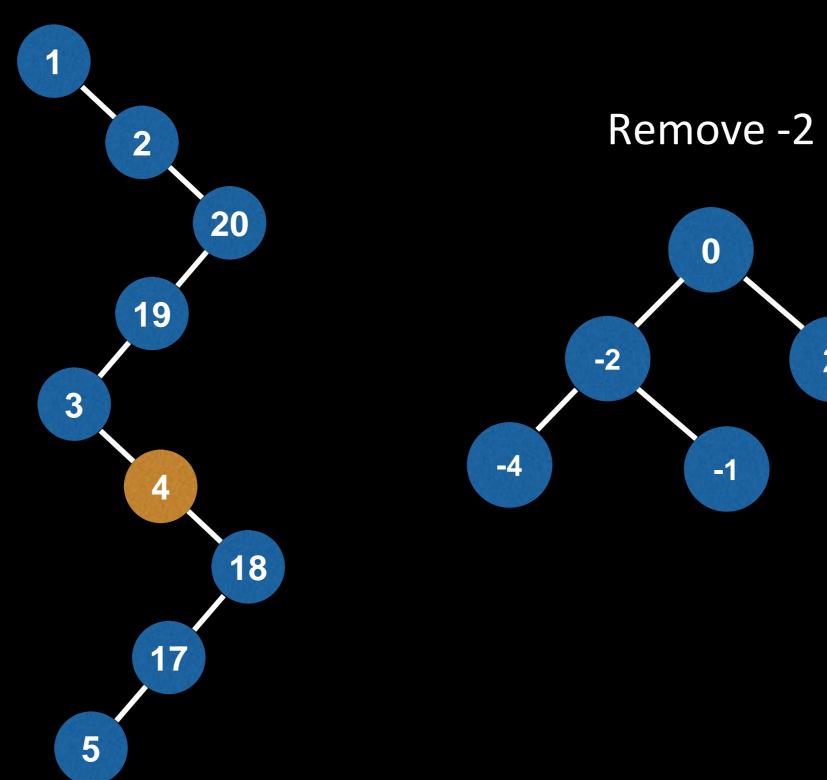


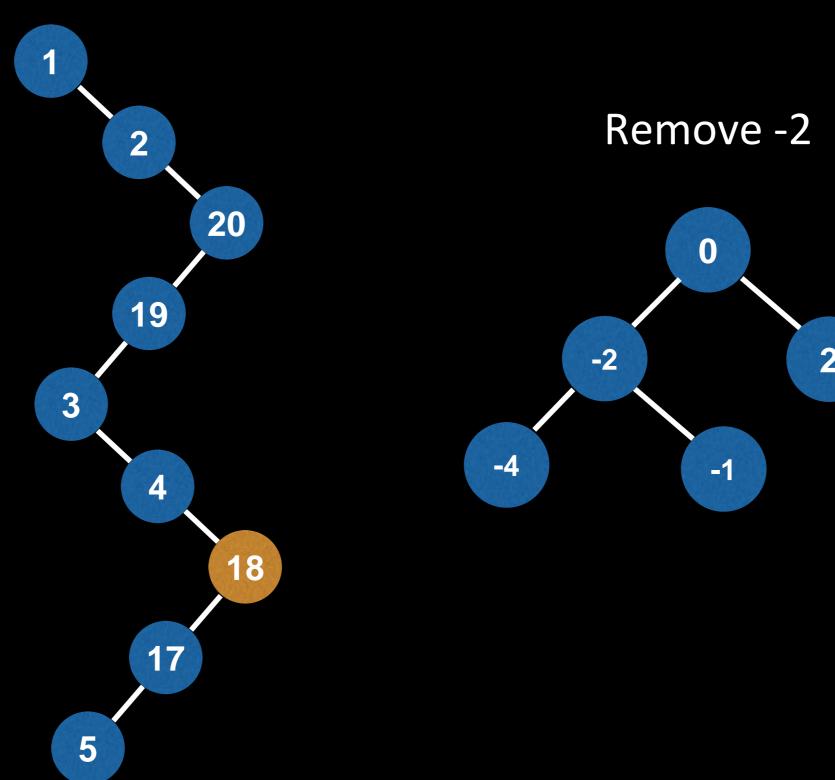


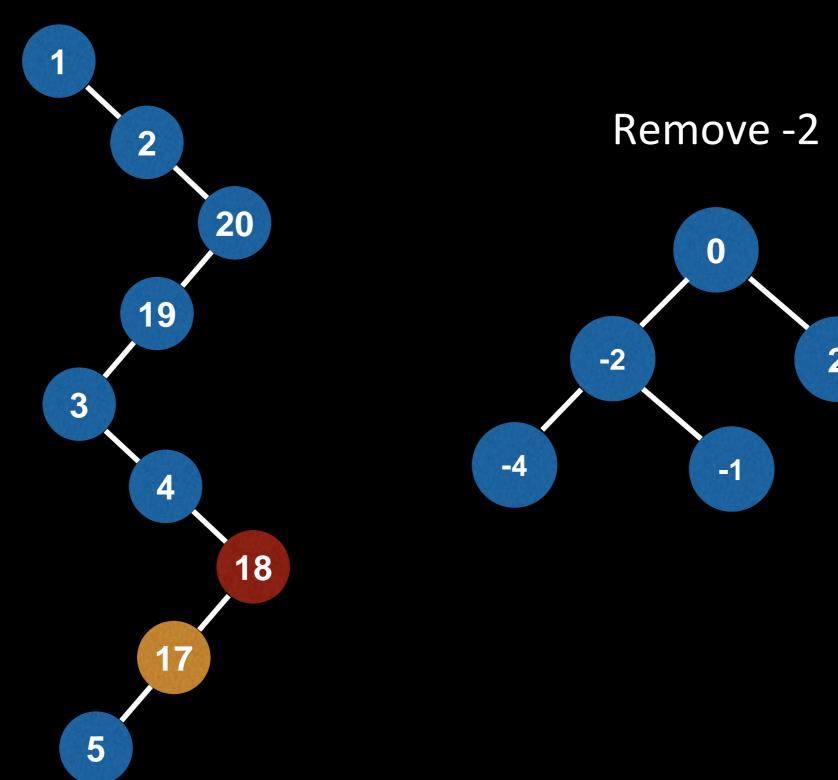


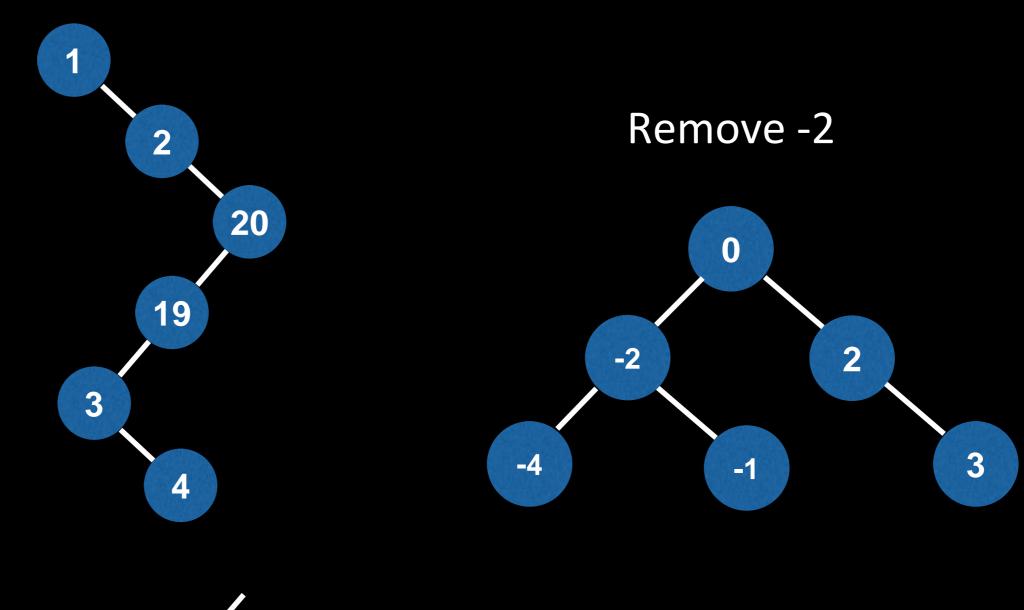


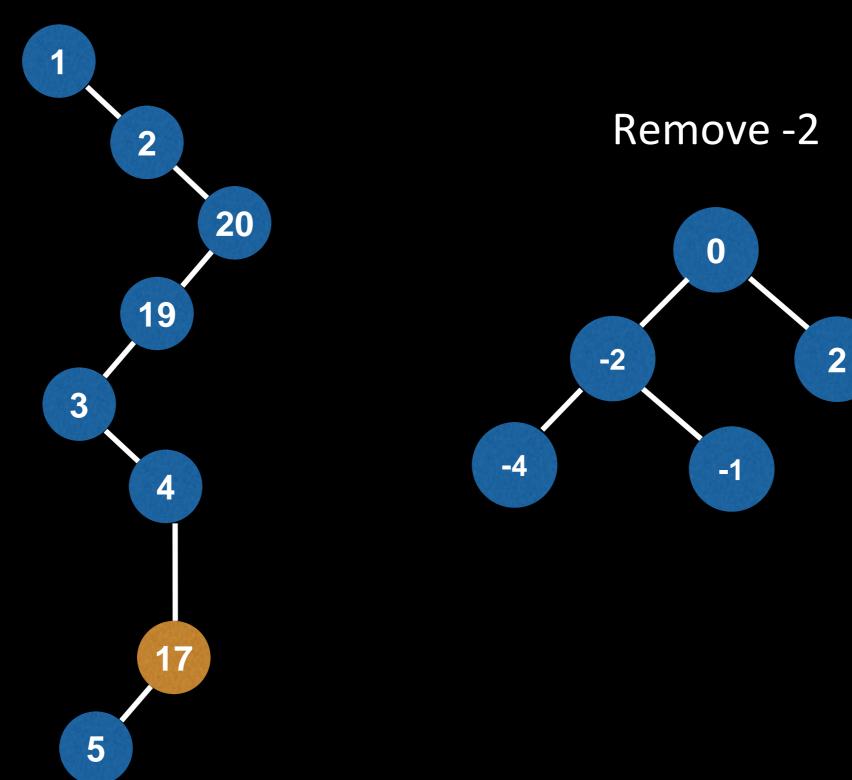

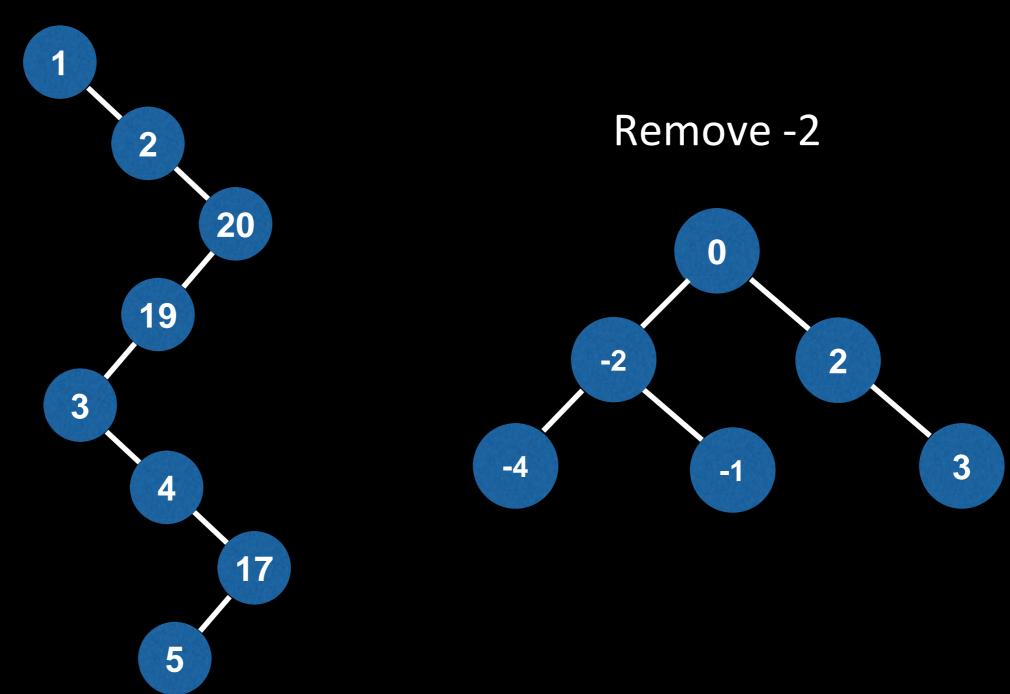

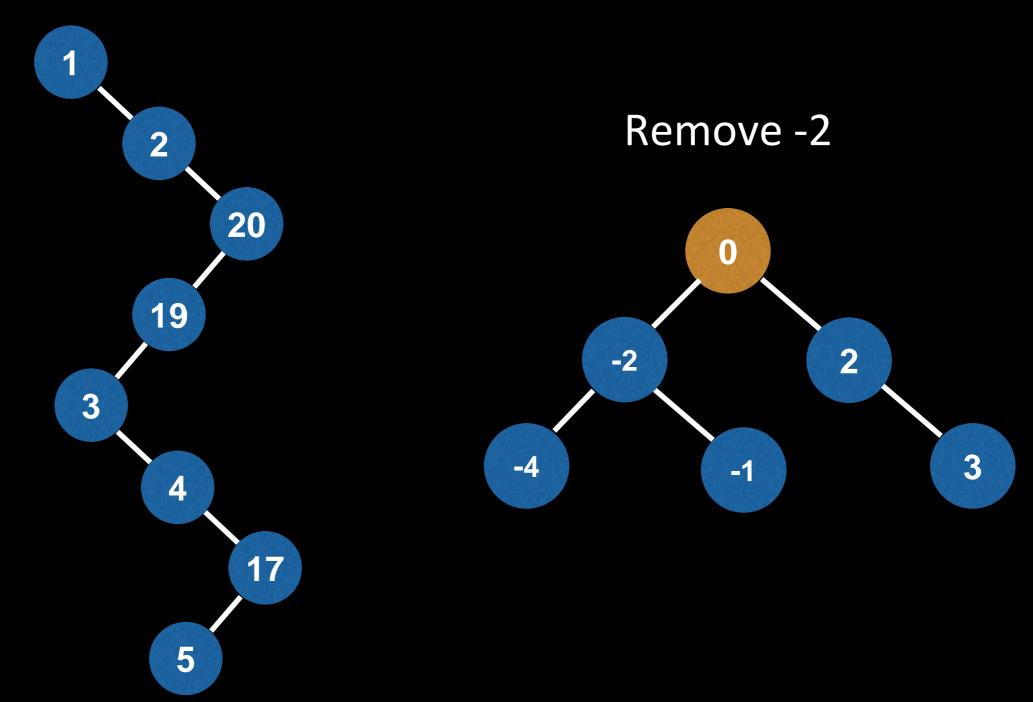


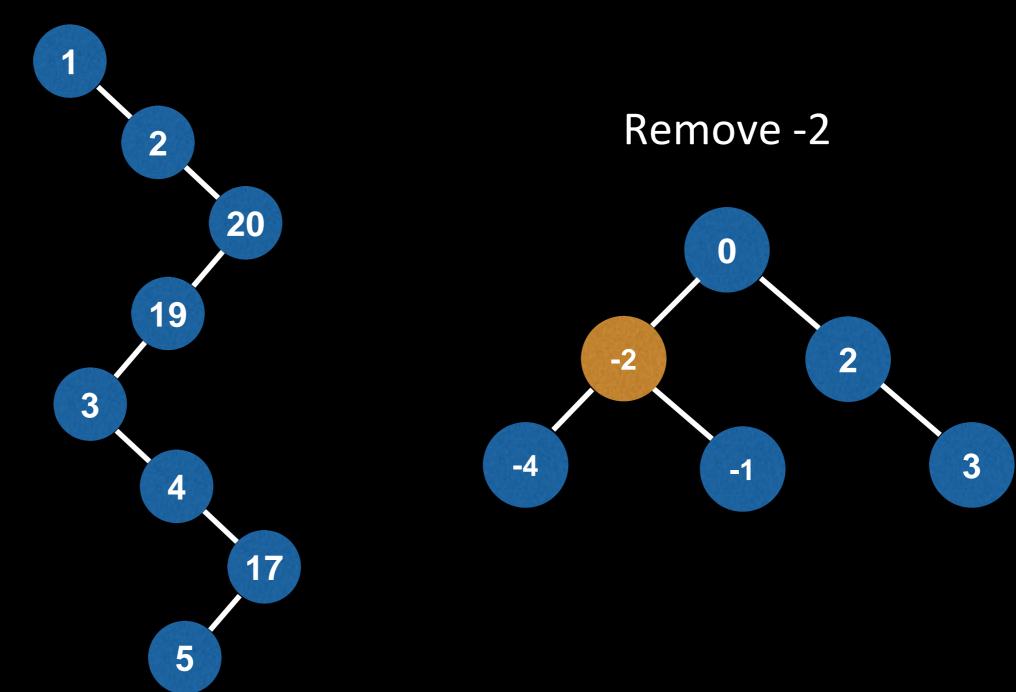

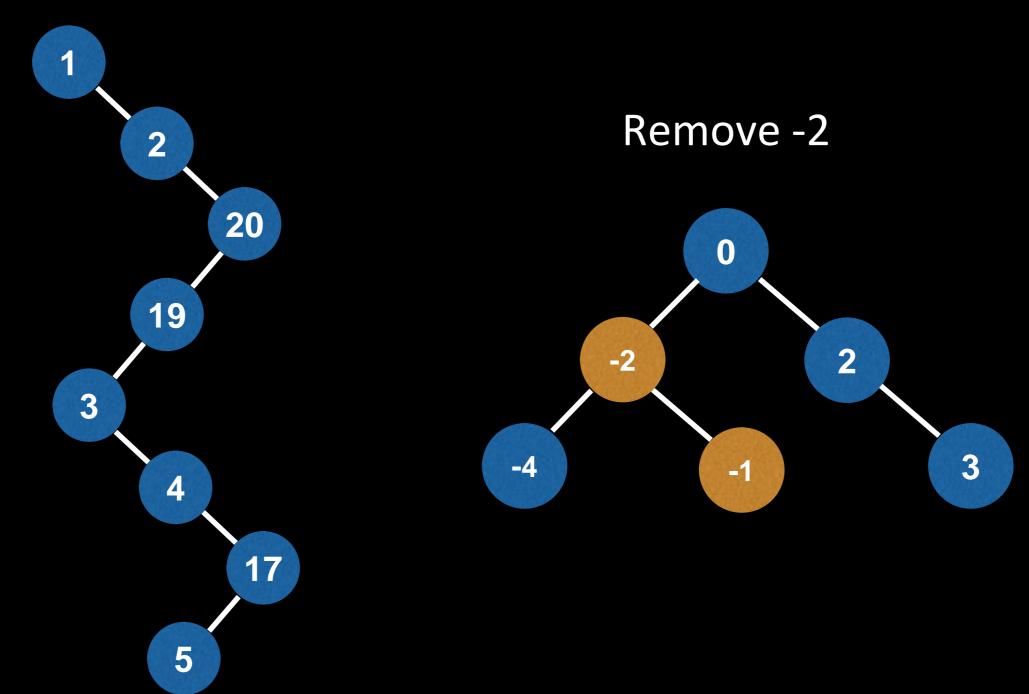


Additional examples

Remove 18

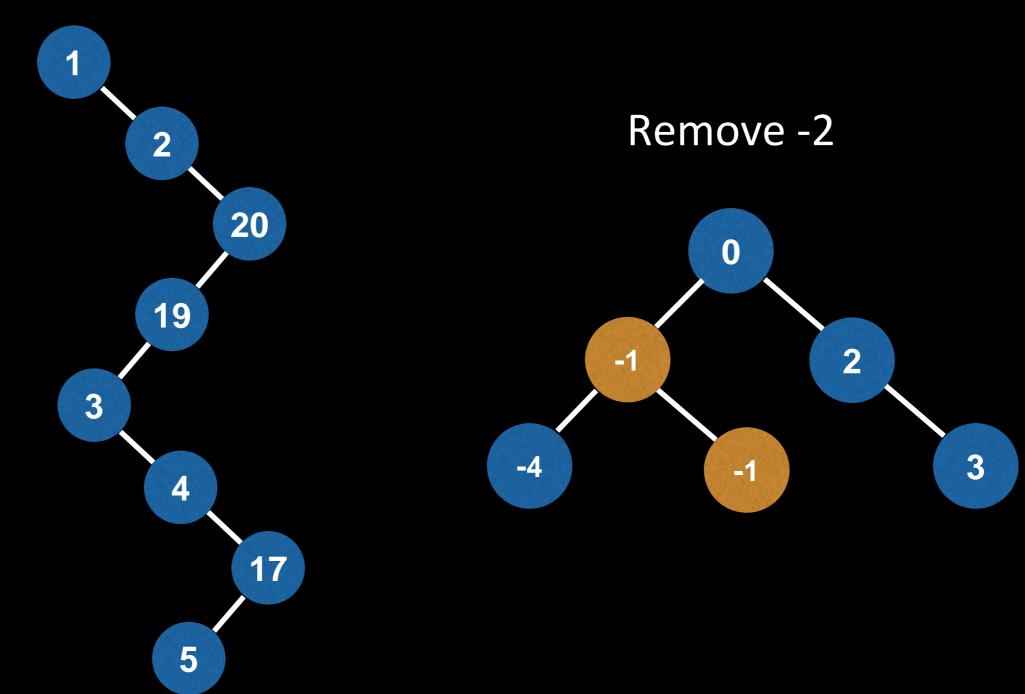


Additional examples

Remove 18

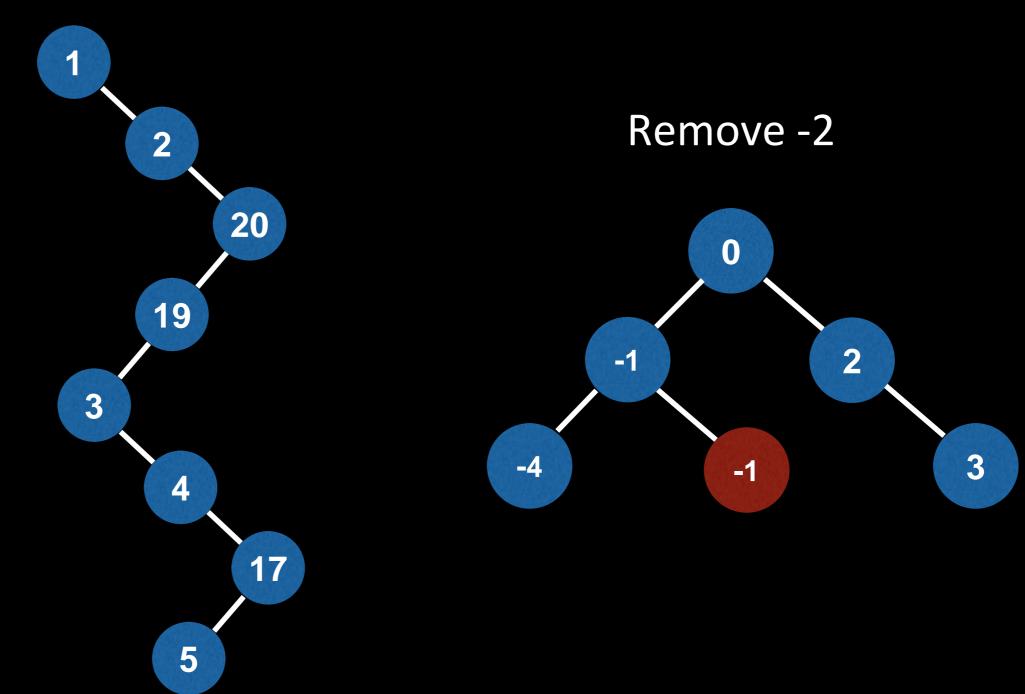

Additional examples

Remove 18

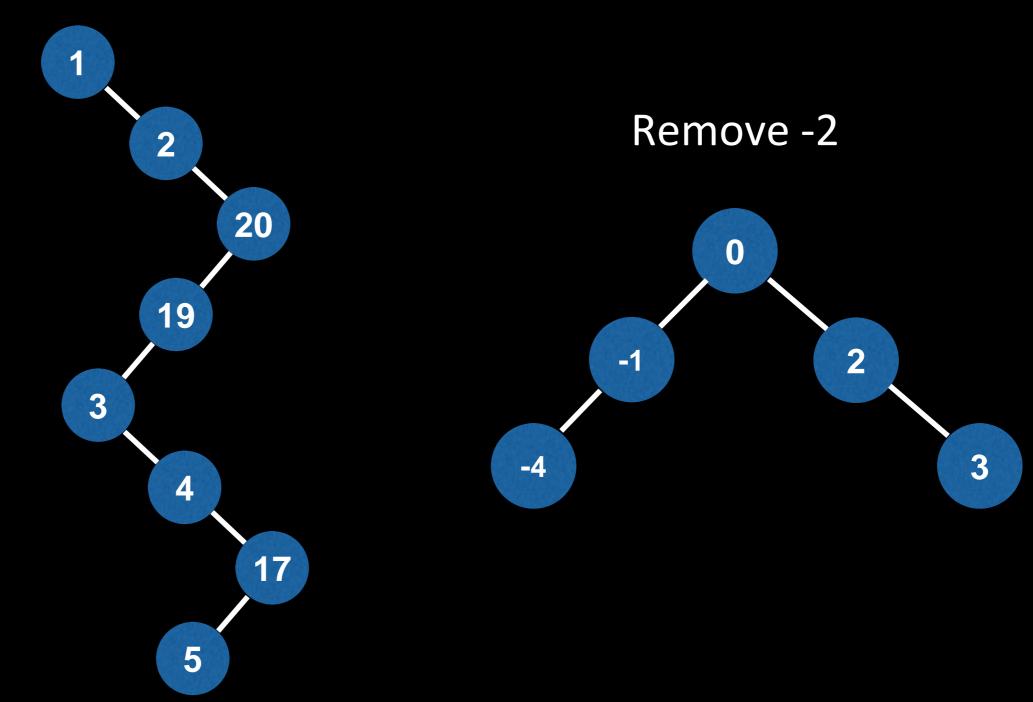

Tree Traversals


(Preorder, Inorder, Postorder & Level order)

Preorder, Inorder & PostOrder

These three types of traversals are naturally defined recursively:

```
preorder(node):
  if node == null: return
                                                preorder prints before
  print(node.value)
                                                   the recursive calls
  preorder(node.left)
  preorder(node.right)
inorder(node):
if node == null: return
                                                inorder prints between
inorder(node.left)
                                                   the recursive calls
 print(node.value)
inorder(node.right)
postorder(node):
if node == null: return
                                                 postorder prints after
 postorder(node.left)
                                                   the recursive calls
 postorder(node.right)
 print(node.value)
```


```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

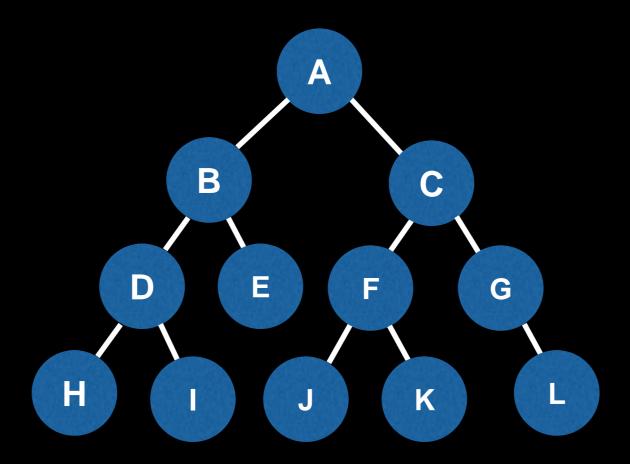

Call Stack:


Print the value of the current node then traverse the left subtree followed by the right subtree.

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

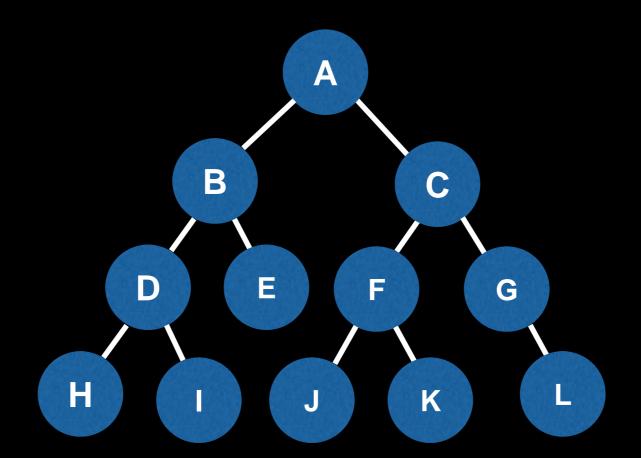

Call Stack:


```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

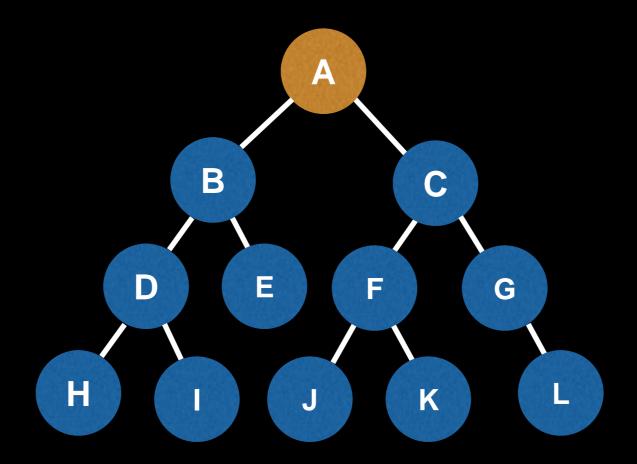

Call Stack: node A

Order: A

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

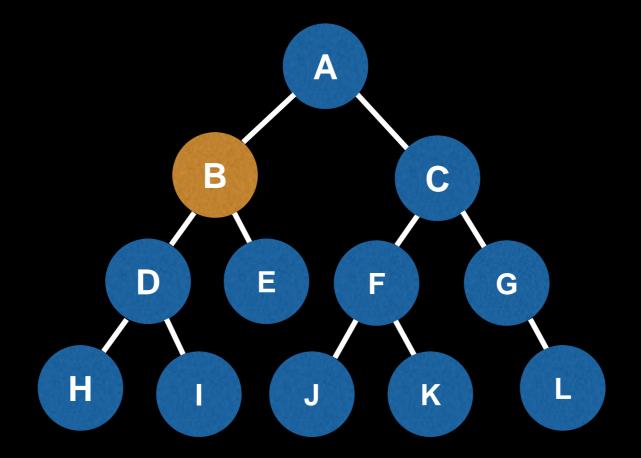


Call Stack:

node A node B

Order: A,B

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

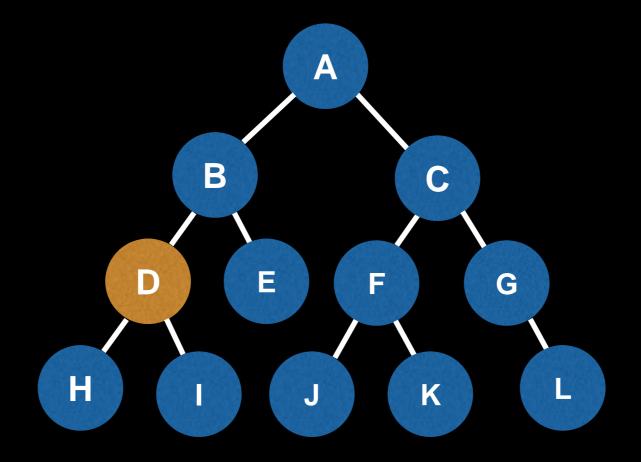


Call Stack:

node A node B node D

Order: A,B,D

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

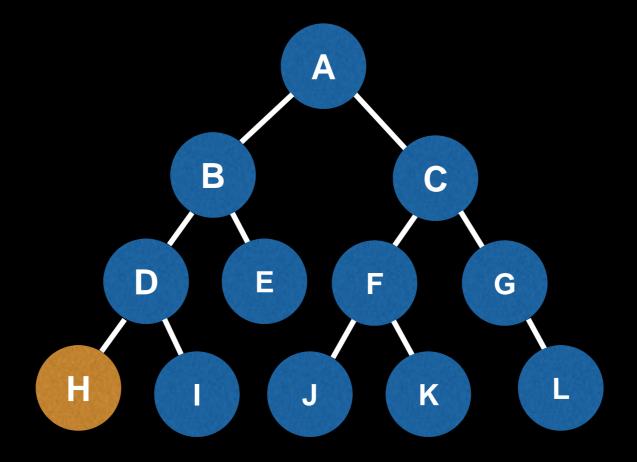


Call Stack:

node A node B node D node H

Order: A,B,D,H

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

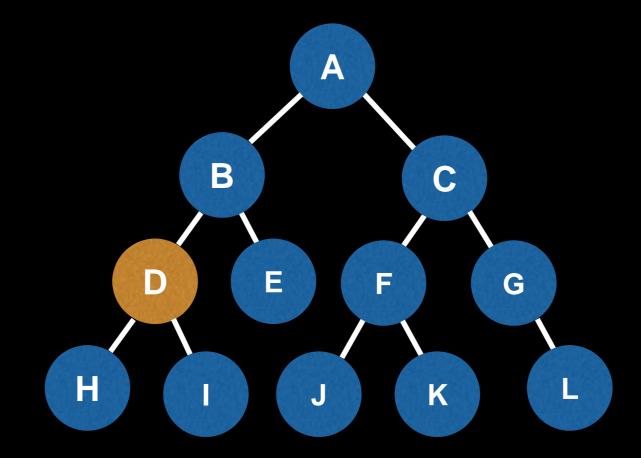


Call Stack:

node A node B node D

Order: A,B,D,H

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

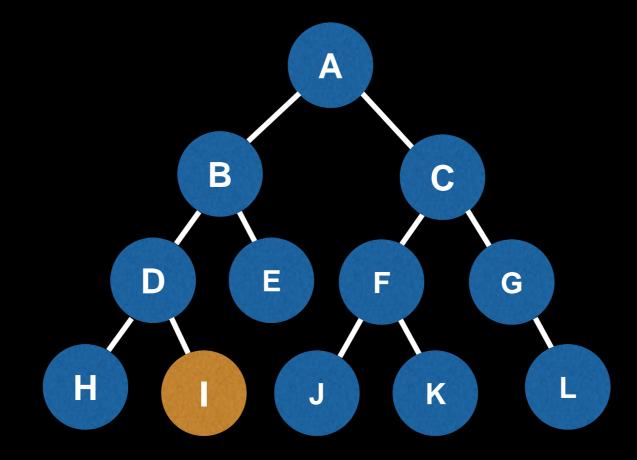


Call Stack:

node A node B node D node I

Order: A,B,D,H,I

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

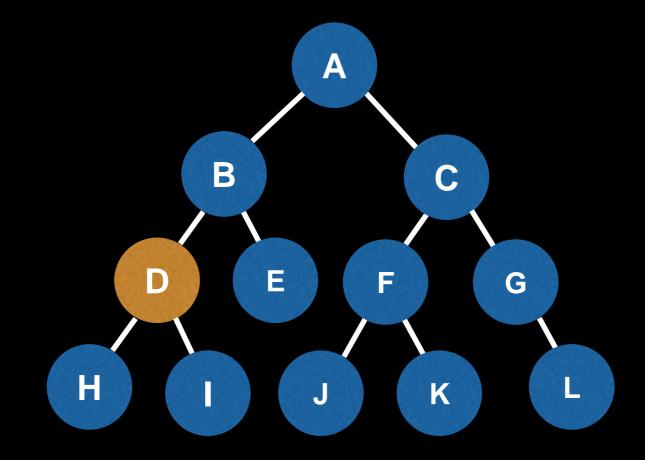


Call Stack:

node A node B node D

Order: A,B,D,H,I

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

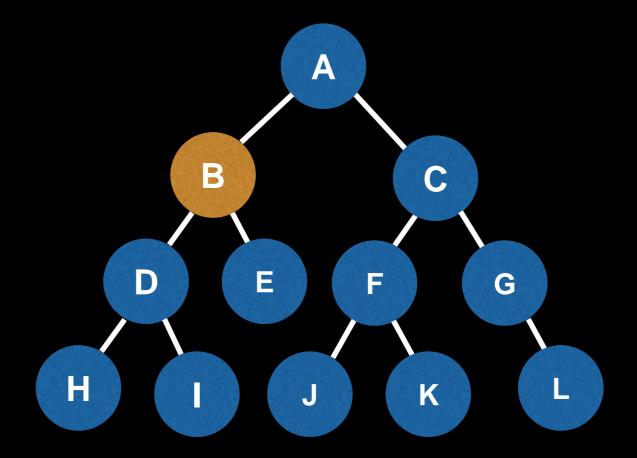


Call Stack:

node A node B

Order: A,B,D,H,I

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

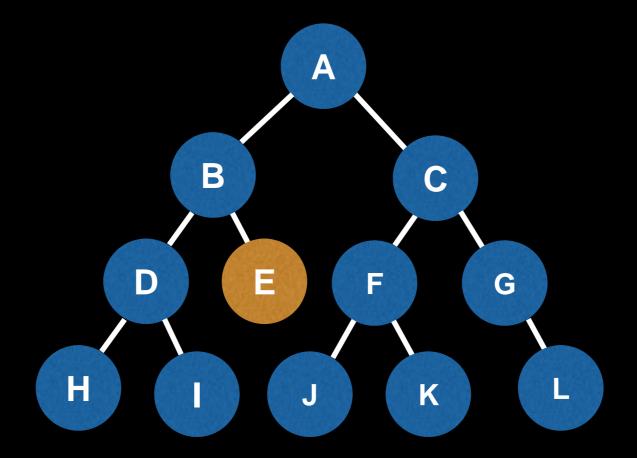


Call Stack:

node A node B node E

Order: A,B,D,H,I,E

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

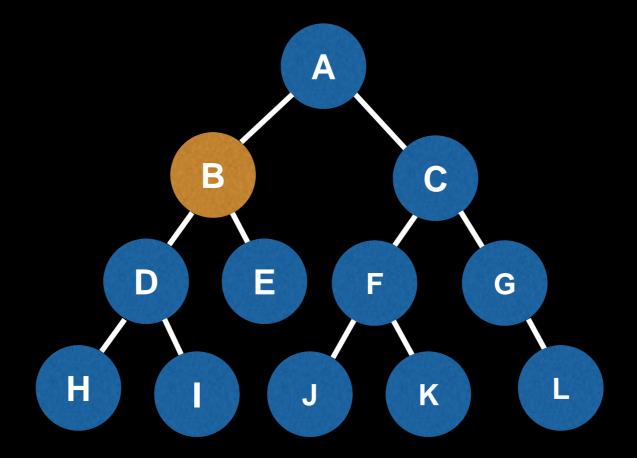


Call Stack:

node A node B

Order: A,B,D,H,I,E


```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

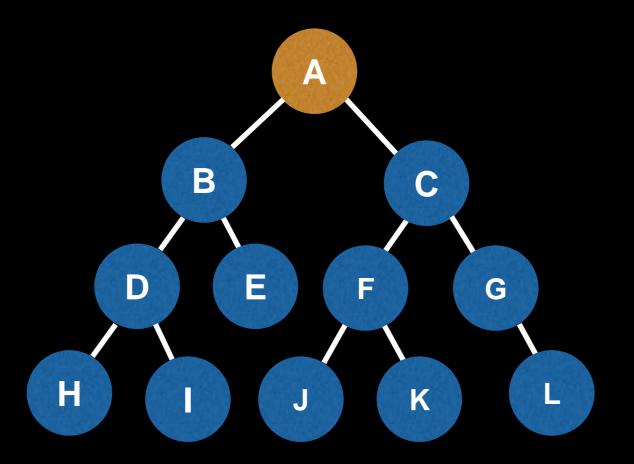

Call Stack: node A

Order: A,B,D,H,I,E

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

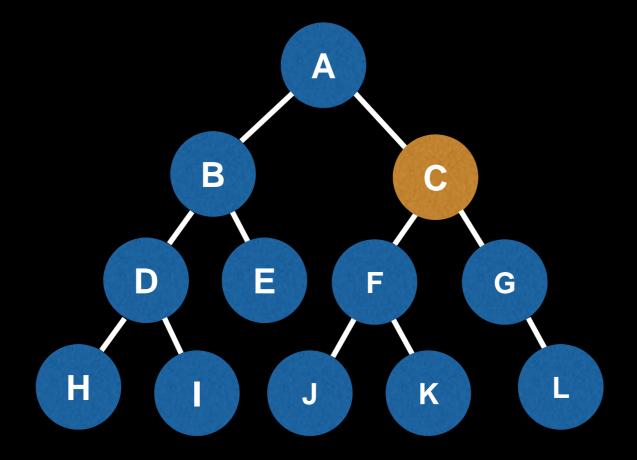


Call Stack:

node A node C

Order: A,B,D,H,I,E,C

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

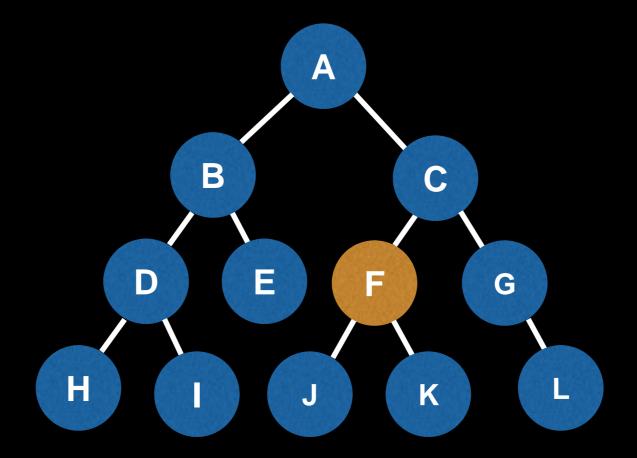


Call Stack:

node A node C node F

Order: A,B,D,H,I,E,C,F

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

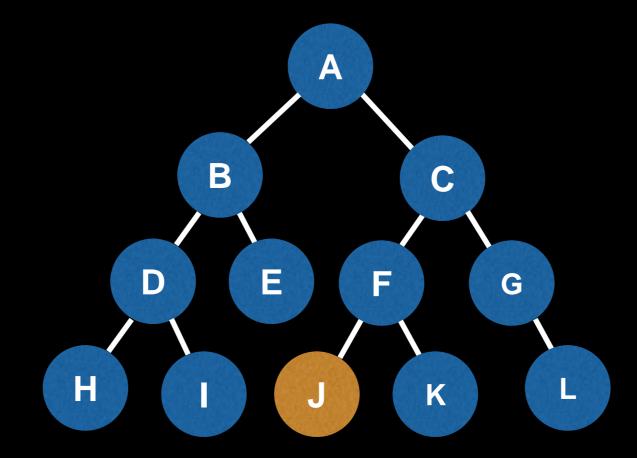


Call Stack:

node A node C node F node J

Order: A,B,D,H,I,E,C,F,J

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

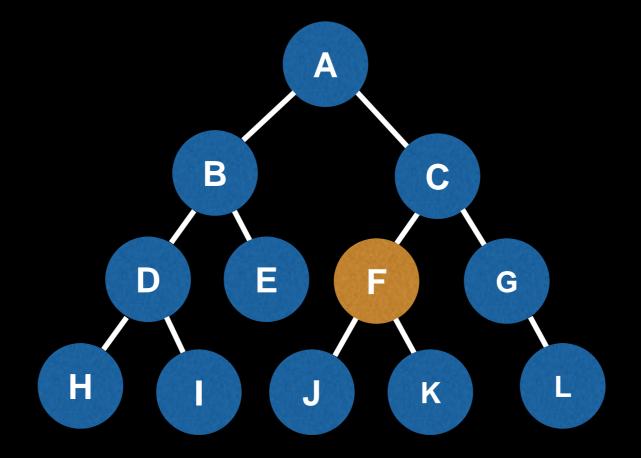


Call Stack:

node A node C node F

Order: A,B,D,H,I,E,C,F,J


```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

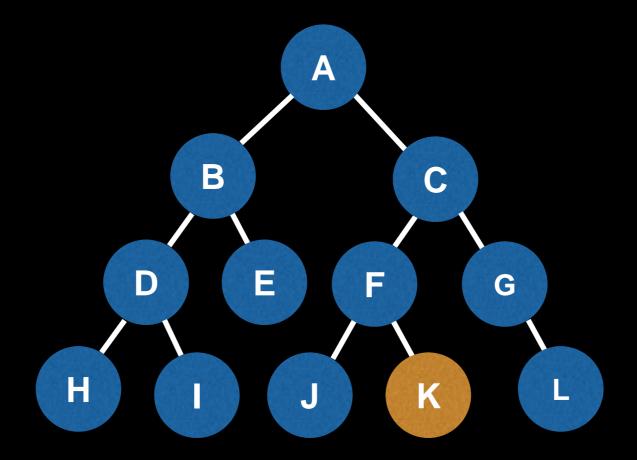

Call Stack:

node A node C node F node K


```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

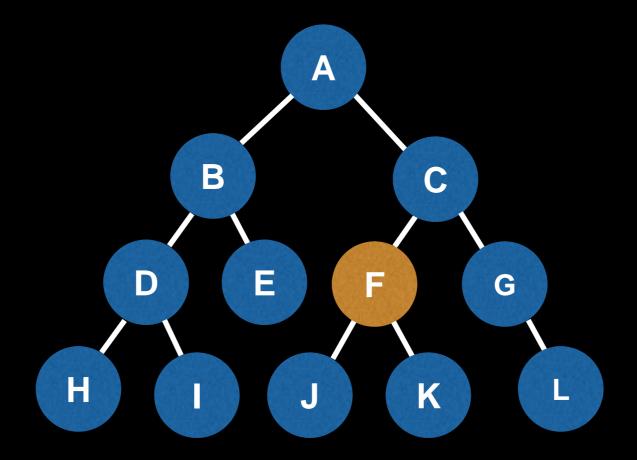

Call Stack:

node A node C node F


```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

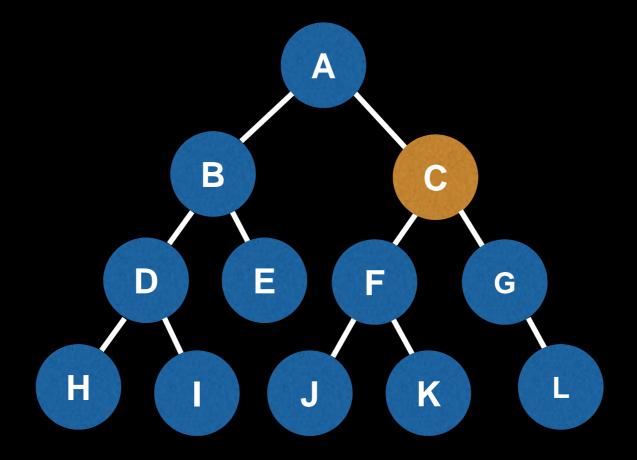

Call Stack:

node A node C


```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

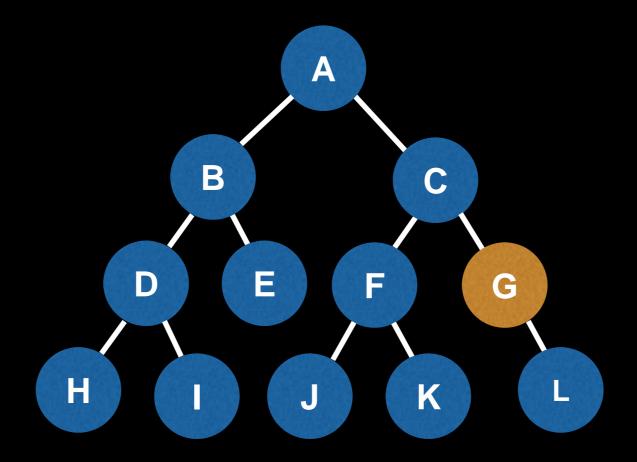

Call Stack:

node A node C node G


```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

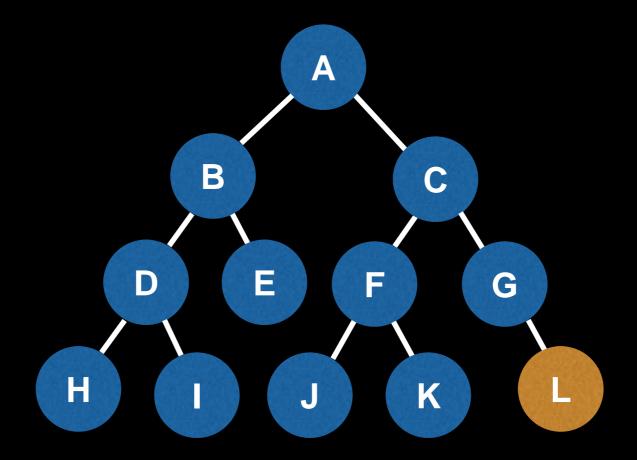

Call Stack:

node A node C node G node L


```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

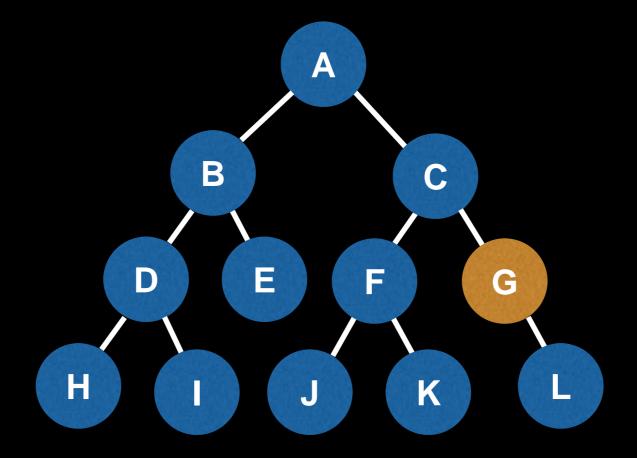

Call Stack:

node A node C node G


```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

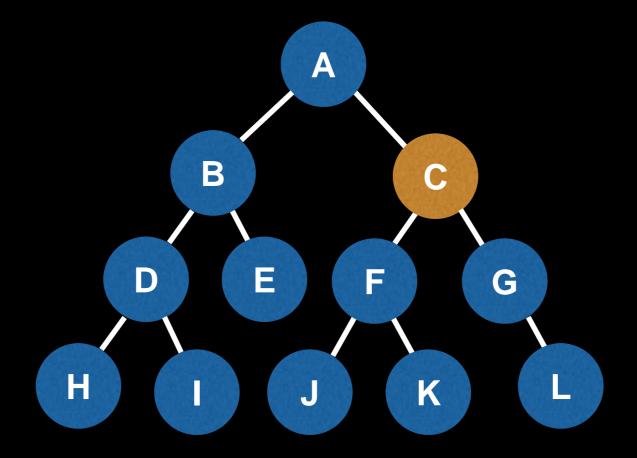

Call Stack:


node A node C

```
preorder(node):
   if node == null: return
   print(node.value)
   preorder(node.left)
   preorder(node.right)
```

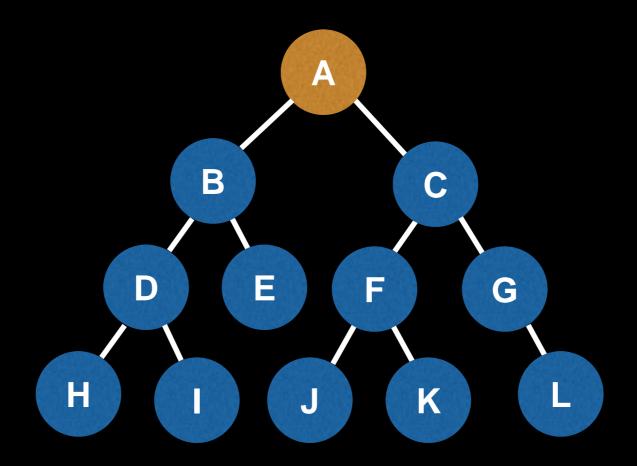


Call Stack: node A

```
preorder(node):
  if node == null: return
  print(node.value)
  preorder(node.left)
  preorder(node.right)
```

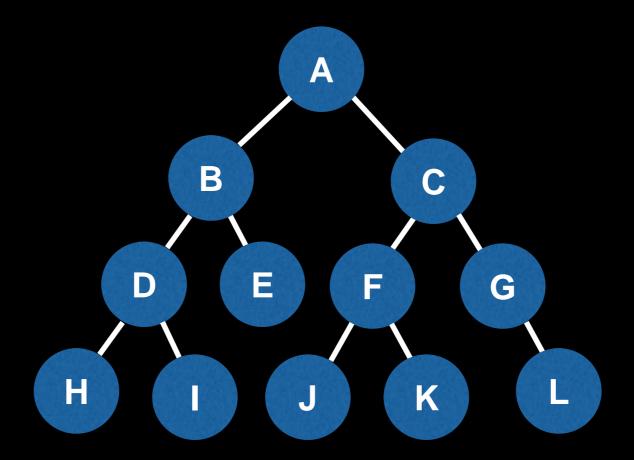

Call Stack:


inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

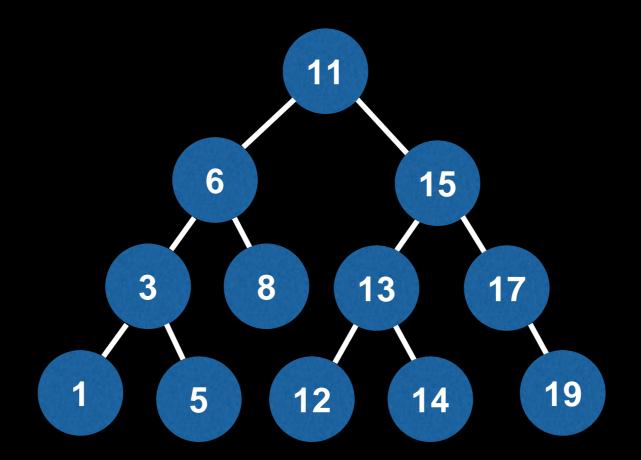

Call Stack:

Traverse the left subtree, then print the value of the node and continue traversing the right subtree.


inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

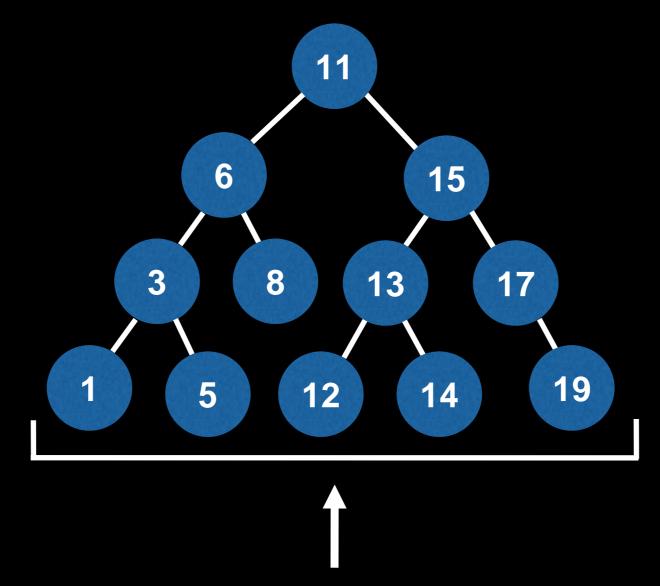

In this example our tree is a Binary Search Tree.

Call Stack:


inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

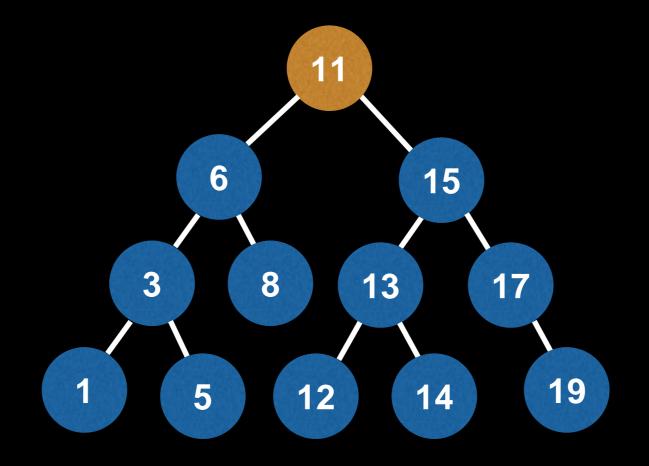

Call Stack:

node 11


inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

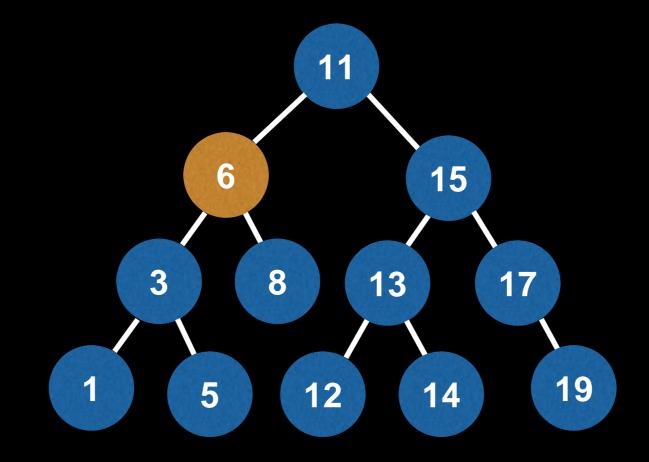

Call Stack:

node 11 node 6


inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

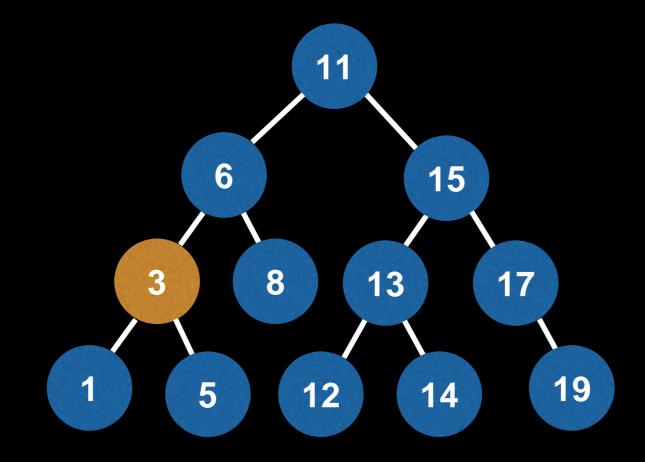

Call Stack:

node 11 node 6 node 3


```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

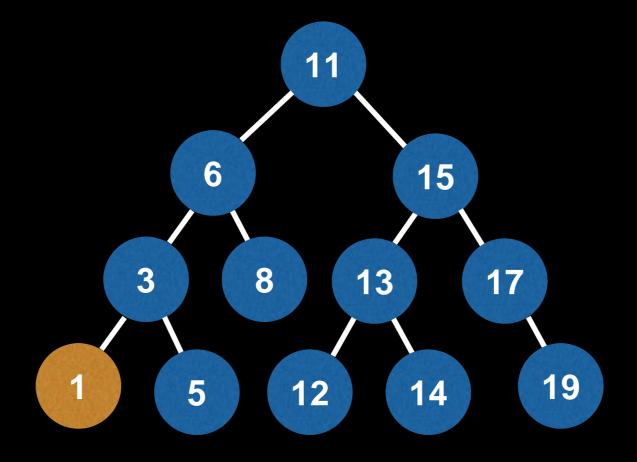

Call Stack:

node 11 node 6 node 3 node 1

```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

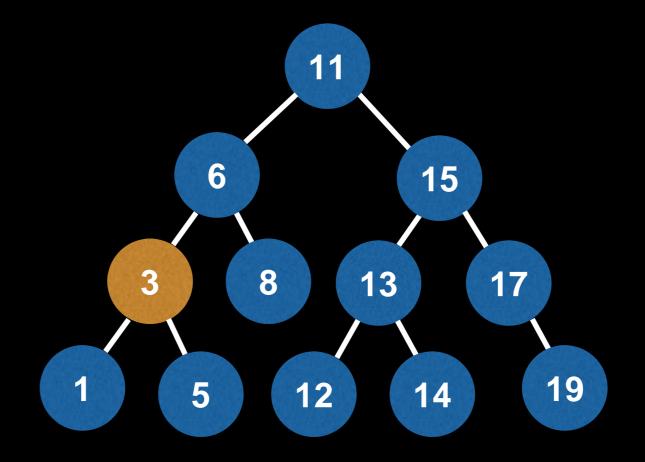


Call Stack:

node 11 node 6 node 3

Order: 1,3

```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

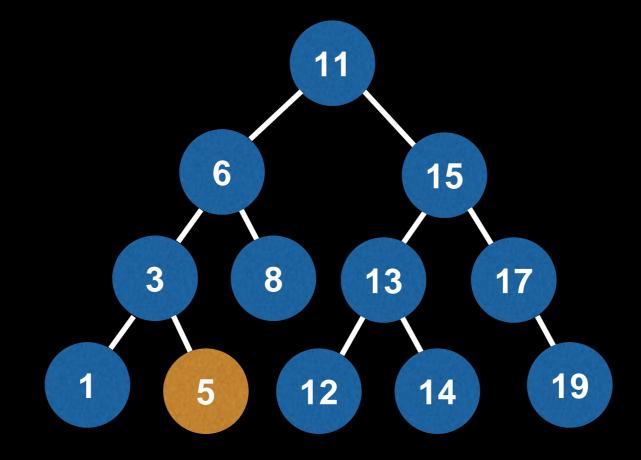


Call Stack:

node 11 node 6 node 3 node 5

Order: 1,3,5

```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

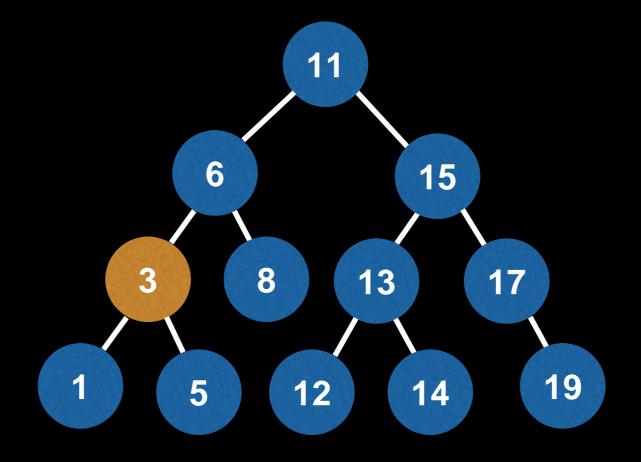


Call Stack:

node 11 node 6 node 3

Order: 1,3,5

```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

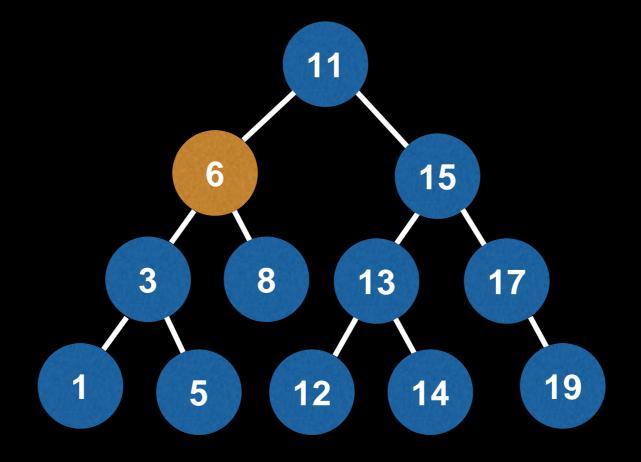


Call Stack:

node 11 node 6

Order: 1,3,5,6

```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

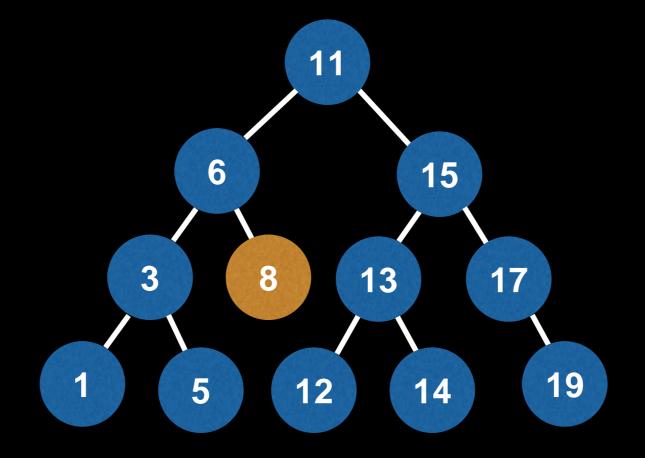


Call Stack:

node 11 node 6 node 8

Order: 1,3,5,6,8


```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

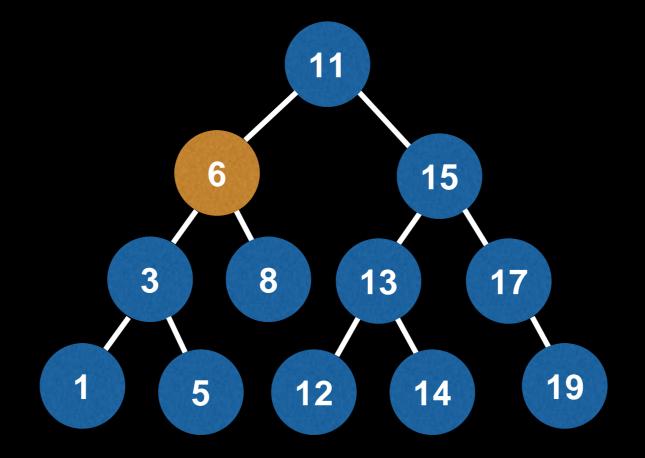

Call Stack: node 11 node 6

Order: 1,3,5,6,8


inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

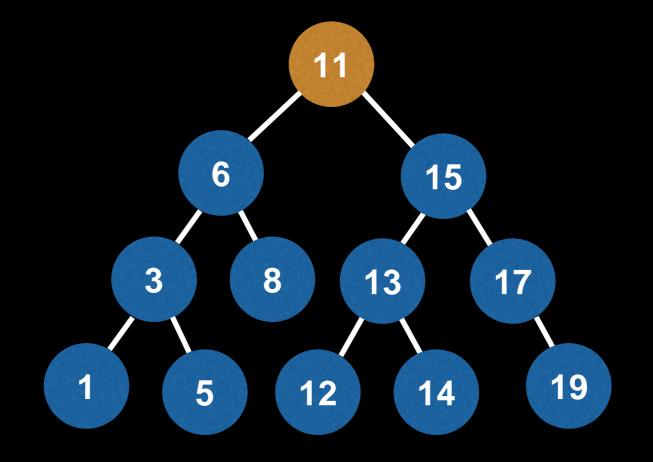

Call Stack: node 11

Order: 1,3,5,6,8,11

```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

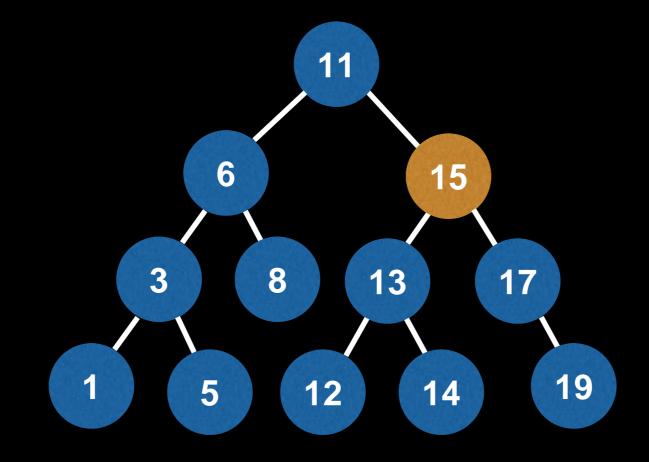


Call Stack:

node 11 node 15

Order: 1,3,5,6,8,11

```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

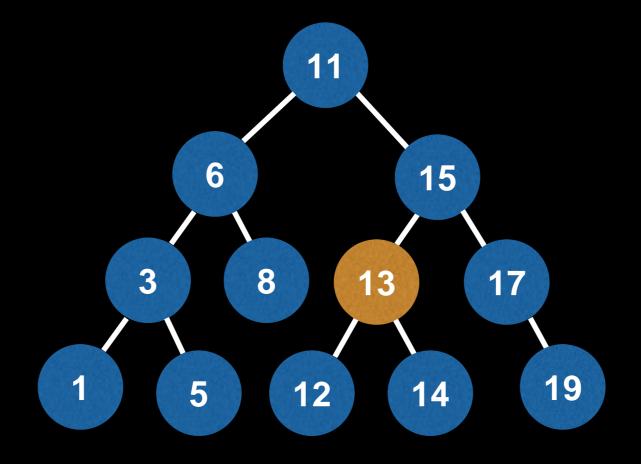


Call Stack:

node 11 node 15

node 13

Order: 1,3,5,6,8,11

```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

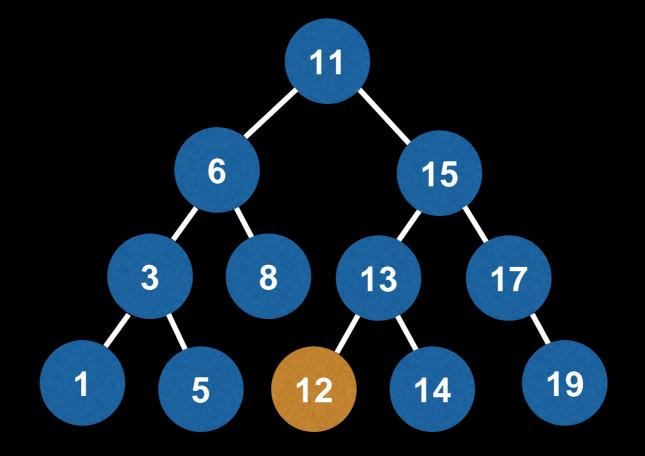

Call Stack:

node 11


node 15

node 13

node 12

Order: 1,3,5,6,8,11,12

```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

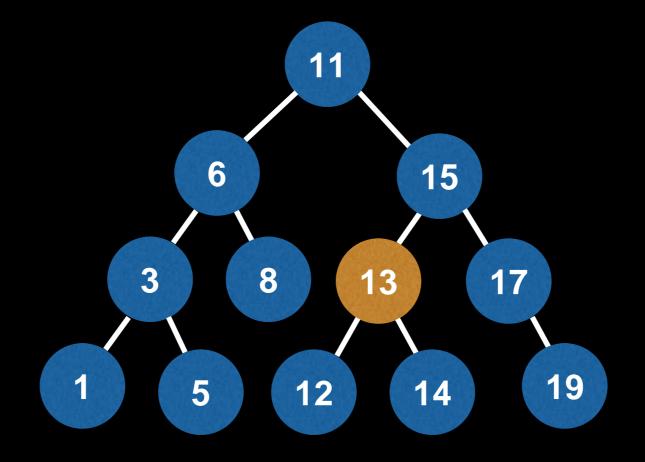


Call Stack:

node 11 node 15

node 13

Order: 1,3,5,6,8,11,12,13

```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

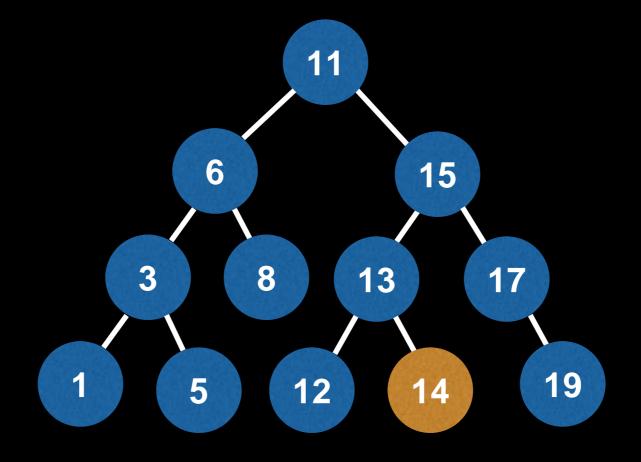

Call Stack:

node 11


node 15

node 13

node 14

Order: 1,3,5,6,8,11,12,13,14

```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

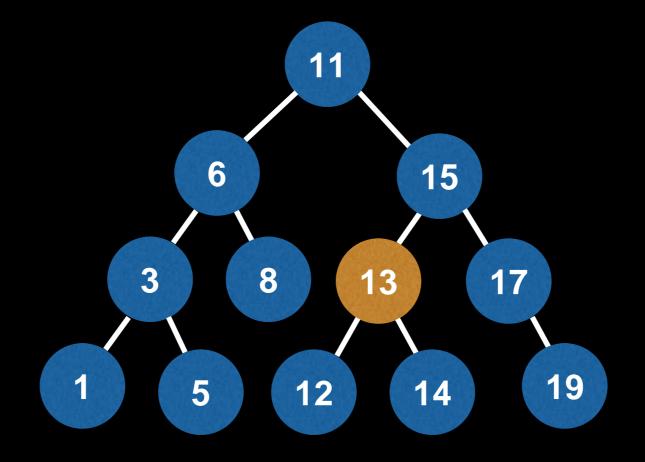


Call Stack:

node 11 node 15 node 13

Order: 1,3,5,6,8,11,12,13,14


```
inorder(node):
  if node == null: return
  inorder(node.left)
  print(node.value)
  inorder(node.right)
```

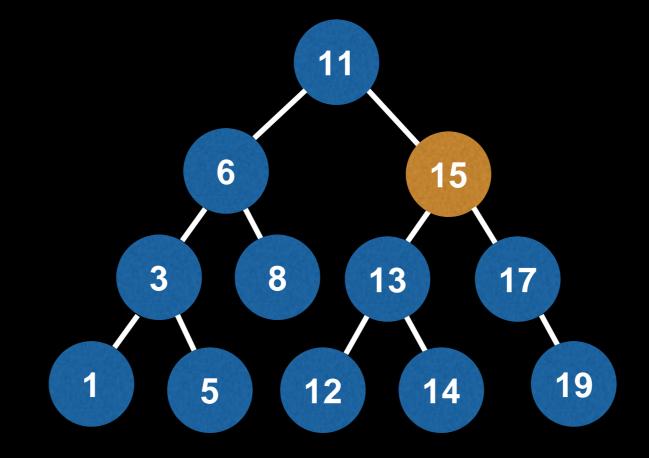

Call Stack:

node 11 node 15

inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

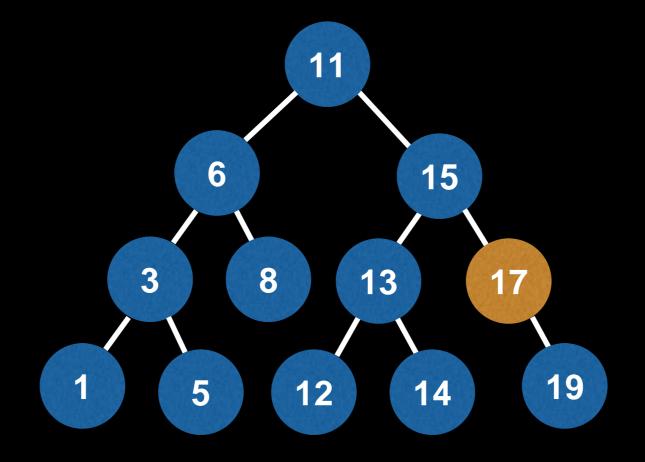


Call Stack:

node 11 node 15

node 17

inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

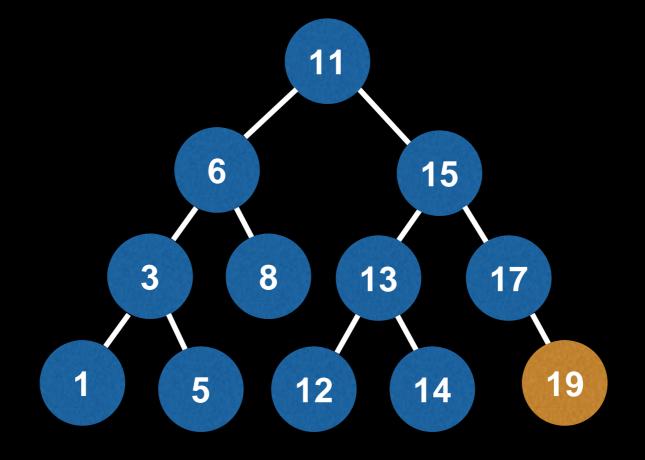

Call Stack:


node 11

node 15

node 17

node 19


inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

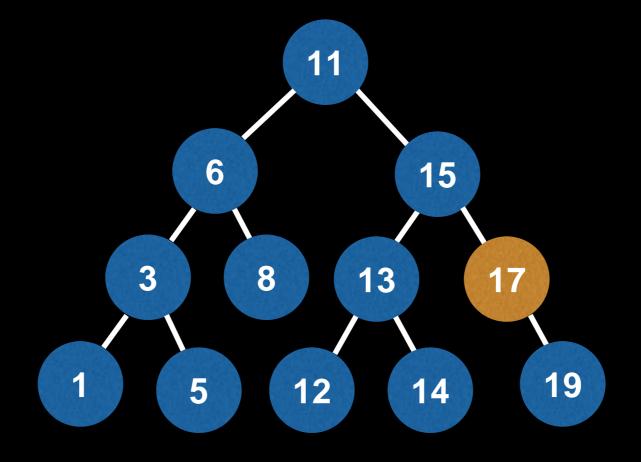

Call Stack:

node 11 node 15 node 17


inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

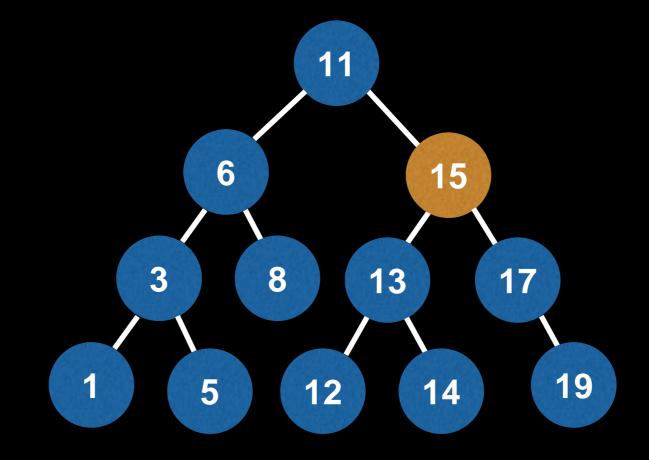

Call Stack:


node 11 node 15

inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

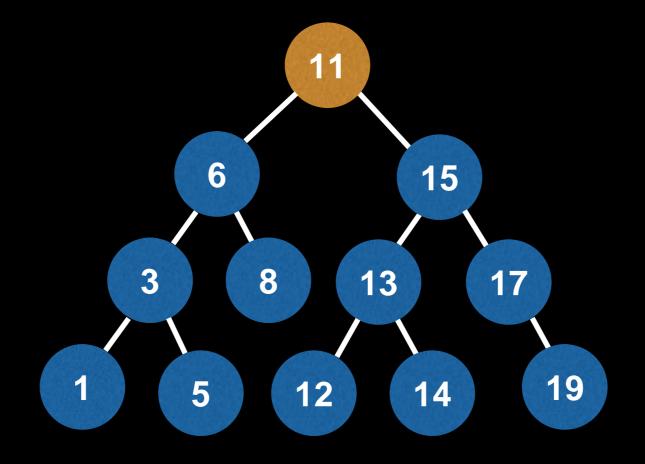


Call Stack: node 11

inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

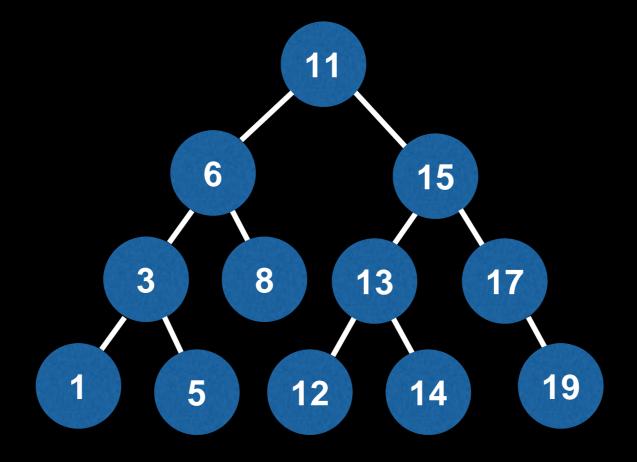

Call Stack:

inorder(node):
 if node == null: return
 inorder(node.left)
 print(node.value)
 inorder(node.right)

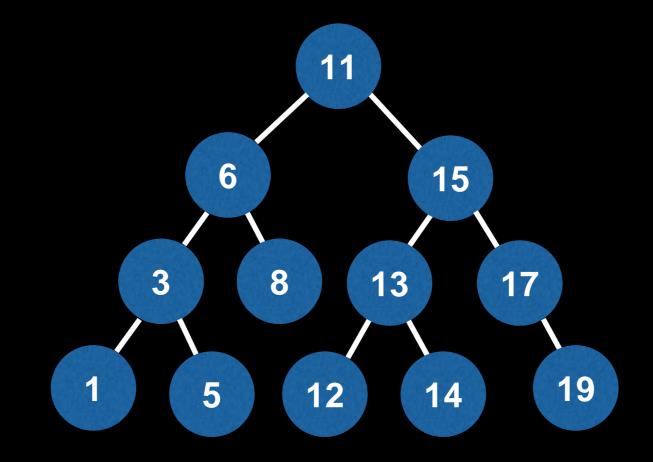


Call Stack:

Order: 1,3,5,6,8,11,12,13,14,15,17,19

Notice that with a BST the values printed by the inorder traversal are in increasing order!


postorder(node):
 if node == null: return
 postorder(node.left)
 postorder(node.right)
 print(node.value)

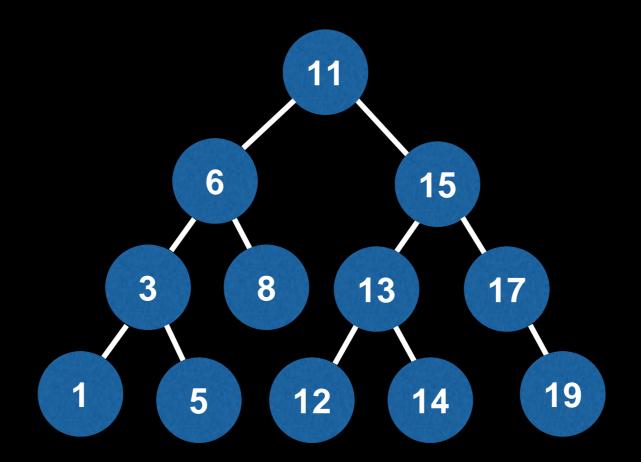

Call Stack:


Traverse the left subtree followed by the right subtree then print the value of the node

postorder(node):
 if node == null: return
 postorder(node.left)
 postorder(node.right)
 print(node.value)

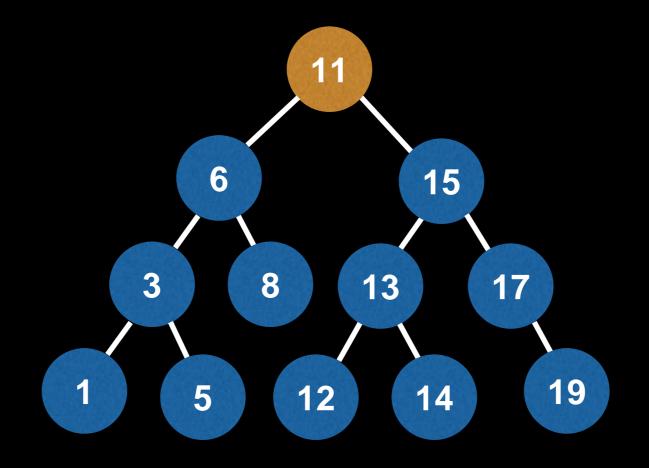


Call Stack: node 11

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

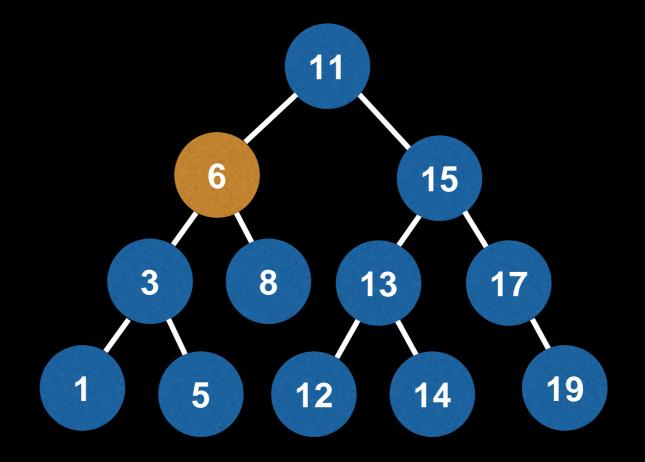

Call Stack: node 11 node 6


```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

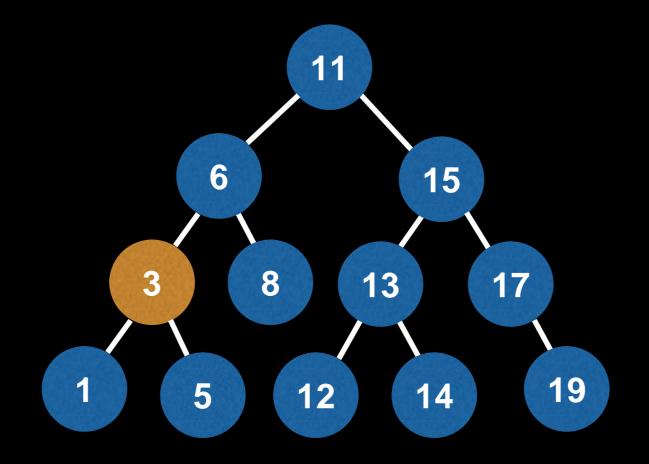

Call Stack:

node 11 node 6 node 3


```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

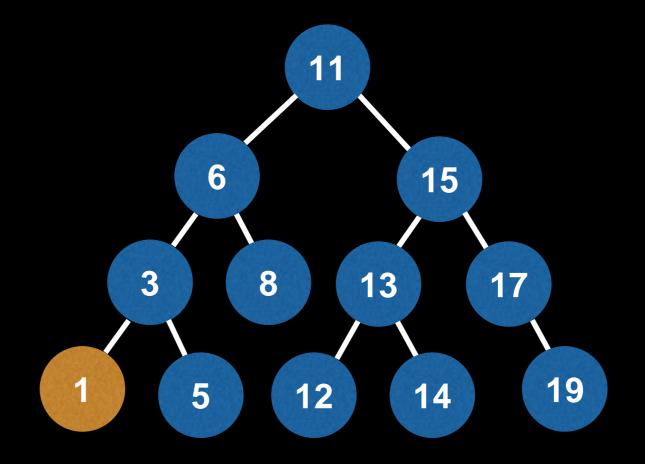

Call Stack:

node 11 node 6 node 3 node 1


```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

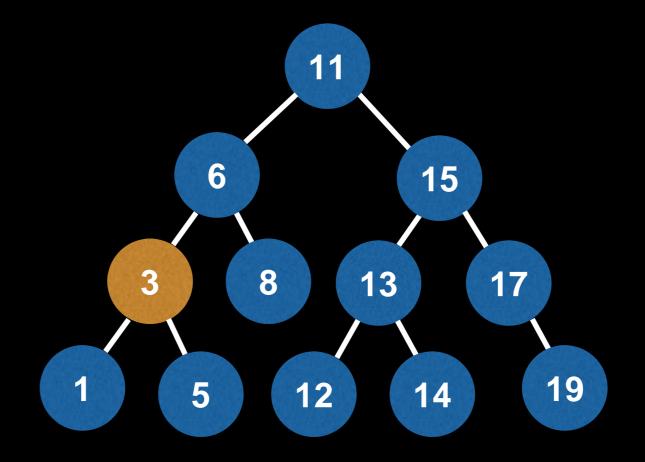

Call Stack:

node 11 node 6 node 3

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

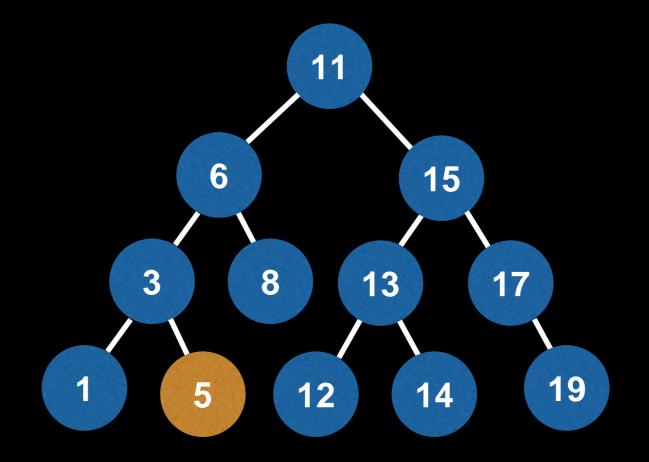


Call Stack:

node 11 node 6 node 3 node 5

Order: 1,5

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

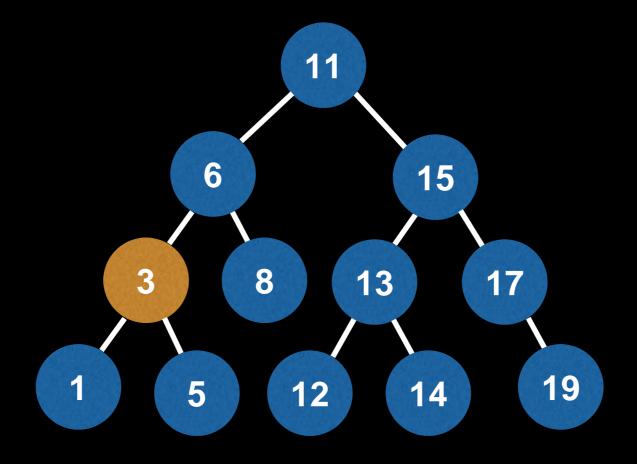


Call Stack:

node 11 node 6 node 3

Order: 1,5,3


```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

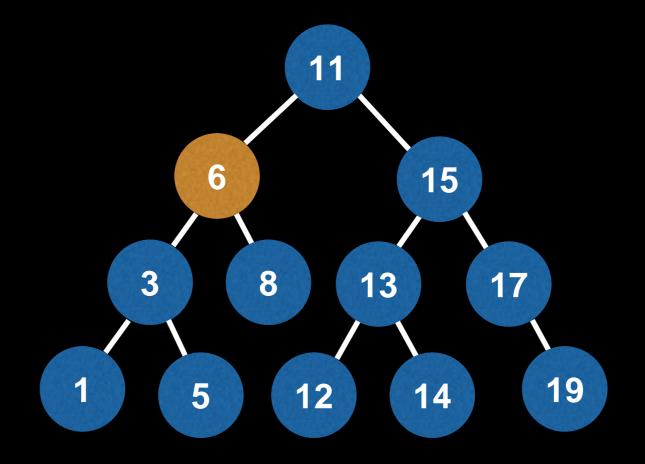

Call Stack: node 11 node 6

Order: 1,5,3


```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

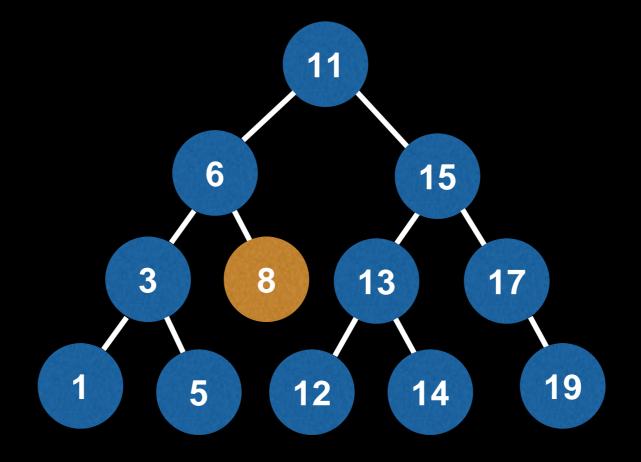

Call Stack:


node 11 node 6 node 8

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

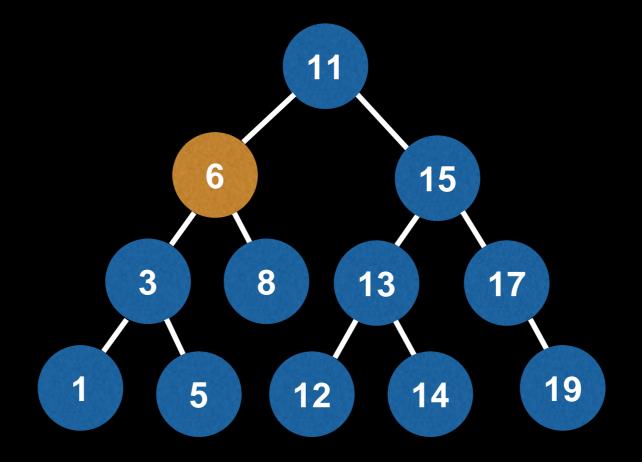


Call Stack: node 11 node 6

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

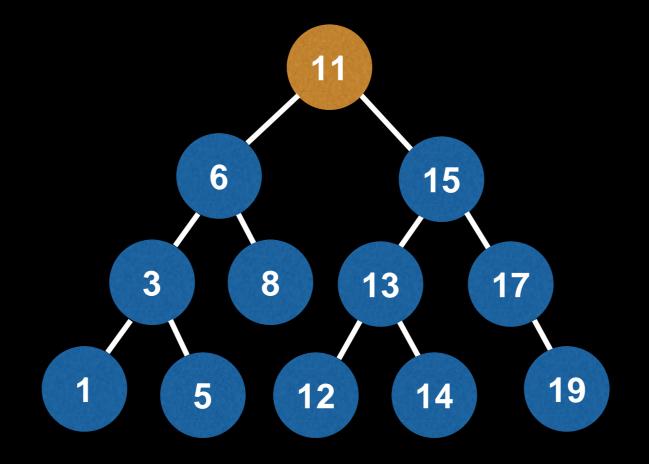

Call Stack: node 11


```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

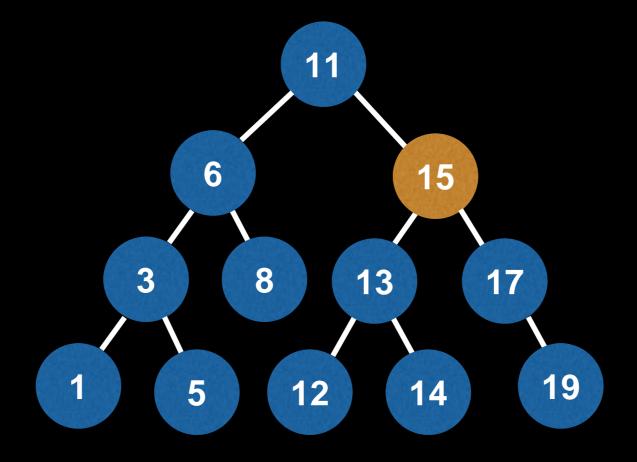

Call Stack:

node 11 node 15


```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

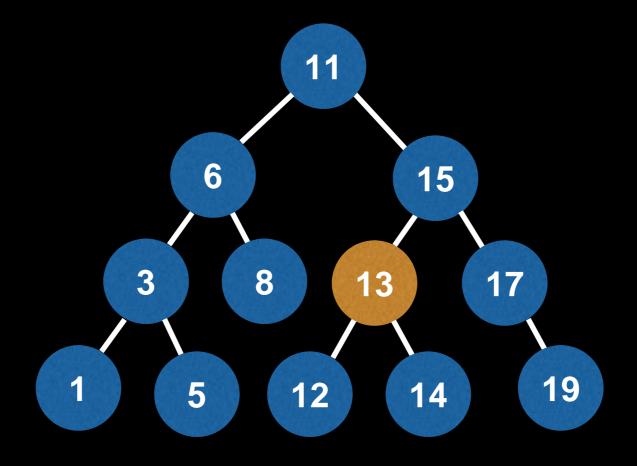

Call Stack:

node 11 node 15 node 13

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

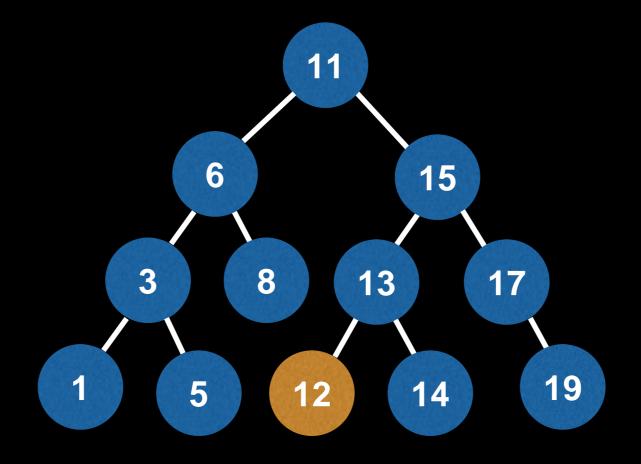

Call Stack:


node 11 node 15

node 13

node 12

Order: 1,5,3,8,6,12

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

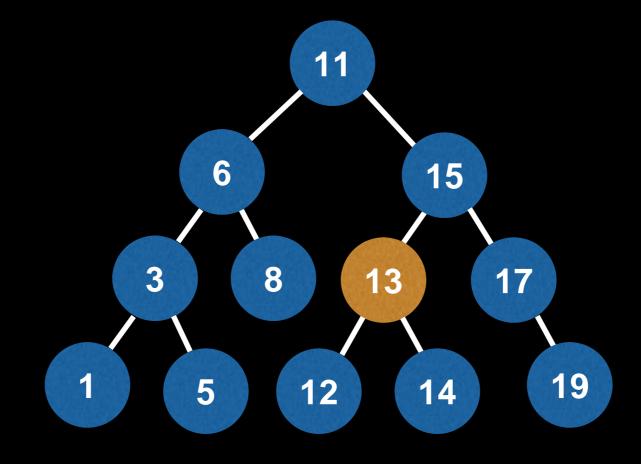


Call Stack:

node 11 node 15 node 13

Order: 1,5,3,8,6,12

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

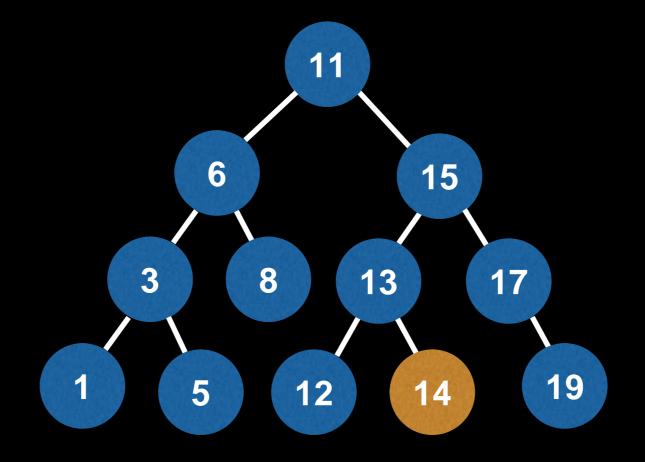

Call Stack:

node 11


node 15

node 13

node 14

Order: 1,5,3,8,6,12,14

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

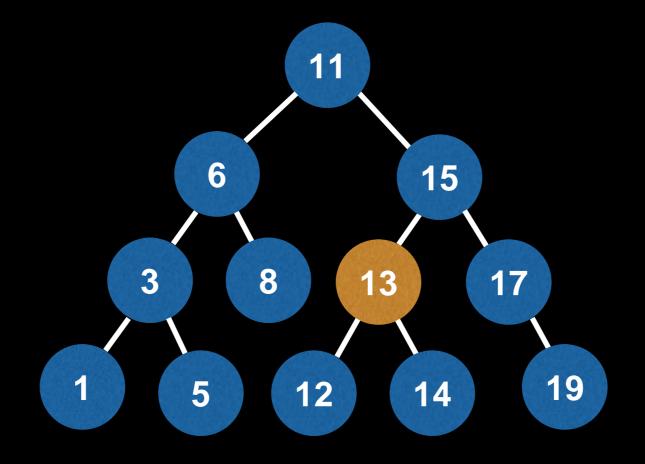


Call Stack:

node 11 node 15 node 13

Order: 1,5,3,8,6,12,14,13

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

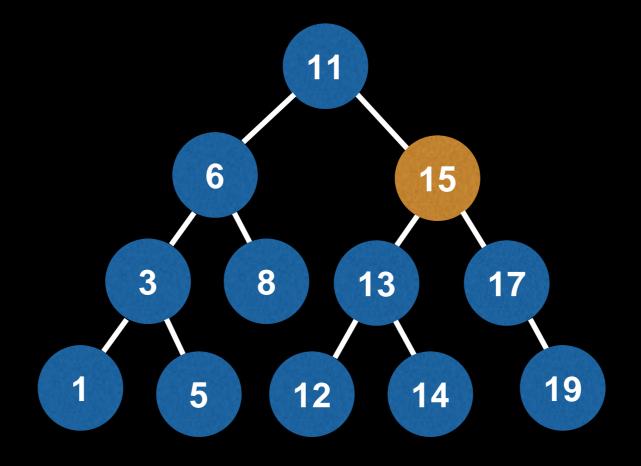


Call Stack:

node 11 node 15

Order: 1,5,3,8,6,12,14,13

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

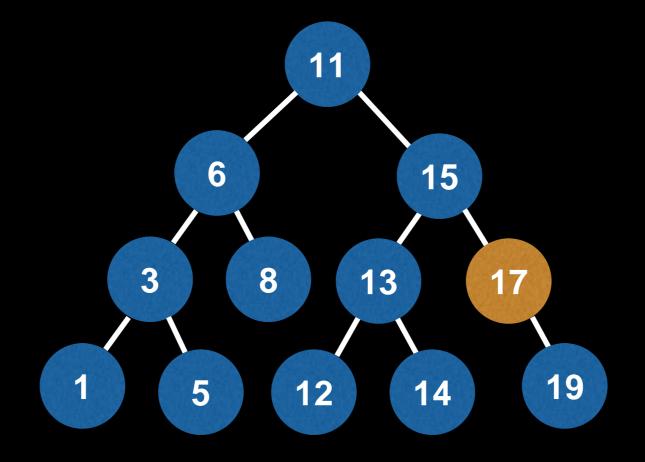


Call Stack:

node 11 node 15 node 17

Order: 1,5,3,8,6,12,14,13

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

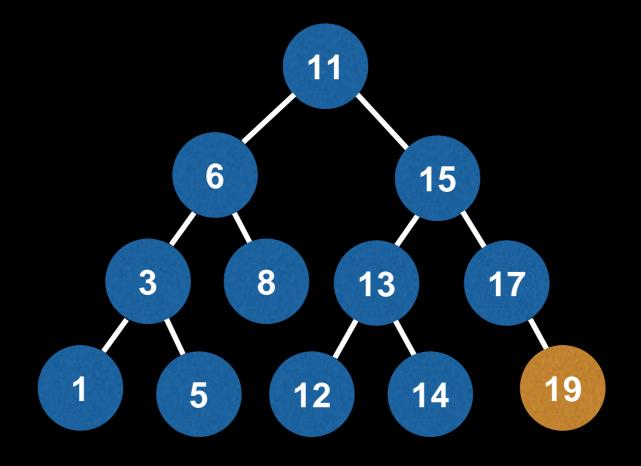

Call Stack:

node 11


node 15

node 17

node 19

Order: 1,5,3,8,6,12,14,13,19

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

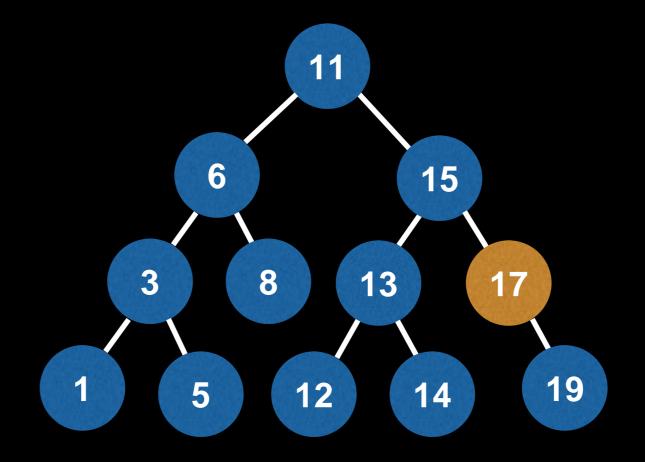


Call Stack:

node 11 node 15 node 17

Order: 1,5,3,8,6,12,14,13,19,17

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

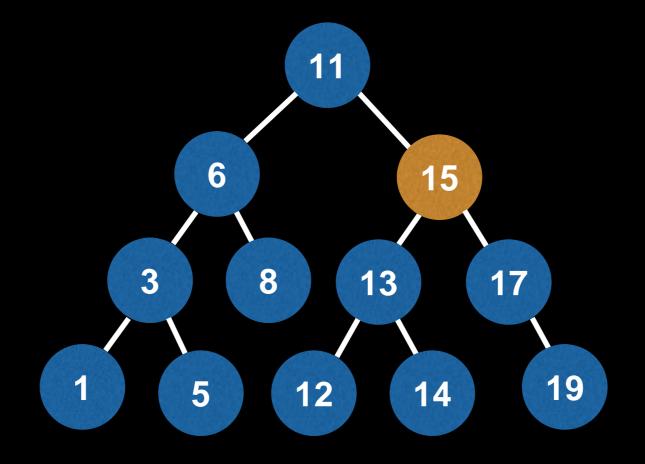


Call Stack:

node 11 node 15

Order: 1,5,3,8,6,12,14,13,19,17,15


```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

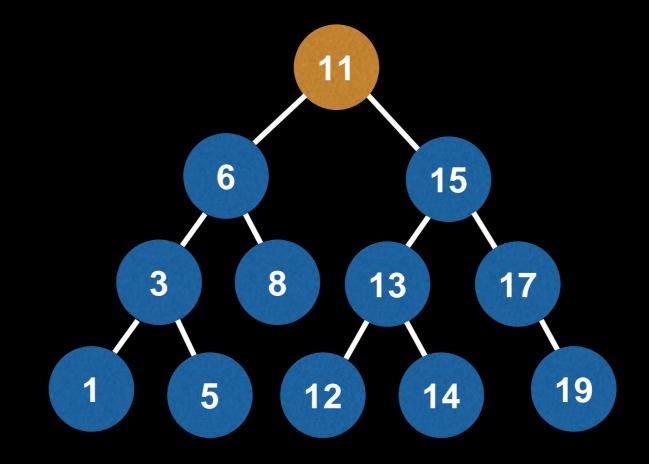

Call Stack: node 11


Order: 1,5,3,8,6,12,14,13,19,17,15,11

```
postorder(node):
  if node == null: return
  postorder(node.left)
  postorder(node.right)
  print(node.value)
```

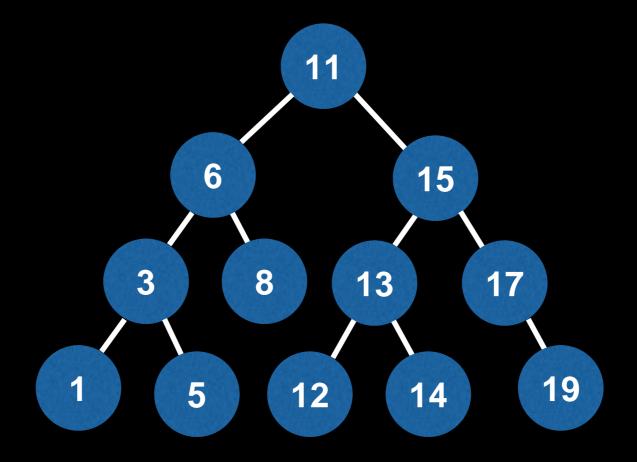


Call Stack:

Order: 1,5,3,8,6,12,14,13,19,17,15,11

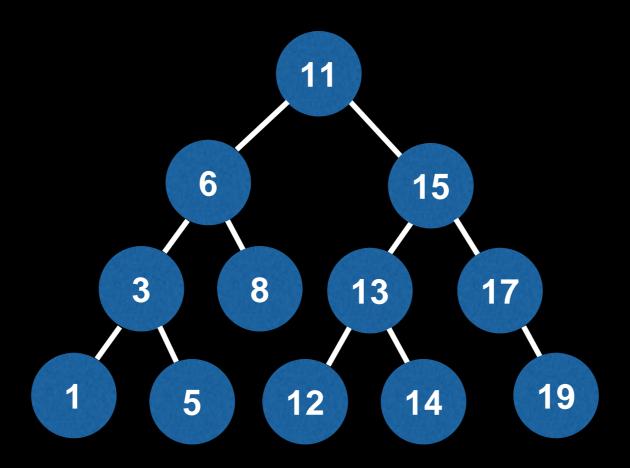


In a level order traversal we want to print the nodes as they appear one layer at a time.

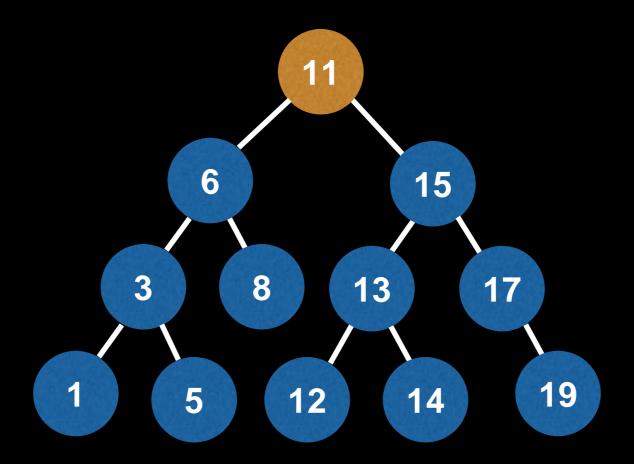


In a level order traversal we want to print the nodes as they appear one layer at a time.

Order: 11

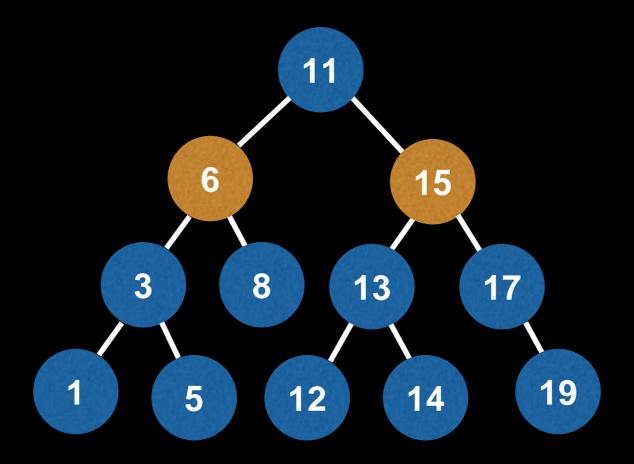


In a level order traversal we want to print the nodes as they appear one layer at a time.

Order: 11,6,15

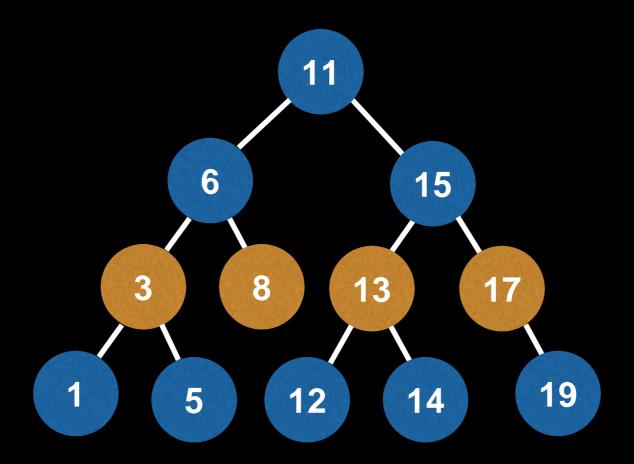


In a level order traversal we want to print the nodes as they appear one layer at a time.

Order: 11,6,15,3,8,13,17

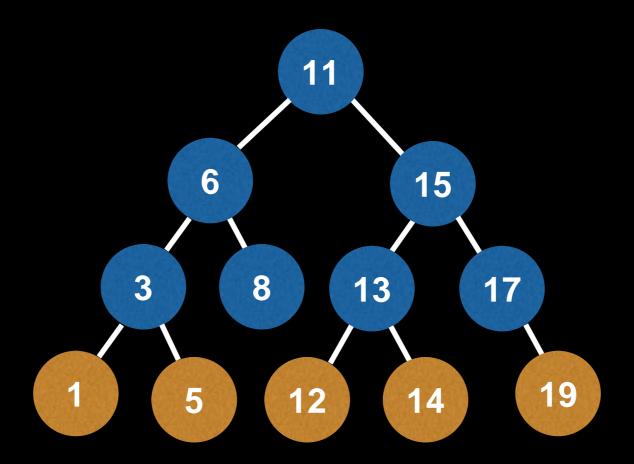


In a level order traversal we want to print the nodes as they appear one layer at a time.

Order: 11,6,15,3,8,13,17,1,5,12,14,19

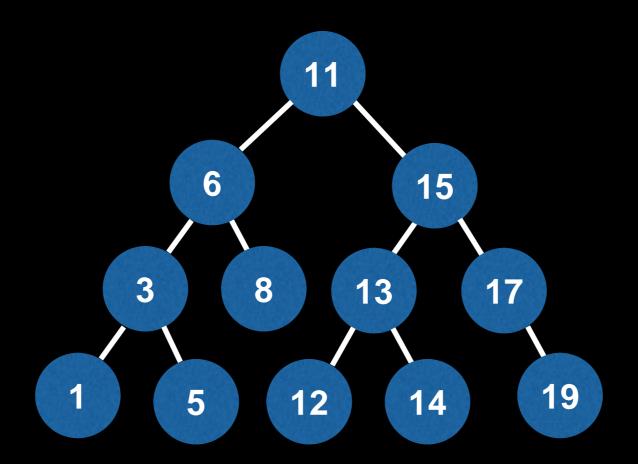


To obtain this ordering we want to do a **Breadth First Search** (BFS) from the root node down to the leaf nodes.

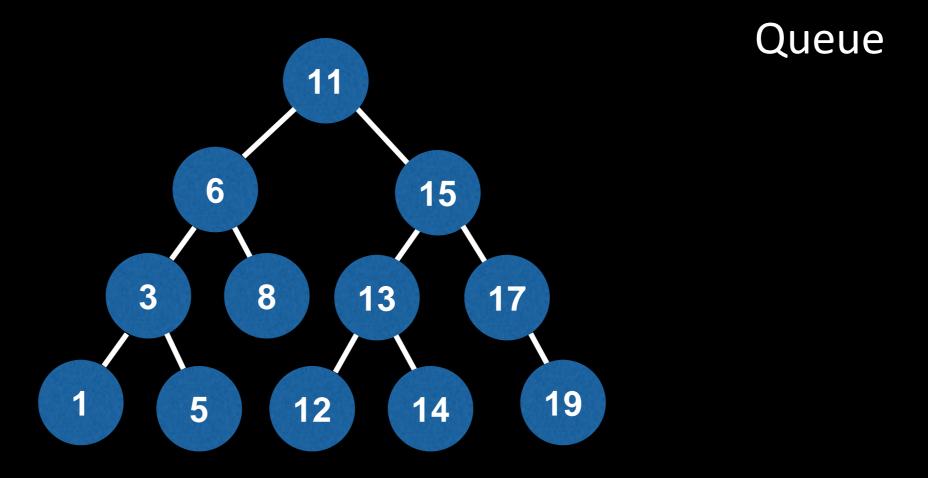


To do a BFS we will need to maintain a Queue of the nodes left to explore.

Begin with the root inside of the queue and finish when the queue is empty.

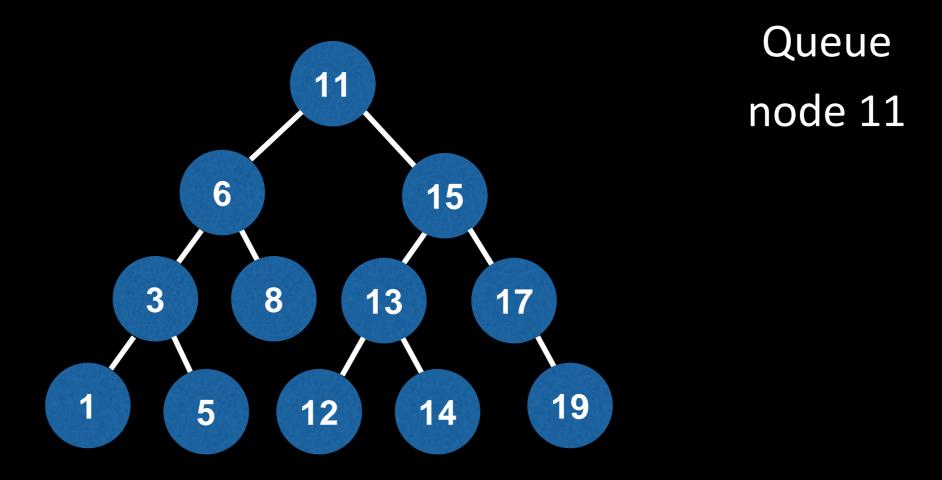


At each iteration we add the left child and then the right child of the current node to our Queue.

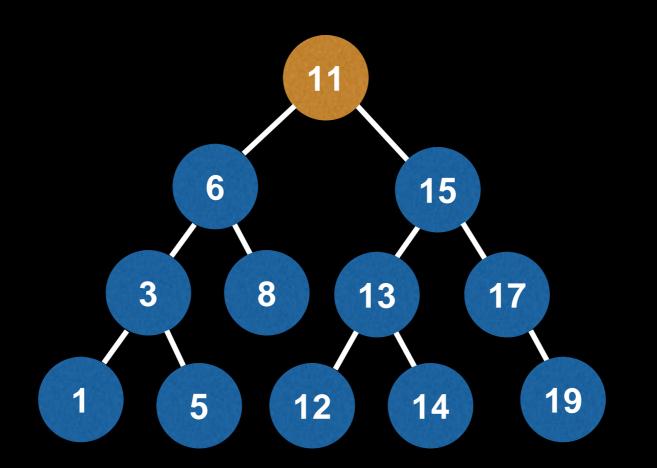


Queue node 6 node 15

Order: 11

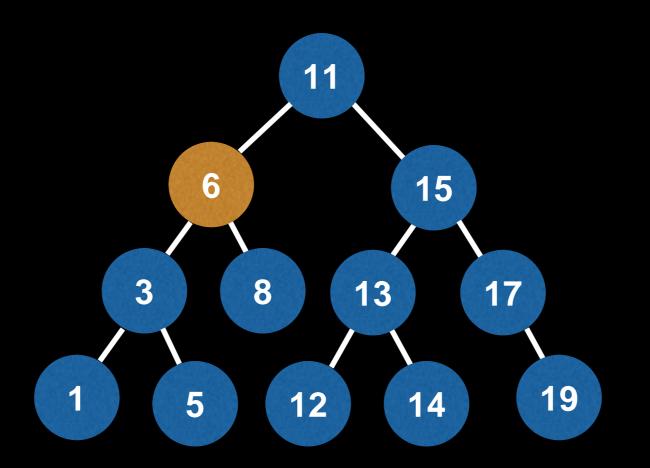


Queue node 15 node 3 node 8

Order: 11,6

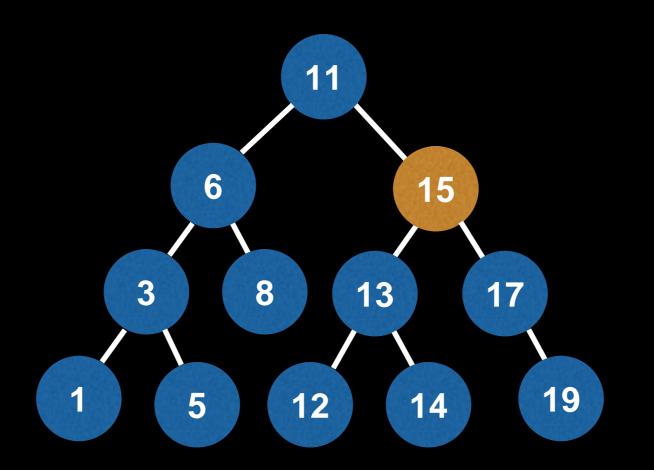


Queue
node 3
node 8
node 13
node 17

Order: 11,6,15

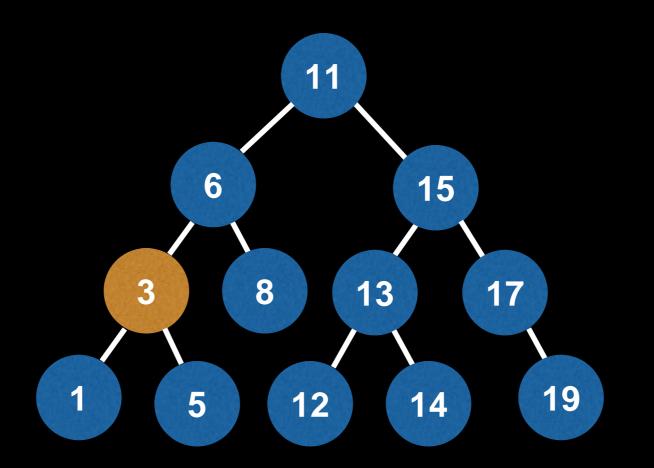


Queue
node 8
node 13
node 17
node 1
node 5

Order: 11,6,15,3

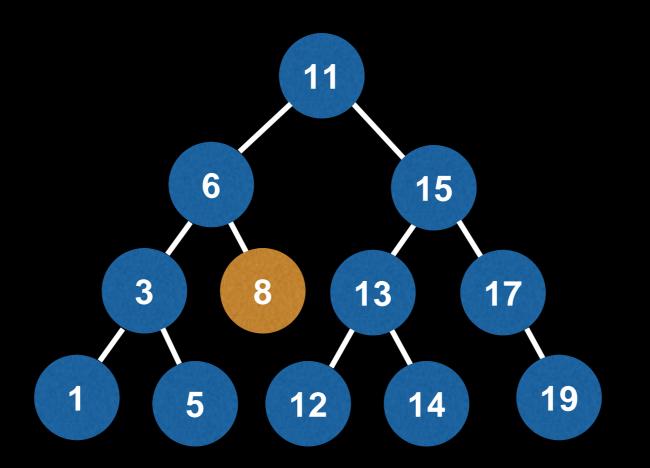


Queue node 13 node 17 node 1 node 5

Order: 11,6,15,3,8

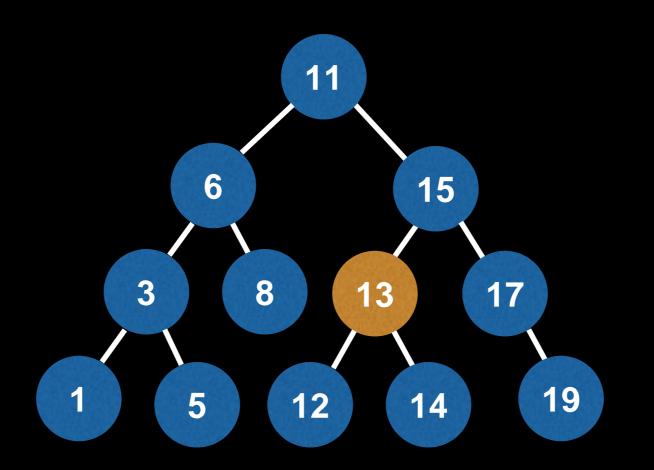


Queue
node 17
node 1
node 5
node 12
node 14

Order: 11,6,15,3,8,13

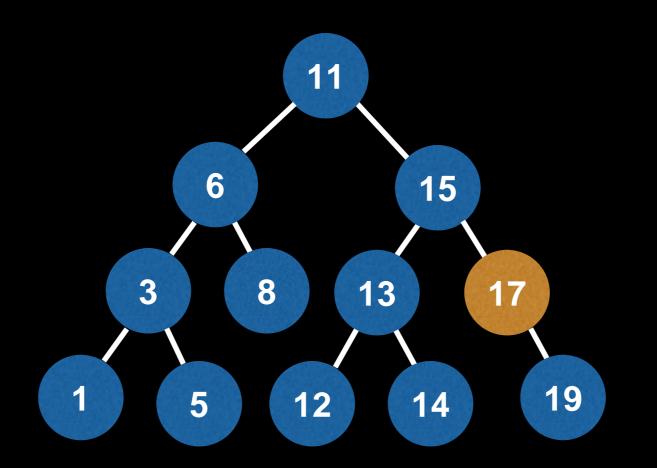


Queue
node 1
node 5
node 12
node 14
node 19

Order: 11,6,15,3,8,13,17

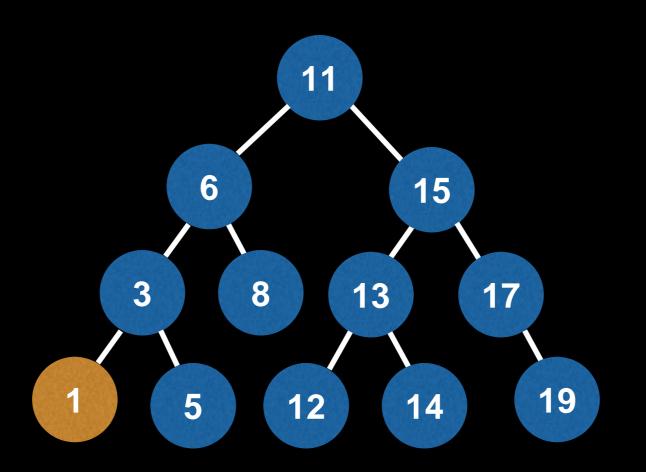


Queue node 5 node 12 node 14 node 19

Order: 11,6,15,3,8,13,17,1

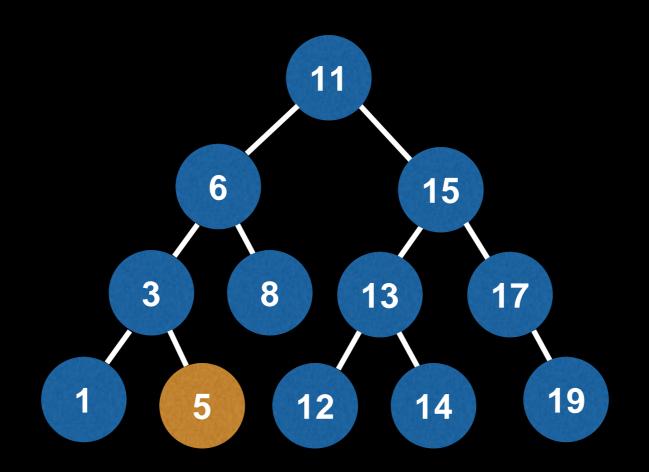


Queue node 12 node 14 node 19

Order: 11,6,15,3,8,13,17,1,5

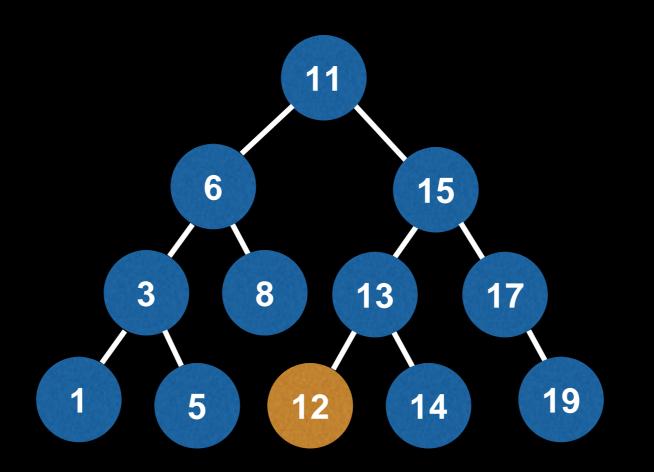


Queue node 14 node 19

Order: 11,6,15,3,8,13,17,1,5,12

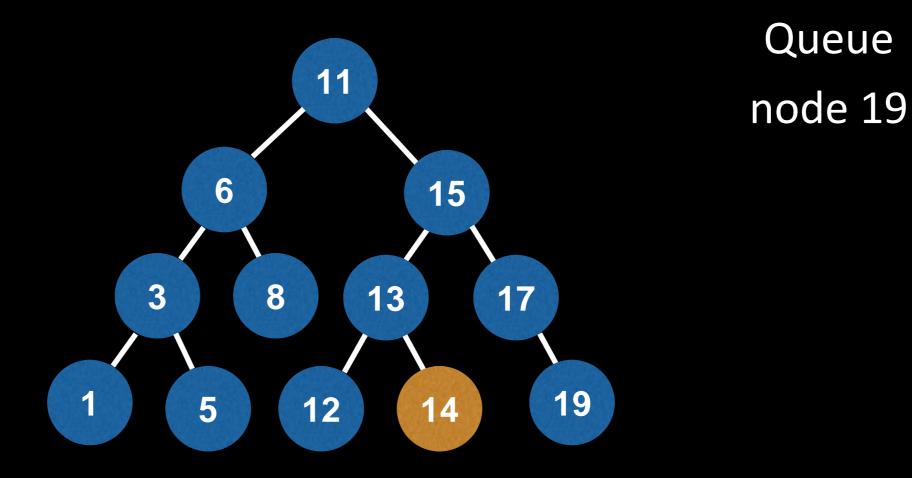


Order: 11,6,15,3,8,13,17,1,5,12,14

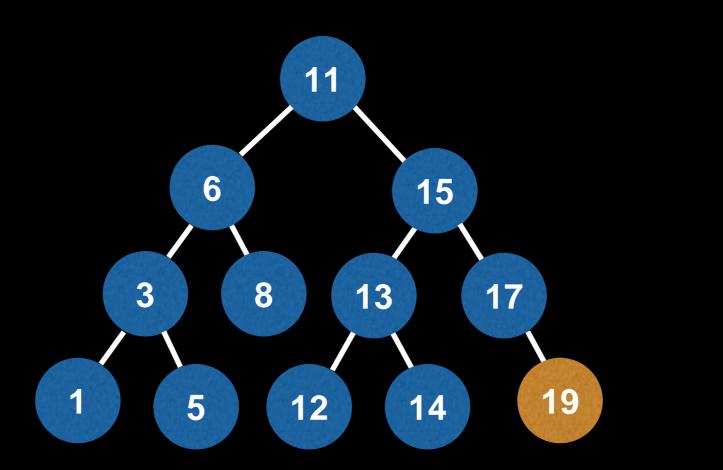

Queue

Order: 11,6,15,3,8,13,17,1,5,12,14,19

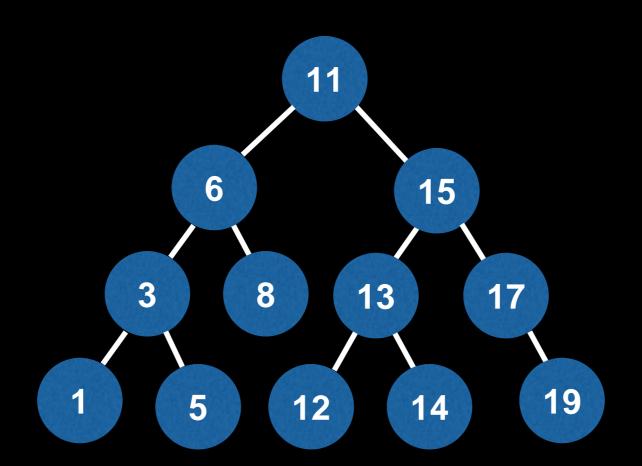

Queue

Order: 11,6,15,3,8,13,17,1,5,12,14,19