

Name: Jannah Mae C. Lero
Course, Year & Section: BSIT 4-5

Student Number: 202302646
Date: September 19, 2026

ONLINE ACTIVITY #2
Personalized Linux, and Git Cheat Sheet


1. BASIC LINUX COMMANDS

Command	Sample Usage	Description
ls	ls	Displays the contents of a directory, showing all hidden items (-a) and detailed properties like file size and permissions (-l).
cd	cd /var/www/html	Navigates between system folders by switching the active working directory to a specified location.
pwd	pwd	Outputs the full, exact system path of the directory you are currently working in.
mkdir	mkdir my_project	Generates a new folder in your current location with the designated name.
rm	rm -rf temp_folder	Permanently erases files or folders; adding -rf forces recursive deletion of directories and their contents.
cp	cp config.env config.env.backup	Duplicates files or entire folders from a source location to a designated destination path.
mv	mv apps.js src/app.js	Transfers files to another folder or changes the name of existing files and directories.
cat	cat server.log	Reads and prints the entire contents of a file directly onto the terminal console.
grep	grep "ERROR" server.log	Filters through text files or output streams to locate lines matching specific keywords or patterns.
chmod	chmod +x deploy.sh	Adjusts system read, write, or execution permissions for specific files and programs.
sudo	Sudo systemctl restart nginx	Executes terminal operations using root-level administrative access privileges.

2. BASIC GIT COMMANDS

Git Command	Sample Usage	Description
git init	git init	Sets up and initializes a brand-new, empty Git version-tracking repository in the current folder.
git clone	git clone https://github.com/user/re.git	Makes a local copy of a project hosted on a remote server like GitHub onto your machine.
git status	git status	Displays the current state of files, identifying which are modified, untracked, or ready to be committed.
git add	git add .	Prepares selected file modifications by placing them into the staging area before committing.
git commit	git commit -m "Fix login button styling"	Saves all staged file changes into permanent project history alongside a descriptive update log.
git push	git push origin main	Uploads local commit records to a remote cloud repository like GitHub to update the main project.
git pull	git pull origin main	Fetches and automatically incorporates updates from the remote repository into your local files.
git branch	git branch feature/auth-fix	Manages development paths, allows listing, creating, or deleting separate workspace branches.
git checkout	git checkout -b feature/auth-page	Switches your workspace to target another branch, or creates a new one using the -b option.
git merge	git merge feature/auth-fix	Integrates code history and commits from a secondary branch into your current active branch.
git config --global user.name	git config --global user.name "Jannah Lero"	Assigns your global full name to be tagged on every Git commit you author.
git config --global user.email	git config --global user.email "jannahmae.lero@cvsu.edu.ph"	Configures your primary email address associated with your Git commit history.

3. THREE-TREE ARCHITECTURE OF GIT

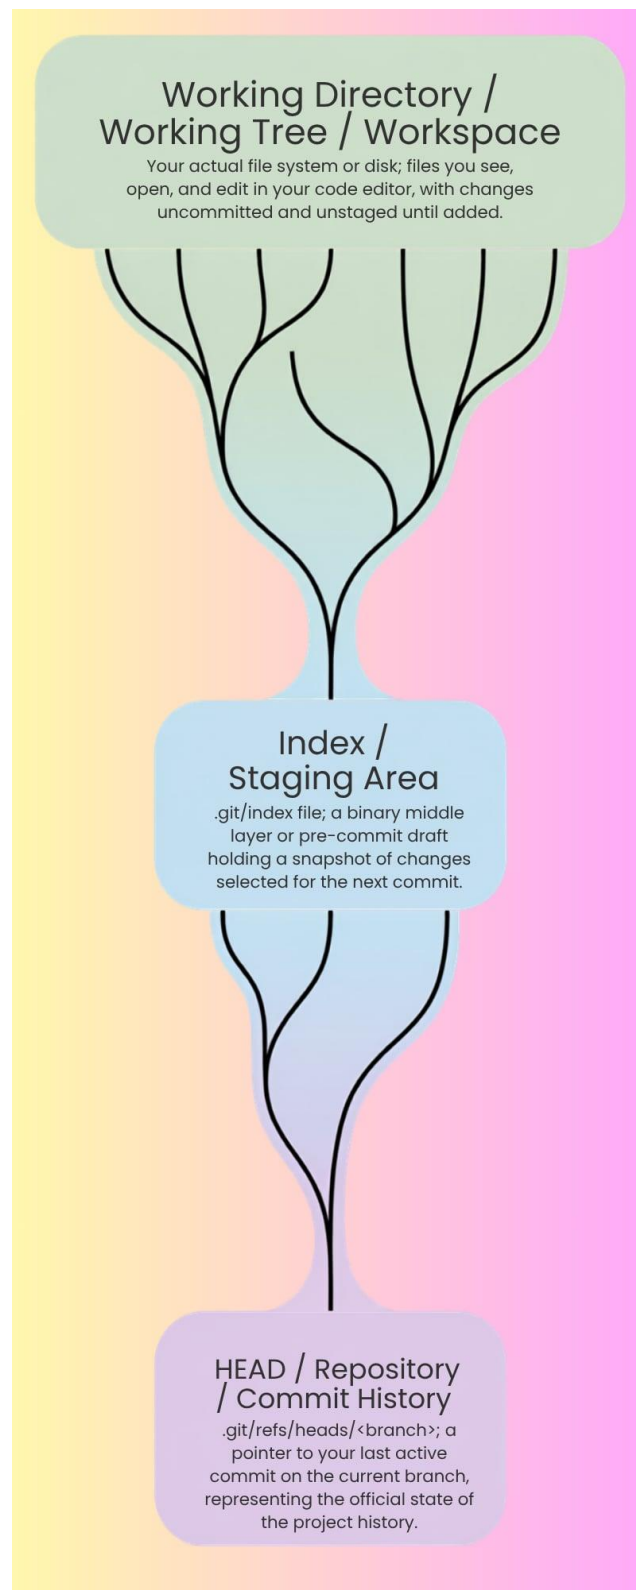

REFERENCES:

- **Linux Commands:** <https://sites.google.com/view/dominicsingaraj/technology/linux-home/linux-cheatsheet?>
- **Git Commands:** <https://sites.google.com/site/ncharoe/applications/versioncontrol/git?>