



MICHIGAN IMPUTATION SERVER



Christian
Fuchsberger



Sebastian
Schönherr



Xueling Sim



Lukas Forer



Saori Sakaue



Albert Smith

Section 1

Imputation and the Server



Christian Fuchsberger
Eurac Research
cfuchsberger@eurac.edu



MICHIGAN
IMPUTATION SERVER

Setup

- 6 Sessions:
 - (1) Intro, (2) Use the server, (3) GWAS, (4) Imputation Bot and PGS Server, (5) HLA Imputation, (6) TOPMed
 - Lectures
 - Demos
 - Interaction
 - Our question: Raise your hand or add to the chat
 - Your questions: please add to Q & A box
- Question & Answer session at the end (or email us)

Genotype imputation

Key method used in GWAS to

- Increase the number of tested variants
- Fine-mapping becomes more complete
- Meta-analysis using different arrays

0. Imputation setting

GWAS Haplotypes

```
... . . . A . . . . . . . A . . . . A . . .  
... . . . G . . . . . . . C . . . . A . . .
```

Reference Haplotypes (e.g. 1000G)

```
C G A G A T C T C C T T C T T C T G T G C  
C G A G A T C T C C C G A C C T C A T G G  
C C A A G C T C T T T C T T C T G T G C  
C G A A G C T C T T T C T T C T G T G C  
C G A G A C T C T C C G A C C T T A T G C  
T G G G A T C T C C C G A C C T C A T G G  
C G A G A T C T C C C G A C C T T G T G C  
C G A G A C T C T T T C T T T G T A C  
C G A G A C T C T C C G A C C T C G T G C  
C G A A G C T C T T T C T T C T G T G C
```

1. Identify match among reference

GWAS Haplotypes


. . . . A A A
. . . . G C A

Reference Haplotypes (e.g. 1000G)

C	G	A	G	A	T	C	T	C	C	T	T	C	T	T	T	C	T	G	T	G	C
C	G	A	G	A	T	C	T	C	C	C	G	A	C	C	T	C	A	T	G	G	
C	C	A	A	G	C	T	C	T	T	T	T	C	T	T	T	C	T	G	T	G	C
C	G	A	A	G	C	T	C	T	T	T	T	C	T	T	T	C	T	G	T	G	C
C	G	A	G	A	C	T	C	T	C	C	G	A	C	C	T	T	A	T	G	C	
T	G	G	G	A	T	C	T	C	C	C	G	A	C	C	T	C	A	T	G	G	
C	G	A	G	A	T	C	T	C	C	C	G	A	C	C	T	T	G	T	G	C	
C	G	A	G	A	C	T	C	T	T	T	T	C	T	T	T	T	G	T	A	C	
C	G	A	G	A	C	T	C	T	C	C	G	A	C	C	T	C	G	T	G	C	
C	G	A	A	G	C	T	C	T	T	T	T	C	T	T	T	C	T	G	T	G	C


2. Impute

GWAS Haplotypes




c g a g A t c t c c c g A c c t c A t g g
c g a a G c t c t t t C t t t c A t g g

Reference Haplotypes (e.g. 1000G)

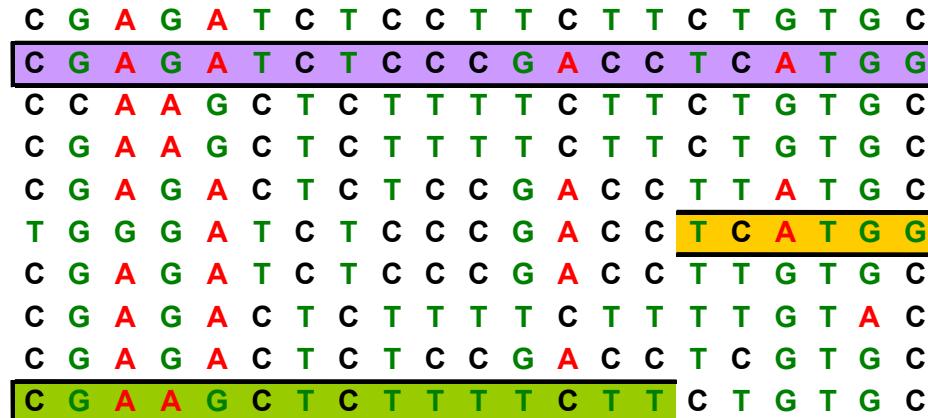

C G A G A T C T C C T T C T T C T G T G C
C G A G A T C T C C C G A C C T C A T G G
C C A A G C T C T T T T C T T C T G T G C
C G A A G C T C T T T T C T T C T G T G C
C G A G A C T C T C C G A C C T T A T G C
T G G G A T C T C C C G A C C T C A T G G
C G A G A T C T C C C G A C C T T G T G C
C G A G A C T C T T T T C T T T T G T A C
C G A G A C T C T C C G A C C T C G T G C
C G A A G C T C T T T T C T T C T G T G C

ASHG 2014: imputation web service

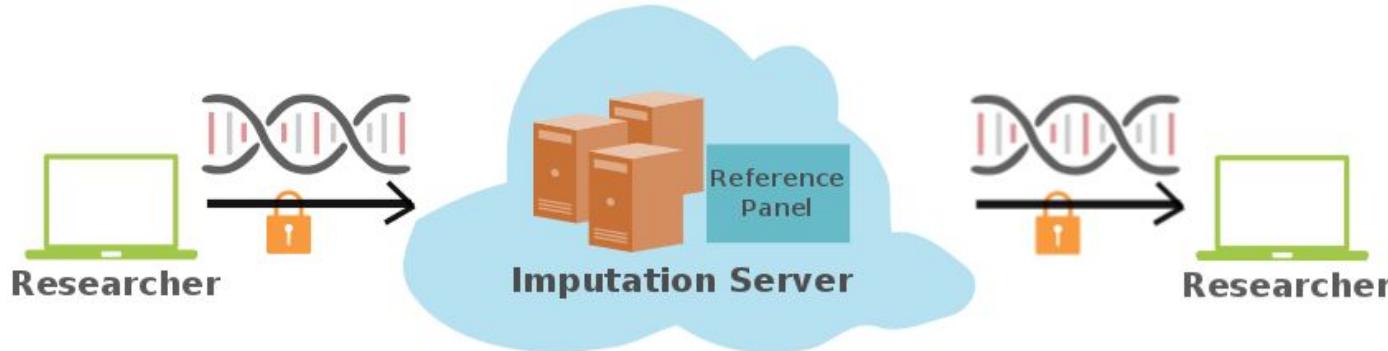

1.

Upload GWAS data

2.

Server performs

- Quality checks
- Pre-phasing
- Imputation
- Encryption

3.


Download results

Have you used the imputation server yet?


Put a “Yes” in the chat

Or


Thumbs up

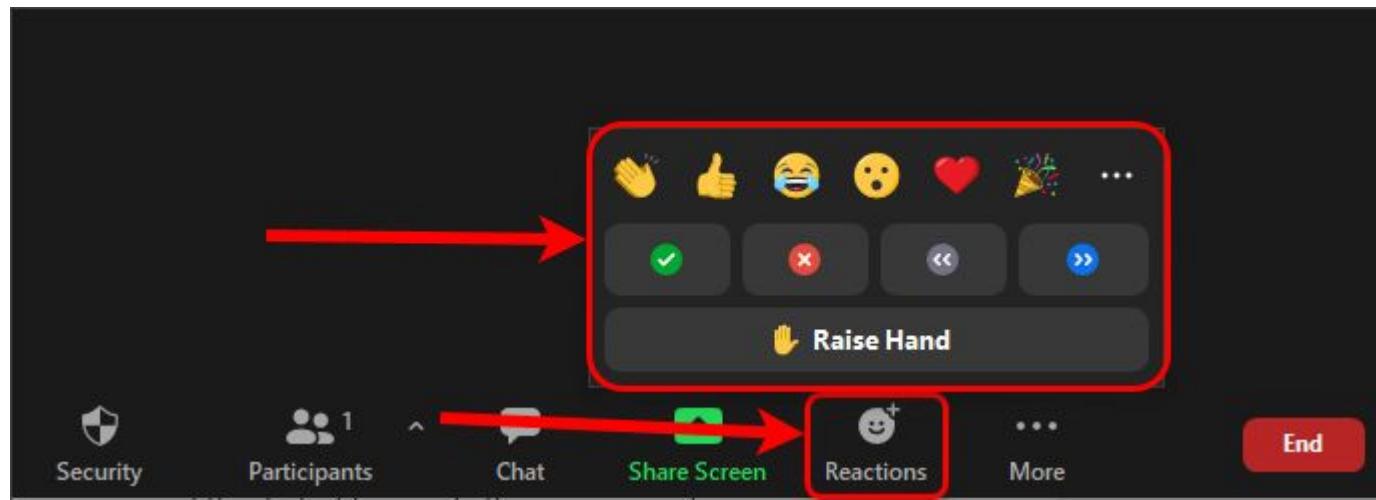


>9,500 users

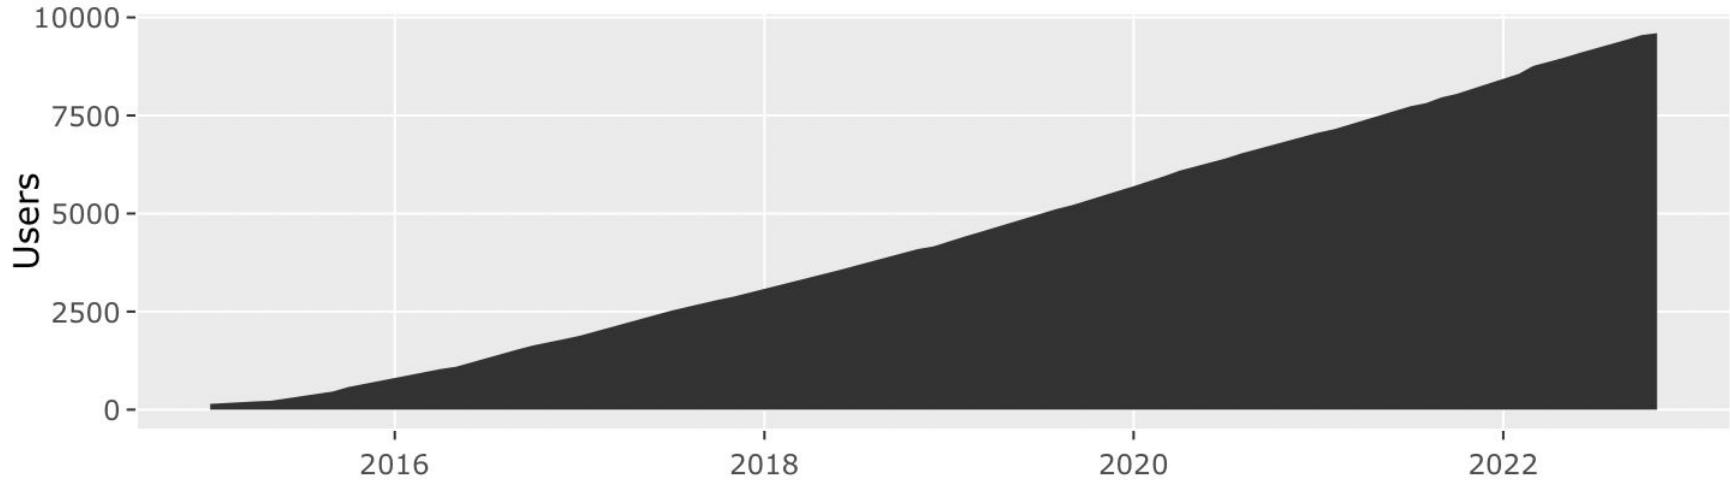

Used by researcher world-wide

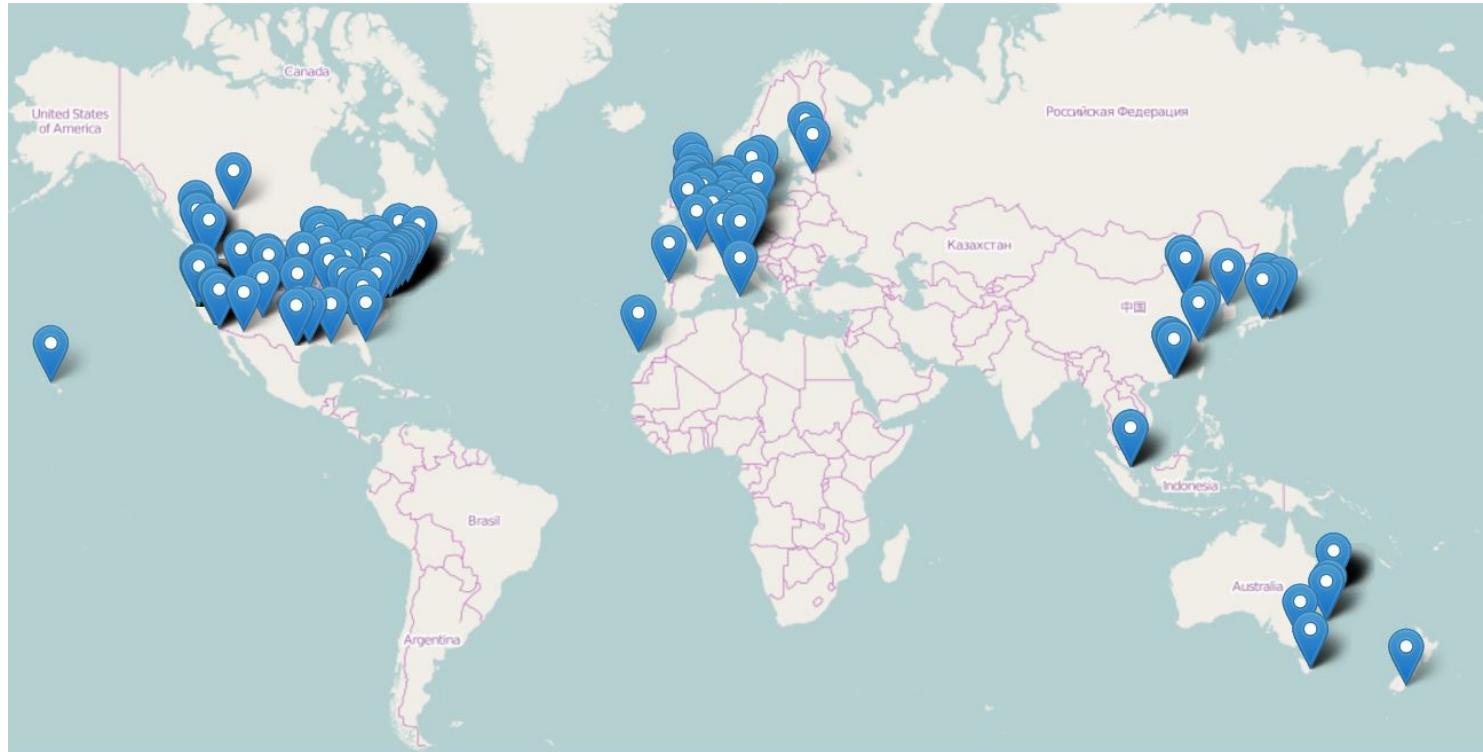

>90M imputed genomes

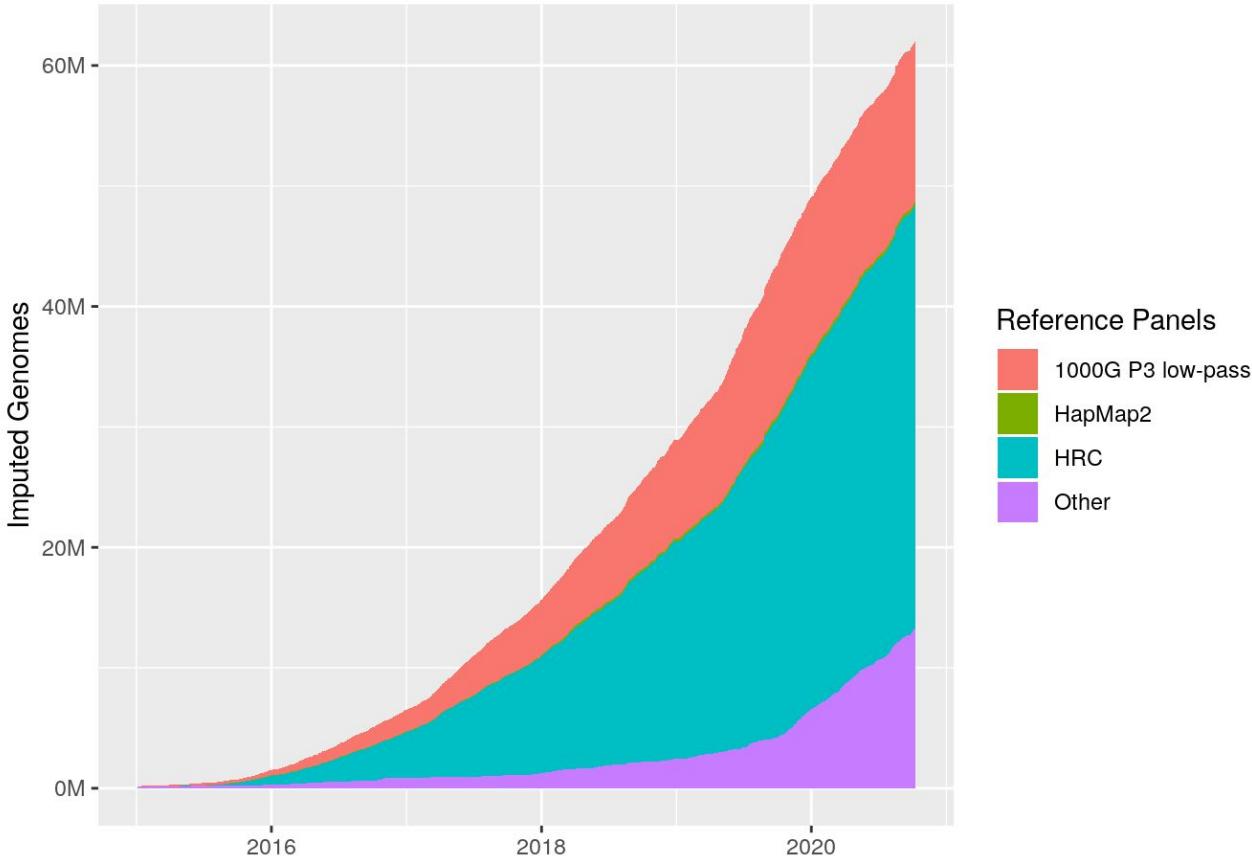

What's new?

New panels:

- 1000G Phase 3 deep WGS (hg38)
- 1000G Phase low coverage (hg38)
- HLA Imputation Panel
- Genome Asia version 2

New tools

- Beagle phasing
- PGS calculation
- Rsq browser

Summary

Genotype imputation key method in GWAS

Michigan imputation server is easy to use and ensures high quality imputation

Cloud-services will accelerate genetic research so we can devote our time to more interesting tasks

More info and FAQ can be found here:
<https://imputationserver.readthedocs.io>

Section 2

Run a job, Data Preparation and Data Download



Sebastian Schönherr
Medical University of Innsbruck
sebastian.schoenherr@i-med.ac.at
[@seppinho](https://twitter.com/seppinho)



Learning objectives

Participants will learn

1. How to submit a job on Michigan Imputation Server (MIS)
2. How to prepare your GWAS data
3. Different ways to download final datasets

Run your first job on MIS or TMIS

<https://imputationserver.sph.umich.edu> (MIS)

or

<https://imputation.biodatacatalyst.nhlbi.nih.gov> (TOPMed
Server)

Uploading Data...

Cancel

Recap


- Input Validation and Quality Control executed right after data upload
 - Immediate feedback to users
 - Jobs passing the QC are then added to a long-time queue
- MIS outputs SNP statistics and a QC Report for each job
 - Helps you to identify problems

Have you run into QC problems so far?

Put a “Yes” in the chat

Or


Raise Hand

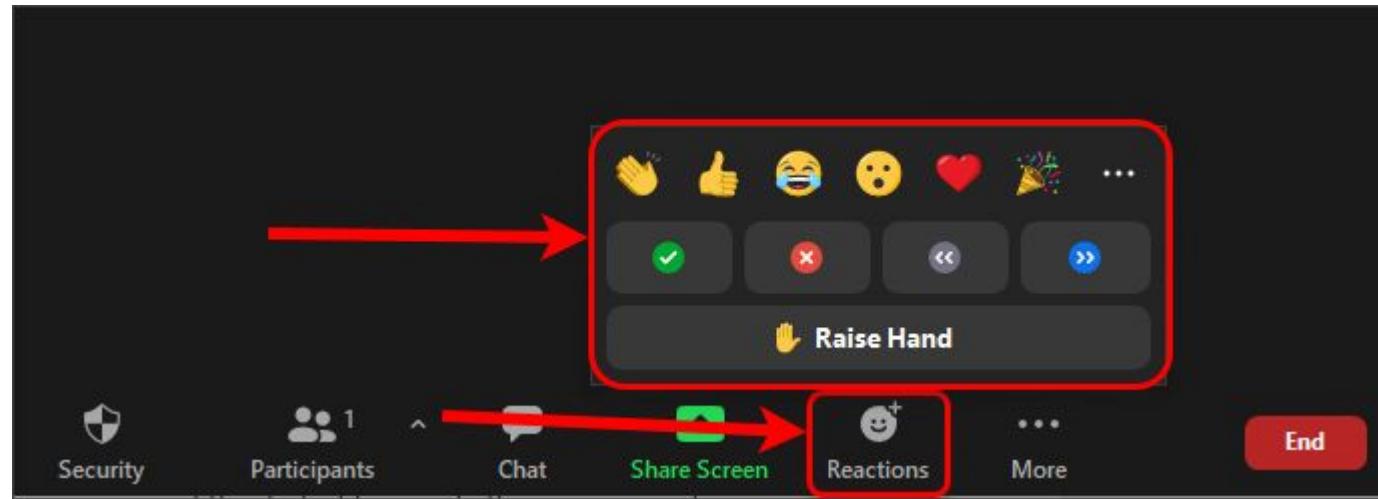

How many jobs are failing?

- 40% in 2015; 20% in 2019; 7% 2020-2022
 - Reason for job failures: Something wrong with your input data **or** phasing/imputation issue on our side

Total amount of jobs: **91,400** (Nov 22)
> 2M in July 22

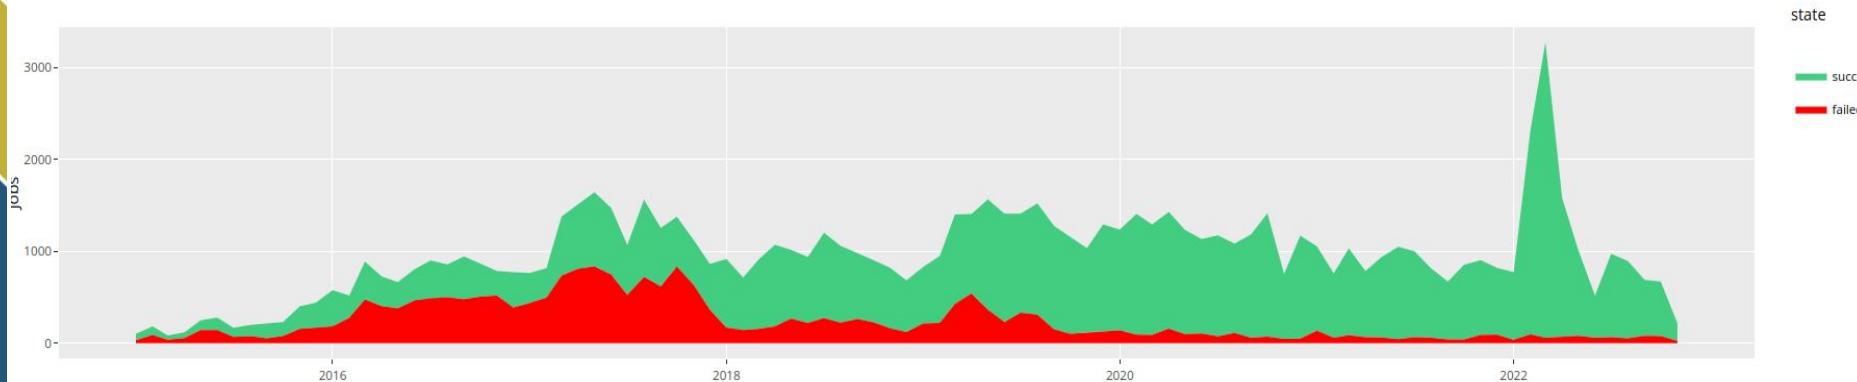

MIS QC: Input Validation & Statistics

	Imputation Server
Input	VCF / chromosome
Output	Imputed VCF / chromosome
File Validation & Statistics	
Basic SNP Filtering	
Lift Over	

Input Validation

4 valid VCF file(s) found.

Samples: 51471

Chromosomes: 11 12 13 14

SNPs: 72808

Chunks: 26

Datatype: unphased

Build: hg19

Reference Panel: apps@1000g-phase-3-v5 (hg19)

Population: eur

Phasing: eagle

Mode: imputation

MIS QC: Basic SNP Filtering

	Imputation Server
Input	VCF / chromosome
Output	Imputed VCF / chromosome
File Validation & Statistics	
Basic SNP Filtering	
Lift Over	

Statistics:

Alternative allele frequency > 0.5 sites: 2,308

Reference Overlap: 99.95 %

Match: 7,816

Allele switch: 0

Strand flip: 0

Strand flip and allele switch: 0

A/T, C/G genotypes: 0

Filtered sites:

Filter flag set: 0

Invalid alleles: 0

Multiallelic sites: 0

Duplicated sites: 0

NonSNP sites: 0

Monomorphic sites: 0

Allele mismatch: 4

SNPs call rate < 90%: 0

MIS QC: Lift Over Step

	Imputation Server
Input	VCF / chromosome
Output	Imputed VCF / chromosome
File Validation & Statistics	
Basic SNP Filtering	
Lift Over	

Quality Control

Uploaded data is hg38 and reference is hg19.

Lift Over




Calculating QC Statistics

Statistics:

Alternative allele frequency > 0.5 sites: 2

Reference Overlap: 100.00 %

MIS QC Report: Allele Frequency Check

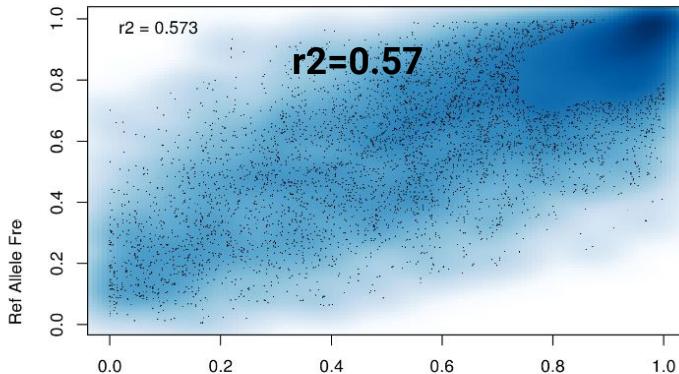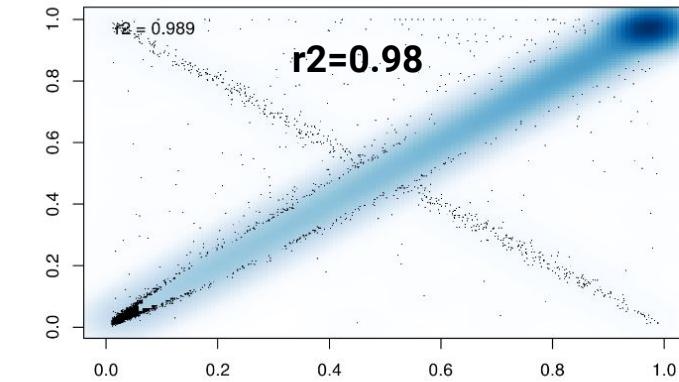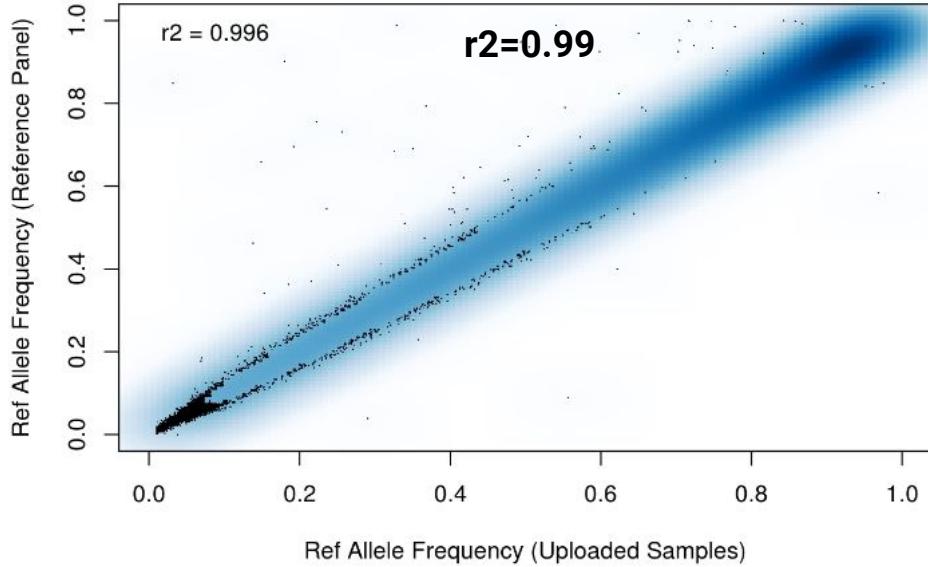

Failing Validation - Obvious Problems

Input Validation

The provided VCF file is malformed. Error during index creation: [tabix] was bgzip used to compress this file? (see [Help](#)).

Input Validation

The provided VCF file contains more than one chromosome. Please split your input VCF file by chromosome (see [Help](#)).

Input Validation

Unable to parse header with error: Your input file has a malformed header: We never saw the required CHROM header line (starting with one #) for the input VCF file (see [Help](#)).

Failing QC - Trickier Problems

Excluded sites in total: 695

Remaining sites in total: 185,791

See [snps-excluded.txt](#) for details

Typed only sites: 397

See [typed-only.txt](#) for details



Warning: 2 Chunk(s) excluded: reference overlap < 50.0% (see [chunks-excluded.txt](#) for details).

Remaining chunk(s): 40

Error: More than 100 obvious strand flips have been detected. Please check strand. Imputation cannot be started!

Send Notification on Failure

We have sent an email to **sebastian.schoenherr@i-med.ac.at** with the error message.

How to fix input files?

Imputation Preparation Tool

- developed by W. Rayner
- Works for all major reference panels (HRC, TOPMed, Asia, CAAPA, 1000G)
- Checks for consistency between input data and a reference panel
- Updates/removes SNPs, Updates strand, position and ref/alt assignment
- Input Data in PLINK Binary Format (bim, bed, fam)

<https://www.well.ox.ac.uk/~wrayner/tools/HRC-1000G-check-bim-v4.3.0.zip>

Execute Imputation Tool before uploading data

	Imputation Server	Preparation Tool
Input	VCF / chromosome	PLINK binary data
Output	Imputed VCF / chromosome	VCFs / chromosome
File Validation & Statistics		
Basic SNP Filtering		
Lift Over		
Fixes Strand Errors, Updating Ref / Alt Assignment		
Removes SNPs with allele freq difference, A/T & G/C SNPs if MAF > 0.4		

```
seb@seb-genepi:/data3/projects/ashg-imputation-tool$
```

```
seb@seb-genepi:/data3/projects/ashg-imputation-tool$ perl HRC-1000G-check-bim.pl -b study-raw-filtered.bim -f study.frq -r HRC.r1-1.GRCh37.wgs.mac5.sites.tab.gz -h
```

Script to check plink .bim files against HRC/1000G for
strand, id names, positions, alleles, ref/alt assignment

William Rayner 2015-2020
wrayner@well.ox.ac.uk

Version 4.3

Options Set:

Reference Panel: HRC
Bim filename: study-raw-filtered.bim
Reference filename: HRC.r1-1.GRCh37.wgs.mac5.sites.tab.gz
Allele frequencies filename: study.frq
Plink executable to use: plink

Chromosome flag set: No
Allele frequency threshold: 0.2

Path to plink bim file: /data3/projects/ashg-imputation-tool

```
seb@seb-genepi:/data3/projects/ashg-imputation-tool$  
seb@seb-genepi:/data3/projects/ashg-imputation-tool$ sh Run-plink.sh  
PLINK v1.90b3.40 64-bit (16 Aug 2016)      https://www.cog-genomics.org/plink2  
(C) 2005-2016 Shaun Purcell, Christopher Chang   GNU General Public License v3  
Logging to /data3/projects/ashg-imputation-tool/TEMP1.log.  
Options in effect:  
  --bfile /data3/projects/ashg-imputation-tool/study-raw-filtered  
  --exclude /data3/projects/ashg-imputation-tool/Exclude-study-raw-filtered-HRC.txt  
  --make-bed  
  --out /data3/projects/ashg-imputation-tool/TEMP1  
  
32074 MB RAM detected; reserving 16037 MB for main workspace.  
1453472 variants loaded from .bim file.  
5034 people (3027 males, 2007 females) loaded from .fam.  
--exclude: 1392377 variants remaining.  
Using 1 thread (no multithreaded calculations invoked).  
Before main variant filters, 5034 founders and 0 nonfounders present.  
Calculating allele frequencies... done.  
Total genotyping rate is 0.997701.  
1392377 variants and 5034 people pass filters and QC.  
Note: No phenotypes present.  
--make-bed to /data3/projects/ashg-imputation-tool/TEMP1.bed +  
/data3/projects/ashg-imputation-tool/TEMP1.bim +  
/data3/projects/ashg-imputation-tool/TEMP1.fam ... 30%
```

```
seb@seb-genepi:/data3/projects/ashg-imputation-tool$  
seb@seb-genepi:/data3/projects/ashg-imputation-tool$ bgzip study-raw-filtered-updated-chr15.vcf
```

Life Cycle of an Imputation Job



- Job passed Quality Control
- Job scheduled in imputation queue

- Waits until resources are available

Life Cycle of an Imputation Job



- Phasing and Imputation starts



- Waiting
- Running
- Complete

Life Cycle of an Imputation Job




- Data is encrypted
- Email with one time password is sent to user

Dear Lukas,
the password for the imputation results is: pp09Z0KeQvQMc

The results can be downloaded from <https://imputationserver.sph.umich.edu/start.html#!jobs/job-20190919-112230-581/results>

Life Cycle of an Imputation Job

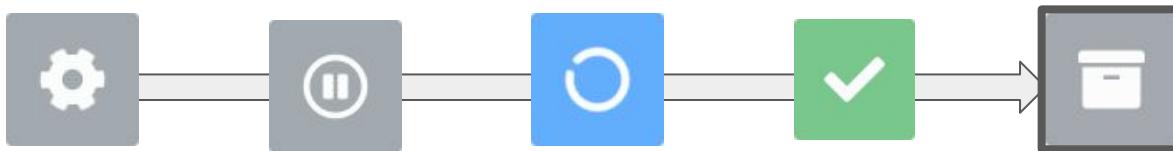

- After 7 days the job is retired
- All results are deleted
- We will send you an email 2 days before

Dear Lukas Forer,
Your job retires in 2 days! All imputation results will be deleted at that time.

Please ensure that you have downloaded all results from
<https://imputationserver.sph.umich.edu/start.html#!jobs/job-20191011-124306-370>

How to download the imputed genotypes?

Option 1: Web-Interface

The image shows a screenshot of a web-based interface for managing download tasks. At the top, there are three tabs: 'Details', 'Results', and 'Logs'. The 'Logs' tab is highlighted and has a red circle with the number '1' above it. Below the tabs, the 'Imputation Results' section is displayed, containing a list of zip files. The first item in the list, 'chr_1.zip (893 MB)', is circled with a red '2'. To the right of the list, a download progress window is open for 'chr_1.zip'. The window shows the file name, a preview icon, the download URL, the transfer speed ('5.3 MB/s'), the total size ('69.2 MB of 893 MB'), and a progress bar. There are also 'Pause' and 'Cancel' buttons at the bottom. A red circle with the number '3' is positioned above the download window.

Details Results Logs

1

2

3

chr_1.zip

http://ec2-3-19-123-5.us-east-2.compute.amazonaws.com:8082/results/job-2019101...

5.3 MB/s - 69.2 MB of 893 MB, 3 mins left

Pause Cancel

chr_1.zip (893 MB)

chr_10.zip (617 MB)

chr_11.zip (587 MB)

chr_12.zip (576 MB)

chr_13.zip (467 MB)

chr_14.zip (390 MB)

Option 2: Batch Download

Imputation Results wget

- chr_1.zip (469 MB)
- chr_10.zip (287 MB)
- chr_11.zip (281 MB)
- chr_12.zip (269 MB)
- chr_13.zip (195 MB)
- chr_14.zip (192 MB)
- chr_15.zip (181 MB)
- chr_16.zip (203 MB)
- chr_17.zip (187 MB)
- chr_18.zip (160 MB)
- chr_19.zip (170 MB)
- chr_2.zip (471 MB)
- chr_20.zip (129 MB)

Download data

wget (22) URLs (22)

```
 wget https://imputationserver.sph.umich.edu/share/results/1fc3d1b4
 wget https://imputationserver.sph.umich.edu/share/results/3d9f5f0c
 wget https://imputationserver.sph.umich.edu/share/results/528e411a
 wget https://imputationserver.sph.umich.edu/share/results/ed598ab4
 wget https://imputationserver.sph.umich.edu/share/results/7c818b4d
 wget https://imputationserver.sph.umich.edu/share/results/1c1e651d
```

Use the following command to download all results at once:

```
curl -sL https://imputationserver.sph.umich.edu/get/1584555,
```

□

OK

ASHG
American Society of Human Genetics

fantasia:~> █

```
fantasia:~> curl -sL https://imputationserver.sph.umich.edu/get/1584555/675233d69  
db57b793589b916f2a81cb8 | bash
```

```
fantasia:~> curl -sL https://imputationserver.sph.umich.edu/get/1584555/675233d69  
db57b793589b916f2a81cb8 | bash
```

Downloading file chr_1.zip (1/22)...

% Total	% Received	% Xferd	Average Speed	Time	Time	Time	Current	
			Dload	Upload	Total	Spent	Left	Speed
100	185	100	185	0	0	21087	0	--:--:-- --:--:-- --:--:-- 30833
100	469M	100	469M	0	0	116M	0	0:00:04 0:00:04 --:--:-- 167M

Downloading file chr_10.zip (2/22)...

% Total	% Received	% Xferd	Average Speed	Time	Time	Time	Current	
			Dload	Upload	Total	Spent	Left	Speed
100	185	100	185	0	0	23886	0	--:--:-- --:--:-- --:--:-- 37000
100	287M	100	287M	0	0	87.4M	0	0:00:03 0:00:03 --:--:-- 138M

Downloading file chr_11.zip (3/22)...

Downloading file chr_7.zip (20/22)...

% Total	% Received	% Xferd	Average Speed	Time	Time	Time	Current
			Dload Upload	Total	Spent	Left	Speed
100	185	100	185	0	0	24189	0 --:--:-- --:--:-- --:--:-- 37000
100	337M	100	337M	0	0	101M	0 0:00:03 0:00:03 --:--:-- 160M

Downloading file chr_8.zip (21/22)...

% Total	% Received	% Xferd	Average Speed	Time	Time	Time	Current
			Dload Upload	Total	Spent	Left	Speed
100	185	100	185	0	0	24529	0 --:--:-- --:--:-- --:--:-- 37000
100	306M	100	306M	0	0	94.9M	0 0:00:03 0:00:03 --:--:-- 152M

Downloading file chr_9.zip (22/22)...

% Total	% Received	% Xferd	Average Speed	Time	Time	Time	Current
			Dload Upload	Total	Spent	Left	Speed
100	185	100	185	0	0	22486	0 --:--:-- --:--:-- --:--:-- 37000
100	245M	100	245M	0	0	82.0M	0 0:00:02 0:00:02 --:--:-- 84.8M

All 22 file(s) downloaded.

fantasia:~> █

Option 3: Use Imputation Bot

- Run everything on the command line
- Checkout Session 4

Data Decryption

- All imputed genotypes are in **encrypted zip files** (e.g. chr_1.zip)
- We send you an email with a password

Dear Lukas,
the password for the imputation results is: pp09Z0KeQvQMc

The results can be downloaded from <https://imputationserver.sph.umich.edu/start.html#!jobs/job-20190919-112230-581/results>

- You need this password to **decrypt** your genotypes
- Decryption with standard zip programs (e.g. WinZip, 7zip or gunzip)
- AES Encryption: Needs additional software to decrypt (e.g. 7z)

What is in each zip file?

chr_20.zip

```
└── chr20.dose.vcf.gz  
└── chr20.info.gz
```

What is in each zip file?

chr_20.zip

```
|   └── chr20.dose.vcf.gz  
└── chr20.info.gz
```

#CHROM	POS	ID	REF	ALT	QUAL	FILTER	INFO	
20	61795	20:61795:G:T	G	T	.	PASS	AF=0.26318;MAF=0.26318	R2=0.54658;IMPUTED
20	63231	20:63231:T:G	T	G	.	PASS	AF=0.03843;MAF=0.03843	R2=0.67736;IMPUTED
20	63244	20:63244:A:C	A	C	.	PASS	AF=0.16132;MAF=0.16132	R2=0.49907;IMPUTED

What is in each zip file?

chr_20.zip

```
|── chr20.dose.vcf.gz  
└── chr20.info.gz
```

#CHROM	POS	ID	REF	ALT	...
20	61795	20:61795:G:T	G	T	...
20	63231	20:63231:T:G	T	G	...
20	63244	20:63244:A:C	A	C	...

...

FORMAT	Sample1
GT:DS:GP	1 0:1.126:0.100,0.673,0.226
GT:DS:GP	0 0:0.002:0.998,0.002,0.000
GT:DS:GP	0 0:0.285:0.723,0.270,0.008

What is in each zip file?

chr_20.zip

```
|── chr20.dose.vcf.gz  
└── chr20.info.gz
```

SNP	REF(0)	ALT(1)	ALT_Frq	MAF	AvgCall	Rsq	Genotyped	...
20:61795:G:T	G	T	0.26318	0.26318	0.88455	0.54658	Imputed	...
20:63231:T:G	T	G	0.03843	0.03843	0.98342	0.67736	Imputed	...
20:63244:A:C	A	C	0.16132	0.16132	0.91761	0.49907	Imputed	...

What is in each zip file?

md5 checksum file

chr_20.zip

```
|   └── chr20.dose.vcf.gz  
└── chr20.info.gz
```

```
(base) seb@seb-laptop:~/ashg22$ cat results.md5  
3ea13c00d323117e0b4648a683175d39 chr_11.zip  
9ecb19e40d3f8a55f128c640333ab2ef chr_22.zip  
161918ed598f32bcd88536399695b398 chr_12.zip  
2709ee09f353c0b332686fdf40e9d062 chr_13.zip
```

SNP	REF(0)	ALT(1)	ALT_Frq	MAF	AvgCall	Rsq	Genotyped	...
20:61795:G:T	G	T	0.26318	0.26318	0.88455	0.54658	Imputed	...
20:63231:T:G	T	G	0.03843	0.03843	0.98342	0.67736	Imputed	...
20:63244:A:C	A	C	0.16132	0.16132	0.91761	0.49907	Imputed	...

Summary

- MIS Web Interface provides a fast and reliable way to impute data
- MIS applies a strict Quality Control with the goal to return high quality imputation data
- Pre-Imputation tools available for data preparation
- Different options to download data

More info and FAQ can be found here:
<https://imputationserver.readthedocs.io>

Section 3

Performing GWAS using imputed data



Xueling Sim

National University of Singapore
ephsx@nus.edu.sg



Learning objectives

Participants will learn to:

- Identify and understand the use of variant imputation quality information following imputation in the MIS
- Distinguish between some of the available options for GWAS
- Troubleshoot common GWAS errors

Have you ever performed a GWAS?

Imputation Quality

- For each variant, how confident can we be that the imputation dosages are sufficiently “accurate” for association analyses?
- Measure of confidence in imputed dosages: “Rsq” column [range 0-1]

SNP	REF(0)	ALT(1)	ALT_Frq	MAF	AvgCall	Rsq	Genotyped	...
20:61795:G:T	G	T	0.26318	0.26318	0.88455	0.54658	Imputed	...
20:63231:T:G	T	G	0.03843	0.03843	0.98342	0.67736	Imputed	...
20:63244:A:C	A	C	0.16132	0.16132	0.91761	0.49907	Imputed	...

From a chr20.info.gz file

Imputation Quality

- Minimal Rsq value for common variants
 - ≥ 0.30
- Minimal Rsq value for low frequency/rare variants
 - ≥ 0.50
- Before performing GWAS, remove variants that do not meet these thresholds
 - Suggested program: VCFtools
 - Saves computational time when performing GWAS

Which GWAS program(s) have you used?

Available GWAS Programs

No File Reformatting (VCF from MIS)

- EPACTS
- Rvtests
- SNPTEST
- SAIGE

File Formatting Required

- BOLT-LMM
- BGENIE
- regenie
- PLINK

Each GWAS Program Has Strengths, Limitations

EPACTS/Rvtests

- + Many model options - single variant, gene-based
- + Chr X analyses
- + Phenotypic transformation (e.g inverse normal; Rvtests only)
- + Linear mixed model for sample relatedness (quantitative traits only)
- + Generate covariance matrices for downstream analyses (e.g conditional analyses; Rvtests only)
- Memory intensive
- Sample size $\sim\leq 20,000$ (better $\leq 10,000$)

EPACTS: <https://genome.sph.umich.edu/wiki/EPACTS>

Rvtests: <https://genome.sph.umich.edu/wiki/Rvtests>

Each GWAS Program Has Strengths, Limitations

SNPTEST

- + Frequentist and bayesian methods supported
- + Chr X analyses
- Limited to unrelated individuals
- Computational intensive

SNPTEST: <https://www.well.ox.ac.uk/~gav/snptest/#introduction>

Each GWAS Program Has Strengths, Limitations

SAIGE

- + Similar to Rvtests, but for very large sample sizes (e.g. biobanks)
- + Able to account for sample relatedness for binary traits
- + Designed to handle unbalanced number of cases and controls
- + Chr X analyses

- Should not be used to examine heritability (biased variance estimates)
- Computational time can vary widely between phenotypes and sample sizes
- Can be conservative for extremely unbalanced case and control ratio
- Odds ratios estimated to conserve computational time

SAIGE: <https://github.com/weizhouUMICH/SAIGE>

Each GWAS Program Has Strengths, Limitations

BOLT-LMM/BGENIE/regenie

- + Great for very large sample sizes (e.g. biobanks)
- + Chr X analyses
- + Computationally efficient (regenie)

- Requires files to be in BGEN or PLINK format
- Nextflow pipeline for regenie using VCF: <https://github.com/genepi/nf-gwas>
- Not optimal for extremely unbalanced case control ratio (especially with rare variants)

BOLT-LMM: <https://data.broadinstitute.org/alkesgroup/BOLT-LMM/#x1-5600011>

BGENIE: <https://jmarchini.org/bgenie/>

Regenie: <https://github.com/rqcgithub/regenie>

Each GWAS Program Has Strengths, Limitations

PLINK

- + Quick
- + Multiple versions; often as intermediary tool to the other programs
- + Can run on the command line (unix not required)
- + Chr X analyses

- Requires files to be in PLINK format (.bed/.bim/.fam)
- Limited model options

PLINK: <https://www.cog-genomics.org/plink/2.0/>

Summary of common GWAS analysis tools

	EPACTS	Rvtests	SNPTEST	SAIGE	BLOT-LMM	Bgenie	regenie
Input VCF	Y	Y	Y				
Sample relatedness (Quantitative outcome)	Y	Y		Y	Y	Y	Y
Sample relatedness (Binary outcome)				Y		Y	Y
Case control imbalance				Y			Y
Large sample size (>20,000)				Y	Y	Y	Y

Performing the GWAS

- Each program has its own input, output formats, and options
- Typical input files
 - Genotype file (.vcf; .bgen; .bed/.bim/.fam)
 - Phenotype/covariate file (.txt; .ped)
 - Some programs use separate phenotype and covariate files
 - Kinship/relationship matrix (EPACTS, SAIGE)

Which program(s) would be the best?

- A researcher new to genetic analyses and unfamiliar to the UNIX environment wants to perform a GWAS on total cholesterol using a cohort of 5,500 unrelated individuals

Which program(s) would be the best?

- A researcher new to genetic analyses and unfamiliar to the UNIX environment wants to perform a GWAS on total cholesterol using a cohort of 5,500 unrelated individuals
 - EPACTS/Rvtests

Which program(s) would be the best?

- A researcher new to genetic analyses and unfamiliar to the UNIX environment wants to perform a GWAS on total cholesterol using a cohort of 5,500 unrelated individuals
 - EPACTS/Rvtests
- Researchers want to perform a GWAS using a cohort of 10,000 individuals with household based recruitment (i.e. includes related individuals)

Which program(s) would be the best?

- A researcher new to genetic analyses and unfamiliar to the UNIX environment wants to perform a GWAS on total cholesterol using a cohort of 5,500 unrelated individuals
 - EPACTS/Rvtests
- Researchers want to perform a GWAS using a cohort of 10,000 individuals with household based recruitment (i.e. includes related individuals)
 - EPACTS/Rvtests/BOLT-LMM or SAIGE

Which program(s) would be the best?

- A researcher new to genetic analyses and unfamiliar to the UNIX environment wants to perform a GWAS on total cholesterol using a cohort of 5,500 unrelated individuals
 - [EPACTS/Rvtests](#)
- Researchers want to perform a GWAS using a cohort of 10,000 individuals with household based recruitment (i.e. includes related individuals)
 - [EPACTS/Rvtests/BOLT-LMM or SAIGE](#)
- Researchers want to perform a GWAS using data from BioBank Japan (>200,000 individuals)

Which program(s) would be the best?

- A researcher new to genetic analyses and unfamiliar to the UNIX environment wants to perform a GWAS on total cholesterol using a cohort of 5,500 unrelated individuals
 - EPACTS/Rvtests
- Researchers want to perform a GWAS using a cohort of 10,000 individuals with household based recruitment (i.e. includes related individuals)
 - EPACTS/Rvtests/BLOT-LMM or SAIGE
- Researchers want to perform a GWAS using data from BioBank Japan (>200,000 individuals)
 - BLOT-LMM or SAIGE or begenie or regenie

Common Errors When Running a GWAS

- Wording of error messages vary by program, but the same issues will cause errors throughout all of the program
- [Unix] Errors independent of GWAS program
 - File permissions
 - Correct by changing file permissions
 - Directory/file not found
 - Correct by making sure all of the file locations and names are accurate
 - Not enough memory/time
 - Correct by restarting job with adequate memory/time allocation

Common Errors When Running a GWAS

- Common errors
 - IDs don't match
 - Correct by ensuring that the ID in the phenotype, genotype, covariance, kinship matrix are consistent format in all files

Common Errors When Running a GWAS

- Common errors
 - IDs don't match
 - Correct by ensuring that the ID in the phenotype, genotype, covariance, kinship matrix are consistent format in all files
 - File format(s) incorrect
 - Correct by making sure the format of all files are as the program is expecting (e.g. columns, delimiters, headers, file extension)

Common Errors When Running a GWAS

- Common errors
 - IDs don't match
 - Correct by ensuring that the ID in the phenotype, genotype, covariance, kinship matrix are consistent format in all files
 - File format(s) incorrect
 - Correct by making sure the format of all files are as the program is expecting (e.g. columns, delimiters, headers, file extension)
 - Improperly specified options/command
 - Correct by checking all needed options are specified, correct order, no typos

Common Errors When Running a GWAS


- Common errors
 - IDs don't match
 - Correct by ensuring that the ID in the phenotype, genotype, covariance, kinship matrix are consistent format in all files
 - File format(s) incorrect
 - Correct by making sure the format of all files are as the program is expecting (e.g. columns, delimiters, headers, file extension)
 - Improperly specified options/command
 - Correct by checking all needed options are specified, correct order, no typos
 - Peripheral programs not available (e.g. R with EPACTS, SAIGE)
 - Correct by installing other peripheral programs

Common Errors When Running a GWAS

- Common errors
 - IDs don't match
 - Correct by ensuring that the ID in the phenotype, genotype, covariance, kinship matrix are consistent format in all files
 - File format(s) incorrect
 - Correct by making sure the format of all files are as the program is expecting (e.g. columns, delimiters, headers, file extension)
 - Improperly specified options/command
 - Correct by checking all needed options are specified, correct order, no typos
 - Peripheral programs not available (e.g. R with EPACTS, SAIGE)
 - Correct by installing other peripheral programs
 - Invalid estimate (e.g. heritability in BOLT-LMM)
 - Sample too related and/or sample size too small
 - Correct by using a different program

Interpreting GWAS Results

- GWAS results must be carefully reviewed for:
 - Imputation quality!
 - Genomic inflation
 - False positives
- Replication datasets
- PheWas

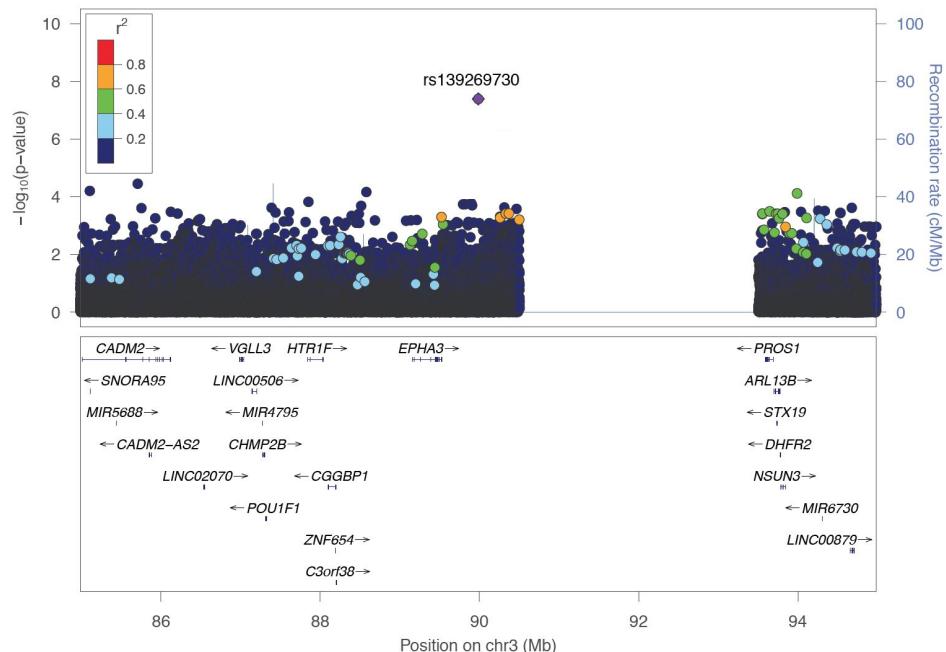

Summary

- Variants must be filtered post-imputation to remove those with poor imputation quality
- There are many GWAS programs available, each with their own strengths and limitations - so be sure to pick one that fits your analyses needs
- As these GWAS programs are widely used or adopted by consortia, there are tutorials and help-pages available

More info and FAQ can be found here:
<https://imputationserver.readthedocs.io>

Section 4

Imputation Bot and PGS Server



Lukas Forer

Medical University of Innsbruck

lukas.forer@i-med.ac.at

@lukfor



MICHIGAN
IMPUTATION SERVER

Learning objectives

Participants will

1. Learn how to use Imputation bot
2. Learn how to automate job submission
3. Learn how to use the PGS Server extension

Challenges

- More and more imputation servers will be available soon
 - Additional reference panels
 - Different geographical locations
 - Example: TOPMed Imputation Server
- Challenges
 - Hard to keep track of instances, jobs and results
 - Graphical web interface not ideal for automation
 - Complex to integrate in own pipelines or scripts




Imputation Bot

<https://github.com/lukfor/imputationbot>

Imputation Bot

- Automate remote imputation
- Submit and monitor jobs from the command line
- Different commands can easily be combined
- Improves automation

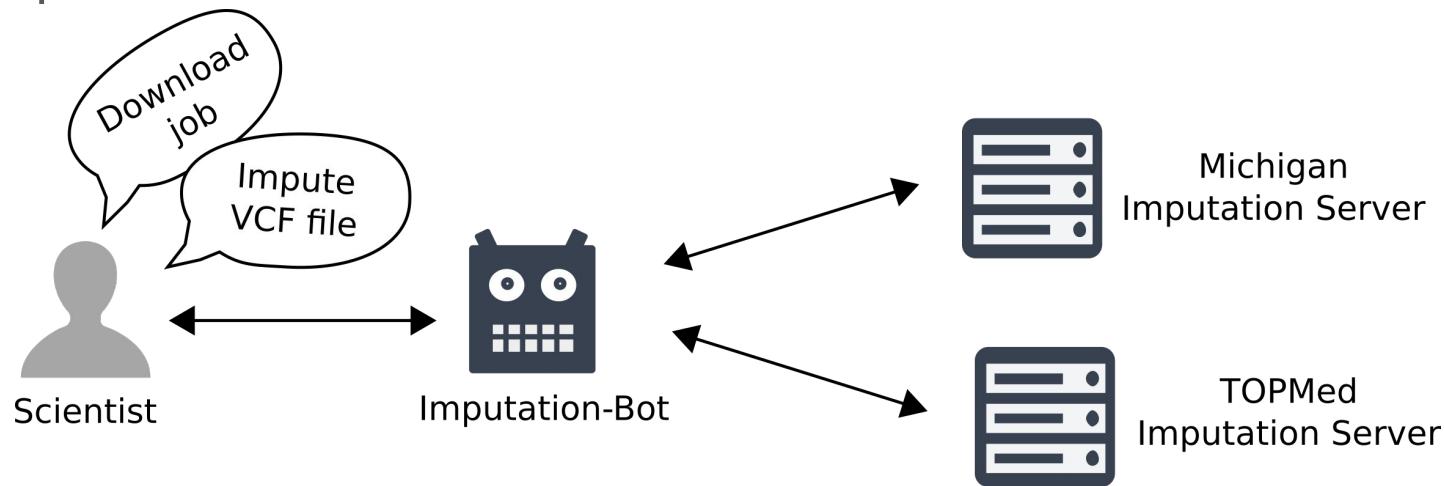


Have you used the Imputation Bot yet?

Put a “Yes” in the chat

Or

Raise your hand

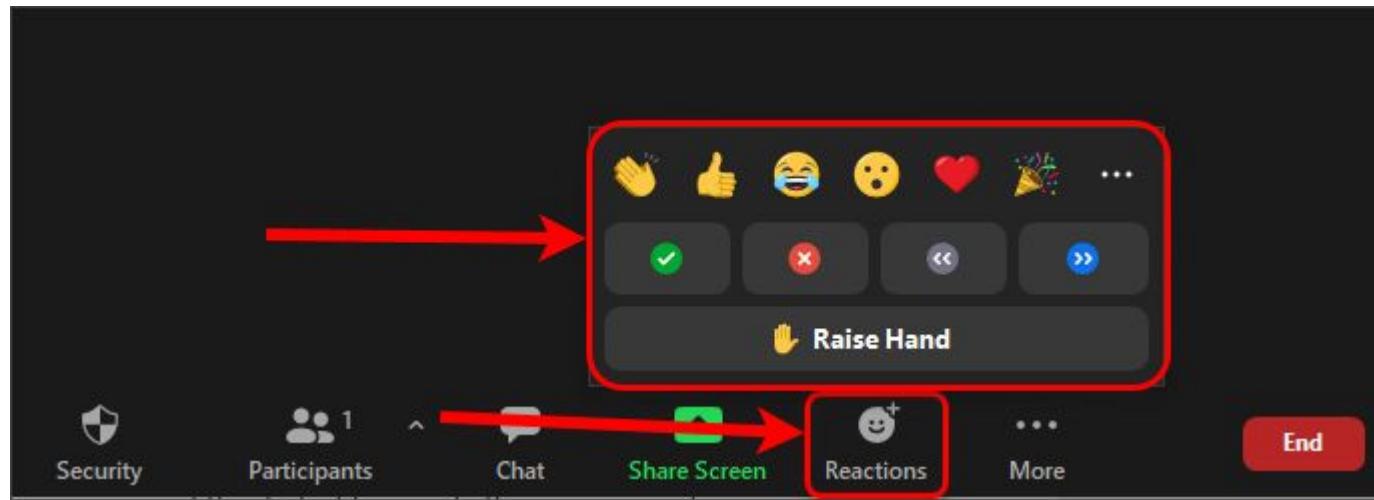

1. Enable API Access

 lukfor ▾

Profile


Logout



API Access

This service provides a rich RestAPI to submit, monitor and download jobs

You need a access token to use the API. [Learn more.](#)

**Create API Token**

API Token

Your token for this service is:

```
eyJdHkiOj0ZXh0XC9wbGFpbilSmFsZyl6ikhTMjU2In0.eyJtY  
WlslioibHvrYXMuZm9yZXJAAaS1tZWQuYWMMuYXQiLCJleHBp  
cmUiOjE1NzMyMjkwNTY3NTEslm5hbWUiOiJMdWthcyBGb3J  
lcilsImFwaSl6dHJ1ZSwidXNlcm5hbWUiOiJsdWtmb3IifQ.qY7i
```

OK

2. Install Imputation Bot

lukas@lukas-workstation:~/imputationbot\$ █

```
lukas@lukas-workstation:~/imputationbot$ curl -sL imputationbot.now.sh | bash
```

```
lukas@lukas-workstation:~/imputationbot$ curl -sL imputationbot.now.sh | bash
Installing Imputation Bot v0.8.3...
Downloading Imputation Bot from https://github.com/lukfor/imputationbot/releases
/download/v0.8.3/imputationbot-installer.sh...
% Total    % Received % Xferd  Average Speed   Time     Time     Time  Current
                                         Dload  Upload   Total   Spent   Left  Speed
100  652  100  652    0      0  1895      0  --:--:--  --:--:--  --:--:--  1895
100 2995k  100 2995k    0      0  390k      0  0:00:07  0:00:07  --:--:--  518k
Verifying archive integrity... 100% All good.
Uncompressing Make
script=self-extractable
scriptargs=archives makeself.sh 100%
```

Imputation Bot v0.8.3 installation completed. Have fun!

```
lukas@lukas-workstation:~/imputationbot$ █
```

3. Configure Imputation Bot

lukas@lukas-workstation:~/imputationbot\$./imputationbot add-instance

lukas@lukas-workstation:~/imputationbot\$./imputationbot add-instance

Imputation Bot 0.8.3

<https://imputationserver.sph.umich.edu>

(c) 2019-2020 Lukas Forer, Sebastian Schoenherr and Christian Fuchsberger

Built by lukas on 2020-10-08T12:27:01Z

Imputationserver Url [<https://imputationserver.sph.umich.edu>]: █

lukas@lukas-workstation:~/imputationbot\$./imputationbot add-instance

Imputation Bot 0.8.3

<https://imputationserver.sph.umich.edu>

(c) 2019-2020 Lukas Forer, Sebastian Schoenherr and Christian Fuchsberger

Built by lukas on 2020-10-08T12:27:01Z

Imputationserver Url [<https://imputationserver.sph.umich.edu>]:

API Token [None]:

lukas@lukas-workstation:~/imputationbot\$./imputationbot add-instance

Imputation Bot 0.8.3

<https://imputationserver.sph.umich.edu>

(c) 2019-2020 Lukas Forer, Sebastian Schoenherr and Christian Fuchsberger

Built by lukas on 2020-10-08T12:27:01Z

Imputationserver Url [<https://imputationserver.sph.umich.edu>]:

API Token [None]: eyJjdHkiOiJ0ZXh0XC9wbGFpbIIsImFsZyI6IkhTMjU2In0.eyJtYWlsIjoibHVrYXMuZm9yZXJAaS1tZWQuYWMuYXQiLCJleHBpcmUiOjE2MDQzMzkzMzAwNzYsIm5hbWUiOiJMdWthcyIisImFwaSI6dHJ1ZSwidXNlcmlhbWUiOiJsdWtmb3IifQ.1n0YSJr58WHXn3pi0rv8Th-FZHJVxxUb-7KVfUfadta

```
lukas@lukas-workstation:~/imputationbot$ ./imputationbot add-instance
```

Imputation Bot 0.8.3

<https://imputationserver.sph.umich.edu>

(c) 2019-2020 Lukas Forer, Sebastian Schoenherr and Christian Fuchsberger

Built by lukas on 2020-10-08T12:27:01Z

Imputationserver Url [<https://imputationserver.sph.umich.edu>]:

API Token [None]: eyJjdHkiOiJ0ZXh0XC9wbGFpbIIsImFsZyI6IkhTMjU2In0.eyJtYWlsIjoibHVrYXMuZm9yZXJAaS1tZWQuYWMuYXQiLCJleHBpcmUiOjE2MDQzMzkzMzAwNzYsIm5hbWUiOjMdWthcyISImFwaSI6dHJ1ZSwidXNlcmlhbWUiOjJsdWtmb3IifQ.1n0YSJr58WHXn3pi0rv8Th-FZHJVxxUb-7KVfUfadta

Hi Lukas

Imputation Bot is ready to submit jobs to <https://imputationserver.sph.umich.edu>
(Genotype Imputation (Minimac4)) 1.4.1)

```
lukas@lukas-workstation:~/imputationbot$ █
```

4. Submit a Job

```
lukas@lukas-workstation:~/imputationbot$ ./imputationbot impute --files test-data/chr20.R50.merged.1.330k.recode.vcf.gz --refpanel 1000g-phase-3-v5 --population eur
```

```
lukas@lukas-workstation:~/imputationbot$ ./imputationbot impute --files test-data/chr20.R50.merged.1.330k.recode.vcf.gz --refpanel 1000g-phase-3-v5 --population eur
```

Imputation Bot 0.8.3

<https://imputationserver.sph.umich.edu>

(c) 2019-2020 Lukas Forer, Sebastian Schoenherr and Christian Fuchsberger

Built by lukas on 2020-10-08T12:27:01Z

Submitting job for 1000g-phase-3-v5 to Michigan Imputation Server...

Parameters:

refpanel: apps@1000g-phase-3-v5

files:

- test-data/chr20.R50.merged.1.330k.recode.vcf.gz

build: hg19

r2Filter: 0

phasing: eagle

population: eur

aesEncryption: no

Uploading files [100%]

Imputation Bot 0.8.3

<https://imputationserver.sph.umich.edu>

(c) 2019-2020 Lukas Forer, Sebastian Schoenherr and Christian Fuchsberger

Built by lukas on 2020-10-08T12:27:01Z

Submitting job for 1000g-phase-3-v5 to Michigan Imputation Server...

Parameters:

refpanel: apps@1000g-phase-3-v5

files:

- test-data/chr20.R50.merged.1.330k.recode.vcf.gz

build: hg19

r2Filter: 0

phasing: eagle

population: eur

aesEncryption: no

Uploading files [100%]

Imputation job 'job-20201008-084828-935' submitted successfully

Check the job progress on <https://imputationserver.sph.umich.edu/index.html>

#!jobs/job-20201008-084828-935

5. Download Data

```
bash-3.2$ ./imputationbot download job-20191012-152533-884 --password mkW5oPAB-7c
```

```
bash-3.2$ ./imputationbot download job-20191012-152533-884 --password mkW5oPAB-7c
```

Imputation Bot 0.8.3

<https://imputationserver.sph.umich.edu>

(c) 2019-2020 Lukas Forer, Sebastian Schoenherr and Christian Fuchsberger

Built by lukas on 2020-10-08T12:27:01Z

Downloading job job-20191012-152533-884...

Downloading file job-20191012-152533-884/qcreport/qcreport.html (1/5)

```
bash-3.2$ ./imputationbot download job-20191012-152533-884 --password mkW5oPAB-7c
```

Imputation Bot 0.8.3

<https://imputationserver.sph.umich.edu>

(c) 2019-2020 Lukas Forer, Sebastian Schoenherr and Christian Fuchsberger

Built by lukas on 2020-10-08T12:27:01Z

Downloading job job-20191012-152533-884...

Downloading file job-20191012-152533-884/qcreport/qcreport.html (1/5)

Downloading file job-20191012-152533-884/statisticDir/snps-excluded.txt (2/5)

Downloading file job-20191012-152533-884/statisticDir/typed-only.txt (3/5)

Downloading file job-20191012-152533-884/local/chr_20.zip (4/5)

Decrypting file job-20191012-152533-884/local/chr_20.zip...

```
bash-3.2$ ./imputationbot download job-20191012-152533-884 --password mkW5oPAB-7c
```

Imputation Bot 0.8.3

<https://imputationserver.sph.umich.edu>

(c) 2019-2020 Lukas Forer, Sebastian Schoenherr and Christian Fuchsberger

Built by lukas on 2020-10-08T12:27:01Z

Downloading job job-20191012-152533-884...

Downloading file job-20191012-152533-884/qcreport/qcreport.html (1/5)

Downloading file job-20191012-152533-884/statisticDir/snps-excluded.txt (2/5)

Downloading file job-20191012-152533-884/statisticDir/typed-only.txt (3/5)

Downloading file job-20191012-152533-884/local/chr_20.zip (4/5)

Decrypting file job-20191012-152533-884/local/chr_20.zip...

Downloading file job-20191012-152533-884/logfile/chr_20.log (5/5)

All data downloaded and stored in /Users/lukas/imputationbot/job-20191012-152533-

```
bash-3.2$ █
```

Summary

- Imputation bot automates interactions with Imputation Servers
- Simplifies multi-reference and multi-study imputation
- Available: <https://github.com/lukfor/imputationbot>

More info and FAQ can be found here:
<https://imputationserver.readthedocs.io>

Extension: PGS Server

Motivation

Extend Imputation Server to simplify the application of polygenic risk scores to imputed genotypes


- First prototype available since April 2022
- More than 600 submitted jobs

Did you already test the PGS Server?

Put a “Yes” in the chat


Or

Raise your hand

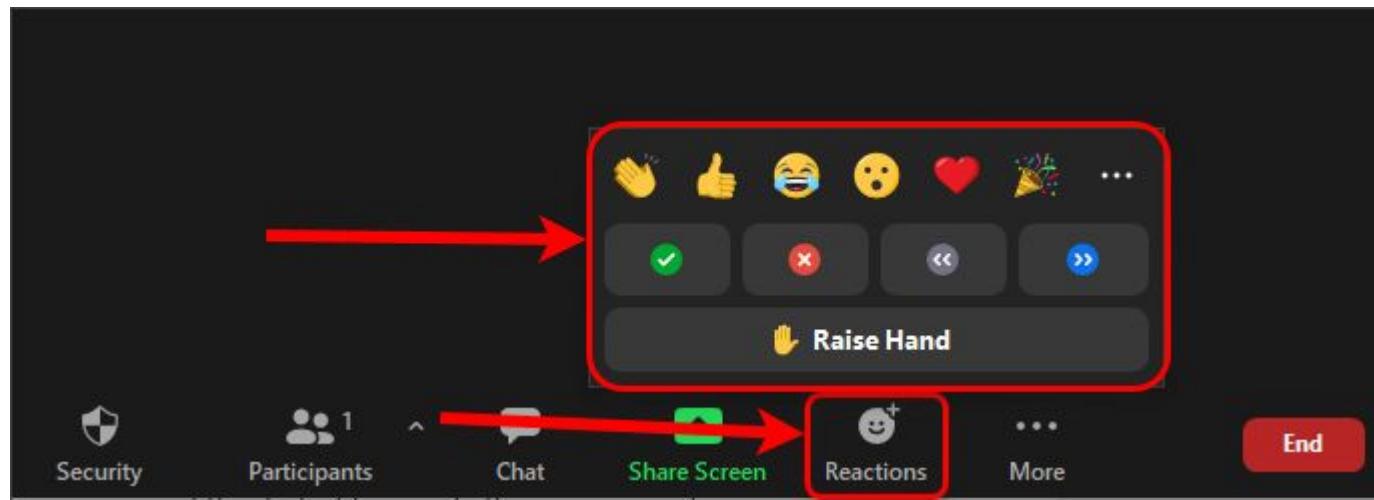

Polygenic Scores (PGS)

Combines the estimated effect of many genetic variants on an individual's phenotype

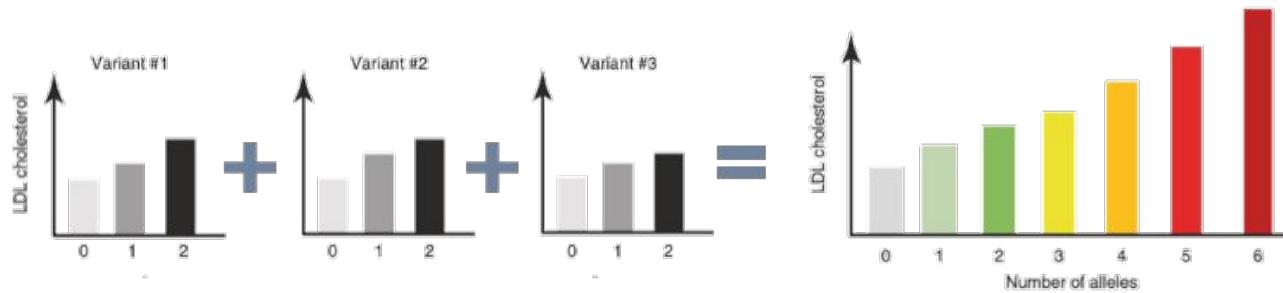

$$\text{PRS}_i = \sum_{j=1}^n x_{ij} \beta_j$$

counting the number of effect alleles for each individual and multiplying the count by the corresponding effect size

A higher PGS indicates a greater accumulation of risk-associated genetic variants in an individual

PGS Repositories

PGS Catalog

- The PGS Catalog is an open database of published polygenic scores (PGS)
- Each PGS in the Catalog is consistently annotated with relevant metadata
- Scores: 2,727
- <http://pgscatalog.org>


Cancer PRSWeb

- Scores: 305
- <https://prsweb.sph.umich.edu>


ExPRSWeb

- Scores: 514
- <https://exprsweb.sph.umich.edu>

Problem: PGS on Imputed Genotypes

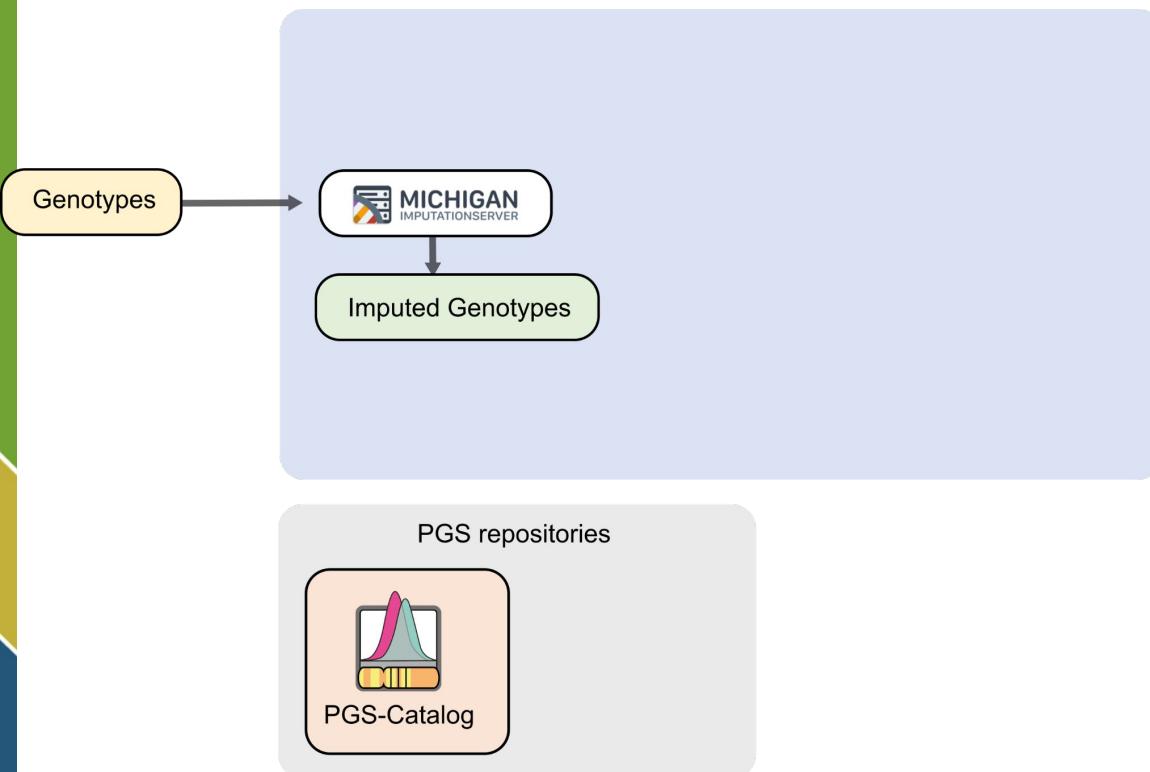

PGS Server Workflow

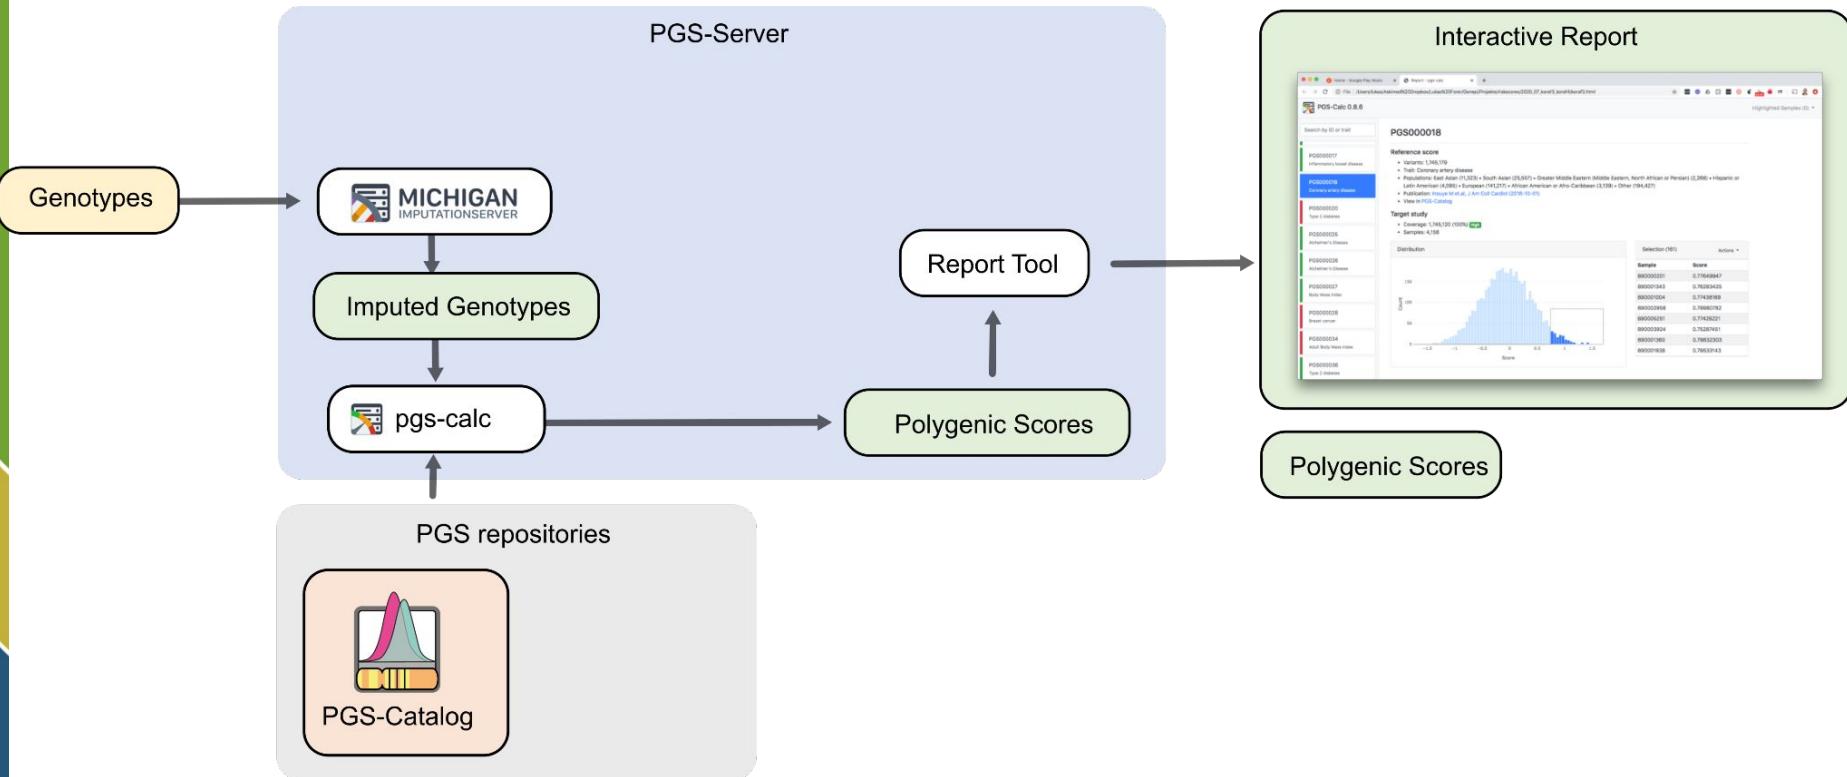

Michigan Imputation Server +

imputationserver.sph.umich.edu/index.html#!run/imputationserver%401.5.2

Home Run ▼ Jobs Help Contact lukfor ▾ Update

Array Build GRCh37/hg19 Genotype Imputation (Minimac4) Genotype Imputation and Polygenic Scores (Beta Version) Genotype Imputation HLA (Minimac4)

Please note that the array build and reference genome must always match the reference genome used for imputation.

rsq Filter off Deprecated

Phasing Eagle v2.4 (phase haplotypes)

Population -- select an option --

Mode Quality Control & Imputation

AES 256 encryption
Imputation Server encrypts all zip files by default. Please note that AES encryption does not work with standard unzip programs. Use 7z instead.

Generate Meta-imputation file

PGS Calculation (optional)

Please select a collection of polygenic scores to enable on the fly PGS calculation.

Scores -- select an option --

I will not attempt to re-use my PGS catalog

PGS Catalog v20220803 (hg19, 2620 scores)

PGS Catalog v20220803 (hg38, 2620 scores)

I will report any inadvertent data release, security breach or other data management incident of which I become aware.

Submit Job

PGS000017

Inflammatory bowel disease

PGS000018

Coronary artery disease

PGS000020

Type 2 diabetes

PGS000025

Alzheimer's Disease

PGS000026

Alzheimer's Disease

PGS000027

Body Mass Index

PGS000028

Breast cancer

PGS000034

Adult Body Mass Index

PGS000036

Type 2 diabetes

PGS000018


Reference score

- Variants: 1,745,179
- Trait: Coronary artery disease
- Populations: East Asian (11,323) • South Asian (25,557) • Greater Middle Eastern (Middle Eastern, North African or Persian) (2,268) • Hispanic or Latin American (4,095) • European (141,217) • African American or Afro-Caribbean (3,139) • Other (194,427)
- Publication: Inouye M et.al, J Am Coll Cardiol (2018-10-01)
- View in [PGS-Catalog](#)

Target study

- Coverage: 1,745,120 (100%) High
- Samples: 4,158

Distribution

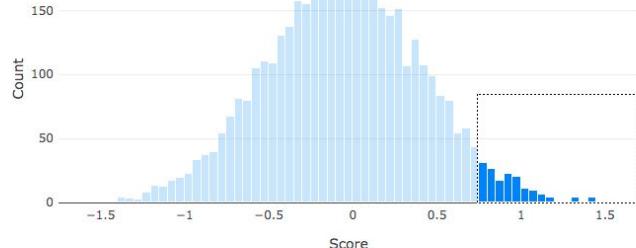

Selection (161) Actions ▾


Sample	Score
890000201	0.77649947
890001343	0.76283425
890001004	0.77438169
890002958	0.79980782
890005251	0.77426221
890003924	0.75287451
890001360	0.79832303
890001938	0.79533143

PGS Server as a standalone tool

- pgs-calc is the backbone of PGS Server
- Available as a command line tool
 - No file upload required and higher flexibility
- Supports
 - Imputed genotypes from Imputation Server
 - Own score files
- Provides several filtering options (e.g. r2 or variant list)

<https://github.com/lukfor/pgs-calc>

Work in Progress

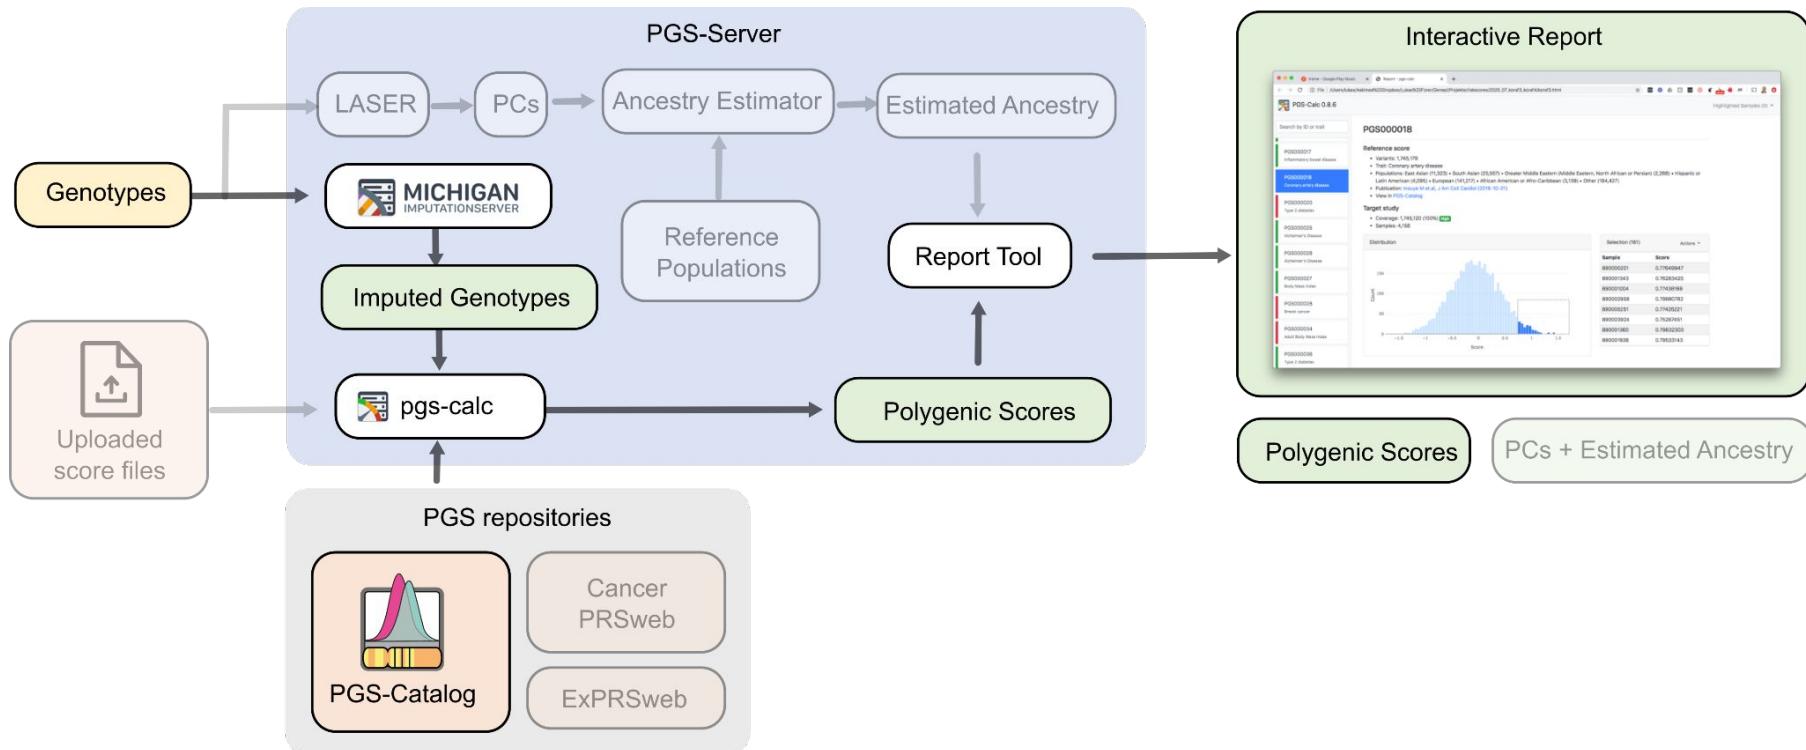

Conclusion

- PGS became a key role in genetic research
- Has the potential to contribute to precision medicine
- Extension of Imputation Server
 - Calculates scores automatically after imputation
 - Supports PGS Catalog, CancerPRSWeb and ExPRSWeb
 - Creates interactive reports

Taking the burden out of genetic analysis

Section 5

HLA Imputation



Saori Sakaue
Broad Institute
ssakaue@broadinstitute.org

 @saorisakaue



MICHIGAN
IMPUTATION SERVER

Learning objectives

Participants will

1. Learn variations within HLA
2. Learn how to impute HLA alleles and amino acid sequences from genotyped SNPs

Genotype Imputation

Genotyped SNPs → Untyped SNPs

statistically impute



~~Genotype~~ Imputation


HLA (human leukocyte antigen)

Genotyped SNPs → HLA variations


statistically impute



HLA genes are within MHC (major histocompatibility complex) locus on chromosome 6

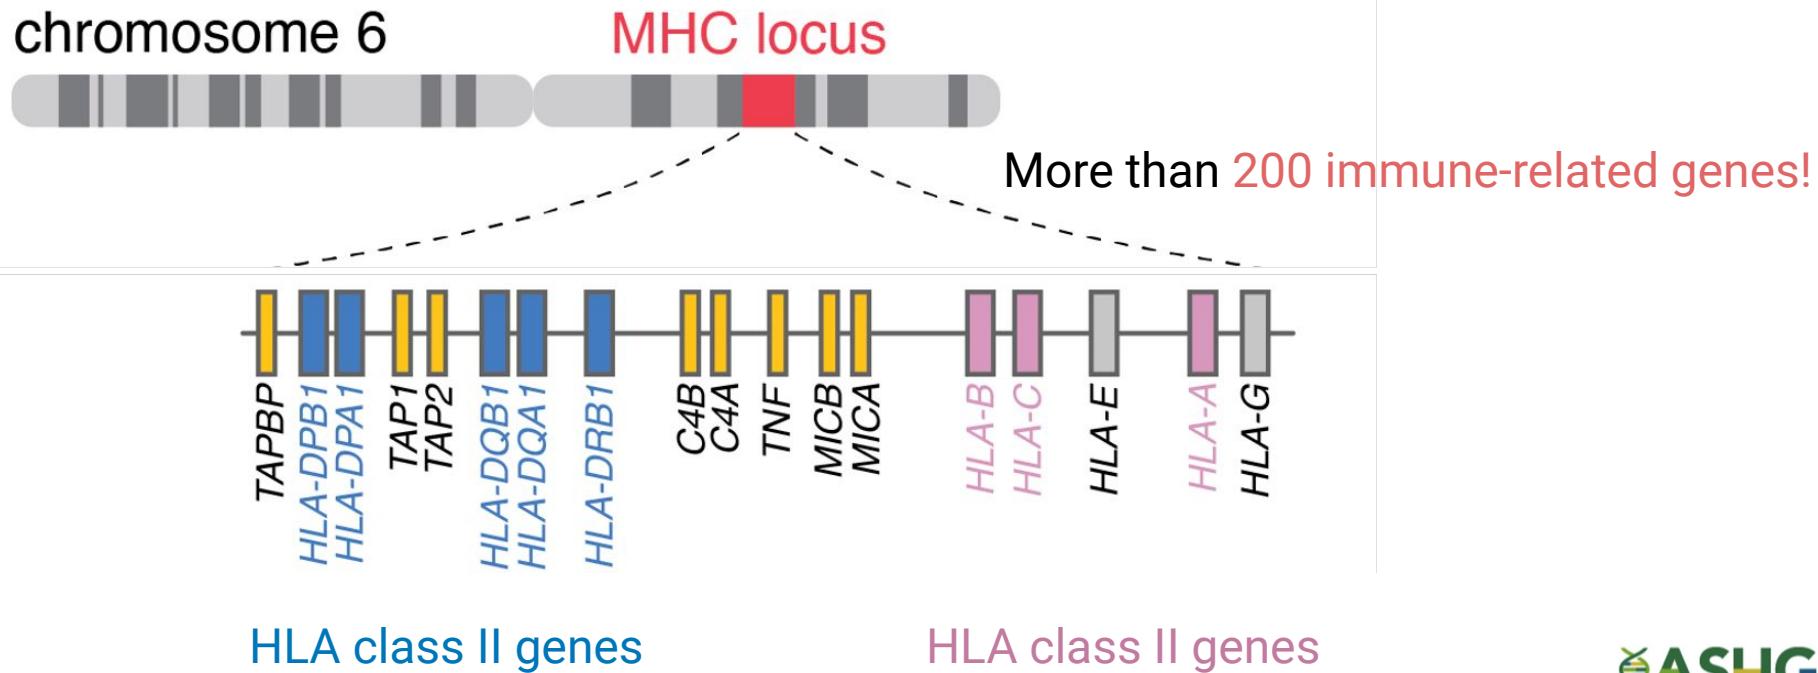


MHC locus confers the largest number of associations of any locus genome-wide

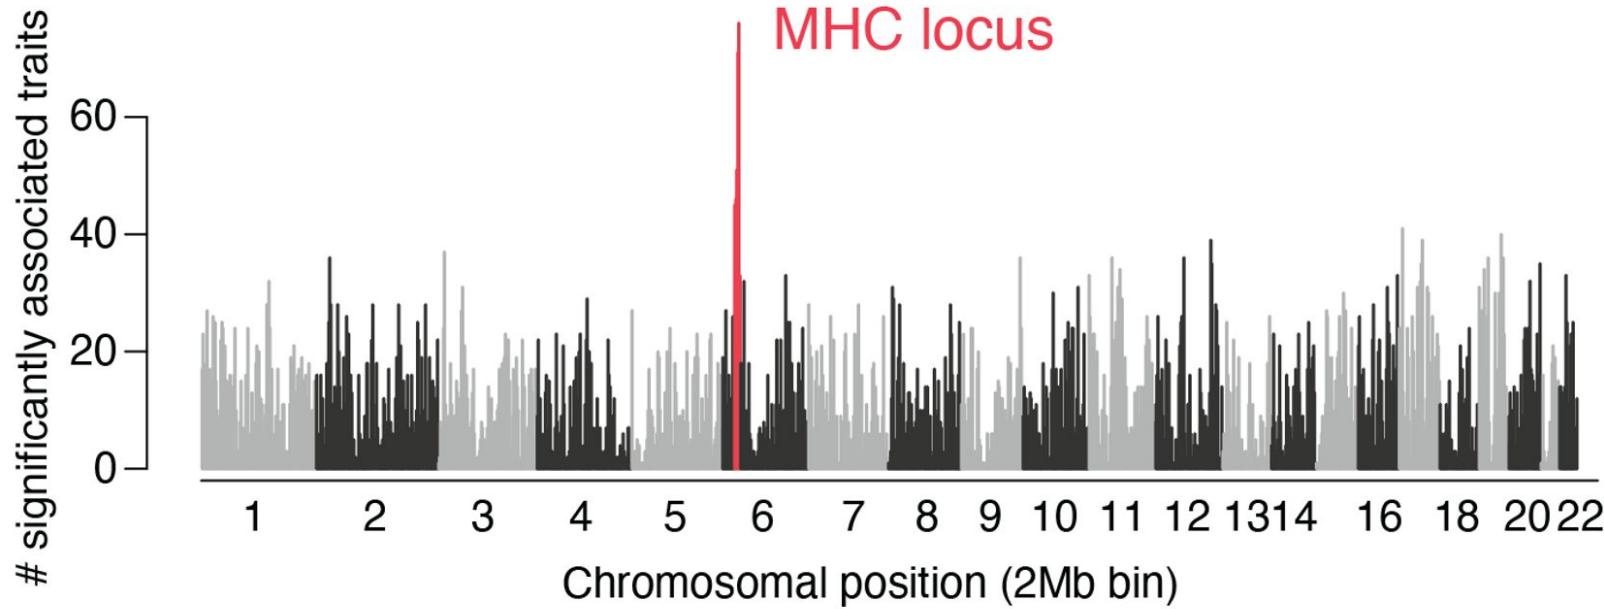


In UK Biobank, Sakaue et al. Nat Genet 2021, Sakaue et al. bioRxiv 2022


MHC locus is characterized by long and complex linkage disequilibrium structure

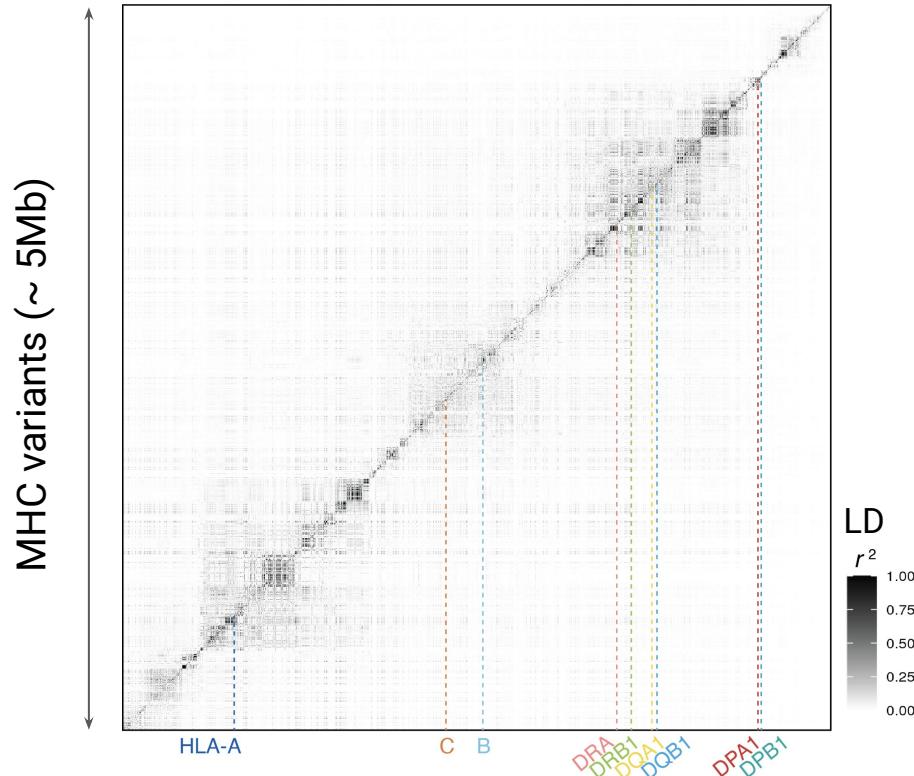


HLA presents antigens to immune cells

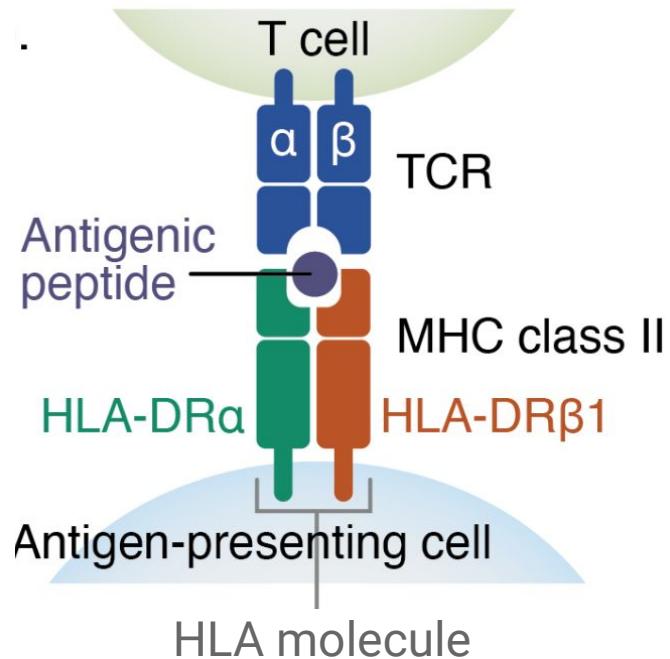


HLA presents antigens to immune cells, and therefore is **extremely polymorphic**

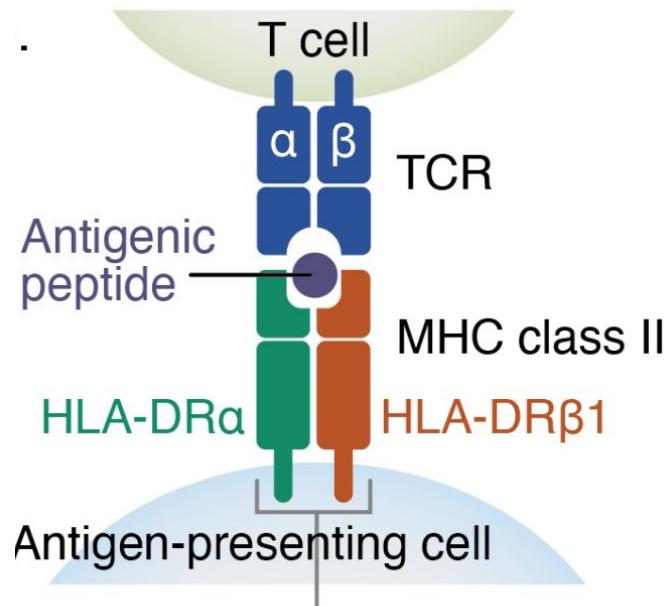

Extensive polymorphisms in peptide binding grooves

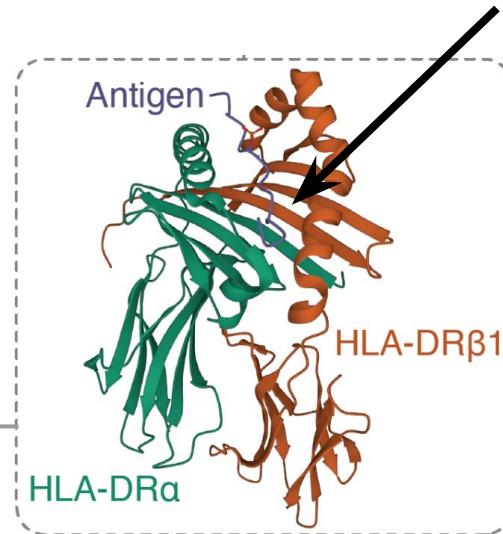


HLA variations determine HLA “alleles” and function

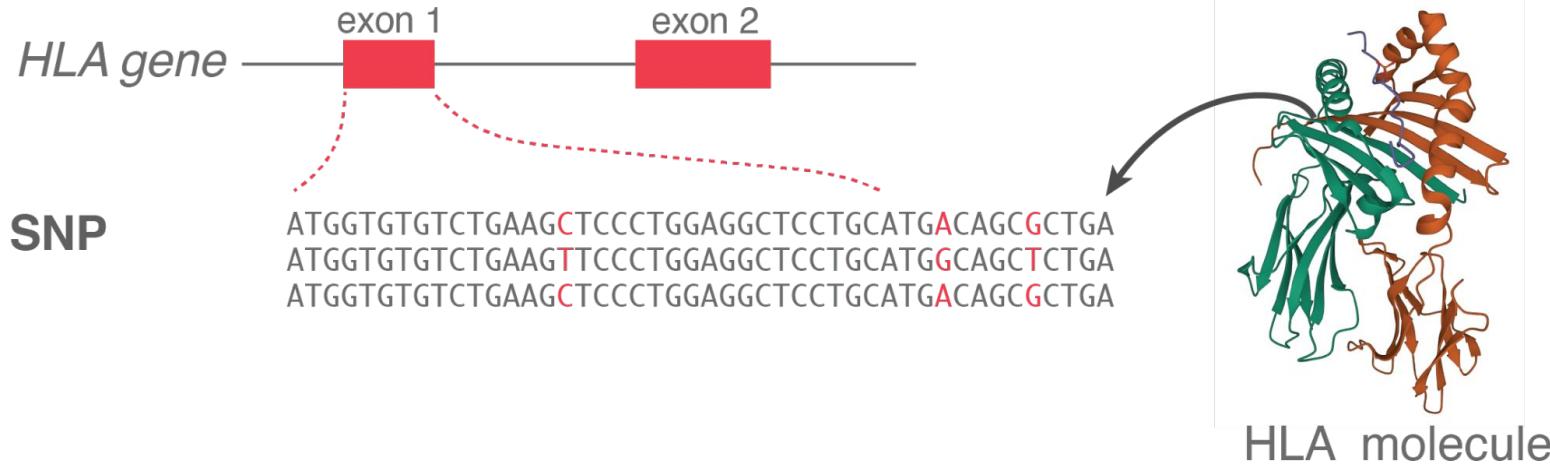


HLA variations determine HLA “alleles” and function



HLA variations determine HLA “alleles” and function

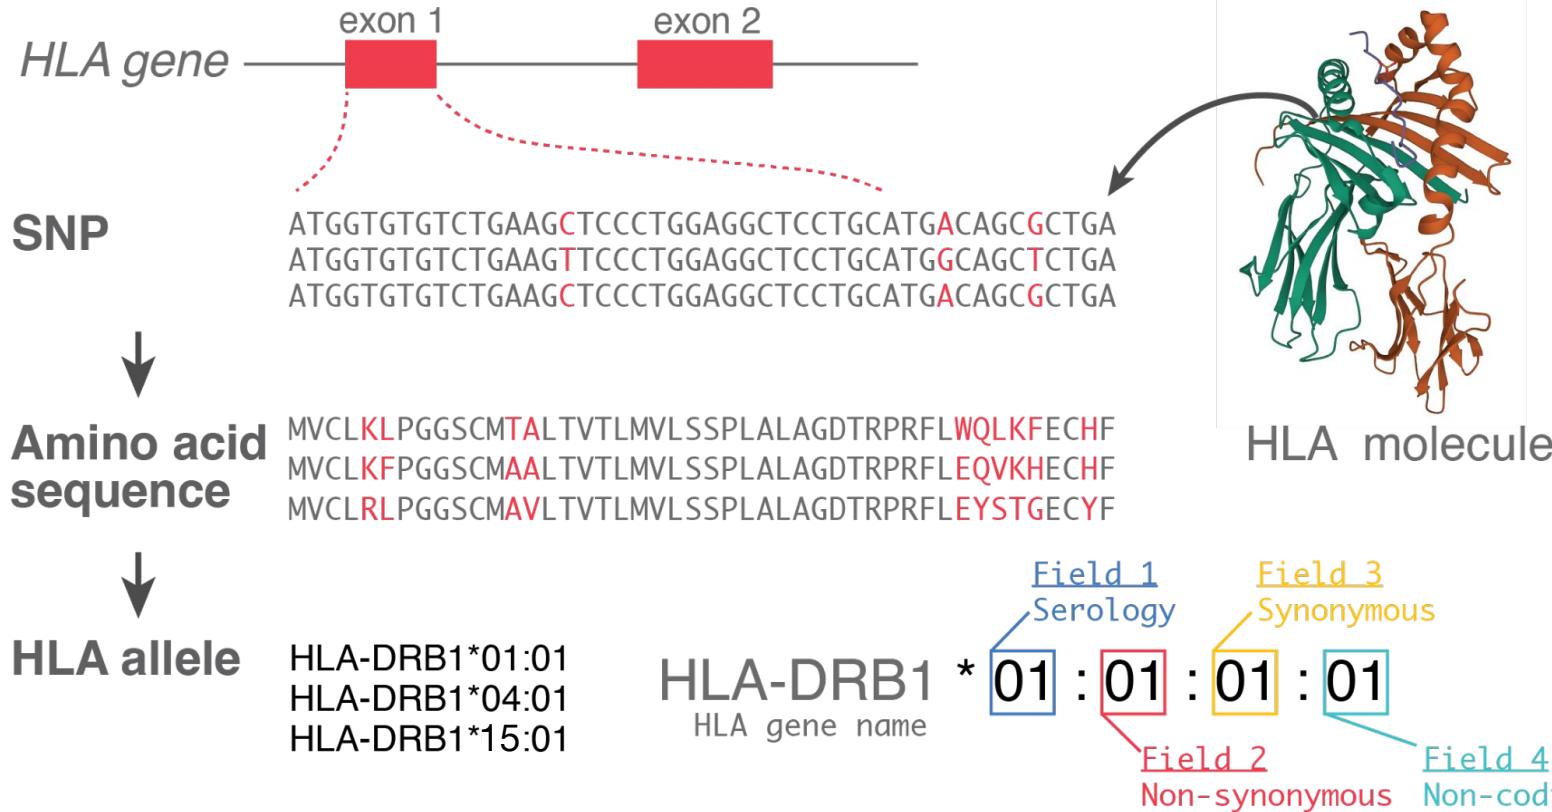

HLA variations determine HLA “alleles” and function

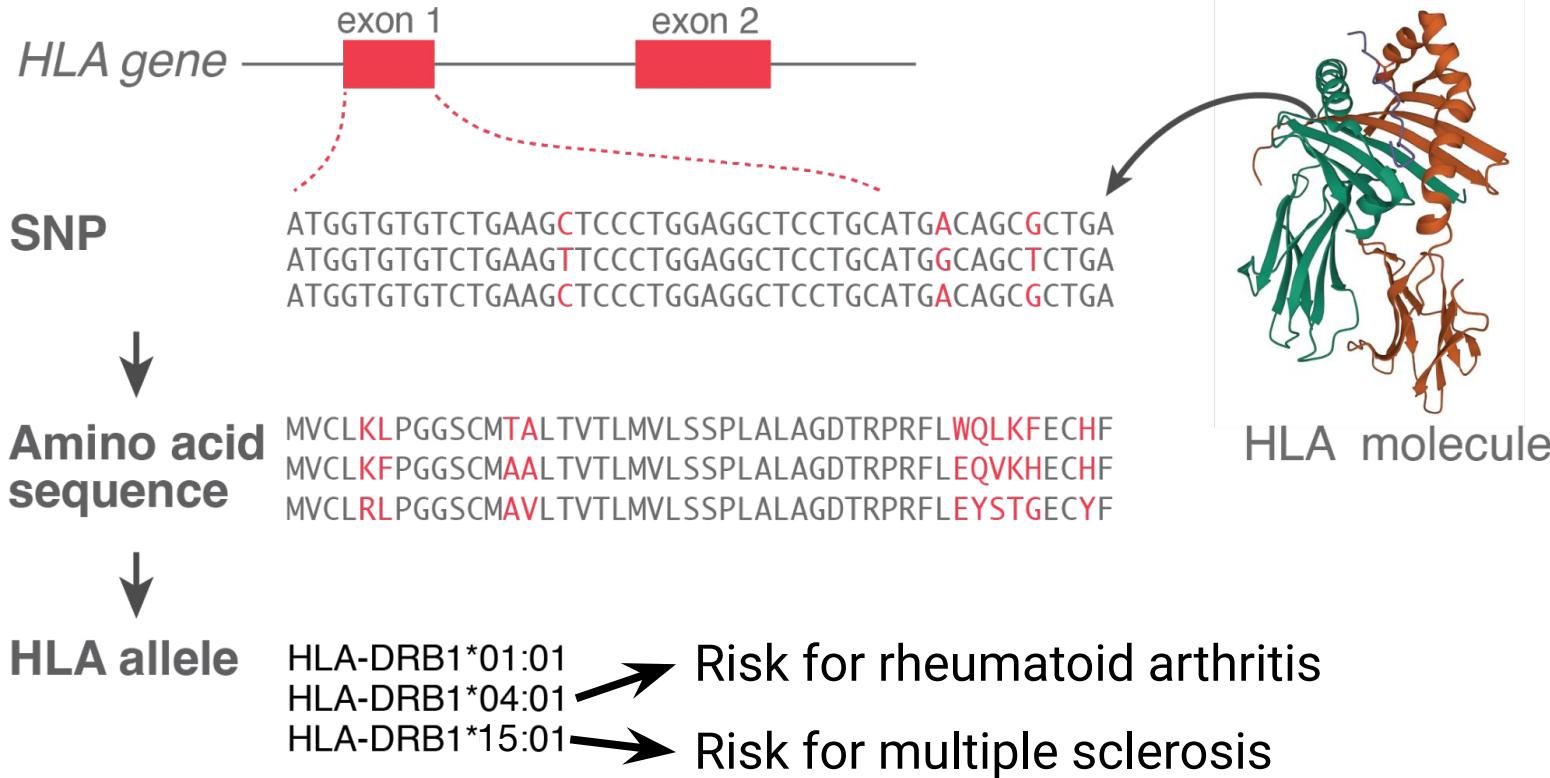

Genotype imputation in a nutshell

Genotype imputation

Known Genotyped SNPs

Given Reference haplotype with
whole-genome SNPs

Unknown Untyped SNPs
(Impute!)

HLA imputation in a nutshell

Genotype imputation

Known Genotyped SNPs

Given Reference haplotype with whole-genome SNPs

Unknown Untyped SNPs
(Impute!)

HLA imputation

Genotyped SNPs

Reference haplotype with HLA alleles and amino acid sequences

Untyped HLA alleles and amino acid sequences

HLA imputation in a nutshell

(Known) Input

Genotyped SNP in MHC

CGA.ATCT..GTCTTCTGT.CTAA
CAA.ATCT..GTCCT.TGT.CTAA
CAA.ATT..TGCTTCAGT.CTAA

HLA alleles

?

?

?

HLA amino acid sequences

?

?

?

(Given) HLA imputation reference panel

CGAGATCTCAGTCTTCTGTTCTAA → DRB1*04:01 → GGSCMAALTVTLMVL
CAAGATTTCCCTCATCTGTTCTAA → DRB1*01:01 → GGSCMTALTVTLMVL
CGAGATCTCCTGCTTCAGTTCTAA → DRB1*01:02 → GGSCMTALTVTLMVL
CAAGATCTCCGTCCTCTGTTCTAA → DRB1*15:01 → GGSCMTALTVTLMVL

Phasing + Imputation

Output

CGAGATCTCAGTCTTCTGTTCTAA → DRB1*04:01 → GGSCMAALTVTLMVL
CAAGATCTCCGTCCTCTGTTCTAA → DRB1*15:01 → GGSCMTALTVTLMVL
CAAGATTTCCCTGCTTCAGTTCTAA → DRB1*01:01 → GGSCMTALTVTLMVL

HLA imputation in a nutshell

(Known) Input

Genotyped SNP in MHC
CGA.ATCT..GTCTTCTGT.CTAA
CAA.ATCT..GTCCT.TGT.CTAA
CAA.ATT..TGCTTCAGT.CTAA

HLA alleles
?
?
?

HLA amino acid sequences
?
?
?

(Given) HLA imputation reference panel

CGAGATCTCAGTCTTCTGTTCTAA → DRB1*04:01 → GGSCMAALTVTLMVL
CAAGATTTCCCTCATCTGTTCTAA → DRB1*01:01 → GGSCMTALTVTLMVL
CGAGATCTCCTGCTTCAGTTCTAA → DRB1*01:02 → GGSCMTALTVTLMVL
CAAGATCTCCGTCCTCTGTTCTAA → DRB1*15:01 → GGSCMTALTVTLMVL



Multi-ancestry panel
(EUR, EAS, SAS, AFR, LAT)

Phasing + Imputation

Luo et al. Nat Genet 2021, Sakaue et al. bioRxiv 2022

Output

CGAGATCTCAGTCTTCTGTTCTAA → DRB1*04:01 → GGSCMAALTVTLMVL
CAAGATCTCCGTCCTCTGTTCTAA → DRB1*15:01 → GGSCMTALTVTLMVL
CAAGATTTCCCTGCTTCAGTTCTAA → DRB1*01:01 → GGSCMTALTVTLMVL

HLA imputation in a nutshell

(Known) Input

Genotyped SNP in MHC
CGA.ATCT..GTCTTCTGT.CTAA
CAA.ATCT..GTCCT.TGT.CTAA
CAA.ATT..TGCTTCAGT.CTAA

HLA alleles
?
?
?

HLA amino acid sequences
?
?
?

(Given) HLA imputation reference panel

CGAGATCTCAGTCTTCTGTTCTAA → DRB1*04:01 → GGSCMAALT V T L M V L
CAAGATTTCCCTCATCTGTTCTAA → DRB1*01:01 → GGSCMTALT V T L M V L
CGAGATCTCCTGCTTCAGTTCTAA → DRB1*01:02 → GGSCMTALT V T L M V L
CAAGATCTCCGTCCTCTGTTCTAA → DRB1*15:01 → GGSCMTALT V T L M V L



Multi-ancestry panel
(EUR, EAS, SAS, AFR, LAT)

Phasing + Imputation

Beagle Beagle
SHAPEIT Minimac
Eagle

CGAGATCTCAGTCTTCTGTTCTAA → DRB1*04:01 → GGSCMAALT V T L M V L
GATCTCCGTCCTCTGTTCTAA → DRB1*15:01 → GGSCMTALT V T L M V L
CAAGATTTCCCTGCTTCAGTTCTAA → DRB1*01:01 → GGSCMTALT V T L M V L

HLA imputation in a nutshell

(Known) Input

Genotyped SNP in MHC
CGA.ATCT..GTCTTCTGT.CTAA
CAA.ATCT..GTCCT.TGT.CTAA
CAA.ATT..TGCTTCAGT.CTAA

HLA alleles	HLA amino acid sequences
?	?
?	?
?	?

(Given) HLA imputation reference panel

CGAGATCTCAGTCTTCTGTTCTAA → DRB1*04:01 → GGSCMAALTVTLMVL
CAAGATTTCCCTCATCTGTTCTAA → DRB1*01:01 → GGSCMTALTVTLMVL
CGAGATCTCCTGCTTCAGTTCTAA → DRB1*01:02 → GGSCMTALTVTLMVL
CAAGATCTCCGTCCTCTGTTCTAA → DRB1*15:01 → GGSCMTALTVTLMVL



Multi-ancestry panel
(EUR, EAS, SAS, AFR, LAT)

Phasing + Imputation

Beagle
SHAPEIT
Eagle

SNP2HLA (Jia et al. PLoS One 2013)



MICHIGAN
IMPUTATION SERVER

HLA imputation in MIS

Michigan Imputation Server Home Run ▾ **Jobs** Help Contact  saorisakaue ▾

Genotype Imputation HLA

Thank you for using our multi-ethnic HLA imputation server.

Please cite this manuscript if you would like:

Luo, Y., Kanai, M., Choi, W., Li, X., Yamamoto, T., E., Elder, J. T., Fellay, J., Carrington, M., Haas, D. W., Guo, X., Palmer, N. D., Chen, Y.-D. I., Rotter, J. I., Taylor, K. D., Rich, S., ... Raychaudhuri, S. (2020). **A high-resolution HLA reference panel capturing global population diversity enables multi-ethnic fine-mapping in HIV host response.** <https://doi.org/10.1101/2020.07.16.20155606>

If your input data is **GRCh37/hg19** please ensure chromosomes are encoded without prefix (e.g. **20**).
If your input data is **GRCh38hg38** please ensure chromosomes are encoded with prefix 'chr' (e.g. **chr20**).

[🔗 https://imputationserver.readthedocs.io](https://imputationserver.readthedocs.io)

Run

Name: optional job name

Reference Panel ([Details](#)): -- select an option --

Input Files ([VCF](#)): File Upload



HLA imputation in MIS

The screenshot shows the Michigan Imputation Server (MIS) web interface. At the top, there is a navigation bar with links for Home, Run, Jobs, Help, and Contact, and a user profile icon for saorisakae. Below the navigation bar, there is a large "Run" button. The main form area has fields for "Name" (with placeholder "optional job name") and "Reference Panel". The "Reference Panel" field is expanded, showing a dropdown menu with three options: "Four-digit Multi-ethnic HLA reference panel (GRCh37/hg19)" (selected), "Four-digit Multi-ethnic HLA reference panel v2 (GRCh37/hg19)" (highlighted with a red box), and "Multi-ethnic HLA reference panel (GRCh37/hg19)". A red arrow points to the "(Details)" link next to the "Reference Panel" label. To the right of the dropdown, the text "Latest HLA reference panel" is displayed. Below the dropdown, there is a "Select Files" button and a note about selecting multiple files using keyboard shortcuts. Further down, there are fields for "Array Build" (set to "GRCh37/hg19") and "Phasing" (set to "Eagle v2.4 (phased output)").

Michigan Imputation Server Home Run ▾ Jobs Help Contact

saorisakae

Run

Name optional job name

Reference Panel (Details)

Input Files (VCF)

✓ -- select an option --

- Four-digit Multi-ethnic HLA reference panel (GRCh37/hg19)
- Four-digit Multi-ethnic HLA reference panel v2 (GRCh37/hg19)
- Multi-ethnic HLA reference panel (GRCh37/hg19)

Select Files

Multiple files can be selected by using the **ctrl** / **cmd** or **shift** keys.

Array Build GRCh37/hg19

Please note that the final SNP coordinates always match the reference build.

Phasing Eagle v2.4 (phased output)

Latest HLA reference panel


HLA imputation in MIS

Michigan Imputation Server Home Run ▾ Jobs Help Contact  saorisakaue ▾

Input Files ([VCF](#)) 

File Upload

QCed genotype data on chromosome 6 in VCF format

 Select Files

Multiple files can be selected by using the **ctrl** / **cmd** or **shift** keys.

Array Build: GRCh37/hg19

Please note that the final SNP coordinates always match the reference build.

Phasing: Eagle v2.4 (phased output)

Mode: Quality Control & Imputation

AES 256 encryption

Imputation Server encrypts all zip files by default. Please note that AES encryption does not work with standard unzip programs. Use 7z instead.


American Society of Human Genetics

HLA imputation in MIS

Michigan Imputation Server Home Run ▾ Jobs Help Contact  saorisakaue ▾

Input Files ([VCF](#))

 Select Files
Multiple files can be selected by using the **ctrl** / **cmd** or **shift** keys.

Array Build GRCh37/hg19
Please note that the final SNP coordinates always match the reference build.

Phasing **Eagle v2.4 (phased output)** 
Quality Control & Imputation

AES 256 encryption

Imputation Server encrypts all zip files by default. Please note that AES encryption does not work with standard unzip programs. Use 7z instead.

 Submit Job

 American Society of Human Genetics

Can be prephased or phasing by Eagle at MIS

Let's look at the output from MIS!

```
ssakaue@wmbed-37d:~/Downloads/chr_6 (2)$ zcat chr6.dose.vcf.gz | less -S
```

Let's look at the output from MIS!

```
##fileformat=VCFv4.1
##filedate=2022.11.14
##contig=<ID=6>
##INFO=<ID=AF,Number=1>Type=Float,Description="Estimated Alternate Allele Frequency">
##INFO=<ID=MAF,Number=1>Type=Float,Description="Estimated Minor Allele Frequency">
##INFO=<ID=R2,Number=1>Type=Float,Description="Estimated Imputation Accuracy (R-square)">
##INFO=<ID=ER2,Number=1>Type=Float,Description="Empirical (Leave-One-Out) R-square (available only for genotyped variants)">
##INFO=<ID=IMPUTED,Number=0>Type=Flag,Description="Marker was imputed but NOT genotyped">
##INFO=<ID=TYPED,Number=0>Type=Flag,Description="Marker was genotyped AND imputed">
##INFO=<ID=TYPED_ONLY,Number=0>Type=Flag,Description="Marker was genotyped but NOT imputed">
##FORMAT=<ID=GT,Number=1>Type=String,Description="Genotype">
##FORMAT=<ID=DS,Number=1>Type=Float,Description="Estimated Alternate Allele Dosage : [P(0/1)+2*P(1/1)]">
##FORMAT=<ID=HDS,Number=2>Type=Float,Description="Estimated Haploid Alternate Allele Dosage ">
##FORMAT=<ID=GP,Number=3>Type=Float,Description="Estimated Posterior Probabilities for Genotypes 0/0, 0/1 and 1/1 ">
##pipeline=michigan-imputationserver-1.5.8
##imputation=minimac4-1.0.2
##phasing=eagle-2.4
##panel=apps@multiethnic-hla-panel-4digit-v2@1.0.0
##r2Filter=0.0
#CHROM POS ID REF ALT QUAL FILTER INFO FORMAT 010061321010_R01C01_10007854 010061321010_R02C01_10020793 010061321010_
6 27970031 rs149946 G T . PASS AF=0.22479;MAF=0.22479;R2=0.99214;IMPUTED GT:DS:HDS:GP 0|0:0:0:0:1,0
6 27976200 rs9380032 G T . PASS AF=0.02975;MAF=0.02975;R2=0.97885;IMPUTED GT:DS:HDS:GP 0|0:0:0:0:1,0
6 27979188 rs4141691 A G . PASS AF=0.11754;MAF=0.11754;R2=0.94642;IMPUTED GT:DS:HDS:GP 0|0:0.003:0.0
6 27979625 rs10484402 A G . PASS AF=0.04041;MAF=0.04041;R2=0.92706;IMPUTED GT:DS:HDS:GP 0|0:0.003:0.0
6 27981673 rs9368540 G A . PASS AF=0.03706;MAF=0.03706;R2=0.98634;IMPUTED GT:DS:HDS:GP 0|0:0:0,0:1,0
6 27984726 rs74505854 A C . PASS AF=0.00719;MAF=0.00719;R2=0.94391;IMPUTED GT:DS:HDS:GP 0|0:0:0,0:1,0
6 27984907 rs17765055 T C . PASS AF=0.04632;MAF=0.04632;R2=0.99897;ER2=0.97293;TYPED GT:DS:HDS:GP 0|0:0
6 27986199 rs72848791 C T . PASS AF=0.04361;MAF=0.04361;R2=0.99732;ER2=0.97465;TYPED GT:DS:HDS:GP 0|0:0
6 27986529 rs9368544 A C . PASS AF=0.04631;MAF=0.04631;R2=0.99885;IMPUTED GT:DS:HDS:GP 0|0:0:0,0:1,0
6 27998258 rs149990 G A . PASS AF=0.11782;MAF=0.11782;R2=0.99974;ER2=0.99765;TYPED GT:DS:HDS:GP 0|0:0
6 27999044 rs9368545 A T . PASS AF=0.04627;MAF=0.04627;R2=0.99825;IMPUTED GT:DS:HDS:GP 0|0:0:0,0:1,0
6 27999421 rs16893573 C T . PASS AF=0.02852;MAF=0.02852;R2=0.98601;IMPUTED GT:DS:HDS:GP 0|0:0:0,0:1,0
6 28001003 rs17708949 A C . PASS AF=0.03124;MAF=0.03124;R2=0.98465;IMPUTED GT:DS:HDS:GP 0|0:0:0,0:1,0
6 28001610 rs149942 T C . PASS AF=0.26963;MAF=0.26963;R2=0.99868;ER2=0.98731;TYPED GT:DS:HDS:GP 0|0:0
6 28002388 rs149943 G A . PASS AF=0.11781;MAF=0.11781;R2=0.99984;ER2=0.99889;TYPED GT:DS:HDS:GP 0|0:0
6 28003271 rs183926 T A . PASS AF=0.00996;MAF=0.00996;R2=0.99551;ER2=0.95540;TYPED GT:DS:HDS:GP 0|0:0
```

Imputed SNPs within MHC

Let's look at the output from MIS!

```
ssakae@wmbed-37d:~/Downloads/chr_6 (2)$ zcat chr6.dose.vcf.gz | less -S  
ssakae@wmbed-37d:~/Downloads/chr_6 (2)$ zcat chr6.dose.vcf.gz | grep HLA | less -S
```

Imputed HLA alleles

6	29910247	HLA_A*01	T	T	PASS	AF=0.15456;MAF=0.15456;R2=0.99719;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910248	HLA_A*01:01	A	T	PASS	AF=0.15234;MAF=0.15234;R2=0.99517;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910249	HLA_A*01:02	A	T	PASS	AF=0.00110;MAF=0.00110;R2=0.85198;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910250	HLA_A*01:136	A	T	PASS	AF=0.00002;MAF=0.00002;R2=0.04644;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910251	HLA_A*02	A	T	PASS	AF=0.26026;MAF=0.26026;R2=0.99741;IMPUTED	GT:DS:HDS:GP	0 1:0.998:0.0
6	29910252	HLA_A*02:01	A	T	PASS	AF=0.22914;MAF=0.22914;R2=0.98881;IMPUTED	GT:DS:HDS:GP	0 1:0.996:0.0
6	29910253	HLA_A*02:02	A	T	PASS	AF=0.00471;MAF=0.00471;R2=0.99686;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910254	HLA_A*02:03	A	T	PASS	AF=0.00094;MAF=0.00094;R2=0.88473;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910255	HLA_A*02:04	A	T	PASS	AF=0.00017;MAF=0.00017;R2=0.89691;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910256	HLA_A*02:05	A	T	PASS	AF=0.01556;MAF=0.01556;R2=0.99839;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910257	HLA_A*02:06	A	T	PASS	AF=0.00364;MAF=0.00364;R2=0.98705;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910258	HLA_A*02:07	A	T	PASS	AF=0.00133;MAF=0.00133;R2=0.94265;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910259	HLA_A*02:10	A	T	PASS	AF=0.00001;MAF=0.00001;R2=0.06774;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910260	HLA_A*02:11	A	T	PASS	AF=0.00072;MAF=0.00072;R2=0.79302;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910261	HLA_A*02:135	A	T	PASS	AF=0.00005;MAF=0.00005;R2=0.22275;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910262	HLA_A*02:17	A	T	PASS	AF=0.00108;MAF=0.00108;R2=0.91078;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910263	HLA_A*02:195	A	T	PASS	AF=0.00003;MAF=0.00003;R2=0.00997;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910264	HLA_A*02:20	A	T	PASS	AF=0.00019;MAF=0.00019;R2=0.41177;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910265	HLA_A*02:22	A	T	PASS	AF=0.00026;MAF=0.00026;R2=0.84742;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910266	HLA_A*02:279	A	T	PASS	AF=0.00008;MAF=0.00008;R2=0.24552;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910267	HLA_A*02:55	A	T	PASS	AF=0.00001;MAF=0.00001;R2=0.02045;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910268	HLA_A*02:56	A	T	PASS	AF=0.00007;MAF=0.00007;R2=0.08360;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910269	HLA_A*02:60	A	T	PASS	AF=0.00004;MAF=0.00004;R2=0.49123;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910270	HLA_A*02:76	A	T	PASS	AF=0.00030;MAF=0.00030;R2=0.40308;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910271	HLA_A*02:87	A	T	PASS	AF=0.00001;MAF=0.00001;R2=0.00984;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910272	HLA_A*03	A	T	PASS	AF=0.12657;MAF=0.12657;R2=0.99727;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910273	HLA_A*03:01	A	T	PASS	AF=0.12061;MAF=0.12061;R2=0.99073;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910274	HLA_A*03:02	A	T	PASS	AF=0.00441;MAF=0.00441;R2=0.97833;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910275	HLA_A*03:36N	A	T	PASS	AF=0.00063;MAF=0.00063;R2=0.40664;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910276	HLA_A*03:89	A	T	PASS	AF=0.00006;MAF=0.00006;R2=0.05589;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910277	HLA_A*11	A	T	PASS	AF=0.06332;MAF=0.06332;R2=0.99759;IMPUTED	GT:DS:HDS:GP	1 0:1.000:1.0
6	29910278	HLA_A*11:01	A	T	PASS	AF=0.05966;MAF=0.05966;R2=0.96821;IMPUTED	GT:DS:HDS:GP	1 0:0.958:0.9
6	29910279	HLA_A*11:02	A	T	PASS	AF=0.00059;MAF=0.00059;R2=0.84655;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910280	HLA_A*11:32	A	T	PASS	AF=0.00021;MAF=0.00021;R2=0.04209;IMPUTED	GT:DS:HDS:GP	0 0:0.024:0.0
6	29910281	HLA_A*11:50Q	A	T	PASS	AF=0.00250;MAF=0.00250;R2=0.41268;IMPUTED	GT:DS:HDS:GP	0 0:0.018:0.0
6	29910282	HLA_A*23	A	T	PASS	AF=0.02822;MAF=0.02822;R2=0.99569;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910283	HLA_A*23:01	A	T	PASS	AF=0.02797;MAF=0.02797;R2=0.99150;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910284	HLA_A*23:15	A	T	PASS	AF=0.00000;MAF=0.00000;R2=0.00005;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0

REF ALT

"T": Presence of the allele
 "A": Absence of the allele


Imputed HLA alleles

6	29910247	HLA_A*01	T	.	PASS	AF=0.15456;MAF=0.15456;R2=0.99719;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0	
6	29910248	HLA_A*01:01	A	T	.	PASS	AF=0.15234;MAF=0.15234;R2=0.99517;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910249	HLA_A*01:02	A	T	.	PASS	AF=0.00110;MAF=0.00110;R2=0.85198;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910250	HLA_A*01:136	A	T	.	PASS	AF=0.00002;MAF=0.00002;R2=0.04644;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910251	HLA_A*02	A	T	.	PASS	AF=0.26026;MAF=0.26026;R2=0.99741;IMPUTED	GT:DS:HDS:GP	0 1:0.998:0
6	29910252	HLA_A*02:01	A	T	.	PASS	AF=0.22914;MAF=0.22914;R2=0.98881;IMPUTED	GT:DS:HDS:GP	0 1:0.996:0.0
6	29910253	HLA_A*02:02	A	T	.	PASS	AF=0.00471;MAF=0.00471;R2=0.99686;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910254	HLA_A*02:03	A	T	.	PASS	AF=0.00094;MAF=0.00094;R2=0.88473;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910255	HLA_A*02:04	A	T	.	PASS	AF=0.00017;MAF=0.00017;R2=0.89691;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910256	HLA_A*02:05	A	T	.	PASS	AF=0.01556;MAF=0.01556;R2=0.99839;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910257	HLA_A*02:06	A	T	.	PASS	AF=0.00364;MAF=0.00364;R2=0.98705;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910258	HLA_A*02:07	A	T	.	PASS	AF=0.00133;MAF=0.00133;R2=0.94265;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910259	HLA_A*02:10	A	T	.	PASS	AF=0.00001;MAF=0.00001;R2=0.06774;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910260	HLA_A*02:11	A	T	.	PASS	AF=0.00072;MAF=0.00072;R2=0.79302;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910261	HLA_A*02:135	A	T	.	PASS	AF=0.00005;MAF=0.00005;R2=0.22275;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910262	HLA_A*02:17	A	T	.	PASS	AF=0.00108;MAF=0.00108;R2=0.91078;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910263	HLA_A*02:195	A	T	.	PASS	AF=0.00003;MAF=0.00003;R2=0.00997;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910264	HLA_A*02:20	A	T	.	PASS	AF=0.00019;MAF=0.00019;R2=0.41177;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910265	HLA_A*02:22	A	T	.	PASS	AF=0.00026;MAF=0.00026;R2=0.84742;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910266	HLA_A*02:279	A	T	.	PASS	AF=0.00008;MAF=0.00008;R2=0.24552;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910267	HLA_A*02:55	A	T	.	PASS	AF=0.00001;MAF=0.00001;R2=0.02045;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910268	HLA_A*02:56	A	T	.	PASS	AF=0.00007;MAF=0.00007;R2=0.08360;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910269	HLA_A*02:60	A	T	.	PASS	AF=0.00004;MAF=0.00004;R2=0.49123;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910270	HLA_A*02:76	A	T	.	PASS	AF=0.00030;MAF=0.00030;R2=0.40308;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910271	HLA_A*02:87	A	T	.	PASS	AF=0.00001;MAF=0.00001;R2=0.00984;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910272	HLA_A*03	A	T	.	PASS	AF=0.12657;MAF=0.12657;R2=0.99727;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910273	HLA_A*03:01	A	T	.	PASS	AF=0.12061;MAF=0.12061;R2=0.99073;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910274	HLA_A*03:02	A	T	.	PASS	AF=0.00441;MAF=0.00441;R2=0.97833;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910275	HLA_A*03:36N	A	T	.	PASS	AF=0.00063;MAF=0.00063;R2=0.40664;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910276	HLA_A*03:89	A	T	.	PASS	AF=0.00006;MAF=0.00006;R2=0.05589;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910277	HLA_A*11	A	T	.	PASS	AF=0.06332;MAF=0.06332;R2=0.99759;IMPUTED	GT:DS:HDS:GP	1 0:1.000:1.0
6	29910278	HLA_A*11:01	A	T	.	PASS	AF=0.05966;MAF=0.05966;R2=0.96821;IMPUTED	GT:DS:HDS:GP	1 0:0.958:0.9
6	29910279	HLA_A*11:02	A	T	.	PASS	AF=0.00059;MAF=0.00059;R2=0.84655;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910280	HLA_A*11:32	A	T	.	PASS	AF=0.00021;MAF=0.00021;R2=0.04209;IMPUTED	GT:DS:HDS:GP	0 0:0:0.024:0.0
6	29910281	HLA_A*11:50Q	A	T	.	PASS	AF=0.00250;MAF=0.00250;R2=0.41268;IMPUTED	GT:DS:HDS:GP	0 0:0:0.018:0.0
6	29910282	HLA_A*23	A	T	.	PASS	AF=0.02822;MAF=0.02822;R2=0.99569;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910283	HLA_A*23:01	A	T	.	PASS	AF=0.02797;MAF=0.02797;R2=0.99150;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0
6	29910284	HLA_A*23:15	A	T	.	PASS	AF=0.00000;MAF=0.00000;R2=0.00005;IMPUTED	GT:DS:HDS:GP	0 0:0:0,0:1,0

REF ALT

"T": Presence of the allele
 "A": Absence of the allele

HLA imputation in MIS is accurate!

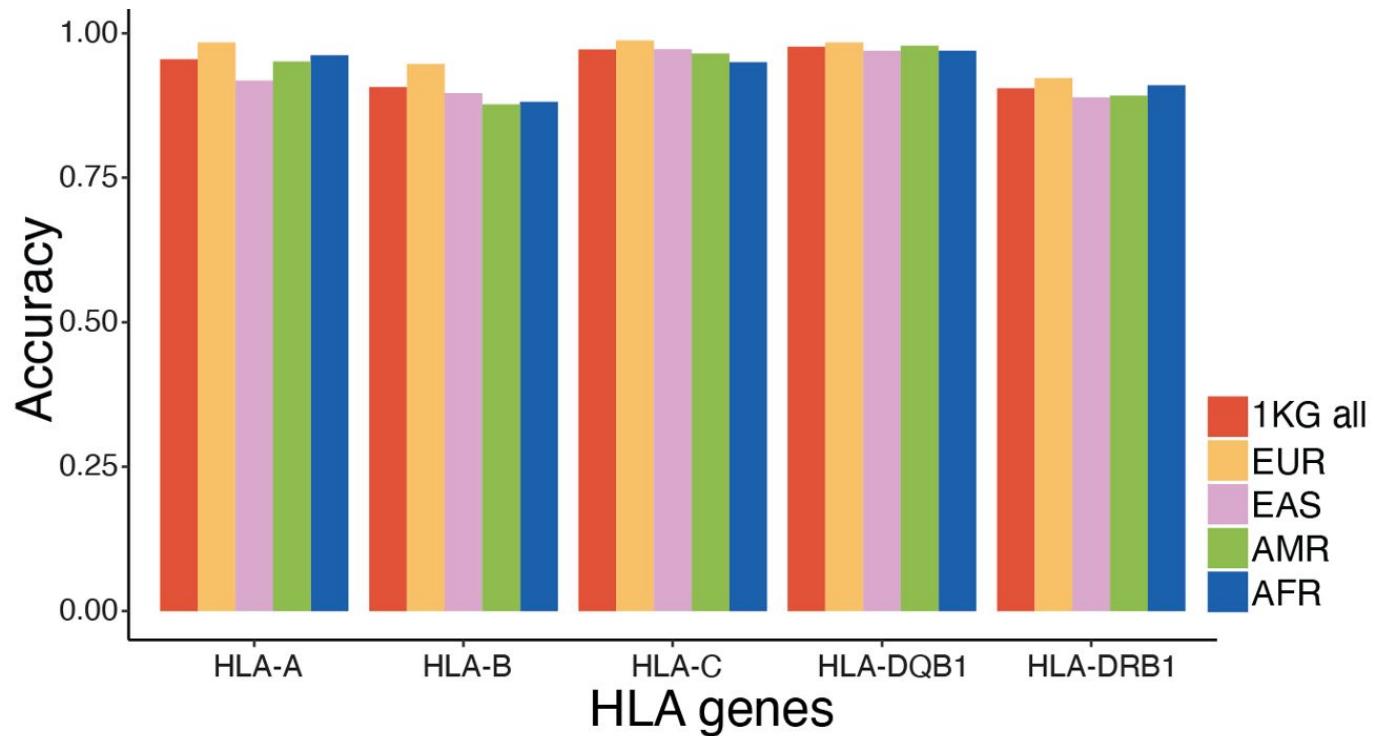

Summary

1. HLA amino acid sequences and alleles characterize antigen presentation and disease risk within HLA.
2. HLA imputation enables imputation of HLA amino acid sequences and alleles from genotyped SNPs.

Summary

1. HLA amino acid sequences and alleles characterize antigen presentation and disease risk within HLA.
2. HLA imputation enables imputation of HLA amino acid sequences and alleles from genotyped SNPs.

For more information and downstream statistical tests...

A statistical genetics guide to identifying HLA alleles driving complex disease



Saori Sakaue, Saisriram Gurajala, Michelle Curtis, Yang Luo, Wanson Choi, Kazuyoshi Ishigaki, Joyce B. Kang, Laurie Rumker, Aaron J. Deutsch, Sebastian Schönherr, Lukas Forer, Jonathon LeFaive, Christian Fuchsberger, Buhm Han, Tobias L. Lenz, Paul I. W. de Bakker, Albert V. Smith, Soumya Raychaudhuri

doi: <https://doi.org/10.1101/2022.08.24.504550>

Section 6

The TOPMed Imputation Server




Albert Smith
University of Michigan
albertvs@umich.edu
 @avsmith

TOPMed Program

- Trans-Omics for Precision Medicine (TOPMed) Program
- A Precision Medicine Initiative sponsored by National Heart, Lung and Blood Institute
- Integrating whole-genome sequencing and other omics data
- >180k participants from >90 studies

Ancestry & Ethnicity

Phases 1-7 (~180K Participants)

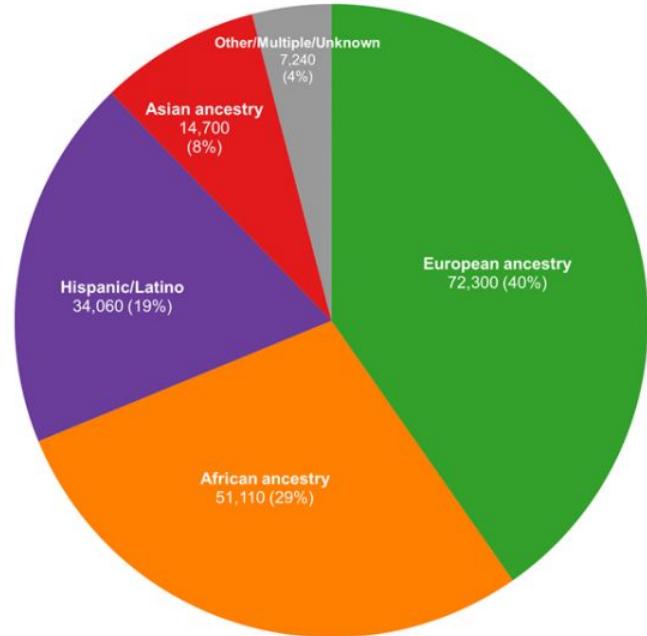

TOPMed Variant Call Set

Type	Category	PASS Variants	Singletons	Doubletons	AF > .0001	AF > .001	AF > .005	AF > .05
SNP	All	781M	46.4%	15.7%	4.50%	1.27%	1.06%	0.87%
	Synonymous	2.77M	42.2%	15.2%	5.23%	1.37%	1.06%	0.76%
	Missense	6.00M	46.4%	15.7%	3.96%	0.87%	0.56%	0.33%
	Stop Gain	197K	53.3%	16.0%	2.39%	0.44%	0.24%	0.12%
Indels	All	62.4M	49.7%	15.3%	4.22%	1.13%	0.90%	0.63%
	Inframe	112K	50.8%	15.5%	3.69%	0.70%	0.35%	0.16%
	Frameshift	271K	60.0%	15.5%	1.78%	0.31%	0.17%	0.09%

Stop-gain and frameshift variants progressively depleted among common variants

1/830 stop gain variants reaches MAF>5% vs. **1/115** among all SNPs, **1/303** among missense SNPs
1/1100 frameshift variants reaches MAF>5% vs. **1/159** among all Indels, **1/625** among inframe indels.

TOPMed Imputation

- Reference panel based on TOPMed Freeze 8 Calls
- Michigan Imputation Server ported to Amazon Web Services
- Released April 2020
- <https://imputation.biodatacatalyst.nhlbi.nih.gov>
- Registration as before, open access to TOPMed panel
 - (Michigan Imputation Server accounts *not* transferred)

TOPMed Panel

Variation type	Non-reference allele frequency bins				Totals
	(0, 0.005]	(0.005, 0.01]	(0.01, 0.05]	(0.05, 1)	
SNVs	270,352,495	3,365,284	5,330,340	7,020,861	286,068,980
Insertions	5,462,262	74,150	130,506	148,595	5,815,513
Deletions	15,406,052	185,606	297,186	333,748	16,222,592
Totals	291,220,809	3,625,040	5,758,032	7,503,204	308,107,085

Panel based on TOPMed Freeze 8


TOPMed Panel Compared

	TOPMed_r2	HRC	1000G Genomes
N samples	97K	39K	2,500
Ancestry	Multiethnic	European	Multiethnic
N variants	308M	39M	88M
Avg. depth	38X	8X	4X
Genome build	b38	b37	b37


Contributing Cohorts

Cohort	Samples	Cohort	Samples
Amish	1,109	HVH	696
ARIC	8,426	HyperGEN	1,849
AustralianFamilialAF	120	IPF	1,365
BAGS	1,003	JHS	3,403
BioMe	11,570	LTRC	1,388
CARDIA	3,449	MESA	5,347
CFS	1,291	MLOF	5,099
CHS	3,528	OMG_SCD	640
COPDGene	10,514	SAFS	1,776
DHS	376	SAGE	1,935
FHS	4,146	Sarcoidosis	633
GALAI	941	VAFAR	173
GALAI	4,663	VU_AF	1,133
GeneSTAR	1,759	walk_PHaSST	429
GOLDN	942	WHI	11,039
HCHS_SOL	6,514	Total	97,256


Imputation Panel Quality

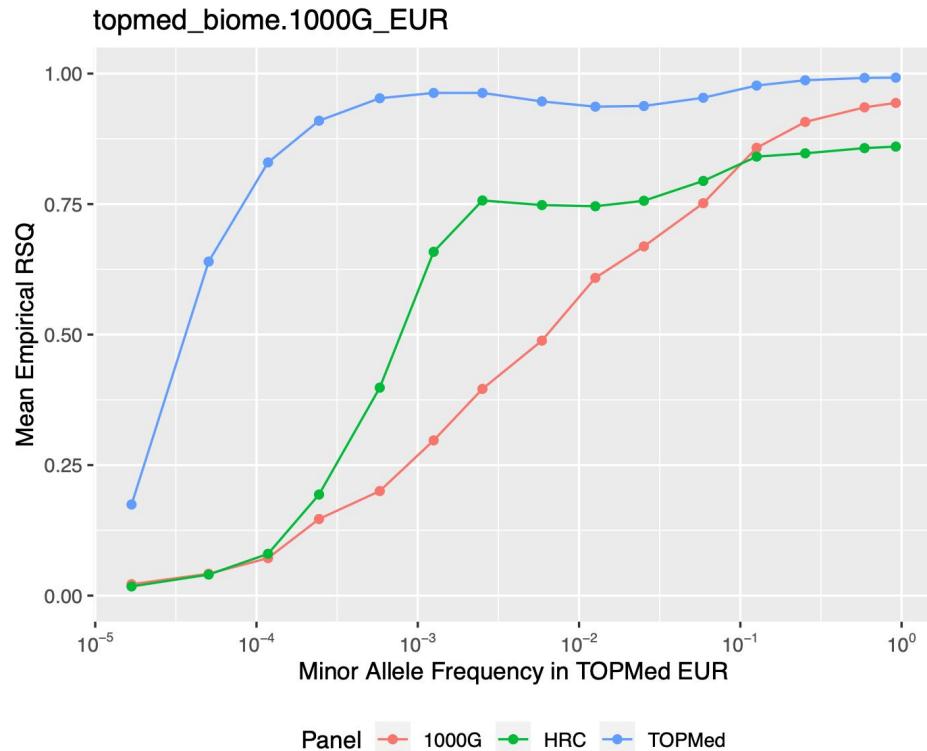

Imputation Panel Quality

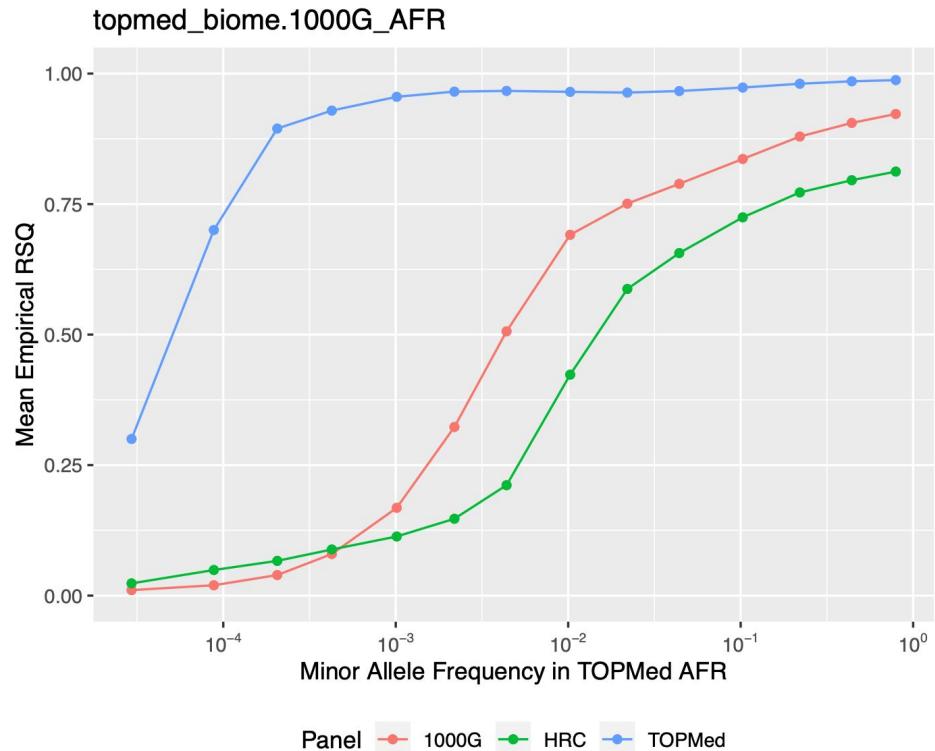


Imputation Panel Quality

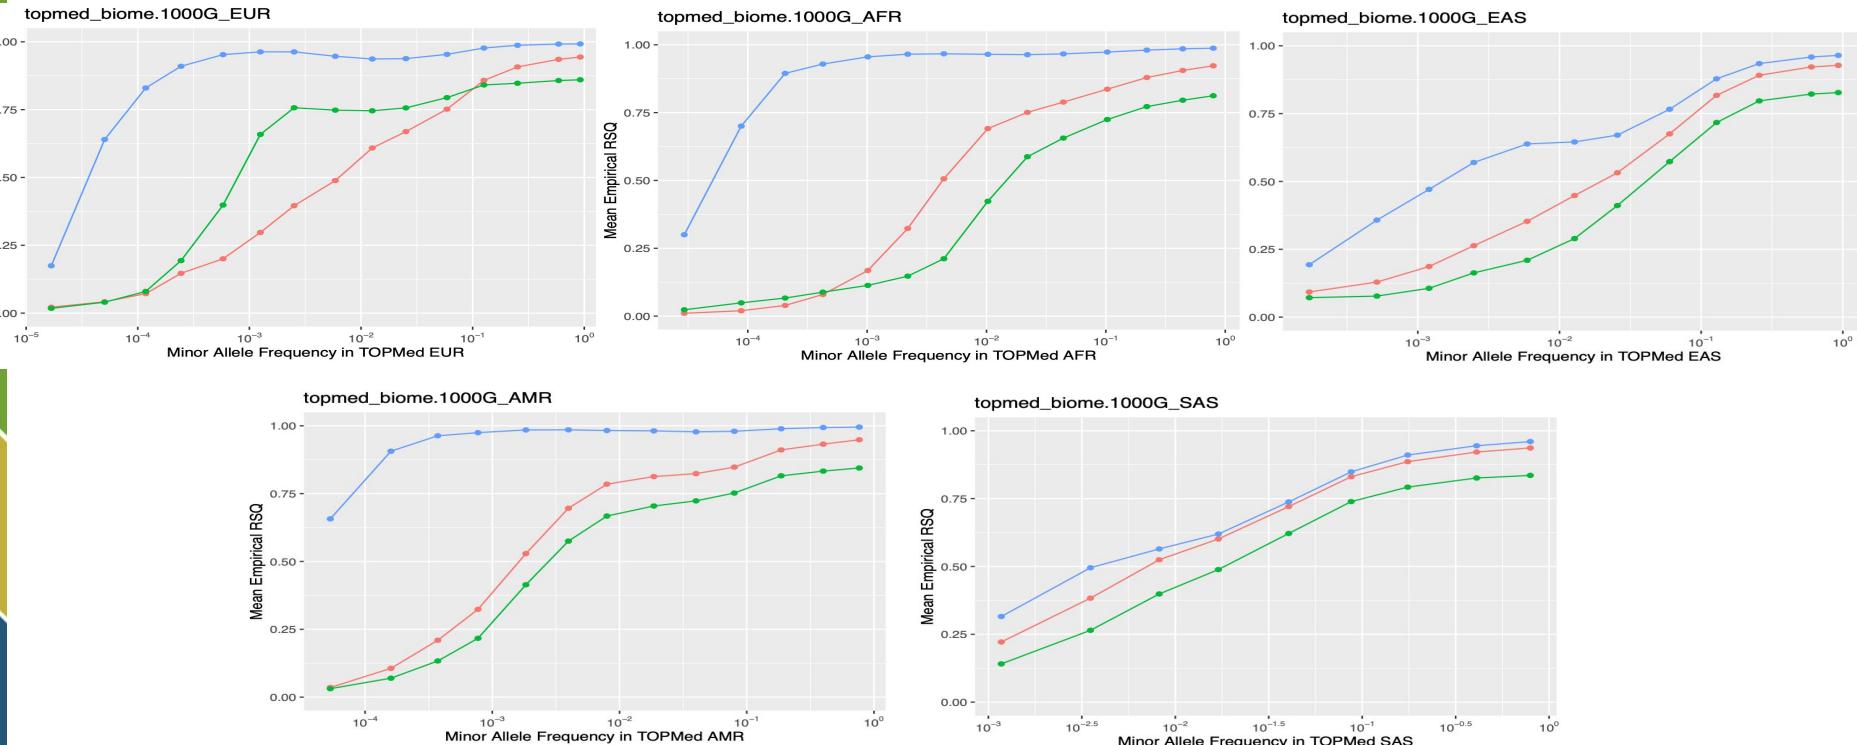

Imputation Compared to WGS

- Proportion well imputed ($r^2 > 0.8$) down to MAF:
 - 0.14% in African
 - 0.11% in Hispanic/Latino
 - 0.35% in European
 - 0.85% in Finnish
- Similar performance for arrays with >700k variants
- Source: Hanks et al.
<https://doi.org/10.1016/j.ajhg.2022.07.012>

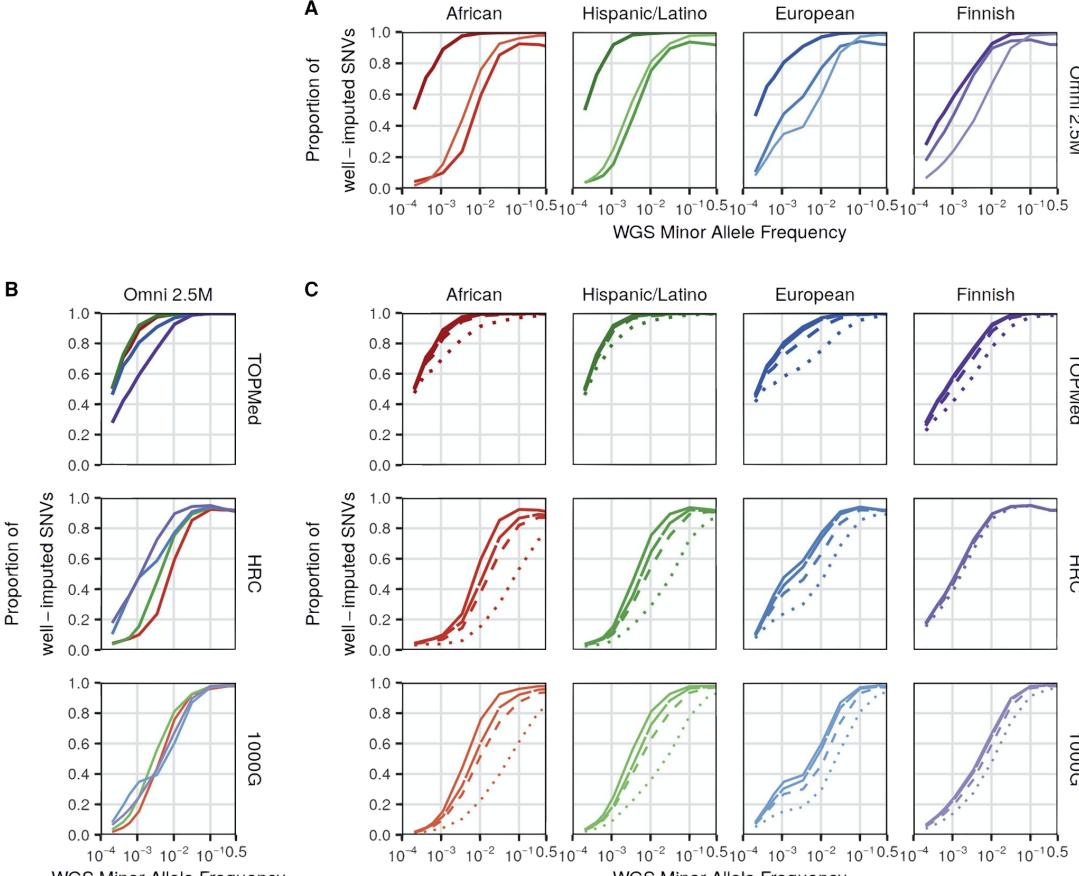

Ancestry: Reference Panel

Reference Panel	Curve Color
African: TOPMed	Red
African: HRC	Dark Red
African: 1000G	Orange
Hispanic/Latino: TOPMed	Green
Hispanic/Latino: HRC	Dark Green
Hispanic/Latino: 1000G	Light Green
European: TOPMed	Blue
European: HRC	Dark Blue
European: 1000G	Light Blue
Finnish: TOPMed	Purple
Finnish: HRC	Dark Purple
Finnish: 1000G	Light Purple

Array

— Omni 2.5M (2.4M) — MEGA (1.7M) - - - Omni Express (0.7M) ······ Core (0.3M)

Private imputation.biocatalyst.nihbi.nih.gov Sign up +

NIH National Heart, Lung, and Blood Institute BioData CATALYST TOPMed Imputation Server Home About Help Contact Sign up Login

TOPMed Imputation Server

Free Next-Generation Genotype Imputation Service

Sign up now Login

38M
Imputed Genomes

3092
Registered Users

3
Running Jobs

The easiest way to impute genotypes



Upload your genotypes to our secured service.



Choose a reference panel. We will take care of pre-phasing and imputation.




Download the results.
All results are encrypted with a one-time password. After 7 days, all results are deleted from our server.

The TOPMed Imputation Server is powered by software invented and developed by the [University of Michigan](#) and driven by data provided by the investigators of the [TOPMed Program](#).

A screenshot of a web browser window displaying the BioData CATALYST TOPMed Imputation Server. The URL in the address bar is `imputation.biodatacatalyst.nhlbi.nih.gov`. The page title is "Genotype Imputation (Minimac4) 1.6.6". The header includes the NIH logo, the BioData CATALYST logo, and navigation links for Home, Run, Jobs, About, Help, Contact, and a user account for "albert". A sub-header reads "TOPMed Imputation Server". Below the title, a message states: "This is the new Michigan Imputation Server Pipeline using Minimac4. Documentation can be found here." It also provides instructions for input data: "If your input data is GRCh37/hg19 please ensure chromosomes are encoded without prefix (e.g. 20). If your input data is GRCh38hg38 please ensure chromosomes are encoded with prefix 'chr' (e.g. chr20)." A "Run" button is visible. The form fields include "Name" (optional job name), "Reference Panel (Details)" (dropdown menu showing "-- select an option --"), and "Input Files (VCF)" (File Upload field with "Select Files" button).

TOPMed Imputation

- Rapid uptake: 38M genomes imputed
- Largely supplanted 1000g & HRC imputation
- Particularly benefits ethnically diverse cohorts
- Satisfying GDPR-related concerns of European users remains a challenge

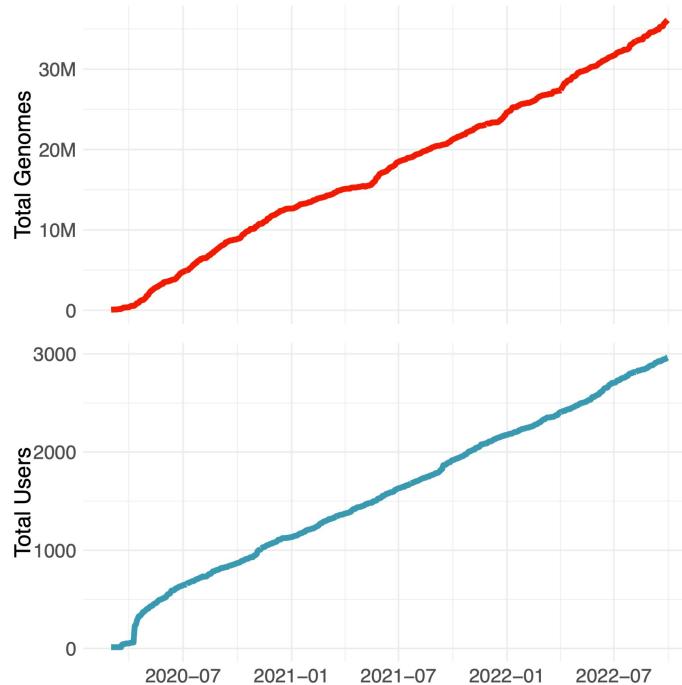

Imputation Resources

- Michigan Imputation Server
<https://imputation.sph.umich.edu/>
- TOPMed Imputation Server
<https://imputation.biostacatalyst.nhlbi.nih.gov/>
- Documentation
<https://imputationserver.readthedocs.io/>
<https://topmedimpute.readthedocs.io/>
- TOPMed Imputation Contact
imputationserver@umich.edu

Your questions

- Put in the chat
- Michigan Imputation Contact

cfuchsb@umich.edu

- TOPMed Imputation Contact

imputationserver@umich.edu