




Scoping & identity



Session tracking

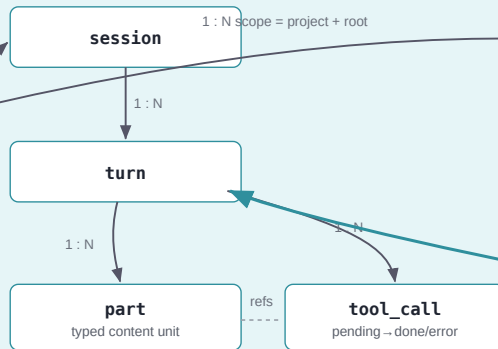

Knowledge

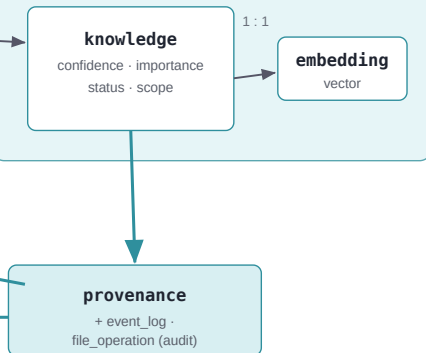

provenance bridges the tiers: every derived fact traces back to the turn and tool call that produced it (§4.4) — one store, one snapshot

→ foreign-key relationship (1 : N unless noted)

→ provenance bridge across tiers

Configuration — one row per scope

retrieval_config · extraction_config
demotion_config · storage_budget
token_estimate

Tunes recall, extraction, decay, and the storage budget enforceBudget() applies — attached to a project scope, not the spine.

Persistence — whole database

snapshot · state_snapshot

exportSnapshot() serializes every table above into one byte blob; openFromSnapshot rehydrates it (§6.4). No per-row durability — the snapshot is the unit.

Compiled-in — not yet a typed surface (§8)

task · task_dependency · task_file · scheduled_job
reminder · permission_rule · subagent_run
cg_node · cg_edge · cg_file · cg_source · cg_degree
okf_bundle · okf_concept · okf_link
agent_registry · agent_mailbox · mailbox_cursor
file_reservation · workspace · workspace_file