Knitting Clojure snippets

GenerateMe

2020-05-17

Generating documents with knitr and Clojure

This document is rendered by R knitr package with embedded Clojure code. Yes, it's possible. The renderer is configured to use nRepl client: rep.

What is knitr in short

Knitr is R package which generates really variety documents out of markdown file with embedded code.

Let's run something

```
First let's define data.
```

```
#'user/data
{:a [1 2 3], :b [3 4 5]}
```

Code was executed, data is defined and we can run another chunk.

```
(keys data)
```

```
(:a :b)
```

And another one (everything is kept in user namespace).

```
(->> data
    vals
    (apply concat)
    (reduce +))
```

18

Pretty print

```
(clojure.pprint/pprint (repeatedly 6 #(repeatedly 3 rand)))

((0.7520446413678854 0.9173691610425821 0.8481361656497033)
(0.054872846299799605 0.7589387132716925 0.5850548781091791)
(0.5198127865417965 0.030461388241874054 0.2730399578473639)
```

```
(0.5678052885728153 0.9346870644858589 0.9765675134259296)
(0.582183080916477 0.8812669433960627 0.8125788087611121)
(0.9567049890870916 0.2720851456525951 0.1847756813310285))
```

Generate image

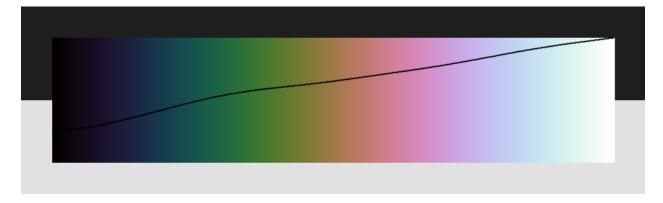


Figure 1: Generated gradient with luma

Generate markdown

test/data/stocks.csv [5 3]:

symbol	date	price
MSFT	2000-01-01	39.81
MSFT	2000-02-01	36.35
MSFT	2000-03-01	43.22
MSFT	2000-04-01	28.37

symbol	date	price
MSFT	2000-05-01	25.45

How to setup

I'm using Emacs with CIDER here.

- Clojure
 - Download and install rep
 - Be able to run nRepl
- R.
 - Install R with knitr and rmarkdown packages (and all needed deps, like pandoc)
- Emacs
 - Install ESS, poly-R package which enables REPL inside Markdown file.

Run nRepl, create .Rmd file and add below chunk at the beginning of it. As you can see, there is a place to define nrepl_port. Find your port and change this value. I haven't been able to find an easy way to setup it automatically (yet).

```
```{r setup, include=FALSE}
find_nrepl_port_up <- function() {</pre>
 wd <- getwd()</pre>
 while(wd != dirname(wd)) {
 f <- paste0(wd,"/.nrepl-port")</pre>
 if(file.exists(f)) return(paste0("@",f))
 wd <- dirname(wd)</pre>
 f <- NULL
 }
port_file <- find_nrepl_port_up()</pre>
if(is.null(port file)) stop("nREPL port not found")
library(knitr)
knitr_one_string <- knitr:::one_string</pre>
nrepl_cmd <- "rep"</pre>
opts_chunk$set(comment=NA, highlight=TRUE)
knit_engines$set(clojure = function(options) {
 rep_params <- if((options$results == "asis") || isTRUE(options$stdout_only)) {</pre>
 "--print 'out,1,%{out}' --print 'value,1,' -p"
 } else {
 "-p"
 code <- paste(rep_params, port_file, shQuote(knitr_one_string(options$code)))</pre>
 out <- if (options$eval) {</pre>
 if (options$message) message('running: ', nrepl_cmd, ' ', code)
 tryCatch(
 system2(nrepl_cmd, code, stdout = TRUE, stderr = TRUE, env = options$engine.env),
 error = function(e) {
 if (!options$error) stop(e)
 paste('Error in running command', nrepl_cmd)
 }
)
 } else ''
 if (!options$error && !is.null(attr(out, 'status'))) stop(knitr_one_string(out))
```

```
engine_output(options, options$code, out)})
...
```

When it's done you can generate documents (html, pdf, whatever) within ESS or from external R session.

```
library(rmarkdown)
render("README.Rmd","all")
```

### Emacs view

Figure 2: Emacs in action

### Rendered documents

- HTML
- PDF
- WORD

#### What's odd

There are couple of problems:

- ullet manual renderer setup
- no pretty printing results by default

#### RMarkdown references

- https://bookdown.org/yihui/rmarkdown/
- https://bookdown.org/yihui/rmarkdown-cookbook/