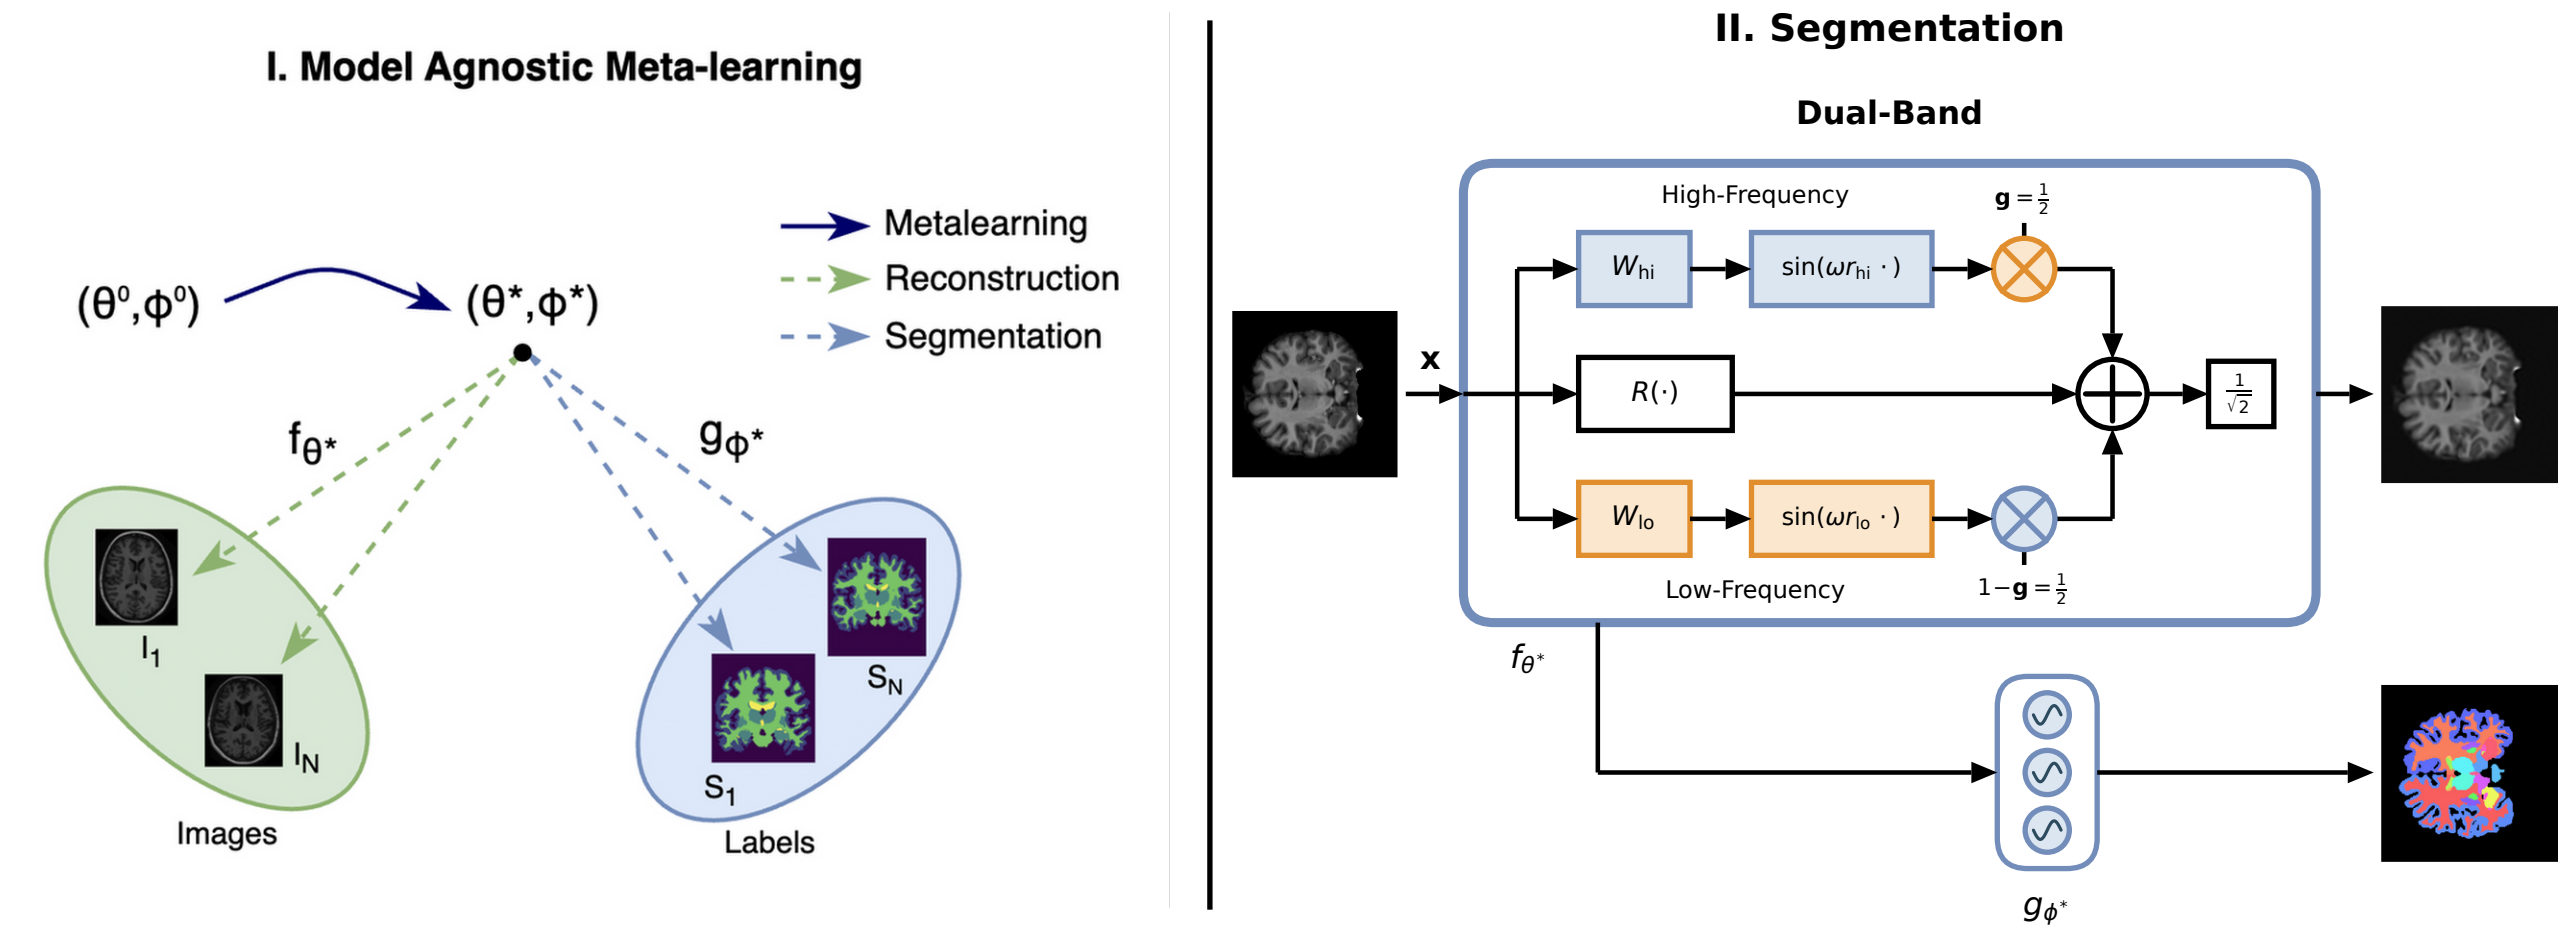

I. Model Agnostic Meta-learning
Metalearning
Reconstruction
Segmentation
(θ⁰,ϕ⁰)
(θ*,ϕ*)
f_θ*
g_ϕ*
I_1
I_N
Images
S_N
S_1
Labels
II. Segmentation
Dual-Band
High-Frequency
g = 1/2
W_hi
sin(ωr_hi ·)
x
R(·)
1/√2
W_lo
sin(ωr_lo ·)
Low-Frequency
1−g = 1/2
f_θ*
g_ϕ*