

GenDL Unified Documentation

Dave Cooper

May 11, 2013

Contents

1	Introduction	1
1.1	Welcome	1
1.2	Knowledge Base Concepts According to Genworks	1
1.3	Goals for this Tutorial	1
1.4	What is GenDL?	2
1.5	Why GDL (what is GDL good for?)	3
1.6	What GDL is not	3
2	Installation	5
2.1	Installation of pre-packaged Gendl	5
2.1.1	Download the Software and retrieve a license key	5
2.1.2	Unpack the Distribution	5
2.1.3	Make a Desktop Shortcut	6
2.1.4	Populate your Initialization File	6
2.2	Installation of open-source Gendl	6
2.2.1	Install and Configure your Common Lisp environment	6
2.2.2	Load and Configure Quicklisp	7
2.3	System Startup and Testing	7
2.3.1	System Startup	7
2.3.2	Basic System Test	9
2.3.3	Full Regression Test	11
2.4	Getting Help and Support	11
3	Basic Operation of the Gendl Environment	13
3.1	What is Different about Gendl?	13
3.2	Startup, “Hello, World!” and Shutdown	13
3.2.1	Startup	14
3.2.2	Developing and Testing a Gendl “Hello World” application	15
3.2.3	Shutdown	16
3.3	Working with Projects	16
3.3.1	Directory Structure	16
3.3.2	Source Files within a source/ subdirectory	17
3.3.3	Generating an ASDF System	17
3.3.4	Compiling and Loading a System	18
3.4	Customizing your Environment	18

3.5	Saving the World	18
3.6	Starting up a Saved World	19
4	Understanding Common Lisp	21
4.1	S-expression Fundamentals	21
4.2	Fundamental CL Data Types	22
4.2.1	Numbers	22
4.2.2	Strings	23
4.2.3	Symbols	23
4.2.4	List Basics	24
4.2.5	The List as a Data Structure	25
5	Understanding Gendl — Core GDL Syntax	29
5.1	Defining a Working Package	29
5.2	Define-Object	30
5.3	Making Instances and Sending Messages	31
5.4	Objects	32
5.5	Sequences of Objects and Input-slots with a Default Expression	33
5.6	Summary	34
6	The Tasty Development Environment	35
6.0.1	The Toolbars	36
6.0.2	View Frames	39
7	Working with Geometry in Gendl	43
7.1	The Default Coordinate System in Gendl	43
7.2	Building a Geometric Gendl Model from LLPs	46
8	Custom User Interfaces in Gendl	47
8.1	Package and Environment for Web Development	47
8.2	Traditional Web Pages and Applications	47
8.2.1	A Simple Static Page Example	48
8.2.2	A Simple Dynamic Page which Mixes HTML and Common Lisp/Gendl . . .	50
8.2.3	Linking to Multiple Pages	51
8.2.4	Form Controls and Fillout-Forms	51
8.3	Partial Page Updates with gdlAjax	55
8.3.1	Steps to Create a gdlAjax Application	56
8.3.2	Including Graphics	58
9	More Common Lisp for Gendl	61
10	Advanced Gendl	63

11 Gendl Reference	67
11.1 CL-LITE (Compile-and-Load Lite Utility)	67
11.1.1 Object Definitions	67
11.1.2 Function and Macro Definitions	67
11.2 COM.GENWORKS.DOM	67
11.3 COM.GENWORKS.DOM-HTML	67
11.4 COM.GENWORKS.DOM-LATEX	67
11.5 COM.GENWORKS.DOM-WRITERS	67
11.6 COM.YOYODYNE.BOOSTER-ROCKET	67
11.7 GENDL (Base Core Kernel Engine) Nicknames: Gdl, Genworks, Base	67
11.7.1 Object Definitions	67
11.7.2 Function and Macro Definitions	68
11.7.3 Variables and Constants	71
11.8 GDL-USER	72
11.9 GENDL-DOC	72
11.10 GEOM-BASE (Wireframe Geometry)	72
11.10.1 Object Definitions	72
11.10.2 Function and Macro Definitions	74
11.10.3 Variables and Constants	77
11.11 GWL (Generative Web Language (GWL))	77
11.11.1 Object Definitions	77
11.11.2 Function and Macro Definitions	78
11.11.3 Variables and Constants	79
11.12 RAPHAEL	80
11.13 ROBOT (Simplified Android Robot example)	80
11.14 SURF (NURBS Surface and Solids Geometry Primitives)	80
11.15 TASTY (Web-based Development Environment (tasty))	80
11.16 TREE (Tree component used by Tasty and potentially as a UI component on its own)	80
11.16.1 Object Definitions	80
11.17 YADD (Yet Another Definition Documenter (yadd))	80
11.17.1 Object Definitions	80

Chapter 1

Introduction

1.1 Welcome

Congratulations on your purchase or download of Genworks Gendl. By investing some of your valuable time into learning this system, you are investing in your future productivity and you are becoming part of a quiet revolution. Although you may have come to Genworks Gendl because of an interest in 3D modeling or mechanical engineering, you will find that a whole new world, and a whole new approach to computing, will now be at your fingertips.

1.2 Knowledge Base Concepts According to Genworks

You may have an idea about Knowledge Base Systems, or Knowledge *Based* Systems, from college textbooks or corporate marketing propaganda, and found the concept too broad to be of practical use. Or you may have heard jabs at the pretentious-sounding name, “Knowledge-based Engineering,” as in: “you mean as opposed to Ignorance-based Engineering?”

To provide a clearer picture, we hope you will agree that our concept of a KB system is simple and practical, and in this tutorial our goal is to make you comfortable and excited about the ideas we have implemented in our flagship system, GenDL (or “Gendl”)

Our definition of a *Knowledge Base System* is an object-oriented programming environment which implements the features of *Caching* and *Dependency tracking*. Caching means that once the KB has computed something, it might not need to repeat that computation if the same question is asked again. Dependency tracking is the flip side of that coin — it ensures that if a cached result is *stale*, the result will be recomputed the next time it is *demand*ed, so as to give a fresh result.

1.3 Goals for this Tutorial

This manual is designed as a companion to a live two-hour GDL/GWL tutorial, but you may also be reading it on your own. In either case, the basic goals are:

- Get you excited about using GDL/GWL
- Enable you to judge whether GDL/GWL is an appropriate tool for a given job

- Arm you with the ability to argue the case for using GDL/GWL when appropriate
- Prepare you to begin maintaining and authoring GDL/GWL applications, or porting apps from similar KB systems into GDL/GWL.

This manual will begin with an introduction to the Common Lisp programming language. If you are new to Common Lisp: congratulations! You have just discovered a powerful tool backed by a powerful standard specification, which will protect your development investment for decades to come. In addition to the brief overview in this manual, many resources are available to get you started in CL — for starters, we recommend Basic Lisp Techniques¹, which was prepared by the author of this tutorial.

1.4 What is GenDL?

GenDL (or Gendl to be a bit more relaxed) is an acronym for “General-purpose Declarative Language.”

GenDL is a superset of ANSI Common Lisp, and consists mainly of automatic code-expanding extensions to Common Lisp implemented in the form of macros. When you write, let’s say, 20 lines in GenDL, you might be writing the equivalent of 200 lines of Common Lisp. Of course, since GenDL is a superset of Common Lisp, you still have the full power of the CL language at your fingertips whenever you are working in GenDL.

Since GDL expands into CL, everything you write in GDL will be compiled “down to the metal” to machine code with all the optimizations and safety that the tested-and-true CL compiler provides. This is an important distinction as contrasted to some other so-called KB systems on the market, which are really nothing more than interpreted scripting languages which often impose arbitrary limits on the size and complexity of your application.

GenDL is also a true *declarative* language. When you put together a GDL application, you write and think mainly in terms of objects and their properties, and how they depend on one another in a direct sense. You do not have to track in your mind explicitly how one object or property will “call” another object or property, in what order this will happen, etc. Those details are taken care of for you automatically by the language.

Because GDL is object-oriented, you have all the features you would normally expect from an object-oriented language, such as

- Separation between the *definition* of an object and an *instance* of an object
- High levels of data abstraction
- The ability for one object to “inherit” from others
- The ability to “use” an object without concern for its “under-the-hood” implementation

GDL supports the “message-passing” paradigm of object orientation, with some extensions. Since full-blown ANSI CLOS (Common Lisp Object System) is always available as well, the Generic

¹ BLT is available at http://www.franz.com/resources/educational_resources/cooper.book.pdf

Function paradigm is supported as well. Do not be concerned at this point if you are not fully aware of the differences between these two paradigms².

1.5 Why GDL (what is GDL good for?)

- Organizing and interrelating large amounts of information in ways not possible or not practical using conventional languages or conventional relational database technology alone;
- Evaluating many design or engineering alternatives and performing various kinds of optimizations within specified design spaces;
- Capturing the procedures and rules used to solve repetitive tasks in engineering and other fields;
- Applying rules to achieve intermediate and final outputs, which may include virtual models of wireframe, surface, and solid geometric objects.

1.6 What GDL is not

- A CAD system (although it may operate on and/or generate geometric entities);
- A drawing program (although it may operate on and/or generate geometric entities);
- An Artificial Intelligence system (although it is an excellent environment for developing capabilities which could be considered as such);
- An Expert System Shell (although one could be easily embedded within it).

Without further ado, then, let's turn the page and get started with some hands-on GDL...

²See Paul Graham's ANSI Common Lisp, page 192, for an excellent discussion of the Two Models of Object-oriented Programming.

Chapter 2

Installation

Follow Section 2.1 if your email address is registered with Genworks and you will install a pre-packaged Gendl distribution including its own Common Lisp engine. Gendl is also available as open-source software¹; if you want to use that version, then please refer to Section 2.2.

2.1 Installation of pre-packaged Gendl

This section will take you through the installation of Gendl from a prepackaged distribution with the Allegro CL Common Lisp engine and the Slime IDE (based on Gnu Emacs).

2.1.1 Download the Software and retrieve a license key

1. Visit the Downloads section of the [Genworks Newsite](#)
2. Enter your email address².
3. Download the latest Payload and gpl.zip for Windows³
4. Click to receive license key file by email.

2.1.2 Unpack the Distribution

GenDL is currently distributed for all the platforms as a self-contained “zip” file which does not require official administrator installation. What follows are general instructions; more up-to-date details may be found in the email which accompanies the license key file. A five-minute installation video is also available in the Documentation section of the [Genworks Newsite](#).

1. Unzip the gdl1581... zipfile into a location where you have write permissions
2. Unzip the gpl.zip file at the same level as the gdl payload
3. Copy the license key file as gdl.lic (for Trial, Student, Professional editions), or devel.lic (for Enterprise edition) into the `program/` directory within the gdl1581.../ directory.




Figure 2.1: Several Gendl versions and one GPL

So you now should have two directories at the same level: one named `gdl1581...` (the rest of the name will contain the specific dated build stamp), and a `gdl/` directory at the same level. Note that as seen in Figure 2.1, it is possible to have several Gendl versions installed, but just a single common `gpl/` folder.

2.1.3 Make a Desktop Shortcut

1. Using the “My Computer” or “Computer” Windows file manager, right-mouse on the `run-gdl.bat` file.
2. Select “Create Shortcut.”
3. Now drag the new “Run-gdl-shortcut” icon to your desktop.

2.1.4 Populate your Initialization File

The default initialization file for Gendl is called `gdliniit.cl`,

2.2 Installation of open-source Gendl

This section is only relevant if you have not received a pre-packaged Gendl distribution with its own Common Lisp engine. If you have received a pre-packaged Gendl distribution, then please skip this section. In case you want to use the open-source Gendl, you will use your own Common Lisp installation and fetch Gendl (Genworks-GDL) using a very powerful and convenient CL package/library manager called *Quicklisp*.

2.2.1 Install and Configure your Common Lisp environment

Gendl is currently tested to build on the following Common Lisp engines:

- Allegro CL (commercial product from Franz Inc, free Express Edition available)
- LispWorks (commercial product from LispWorks Ltd, free Personal Edition available)
- Clozure CL (free CL engine from Clozure Associates, free for all use)

¹<http://github.com/genworks/Genworks-GDL>

²if your address is not on file, send mail to licensing@genworks.com

³If you already have a `gpl.zip` from a previous Gendl installation, it is not necessary to download a new one.

- Steel Bank Common Lisp (SBCL) (free open-source project with permissive license)

Please refer to the documentation for each of these systems for full information on installing and configuring the environment. Typically this will include a text editor, either Gnu Emacs with Superior Lisp Interaction Mode for Emacs (Slime), or a built-in text editing and development environment which comes with the Common Lisp system.

As of this writing, a convenient way to set up Emacs with Slime is to use the [Quicklisp-slime-helper](#).

2.2.2 Load and Configure Quicklisp

As of this writing, Quicklisp is rapidly becoming the defacto standard library manager for Common Lisp.

- Visit the [Quicklisp website](#)
- Follow the instructions there to download the `quicklisp.lisp` bootstrap file and load it to set up your Quicklisp environment.

2.3 System Startup and Testing

2.3.1 System Startup

Startup of prepackaged Gendl or GDL distribution

To start a prepackaged system, follow these steps:

1. Invoke the `run-gdl.bat` (Windows), or `run-gdl` (Linux, MacOS) startup script, or launch the bundle executable if you installed a self-extracting application bundle. This should launch Gnu Emacs with a README file displayed by default. Take the time to look through this README file. Especially the later part of the file contains information about Emacs keyboard shortcuts available.
2. In emacs, enter: `M-x gendl` or `M-x gdl`. That is, hold down the “Meta” (or “Alt”) key, and press the “X” key, then type “gendl” or “gdl” You will see this command shown in the *mini-buffer* at the bottom of the Emacs window, as shown in Figure 2.2
3. press the “Enter” key
4. On Windows, you will get a new window, named the the Genworks Gendl Console or Genworks GDL Console, as shown in Figure 2.3. This window might start out in minimized form (as an icon at the bottom of your screen). Click on it to open it. Watch this console for any errors or warnings.

The first time you start up, you may see messages in this console for several minutes while the system is being built (or if you received a completely pre-built system, the messages may last only a few seconds).

On Linux or MacOS, there will be a separate Emacs buffer (available through Emacs’ “Buffers” menu) where you will see these messages.

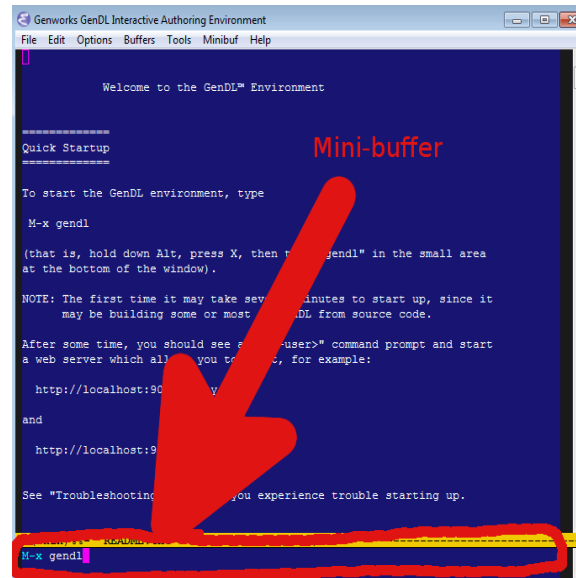


Figure 2.2: The mini-buffer in Emacs

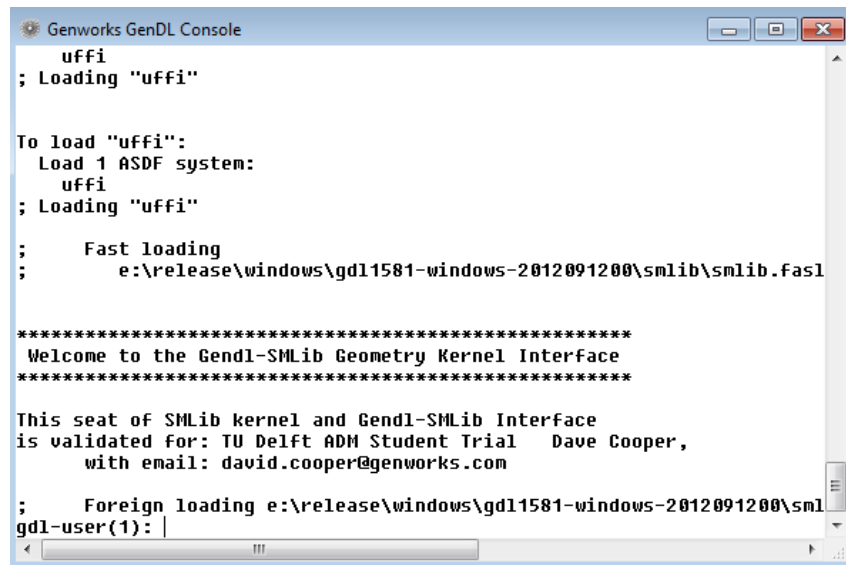


Figure 2.3: Genworks Gendl Console

The messages will consist of compiling and loading information, followed by copyright and welcome information for Gendl. After these messages have finished, you should see the following command prompt:

```
gdl-user(1):
```

The Genworks Gendl or GDL console contains a command prompt, but mostly you will use the `*slime-repl...*` buffer in Emacs to type commands. The Genworks GDL console is mainly used for displaying output text from the Gendl system and from your application.

Startup of open-source Gendl distribution

To start an Open-source distribution, follow these steps:

1. Start your Common Lisp engine and development environment (e.g. SBCL with Emacs and Superior Lisp Interaction Mode for Emacs).
2. After Quicklisp is installed and initialized in your system, type: `(ql:quickload :genworks-gdl)` to get Genworks Gendl installed and loaded in your environment.
3. Type the following to initialize the Gendl environment:
`(gdl:start-gdl :edition :open-source)`

2.3.2 Basic System Test

You may test your installation using the following checklist. These tests are optional. You may perform some or all of them in order to ensure that your Gendl is installed correctly and running smoothly. In your Web Browser (e.g. Google Chrome, Firefox, Safari, Opera, Internet Explorer), perform the following steps:

1. visit `http://localhost:9000/tasty`.
2. accept default robot:assembly.
3. Select “Add Leaves” from the Tree menu.
4. Click on the top node in the tree.
5. Observe the wireframe graphics for the robot as shown in 2.4.
6. Click on the robot to zoom in.
7. Select “Clear View!” from the View menu.
8. Select “X3DOM” from the View menu.
9. Click on the top node in the tree.
10. “Refresh” or “Reload” your browser window (may not be necessary).
11. If your browser supports WebGL, you will see the robot in shaded dynamic view as shown in Figure 2.5.

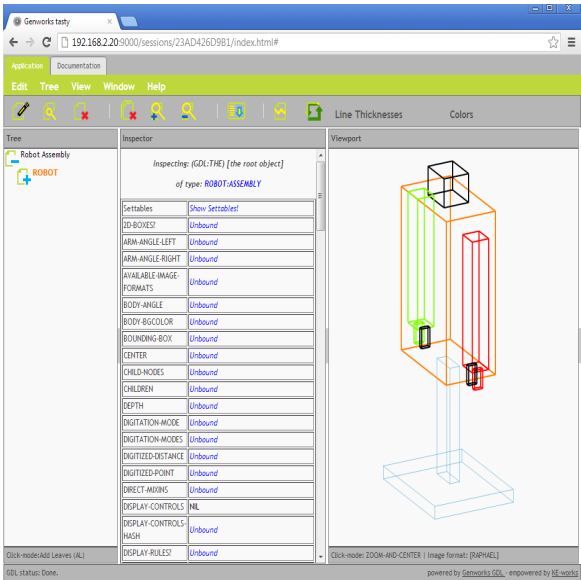


Figure 2.4: Robot displayed in Tasty

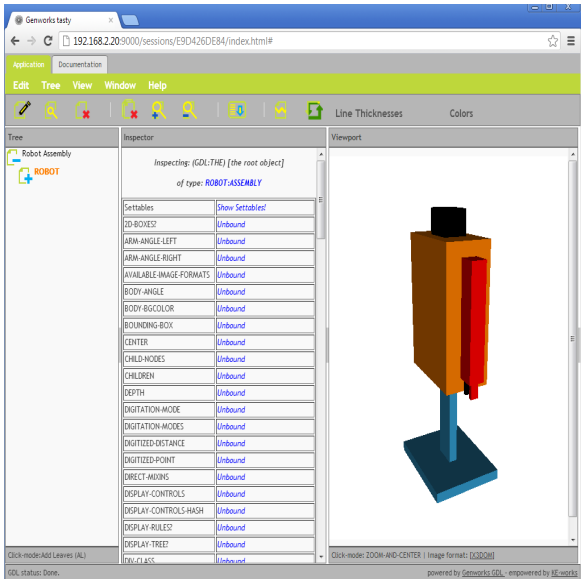


Figure 2.5: Robot x3dom

12. Select “PNG” from the View menu. You will see the wireframe view of the robot as a PNG image.
13. Select “X3D” from the View menu. If your browser has an X3D plugin installed (e.g. BS Contact), you will see the robot in a shaded dynamic view.

2.3.3 Full Regression Test

The following commands will invoke a full regression test, including a test of the Surface and Solids primitives provided by the SMLib geometry kernel. Note that the SMLib geometry kernel is only available with proprietary Gendl licenses — therefore if you have an open-source or Trial version, you these regression tests will not all function.

In Emacs at the `gdl-user>` prompt in the `*slime-repl...*` buffer, type the following commands:

1. `(ql:quickload :gdl-regression)`
2. `(gdl-lift-utils::define-regression-tests)`
3. `(gdl-lift-utils::run-regression-tests-pass-fail)`
4. `(pprint gdl-lift-utils::*regression-test-report*)`

2.4 Getting Help and Support

If you run into unexplained errors in the installation and startup process, please contact the following resources:

1. Make a posting to the [Genworks Google Group](#)
2. For pure Common Lisp issues, join the `#lisp` IRC (Internet Relay Chat) channel and discuss issues there.
3. Also for Common Lisp issues, follow the `comp.lang.lisp` Usenet group.
4. If you are a supported Genworks customer, send email to support@genworks.com
5. If you are not a supported Genworks customer but you want to report an apparent bug or have other suggestions or inquiries, you may also send email to support@genworks.com, but please understand that Genworks cannot guarantee any response or a particular timeframe for any response.

Chapter 3

Basic Operation of the Gendl Environment

This chapter will step you through all the basic steps of operating a typical Gendl environment. We will not go into any depth about the additional features of the environment or language syntax in this section — this is just for getting familiar and practicing with the mechanics of operating the environment with a keyboard.

3.1 What is Different about Gendl?

Gendl is a dynamic language environment with incremental compiling and in-memory definitions. That means that as long as the system is running, you can *compile* new *definitions* of functions, objects, etc, and they will immediately become available as part of the running system, and you can begin testing them immediately or update an existing set of objects to observe their new behavior.

In many other programming language systems, you have to start the system from the beginning and reload all the files in order to test new functionality.

In Gendl, if you simply shut down the system after having compiled and loaded a set of files with new definitions, then when you restart the system you will have to recompile and/or reload those definitions in order to bring the system back into the same state. This is typically done automatically, using commands placed into the `gdlinit.cl` initialization file, as introduced in Section 3.4. Alternatively, you can compile and load definitions into your Gendl session, then save the “world” in that state. That way, it is possible to start a new Gendl “world” which already has all your application’s definitions loaded and ready for use, without having to procedurally reload any files. You can then begin to make and test new definitions (and re-definitions) starting from this new “world.”

3.2 Startup, “Hello, World!” and Shutdown

The typical Gendl environment consists of three programs: Gnu Emacs (the editor), a Common Lisp engine with Gendl system loaded or built into it (e.g. the `gdl.exe` executable in your `program/` directory), and (optionally) a web browser such as Firefox, Google Chrome, Safari, Opera, or Internet Explorer. Emacs runs as the main *process*, and this in turn starts the CL engine with

Gendl as a *sub-process*. The CL engine typically runs an embedded *webserver*, enabling you to access your application through a standard web browser.

As introduced in Chapter 2, the typical way to start a pre-packaged Gendl environment is with the `run-gdl.bat` (Windows), or `run-gdl` (MacOS, Linux) script files. Invoke this script file from your computer's file manager, or from a desktop shortcut if you have created one as outlined in section 2.1.3. Your installation executable may also have created a Windows “Start” menu item for Genworks Gendl. Of course you can also invoke `run-gdl.bat` from the Windows “cmd” command-line, or from another command shell such as Cygwin.¹

3.2.1 Startup

Startup of a typical Gendl development session consists of two fundamental steps: (1) starting the Emacs editing environment, and (2) starting the actual Gendl process as a “sub-process” or “inferior” process within Emacs. The Gendl process should automatically establish a network connection back to Emacs, allowing you to interact directly with the Gendl process from within Emacs.

1. Invoke the `run-gdl.bat` or `run-gdl` startup script.
2. You should see a blue emacs window as in Figure ?? (alternative colors are also possible).
3. Press M-x (Alt-x), and type `gendl` in the mini-buffer, as seen in Figure 2.2.
4. (MS Windows): Look for the Genworks Gendl Console window, or (Linux, Mac) use the Emacs “Buffer” menu to visit the “*inferior-lisp*” buffer. Note that the Genworks Gendl Console window might start as a minimized icon; click or double-click it to un-minimize.
5. Watch the Genworks GDL Console window for any errors. Depending on your specific installation, it may take from a few seconds to several minutes for the Genworks Gendl Console (or *inferior-lisp* buffer) to settle down and give you a `gdl-user()`: prompt. This window is where you will see most of your program's textual output, any error messages, warnings, etc.
6. In Emacs, type: `C-x &` (or select Emacs menu item Buffers→*slime-repl...*) to visit the “*slime-repl ...*” buffer. The full name of this buffer depends on the specific CL/Gendl platform which you are running. This buffer contains an interactive prompt, labeled `gdl-user>`, where you will enter most of your commands to interact with your running Gendl session for testing, debugging, etc. There is also a web-based graphical interactive environment called *tasty* which will be covered in Chapter ??
7. To ensure that the Gendl interpreter is up and running, type: `(+ 2 3)` and press [Enter].
8. You should see the result 5 echoed back to you below the prompt.

¹Cygwin is also useful as a command-line tool on Windows for interacting with a version control system like Subversion (svn).

```
(in-package :gdl-user)

(define-object hello ()

  :computed-slots
  ((greeting "Hello, World!"))))
```

Figure 3.1: Example of Simple Object Definition

3.2.2 Developing and Testing a Gendl “Hello World” application

1. type C-x (Control-x) 2, or C-x 3, or use the “Split Screen” option of the File menu to split the Emacs frame into two “windows” (“windows” in Emacs are non-overlapping panels, or rectangular areas within the main Emacs window).
2. type C-x o several times to move from one window to the other, or move the mouse cursor and click in each window. Notice how the blinking insertion point moves from one window to the other.
3. In the top (or left) window, type C-x C-f (or select Emacs menu item “File→Open File”) to get the “Find file” prompt in the mini-buffer.
4. Type C-a to move the point to the beginning of the mini-buffer line.
5. Type C-k to delete from the point to the end of the mini-buffer.
6. Type ~/hello.gdl and press [Enter]
7. You are now editing a (presumably new) file of Gendl code, located in your HOME directory, called `hello.gdl`
8. Enter the text from Figure 3.1 into the `hello.gdl` buffer. You do not have to match the line breaks and whitespace as shown in the example. You can auto-indent each new line by pressing [TAB] after pressing [Enter] for the newline.
Protip: You can also try using C-j instead of [Enter], which will automatically give a newline and auto-indent.
9. type C-x C-s (or choose Emacs menu item *File→Save*) to save the contents of the buffer (i.e. the window) to the file in your HOME directory.
10. type C-c C-k (or choose Emacs menu item *SLIME→Compilation→Compile/Load File*) to compile & load the code from this file.
11. type C-c o (or move and click the mouse) to switch to the bottom window.
12. In the bottom window, type C-x & (or choose Emacs menu item *Buffers→*slime-repl...**) to get the `*slime-repl ...*` buffer, which should contain a `gdl-user>` prompt. This is where you normally type interactive Gendl commands.

13. If necessary, type `M >` (that is, hold down Meta (Alt), Shift, and the “>” key) to move the insertion point to the end of this buffer.

14. At the `gdl-user>` prompt, type

```
(make-self 'hello)
```

and press [Enter].

15. At the `gdl-user>` prompt, type

```
(the greeting)
```

and press [Enter].

16. You should see the words `Hello, World!` echoed back to you below the prompt.

3.2.3 Shutdown

To shut down a development session gracefully, you should first shut down the Gendl process, then shut down your Emacs.

- Type `M-x quit-gendl` (that is, hold Alt and press X, then release both while you type `quit-gendl` in the mini-buffer), then press [Enter]
- Type `C-x C-c` to quit from Emacs. Emacs will prompt you to save any modified buffers before exiting.

3.3 Working with Projects

Gendl contains utilities which allow you to treat your application as a “project,” with the ability to compile, incrementally compile, and load a “project” from a directory tree of source files representing your project. In this section we give an overview of the expected directory structure and available control files, followed by a reference for each of the functions included in the bootstrap module.

3.3.1 Directory Structure

You should structure your applications in a modular fashion, with the directories containing actual Lisp sources called “source.”

You may have subdirectories which themselves contain “source” directories.

We recommend keeping your codebase directories relatively flat, however.

In Figure 3.2 is an example application directory, with four source files.

```
apps/yoyodyne/booster-rocket/source/assembly.gdl
apps/yoyodyne/booster-rocket/source/package.gdl
apps/yoyodyne/booster-rocket/source/parameters.gdl
apps/yoyodyne/booster-rocket/source/rules.gdl
```

Figure 3.2: Example project directory with four source files

```
apps/yoyodyne/booster-rocket/source/assembly.gdl
apps/yoyodyne/booster-rocket/source/file-ordering.isc
apps/yoyodyne/booster-rocket/source/package.gdl
apps/yoyodyne/booster-rocket/source/parameters.gdl
apps/yoyodyne/booster-rocket/source/rules.gdl
```

Figure 3.3: Example project directory with file ordering configuration file

3.3.2 Source Files within a source/ subdirectory

Enforcing Ordering

Within a source subdirectory, you may have a file called `file-ordering.isc`² to enforce a certain ordering on the files. Here is the contents of an example for the above application:

```
("package" "parameters")
```

This will force `package.lisp` to be compiled/loaded first, and `parameters.lisp` to be compiled/loaded next. The ordering on the rest of the files should not matter (although it will default to lexicographical ordering).

Now our sample application directory looks like Figure 3.3 is an example application directory, with four source files.

3.3.3 Generating an ASDF System

ASDF stands for Another System Definition Facility, which is the predominant system in use for Common Lisp third-party libraries. With Gendl, you can use the `:create-asd-file?` keyword argument to make cl-lite generate an ASDF system file instead of actually compiling and loading the system. For example:

```
(cl-lite "apps/yoyodyne/" :create-asd-file? t)
```

In order to include a depends-on clause in your ASDF system file, create a file called `depends-on.isc` in the toplevel directory of your system. In this file, place a list of the systems your system depends on. This can be systems from your own local projects, or from third-party libraries. For example, if your system depends on the `:cl-json` third-party library, you would have the following contents in your `depends-on.isc`:

```
(:cl-json)
```

²isc stands for “Intelligent Source Configuration”

3.3.4 Compiling and Loading a System

Once you have generated an ASDF file, you can compile and load the system using Quicklisp. To do this for our example, follow these steps:

1. `(cl-lite "apps/yoyodyne/" :create-asd-file? t)`

to generate the asdf file for the yoyodyne system. This only has to be done once after every time you add, remove, or rename a file or folder from the system.

2. `(pushnew "apps/yoyodyne/" ql:*local-project-directories*)`

This can be done in your `gdlininit.cl` for projects you want available during every development session. Note that you should include the full path prefix for the directory containing the ASDF system file.

3. `(ql:quickload :gdl-yoyodyne)`

this will compile and load the actual system. Quicklisp uses ASDF at the low level to compile and load the systems, and Quicklisp will fetch any depended-upon third-party libraries from the Internet on-demand. Source files will be compiled only if the corresponding binary (fasl) file does not exist or is older than the source file. By default, ASDF keeps its binary files in `acache` directory, separated according to CL platform and operating system. The location of this cache is system-dependent, but you can see where it is by observing the compile and load process.

3.4 Customizing your Environment

You may customize your environment in several different ways, for example by loading definitions and settings into your Gendl “world” automatically when the system starts, and by specifying fonts, colors, and default buffers (to name a few) for your emacs editing environment.

3.5 Saving the World

Saving the world refers to a technique of saving a complete binary image of your Gendl “world” which contains all the currently compiled and loaded definitions and settings. This allows you to start up a saved world almost instantly, without having to reload all the definitions. You can then incrementally compile and load just the particular definitions which you are working on for your development session.

To save a world, follow these steps:

1. Load the base Gendl code and (optionally) code for Gendl modules (e.g. `gdl-yadd`, `gdl-tasty`) you want to be in your saved image. For example:

```
(ql:quickload :gdl-yadd)
(ql:quickload :gdl-tasty)
```

2. `(ff:unload-foreign-library (merge-pathnames "smlib.dll" "sys:smlib;"))`

3. `(net.aserve:shutdown)`
4. `(setq excl:*restart-init-function* '(gdl:start-gdl :edition :trial))`
5. (to save an image named `yoyodyne.dxl`) Invoke the command

```
(dumplisp :name "yoyodyne.dxl")
```

Note that the standard extension for Allegro CL images is `.dxl`. Prepend the file name with path information, to write the image to a specific location.

3.6 Starting up a Saved World

In order to start up Gendl using a custom saved image, or “world,” follow these steps

1. Exit Gendl
2. Copy the supplied `gdl.dxl` to `gdl-orig.dxl`.
3. Move the custom saved dxl image to `gdl.dxl` in the Gendl application "`program/`" directory.
4. Start Gendl as usual. Note: you may have to edit the system `gdinit.cl` or your home `gdinit.cl` to stop it from loading redundant code which is already in the saved image.

Chapter 4

Understanding Common Lisp

Gendl is a superset of Common Lisp, and is embedded in Common Lisp. This means that when working with Gendl, you have the full power of CL available to you. The lowest-level expressions in a Gendl definition are CL “symbolic expressions,” or “s-expressions.” This chapter will familiarize you with CL s-expressions.

4.1 S-expression Fundamentals

S-expressions can be used in your definitions to establish the value of a particular *slot* in an object, which will be computed on-demand. You can also evaluate S-expressions at the toplevel `gdl-user>` prompt, and see the result immediately. In fact, this toplevel prompt is called a *read-eval-print* loop, because its purpose is to *read* each s-expression entered, *evaluate* the expression to yield a result (or *return-value*), and finally to *print* that result.

CL s-expressions use a *prefix* notation, which means that they consist of either an *atom* (e.g. number, text string, symbol) or a list (one or more items enclosed by parentheses, where the first item is taken as a symbol which names an operator). Here is an example:

```
(+ 2 2)
```

This expression consists of the function named by the symbol `+`, followed by the numeric arguments `2` and another `2`. As you may have guessed, when this expression is evaluated it will return the value `4`. *Try it:* try typing this expression at your command prompt, and see the return-value being printed on the console. What is actually happening here? When CL is asked to evaluate an expression, it processes the expression according to the following rules:

- If the expression is an *atom* (e.g. a non-list datatype such as a number, text string, or literal symbol), it simply evaluates to itself. Examples:

```
– gdl-user> 99
99
– gdl-user> 99.9
99.9
```

```

- gdl-user> 3/5
3/5
- gdl-user> "Bob"
"Bob"
- gdl-user> "Our golden rule is simplicity"
"Our golden rule is simplicity"
- gdl-user> 'my-symbol
my-symbol

```

Note that numbers are represented directly (with decimal points and slashes for fractions allowed), strings are surrounded by double-quotes, and literal symbols are introduced with a preceding single-quote. Symbols are allowed to have dashes (“-”) and most other special characters. By convention, the dash is used as a word separator in CL symbols.

- If the expression is a list (i.e. is surrounded by parentheses), CL processes the *first* element in this list as an *operator name*, and the *rest* of the elements in the list represent the *arguments* to the operator. An operator can take zero or more arguments, and can return zero or more return-values. Some operators evaluate their arguments immediately and work directly on those values (these are called *functions*). Other operators expand into other code. These are called *special operators* or *macros*. Macros are what give Lisp (and CL in particular) its special power. Here are some examples of functional s-expressions:

```

- gdl-user> (expt 2 5)
32
- gdl-user> (+ 2 5)
7
- gdl-user> (+ 2)
2
- gdl-user> (+ (+ 2 2) (+ 3 3 ))
10

```

4.2 Fundamental CL Data Types

As we have seen, Common Lisp natively supports many data types common to other languages, such as numbers and text strings. CL also contains several compound data types such as lists, arrays, and hash tables. CL contains *symbols* as well, which typically are used as names for other data elements.

Regarding data types, CL follows a paradigm called dynamic typing. Basically this means that values have type, but variables do not necessarily have type, and typically variables are not “pre-declared” to be of a particular type.

4.2.1 Numbers

As we have seen, numbers in CL are a native data type which simply evaluate to themselves when entered at the toplevel or included in an expression.

Numbers in CL form a hierarchy of types, which includes Integers, Ratios, Floating Point, and Complex numbers. For many purposes, you only need to think of a value as a “number” without getting any more specific than that. Most arithmetic operations, such as `+`, `-`, `*`, `/` etc, will automatically do any necessary type coercion on their arguments and will return a number of the appropriate type.

CL supports a full range of floating-point decimal numbers, as well as true Ratios, which means that `1/3` is a true one-third, not `0.333333333` rounded off at some arbitrary precision.

4.2.2 Strings

Strings are actually a specialized kind of array, namely a one-dimensional array (vector) made up of text characters. These characters can be letters, numbers, or punctuation, and in some cases can include characters from international character sets (e.g. Unicode or UTF-8) such as Chinese Hanzi or Japanese Kanji. The string delimiter in CL is the double-quote character.

As we have seen, strings in CL are a native data type which simply evaluate to themselves when included in an expression.

A common way to produce a string in CL is with the `format` function. Although the `format` function can be used to send output to any kind of destination, or *stream*, it will simply yield a string if you specify `nil` for the stream. Example:

```
gdl-user> (format nil "The time is: ~a" (get-universal-time))
"The time is: 3564156603"
gdl-user> (format nil "The time is: ~a" (iso-8601-date (get-universal-time)))
"The time is: 2012-12-10"
gdl-user> (format nil "The time is: ~a" (iso-8601-date (get-universal-time) :include-time? t))
"The time is: 2012-12-10T14:30:17"
```

As you can see from the above example, `format` takes a *stream designator* or `nil` as its first argument, then a *format-string*, then enough arguments to match the *format directives* in the format-string. Format directives begin with the tilde character (`~`). The format-directive `a` indicates that the printed representation of the corresponding argument should simply be substituted into the format-string at the point where it occurs.

We will cover more details on `format` in Section ?? on Input/Output, but for now, a familiarity with the simple use of `(format nil ...)` will be helpful for Chapter ??.

4.2.3 Symbols

Symbols are such an important data structure in CL, that people sometimes refer to CL as a “Symbolic Computing Language.” Symbols are a type of CL object which provides your program with a built-in mechanism to store and retrieve values and functions, as well as being useful in their own right. A symbol is most often known by its name (actually a string), but in fact there is much more to a symbol than its name. In addition to the name, symbols also contain a *function* slot, a *value* slot, and an open-ended *property-list* slot in which you can store an arbitrary number of named properties.

For a named function such as `+` the function-slot contains the actual function object for performing numeric addition. The value-slot of a symbol can contain any value, allowing the symbol

to act as a global variable, or *parameter*. And the property-list, also known as the *plist* slot, can contain an arbitrary amount of information.

This separation of the symbol data structure into function, value, and plist slots is one obvious distinction between Common Lisp and most other Lisp dialects. Most other dialects allow only one (1) “thing” to be stored in the symbol data structure, other than its name (e.g. either a function or a value, but not both at the same time). Because Common Lisp does not impose this restriction, it is not necessary to contrive names, for example for your variables, to avoid conflicting with existing “reserved words” in the system. For example, `list` is the name of a built-in function in CL. But you may freely use `list` as a variable name as well. There is no need to contrive arbitrary abbreviations such as `lst`.

How symbols are evaluated depends on where they occur in an expression. As we have seen, if a symbol appears first in a list expression, as with the `+` in `(+ 2 2)`, the symbol is evaluated for its function slot. If the first element of an expression indeed has a function in its function slot, then any subsequent symbol in the expression is taken as a variable, and it is evaluated for its global or local value, depending on its scope (more on variables and scope later).

As noted in Section 3.1.3, if you want a literal symbol itself, one way to achieve this is to “quote” the symbol name:

```
'a
```

Another way is for the symbol to appear within a quoted list expression, for example:

```
'(a b c)
```

or

```
'(a (b c) d)
```

Note that the quote (`'`) applies across everything in the list expression, including any sub-expressions.

4.2.4 List Basics

Lisp takes its name from its strong support for the list data structure. The list concept is important to CL for more than this reason alone — most notably, lists are important because *all CL programs are themselves lists*.

Having the list as a native data structure, as well as the form of all programs, means that it is straightforward for CL programs to compute and generate other CL programs. Likewise, CL programs can read and manipulate other CL programs in a natural manner. This cannot be said of most other languages, and is one of the primary distinguishing characteristics of Lisp as a language.

Textually, a list is defined as zero or more elements surrounded by parentheses. The elements can be objects of any valid CL data types, such as numbers, strings, symbols, lists, or other kinds of objects. As we have seen, you must quote a literal list to evaluate it or CL will assume you are calling a function. Now look at the following list:

```
(defun hello () (write-string "Hello, World!"))
```

This list also happens to be a valid CL program (function definition, in this case). Don't worry about analyzing the function definition right now, but do take a few moments to convince yourself that it meets the requirements for a list.

What are the types of the elements in this list?

In addition to using the quote (') to produce a literal list, another way to produce a list is to call the function `list`. The function `list` takes any number of arguments, and returns a list made up from the result of evaluating each argument. As with all functions, the arguments to the `list` function get evaluated, from left to right, before being processed by the function. For example:

```
(list a b (+ 2 2))
```

will return the list

```
(a b 4)
```

The two quoted symbols evaluate to symbols, and the function call `(+ 2 2)` evaluates to the number 4.

4.2.5 The List as a Data Structure

In this section we will present a few of the fundamental native CL operators for manipulating lists as data structures. These include operators for doing things such as:

1. finding the length of a list
2. accessing particular members of a list
3. appending multiple lists together to make a new list

Finding the Length of a List

The function `length` will return the length of any type of sequence, including a list:

```
gdl-user> (length '(a b c d e f g h i j))
10
gdl-user> (length nil)
0
```

Note that `nil` qualifies as a list (albeit the empty list), so taking its length yields the integer 0.

Accessing the Elements of a List

Common Lisp defines the accessor functions `first` through `tenth` as a means of accessing the first ten elements in a list:

```
gdl-user> (first '(a b c))
```

a

```
gdl-user> (second '(a b c))
```

b

```
gdl-user> (third '(a b c))
```

c

For accessing elements in an arbitrary position in the list, you can use the function `nth`, which takes an integer and a list as its two arguments:

```
gdl-user> (nth 0 '(a b c))
```

a

```
gdl-user> (nth 1 '(a b c))
```

b

```
gdl-user> (nth 2 '(a b c))
```

c

Note that `nth` starts its indexing at zero (0), so `(nth 0 ...)` is equivalent to `(first ...)` and `(nth 1 ...)` is equivalent to `(second ...)`, etc.

Using a List to Store and Retrieve Named Values

Lists can also be used to store and retrieve named values. When a list is used in this way, it is called a *plist*. Plists contain pairs of elements, where each pair consists of a *key* and some *value*. The key is typically an actual keyword symbol — that is, a symbol preceded by a colon (:). The value can be any value, such as a number, a string, or even a Gendl object representing something complex such as an aircraft.

A plist can be constructed in the same manner as any list, e.g. with the `list` operator:

```
(list :a 10 :b 20 :c 30)
```

In order to access any element in this list, you can use the `getf` operator. The `getf` operator is specially intended for use with plists:

```
gdl-user> (getf (list :a 10 :b 20 :c 30) :b)
```



```
20
gdl-user> (getf (list :a 10 :b 20 :c 30) :c)
30
```

Common Lisp contains several other data structures for mapping keywords or numbers to values, such as *arrays* and *hash tables*. But for relatively short lists, and especially for rapid prototyping and testing work, *plists* can be useful. *Plists* can also be written and read (i.e. saved and restored) to and from plain text files in your filesystem, in a very natural way.

Appending Lists

The function `append` takes any number of lists, and returns a new list which results from appending them together. Like many CL functions, `append` does not *side-effect*, that is, it simply returns a new list as a return-value, but does not modify its arguments in any way:

```
gdl-user> (defparameter my-slides (introduction welcome lists functions))
(introduction welcome lists functions)

gdl-user> (append my-slides (numbers))
(introduction welcome lists functions numbers)

gdl-user> my-slides
(introduction welcome lists functions)
```

Note that the simple call to `append` does not affect the variable `my-slides`. Later we will see how one may alter the value of a variable such as `my-slides`.

Chapter 5

Understanding Gendl — Core GDL Syntax

Now that you have a basic grasp of Common Lisp syntax (or, more accurately, *lack* of syntax), we will jump directly into the Gendl framework. By using Gendl you can formulate most of your engineering and computing problems in a natural way, without becoming bogged down in the complexity of the Common Lisp Object System (CLOS).

The Gendl product is a commercially available KBE system dual-licensed under the Affero Gnu Public License and a Proprietary license. The core GDL language is a proposed standard for a vendor-neutral KBE language.

As we mentioned in the previous chapter, Gendl is based on and is a superset of ANSI Common Lisp. Because ANSI CL is an unencumbered, open standard with several commercial and free implementations, it is a good bet that applications written in it will continue to function 50, 100, or even hundreds of years from now.

Note that the historical name of Gendl was “GDL,” and this name persists throughout the product for example appearing occasionally in documentation for naming Common Lisp packages.

5.1 Defining a Working Package

In Common Lisp, *packages* are a mechanism to separate symbols into namespaces. Using packages it is possible to avoid naming collisions in large projects. Consider this analogy: in the United States, telephone numbers consist of a three-digit area code and a seven-digit number. The same seven-digit number can occur in two or more separate area codes, without causing a conflict.

The macro `gdl:define-package` is used to set up a new working package in Gendl.

Example:

```
(gdl:define-package :yoyodyne)
```

will establish a new package called `:yoyodyne` which has all the Gendl operators available.

The `:gdl-user` package is an empty, pre-defined package for your use if you do not wish to make a new package just for scratch work.

For real projects it is recommended that you make and work in your own Gendl package, defined as above with `gdl:define-package`.

Notes for advanced users: Packages defined with `gdl:define-package` will implicitly *use* the `:gdl` package and the `:common-lisp` package, so you will have access to all exported symbols in these packages without prefixing them with their package name.

You may extend this behavior, by calling `gdl:define-package` and adding additional packages to use with `(:use ...)`. For example, if you want to work in a package with access to GDL operators, Common Lisp operators, and symbols from the `:cl-json` package¹, you could set it up as follows:

```
(ql:quickload :cl-json)
(gdl:define-package :yoyodyne (:use :cl-json))
```

. the first form ensures that the `cl-json` code module is actually fetched and loaded. The second form defines a package with the `:cl-json` operators available to it.

5.2 Define-Object

Define-object is the basic macro for defining objects in GDL. An object definition maps directly into a Lisp (CLOS) class definition.

The `define-object` macro takes three basic arguments:

- a *name*, which is a symbol;
- a *mixin-list*, which is a list of symbols naming other objects from which the current object will inherit characteristics;
- a *specification-plist*, which is spliced in (i.e. doesn't have its own surrounding parentheses) after the *mixin-list*, and describes the object model by specifying properties of the object (messages, contained objects, etc.) The *specification-plist* typically makes up the bulk of the object definition.

Here are descriptions of the most common keywords making up the *specification-plist*:

input-slots specify information to be passed into the object instance when it is created.

computed-slots are really cached methods, with expressions to compute and return a value.

objects specify other instances to be “contained” within this instance.

functions are (uncached) functions “of” the object, i.e. they are actually methods which discriminate on their first argument, which is the object instance upon which they are operating. GDL functions can also take other non-specialized arguments, just like a normal CL function.

Figure 5.1 shows a simple example, which contains two input-slots, `first-name` and `last-name`, and a single computed-slot, `greeting`. As you can see, a GDL Object is analogous in some ways to a `defun`, where the input-slots are like arguments to the function, and the computed-slots are

¹CL-JSON is a free third-party library for handling JSON format, a common data format used for Internet applications.

```
(define-object hello ()
  :input-slots (first-name last-name)

  :computed-slots
  ((greeting (format nil "Hello, ~a ~a!!"
                     (the first-name)
                     (the last-name))))))
```

Figure 5.1: Example of Simple Object Definition

like return-values. But seen another way, each attribute in a GDL object is like a function in its own right.

The referencing macro **the** shadows CL's **the** (which is a seldom-used type declaration operator). **The** in GDL is a macro which is used to reference the value of other messages within the same object or within contained objects. In the above example, we are using **the** to refer to the values of the messages (input-slots) named **first-name** and **last-name**.

Note that messages used with **the** are given as symbols. These symbols are unaffected by the current Lisp ***package***, so they can be specified either as plain unquoted symbols or as keyword symbols (i.e. preceded by a colon), and the **the** macro will process them appropriately.

5.3 Making Instances and Sending Messages

Once we have defined an object such as the example above, we can use the constructor function **make-object** in order to create an *instance* of it. This function is very similar to the CLOS **make-instance** function. Here we create an instance of **hello** with specified values for **first-name** and **last-name** (the required input-slots), and assign this instance as the value of the symbol **my-instance**:

```
GDL-USER(16): (setq my-instance
                  (make-object 'hello :first-name "John"
                              :last-name "Doe"))

#<HELLO @ #x218f39c2>
```

As you can see, keyword symbols are used to “tag” the input values, and the return value is an instance of class **hello**. Now that we have an instance, we can use the macro **the-object** to send messages to this instance:

```
GDL-USER(17): (the-object my-instance greeting)
"Hello, John Doe!!"
```

The-object is similar to **the**, but as its first argument it takes an expression which evaluates to an object instance. **The**, by contrast, assumes that the object instance is the lexical variable **self**, which is automatically set within the lexical context of a **define-object**.

```
(define-object city ()
  :computed-slots
  ((total-water-usage (+ (the hotel water-usage)
                        (the bank water-usage))))
  :objects
  ((hotel :type 'hotel
           :size :large)
   (bank  :type 'bank
           :size :medium)))
```

Figure 5.2: Object Containing Child Objects

Like **the**, **the-object** evaluates all but the first of its arguments as package-immune symbols, so although keyword symbols may be used, this is not a requirement, and plain, unquoted symbols will work just fine.

For convenience, you can also set **self** manually at the CL Command Prompt, and use **the** instead of **the-object** for referencing:

```
GDL-USER(18): (setq self
                  (make-object 'hello :first-name "John"
                              :last-name "Doe"))

#<HELLO @ #x218f406a>

GDL-USER(19): (the greeting)
"Hello, John Doe!!"
```

In actual fact, (**the** ...) simply expands into (**the-object self** ...).

5.4 Objects

The **:objects** keyword specifies a list of “contained” instances, where each instance is considered to be a “child” object of the current object. Each child object is of a specified type, which itself must be defined with **define-object** before the child object can be instantiated.

Inputs to each instance are specified as a plist of keywords and value expressions, spliced in after the object’s name and type specification. These inputs must match the inputs protocol (i.e. the input-slots) of the object being instantiated. Figure 5.2 shows an example of an object which contains some child objects. In this example, **hotel** and **bank** are presumed to be already (or soon to be) defined as objects themselves, which each answer the **water-usage** message. The *reference chains*:

```
(the hotel water-usage)
```

and

```

(defparameter *presidents-data*
  '(:name
    "Carter"
    :term 1976)
    (:name "Reagan"
    :term 1980)
    (:name "Bush"
    :term 1988)
    (:name "Clinton"
    :term 1992)))

(define-object presidents-container ()

  :input-slots
  ((data *presidents-data*))

  :objects
  ((presidents :type 'president
    :sequence (:size (length (the data)))
    :name (getf (nth (the-child index) (the data)) :name)
    :term (getf (nth (the-child index) (the data)) :term))))

```

Figure 5.3: Sample Data and Object Definition to Contain U.S. Presidents

(the bank water-usage)

provide the mechanism to access messages within the child object instances.

These child objects become instantiated *on demand*, meaning that the first time these instances or any of their messages are referenced, the actual instance will be created *and* cached for future reference.

5.5 Sequences of Objects and Input-slots with a Default Expression

Objects may be *sequenced*, to specify, in effect, an array or list of object instances. The most common type of sequence is called a *fixed size* sequence. See Figure 5.3 for an example of an object which contains a sequenced set of instances representing U.S. presidents. Each member of the sequenced set is fed inputs from a list of plists, which simulates a relational database table (essentially a “list of rows”).

Note the following from this example:

- In order to sequence an object, the input keyword **:sequence** is added, with a list consisting of the keyword **:size** followed by an expression which must evaluate to a number.

- In the input-slots, **data** is specified together with a default expression. Used this way, input-slots function as a hybrid of computed-slots and input-slots, allowing a *default expression* as with computed-slots, but allowing a value to be passed in on instantiation or from the parent, as with an input-slot which has no default expression. A passed-in value will override the default expression.

5.6 Summary

This chapter has provided a minimal introduction to the core Gendl syntax. In subsequent chapters we will cover more specialized aspects of the Gendl language, introducing new Common Lisp concepts as they are required along the way.

Chapter 6

The Tasty Development Environment

*Tasty*¹ is a web based testing and tracking utility. Note that Tasty is designed for developers of GenDL applications — it is not intended as an end-user application interface (see the ?? section for the recommended steps to create end-user interfaces).

Tasty allows you to visualize and inspect any object defined in GenDL, which mixes at least `base-object` into the definition of its root²

First, make sure you have compiled and loaded the code for the Chapter 5 examples, contained in

```
.../src/documentation/tutorial/examples/chapter-5/
```

in your Gendl distribution. If you are not sure how to do this, please stop reading this section now, review Section ??, then return here...

Now you should have the Chapter 5 example definitions compiled and loaded into the system. To access Tasty, point your web browser to the URL in figure 6.1. This will bring up the start-up page, as seen in Figure 6.2³. To access an instance of a specific object definition, you specify the class package and the object type, separated by a colon (":") (or a double-colon "::") in case the symbol naming the type is not exported from the package). For example, consider the simple

¹"Tasty" is an acronym of acronyms - it stands for TATu with STYle (sheets), where tatu comes from Testing And Tracking Utility.

²`base-object` is the core mixin for all geometric objects and gives them a coordinate system, length, width, and height. This restriction in tasty will be removed in a future GenDL release so you will be able to instantiate non-geometric root-level objects in tasty as well, for example to inspect objects which generate a web page but no geometry.

³This page may look slightly different, e.g. different icon images, depending on your specific Gendl version.

```
http://<host>:<port>/tasty
```

```
emph{by default, this URL is:}
```

```
http://localhost:9000/tasty
```

Figure 6.1: Web Browser address for Tasty development environment



Figure 6.2: Tasty start-up

`tower1` definition in Figure ?? This definition is in the `:chapter-5` package. So the specification will be `shock-absorber:assembly`

Note that if the `assembly` symbol had not been exported from the `:shock-absorber` package, then a double-colon would have been needed: `shock-absorber::assembly`⁴

After you specify the class package and the object type and press the “browse” button, the browser will bring up the utility interface with an instance of the specified type (see figure 6.3.

The utility interface by default is composed of three toolbars and three view frames (tree frame, inspector frame and viewport frame “graphical view port”).

6.0.1 The Toolbars

The first toolbar consists of two “tabs” which allow the user to select between the display of the application itself or the GenDL reference documentation.

The second toolbar is designed to select various “click modes” for objects and graphical viewing, and to customize the interface in other ways. It hosts five menus: edit, tree, view, windows and help⁵.

The *tree menu* allows the user to customize the “click mode” of the mouse (or “tap mode” for other pointing device) for objects in the tree, inspector, or viewport frames. The behavior follows the *select-and-match* paradigm – you first *select* a mode of operation with one of the buttons or menu items, then *match* that mode to any object in the tree frame or inspector frame by left-clicking (or tapping). These modes are as follows:

⁴use of a double-colon indicates dubious coding practice, because it means that the code in question is accessing the “internals” or “guts” of another package, which may not have been the intent of that other package’s designer.

⁵A File menu will be added in a future release, to facilitate saving and restoring of instance “snapshots” — at present, this can be done programmatically.

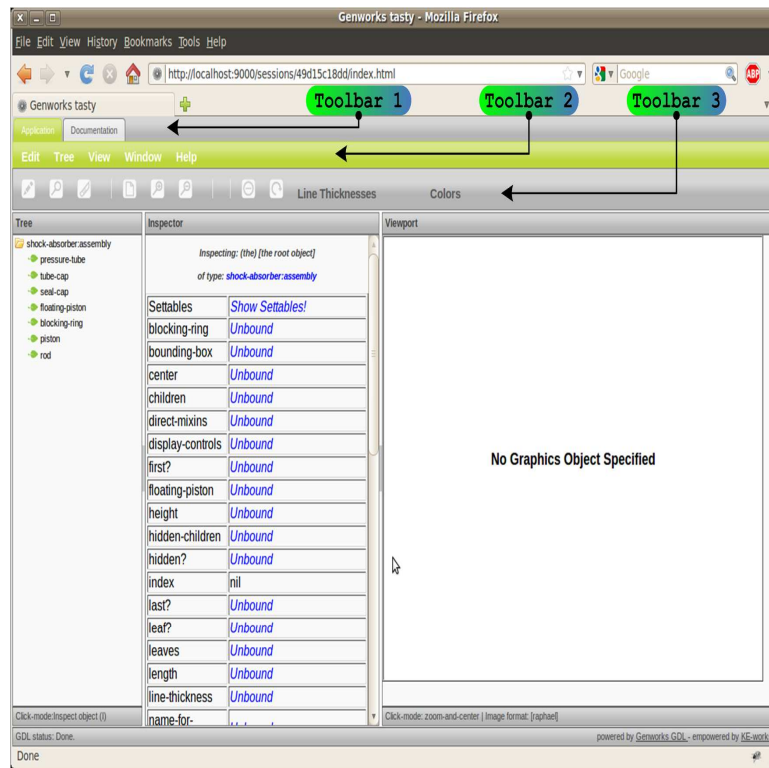


Figure 6.3: Tasty Interface

- Tree: Graphical modes

Add Node (AN) Node in graphics viewport

Add Leaves (AL) Add Leaves in graphics viewport

Add Leaves indiv. (AL*) Add Leaves individually (so they can be deleted individually).

Draw Node (DN) Draw Node in graphics view port (replacing any existing).

Draw Leaves (DL) Draw Leaves in graphics view port (replacing any existing).

Clear Leaves (DL) Delete Leaves

- Tree: Inspect & debug modes

Inspect object (I) Inspect (make the inspector frame to show the selected object).

Set self to Object (B) Sets a global `self` variable to the selected object, so you can interact by sending messages to the object at the command prompt e.g. by typing `(the length)` or `(the children)`.

Set Root to Object (SR) Set displayed root in Tasty tree to selected object.

Up Root (UR!) Set displayed root in Tasty tree up one level (this is grayed out if already on root).

Reset Root (RR!) Reset displayed root in Tasty to to the true root of the tree (this is grayed out if already on root).

- Tree: frame navigation modes

Expand to Leaves (L) Nodes expand to their deepest leaves when clicked.

Expand to Children (C) Nodes expand to their direct children when clicked.

Auto Close (A) When any node is clicked to expand, all other nodes close automatically.

Remember State (R) Nodes expand to their previously expanded state when clicked.

- View: Viewport Actions

Fit to Window! Fits to the graphics viewport size the displayed objects (use after a Zoom)

Clear View! (CL!) Clear all the objects displayed in the graphics viewport.

- View: Image Format

PNG Sets the displayed format in the graphics viewport to PNG (raster image with isoparametric curves for surfaces and brep faces).

JPEG Sets the displayed format in the graphics viewport to JPEG (raster image with isoparametric curves for surfaces and brep faces).

VRML/X3D Sets the displayed format in the graphics viewport to VRML with default lighting and viewpoint (these can be changed programmatically). This requires a compatible plugin such as BS Contact

X3DOM This experimental mode sets the displayed format in the graphics viewport to use the x3dom.js Javascript library, which attempts to render X3D format directly in-browser without the need for plugins. This works best in WebGL-enabled browsers such as a recent version of Google Chrome⁶.

SVG/VML Sets the displayed format in the graphics viewport to SVG/VML⁷, which is a vector graphics image format displaying isoparametric curves for surfaces and brep faces.

- View: Click Modes

Zoom in Sets the mouse left-click in the graphics viewport to zoom in.

Zoom out Sets the mouse left-click in the graphics viewport to zoom out.

Measure distance Calculates the distance between two selected points from the graphics viewport.

Get coordinates Displays the coordinates of the selected point from the graphics viewport.

Select Object Allows the user to select an object from the graphics viewport (currently works for displayed curves and in SVG/VML mode only).

- View: Perspective

Trimetric Sets the displayed perspective in the graphics viewport to trimetric.

Front Sets the displayed perspective in the graphics viewport to Front (negative Y axis).

Rear Sets the displayed perspective in the graphics viewport to Rear (positive Y axis).

Left Sets the displayed perspective in the graphics viewport to Left (negative X axis).

Right Sets the displayed perspective in the graphics viewport to Right (positive X axis).

Top Sets the displayed perspective in the graphics viewport to Top (positive Z axis).

Bottom Sets the displayed perspective in the graphics viewport to Bottom (negative Z axis).

The third toolbar hosts the most frequently used buttons. These buttons have tooltips which will pop up when you hover the mouse over them. However, these buttons are found in the second toolbar too, except line thickness and color buttons. The line thickness and color buttons⁸ expand and contract when clicked on and allows the user to select a desired line thickness and color for the objects displayed in the graphics viewport.

6.0.2 View Frames

The *tree frame* is a hierarchical representation of your defined object. For example for the shock-absorber assembly this will be as depicted in figure ??

To draw the graphics (geometry) for the shock-absorber leaf-level objects, you can select the “Add Leaves (AL)” item from the Tree menu, then click the desired leaf to be displayed from the

⁶Currently, it is necessary to “Reload” or “Refresh” the browser window to display the geometry in this mode.

⁷For complex objects with many display curves, SVG/VML can overwhelm the JavaScript engine in the web browser. Use PNG for these cases.

⁸the design of the line thickness and color buttons is being refined and may appear different in your installation.

tree. Alternatively, you can select the “rapid” button from third toolbar which is symbolized by a pencil icon. Because this operation (draw leaves) is frequently used, this operation is directly available as a tooltip which will pop up when you hover the mouse over any leaf or node in the tree.

The “on the fly” feature is available also for “inspect object,” as the second icon when you hover the mouse over a leaf or node.

The “inspector” frame allows the user to inspect (and in some cases modify) the object instance being inspected.

For example, let’s make the `piston-radius` of the shock-absorber “settable,” by adding the keyword `:settable` after its default expression (please review Chapter 10 if you are not familiar or need a refresher on this GenDL syntax). We will also pass the piston-radius down into the child `piston` object, rather than using a hard-coded value of 12 as previously. The new assembly definition is now:

In this new version “V0.1” of the assembly, the piston radius is a settable slot, and its value can be modified (i.e. “bashed”) as desired, either programmatically from the command-line, in an end-user application, or from the Tasty environment.

To modify the value in Tasty: select “Inspect” mode from the Tree menu, then select the root of the `assembly` tree to set the inspector on that object (see Figure 6.5). Once the inspector is displaying this object, it is possible to expand its settable slots by clicking on the “Show Settables!” link. (use the “X” link to collapse the settable slots view). When the settable slots area is open, the user may set the values as desired by inputting the new value and pressing the OK button (see Figure 6.6).

```

(in-package :shock-absorber)

(define-object assembly (base-object)
  :input-slots ((piston-radius 12 :settable)) ;;;----modification ;
  :computed-slots ()
  :objects
  ((pressure-tube :type 'cone
    :center (make-point 0 70 0)
    :length 120
    :radius-1 13
    :inner-radius-1 12
    :radius-2 13
    :inner-radius-2 12)

    (tube-cap :type 'cone
      :center (make-point 0 5 0)
      :length 10
      :radius-1 5
      :inner-radius-1 0
      :radius-2 13
      :inner-radius-2 0)

    (seal-cap :type 'cone
      :center (make-point 0 135 0)
      :length 10
      :radius-1 13
      :inner-radius-1 2.5
      :radius-2 5
      :inner-radius-2 2.5)

    (floating-piston :type 'cylinder
      :center (make-point 0 35 0)
      :radius 12
      :length 10)

    (blocking-ring :type 'cone
      :center (make-point 0 42.5 0)
      :length 5
      :radius-1 12
      :inner-radius-1 10
      :radius-2 12
      :inner-radius-2 10)

    (piston :type 'cylinder
      :center (make-point 0 125 0)
      :radius (the piston-radius) ;;;----modification ;
      :length 10)

    (rod :type 'cylinder
      :center (make-point 0 175 0)
      :radius 2.5
      :length 90))

```

Figure 6.4: Shock Absorber Assembly V0.1

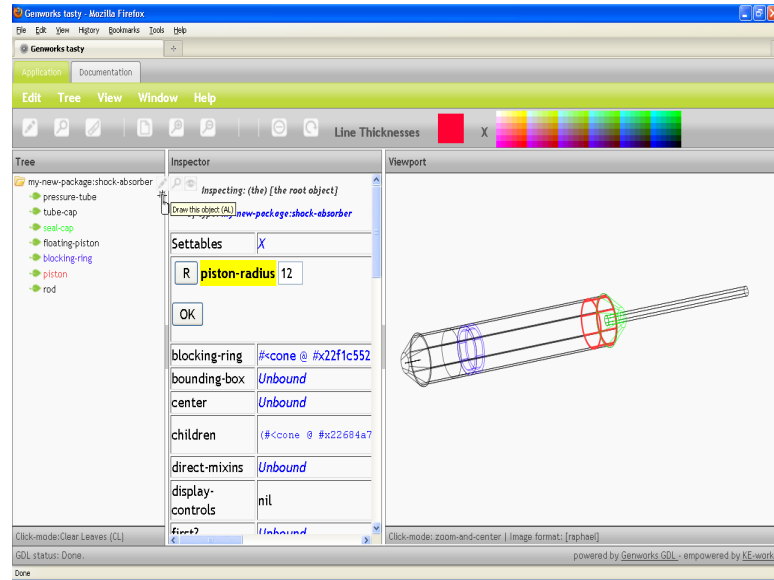


Figure 6.5: Tasty Inspector

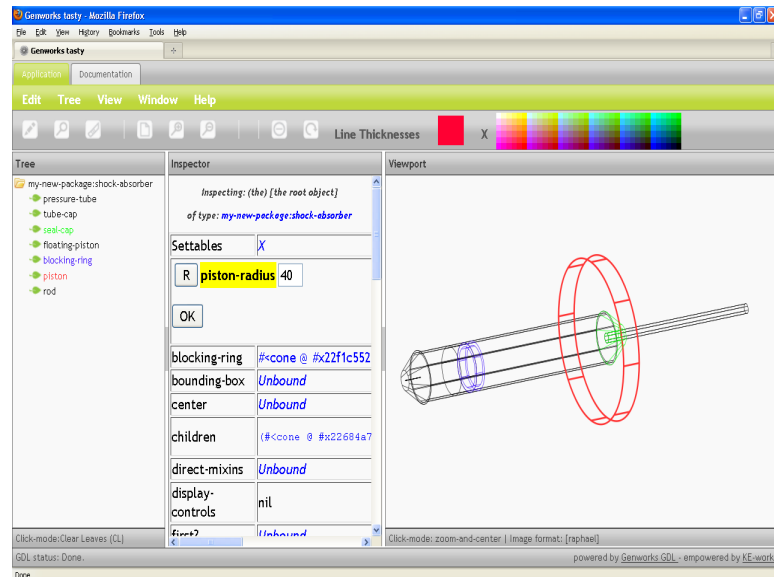


Figure 6.6: Settable Slots in Tasty

Chapter 7

Working with Geometry in Gendl

Although Gendl is intended for general-purpose computing, one of its particular strong points is generating geometry and processing geometric entities in various ways. Geometric capabilities are provided by a library of *low-level primitives*, or LLPs. LLPs are pre-defined GenDL objects which you can extend by “mixing in” with your own definitions, and/or instantiate as child objects in your definitions.

The names of the geometric LLPs are in the `:geom-base` package, and here are some examples:

- `base-coordinate-system` provides an empty 3D Cartesian coordinate system¹
- Simple 2-dimensional primitives include `line`, `arc`, and `ellipse`.
- Simple 3-dimensional primitives include `box`, `sphere`, and `cylinder`.
- Advanced 3-dimensional primitives (which depend on optional add-on Geometry Kernel module) include `b-spline-curve`, `b-spline-surface`, and `merged-solid`.

This chapter will cover the default coordinate system of GenDL as well as the built-in simple 2D and 3D LLPs. Chapter ?? will cover the advanced Surfaces and Solids primitives.

7.1 The Default Coordinate System in Gendl

Gendl’s default coordinate system comes with the standard mixin `base-coordinate-system` and represents a standard three-dimensional Cartesian Coordinate system with X, Y, and Z dimensions.

Figure 7.1 shows the coordinate system in a 3D Trimetric view.

Figure 7.2 shows the coordinate system in a Front View.

Figure 7.3 shows the coordinate system in a Top View.

Figure 7.4 shows each face of the reference box labeled with its symbolic direction:

- **Right** for the **positive X** direction
- **Left** for the **negative X** direction

¹`base-coordinate-system` is also known by its legacy name `base-object`. If your Gendl version does not yet have `base-coordinate-system` defined, you can use `base-object` to identical effect.

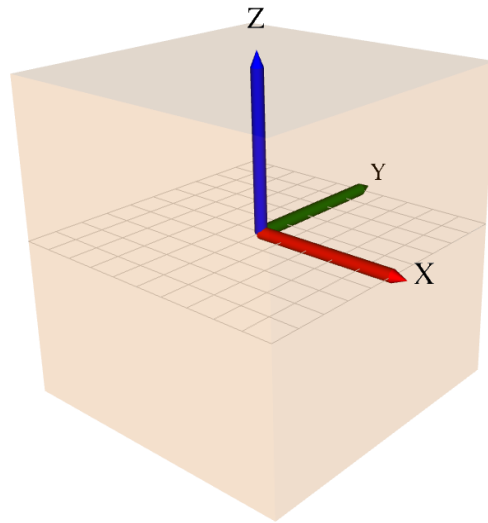


Figure 7.1: Coordinate System in Trimetric View

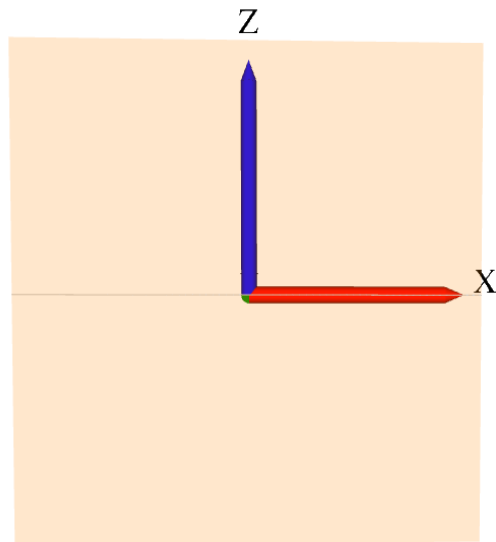


Figure 7.2: Coordinate System in Front View

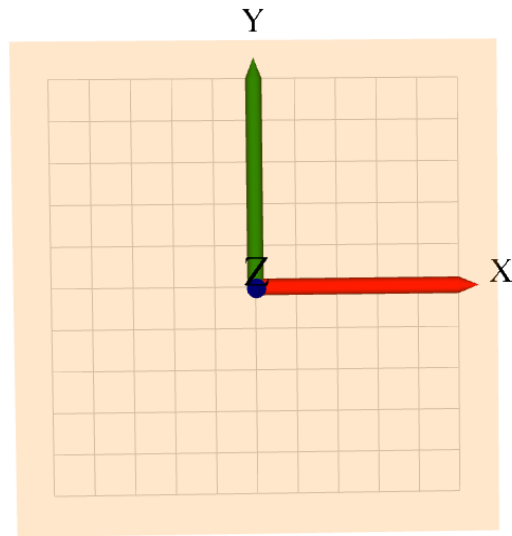


Figure 7.3: Coordinate System in Top View

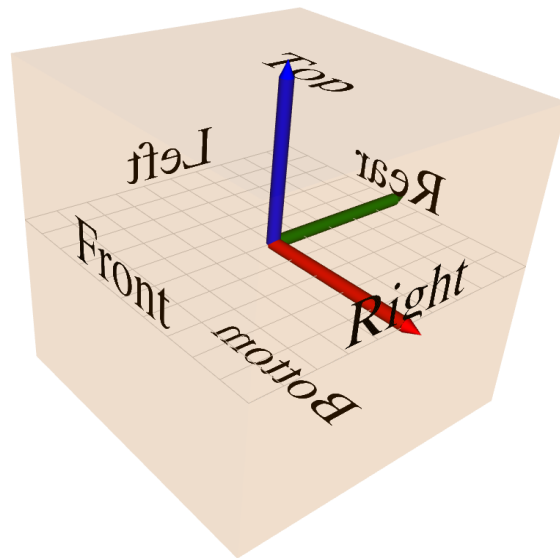


Figure 7.4: Coordinate System with Symbolically Labeled Faces

- Rear for the **positive Y** direction
- Front for the **negative Y** direction
- Top for the **positive Z** direction
- Bottom for the **negative Z** direction

7.2 Building a Geometric Gendl Model from LLPs

The simplest geometric entity in Gendl is a **box**, and in fact all entities are associated with an imaginary *reference box* which shares the same slots as a normal box. The **box** primitive type in Gendl inherits its inputs from **base-coordinate-system**, and the fundamental inputs are:

- **center** Default: `#(0.0 0.0 0.0)`
- **orientation** Default: `nil`
- **height** Default: `0`
- **length** Default: `0`
- **width** Default: `0`

Chapter 8

Custom User Interfaces in Gendl

One of the strengths of Gendl is the ability to create custom web-based user interfaces. Gendl contains a built-in web server and supports the creation of generative *web-based* user interfaces¹. Using the same **define-object** syntax which you have already learned, you can define web pages, sections of web pages, and *form control* elements such as type-in fields, checkboxes, and choice lists. Using this capability does require a basic working knowledge of the HTML language².

Any web extensions such as custom JavaScript and JavaScript libraries can also be used, as with any standard web application.

With the primitive objects and functions in its **:gwl** package, Gendl supports both the traditional “Web 1.0” interfaces (with fillout forms, page submittal, and complete page refresh) as well as so-called “Web 2.0” interaction with AJAX.

8.1 Package and Environment for Web Development

Similarly to **gdl:define-package**, you can use **gwl:define-package** in order to create a working package which has access to the symbols you will need for building a web application (in addition to all the other Gendl symbols).

The **:gwl-user** package is pre-defined and may be used for practice work. For real projects, you should define your own package using **gwl:define-package**.

The acronym “GWL” stands for Generative Web Language, which is not actually a separate language from Gendl itself, but rather a set of primitive objects and functions available with Gendl for building web applications. The YADD reference documentation for package “Generative Web Language” provides detailed specifications for all the primitive objects and functions.

8.2 Traditional Web Pages and Applications

To make a Gendl object presentable as a web page, the following two steps are needed:

1. Mix **base-html-sheet** into the object definition.

¹Gendl does not contain support for native desktop GUI applications. Although the host Common Lisp environment (e.g. Allegro CL or LispWorks) may contain a GUI builder and Integrated Development Environment, and you are free to use these, Gendl does not provide specific support for them.

²We will not cover HTML in this manual, but plentiful resources are available online and in print.

```
(in-package :gwl-user)

(define-object president (base-html-sheet)
  :input-slots
  ((name "Carter") (term 1976) (table-border 1))

  :functions
  ((write-html-sheet
    () (with-cl-who (:indent t)
      (:html (:head (:title (fmt "Info on President: ~a"
                                (the name))))
            (:body ((:table :border (the table-border))
                    (:tr (:th "Name") (:th "Term"))
                    (:tr (:td (str (the name)))
                        (:td (str (the term)))))))))))
  ;;
  ;; Access the above example with
  ;; http://localhost:9000/make?object=gwl-user::president
  ;;
```

Figure 8.1: Simple Static Page Example

```
<html>
<head>
  <title>Info on President: Carter
</title>
</head>
<body>
  <table border="1">
    <tr> <th>Name</th>
    <th>Term</th>
    </tr>
    <tr> <td>Carter</td>
    <td>1976</td>
    </tr>
  </table>
</body></html>
```

Figure 8.2: Simple Static Page Example

2. define a Gendl function called `main-sheet` within the object definition.

The `main-sheet` function should return valid HTML for the page. The easiest way to produce HTML is with the use of an HTML generating library, such as [CL-WHO](#) or [HTMLGen](#), both of which are built into Gendl.

For our examples we will use `cl-who`, which is currently the standard default HTML generating library used internally by Gendl. Here we will make note of the major features of `cl-who` while introducing the examples; for complete documentation on `cl-who`, please visit the page at [Edi Weitz' website](#) listed above.

8.2.1 A Simple Static Page Example

In Figure 8.1, GWL convenience macro `with-cl-who` is used; this sets up a standard default environment for outputting HTML within a GWL application.

The code in Figure 8.1 produces HTML output as shown in Figure 8.2 which looks similar to Figure 8.3 in a web browser.

Several important concepts are packed into this example. Note the following:

- Our convenience macro `with-cl-who` is used to wrap the native `with-html-output` macro which comes with the `cl-who` library.

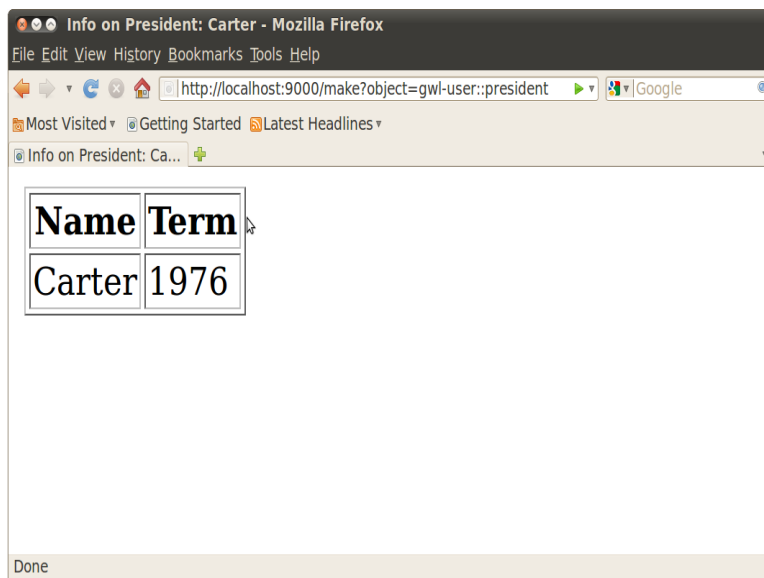


Figure 8.3: Simple Static Page Example

- We use the keyword argument `:indent t` in order to pretty-print the generated HTML. This does not affect the browser display but can make the generated HTML easier to read and debug. This option should be left as `nil` (the default) for production deployments.
- The `fmt` symbol has special meaning within the `cl-who` environment and works the same as a Common Lisp `format nil` in order to evaluate a format string together with matching arguments, and produce a string at runtime.
- The `str` symbol has special meaning within the `cl-who` environment and works by evaluating an expression at runtime to return a string or other printable object, which is then included at that point in the HTML output.
- Expressions within the `body` of an HTML tag have to be evaluated, usually by use of the `fmt` or `str` in `cl-who`. There are three examples of this in the above sample: one `fmt` and two `str`.
- Expressions within a *tag attribute* are always evaluated automatically, and so do **not** require a `str` or other special symbol to force evaluation at runtime. Tag attributes in HTML (or XML) are represented as a plist spliced in after a tag name, wrapped in extra parentheses around the tag name. In the sample above, the `:border` (the `table-border`) is an example of a tag attribute on the `:table` tag. Notice that the expression (the `table-border`) does not need `str` in order to be evaluated - it gets evaluated automatically.
- In `cl-who`, if a tag attribute evaluates to `nil`, then that tag attribute will be left out of the output completely. For example if (the `table-border`) evaluates to `nil`, then the `:table` tag will be outputted without any attributes at all. This is a convenient way to conditionalize tag attributes.

```

(in-package :gwl-user)

(define-object presidents (base-html-sheet)
  :input-slots
  ((presidents (list (list :name "Ford"
                           :term 1974)
                      (list :name "Carter"
                           :term 1976)
                      (list :name "Clinton"
                           :term 1992)
                      (list :name "Bush"
                           :term 2000)
                      (list :name "Obama"
                           :term 2008))))

  (table-border 1))

:functions
(write-html-sheet
 ()
 (with-cl-who (:indent t)
  (let ((title (format nil "Info on ~a Presidents:"
                      (length (the presidents)))))
    (htm
     (:html
      (:head (:title (str title)))
      (:body
       (:p (:c (:h3 (str title))))
       (:(table :border (the table-border))
        (:tr (:th "Name") (:th "Term"))
        (dolist (president (the presidents))
          (htm
           (:tr (:td (str (getf president :name)))
                (td (str (getf president :term))))))))))))))
;;
;; Access the above example with
;; http://localhost:9000/make?object=gwl-user::presidents
;;

```

Figure 8.4: Mixing Static HTML and Dynamic Content

- The URL `http://localhost:9000/make?object=gwl-user::president` is published automatically based on the package and name of the object definition. When you visit this URL, the response is redirected to a unique URL identified by a *session ID*. This ensures that each user to your application site will see their own specific instance of the page object. The session ID is constructed from a combination of the current date and time, along with a pseudo-random number.

8.2.2 A Simple Dynamic Page which Mixes HTML and Common Lisp/Gendl

Within the `cl-who` environment, it is possible to include any standard Common Lisp structures such as `let`, `dolist`, `dotimes`, etc, which accept a *body* of code. The requirement is that any internal code body must be wrapped in a list beginning with the special symbol `htm`, which has meaning to `cl-who`.

The example in Figure 8.4 uses this technique to output an HTML table row for each “row” of data in a list of lists. The output looks similar to Figure 8.5 in a web browser.

Note the following from this example:

- `title` is a `let` variable, so we use `(str title)` to evaluate it as a string. We do not use `(str (the title))` because `title` is a local variable and not a message (i.e. slot) in the object.
- Inside the `dolist`, we “drop back into” HTML mode using the `htm` operator.

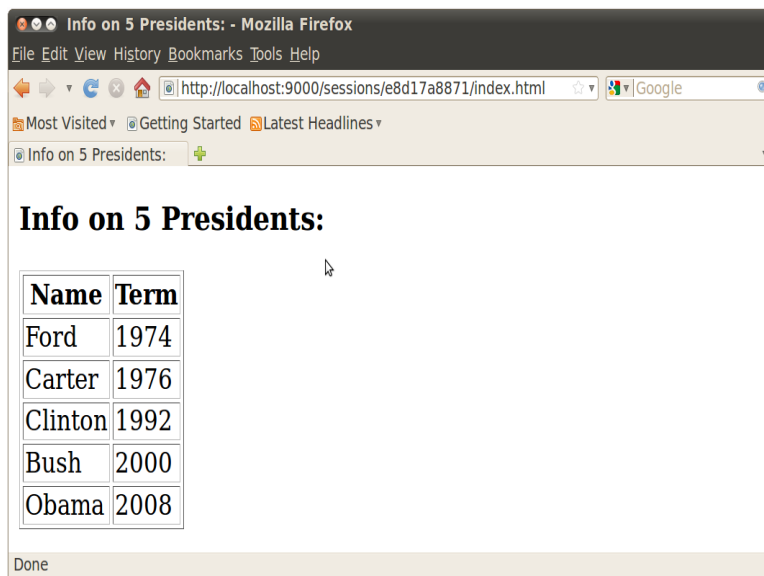


Figure 8.5: Mixing Static HTML and Dynamic Content

8.2.3 Linking to Multiple Pages

The `base-html-sheet` mixin provides a `self-link` message for the purpose of generating a hyperlink to that page. Typically you will have a “parent” page object which links to its “child” pages, but Gendl pages can link to other pages anywhere in the Gendl tree³.

In Figures 8.6 and 8.7, we provide links from a parent page into a child page with detailed information on each president. The output looks similar to Figure 8.8 in a web browser.

Note the following from this example:

- The `write-self-link` message is a function which can take a keyword argument of `:display-string`. This string is used for the actual hyperlink text.
- There is a `write-back-link` message which similarly can take a keyword argument of `:display-string`. This generates a link back to (the `return-object`) which, by default in `base-html-sheet`, is (the `parent`).

8.2.4 Form Controls and Fillout-Forms

Form Controls

Gendl provides a set of primitives useful for generating the standard HTML form-controls⁴ such as text, checkbox, radio, submit, menu, etc. These should be instantiated as child objects in the page, then included in the HTML for the page using `str` within an HTML `form` tag (see next section).

The form-controls provided by Gendl are documented in YADD accessible with

³In order for dependency-tracking to work properly, the pages must all belong to the same tree, i.e. they must share a common root object.

```

(in-package :gwl-user)

(define-object presidents-with-pages (base-html-sheet)
  :input-slots
  ((presidents (list (list :name "Ford" :term 1974)
                     (list :name "Carter" :term 1976)
                     (list :name "Clinton" :term 1992)
                     (list :name "Bush" :term 2000)
                     (list :name "Obama" :term 2008))))

  (table-border 1))

:objects
((president-pages :type 'president-page
  :sequence (:size (length (the presidents)))
  :name (getf (nth (the-child index) (the presidents))
              :name)
  :term (getf (nth (the-child index) (the presidents))
              :term)))

:functions
((write-html-sheet
  ()
  (with-cl-who (:indent t)
    (let ((title (format nil "Info on ~a Presidents:"
                        (length (the presidents)))))
      (htm
        (:html
          (:head (:title (str title)))
          (:body
            (:p (:c (:h3 (str title)))
            (:ol
              (dolist (page (list-elements (the president-pages)))
                (htm
                  (:li
                    (the-object
                     page
                     (write-self-link :display-string
                      (the-object page name))))))))))))))

;;
;; Access the above example with
;; http://localhost:9000/make?object=gwl-user:presidents-with-pages
;;

```

Figure 8.6: Linking to Multiple Pages

```

(in-package :gwl-user)

(define-object president-page (base-html-sheet)
  :input-slots
  (name term)

  :functions
  ((write-html-sheet
    ()
    (with-cl-who ()
      (let ((title (format nil "Term for President ~a:"
                          (the name))))
        (htm
          (:html
            (:head (:title (str title)))
            (:body
              (the (write-back-link :display-string "<Back"))
              (:p (:c (:h3 (str title)))
              (:p (str (the term))))))))))


```

Figure 8.7: Linking to Multiple Pages

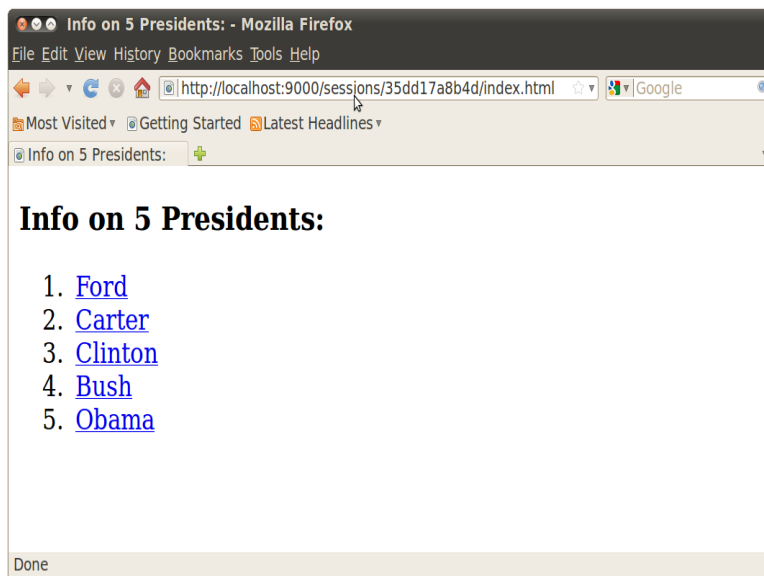


Figure 8.8: Linking to Multiple Pages

`http://localhost:9000/yadd`

and in Appendix ?? of this Manual. Examples of available form-controls are:

- `text-form-control`
- `checkbox-form-control`
- `menu-form-control`
- `radio-form-control`
- `text-form-control`
- `button-form-control`

These form-controls are customizable by mixing them into your own specific form-controls (although this is often not necessary). New form-controls such as for numbers, dates, etc are being added to correspond to latest HTML standards.

Fillout Forms

A traditional web application must enclose form controls inside a `form` tag and specify an `action` (a web URL) to receive and respond to the form submission. The response will cause the entire page to refresh with a new page. In Gendl, such a form can be generated by wrapping the layout of the form controls within the `with-html-form` macro.

```

(in-package :gwl-user)

(define-object revenue-lookup-old-school (base-ajax-sheet)

  :input-slots

  ((revenue-data '(2003 25000
                   2004 34000
                   2005 21000
                   2006 37000
                   2007 48000
                   2008 54000
                   2009 78000)))

  :functions

  ((write-html-sheet
    ()
    (with-cl-who ()
      (when *developing?* (str (the development-links)))
      (with-html-form (:cl-who? t)
        (:p (str (the table-border html-string)))
        (:p (str (the cell-padding html-string)))
        (:p (str (the selected-year html-string)))
        (:p (input :type :submit :value " OK ")))
        (:p ((table :border (the table-border value)
                    :cellpadding (the cell-padding value)
                    (:tr (:th (fmt "Revenue for Year ~a:"
                                   (the selected-year value))
                           (td (str (getf (the revenue-data)
                                           (the selected-year value)))))))))))

  :objects

  ((table-border :type 'menu-form-control
                 :size 1 :choice-list '(0 1)
                 :default 0)

   (cell-padding :type 'menu-form-control
                 :size 1 :choice-list '(0 3 6 9 12)
                 :default 0)

   (selected-year :type 'menu-form-control
                  :size 1 :choice-list (plist-keys (the revenue-data))
                  :default (first (the-child choice-list)))))

(publish-gwl-app "/revenue-lookup-old-school"
 "gwl-user::revenue-lookup-old-school")

;;
;; Access the above example with
;; http://localhost:9000/make?object=gwl-user::revenue-lookup-old-school
;;

```

Figure 8.9: Form Controls and Fillout Forms

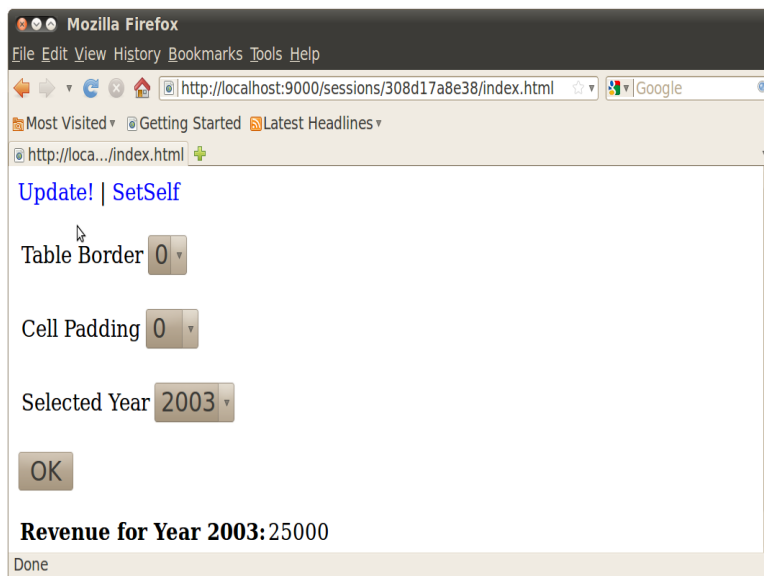


Figure 8.10: Form Controls and Fillout Forms

In Figure 8.9 is an example which allows the user to enter a year, and the application will respond with the revenue amount for that year. Additional form controls are also provided to adjust the table border and cell padding.

This example, when instantiated in a web browser, might look as shown in Figure 8.10.

8.3 Partial Page Updates with gdlAjax

AJAX stands for Asynchronous JavaScript and XML ⁴, and allows for more interactive web applications which respond to user events by updating only part of the web page. The “Asynchronous” in Ajax refers to the ability for a web page to continue interacting while one part of the page is being updated by a server response. Requests need not be Asynchronous, they can also be Synchronous (“SJAX”), which would cause the web browser to block execution of any other tasks while the request is being carried out. The “XML” refers to the format of the data that is typically returned from an AJAX request.

Gendl contains a simple framework referred to as *gdlAjax* which supports a uniquely convenient and generative approach to AJAX (and SJAX). With *gdlAjax*, you use standard Gendl object definitions and child objects in order to model the web page and the sections of the page, and the dependency tracking engine which is built into Gendl automatically keeps track of which sections of the page need to be updated after a request.

Moreover, the state of the internal Gendl model which represents the page and the page sections is kept identical to the displayed state of the page. This means that if the user hits the “Refresh” button in the browser, the state of the page will remain unchanged. This is not true of some other Ajax frameworks.

⁴[http://en.wikipedia.org/wiki/Ajax_\(programming\)](http://en.wikipedia.org/wiki/Ajax_(programming))

8.3.1 Steps to Create a gdlAjax Application

First, it is important to understand that the fundamentals from the previous section on Standard Web Applications still apply for gdlAjax applications — that is, HTML generation, page linking, etc. These techniques will all still work in a gdlAjax application.

To produce a gdlAjax application involves three main differences from a standard web application:

1. You mix in `base-ajax-sheet` instead of `base-html-sheet`. `base-ajax-sheet` mixes in `base-html-sheet`, so it will still provide all the functionality of that mixin. In fact, you can use `base-ajax-sheet` in standard web applications and you won't notice any difference if you do everything else the same.
2. Instead of a `write-html-sheet` message, you specify a `main-sheet-body` message. The `main-sheet-body` can be a computed-slot or Gendl function, and unlike the `write-html-sheet` message, it should simply return a string, not send output to a stream. Also, it only fills in the body of the page — everything between the `<body>` and `</body>` tags. The head tag of the page is filled in automatically and can be customized in various ways.
3. Any sections of the page which you want to be able to change themselves in response to an Ajax call must be made into separate page sections, or “sheet sections,” and the HTML for their `main-div` included in the main page's `main-sheet-body` by use of `cl-who`'s `str` directive.

Note the following from the example in Figure 8.11:

- We mix in `base-ajax-sheet` and specify a `main-sheet-body` slot, which uses `with-cl-who-string` to compute a string of HTML. This approach is also easier to debug, since the `main-sheet-body` string can be evaluated in the tasty inspector or at the command-line.
- We use `str` to include the string for the main page section (called `main-section` in this example) into the `main-sheet-body`.
- In the `main-section`, we also use `str` to include the html-string for each of three form-controls. We have provided a form control for the table border, the table padding, and the revenue year to look up.
- The only page section in this example is (the `main-section`). This is defined as a child object, and has its `inner-html` computed in the parent and passed in as an input. The `sheet-section` will automatically compute a `main-div` message based on the `inner-html` that we are passing in. The `main-div` is simply the `inner-html`, wrapped with an HTML DIV (i.e. “division”) tag which contains a unique identifier for this section, derived from the root-path to the Gendl object in the in tree which represents the sheet section.
- We introduce the CL function `gwl:publish-gwl-app`, which makes available a simplified URL for visiting an instance of this object in the web browser. In this case, we can access the instance using `http://localhost:9000/revenue-lookup`

```

(in-package :gwl-user)

(define-object revenue-lookup (base-ajax-sheet)

  :input-slots

  ((revenue-data '(2003 25000
                   2004 34000
                   2005 21000
                   2006 37000
                   2007 48000
                   2008 54000
                   2009 78000)))

  :computed-slots

  ((main-sheet-body
    (with-cl-who-string ()
      (str (the main-section main-div))))))

  :objects

  ((table-border :type 'menu-form-control
                 :size 1
                 :choice-list '(0 1)
                 :default 0
                 :ajax-submit-on-change? t)

   (cell-padding :type 'menu-form-control
                 :size 1
                 :choice-list '(0 3 6 9 12)
                 :default 0
                 :ajax-submit-on-change? t)

   (selected-year :type 'menu-form-control
                  :size 1
                  :choice-list (plist-keys (the revenue-data))
                  :default (first (the-child choice-list))
                  :ajax-submit-on-change? t)

   (main-section
    :type 'sheet-section
    :inner-html (with-cl-who-string ()
                  (:p (str (the development-links)))
                  (:p (str (the table-border html-string)))
                  (:p (str (the cell-padding html-string)))
                  (:p (str (the selected-year html-string)))
                  (:p ((:table :border (the table-border value)
                               :cellpadding (the cell-padding value))
                       (:tr (:th (fmt "Revenue for Year ~a:"
                                       (the selected-year value)))
                            (:td (str (getf (the revenue-data)
                                             (the selected-year value)))))))))))

  (publish-gwl-app "/revenue-lookup"
    "gwl-user::revenue-lookup")

```

Figure 8.11: Partial Page Updates with GdlAjax

Notice also the use of `:ajax-submit-on-change?` ... in each of the form-controls. This directs the `gdlAjax` system to “scrape” the values of these form controls and “bash” them into the `value` slot of the corresponding object on the server, whenever they are changed in the browser. No “Submit” button press is necessary.

It is also possible programmatically to send form-control values, and/or call a Gendl Function, on the server, by using the `gdl-ajax-call` Gendl function. This function will emit the necessary JavaScript code to use as an event handler, e.g. for an “onclick” event. For example, you could have the following snippet somewhere in your page:

```
((:span :onclick (the (gdl-ajax-call :function-key :restore-defaults!))) "Press Me" )
```

This will produce a piece of text “Press Me,” which, when pressed, will have the effect of calling a function named `restore-defaults!` in the page’s object on the server. If the function `restore-defaults!` is not defined, an error will result. The `gdl-ajax-call` Gendl function call also send arbitrary form-control values to the server by using the `:form-controls` keyword argument, and listing the relevant form-control objects. The `gdl-ajax-call` Gendl function is fully documented in YADD and the reference appendix.

If for some reason you want to do more than one `gdl-ajax-call` sequentially, then it is best to use `gdl-sjax-call` instead. This variant will cause the browser to wait until each call completes, before making the next call. To achieve this, you would want to append the strings together, e.g:

```
((:span :onclick (string-append (the (gdl-sjax-call ...))
                                (the (gdl-sjax-call ...))
                                (the (gdl-sjax-call ...))) ... ))
```

With that said, it is rarely necessary to do these calls sequentially like this, because you can use `:form-controls` and `:function-key` simultaneously. As long your logic works normally with the form-controls being set first, then the function being called, you can group the functions together into a “wrapper-function,” and do the whole processing with a single Ajax call. Normally this would be the recommended approach whenever it is possible.

8.3.2 Including Graphics

The fundamental mixin or child type to make a graphics viewport is `base-ajax-graphics-sheet`. This object definition takes several optional input-slots, but the most essential are the `:display-list-objects` and the `:display-list-object-roots`. As indicated by their names, you specify a list of nodes to include in the graphics output with the `:display-list-objects`, and a list of nodes whose leaves you want to display in the graphics output with the `:display-list-object-roots`. View controls, rendering format, action to take when clicking on objects, etc, can be controlled with other optional input-slots.

The example in Figure 8.12 contains a simple box with two graphics viewports and ability to modify the length, height, and width of the box:

This will produce a web browser output similar to what is shown in Figure 8.13.

Note the following from this example:

- The `(:use-raphael? t)` enables raphael for SVG or VML output.


```

(in-package :gwl-user)

(define-object box-with-inputs (base-ajax-sheet)

  :computed-slots
  ((use-raphael? t)

   (main-sheet-body
    (with-cl-who-string ()
      (:p (when *developing?* (str (the development-links))))
      (:p (str (the inputs-section main-div)))
      (:table
       (:tr
        (dolist (viewport (list-elements (the viewport-sections)))
          (htm (:td (:td (str (the-object viewport main-div)))))))))))

  :objects
  ((box :type 'box
    :height (the inputs-section box-height value)
    :width (the inputs-section box-width value)
    :length (the inputs-section box-length value))

   (inputs-section :type 'inputs-section)

   (viewport-sections
    :type 'base-ajax-graphics-sheet
    :sequence (:size 2)
    :view-direction-default (ecase (the-child index)
      (0 :top) (1 :trimetric))
    :image-format-default :raphael
    :display-list-objects (list (the box))
    :length 250 :width 250)))

(define-object inputs-section (sheet-section)

  :computed-slots
  ((inner-html (with-cl-who-string ()
    (:p (str (the box-length html-string)))
    (:p (str (the box-width html-string)))
    (:p (str (the box-height html-string))))))

  :objects
  ((box-length :type 'text-form-control
    :default 25
    :ajax-submit-on-change? t)
   (box-width :type 'text-form-control
    :default 35
    :ajax-submit-on-change? t)
   (box-height :type 'text-form-control
    :default 45
    :ajax-submit-on-change? t)))

(publish-gwl-app "/box-with-inputs"
  "gwl-user::box-with-inputs")

;;
;; Access the above example with
;; http://localhost:9000/make?object=gwl-user::box-with-inputs
;;

```

Figure 8.12: Including Graphics in a Web Page

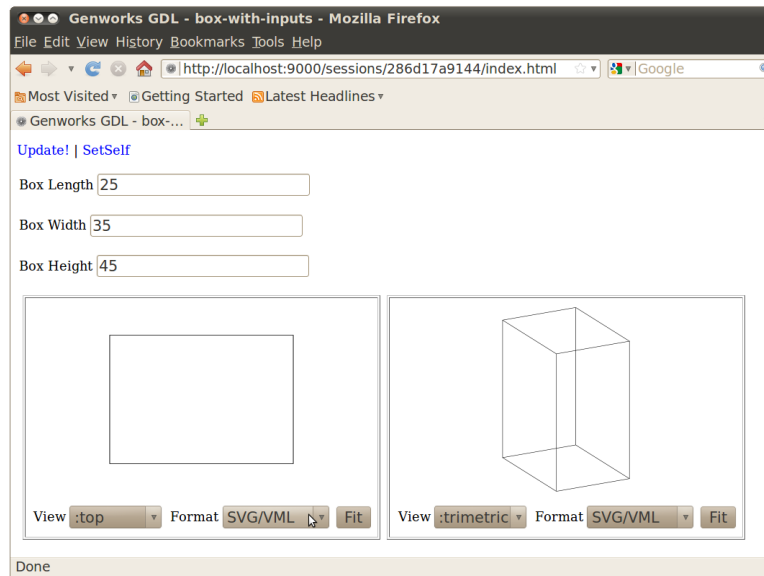


Figure 8.13: Including Graphics

- The `:raphael` image-format generates SVG or VML, depending on the browser.
- We conditionally include development-links for full Update and SetSelf! actions.
- We include two viewports in the `main-sheet-body`, elements from a sequence of size 2.
- In the inputs-section, we use the `html-string` message from each form-control to display the default decoration (prompt, etc).

Chapter 9

More Common Lisp for Gendl

Chapter 10

Advanced Gendl

Upgrade Notes

GDL 1580 marked the end of a major branch of GDL development, and 1581 was actually a major new version. With 1581, an open-source version was released, and eventually the name was changed to Gendl.

This chapter lists the typical modifications you will want to consider for upgrading from GDL 1580 to Gendl 1582.

- (update-gdl ..) is not yet available for 1582. Instead of updating incrementally with patches, Gendl 1582 is released on a monthly basis in conjunction with Quicklisp releases. Updating quicklisp involves downloading a full Genworks source code tree and running a build script. Information on this procedure is provided in Section ??.
- (make-gdl-app ..) not yet available for 1582. We are preparing the Enterprise Edition of 1582 which will include the make-gdl-app function, which creates Runtime applications without the compiler or Gendl development facilities. If you are an Enterprise licensee, are ready to release Runtime applications on 1582, and you have not received information on the Enterprise Edition, please contact support@genworks.com
- (register-asdf-systems) and the "3rdpty/" directory are no longer needed or available. Instead, we depend on the Quicklisp system. Details of Quicklisp are available at . See Section ?? for information about how to use Quicklisp with Gendl.
- There is a system-wide gdlinit.cl in the application directory, and this may have some default information which ships with Gendl. There is a personal one in home directory, which you should modify if you want to customize anything.
- Slime debugging is different from the ELI emacs debugger. The main thing to know is to press "a" or "q" to pop out of the current error. Full documentation for the Slime debug mode is available with the [Slime documentation](#).
- color-themes – Gendl now ships with the Emacs color-theme package. You can select a different color theme with M-x color-theme-select. Press [Enter] or middle-mouse on a color theme to apply it.
- Gendl files can now end with .lisp or .gdl. The new .gdl extension will work for emacs Lisp mode and will work with cl-lite, ASDF, and Quicklisp for including source files in application systems. We recommend migrating to the new .gdl extension for files containing define-object, define-format, and define-lens forms, and any other future toplevel

defining forms introduced by Gendl, in order to distinguish from files containing raw Common Lisp code.

- in `gdlAjax`, HTML for a sheet-section is given in the slot called `inner-html` instead of `main-view`. This name change was made to clarify what exactly is expected in this slot – it is the `innerHTML` of the page division represented by the current sheet-section. If you want to make your code back-compatible with GDL 1580, you can use the following form in place of old occurrences of `main-view`:

```
... #+allegro-v8.1 main-view #-allegro-v8.1 inner-html ...
```


Chapter 11

Gendl Reference

11.1 CL-LITE (Compile-and-Load Lite Utility)

11.1.1 Object Definitions

- CODEBASE-DIRECTORY-NODE

Mixins: DIRECTORY-NODE

11.1.2 Function and Macro Definitions

- CL-PATCH

11.2 COM.GENWORKS.DOM

11.3 COM.GENWORKS.DOM-HTML

11.4 COM.GENWORKS.DOM-LATEX

11.5 COM.GENWORKS.DOM-WRITERS

11.6 COM.YOYODYNE.BOOSTER-ROCKET

11.7 GENDL (Base Core Kernel Engine) Nicknames: Gdl, Genworks, Base

11.7.1 Object Definitions

- BASE-RULE-OBJECT

Mixins: VANILLA-MIXIN

- MATRIX-SEQUENCE

Mixins: STANDARD-SEQUENCEVANILLA-MIXIN

- NULL-OBJECT
Mixins: VANILLA-MIXIN
- QUANTIFICATION
Mixins: VANILLA-MIXIN
- RADIAL-SEQUENCE
Mixins: STANDARD-SEQUENCEVANILLA-MIXIN
- STANDARD-SEQUENCE
Mixins: QUANTIFICATION
- VANILLA-MIXIN*
Mixins: STANDARD-OBJECT
- VARIABLE-SEQUENCE
Mixins: QUANTIFICATION

11.7.2 Function and Macro Definitions

- ALIST2PLIST
- ALWAYS
- APPEND-ELEMENTS [Macro]
- CL-LITE
- CYCLIC-NTH
- DEFAULTING [Macro]
- DEFINE-FORMAT [Macro]
- DEFINE-LENS [Macro]
- DEFINE-OBJECT [Macro]
- DEFINE-OBJECT-AMENDMENT [Macro]
- DIV
- ENSURE-LIST
- FIND-MESSAGES-USED-BY
- FIND-MESSAGES-WHICH-USE
- FLATTEN
- FORMAT-SLOT [Macro]

11.7. *GENDL (BASE CORE KERNEL ENGINE) NICKNAMES: GDL, GENWORKS, BASE69*

- FROUND-TO-NEAREST
- HALF
- IGNORE-ERRORS-WITH-BACKTRACE [Macro]
- INDEX-FILTER
- ISO-8601-DATE
- LASTCAR
- LEAST
- LIST-ELEMENTS [Macro]
- LIST-OF-NUMBERS
- MAKE-KEYWORD
- MAKE-OBJECT
- MAPSEND
- MAPTREE
- MAX-OF-ELEMENTS [Macro]
- MIN-OF-ELEMENTS [Macro]
- MOST
- NEAR-TO?
- NEAR-ZERO?
- NEVER
- NUMBER-FORMAT
- NUMBER-ROUND
- PLIST-KEYS
- PLIST-VALUES
- PRINT-MESSAGES [Macro]
- PRINT-VARIABLES [Macro]
- READ-SAFE-STRING
- READ-SNAPSHOT
- REMOVE-PLIST-ENTRY

- ROUND-TO-NEAREST
- SAFE-FLOAT
- SAFE-SORT
- SET-FORMAT-SLOT [Macro]
- SPLIT
- STATUS-MESSAGE
- STRING-APPEND
- SUM-ELEMENTS [Macro]
- THE [Macro]
- THE-CHILD [Macro]
- THE-ELEMENT [Macro]
- THE-OBJECT [Macro]
- TWICE
- UNDEFINE-OBJECT
- UNIVERSAL-TIME-FROM-ISO-8601
- WITH-ERROR-HANDLING [Macro]
- WITH-FORMAT [Macro]
- WITH-FORMAT-SLOTS [Macro]
- WRITE-ENV [Macro]
- WRITE-PLIST
- WRITE-THE [Macro]
- WRITE-THE-OBJECT [Macro]
- 2

11.7.3 Variables and Constants

- *COLOR-PLIST*
- *COLOR-TABLE*
- *COLOR-TABLE-DECIMAL*
- *COLORS-DEFAULT*
- *COMPILE-CIRCULAR-REFERENCE-DETECTION?*
- *COMPILE-DEPENDENCY-TRACKING?*
- *COMPILE-DOCUMENTATION-DATABASE?*
- *COMPILE-FOR-DGDL?*
- *COMPILE-SOURCE-CODE-DATABASE?*
- *CURVE-CHORDS*
- *ENSURE-LISTS-WHEN-BASHING?*
- *LOAD-DOCUMENTATION-DATABASE?*
- *LOAD-SOURCE-CODE-DATABASE?*
- *OUT-OF-BOUNDS-SEQUENCE-REFERENCE-ACTION*
- *REMEMBER-PREVIOUS-SLOT-VALUES?*
- *ROOT-CHECKING-ENABLED?*
- *RUN-WITH-CIRCULAR-REFERENCE-DETECTION?*
- *RUN-WITH-DEPENDENCY-TRACKING?*
- *UNDECLARED-PARAMETERS-ENABLED?*
- *ZERO-EPSILON*
- +PHI+
- 2PI
- PI/2

11.8 GDL-USER

11.9 GENDL-DOC

11.10 GEOM-BASE (Wireframe Geometry)

11.10.1 Object Definitions

- ANGULAR-DIMENSION
Mixins: LINEAR-DIMENSIONVANILLA-MIXIN
- ARC
Mixins: ARCOID-MIXINBASE-OBJECT
- ARCOID-MIXIN
Mixins: VANILLA-MIXIN
- BASE-COORDINATE-SYSTEM
Mixins: BASE-OBJECTVANILLA-MIXIN
- BASE-DRAWING
Mixins: BASE-OBJECT
- BASE-OBJECT
Mixins: VANILLA-MIXIN
- BASE-VIEW
Mixins: BASE-OBJECT
- BEZIER-CURVE
Mixins: BASE-OBJECT
- BOX
Mixins: BASE-OBJECT
- C-CYLINDER
Mixins: CYLINDER
- CENTER-LINE
Mixins: OUTLINE-SPECIALIZATION-MIXINBASE-OBJECT
- CIRCLE
Mixins: ARC
- CONE
Mixins: CYLINDER

- CYLINDER
Mixins: IFS-OUTPUT-MIXINARCOID-MIXINBASE-OBJECT
- ELLIPSE
Mixins: ARCOID-MIXINBASE-OBJECT
- GENERAL-NOTE
Mixins: OUTLINE-SPECIALIZATION-MIXINBASE-OBJECT
- GLOBAL-FILLETED-POLYGON-PROJECTION
Mixins: GLOBAL-POLYGON-PROJECTION
- GLOBAL-FILLETED-POLYLINE
Mixins: GLOBAL-FILLETED-POLYLINE-MIXINVANILLA-MIXIN
- GLOBAL-FILLETED-POLYLINE-MIXIN
Mixins: GLOBAL-POLYLINE-MIXIN
- GLOBAL-POLYGON-PROJECTION
Mixins: BASE-OBJECTIFS-OUTPUT-MIXIN
- GLOBAL-POLYLINE
Mixins: GLOBAL-POLYLINE-MIXINVANILLA-MIXIN
- GLOBAL-POLYLINE-MIXIN
Mixins: BASE-OBJECT
- HORIZONTAL-DIMENSION
Mixins: LINEAR-DIMENSIONVANILLA-MIXIN
- LABEL
Mixins: OUTLINE-SPECIALIZATION-MIXINBASE-OBJECT
- LEADER-LINE
Mixins: BASE-OBJECT
- LINE
Mixins: BASE-OBJECT
- LINEAR-DIMENSION
Mixins: OUTLINE-SPECIALIZATION-MIXINBASE-OBJECT
- PARALLEL-DIMENSION
Mixins: LINEAR-DIMENSION

- PIE-CHART
Mixins: BASE-OBJECT
- POINT
Mixins: SPHERE
- RENDERER-MIXIN
Mixins: VANILLA-MIXIN
- ROUTE-PIPE
Mixins: GLOBAL-FILLETED-POLYLINE-MIXIN
OUTLINE-SPECIALIZATION-MIXIN
- SAMPLE-DRAWING
Mixins: BASE-DRAWING
VANILLA-MIXIN
- SPHERE
Mixins: IFS-OUTPUT-MIXIN
ARCOID-MIXIN
BASE-OBJECT
- SPHERICAL-CAP
Mixins: IFS-OUTPUT-MIXIN
ARCOID-MIXIN
BASE-OBJECT
- TEXT-LINE
Mixins: BASE-OBJECT
- TORUS
Mixins: IFS-OUTPUT-MIXIN
ARCOID-MIXIN
BASE-OBJECT
- TYPESET-BLOCK
Mixins: BASE-OBJECT
- VERTICAL-DIMENSION
Mixins: LINEAR-DIMENSION

11.10.2 Function and Macro Definitions

- 3D-DISTANCE
- 3D-VECTOR-TO-ARRAY
- ACOSD
- ADD-MATRICES
- ADD-VECTORS
- ALIGNMENT
- ANGLE-BETWEEN-VECTORS

- ANGLE-BETWEEN-VECTORS-D
- APPLY-MAKE-POINT
- ARRAY-TO-3D-VECTOR
- ARRAY-TO-LIST
- ASIND
- ATAND
- COINCIDENT-POINT?
- CREATE-OBLIQUENESS
- CROSS-VECTORS
- DEGREE
- DEGREES-TO-RADIANS
- DISTANCE-TO-LINE
- DOT-VECTORS
- EQUI-SPACE-POINTS
- GET-U
- GET-V
- GET-W
- GET-X
- GET-Y
- GET-Z
- INTER-CIRCLE-SPHERE
- INTER-LINE-PLANE
- INTER-LINE-SPHERE
- LENGTH-VECTOR
- MAKE-POINT [Macro]
- MAKE-TRANSFORM
- MAKE-VECTOR [Macro]
- MATRIX*VECTOR

- MATRIX-TO-QUATERNION
- MERGE-DISPLAY-CONTROLS [Macro]
- MIDPOINT
- MULTIPLY-MATRICES
- ORTHOGONAL-COMPONENT
- PARALLEL-VECTORS?
- PROJ-POINT-ON-LINE
- PROJECTED-VECTOR
- PYTHAGORIZE
- QUATERNION-TO-MATRIX
- QUATERNION-TO-ROTATION
- RADIANS-TO-DEGREES
- RADIANS-TO-GRADS
- REVERSE-VECTOR
- ROLL [Macro]
- ROTATE-POINT
- ROTATE-POINT-D
- ROTATE-VECTOR
- ROTATE-VECTOR-D
- ROTATION
- SAME-DIRECTION-VECTORS?
- SCALAR*MATRIX
- SCALAR*VECTOR
- SORT-POINTS-ALONG-VECTOR
- SUBTRACT-VECTORS
- TRANSFORM-AND-TRANSLATE-POINT
- TRANSFORM-NUMERIC-POINT
- TRANSLATE [Macro]

- TRANSLATE-ALONG-VECTOR
- TRANSPOSE-MATRIX
- UNITIZE-VECTOR
- ZERO-VECTOR?

11.10.3 Variables and Constants

- *BREAK-LEADERS?*
- *GS-GRAPHICS-ALPHA-BITS*
- *GS-TEXT-ALPHA-BITS*
- *HASH-TRANSFORMS?*
- *ZERO-VECTOR-CHECKING?*
- +POSTNET-BITS+

11.11 GWL (Generative Web Language (GWL))

11.11.1 Object Definitions

- APPLICATION-MIXIN
Mixins: LAYOUT-MIXIN VANILLA-MIXIN
- BASE-AJAX-GRAPHICS-SHEET
Mixins: BASE-AJAX-SHEET BASE-HTML-GRAPHICS-SHEET
- BASE-AJAX-SHEET
Mixins: BASE-HTML-SHEET
- BASE-FORM-CONTROL
Mixins: SKELETON-FORM-CONTROL VANILLA-MIXIN
- BASE-HTML-GRAPHICS-SHEET
Mixins: BASE-HTML-SHEET GEOMETRY-VIEW-MIXIN BASE-OBJECT
- BASE-HTML-SHEET
Mixins: SHEET-SECTION VANILLA-MIXIN
- CHECKBOX-FORM-CONTROL
Mixins: BASE-FORM-CONTROL VANILLA-MIXIN
- GEOMETRY-VIEW-MIXIN
Mixins: VANILLA-MIXIN

- GRID-FORM-CONTROL
Mixins: SKELETON-FORM-CONTROLVANILLA-MIXIN
- GWL-RULE-OBJECT
Mixins: BASE-HTML-Graphics-SHEETBASE-RULE-OBJECT
- LAYOUT-MIXIN
Mixins: BASE-HTML-Graphics-SHEET
- MENU-FORM-CONTROL
Mixins: BASE-FORM-CONTROLVANILLA-MIXIN
- NODE-MIXIN
Mixins: LAYOUT-MIXINVANILLA-MIXIN
- RADIO-FORM-CONTROL
Mixins: MENU-FORM-CONTROLVANILLA-MIXIN
- SESSION-CONTROL-MIXIN
Mixins: VANILLA-MIXIN
- SHEET-SECTION
Mixins: SKELETON-UI-ELEMENTVANILLA-MIXIN
- SKELETON-FORM-CONTROL
Mixins: SKELETON-UI-ELEMENTVANILLA-MIXIN
- SKELETON-UI-ELEMENT
Mixins: VANILLA-MIXIN
- TEXT-FORM-CONTROL
Mixins: BASE-FORM-CONTROLVANILLA-MIXIN
- WEB-DRAWING
Mixins: RENDERER-MIXINBASE-DRAWING

11.11.2 Function and Macro Definitions

- BASE64-DECODE-LIST
- BASE64-DECODE-SAFE
- BASE64-ENCODE-LIST
- BASE64-ENCODE-SAFE
- CLEAR-ALL-INSTANCES

- CLEAR-INSTANCE
- CLEAR-OLD-TIMERS
- GWL-MAKE-OBJECT
- PUBLISH-GWL-APP
- PUBLISH-SHARED
- PUBLISH-STRING-CONTENT
- RELATIVIZE-PATHNAME
- SESSION-CONTROL-AUTO-REFRESH
- SESSION-REPORT
- WITH-CL-WHO [Macro]
- WITH-CL-WHO-STRING [Macro]
- WITH-HTML-FORM [Macro]

11.11.3 Variables and Constants

- *BREAK-ON-SET-SELF?*
- *BYPASS-SECURITY-CHECK?*
- *DEVELOPING?*
- *ENT*
- *FAILED-REQUEST-URL*
- *INSTANCE-HASH-TABLE*
- *JUMP-TO-TOPLEVEL-ON-SET-SELF?*
- *MAX-ID-VALUE*
- *QUERY*
- *REAP-EXPIRED-SESSIONS?*
- *RECOVERY-URL-DEFAULT*
- *REQ*

11.12 RAPHAEL

11.13 ROBOT (Simplified Android Robot example)

11.14 SURF (NURBS Surface and Solids Geometry Primitives)

11.15 TASTY (Web-based Development Environment (tasty))

11.16 TREE (Tree component used by Tasty and potentially as a UI component on its own)

11.16.1 Object Definitions

- NEWERTREE
Mixins: SHEET-SECTION
- TREE
Mixins: SHEET-SECTIONTREE-NODE-MIXIN

11.17 YADD (Yet Another Definition Documenter (yadd))

11.17.1 Object Definitions

- ASSEMBLY
Mixins: BASE-YADD-SHEET
- BASE-YADD-SHEET
Mixins: BASE-AJAX-SHEET
- MASTER-INDEX
Mixins: BASE-YADD-SHEET
- PACKAGE-DOKUMENTATION
Mixins: BASE-YADD-SHEET
- PACKAGE-FORM
Mixins: BASE-YADD-SHEET

Index

- *BREAK-LEADERS?*, 77
- *BREAK-ON-SET-SELF?*, 79
- *BYPASS-SECURITY-CHECK?*, 79
- *COLOR-PLIST*, 71
- *COLOR-TABLE*, 71
- *COLOR-TABLE-DECIMAL*, 71
- *COLORS-DEFAULT*, 71
- *COMPILE-CIRCULAR-REFERENCE-DETECTION?*, 71
- *COMPILE-DEPENDENCY-TRACKING?*, 71
- *COMPILE-DOCUMENTATION-DATABASE?*, 71
- *COMPILE-FOR-DGDL?*, 71
- *COMPILE-SOURCE-CODE-DATABASE?*, 71
- *CURVE-CHORDS*, 71
- *DEVELOPING?*, 79
- *ENSURE-LISTS-WHEN-BASHING?*, 71
- *ENT*, 79
- *FAILED-REQUEST-URL*, 79
- *GS-GRAPHICS-ALPHA-BITS*, 77
- *GS-TEXT-ALPHA-BITS*, 77
- *HASH-TRANSFORMS?*, 77
- *INSTANCE-HASH-TABLE*, 79
- *JUMP-TO-TOPLEVEL-ON-SET-SELF?*, 79
- *LOAD-DOCUMENTATION-DATABASE?*, 71
- *LOAD-SOURCE-CODE-DATABASE?*, 71
- *MAX-ID-VALUE*, 79
- *OUT-OF-BOUNDS-SEQUENCE-REFERENCE-ACTION?*, 71
- *QUERY*, 79
- *REAP-EXPIRED-SESSIONS?*, 79
- *RECOVERY-URL-DEFAULT*, 79
- *REMEMBER-PREVIOUS-SLOT-VALUES?*, 71
- *REQ*, 79
- *ROOT-CHECKING-ENABLED?*, 71
- *RUN-WITH-CIRCULAR-REFERENCE-DETECTION?*, 71
- *RUN-WITH-DEPENDENCY-TRACKING?*, 71
- *UNDECLARED-PARAMETERS-ENABLED?*, 71
- *ZERO-EPSILON*, 71
- *ZERO-VECTOR-CHECKING?*, 77
- *slime-repl...*, 9
- +PHI+, 71
- ACOSD, 74
- ADD-MATRICES, 74
- ADD-VECTORS, 74
- AJAX, 55
- ALIGNMENT, 74
- ALIST2PLIST, 68
- ALWAYS, 68
- ANGLE-BETWEEN-VECTORS, 74
- ANGLE-BETWEEN-VECTORS-D, 75
- ANGULAR-DIMENSION, 72
- APPEND-ELEMENTS, 68
- APPLICATION-MIXIN, 77
- APPLY-MAKE-POINT, 75
- ARC, 72
- ARCOID-MIXIN, 72
- ARRAY-TO-3D-VECTOR, 75
- ARRAY-TO-LIST, 75
- ASIND, 75
- ASSEMBLY, 80
- ATAND, 75
- BASE-AJAX-GRAPHICS-SHEET, 77
- BASE-AJAX-SHEET, 77
- BASE-COORDINATE-SYSTEM, 72

- BASE-DRAWING, 72
- BASE-FORM-CONTROL, 77
- BASE-HTML-GRAPHICS-SHEET, 77
- BASE-HTML-SHEET, 77
- BASE-OBJECT, 72
- BASE-RULE-OBJECT, 67
- BASE-VIEW, 72
- BASE-YADD-SHEET, 80
- BASE64-DECODE-LIST, 78
- BASE64-DECODE-SAFE, 78
- BASE64-ENCODE-LIST, 78
- BASE64-ENCODE-SAFE, 78
- Basic Lisp Techniques, 2
- BEZIER-CURVE, 72
- BOX, 72
- C-CYLINDER, 72
- Caching, 1
- CENTER-LINE, 72
- CHECKBOX-FORM-CONTROL, 77
- CIRCLE, 72
- CL-LITE, 68
- CL-PATCH, 67
- CLEAR-ALL-INSTANCES, 78
- CLEAR-INSTANCE, 79
- CLEAR-OLD-TIMERS, 79
- CODEBASE-DIRECTORY-NODE, 67
- COINCIDENT-POINT?, 75
- Common Lisp, 2
- compiled language
 - benefits of, 2
- computed-slots, 30
- CONE, 72
- containment
 - object, 32
- CREATE-OBLIQUENESS, 75
- CROSS-VECTORS, 75
- CYCLIC-NTH, 68
- CYLINDER, 73
- declarative, 2
- DEFAULTING, 68
- DEFINE-FORMAT, 68
- DEFINE-LENS, 68
- DEFINE-OBJECT, 68
- Define-object, 30
- DEFINE-OBJECT-AMENDMENT, 68
- DEGREE, 75
- DEGREES-TO-RADIANS, 75
- Dependency tracking, 1
- DISTANCE-TO-LINE, 75
- DIV, 68
- DOT-VECTORS, 75
- ELLIPSE, 73
- ENSURE-LIST, 68
- EQUI-SPACE-POINTS, 75
- FIND-MESSAGES-USED-BY, 68
- FIND-MESSAGES-WHICH-USE, 68
- FLATTEN, 68
- FORMAT-SLOT, 68
- FROUND-TO-NEAREST, 69
- functions, 30
- gdl-ajax-call, 58
- gdl-user(1): , 9
- GENERAL-NOTE, 73
- Genworks GDL Console, 7
- Genworks Gendl Console, 7
- GEOMETRY-VIEW-MIXIN, 77
- GET-U, 75
- GET-V, 75
- GET-W, 75
- GET-X, 75
- GET-Y, 75
- GET-Z, 75
- GLOBAL-FILLETED-POLYGON-PROJECTION, 73
- GLOBAL-FILLETED-POLYLINE, 73
- GLOBAL-FILLETED-POLYLINE-MIXIN, 73
- GLOBAL-POLYGON-PROJECTION, 73
- GLOBAL-POLYLINE, 73
- GLOBAL-POLYLINE-MIXIN, 73
- GRID-FORM-CONTROL, 78
- GWL-MAKE-OBJECT, 79
- GWL-RULE-OBJECT, 78
- HALF, 69
- HORIZONTAL-DIMENSION, 73
- Ignorance-based Engineering, 1
- IGNORE-ERRORS-WITH-BACKTRACE, 69

- INDEX-FILTER, 69
- input-slots, 30
- INTER-CIRCLE-SPHERE, 75
- INTER-LINE-PLANE, 75
- INTER-LINE-SPHERE, 75
- ISO-8601-DATE, 69
- Knowledge Base System, 1
- LABEL, 73
- LASTCAR, 69
- LAYOUT-MIXIN, 78
- LEADER-LINE, 73
- LEAST, 69
- LENGTH-VECTOR, 75
- LINE, 73
- LINEAR-DIMENSION, 73
- LIST-ELEMENTS, 69
- LIST-OF-NUMBERS, 69
- macros
 - code-expanding, 2
- make-instance, 31
- MAKE-KEYWORD, 69
- MAKE-OBJECT, 69
- make-object, 31
- MAKE-POINT, 75
- MAKE-TRANSFORM, 75
- MAKE-VECTOR, 75
- MAPSEND, 69
- MAPTREE, 69
- MASTER-INDEX, 80
- MATRIX*VECTOR, 75
- MATRIX-SEQUENCE, 67
- MATRIX-TO-QUATERNION, 76
- MAX-OF-ELEMENTS, 69
- MENU-FORM-CONTROL, 78
- MERGE-DISPLAY-CONTROLS, 76
- MIDPOINT, 76
- MIN-OF-ELEMENTS, 69
- mixin-list, 30
- MOST, 69
- MULTIPLY-MATRICES, 76
- NEAR-TO?, 69
- NEAR-ZERO?, 69
- NEVER, 69
- NEWERTREE, 80
- NODE-MIXIN, 78
- NULL-OBJECT, 68
- NUMBER-FORMAT, 69
- NUMBER-ROUND, 69
- object sequences, 33
- object-orientation
 - generic-function, 2
 - message-passing, 2
- Objects
 - sequenced, 33
- objects, 30, 32
 - child, 32
 - contained, 32
 - defining, 30
- ORTHOGONAL-COMPONENT, 76
- PACKAGE-DOKUMENTATION, 80
- PACKAGE-FORM, 80
- PARALLEL-DIMENSION, 73
- PARALLEL-VECTORS?, 76
- PI/2, 71
- PIE-CHART, 74
- PLIST-KEYS, 69
- PLIST-VALUES, 69
- POINT, 74
- PRINT-MESSAGES, 69
- PRINT-VARIABLES, 69
- PROJ-POINT-ON-LINE, 76
- PROJECTED-VECTOR, 76
- PUBLISH-GWL-APP, 79
- PUBLISH-SHARED, 79
- PUBLISH-STRING-CONTENT, 79
- PYTHAGORIZE, 76
- QUANTIFICATION, 68
- QUATERNION-TO-MATRIX, 76
- QUATERNION-TO-ROTATION, 76
- RADIAL-SEQUENCE, 68
- RADIANS-TO-DEGREES, 76
- RADIANS-TO-GRADS, 76
- RADIO-FORM-CONTROL, 78
- READ-SAFE-STRING, 69

- READ-SNAPSHOT, 69
- reference chains, 32
- regression tests, 11
- RELATIVIZE-PATHNAME, 79
- REMOVE-PLIST-ENTRY, 69
- RENDERER-MIXIN, 74
- REVERSE-VECTOR, 76
- ROLL, 76
- ROTATE-POINT, 76
- ROTATE-POINT-D, 76
- ROTATE-VECTOR, 76
- ROTATE-VECTOR-D, 76
- ROTATION, 76
- ROUND-TO-NEAREST, 70
- ROUTE-PIPE, 74
- SAFE-FLOAT, 70
- SAFE-SORT, 70
- SAME-DIRECTION-VECTORS?, 76
- SAMPLE-DRAWING, 74
- SCALAR*MATRIX, 76
- SCALAR*VECTOR, 76
- self, 31
- sequences, 33
- SESSION-CONTROL-AUTO-REFRESH, 79
- SESSION-CONTROL-MIXIN, 78
- SESSION-REPORT, 79
- SET-FORMAT-SLOT, 70
- SHEET-SECTION, 78
- SKELETON-FORM-CONTROL, 78
- SKELETON-UI-ELEMENT, 78
- SORT-POINTS-ALONG-VECTOR, 76
- specification-plist, 30
- SPHERE, 74
- SPHERICAL-CAP, 74
- SPLIT, 70
- STANDARD-SEQUENCE, 68
- STATUS-MESSAGE, 70
- STRING-APPEND, 70
- SUBTRACT-VECTORS, 76
- SUM-ELEMENTS, 70
- TEXT-FORM-CONTROL, 78
- TEXT-LINE, 74
- THE, 70
- the, 31
- THE-CHILD, 70
- THE-ELEMENT, 70
- THE-OBJECT, 70
- the-object, 31
- TORUS, 74
- TRANSFORM-AND-TRANSLATE-POINT, 76
- TRANSFORM-NUMERIC-POINT, 76
- TRANSLATE, 76
- TRANSLATE-ALONG-VECTOR, 77
- TRANSPOSE-MATRIX, 77
- TREE, 80
- TWICE, 70
- TYPESET-BLOCK, 74
- UNDEFINE-OBJECT, 70
- UNITIZE-VECTOR, 77
- UNIVERSAL-TIME-FROM-ISO-8601, 70
- VANILLA-MIXIN*, 68
- VARIABLE-SEQUENCE, 68
- VERTICAL-DIMENSION, 74
- WEB-DRAWING, 78
- WITH-CL-WHO, 79
- WITH-CL-WHO-STRING, 79
- WITH-ERROR-HANDLING, 70
- WITH-FORMAT, 70
- WITH-FORMAT-SLOTS, 70
- WITH-HTML-FORM, 79
- WRITE-ENV, 70
- WRITE-PLIST, 70
- WRITE-THE, 70
- WRITE-THE-OBJECT, 70
- ZERO-VECTOR?, 77