# Report Reproducibly with

Slides CC BY-SA RStudio

Navigate to the **05-Report** folder.

Open **05-Report-Exercises.Rmd**

# R Markdown

# R Markdown

Plain text file with 3 types of content:

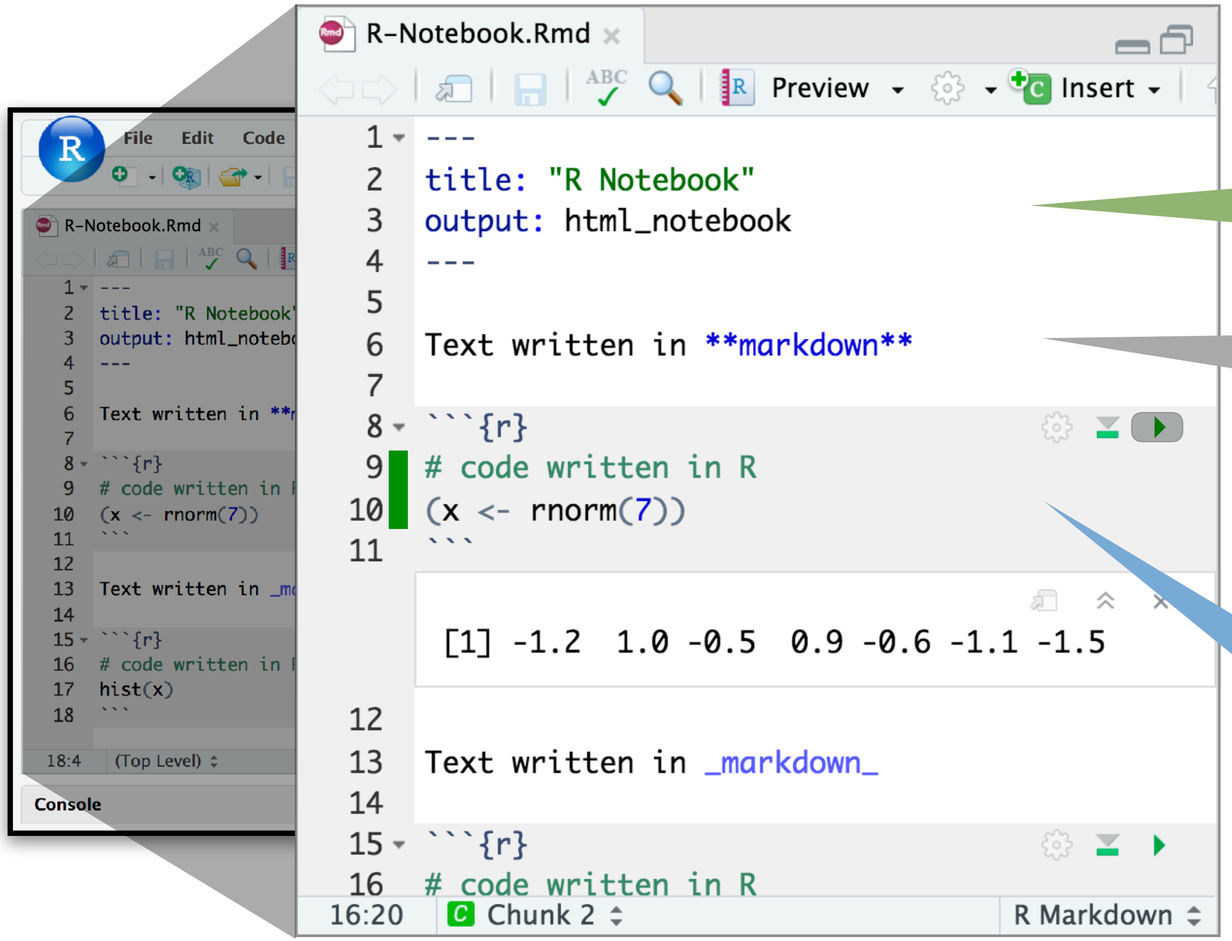


A YAML header surrounded by — — —

Text in markdown

Code chunks surrounded by ` ` `

CC BY-SA RStudio

# How it works

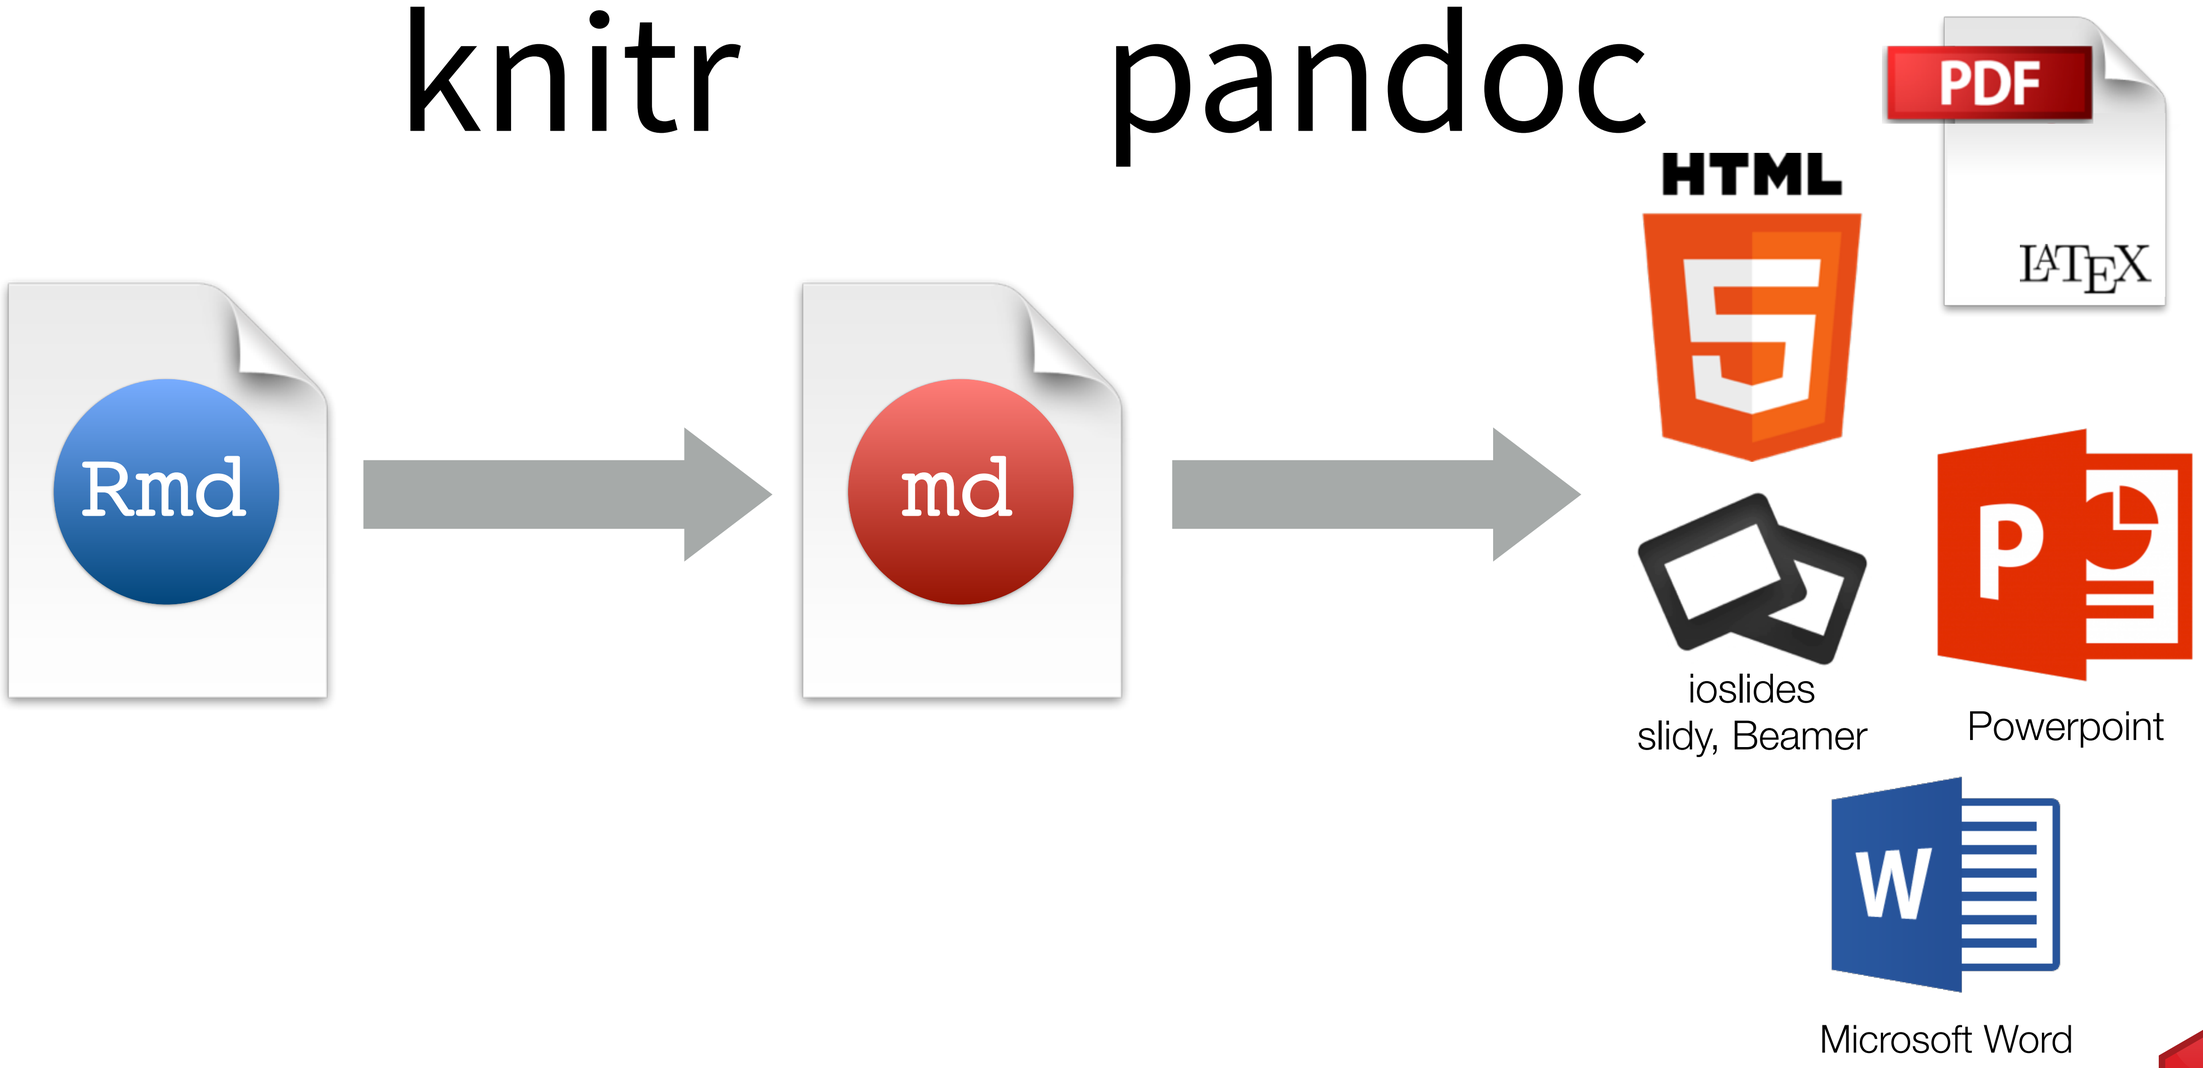


CC BY-SA RStudio

# Logistics

**1** Knitr runs the document in a fresh R session, which means you need to load the libraries that the document uses *in the document*

CC BY-SA RStudio

# Logistics

1 Knitr runs the document in a fresh R session, which means you need to load the libraries that the document uses *in the document*

2 Objects made in one code chunk will be available to code in later code chunks.

CC BY-SA RStudio

# KNITR IS MULTI-LINGUAL!

- ☑ SAS
- ☑ PYTHON
- ☑ MORE

CC BY-SA RStudio

# engine

python

To embed non R code, change the chunk label from r to the language to use.

```
Some python code,
```{python}
x = 'hello, python world!'
print(x)
print(x.split(' '))
```
```

Some python code:

```
x = 'hello, python world!'
print(x)
print(x.split(' '))
```

```
## hello, python world!
## ['hello,', 'python', 'world!']
```

CC BY-SA RStudio

# Reticulate

## Python in R Markdown

(Optional) Build Python env to use.

Add **knitr::knit_engines$set(python = reticulate::eng_python)** to the setup chunk to set up the reticulate Python engine (not required for knitr >= 1.18).

Suggest the Python environment to use, in your setup chunk.

Begin Python chunks with **```{python}**. Chunk options like **echo**, **include**, etc. all work as expected.

Use the **py** object to access objects created in Python chunks from R chunks.

Python chunks all execute within a **single** Python session so you have access to all objects created in previous chunks.

Use the **r** object to access objects created in R chunks from Python chunks.

Output displays below chunk, including matplotlib plots.

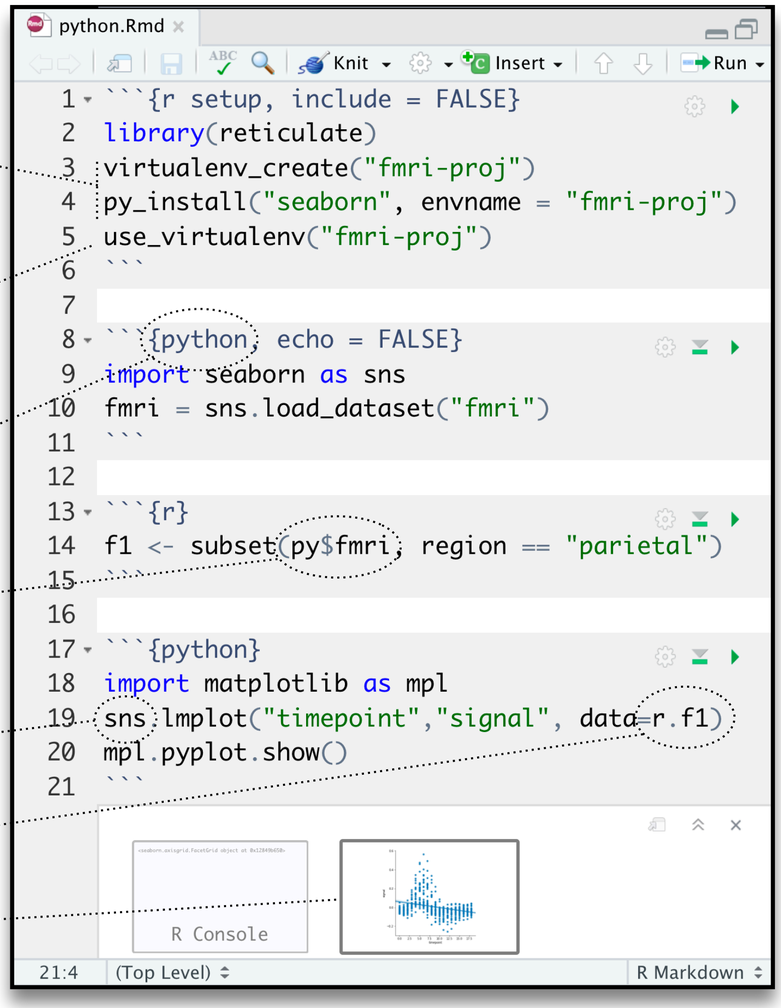


A package for using R and Python together.

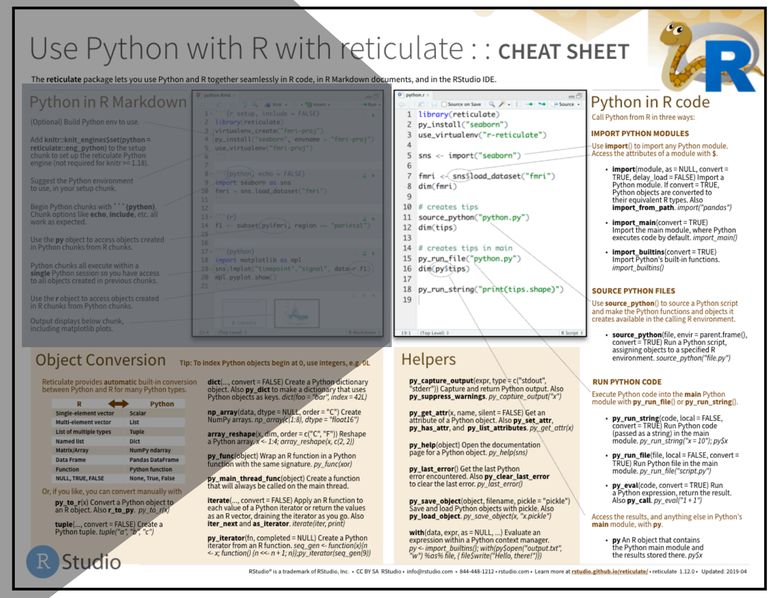

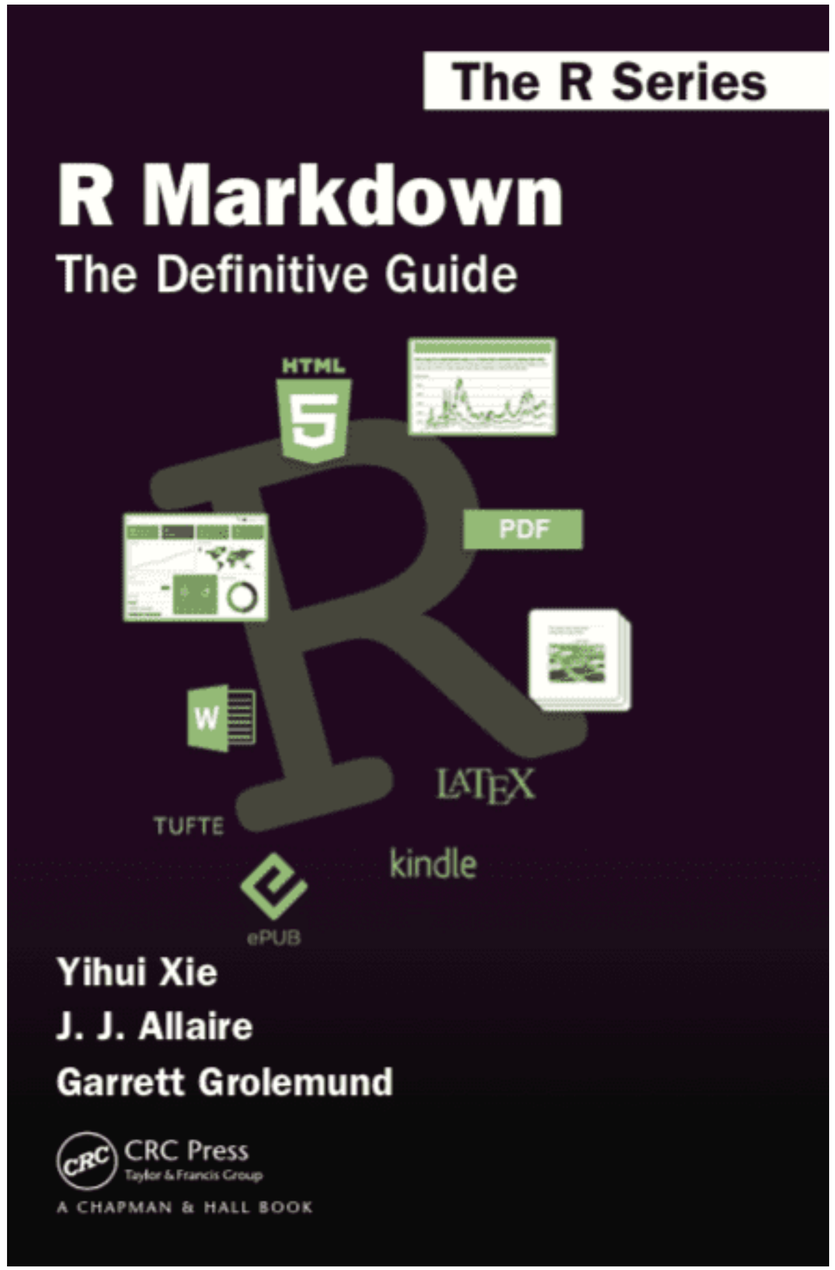


bookdown.org/yihui/rmarkdown/

ONLINE, FREE

CC BY-SA RStudio

# Markdown

R-Notebook.Rmd

Preview Insert

```
---
title: "R Notebook"
output: html_notebook
---

Text written in **markdown**

```{r}
# code written in R
(x <- rnorm(7))
```

[1] -1.2  1.0 -0.5  0.9 -0.6 -1.1 -1.5

Text written in _markdown_

```{r}
# code written in R
```
```

16:20 Chunk 2 R Markdown

Text in markdown

# Headers

Use # to create headers.
Multiple #'s create lower level headers.

```
# Header 1
## Header 2
### Header 3
#### Header 4
##### Header 5
###### Header 6
```

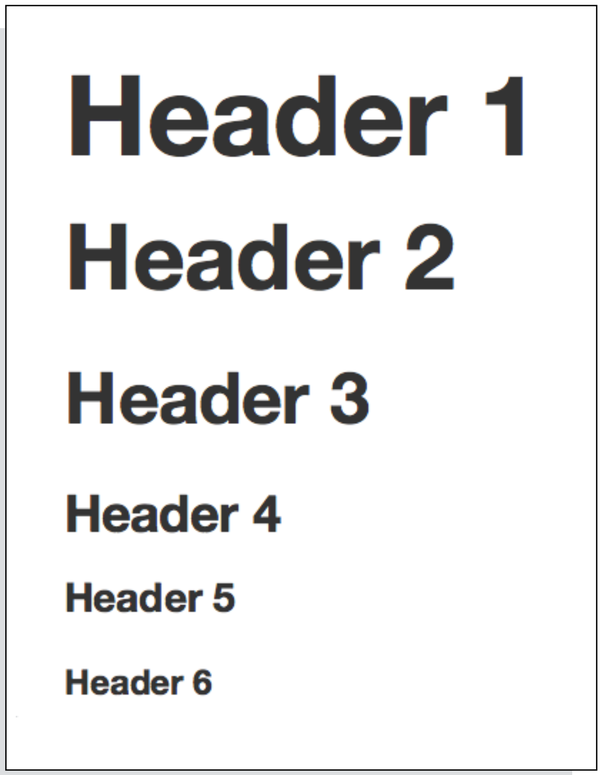


CC BY-SA RStudio

# Text

Add two spaces at the end of a line to start a new line

Text is rendered as plain text. Surround text with _, **, or ` to format it.

```
Text
_italics_
**bold**
`code`
```

Text
*italics*
**bold**
`code`



CC BY-SA RStudio

# Lists

Use asterisks to make bullet points.
Use numbers to make numbered lists.

```
Bullets

* bullet 1
* bullet 2

Numbered list

1. item 1
2. item 2
```

Bullets

- bullet 1
- bullet 2

Numbered list

1. item 1
2. item 2

CC BY-SA RStudio

# Hyperlinks

Use brackets to denote a link.
Place the URL in parentheses.

```
This is a
[link](www.git.com).
```

This is a link.

CC BY-SA RStudio

# Images

Use a link preceded by an ! to insert an image.

*The link text should be a URL (if the image is hosted online), or a file path (if the image is saved as a file)*

```
![](images/1.png)
The RStudio logo.
```

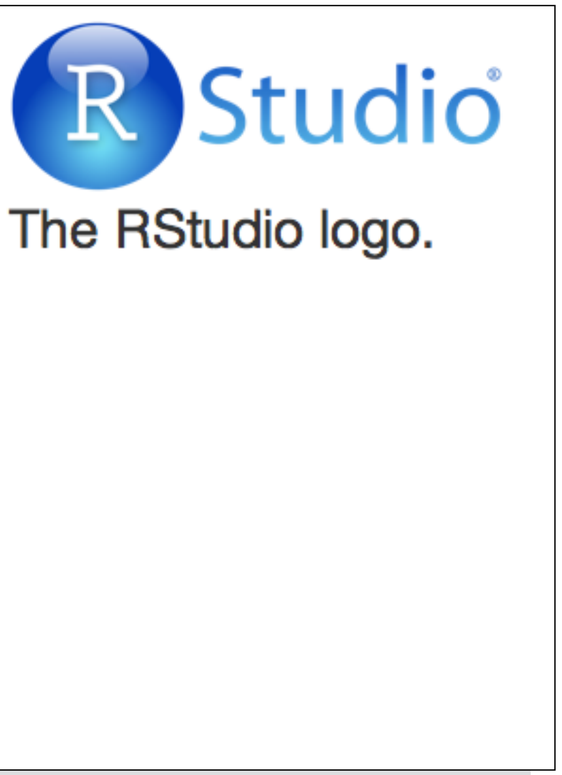


CC BY-SA RStudio

# Equations

Write equations with latex math commands and surround them in $'s.

```
According to
Einstein,
$E=mc^{2}$
```

According to Einstein, $E = mc^2$

CC BY-SA RStudio

# Equation blocks

Use two $'s to make centered equation blocks.

```
According to Einstein,

$$E=mc^{2}$$
```

According to Einstein,

$$E = mc^2$$

CC BY-SA RStudio

# Markdown

## Dictionary of formatting cues.

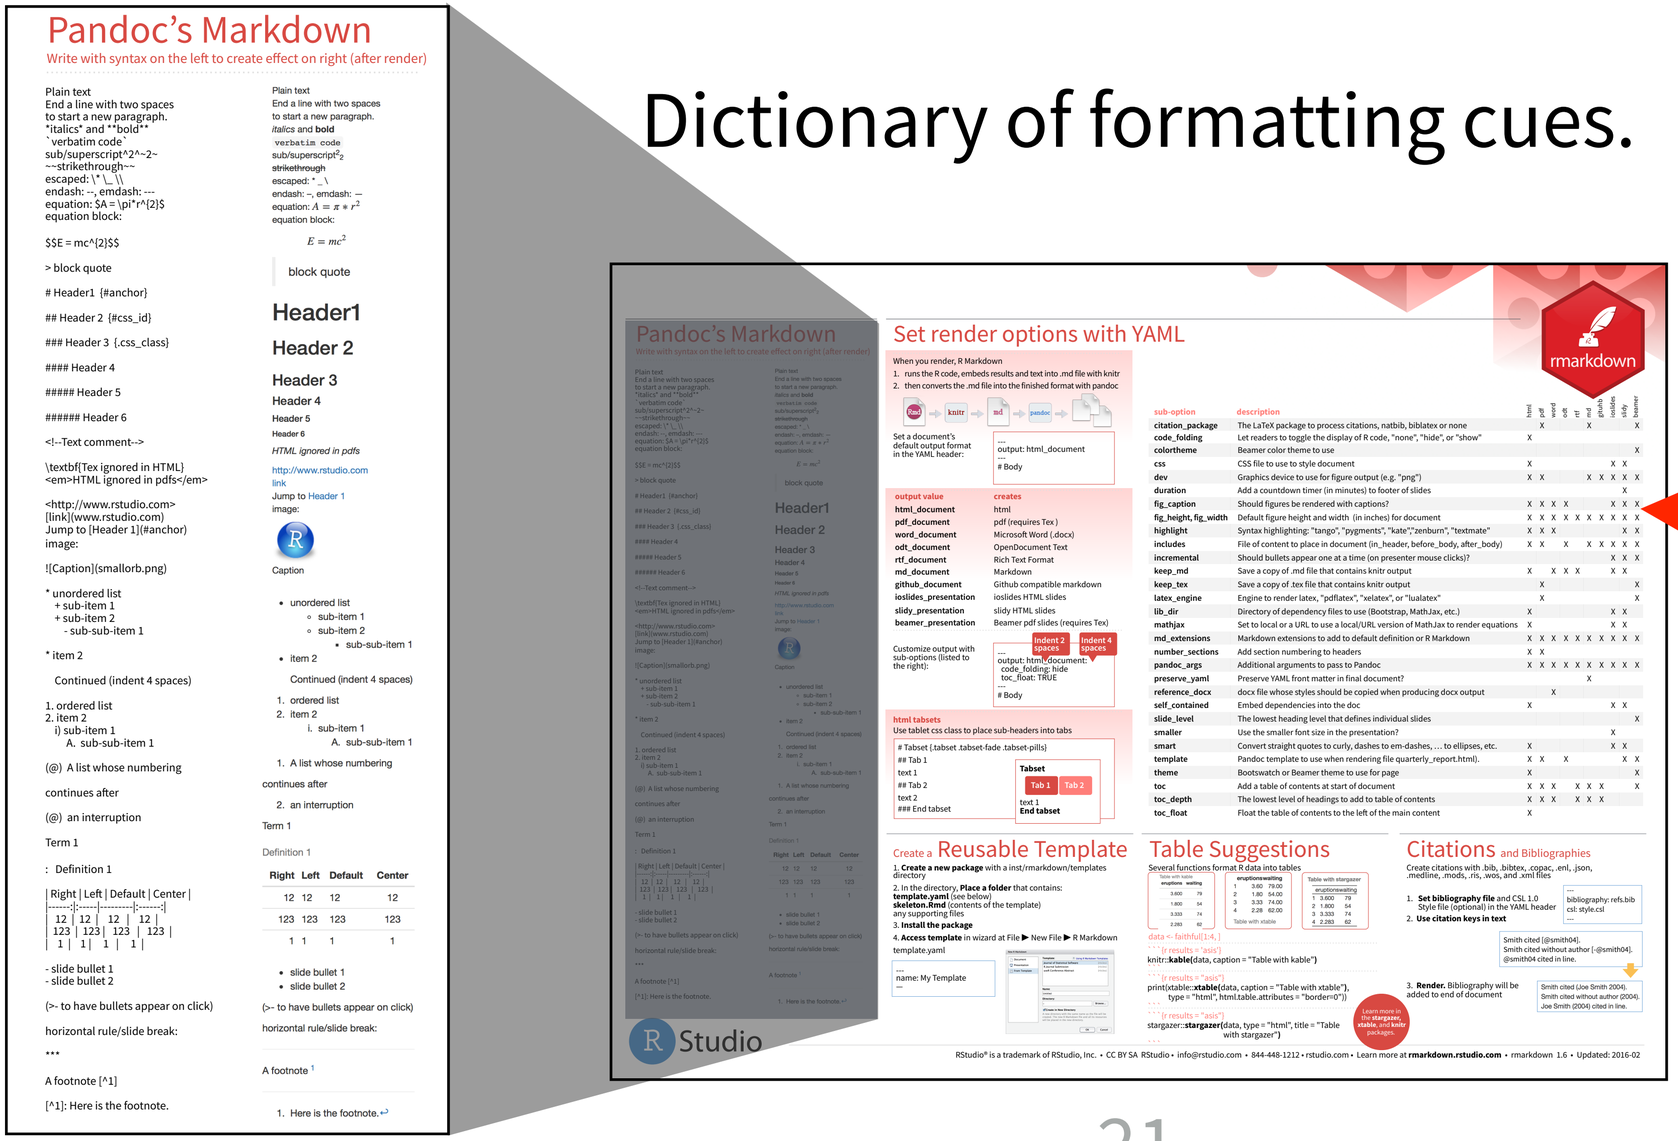


ON BACK OF RMARKDOWN CHEAT SHEET

# IDE Reference

## Go to **Help > Markdown Quick Reference**

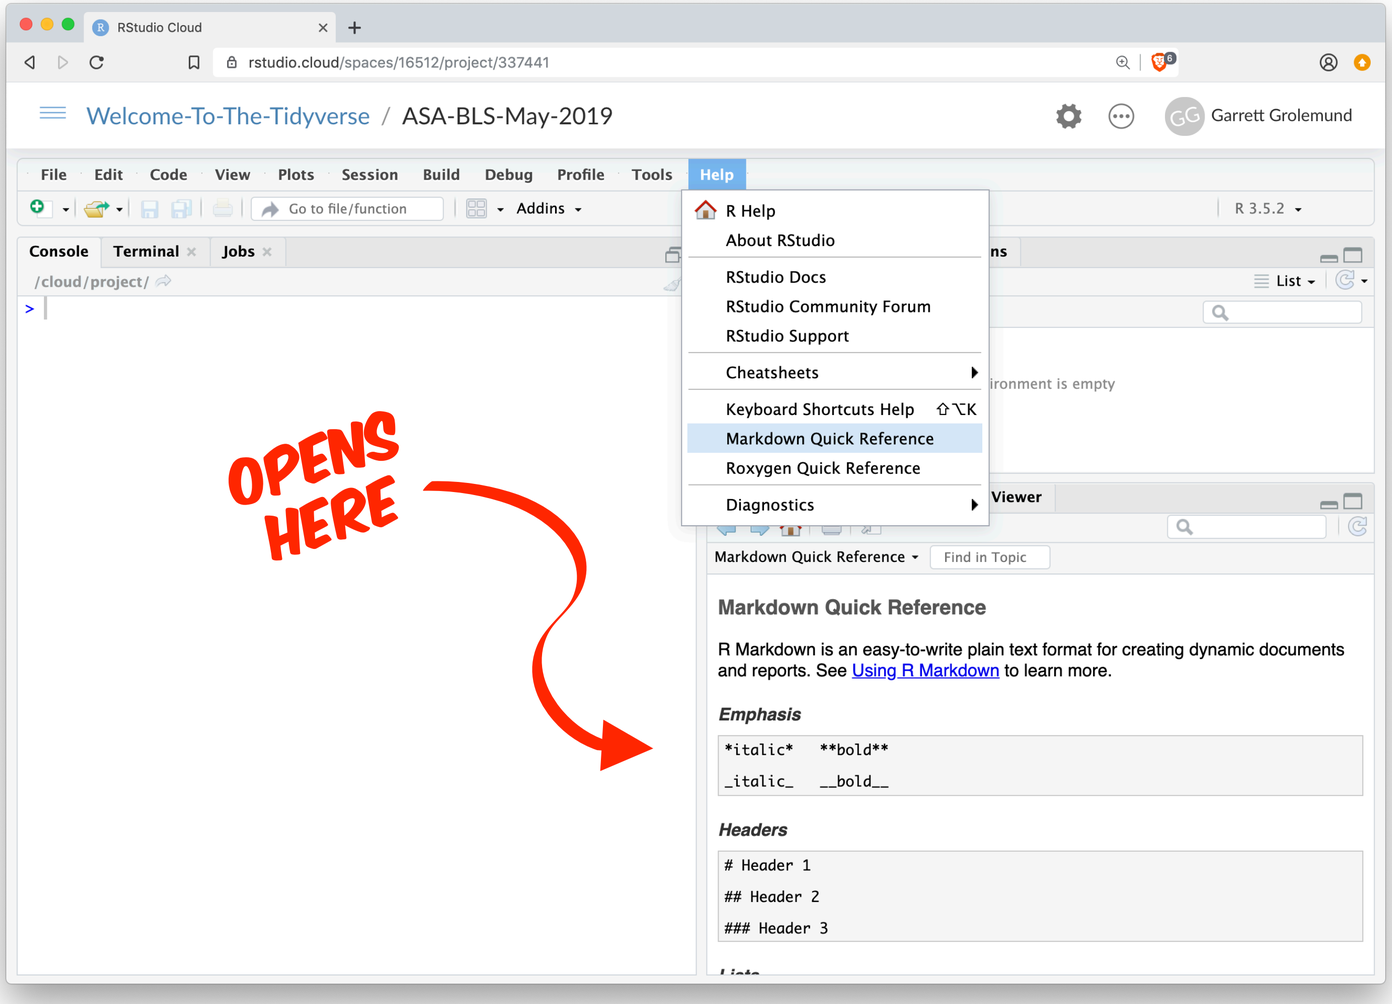

# Code

R-Notebook.Rmd

Preview Insert

```
---
title: "R Notebook"
output: html_notebook
---

Text written in **markdown**

```{r}
# code written in R
(x <- rnorm(7))
```

[1] -1.2  1.0 -0.5  0.9 -0.6 -1.1 -1.5

Text written in _markdown_

```{r}
# code written in R
```
```

16:20 Chunk 2 R Markdown

Code chunks surrounded by ```

# Code chunks

Insert a chunk of R code with

```
```{r}
# some code
```
```

When you render the report, R Markdown will run the code and include its results. R Markdown will also remove the ```{r} and ```.

CC BY-SA RStudio

# Code chunks

Insert a chunk of R code with

```
```{r}
# some code
```
```

⌘ + Opt + i (Mac)

Ctrl + Alt + i (PC)

CC BY-SA RStudio

# chunk options

By default, R Markdown includes both the code and its results

```
Here's some code
```{r}
dim(iris)
```
```

Here's some code

```
dim(iris)
```

```
## [1] 150   5
```

CC BY-SA RStudio

# echo

Add options in the brackets after r.

**echo = FALSE** hides the code.

```
Here's some code
```{r echo=FALSE}
dim(iris)
```
```

Here's some code

```
## [1] 150   5
```

Very useful for plots

CC BY-SA RStudio

# eval

**eval = FALSE** prevents the code from being run. As a result, no results will be displayed with the code.

```
Here's some code
```{r eval=FALSE}
dim(iris)
```
```

Here's some code

```
dim(iris)
```

CC BY-SA RStudio

# include

**include = FALSE** runs the code, but prevents both the code and the results from appearing (e.g. to setup).

```
Here's some code
```{r include=FALSE}
dim(iris)
```
```

Here's some code

CC BY-SA RStudio

# fig.height, fig.width

Specify the dimension of plots (in inches) with fig.width and fig.height. Separate multiple arguments with commas.

```
Here’s a plot
```{r echo=FALSE, fig.width=3, fig.height=5}
hist(iris[[2]])
```
```

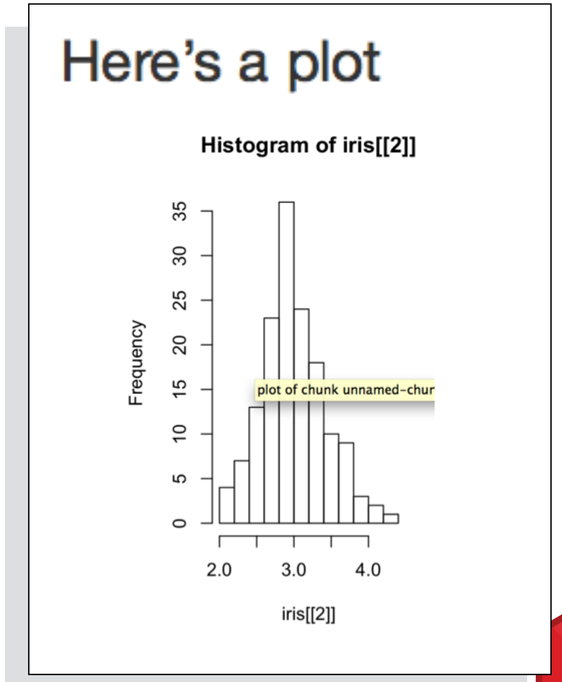


CC BY-SA RStudio

# Pop Quiz

Do you notice the **TODOs** in 05-RMarkdown-Exercises.Rmd?

Do you notice the long **setup** chunk**?**

CC BY-SA RStudio

# Inline code

Place code in a sentence with `` `r <code>` ``. R Markdown will replace the code with its results.

```
Today is
`r Sys.Date()`.
```

Today is 2015-04-16.

CC BY-SA RStudio

# Inline code

Code whose results are inserted into the text.

```
Today is `r Sys.Date()`.
```

**Surround with `r `**

**Code to run. Only the result will be included.**

CC BY-SA RStudio

# Your Turn 1

In **05-RMarkdown-Exercises.Rmd**:

1. Replace every Garrett with your name
2. Replace every TODO with inline R code
3. Check that the setup chunk is not included with the output
4. Ensure that only the output of the plot chunk is shown (not the code)
5. Knit the document

CC BY-SA RStudio

# YAML

R-Notebook.Rmd

Preview Insert

```
---
title: "R Notebook"
output: html_notebook
---

Text written in **markdown**

```{r}
# code written in R
(x <- rnorm(7))
```

[1] -1.2  1.0 -0.5  0.9 -0.6 -1.1 -1.5

Text written in _markdown_

```{r}
# code written in R
```
```

16:20 Chunk 2 R Markdown

A YAML header surrounded by — — —

# YAML

A section of key:value pairs
separated by dashed lines ———

```
---
title: "Untitled"
author: "RStudio"
date: "February 4, 2015"
output: html_document
---
Text of document
```

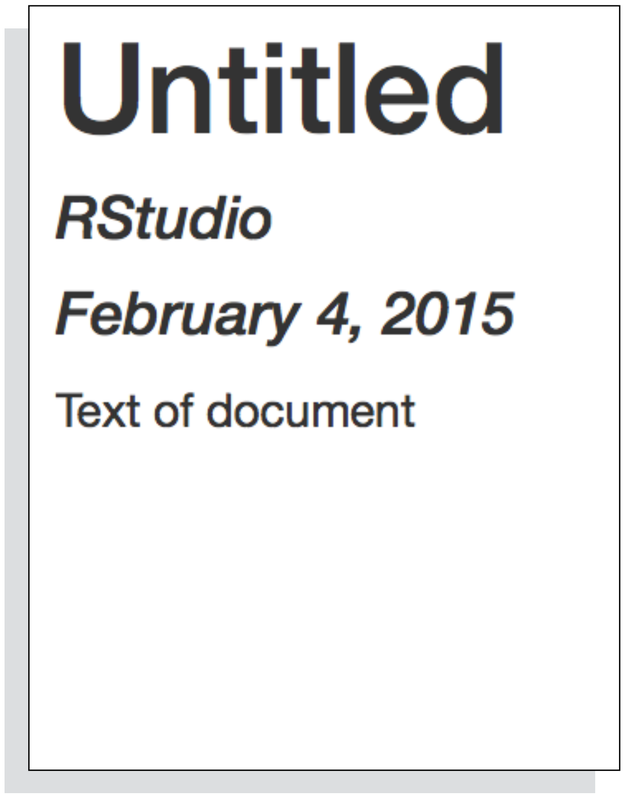


CC BY-SA RStudio

# output

The output: field sets the format of the final report

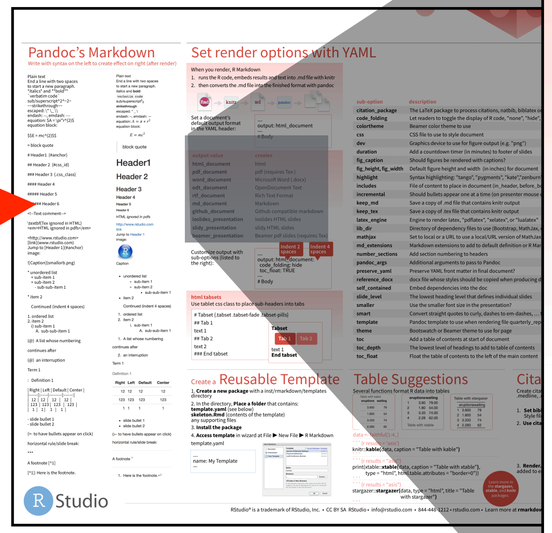


ON BACK

| output value | creates |
|---|---|
| html_document | html |
| pdf_document | pdf (requires Tex ) |
| word_document | Microsoft Word (.docx) |
| odt_document | OpenDocument Text |
| rtf_document | Rich Text Format |
| md_document | Markdown |
| github_document | Github compatible markdown |
| ioslides_presentation | ioslides HTML slides |
| slidy_presentation | slidy HTML slides |
| beamer_presentation | Beamer pdf slides (requires Tex) |

More at rmarkdown.rstudio.com/formats.html

CC BY-SA RStudio

# Parameters

# Your Turn 2

Open **05-RMarkdown-Parameters.Rmd**.

Click the dropdown menu next to Knit and use **Knit with Parameters** to render the document.

What happens if you type in a different name?

CC BY-SA RStudio

# Parameters

A list of values that you can call in R code chunks

params list

elements and values

```
---
title: "Untitled"
output: html_document
params:
  filename: "data.csv"
  symbol: "FB"
---
```

colon

New line. Indented two spaces

CC BY-SA RStudio

# Using Parameters

Call parameter values as elements of the params list, **`params$num`**

```
---
params:
  num: 42
---
The value of the
parameter is
`r params$num`, e.g.

```{r}
params$num
```
```

The value of the parameter is 42, e.g.

```
params$num
```

```
## [1] 42
```

CC BY-SA RStudio

# Demo

CC BY-SA RStudio

# Report Reproducibly with

Slides CC BY-SA RStudio

# Thank you

CC BY-SA RStudio

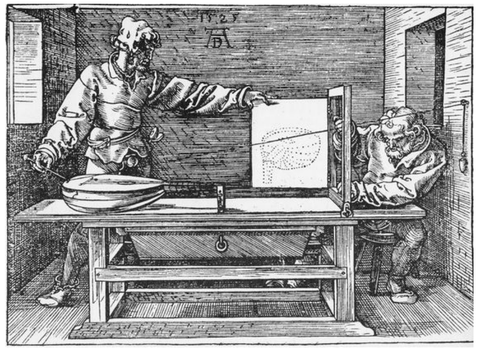

Please take the class survey
[rstd.io/class-survey](rstd.io/class-survey)

Editable course material at
[rstd.io/remaster-the-tidyverse](rstd.io/remaster-the-tidyverse)

Ask your questions
[community.rstudio.com](community.rstudio.com)

CC BY-SA RStudio