Geocoding runtime by input, method, and core count

Rows show allocated cores; columns show input files

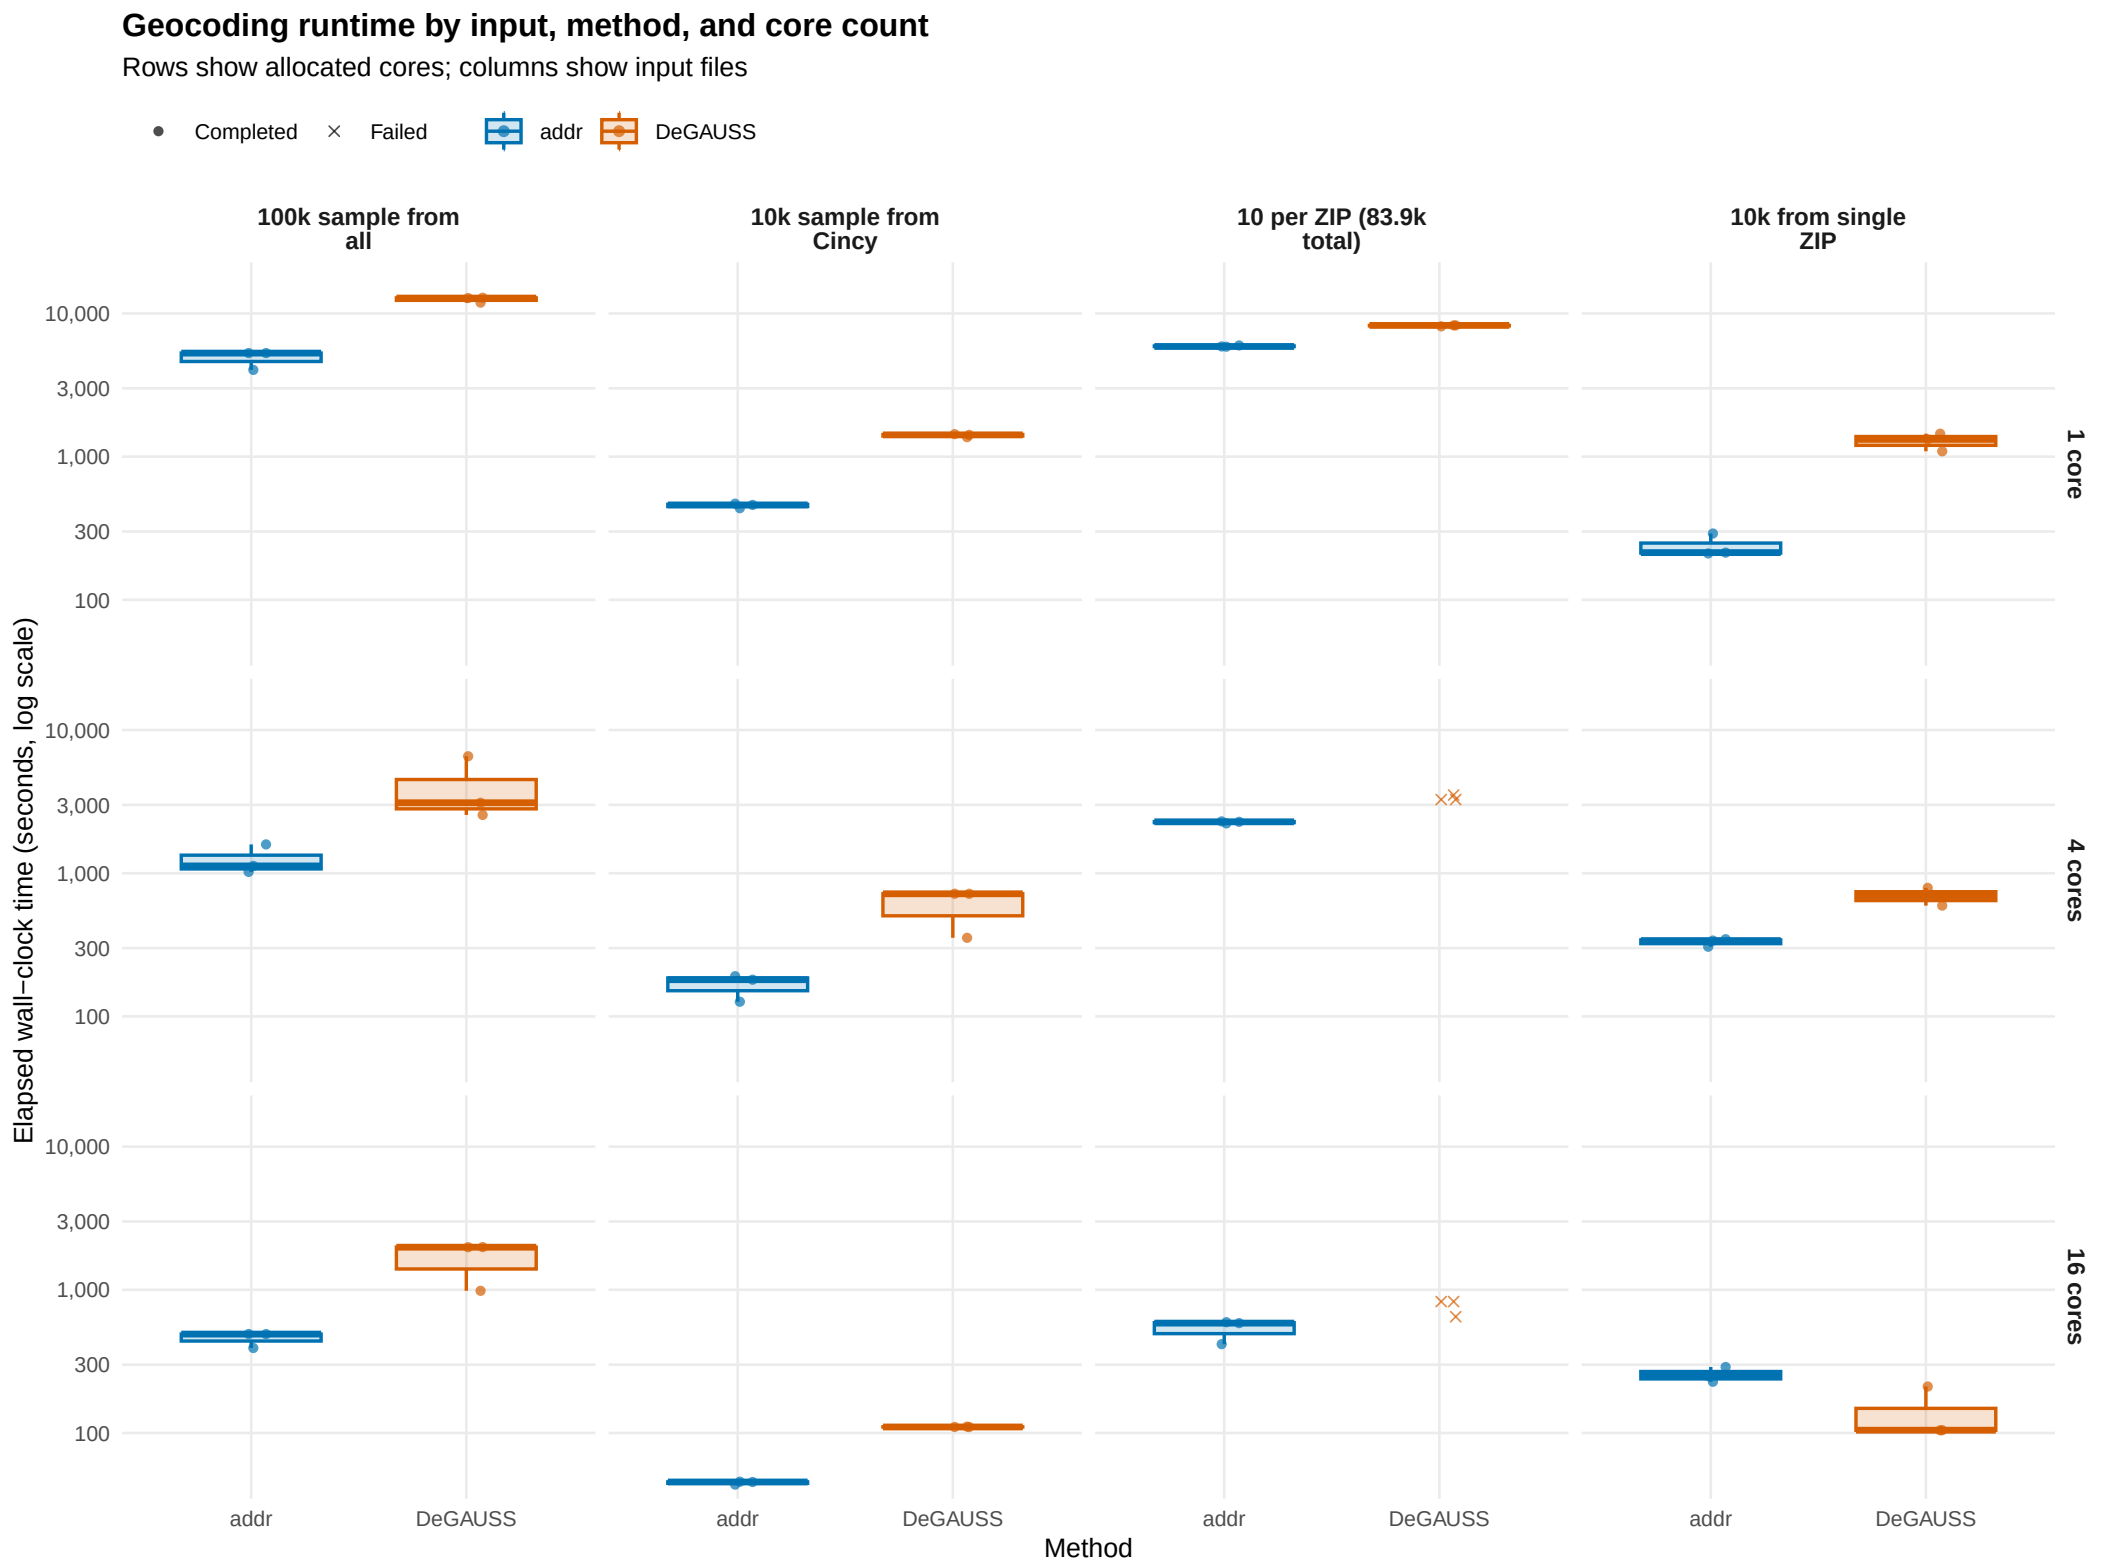

All allocated−core rows use the same logarithmic y−axis scale. Numbered input samples are limited to sample_1.
Whiskers extend to 1.5 times the interquartile range. An x marks an unsuccessful run and its time to failure.