

openclaw org crawl: what EQStack should take

Research wave R3, 2026-10-08. Sources: github.com/orgs/openclaw/repositories, shallow clones under scratchpad/research/r3/c. Diagrams: Typst + fletcher 0.5.8 (d2, dot, mmdc are not installed).

1. Executive summary

The org holds **95 repos** (listing pulled with `gh repo list openclaw --limit 500`, 2026-10-08). 65 are openclaw-internal infrastructure and are ignored. Most of the value is a **family of local-first Go “crawl” CLIs** for messengers, a few TypeScript libraries that fit EQStack’s stack, and a Node-compatible fork of Bun. Licences are MIT for 86 of 95 repos.

Ranked recommendations

1. **Bun: do not adopt the fork. Spike upstream Bun 1.4.2 as a dev and CI tool only.** Upstream oven-sh/bun is itself written in Rust from 1.4.x, so “the Rust Bun” is just current Bun. The openclaw fork is a Node-compatible patch queue (396 commits ahead, 7 behind, prerelease-only builds). Measured today: the `imgsg-mcp napi` addon loads under Bun; **better-sqlite3 does not** (`'better-sqlite3'` is not yet supported in Bun); `Ink` renders; `Vitest` runs. See Section 6.
2. **wacli (WhatsApp): thin wrapper.** New apps/whatsapp-mcp that spawns `wacli --read-only --json`. Effort M. Closest thing in the org to a messenger MCP source. Meta ToS risk, see Section 7.
3. **fs-safe: vendor as an npm dependency.** Root-bounded filesystem handles for attachment export and any tool that takes a relative path. Effort S.
4. **mcporter: skill or script around it.** Calls our own MCP servers from scripts and CI and can emit standalone CLIs. Effort S.
5. **clawpdf: vendor as an npm dependency** for PDF attachment text and page PNGs in the media-intel path. Effort S.
6. **agent-skills: cherry-pick skills** through `link-repo-skills`. Effort S.
7. **clawdex, imgscrawl, crawlkit: study only**, as input to the contacts-factorisation arc and the archive design. Effort S.
8. **gogcli, telecrawl: skill or script**, only when Calendar/Drive or Telegram are wanted. Effort S each.

Not analysed here: `openclaw/imgsg` and `openclaw/openclaw` (R1a/R1b). `imgsg` is listed in the table for completeness.

2. Landscape

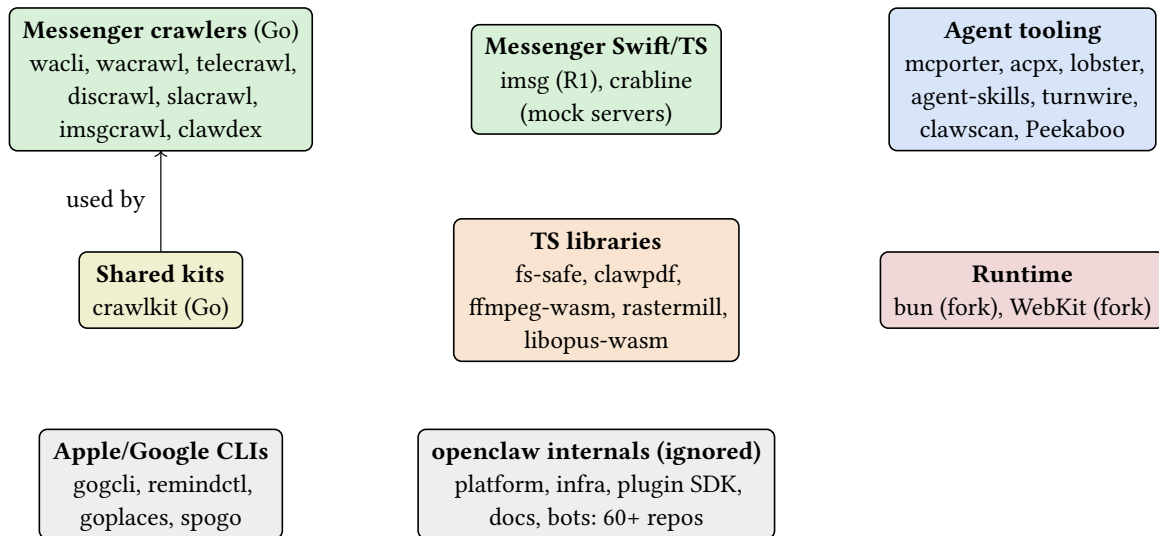


Figure 1: Repo landscape grouped by category. Green: messenger-relevant. Blue: agent tooling. Orange: libraries. Red: runtime.

3. How the picks plug into EQStack

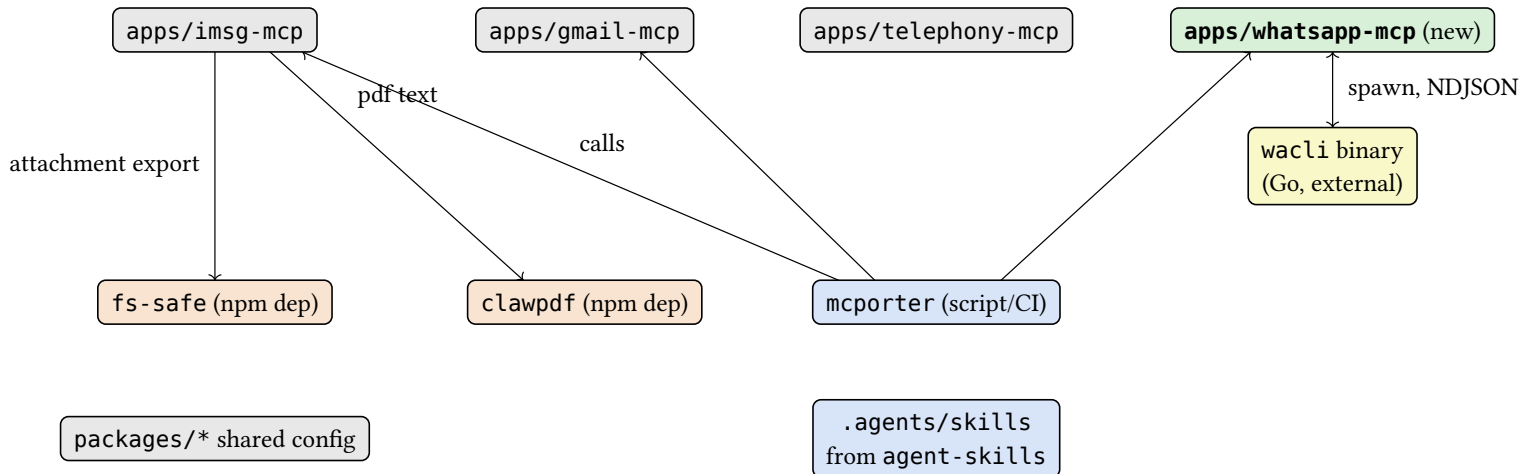


Figure 2: Proposed wiring. Only whatsapp-mcp is new code; the rest are dependencies or scripts.

4. Full triage table

All 95 repos. Columns: repo, category, language, stars, last push, licence (fork parent), relevance (H/M/L), verdict and effort, note. Verdict key: vendor = take as dependency or workspace package; wrapper = thin MCP/TS wrapper; skill = skill or script around the binary; study = read, do not adopt; ignore. Rows marked “not inspected” rely on the GitHub description only. Rows for `ormsg` and `bun` point to other sections.

repo	cat.	lang	stars	pushed	licence	rel.	verdict	note
clawhub	Agent tooling	TypeScript	9,494	2026-10-07	MIT	L	study S	Skill/plugin registry; not inspected
Peekaboo	Agent tooling	Swift	5,260	2026-10-07	MIT	M	study S	macOS screenshot/UI-automation CLI+MCP; overlaps shot, mirror, computer-lease
mcporter	Agent tooling	TypeScript	5,053	2026-10-07	MIT	H	skill S	Call/compose MCP servers from TS or generate CLIs; TS, MIT, Node 24
acpx	Agent tooling	TypeScript	3,321	2026-10-07	MIT	M	study S	Headless ACP client; relevant to delegating-work fan-out
clawsweeper	Agent tooling	TypeScript	1,994	2026-10-08	MIT	L	ignore -	Issue/PR triage bot for openclaw
crabbox	Agent tooling	Go	1,452	2026-10-08	MIT	L	study S	Warm box + sync diff + run suite; remote test runner idea
lobster	Agent tooling	TypeScript	1,269	2026-10-07	MIT	M	study S	Typed JSON workflow shell with approval gates
agent-skills	Agent tooling	Python	1,103	2026-10-07	MIT	M	skill S	Shared SKILL.md workflows (autoreview etc.); cherry-pick via link-repo-skills
clawpatch	Agent tooling	TypeScript	813	2026-10-07	MIT	L	ignore -	Review/patch bots; overlaps own skills
AXorcist	Agent tooling	Swift	324	2026-10-07	MIT	L	ignore -	Swift Accessibility wrapper
Tachikoma	Agent tooling	Swift	298	2026-10-07	MIT	L	ignore -	Swift multi-provider AI SDK
crabfleet	Agent tooling	Swift	239	2026-10-07	MIT	L	ignore -	Mission control for runs (Swift)
clawscan	Agent tooling	Go	142	2026-10-07	MIT	M	study S	Security scanning harness for agent skills; compare to skill-security-auditor
clownfish	Agent tooling	JavaScript	62	2026-10-08	MIT	L	ignore -	Maintainer codex harness
turnwire	Agent tooling	Go	12	2026-10-07	MIT	M	study S	Signed, audited MCP text relay; maps to EQStack thread-isolation rules
crabhelm	Agent tooling	TypeScript	3	2026-10-07	MIT	L	ignore -	Meta orchestrator
gogcli	Apple/Google	Go	8,483	2026-10-07	MIT	M	skill S	Workspace CLI (Gmail, Calendar, Drive...); Calendar/Drive via skill, Gmail stays in gmail-mcp
remindctl	Apple/Google	Swift	388	2026-10-07	MIT	L	skill S	Apple Reminders CLI; thin skill if wanted
spogo	Apple/Google	Go	263	2026-09-25	MIT	L	ignore -	Spotify CLI
goplaces	Apple/Google	Shell	261	2026-10-07	MIT	L	ignore -	Google Places CLI
songsee	Apple/Google	Go	81	2026-10-07	MIT	L	ignore -	Spectrogram CLI
openclaw	Core	TypeScript	391,611	2026-10-08	MIT	L	study S	The agent platform itself (391k stars); channel plugin API worth reading, out of R3 scope
community	Docs/Community	-	102	2026-09-14	MIT	L	ignore -	Discord policy
docs	Docs/Community	JavaScript	76	2026-10-08	MIT	L	ignore -	OpenClaw docs
ask-molty	Docs/Community	TypeScript	25	2026-09-25	MIT	L	ignore -	Docs builder
voice-community	Docs/Community	-	12	2026-08-20	MIT	L	ignore -	Empty
rfcs	Docs/Community	-	9	2026-09-25	MIT	L	ignore -	RFCs
.github	Docs/Community	-	8	2026-08-20	MIT	L	ignore -	Org files

repo	cat.	lang	stars	pushed	licence	rel.	verdict	note
carapace	Docs/ Community	JavaScript	6	2026-10-07	MIT	L	ignore -	Design tokens
nix-openclaw	Infra	Nix	712	2026-09-25	NOASSERTION	L	ignore -	Nix packaging
openclaw-ansible	Infra	Shell	600	2026-10-07	MIT	L	ignore -	Hardened install
openclaw-enterprise	Infra	JavaScript	365	2026-10-08	MIT	L	ignore -	Control plane
clawdinators	Infra	Nix	158	2026-10-07	MIT	L	ignore -	NixOS hosts
octopool	Infra	TypeScript	136	2026-10-07	MIT	L	ignore -	GitHub read relay
nix-openclaw-tools	Infra	Go	54	2026-10-07	MIT	L	ignore -	Nix tool packaging
homebrew-tap	Infra	Python	40	2026-10-07	MIT	L	ignore -	Brew tap; where wacli/telecrawl install from
clawrouter	Infra	JavaScript	39	2026-10-07	MIT	L	ignore -	Provider router
openclaw-rtt	Infra	JavaScript	33	2026-10-08	MIT	L	ignore -	Release timing
clawsweeper-state-archive-20260731	Infra	JavaScript	17	2026-09-25	MIT	L	ignore -	Archive
clawsweeper.bot	Infra	CSS	15	2026-07-27	MIT	L	ignore -	Website
releases	Infra	Python	13	2026-10-07	MIT	L	ignore -	Release ledger
catalog	Infra	JavaScript	11	2026-10-08	MIT	L	ignore -	Model catalog
Kova	Infra	JavaScript	11	2026-10-07	MIT	L	ignore -	Runtime validation lab
release-workflows	Infra	JavaScript	7	2026-10-07	MIT	M	study S	Reusable release workflows; compare with msr setup
clawsweeper-state	Infra	JavaScript	4	2026-10-08	MIT	L	ignore -	State store
telemetry	Infra	JavaScript	4	2026-10-03	MIT	L	ignore -	Update-check worker
clawgrit-reports	Infra	-	3	2026-10-07	none	L	ignore -	Perf reports
endor-clawsweeper-e2e	Infra	JavaScript	0	2026-10-01	none	L	ignore -	Fixture
clawpdf	Library	TypeScript	103	2026-10-07	MIT	M	vendor S	Zero-dep PDFium WASM text/PNG; PDF attachments in media-intel
libopus-wasm	Library	TypeScript	103	2026-09-25	MIT	L	ignore -	Opus packets; telephony uses mulaw
fs-safe	Library	TypeScript	62	2026-10-08	MIT	H	vendor S	Root-bounded fs primitives for untrusted paths; npm dependency
ffmpeg-wasm	Library	TypeScript	55	2026-10-07	MIT	M	study M	LGPL WASM ffmpeg; slower than native, native ffmpeg already usable
rastermill	Library	TypeScript	38	2026-10-07	MIT	L	study S	Photon-based image ops; compare to current image path
proxylane	Library	TypeScript	33	2026-10-01	MIT	L	ignore -	Process-global proxy routing
libterminal	Library	TypeScript	7	2026-10-07	MIT	L	ignore -	Terminal protocol primitives
uirouter	Library	TypeScript	4	2026-10-07	MIT	L	ignore -	Empty description
wacli	Messenger	Go	2,789	2026-10-07	MIT	H	wrapper M	WhatsApp CLI via whatsmeow; -json, --read-only; basis for a whatsapp MCP
imsg	Messenger	Swift	1,353	2026-10-07	MIT	H	see R1a/ R1b -	Swift iMessage CLI + JSON-RPC; analysed by siblings
discrawl	Messenger	Go	852	2026-10-07	MIT	M	study S	Discord archive; same crawlkit pattern; no EQStack Discord use
clickclack	Messenger	Go	297	2026-10-07	MIT	L	ignore -	Chat app for claws; not inspected
slacrawl	Messenger	Go	237	2026-10-07	MIT	M	study S	Slack archive; same pattern
wacrawl	Messenger	Go	204	2026-10-01	MIT	M	study S	WhatsApp archive crawler; second source if wacli insufficient
notcrawl	Messenger	Go	134	2026-10-07	MIT	L	ignore -	Notion crawler
gitcrawl	Messenger	Go	124	2026-10-07	MIT	L	ignore -	GitHub triage crawler
telecrawl	Messenger	Go	86	2026-10-07	MIT	M	skill S	Telegram Desktop tdata + Postbox reader; local only
crawlkit	Messenger	Go	62	2026-10-07	MIT	M	study S	Shared Go kit (store, backup, snapshot, tui); EQStack is TS so pattern only
clawdex	Messenger	Go	56	2026-10-01	MIT	H	study S	Contacts crawler to markdown repo; relevant to the contacts arc
crabline	Messenger	TypeScript	32	2026-10-07	MIT	M	study S	Deterministic mock servers for 12 channels incl. iMessage; QA pattern for telephony/imsg tests
graincrawl	Messenger	Go	25	2026-10-07	MIT	L	ignore -	Granola notes archive
crawlbar	Messenger	Swift	25	2026-10-07	MIT	L	ignore -	Menu bar for crawl apps
photoscrawl	Messenger	Go	22	2026-10-07	MIT	L	study S	Apple Photos crawler; media-intel adjacent; not inspected
imgscrawl	Messenger	Go	13	2026-10-03	MIT	H	study S	Go archive of Messages.db; overlaps imsg-mcp archive; read snapshot logic
openclaw-windows-node	Platform	C#	2,138	2026-10-08	MIT	L	ignore -	Windows companion (C#)
esp-openclaw-node	Platform	C	95	2026-10-01	Apache-2.0	L	ignore -	ESP32 node
clawgo	Platform	Go	85	2026-10-07	MIT	L	ignore -	Go node
caclawphony	Platform	Elixir	47	2026-09-25	Apache-2.0 (fork of openai/symphony)	L	ignore -	Fork of openai/symphony (Elixir)
flawd-bot	Platform	JavaScript	40	2026-10-07	CC0-1.0	L	ignore -	Joke bot
casa	Platform	Swift	37	2026-05-30	none	L	ignore -	Archived HomeKit bridge
Swabble	Platform	Swift	33	2026-10-07	MIT	L	ignore -	Wake-word daemon

repo	cat.	lang	stars	pushed	licence	rel.	verdict	note
openclaw-windows-packaging	Platform	C#	3	2026-10-08	MIT	L	ignore -	MSIX
openclaw-facetime	Platform	Objective-C	1	2026-10-07	MIT	L	ignore -	FaceTime capture
hermit	Plugin SDK	TypeScript	36	2026-10-07	MIT	L	ignore -	Empty description
cookbook	Plugin SDK	TypeScript	34	2026-09-25	MIT	L	study S	Example apps for OpenClaw SDK
plugin-inspector	Plugin SDK	JavaScript	25	2026-10-07	MIT	L	ignore -	Plugin compat checker
crabpot	Plugin SDK	JavaScript	19	2026-10-06	MIT	L	ignore -	Plugin testbed
kitchen-sink	Plugin SDK	JavaScript	10	2026-10-07	MIT	L	ignore -	Plugin fixture
tidepool	Plugin SDK	TypeScript	7	2026-10-07	MIT	L	ignore -	Toy plugins
reef	Plugin SDK	TypeScript	6	2026-10-07	MIT	L	ignore -	Empty description
krillswitch	Plugin SDK	TypeScript	3	2026-10-07	MIT	L	ignore -	Empty description
babelfish	Plugin SDK	TypeScript	1	2026-10-07	MIT	L	ignore -	Plugin adapter
openclaw-atif	Plugin SDK	TypeScript	1	2026-10-07	MIT	L	ignore -	Empty description
collab	Plugin SDK	TypeScript	0	2026-10-02	MIT	L	ignore -	Markdown co-editing
ocm	Runtime	Rust	20	2026-10-07	MIT	L	ignore -	Rust OpenClaw Manager; 20 stars
WebKit	Runtime	JavaScript	4	2026-10-07	none (fork of oven-sh/WebKit)	L	ignore -	Fork of oven-sh/WebKit (JSC); only for bun builds
bun	Runtime	Rust	2	2026-10-08	NOASSERTION (fork of oven-sh/bun)	NH	see bun section M	Fork of oven-sh/bun (now Rust); nightly prereleases

5. Deep dives

5.1. Messenger crawlers (Go, one family)

wacli, **telecrawl**, **imgscrawl**, **discrawl**, **slacrawl**, **wacrawl**, **clawdex** share the same shape: read a local or linked-device source, mirror into SQLite, expose search and send, offer `--json`, release signed Homebrew binaries. They sit on **crawlkit** (store, snapshot, backup, tui, vector, worker packages; **crawlkit/** @ 2cb2f08). Go 1.27+ is required to build. All are Go, so none can be a workspace package; the integration unit is the **binary**.

wacli (@ 8fe6a5a, MIT, 71k lines Go incl. tests): WhatsApp Web protocol through **whatsmeow**, pairs as a linked device, `--read-only` and `WACLI_READONLY=1`, `--json` for one-shot commands and `--events` for NDJSON lifecycle events (**wacli/** README.md: 61-74). Needs CGO and the `sqlite_fts5` tag to build from source; Homebrew and release archives avoid that. **Recommendation: thin wrapper (M)**. A TypeScript MCP that shells out to **wacli** mirrors how EQStack already shells out elsewhere, keeps granular control over which verbs are exposed (default read-only, send gated by the repo's "confirm before sending" rule), and avoids owning a WhatsApp protocol stack. Unknown: whether `--json` output is versioned/stable; whether concurrent invocations are safe on one store.

imgscrawl (@ 14a0b73, 8k lines): read-only SQLite snapshot of `chat.db`, bounded commands, archive (**imgscrawl/** internal/{archive,sqlitesnapshot,messages}). Overlaps **imgscrawl**, which is more featureful. **Study only (S)**: compare the snapshot approach with our fixtures-vs-real-DB boundary.

clawdex (@ 8b18778): contacts crawler into a private git-backed markdown repo. Relevant to the contacts factorisation work but a different storage model. **Study only (S)**.

telecrawl (@ e3444f3): reads Telegram Desktop `tdata` and macOS Postbox, age-encrypted GitHub backups. **Skill (S)** if Telegram history is ever wanted. **discrawl/slacrawl/wacrawl**: study only, no current EQStack channel.

crabline (@ 3d0cbee, TypeScript, pnpm, Node 22, MIT): deterministic local mock providers for 12 channels including **imessage** and **whatsapp**, with JSONL recorders. Its mocks target OpenClaw channel plugins, so they do not substitute for our fixtures directly. **Study only (S)**: the recorder and nonce-roundtrip pattern is a good model for telephony-mcp and a future whatsapp-mcp test harness.

5.2. Agent tooling

mcporter (v0.14.2, Node >=24, MIT, **mcporter/package.json**): "TypeScript runtime and CLI for discovering and calling MCP servers"; exports `.` and `./cli`. Fits EQStack's runtime exactly. **Skill or script (S)**: use it to smoke-test `.mcp.json` servers from CI and to generate a CLI for **imgscrawl** that agents can call without MCP context cost. Alternative would be to vendor as a devDependency; keeping it as an external tool avoids version coupling.

turnwire (@ 24d9d1f, Go): signed, policy-guarded MCP relay between two environments; exposes only `send_message/` `receive_message/confirm_delivery`. Directly relevant to CLAUDE.md's thread-isolation rules. **Study only (S)**.

acpx (v0.19.4): headless ACP client, persistent sessions. **Study only (S)**; relevant to delegating-work but overlaps the existing `bus` and `SendMessage` conventions.

agent-skills (@ 7e73306): shared SKILL.md workflows, e.g. autoreview, agent-transcript. **Cherry-pick (S)** into .agents/skills/ with link-repo-skills --check; review each for repo-specific paths first.

Peekaboo (Swift, 637k lines, MIT): screenshot, accessibility, UI automation, with an MCP launcher. Overlaps shot, mirroir and the computer-lease flow. **Study only.**

5.3. Libraries

fs-safe (@openclaw/fs-safe, 192k lines incl. tests): capability-style roots, like Go os.Root; root() returns a handle that rejects .. and symlink escapes. **Vendor as npm dependency (S)** for export_messages, get_attachment and any path-taking tool. Unknown: the exact published version and Node floor (README only checked).

clawpdf (v0.3.3, Node >=22, 3k lines): PDFium WASM, no native addons, extracts text and PNG pages. **Vendor as npm dependency (S).** Fits the “no postinstall” posture and works on cloud agents.

ffmpeg-wasm (@steipete/ffmpeg-wasm-local, LGPL FFmpeg core): **study only.** Native ffmpeg is already available on the Mac; WASM only helps on cloud boxes. **libopus-wasm, rastermill, proxyline, libterminal:** ignore or study (rastermill not inspected beyond its README header).

5.4. Google and Apple CLIs

gogcli (@ 4d7478e, 320k lines): one client for Gmail, Calendar, Drive, Docs, Sheets with explicit account routing and safety controls. gmail-mcp already covers Gmail, so **skill or script (S)** for Calendar/Drive only; compare its safety controls with gmail-mcp’s. **remindctl:** skill (S) if wanted.

6. Bun runtime and the Rust fork

6.1. What the fork is

Repo	openclaw/bun , fork of oven-sh/bun, created 2026-09-14, 2 stars, @ 42bd1d2
Divergence	gh api compare: 396 commits ahead, 7 behind oven-sh/bun main
Releases	22 tags such as openclaw-v1.4.3-20261008-42bd1d282a-webkit-cb8d6f202b; the latest four are prereleases; assets are darwin/linux x64+arm64 zips plus SHA256SUMS. No Windows asset, no stable release, releases/latest returns 404
Nature	Node-compatible patch queue (CHANGELOG.md: Error.prepareStackTrace, vm.Script cached data, node:v8.queryObjects, module-sync condition, stack columns), mostly adapting upstream PRs. Pairs with openclaw/WebKit, a fork of oven-sh/WebKit. Changes defaults: auto-install is off (docs/runtime/nodejs-compatible.md)
Licence	GitHub reports NOASSERTION (upstream LICENSE.md bundles third-party terms incl. JSC LGPL parts); unknown beyond that

Key correction to the premise: the fork is not a Rust port. Upstream oven-sh/bun is already Rust: gh api repos/oven-sh/bun reports language Rust, its AGENTS.md says “written primarily in Rust with C++ for JavaScriptCore”, and the checkout has 1,547 .rs files and rust-toolchain.toml pinned to nightly-2026-09-15. Upstream stable is bun-v1.4.2 (2026-09-05); 1.4.0 shipped 2026-08-20. The Bun installed here via mise is 1.3.14, which predates the Rust line.

6.2. Measured compatibility (this machine, 2026-10-08)

Installed bun@1.4.2 from npm into the scratchpad and ran against the real addon and deps in apps/imshow-mcp (read-only; nothing written in the repo). Node is v24.15.0.

Item	Result under Bun 1.4.2	Evidence
napi-rs addon native/imshow-native.darwin-arm64.node	Loads; exports resolveContacts, parseAttributedBody, same as Node	require(smoke test only; behaviour and perf not compared
better-sqlite3 12.x	Fails: error: 'better-sqlite3' is not yet supported in Bun. (ERR_DLOPEN_FAILED); Node works	new Database smoke test

node:sqlite DatabaseSync, bun:sqlite	Both work	smoke test; API parity with our queries untested
Ink 7 + React	Renders <Text> in a non-TTY run	raw-mode, resize and input in a real TTY untested
Vitest 3	One trivial test passes under bun --bun; 0.95 s vs 1.02 s wall on Node	real suite (1,165 tests) not run
Startup -e 0	0.00 s vs 0.02 to 0.03 s (10 ms timer granularity)	3 runs each

Bun's own docs quote bun:sqlite as "roughly 3-6x faster than better-sqlite3" for reads (docs/runtime/sqlite.mdx:33), a vendor claim not reproduced here.

6.3. Recommendation for bun-runtime-eval

Verdict: do not adopt the openclaw fork; run a time-boxed spike on upstream Bun 1.4.2, scoped to development tooling, not to the published runtime.

1. Fork: binaries are nightly prereleases, tied to a particular WebKit build, two stars, no Windows build, behaviour changes on defaults. EQStack publishes imsg-mcp to npm for Node (engines.node >=24), so runtime fidelity to Node matters more than raw speed. Revisit only if a specific Node-compat bug blocks the upstream build.
2. Blocker 1: better-sqlite3 cannot load. Moving to Bun means rewriting the storage layer onto bun:sqlite or node:sqlite. Do the node:sqlite migration first, behind the existing fixtures, because it is runtime-neutral and removes a native rebuild step (rebuild script, package.json). Unknown: FTS5, read-only open flags and prepared-statement API parity with imsg-mcp's usage.
3. Keep the napi addon: it loads, so the Rust crate stays; Bun is not a reason to remove it. Measure its throughput under both runtimes before claiming a win.
4. Keep Vitest on Node for the release gate; optionally trial bun --bun vitest for local watch speed. Do not move to bun test (different API).
5. Ink TUI: requires an interactive TTY check (raw mode, resize, 700-message stress drive already in the repo) before any claim.
6. Concrete spike (half a day): pin Bun 1.4.2 with mise on a branch; time pnpm build, pnpm test, pnpm typecheck and TUI startup on both runtimes, three runs each; record in docs/STATUS.md. Success bar: at least 30% wall-clock gain on a task developers wait on, with identical test results. Otherwise close the item.

7. Risks and licences

- **Licences:** 86 of 95 repos are MIT (GraphQL licenseInfo). Exceptions: Apache-2.0 (caclawphony, esp-openclaw-node), CC0 (flawd-bot), NOASSERTION (bun, nix-openclaw), none (casa, WebKit, clawgrit-reports, endor-clawsweeper-e2e). Every repo recommended above is MIT. ffmpeg-wasm wraps an LGPL FFmpeg core.
- **Platform terms:** wacli and wacrawl use unofficial WhatsApp Web access via whatsappmeow and say they are not affiliated with Meta; account bans are possible. Telegram and Discord archivers read local client data.
- **Privacy:** Any messenger wrapper must keep the repo rule: no real personal data in tracked files, confirm before sending, UUID-tagged threads.

- **Maintenance concentration:** pace is very high (most repos pushed within 24 hours of this crawl) and mostly from a small group; APIs may churn. Pin exact versions, per the repo's `.mcp.json` policy.
- **Toolchain:** the Go tools need Go 1.27+ and, for `wacli` from source, CGO plus FTS5; prefer release binaries and verify checksums.
- **Supply chain:** these repos publish to npm and Homebrew; apply the repo's seven-day release-age practice.

8. Unknowns

- Stability and versioning of `--json` output in `wacli`, `telecrawl`, `imgscrawl`.
- Whether `fs-safe` and `clawpdf` published versions match their repo HEADs.
- Real-suite behaviour of `EQStack` under Bun (tests, TUI in a TTY, napi throughput).
- `node:sqlite` parity with `img-mcp` queries.
- Fork licence text for `openclaw/bun` beyond GitHub's NOASSERTION.
- Rows marked "not inspected" in the table (about 40 repos were judged from descriptions and names only).
- Star counts and push dates are a snapshot from 2026-10-08.