



SCP - FLP - Deploying and Configuring Shell Plugin


1. Deploy the app to SCP as you would normally do, however, DO NOT register it to FLP
2. Open the Portal Admin page (<https://flpnwc-<subaccount>.dispatcher.us2.hana.ondemand.com/sites?siteId=<Your Site ID>&mode=admin>)
3. Under Apps, click to add a new app

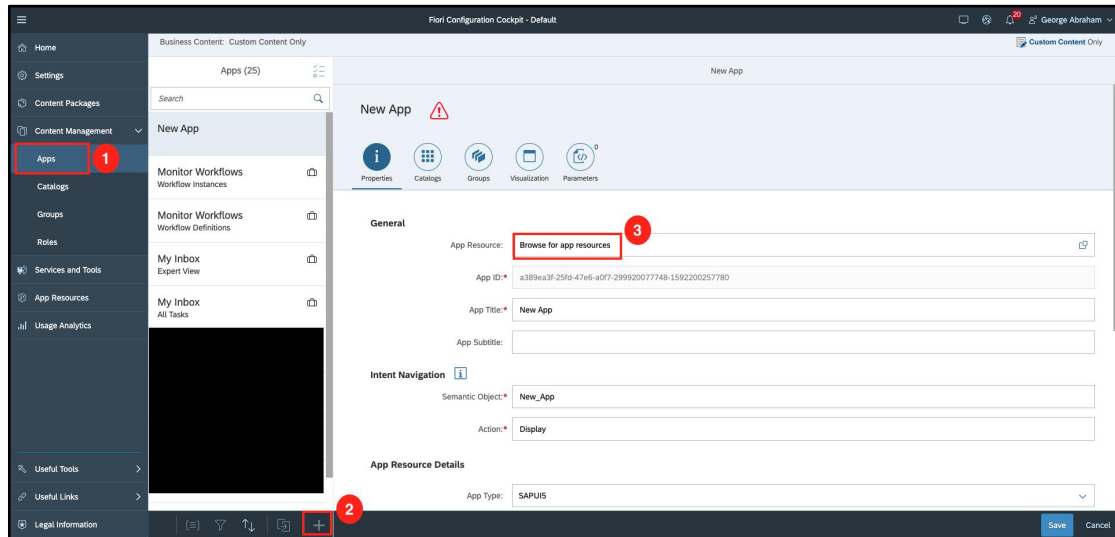

4. Browse for the app just deployed.

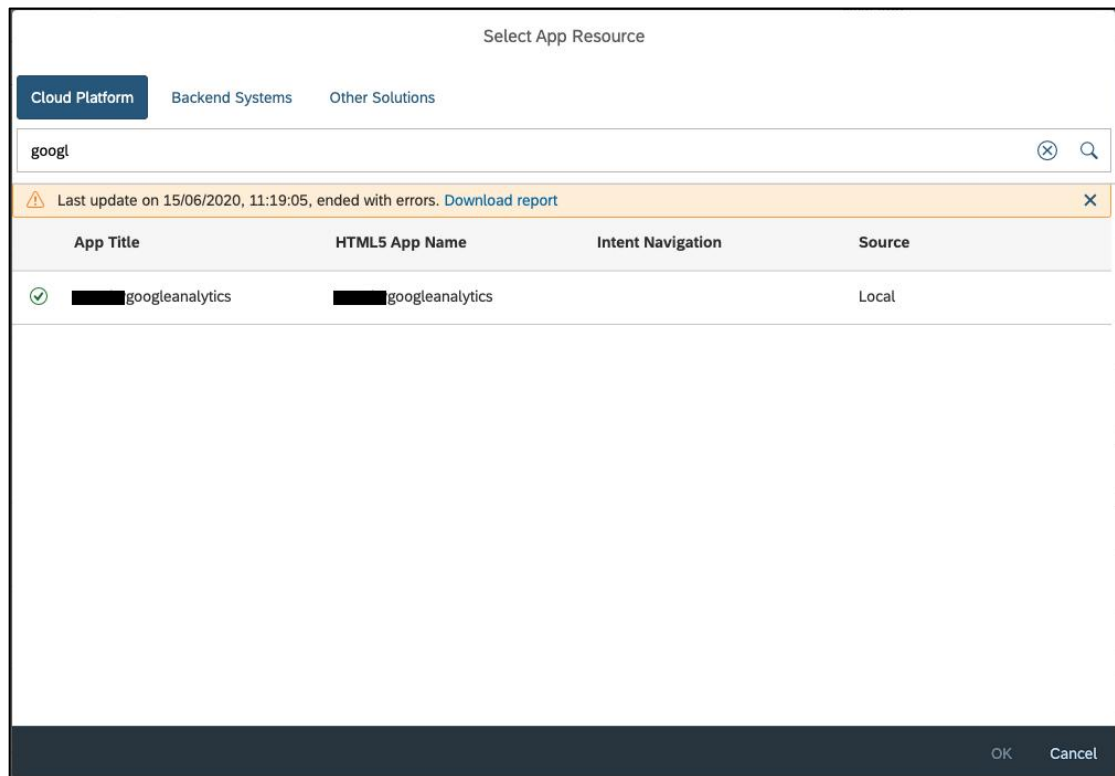

5. Change the App Type to Shell Plugin

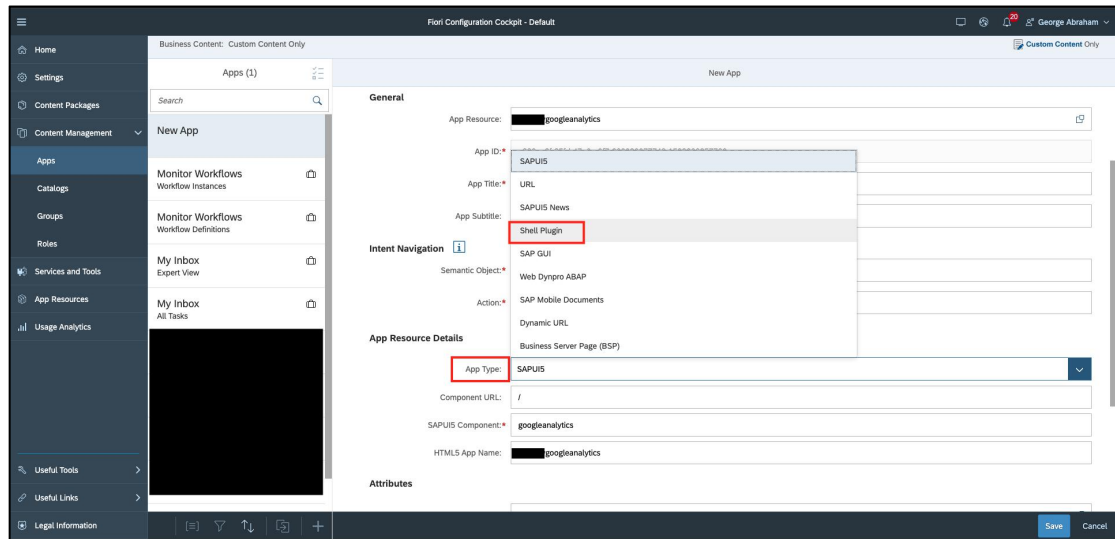

6. Under Catalogs, select all the catalogs for which you want this plugin to be called. Basically what this means is that when those catalogs/apps are opened, along with that this plugin's Component.js file will also be called.



7. Under Parameters, add the relevant parameters needed and Save (This is to be done only if you are referring to any component from the portal site)

NOTE: The Name and Default Value is what is to be entered. The Name should exactly same as how it is accessed in the Component.js file of the plugin (case sensitive). The code can be identified via `this.getComponentData().config.<parameterName>`

E.g. trackingID, etc.

8. Clear cache and publish the site