




Processes

Process Concept

- An operating system executes a variety of programs:
 - Batch system – jobs
 - Time-shared systems – user programs or tasks
- Textbook uses the terms *job* and *process* almost interchangeably
- Process – a program in execution; process execution must progress in sequential fashion
- A process includes:
 - program counter
 - stack
 - data section


Process in Memory

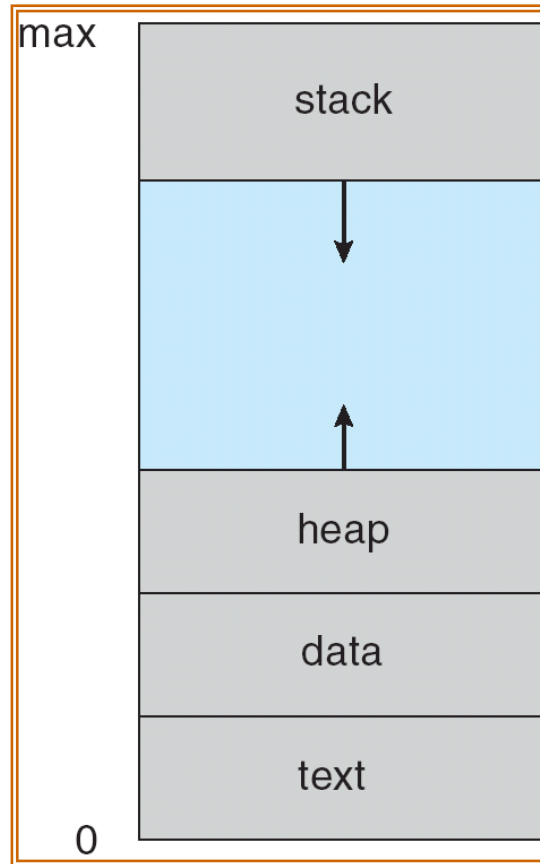

Process State

- As a process executes, it changes *state*
 - **new**: The process is being created
 - **running**: Instructions are being executed
 - **waiting**: The process is waiting for some event to occur
 - **ready**: The process is waiting to be assigned to a processor
 - **terminated**: The process has finished execution

Diagram of Process State

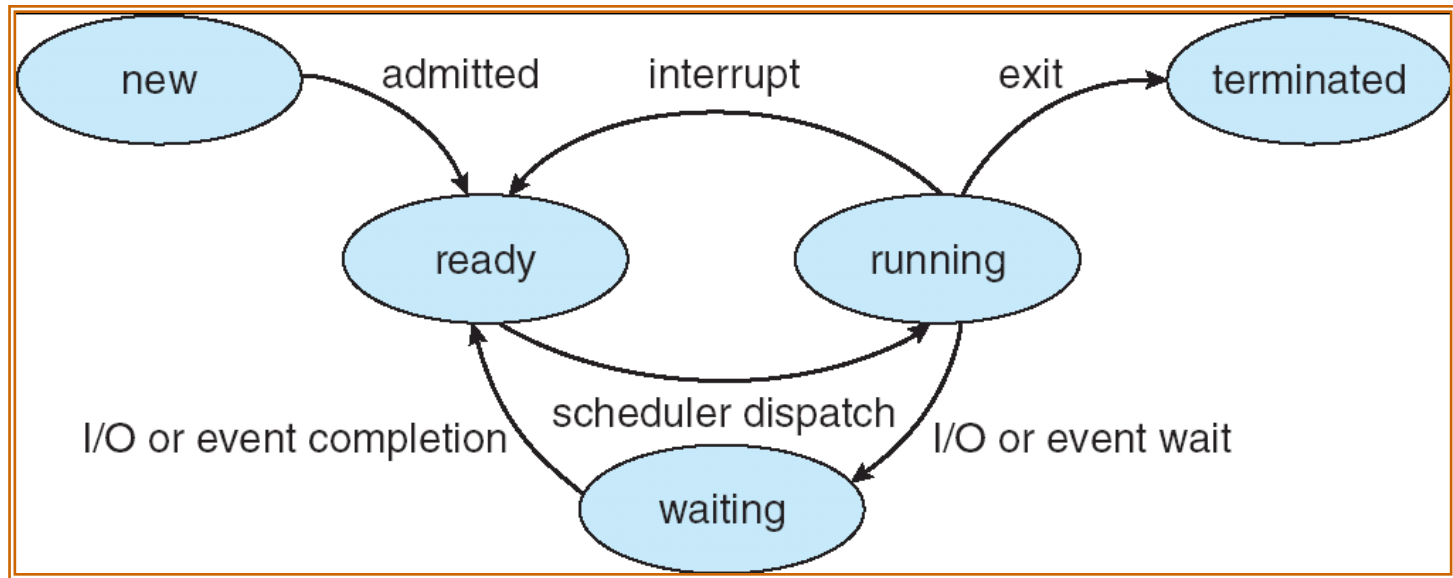


Process Control Block (PCB)


Information associated with each process

- Process state
- Program counter
- CPU registers
- CPU scheduling information
- Memory-management information
- Accounting information
- I/O status information

Process Control Block (PCB)

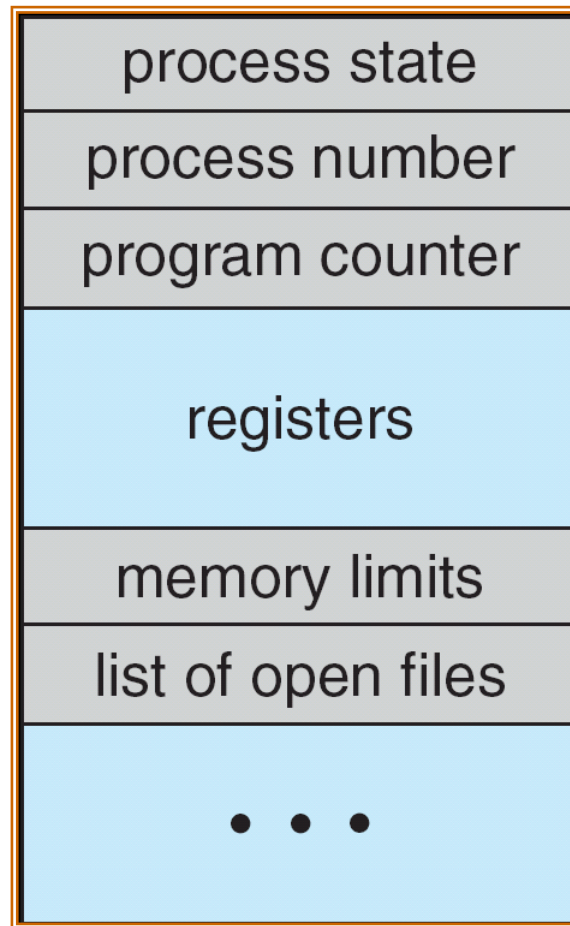


CPU Switch From Process to Process

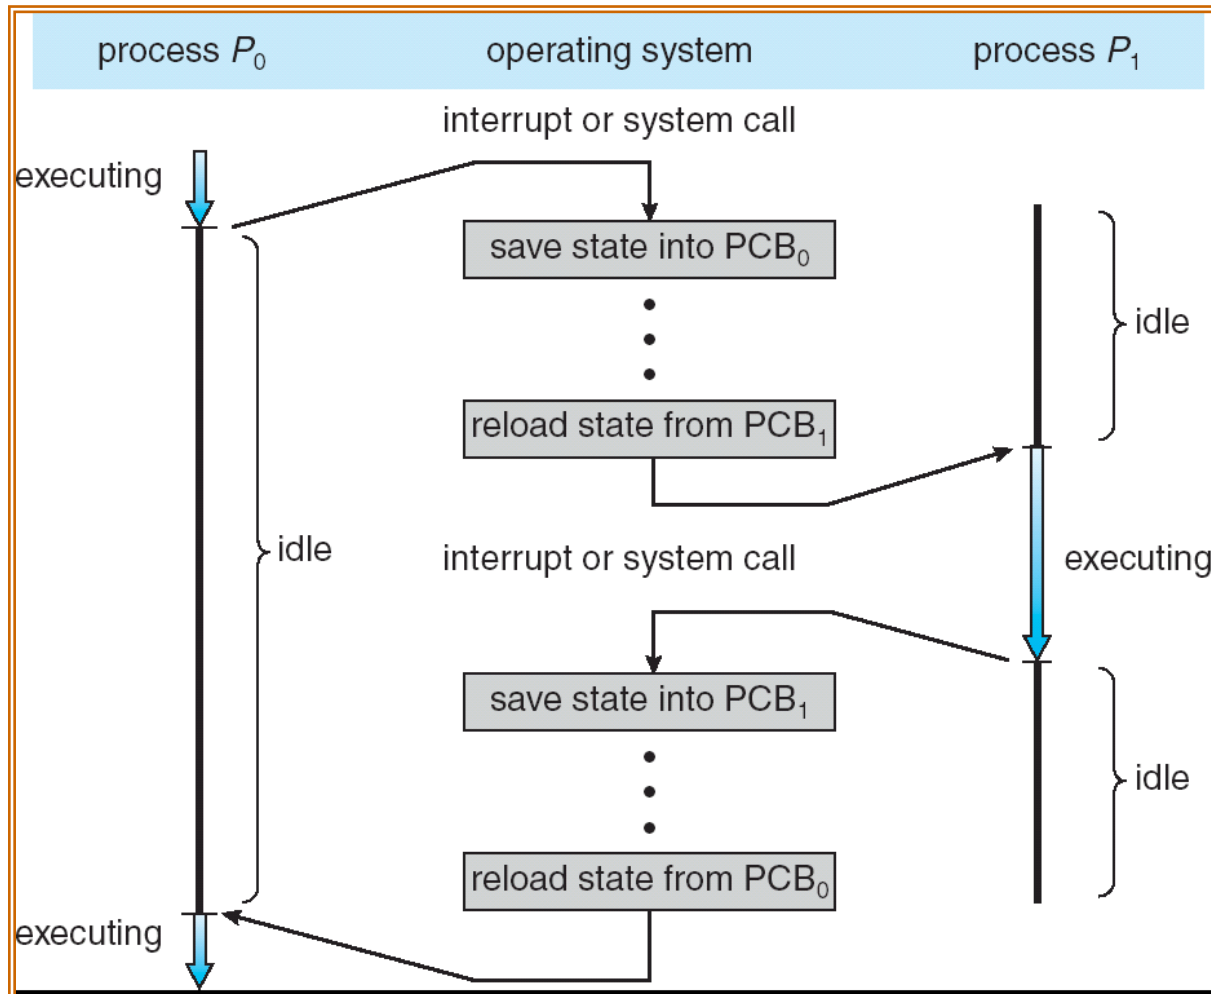


Process Scheduling Queues

- **Job queue** – set of all processes in the system
- **Ready queue** – set of all processes residing in main memory, ready and waiting to execute
- **Device queues** – set of processes waiting for an I/O device
- Processes migrate among the various queues

Ready Queue And Various I/O Device Queues

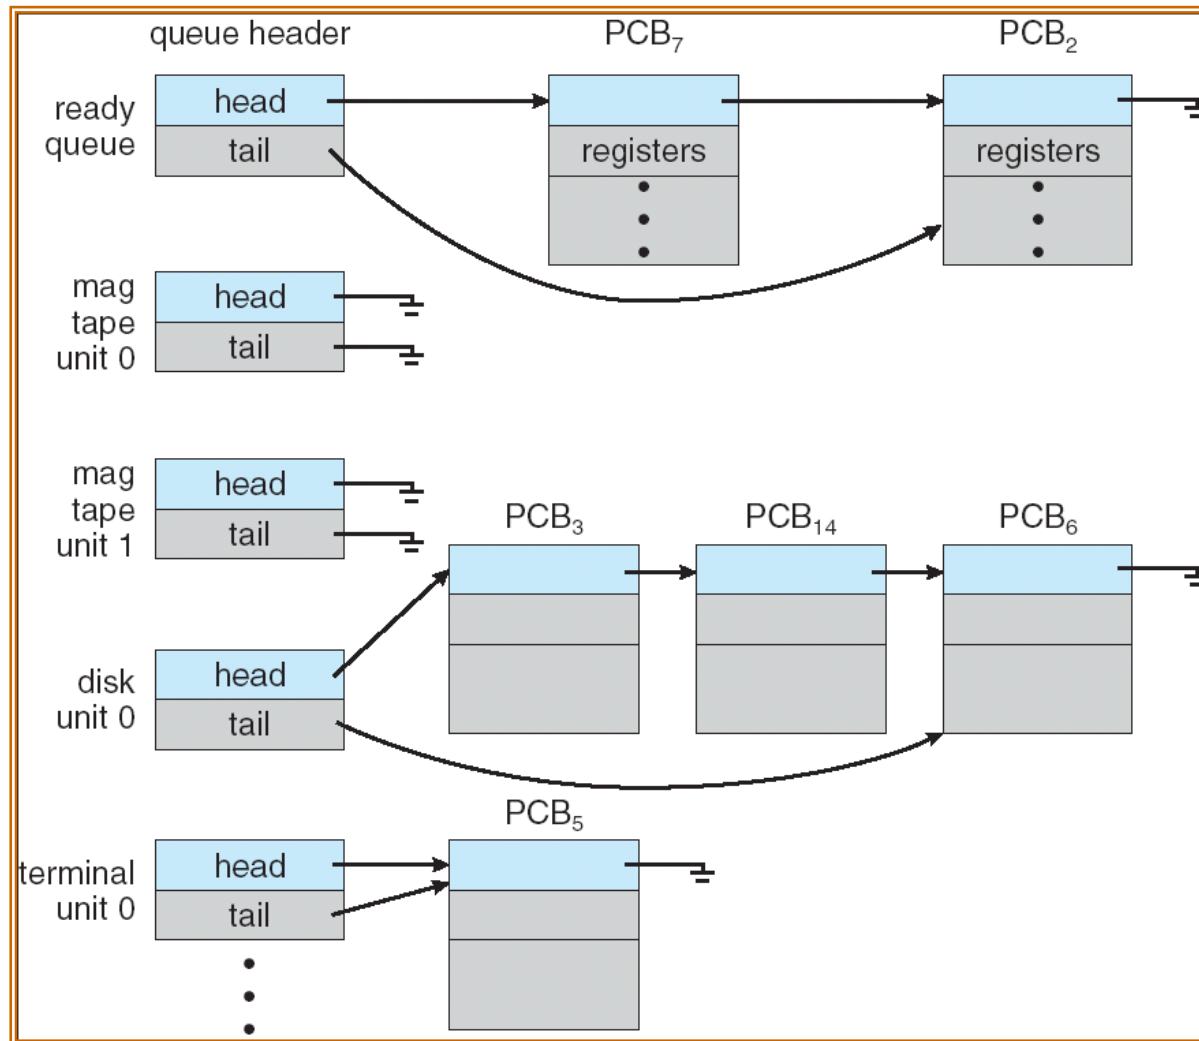


Representation of Process Scheduling

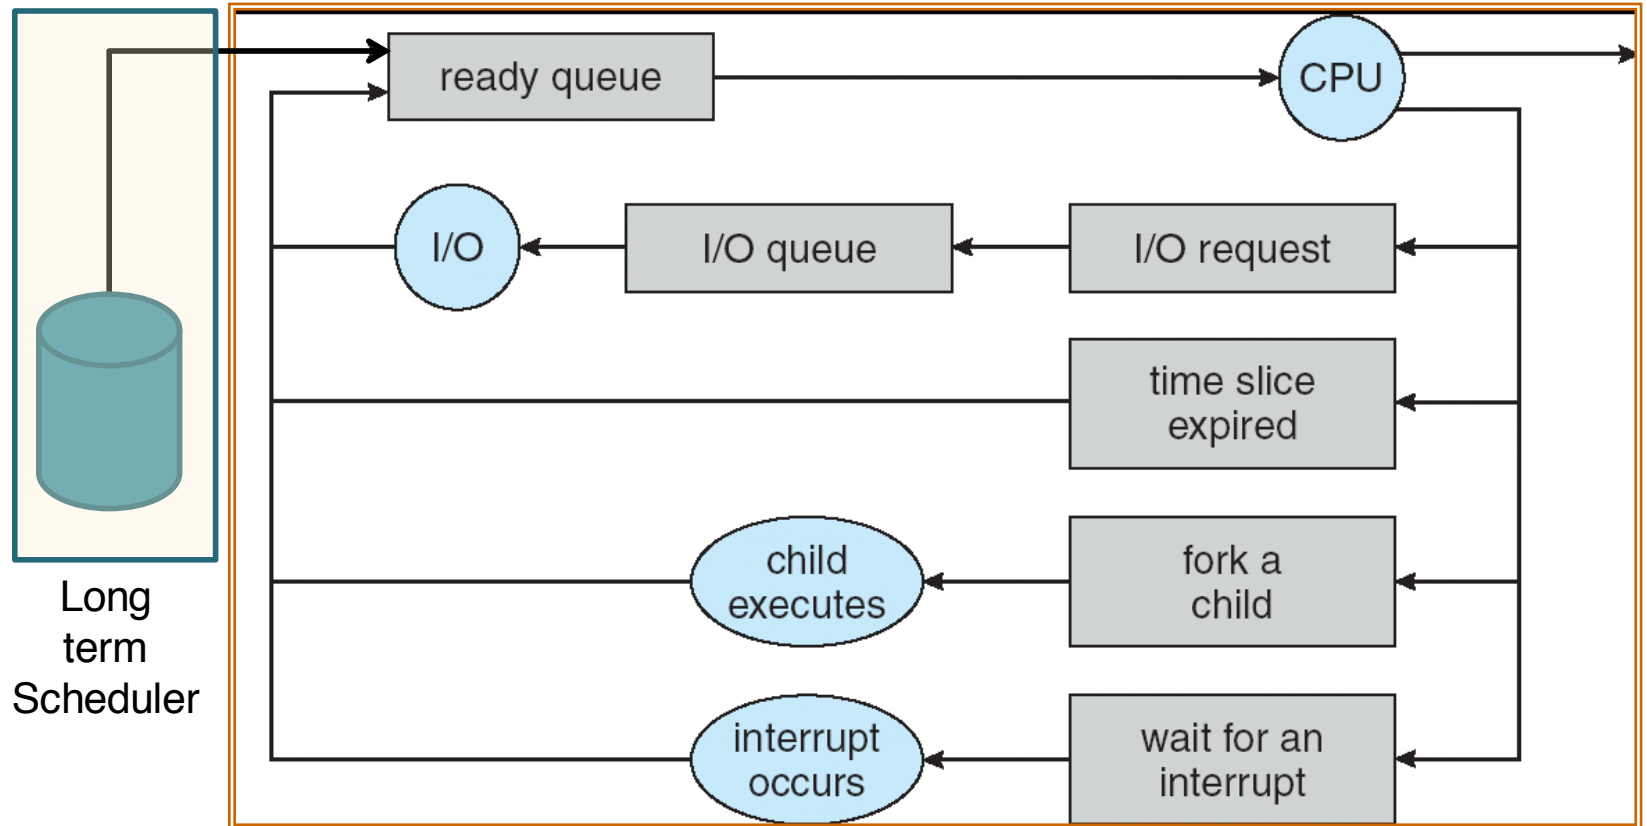

Schedulers

- **Long-term scheduler** (or job scheduler) – selects which processes should be brought into the ready queue
- **Medium-term scheduler** – moves partially executed processes to/from disk storage to adjust the degree of multiprogramming
- **Short-term scheduler** (or CPU scheduler) – selects which process should be executed next and allocates CPU

Addition of Medium Term Scheduling

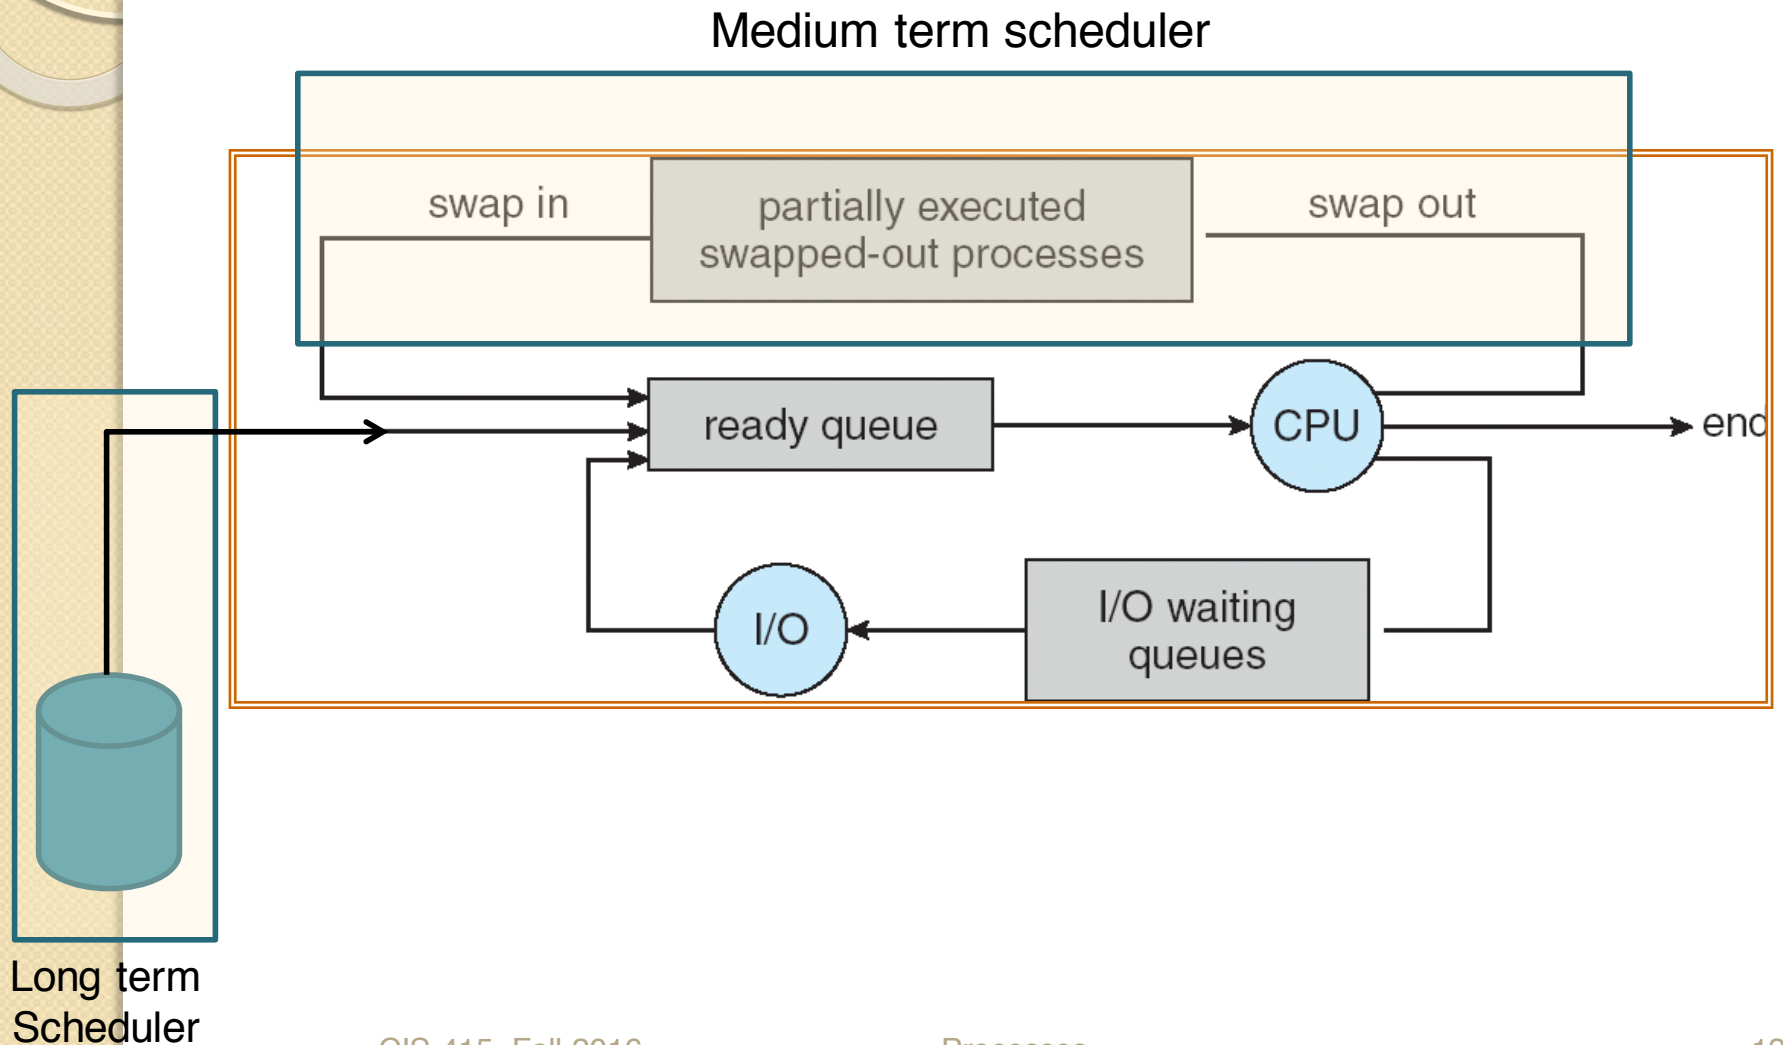

Schedulers (Cont.)

- Short-term scheduler is invoked very frequently (milliseconds) \Rightarrow (must be fast)
- Medium-term scheduler is invoked less frequently
- Long-term scheduler is invoked very infrequently (seconds, minutes) \Rightarrow (may be slow)
- The medium-term and long-term schedulers control the *degree of multiprogramming*
- Processes can be described as either:
 - **I/O-bound process** – spends more time doing I/O than computations, many short CPU bursts
 - **CPU-bound process** – spends more time doing computations; few very long CPU bursts

Context Switch

- When CPU switches to another process, the system must save the state of the old process and load the saved state for the new process
- Context-switch time is overhead; the system does no useful work while switching
- Time dependent on hardware support


Process Creation

- Parent processes create child processes, which, in turn create other processes, forming a tree of processes
- Possible kinds of resource sharing
 - Parent and children share all resources
 - Children share subset of parent's resources
 - Parent and child share no resources
- Execution
 - Parent and children execute concurrently
 - Parent waits until children terminate

Process Creation (Cont.)

- Address space
 - Child duplicate of parent
 - Child has a program loaded into it
- UNIX/Linux examples
 - **fork** system call creates new process
 - **exec** system call used after a **fork** to replace the process' memory space with a new program

Process Creation

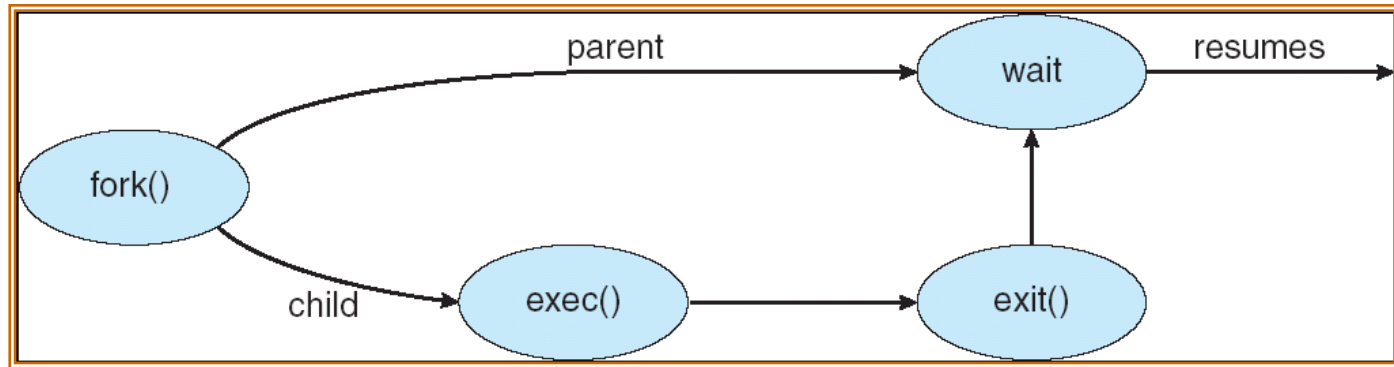

C Program Forking Separate Process

```
int main()
{
    pid_t pid;
    /* fork another process */
    pid = fork();
    if (pid < 0) { /* error occurred */
        fprintf(stderr, "Fork Failed");
        exit(-1);
    }
    else if (pid == 0) { /* child process */
        execlp("/bin/lis", "lis", NULL);
    }
    else { /* parent process */
        /* parent will wait for the child to complete */
        wait (NULL);
        printf ("Child Complete");
        exit(0);
    }
}
```

Process Termination

- Process executes last statement and asks the operating system to delete it (**exit**)
 - Output data from child to parent (via **wait**)
 - Process' resources are deallocated by operating system
- Parent may terminate execution of children processes (**abort**)
 - Child has exceeded allocated resources
 - Task assigned to child is no longer required
 - If parent is exiting
 - Some operating system do not allow child to continue if its parent terminates
 - All children terminated - *cascading termination*

Cooperating Processes

- **Independent** process cannot affect or be affected by the execution of another process
- **Cooperating** process can affect or be affected by the execution of another process
- Advantages of process cooperation
 - Information sharing
 - Computation speed-up
 - Modularity
 - Convenience

Producer-Consumer Problem

- Paradigm for cooperating processes,
producer process produces information
that is consumed by a *consumer* process
 - *unbounded-buffer* places no practical limit on
the size of the buffer
 - *bounded-buffer* assumes that there is a fixed
buffer size

Bounded-Buffer – Shared-Memory Solution

- Shared data

```
#define BUFFER_SIZE 10
```

```
typedef struct {
```

```
...
```

```
} item;
```

```
item buffer[BUFFER_SIZE];
```

```
int in = 0;
```

```
int out = 0;
```

- The following solution is correct, but can only use `BUFFER_SIZE-1` elements

Bounded-Buffer – Insert() Method

```
while (true) {  
    /* Produce an item */  
    while (((in + 1) % BUFFER_SIZE) == out)  
        ; /* do nothing -- no free buffers */  
    buffer[in] = item;  
    in = (in + 1) % BUFFER_SIZE;  
}
```


Bounded Buffer – Remove() Method

```
while (true) {  
    while (in == out)  
        ; /* do nothing -- nothing to consume */  
  
    // remove an item from the buffer  
    item = buffer[out];  
    out = (out + 1) % BUFFER_SIZE;  
    return item;  
}
```