

Contents

1	Azure OpenAI Managed Identity System Architecture - Mermaid Diagram	1
1.1	Architecture Overview	2
1.1.1	Data Flow Path	2
1.1.2	Key Components	2
1.1.3	Configuration	2

1 Azure OpenAI Managed Identity System Architecture - Mermaid Diagram

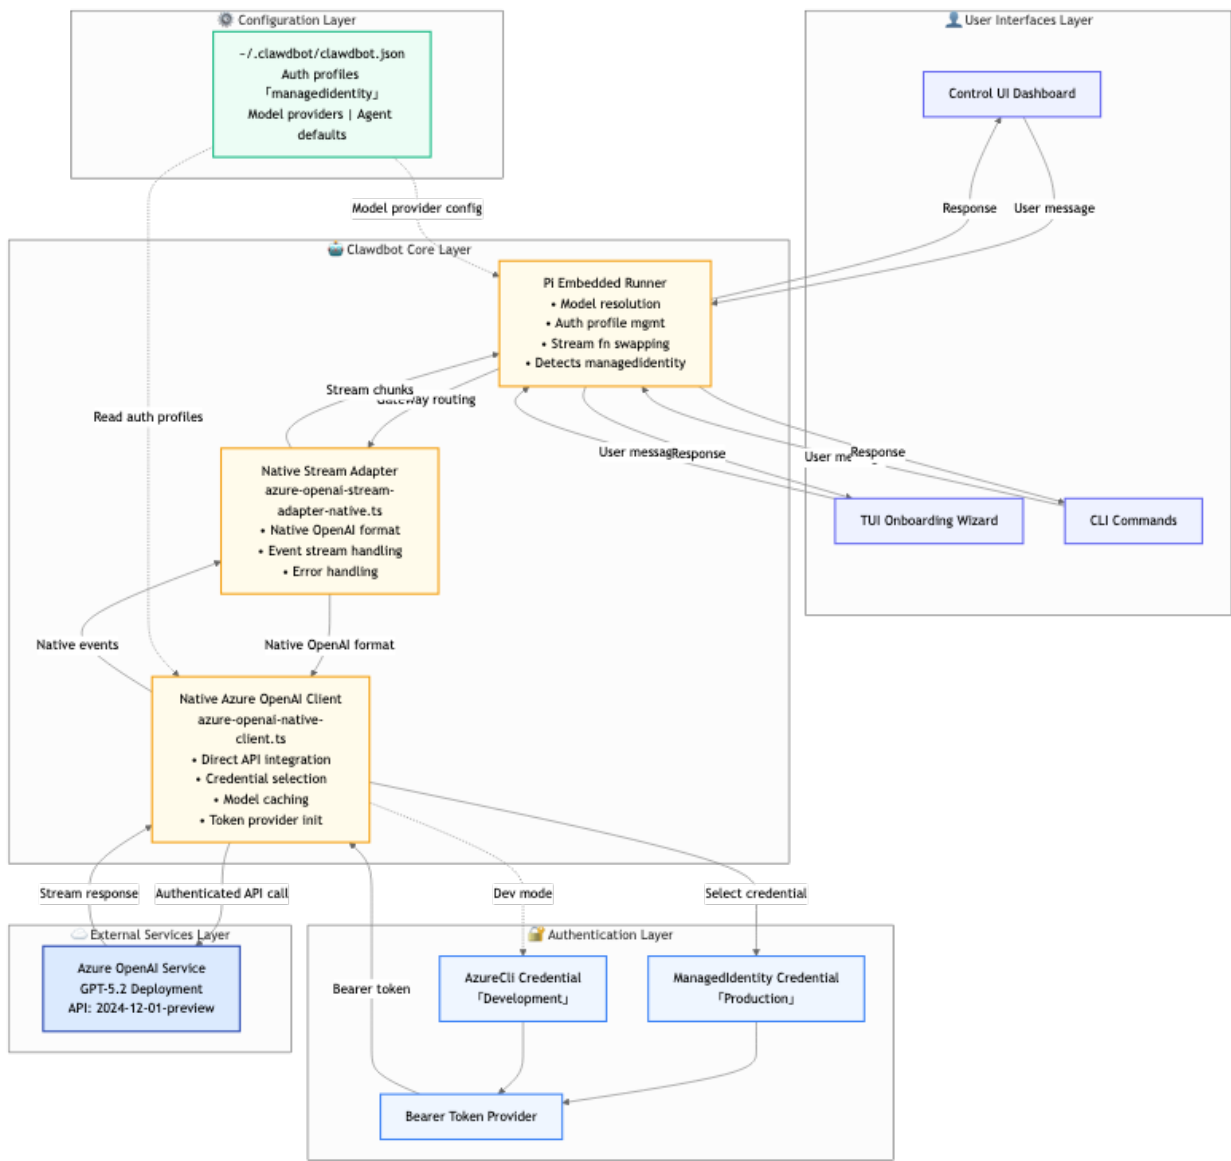


Figure 1: Diagram 1

1.1 Architecture Overview

This diagram shows the **Azure OpenAI Managed Identity integration** within the Clawdbot system, organized into 5 distinct layers:

1.1.1 Data Flow Path

1. **User message** enters via UI (Dashboard/TUI/CLI)
2. **Gateway** routes to Pi Embedded Runner
3. **Runner** forwards to Native Stream Adapter
4. **Adapter** processes native OpenAI format
5. **Native Client** selects credential (ManagedIdentity in prod, AzureCli in dev)
6. **Authentication** layer provides Bearer token
7. **Native Client** makes authenticated API call directly to Azure
8. **Azure OpenAI** streams response back through the stack
9. **Response** delivered as stream chunks to user

1.1.2 Key Components

- **ManagedIdentity Credential:** Production authentication (no keys required)
- **AzureCli Credential:** Development authentication (uses `az login`)
- **Bearer Token Provider:** Converts Azure credentials to OpenAI bearer tokens
- **Native Stream Adapter:** Handles native OpenAI event streaming and error handling
- **Native Azure OpenAI Client:** Direct API integration with credential selection, model caching, and token initialization

1.1.3 Configuration

All settings managed via `~/.clawdbot/clawdbot.json`: - Auth profiles (including `managedidentity`)
- Model provider configurations - Agent defaults