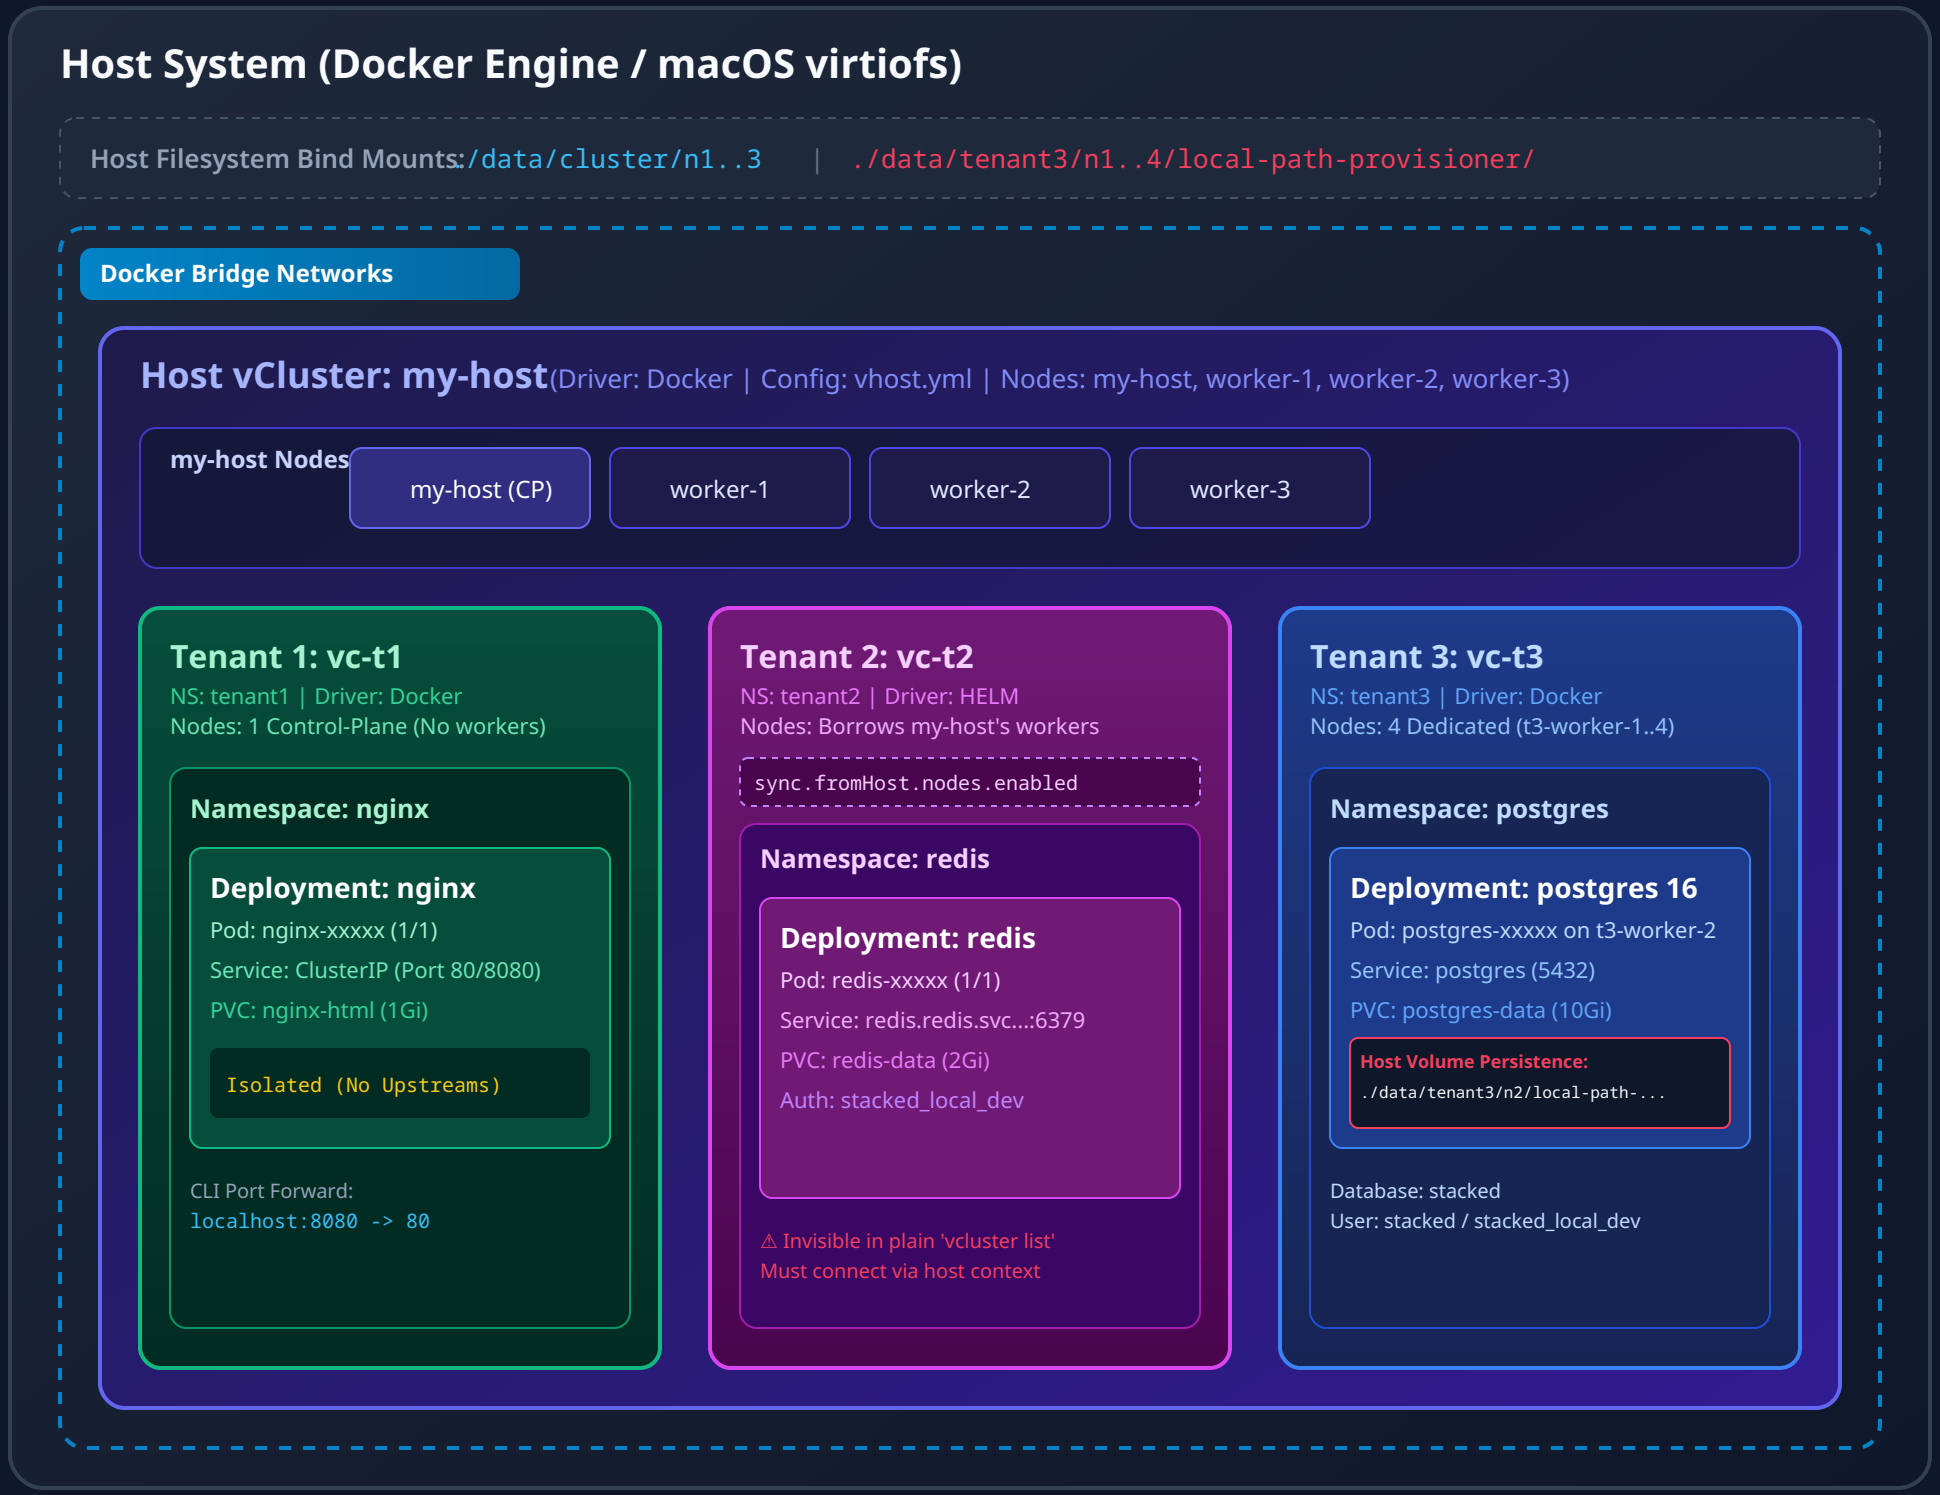
Host System (Docker Engine / macOS virtiofs)
Host Filesystem Bind Mounts: /data/cluster/n1..3 | ./data/tenant3/n1..4/local-path-provisioner/
Docker Bridge Networks
Host vCluster: my-host (Driver: Docker | Config: vhost.yml | Nodes: my-host, worker-1, worker-2, worker-3)
my-host Nodes
my-host (CP)
worker-1
worker-2
worker-3
Tenant 1: vc-t1
NS: tenant1 | Driver: Docker
Nodes: 1 Control-Plane (No workers)
Namespace: nginx
Deployment: nginx
Pod: nginx-xxxxx (1/1)
Service: ClusterIP (Port 80/8080)
PVC: nginx-html (1Gi)
Isolated (No Upstreams)
CLI Port Forward:
localhost:8080 -> 80
Tenant 2: vc-t2
NS: tenant2 | Driver: HELM
Nodes: Borrows my-host's workers
sync.fromHost.nodes.enabled
Namespace: redis
Deployment: redis
Pod: redis-xxxxx (1/1)
Service: redis.redis.svc...:6379
PVC: redis-data (2Gi)
Auth: stacked_local_dev
⚠ Invisible in plain 'vcluster list'
Must connect via host context
Tenant 3: vc-t3
NS: tenant3 | Driver: Docker
Nodes: 4 Dedicated (t3-worker-1..4)
Namespace: postgres
Deployment: postgres 16
Pod: postgres-xxxxx on t3-worker-2
Service: postgres (5432)
PVC: postgres-data (10Gi)
Host Volume Persistence:
./data/tenant3/n2/local-path-...
Database: stacked
User: stacked / stacked_local_dev