Deployment Lifecycle & Context Assertion Flow

How 'make up' safely switches contexts and asserts targets before applying manifests

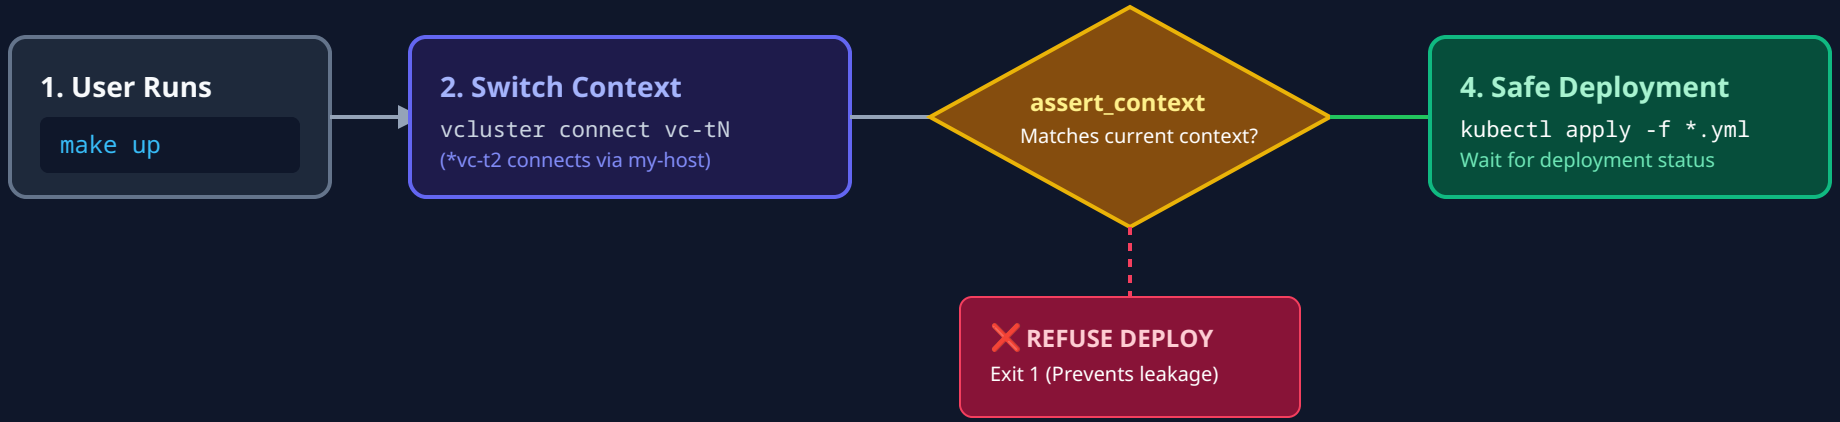

'make up' Sequential Sequence:

Target 1: dep_t1
Context: vcluster-docker_vc-t1
Deploys: nginx -> ns nginx

Target 2: dep_t2
Context: ...vc-t2...my-host
Deploys: redis -> ns redis

Target 3: dep_t3
Context: vcluster-docker_vc-t3
Deploys: postgres -> ns postgres