



Komplex:

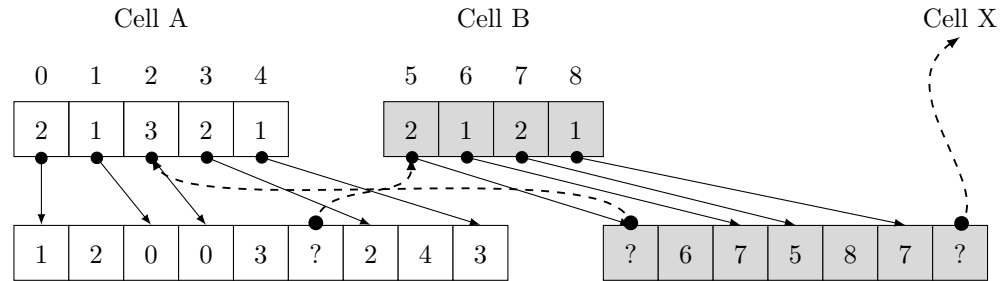

Etwas einfacher:

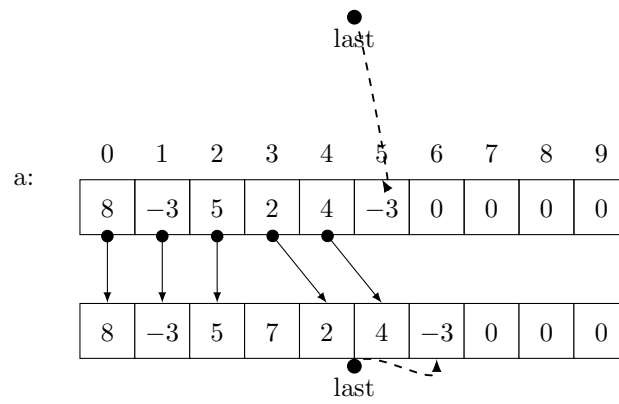

Arrays 0:

int i =



7

int[] a = ●-->

0	1	2	3	4	5	6	7	8	9
2	-3	5	9	0	-4	8	1	3	2



Bsp1:

`int[] a = ●--> null`

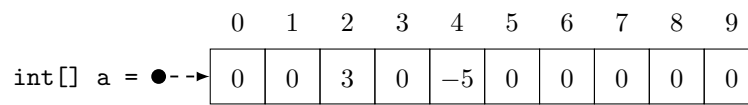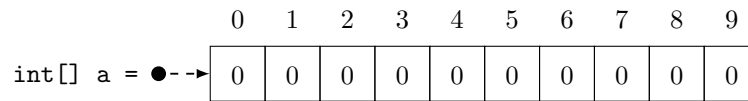

Bsp2:

`a: ●--> null`

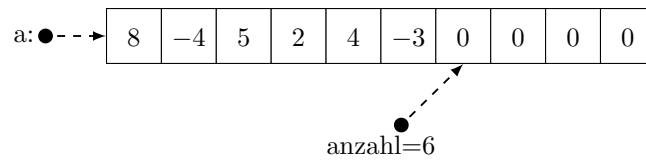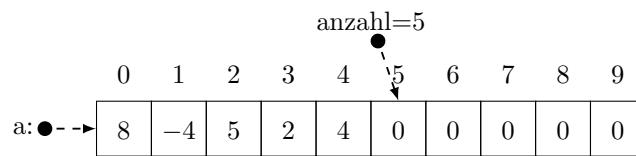

Bsp3:

a: ● - - → *null*

