



Geoscript Groovy Cookbook

Jared Erickson

Version 1.22.0

Table of Contents

Introduction	1
Using GeoScript	1
geoscript-groovy	3
Uber Jar	4
Library	4
Geometry Recipes	5
Creating Geometries	5
Points	14
LineStrings	16
Polygons	29
MultiLineStrings	35
MultiPolygons	37
Geometry Collections	40
Circular Strings	43
Circular Rings	46
Compound Curves	51
Compound Rings	56
Processing Geometries	62
Prepared Geometry	120
Reading and Writing Geometries	131
Bounds Recipes	150
Creating Bounds	150
Getting Bounds Properties	151
Processing Bounds	154
Projection Recipes	165
Creating Projections	165
Getting Projection Properties	167
Using Projections	168
Using Geodetic	169
Using Decimal Degrees	171
Spatial Index Recipes	174
Using STRtree	174
Using HPRtree	175
Using Quadtree	176
Using GeoHash	177
Viewer Recipes	181
Drawing geometries	181
Plotting geometries	185

Plot Recipes	188
Processing Charts	188
Creating Bar Charts	192
Creating Pie Charts	194
Creating Box Charts	195
Creating Curve Charts	195
Creating Regression Charts	197
Creating Scatter Plot Charts	198
Feature Recipes	199
Creating Fields	200
Creating Schemas	201
Getting Schema Properties	202
Getting Schema Fields	203
Modifying Schemas	204
Combining Schemas	207
Creating Features from a Schema	209
Reading and Writing Schemas	211
Creating Features	216
Getting Feature Properties	218
Getting Feature Attributes	219
Reading and Writing Features	220
Filter Recipes	235
Creating Filters	235
Using Filters	237
Evaluating Filters	239
Creating Literals	240
Creating Properties	241
Evaluating Properties	241
Creating Functions	242
Evaluating Functions	243
Process Functions	244
Creating Colors	246
Getting Color Formats	248
Displaying Colors	249
Using Color Palettes	249
Creating Expressions from CQL	254
Create Expression from static imports	254
Process Recipes	255
Execute a built-in Process	255
Listing built-in Processes	257
Executing a new Process	259

Process Functions	261
Render Recipes	263
Creating Maps	263
Map Properties	267
Advanced Properties	270
Projections	274
Map Cubes	284
Rendering Maps	287
Displaying Maps	305
Drawing	307
Plotting	315
Reading Maps	323
Style Recipes	328
Creating Basic Styles	328
Creating Strokes	332
Creating Fills	336
Creating Shapes	340
Creating Icons	342
Creating Labels	343
Creating Transforms	348
Creating Gradients	350
Creating Unique Values	352
Creating Color Maps	354
Creating Channel Selection and Contrast Enhancement	356
Reading and Writing Styles	358
Style Repositories	370
Workspace Recipes	373
Using Workspaces	373
Creating an in Memory Workspace	375
Add Layer's Features in Chunks	376
Using a Directory Workspace	376
Investigating Workspaces	378
Creating Workspaces	379
Database Workspace	389
Layer Recipes	392
Getting a Layer's Properties	392
Getting a Layer's Features	396
Adding, Updating, and Deleting	403
Shapefiles	413
Property	416
Geoprocessing	419

Layer Algebra	427
Reading and Writing Layers	435
Graticules	464
Format Recipes	470
Get a Format	470
Get Names	470
Read a Raster	471
Write a Raster	471
Check for a Raster	472
GeoTIFF	472
WorldImage	473
ArcGrid	474
NetCDF	474
MrSID	475
Raster Recipes	475
Raster Properties	475
Raster Bands	480
Raster Values	482
Raster Processing	488
World File	515
Map Algebra	516
WMS Recipes	519
WMS Server	519
WMSSLayer	522
Tile Recipes	523
Tile	523
Grid	524
Pyramid	524
Generating Tiles	537
Tile Layer	545
TileRenderer	562
TileCursor	567
TMS	574
MBTiles	575
DBTiles	576
GeoPackage	577
UTFGrid	579
VectorTiles	579
Generating TileLayer	581
OSM	582
Carto Recipes	594

Items	594
Builders	625
Reading CartoBuilders	631

Introduction

The GeoScript Groovy Cookbook contains short recipes on how to use the GeoScript Groovy library.

GeoScript is a geospatial library written in Groovy. It provides modules for working with geometries, projections, features, layers, rasters, styles, rendering, and tiles. It is built on top of the Java Topology Suite (JTS) and GeoTools libraries. GeoScript Groovy is open source and licensed under the MIT license.

Using GeoScript

To use GeoScript Groovy you need Java, Java Advanced Imaging (JAI), and Groovy installed and on your PATH. Next, download the latest stable release, the latest in development build, or build the code yourself. Then put the GeoScript Groovy bin directory on your PATH. You are now ready to use GeoScript Groovy!

GeoScript Groovy has three commands:

1. `geoscript-groovy` (which can run Groovy files)

```
Jared-Ericksons-MacBook-Pro:~ jericks$ cat script.groovy
import geoscript.geom.Point

p = new Point(-123.181458, 47.036439)
println p.wkt


poly = p.buffer(2.5)
println poly.wkt
Jared-Ericksons-MacBook-Pro:~ jericks$ geoscript-groovy script.groovy
POINT (-123.181458 47.036439)
POLYGON ((-120.681458 47.036439, -120.72949479899194 46.54871319495968, -120.8717591687218 46.07973041908728, -121.10278396924365 45.647513417450995, -121.41369104703364 45.26867204703363, -121.792532417451 44.95776496924364, -122.22474941908729 44.72674016872178, -122.69373219495968 44.584475798991924, -123.181458 44.536439, -123.66918380504033 44.584475798991924, -124.13816658091272 44.72674016872178, -124.57038358254901 44.95776496924364, -124.94922495296638 45.26867204703363, -125.26013203075637 45.647513417450995, -125.49115683127822 46.07973041908728, -125.63342120100808 46.54871319495968, -125.681458 47.036439, -125.63342120100808 47.52416480504032, -125.49115683127822 47.993147580912726, -125.26013203075637 48.42536458254901, -124.94922495296638 48.80420595296637, -124.57038358254901 49.11511303075637, -124.13816658091272 49.34613783127822, -123.66918380504032 49.48840220100808, -123.181458 49.536439, -122.69373219495968 49.48840220100808, -122.22474941908727 49.34613783127821, -121.792532417451 49.11511303075636, -121.41369104703364 48.80420595296636, -121.10278396924363 48.425364582549, -120.87175916872178 47.99314758091272, -120.72949479899192 47.524164805040314, -120.681458 47.036439))
Jared-Ericksons-MacBook-Pro:~ jericks$ []
```

1. `geoscript-groovysh` (which starts a REPL shell)

```
Jared-Ericksons-MacBook-Pro:~ jericks$ geoscript-groovysh
Groovy Shell (2.4.10, JVM: 1.8.0_31)
Type ':help' or ':h' for help.

-----
groovy:000> import geoscript.geom.Point
==> geoscript.geom.Point
groovy:000> p = new Point(-123.181458,47.036439)
==> POINT (-123.181458 47.036439)
groovy:000> p.buffer(2.5)
==> POLYGON ((-120.681458 47.036439, -120.72949479899194 46.54871319495968, -120.8717591687218 46.07973041908728, -121.10278396924365 45.647513417450995, -121.41369104703364 45.26867204703363, -121.792532417451 44.95776496924364, -122.22474941908729 44.72674016872178, -122.69373219495968 44.584475798991924, -123.181458 44.536439, -123.66918380504033 44.584475798991924, -124.13816658091272 44.72674016872178, -124.57038358254901 44.95776496924364, -124.94922495296638 45.26867204703363, -125.26013203075637 45.647513417450995, -125.49115683127822 46.07973041908728, -125.63342120100808 46.54871319495968, -125.681458 47.036439, -125.63342120100808 47.52416480504032, -125.49115683127822 47.993147580912726, -125.26013203075637 48.42536458254901, -124.94922495296638 48.80420595296637, -124.57038358254901 49.11511303075637, -124.13816658091272 49.34613783127822, -123.66918380504032 49.48840220100808, -123.181458 49.536439, -122.69373219495968 49.48840220100808, -122.22474941908727 49.34613783127821, -121.792532417451 49.11511303075636, -121.41369104703364 48.80420595296636, -120.87175916872178 47.99314758091272, -120.72949479899192 47.524164805040314, -120.681458 47.036439))
groovy:000> []
```

1. geoscript-groovyConsole (which starts a graphical editor/mini IDE)

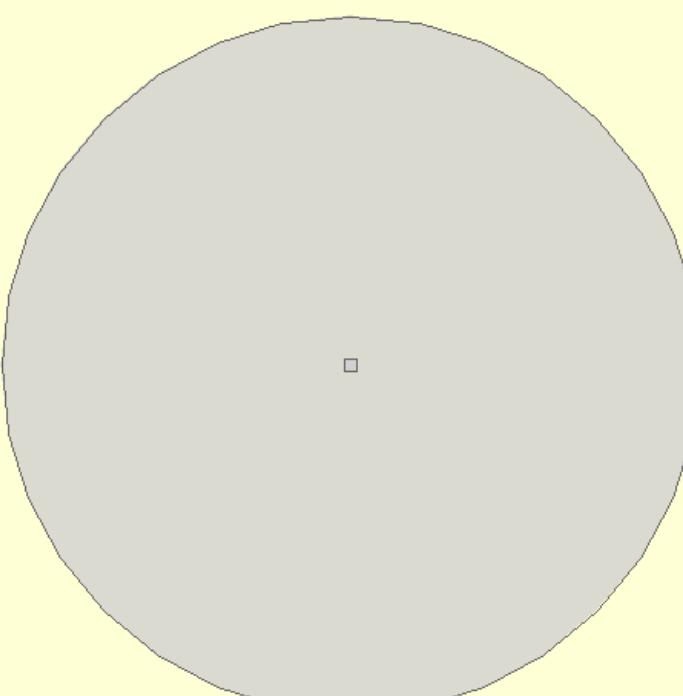

```
script.groovy – GroovyConsole
File Edit View Help
1 import geoscript.geom.Point
2 import geoscript.viewer.Viewer
3
4 p = new Point(-123.181458, 47.036439)
5 poly = p.buffer(2.5)
6 Viewer.drawToImage([poly,p])
```

Result:

Execution complete. | 6:29

geoscript-groovy

The geoscript-groovy command can run scripts file, but it can also run inline scripts.

Convert a shapefile to geojson

```
geoscript-groovy -e "println new  
geoscript.layer.Shapefile('states.shp').toJSONObject()"
```

Get the Bounds of a Shapefile as a Geometry

```
geoscript-groovy -e "println new  
geoscript.layer.Shapefile('states.shp').bounds.geometry"
```

Count the number of Features in a Shapefile

```
geoscript-groovy -e "println new geoscript.layer.Shapefile('states.shp').count"
```

Render a Shapefile to an image

```
geoscript-groovy -e "geoscript.render.Draw.draw(new  
geoscript.layer.Shapefile('states.shp'), out: 'image.png')"
```

Pipe a Shapefile's geometry to another command line application that buffers each feature

```
geoscript-groovy -e "new geoscript.layer.Shapefile('states.shp').eachFeature{ println  
it.geom.centroid}" | geom combine | geom buffer -d 1.5
```

Pipe the results of buffering a point to convert it to KML

```
echo "POINT (1 1)" | geom buffer -d 10 | geoscript-groovy -e "println  
geoscript.geom.Geometry.fromWKT(System.in.text).kml"
```

Uber Jar

GeoScript Groovy also comes packaged as an uber jar which contains all dependencies. Download [geoscript-groovy-app-1.22.0.jar](#) from github.

Run uber jar from the command line.

```
java -jar geoscript-groovy-app-1.22.0.jar
```

The uber jar can take four commands:

- script = Runs a script file like the geoscript-groovy command.
- shell = Start an interactive shell like the geoscript-groovysh command.
- console = Open the simple GUI like the geoscript-groovyConsole command.
- version = Print the versions of GeoScript, GeoTools, and Groovy

Library

Maven

You can also use GeoScript Groovy as a library. If you use Maven you will need to add the OSGeo Maven Repository:

```
<repository>
  <id>osgeo-releases</id>
  <name>OSGeo Nexus Release Repository</name>
  <url>https://repo.osgeo.org/repository/release/</url>
  <snapshots>
    <enabled>false</enabled>
  </snapshots>
  <releases>
    <enabled>true</enabled>
  </releases>
</repository>
```

and then include the GeoScript Groovy dependency:

```
<dependency>
  <groupId>org.geoscript</groupId>
  <artifactId>geoscript-groovy</artifactId>
  <version>1.22.0</version>
</dependency>
```

Gradle

To use GeoScript Groovy in a Gradle project, add the following repositories:

```
repositories {
  maven {
    url "https://repo.osgeo.org/repository/release/"
  }
}
```

and then include the GeoScript Groovy dependency:

```
dependencies {
  compile("org.geoscript:geoscript-groovy:1.22.0")
}
```

Geometry Recipes

The Geometry classes are in the [geoscript.geom](#) package.

Creating Geometries

Point

Create a Point with an XY


```
Point point = new Point(-123,46)
```



LineString

Create a LineString from Coordinates


```
LineString lineString = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125]  
)
```

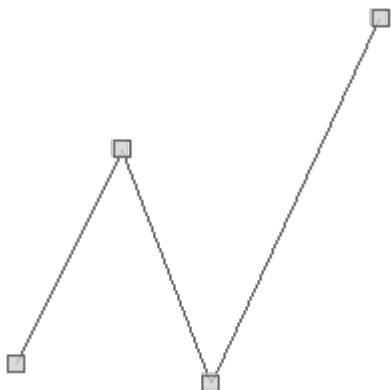

Polygon


Create a Polygon from a List of Coordinates

```
Polygon polygon = new Polygon([[  
    [-101.35986328125, 47.754097979680026],  
    [-101.5576171875, 46.93526088057719],  
    [-100.12939453125, 46.51351558059737],  
    [-99.77783203125, 47.44294999517949],  
    [-100.4589843749999, 47.88688085106901],  
    [-101.35986328125, 47.754097979680026]  
]])
```

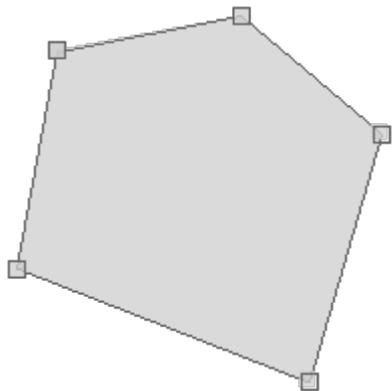

Create a Polygon with holes

```
Polygon polygonWithHoles = new Polygon(  
    // Exterior Ring  
    new LinearRing(  
        [-122.39138603210449, 47.58659965790016],  
        [-122.41250038146973, 47.57681522195182],  
        [-122.40305900573729, 47.56523364515569],  
        [-122.38117218017578, 47.56621817878201],  
        [-122.3712158203125, 47.57235661809739],  
        [-122.37602233886717, 47.584747123985615],  
        [-122.39138603210449, 47.58659965790016]  
    ),  
    // Holes  
    [  
        new LinearRing(  
            [-122.39859580993652, 47.578957532923376],  
            [-122.40468978881836, 47.57548347095205],  
            [-122.39593505859376, 47.570271945800094],  
            [-122.3920726776123, 47.57606249728773],  
            [-122.39859580993652, 47.578957532923376]  
        ),  
        new LinearRing(  
            [-122.3836612701416, 47.58156292813543],  
            [-122.38829612731934, 47.57114056934196],  
            [-122.37456321716309, 47.57420959047542],  
            [-122.37868309020995, 47.58023129789275],  
            [-122.3836612701416, 47.58156292813543]  
        )  
    ]  
)
```

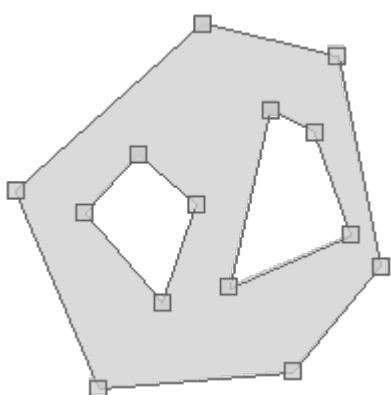

MultiPoint

Create a MultiPoint with a List of Points


```
MultiPoint multiPoint = new MultiPoint([
    new Point(-122.3876953125, 47.5820839916191),
    new Point(-122.464599609375, 47.25686404408872),
    new Point(-122.48382568359374, 47.431803338643334)
])
```



MultiLineString

Create a MultiLineString with a List of LineStrings


```
MultiLineString multiLineString = new MultiLineString([
    new LineString (
        [-122.3822021484375, 47.57837853860192],
        [-122.32452392578125, 47.48380086737799]
    ),
    new LineString (
        [-122.32452392578125, 47.48380086737799],
        [-122.29705810546874, 47.303447043862626]
    ),
    new LineString (
        [-122.29705810546874, 47.303447043862626],
        [-122.42889404296875, 47.23262467463881]
    )
])
```

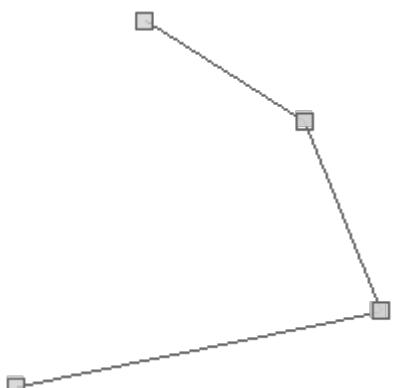

MultiPolygon

Create a MultiPolygon with a List of Polygons


```
MultiPolygon multiPolygon = new MultiPolygon(  
    new Polygon ([[  
        [-122.2723388671875, 47.818687628247105],  
        [-122.37945556640624, 47.66168780332917],  
        [-121.95373535156249, 47.67093619422418],  
        [-122.2723388671875, 47.818687628247105]  
    ]]),  
    new Polygon ([[  
        [-122.76672363281249, 47.42437092240516],  
        [-122.76672363281249, 47.59505101193038],  
        [-122.52227783203125, 47.59505101193038],  
        [-122.52227783203125, 47.42437092240516],  
        [-122.76672363281249, 47.42437092240516]  
    ]]),  
    new Polygon ([[  
        [-122.20367431640624, 47.543163654317304],  
        [-122.3712158203125, 47.489368981370724],  
        [-122.33276367187499, 47.35371061951363],  
        [-122.11029052734374, 47.3704545156932],  
        [-122.08831787109375, 47.286681888764214],  
        [-122.28332519531249, 47.2270293988673],  
        [-122.2174072265625, 47.154237057576594],  
        [-121.904296875, 47.32579231609051],  
        [-122.06085205078125, 47.47823216312885],  
        [-122.20367431640624, 47.543163654317304]  
    ]])  
)
```

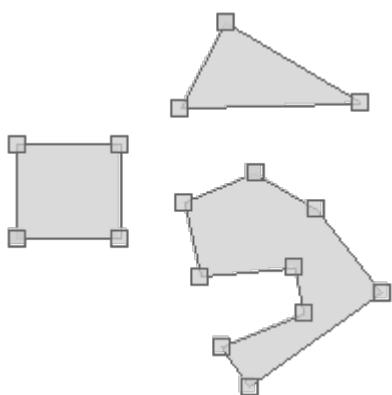

GeometryCollection

Create a GeometryCollection with a List of Geometries


```
GeometryCollection geometryCollection = new GeometryCollection(  
    new LineString([-157.044, 58.722], [-156.461, 58.676]),  
    new Point(-156.648, 58.739),  
    new Polygon([[  
        [-156.395, 58.7083],  
        [-156.412, 58.6026],  
        [-155.874, 58.5825],  
        [-155.313, 58.4822],  
        [-155.385, 58.6655],  
        [-156.203, 58.7368],  
        [-156.395, 58.7083]  
    ]]),  
    new Point(-156.741, 58.582)  
)
```

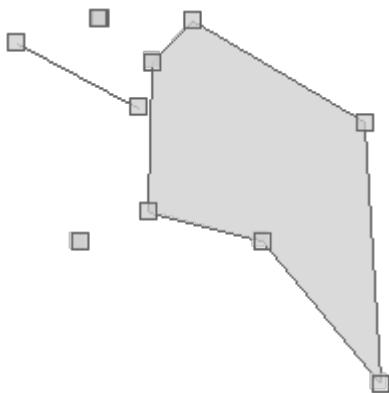

CircularString

Create a CircularString with a List of Points


```
CircularString circularString = new CircularString([  
    [-122.464599609375, 47.247542522268006],  
    [-122.03613281249999, 47.37789454155521],  
    [-122.37670898437499, 47.58393661978134]  
)
```

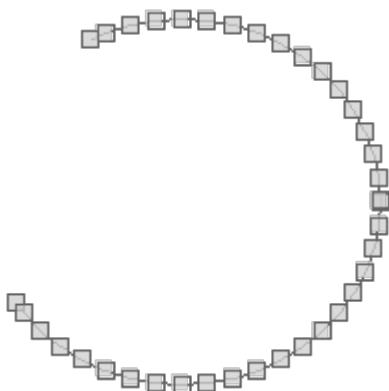

CircularRing

Create a CircularRing with a List of Points


```
CircularRing circularRing = new CircularRing([
    [-118.4765624999999, 41.508577297439324],
    [-109.6875, 57.51582286553883],
    [-93.8671875, 42.032974332441405],
    [-62.57812500000001, 30.14512718337613],
    [-92.10937499999999, 7.36246686553575],
    [-127.265625, 14.604847155053898],
    [-118.47656249999999, 41.508577297439324]
])
```

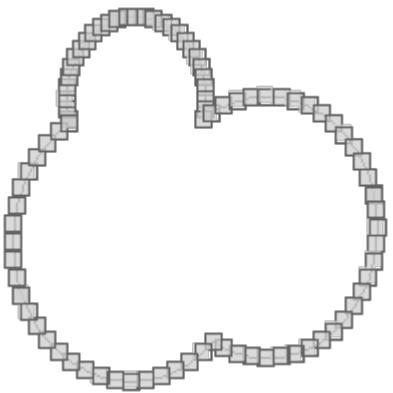

CompoundCurve

Create a CompoundCurve with a List of CircularStrings and LineStrings


```
CompoundCurve compoundCurve = new CompoundCurve([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ])
])
```

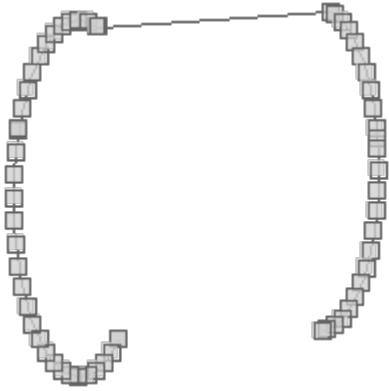

CompoundRing

Create a *CompoundRing* with a connected List of CircularStrings and LineStrings

```
CompoundRing compoundRing = new CompoundRing([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ]),
    new LineString([
        [69.9609375, 24.5271348225978],
        [27.0703125, 23.885837699862005],
    ])
])
```

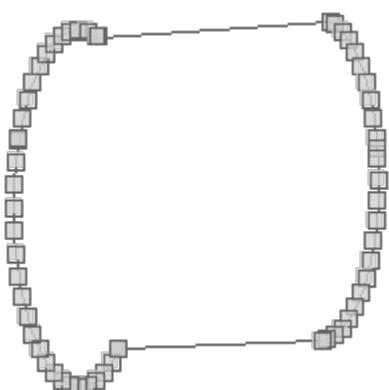

Points

Get x, y, and z values from a Point

```
Point point = new Point(-122.38632, 47.58208, 101.45)
println "X = ${point.x}"
println "Y = ${point.y}"
println "Z = ${point.z}"
```



```
X = -122.38632
Y = 47.58208
Z = 101.45
```

Add two Points together to create a MultiPoint

```
Point point1 = new Point(-122.38632, 47.58208)
Point point2 = new Point(-122.37001, 47.55868)
MultiPoint points = point1 + point2
```



Add a Point to a MultiPoint

```
MultiPoint multiPoint = new MultiPoint(  
    new Point(-122.83813, 47.05141),  
    new Point(-122.38220, 47.58023)  
)  
println multiPoint.wkt  
MultiPoint newMultiPoint = multiPoint + new Point(-122.48657, 47.271775)  
println newMultiPoint.wkt
```

```
MULTIPOINT ((-122.83813 47.05141), (-122.3822 47.58023))  
MULTIPOINT ((-122.83813 47.05141), (-122.3822 47.58023), (-122.48657 47.271775))
```

MultiPoint



MultiPoint with extra Point



Calculate the angle between two points

```
Point point1 = new Point(-122.29980, 47.65058)  
Point point2 = new Point(-120.54199, 46.64943)  
double angleInDegrees = point1.getAngle(point2, "degrees")  
println "Angle in degrees = ${angleInDegrees}"  
  
double angleInRadians = point1.getAngle(point2, "radians")  
println "Angle in radians = ${angleInRadians}"
```

□

□

```
Angle in degrees = -29.663413013476646  
Angle in radians = -0.5177242244641005
```

Calculate the azimuth between two points

```
Point point1 = new Point(-122.29980, 47.65058)  
Point point2 = new Point(-120.54199, 46.64943)  
double azimuth = point1.getAzimuth(point2)  
println "Azimuth = ${azimuth}"
```

□


□

```
Azimuth = 129.21026122904846
```

LineStrings


Get the start Point from a LineString

```
LineString lineString = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125])  
Point startPoint = lineString.startPoint
```

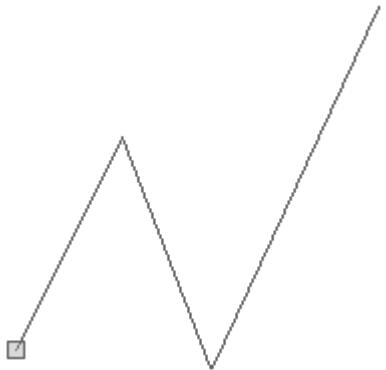

Get the end Point from a LineString


```
LineString lineString = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125]  
)  
Point endPoint = lineString.endPoint
```

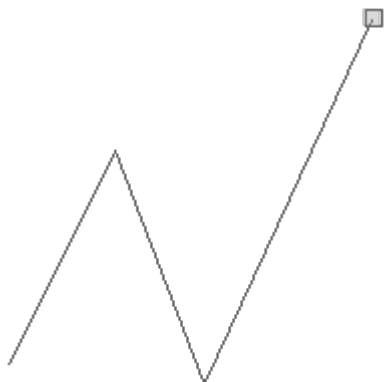


Reverse a LineString

```
LineString lineString = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125]  
)  
Point startPoint = lineString.startPoint  
  
LineString reversedLineString = lineString.reverse()  
Point reversedStartPoint = reversedLineString.startPoint
```

Original LineString showing start point

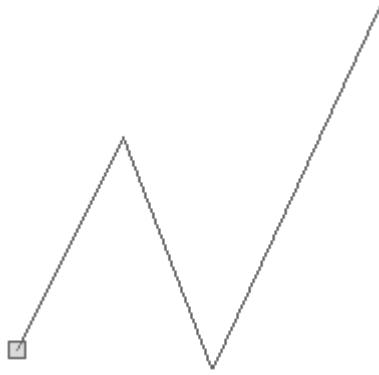


Reversed LineString showing start point

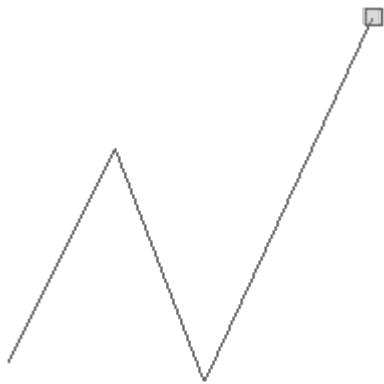


Determine if a LineString is closed or not

```
LineString lineString1 = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125]  
)  
boolean isClosed1 = lineString1.closed  
println "Is ${lineString1.wkt} closed? ${isClosed1}"  
  
LineString lineString2 = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125],  
    [3.1982421875, 43.1640625]  
)  
boolean isClosed2 = lineString2.closed  
println "Is ${lineString2.wkt} closed? ${isClosed2}"
```

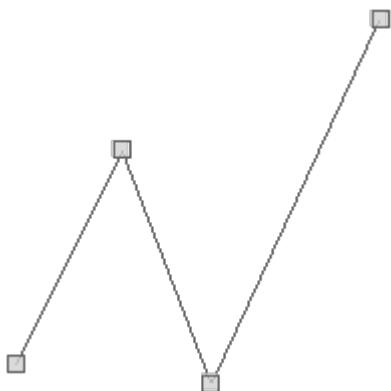


```
Is LINESTRING (3.1982421875 43.1640625, 6.7138671875 49.755859375, 9.7021484375  
42.5927734375, 15.3271484375 53.798828125) closed? false
```

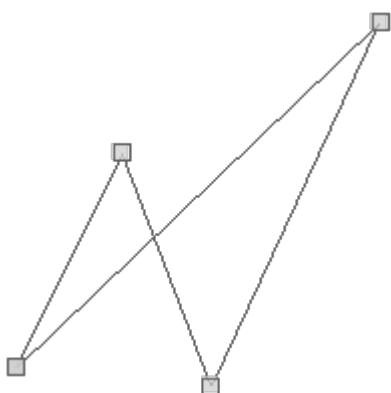


```
Is LINESTRING (3.1982421875 43.1640625, 6.7138671875 49.755859375, 9.7021484375  
42.5927734375, 15.3271484375 53.798828125, 3.1982421875 43.1640625) closed? true
```

Determine if a LineString is a Ring or not

```
LineString lineString1 = new LineString(  
    [-122.391428, 47.563300],  
    [-122.391836, 47.562793],  
    [-122.391010, 47.562417],  
    [-122.390516, 47.563126]  
)  
boolean isRing1 = lineString1.ring  
println "Is ${lineString1.wkt} a ring? ${isRing1}"  
  
LineString lineString2 = new LineString(  
    [-122.391428, 47.563300],  
    [-122.391836, 47.562793],  
    [-122.391010, 47.562417],  
    [-122.390516, 47.563126],  
    [-122.391428, 47.563300]  
)  
boolean isRing2 = lineString2.ring  
println "Is ${lineString2.wkt} a ring? ${isRing2}"
```

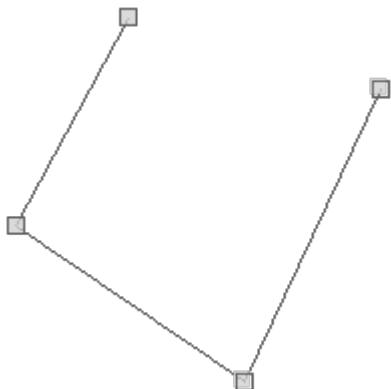

Is LINESTRING (-122.391428 47.5633, -122.391836 47.562793, -122.39101 47.562417, -122.390516 47.563126) a ring? false

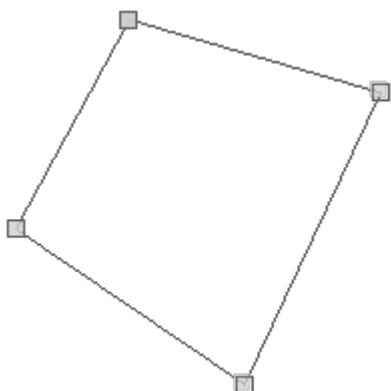


Is LINESTRING (-122.391428 47.5633, -122.391836 47.562793, -122.39101 47.562417, -122.390516 47.563126, -122.391428 47.5633) a ring? true


Close an open LineString to create a LinearRing

```
LineString lineString = new LineString(  
    [-122.391428, 47.563300],  
    [-122.391836, 47.562793],  
    [-122.391010, 47.562417],  
    [-122.390516, 47.563126])  
  
LinearRing linearRing = lineString.close()
```

Open LineString

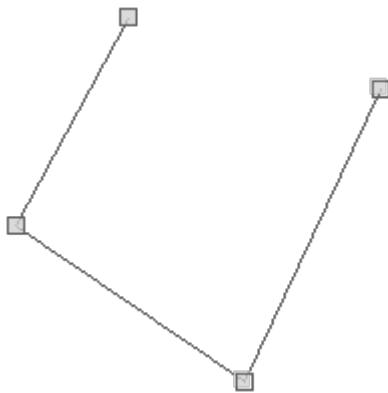

Closed LinearRing

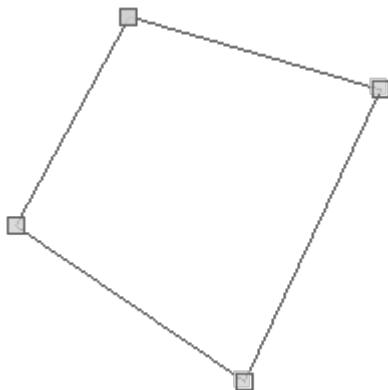


Add a LineString to another LineString to create a MultiLineString

```
LineString lineString1 = new LineString([
    [-122.39142894744873, 47.5812734461813],
    [-122.38237380981445, 47.58121554959838]
])

LineString lineString2 = new LineString([
    [-122.38640785217285, 47.58552866972616],
    [-122.38670825958253, 47.57837853860192]
])

MultiLineString multiLineString = lineString1 + lineString2
```

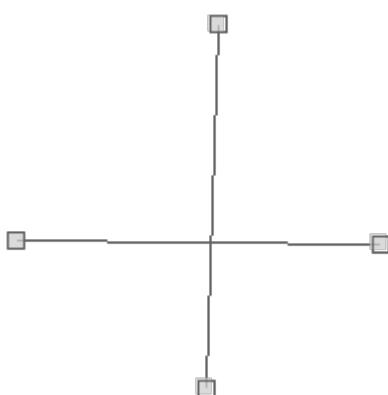


Add a Point to a LineString

```
LineString lineString = new LineString([
    [-122.39142894744873, 47.5812734461813],
    [-122.38237380981445, 47.58121554959838]
])

Point point = new Point(-122.38640785217285, 47.58552866972616)

LineString lineStringWithPoint = lineString + point
```

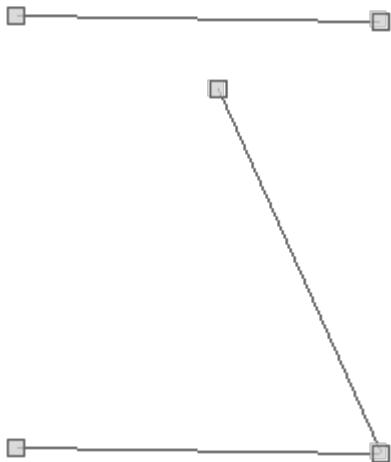


Add a Point to a LineString at a specific index

```
LineString lineString = new LineString([
    [-122.39142894744873, 47.5812734461813],
    [-122.38237380981445, 47.58121554959838]
])

Point point = new Point(-122.38640785217285, 47.58552866972616)


LineString lineStringWithPoint = lineString.addPoint(1, point)
```

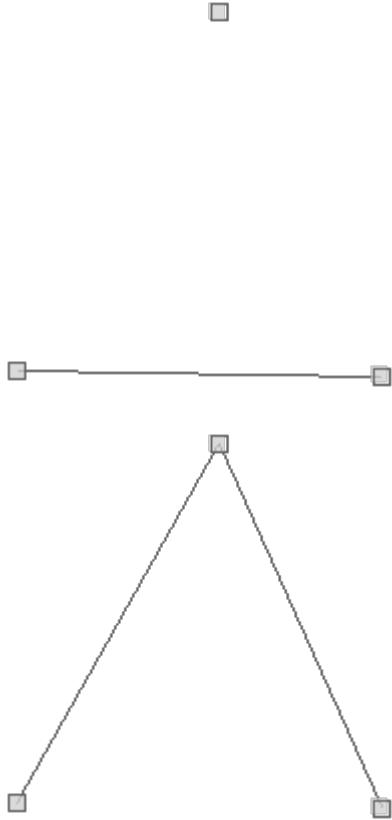

Set a Point on a LineString at a specific index

```
LineString lineString = new LineString([
    [-122.39142894744873, 47.5812734461813],
    [-122.38237380981445, 47.58121554959838]
])
Point point = new Point(-122.38640785217285, 47.58552866972616)
LineString.newLineString = lineString.setPoint(1, point)
```




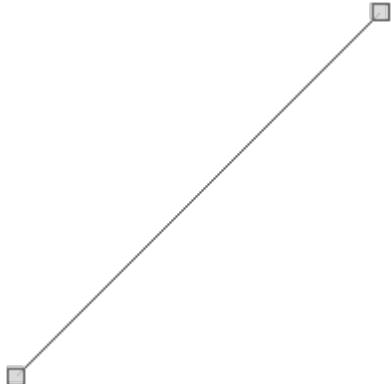

Remove a Point on a LineString at a specific index


```
LineString lineString = new LineString([
    [-122.39142894744873, 47.5812734461813],
    [-122.38237380981445, 47.58121554959838],
    [-122.38640785217285, 47.58552866972616]
])
```

```
LineString newLineString = lineString.removePoint(2)
```

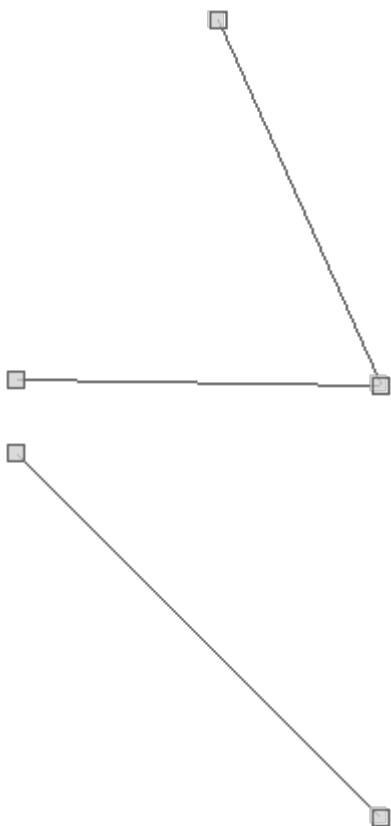


Remove a Point from the end of a LineString.


```
LineString lineString1 = new LineString([
    [-122.39423990249632, 47.57926150237904],
    [-122.3918581008911, 47.58121554959838],
    [-122.38657951354979, 47.58121554959838],
    [-122.38638639450075, 47.58535499390333],
    [-122.38374710083008, 47.58535499390333]
])
```

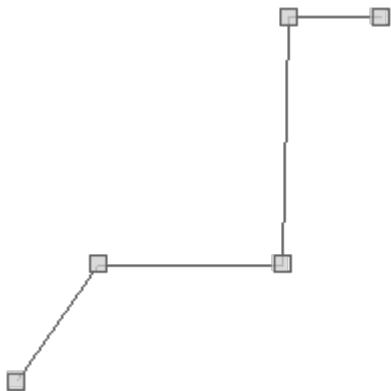

```
LineString lineString2 = -lineString1
```

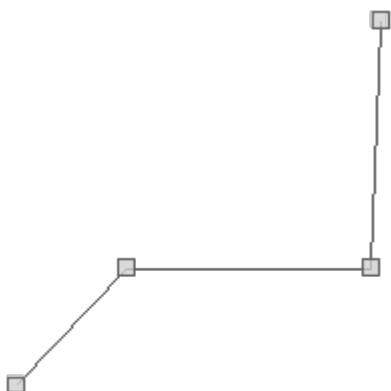


```
LineString lineString3 = -lineString2
```

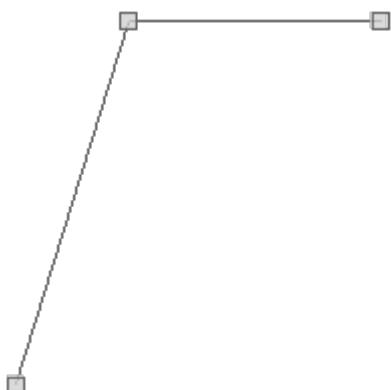

Interpolate Points on a LineString

```
LineString lineString = new LineString([
    [-122.39423990249632, 47.57926150237904],
    [-122.3918581008911, 47.58121554959838],
    [-122.38657951354979, 47.58121554959838],
    [-122.38638639450075, 47.58535499390333],
    [-122.38374710083008, 47.58535499390333]
])
Point startPoint = lineString.interpolatePoint(0.0)
Point midPoint = lineString.interpolatePoint(0.5)
Point endPoint = lineString.interpolatePoint(1.0)
```

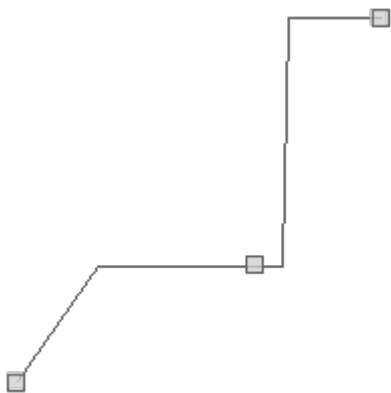


Locate the position of Points on a LineString

```
LineString lineString = new LineString([
    [-122.39423990249632, 47.57926150237904],
    [-122.3918581008911, 47.58121554959838],
    [-122.38657951354979, 47.58121554959838],
    [-122.38638639450075, 47.58535499390333],
    [-122.38374710083008, 47.58535499390333]
])

Point point1 = new Point(-122.39423990249632, 47.57926150237904)
Double position1 = lineString.locatePoint(point1)
println "Position of ${point1} is ${position1}"

Point point2 = new Point(-122.38736758304911, 47.58121554959838)
Double position2 = lineString.locatePoint(point2)
println "Position of ${point2} is ${position2}"

Point point3 = new Point(-122.38374710083008, 47.58535499390333)
Double position3 = lineString.locatePoint(point3)
println "Position of ${point3} is ${position3}"
```

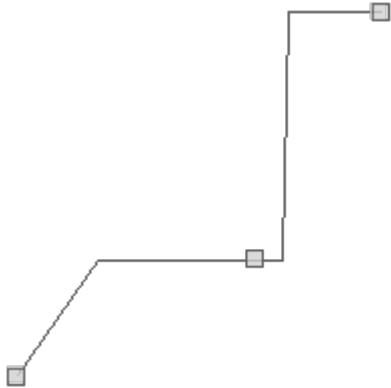


```
Position of POINT (-122.39423990249632 47.57926150237904) is 0.0  
Position of POINT (-122.38736758304911 47.58121554959838) is 0.5000000000004425  
Position of POINT (-122.38374710083008 47.58535499390333) is 1.0
```

Place Points on a LineString

```
LineString lineString = new LineString ([  
    [-122.37155914306639, 47.5716617365518],  
    [-122.32160568237306, 47.5714301073211]  
)  
  
Point point1 = new Point(-122.358341217041, 47.57432539907205)  
Point pointOnLine1 = lineString.placePoint(point1)  
  
Point point2 = new Point(-122.33860015869139, 47.56830301243495)  
Point pointOnLine2 = lineString.placePoint(point2)
```

Points near LineString




Point on LineString




Extract part of a LineString

```
LineString lineString = new LineString([
    [-122.39423990249632, 47.57926150237904],
    [-122.3918581008911, 47.58121554959838],
    [-122.38657951354979, 47.58121554959838],
    [-122.38638639450075, 47.58535499390333],
    [-122.38374710083008, 47.58535499390333]
])
LineString subLine = lineString.subLine(0.33, 0.66)
```

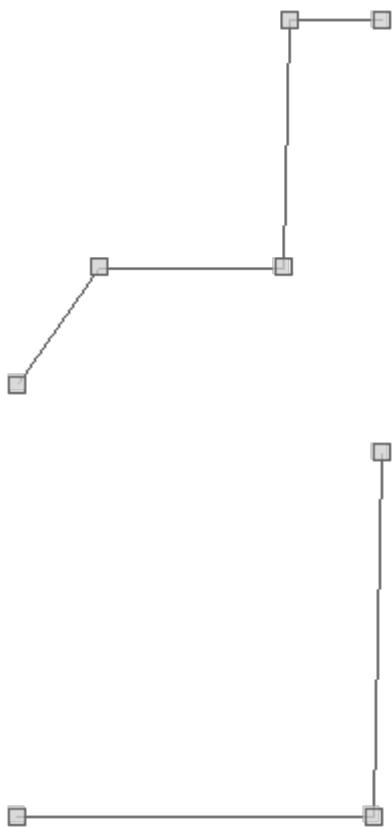

Create Points along a LineString


```
LineString lineString = new LineString([
    [-122.39423990249632, 47.57926150237904],
    [-122.3918581008911, 47.58121554959838],
    [-122.38657951354979, 47.58121554959838],
    [-122.38638639450075, 47.58535499390333],
    [-122.38374710083008, 47.58535499390333]
])
MultiPoint multiPoint = lineString.createPointsAlong(0.001)
```

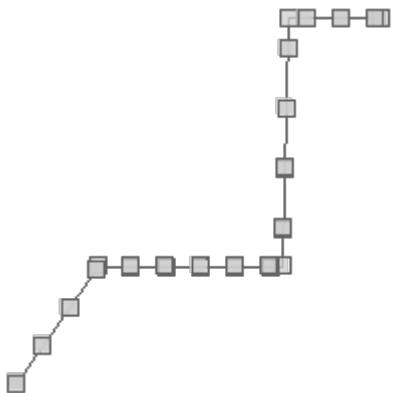


Polygons

Get a Polygon's exterior LinearRing

```
Polygon polygon = new Polygon(  
    // Exterior Ring  
    new LinearRing(  
        [-122.39138603210449, 47.58659965790016],  
        [-122.41250038146973, 47.57681522195182],  
        [-122.40305900573729, 47.56523364515569],  
        [-122.38117218017578, 47.56621817878201],  
        [-122.3712158203125, 47.57235661809739],  
        [-122.37602233886717, 47.584747123985615],  
        [-122.39138603210449, 47.58659965790016]  
    ),  
    // Holes  
    [  
        new LinearRing(  
            [-122.39859580993652, 47.578957532923376],  
            [-122.40468978881836, 47.57548347095205],  
            [-122.39593505859376, 47.570271945800094],  
            [-122.3920726776123, 47.57606249728773],  
            [-122.39859580993652, 47.578957532923376]  
        ),  
        new LinearRing(  
            [-122.3836612701416, 47.58156292813543],  
            [-122.38829612731934, 47.57114056934196],  
            [-122.37456321716309, 47.57420959047542],  
            [-122.37868309020995, 47.58023129789275],  
            [-122.3836612701416, 47.58156292813543]  
        )  
    ]  
)  
LinearRing exteriorRing = polygon.getExteriorRing()
```

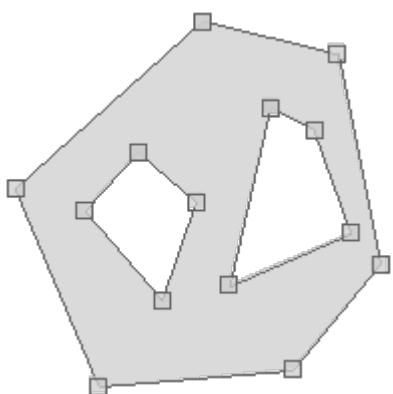

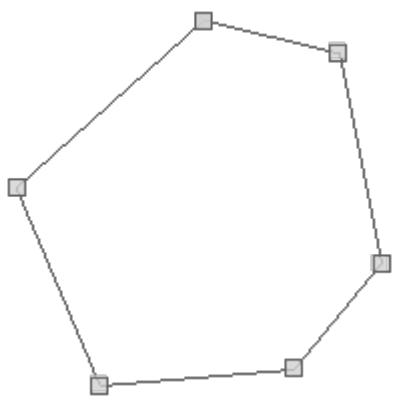

Get a Polygon's interior LinearRings

```
Polygon polygon = new Polygon(
    // Exterior Ring
    new LinearRing(
        [-122.39138603210449, 47.58659965790016],
        [-122.41250038146973, 47.57681522195182],
        [-122.40305900573729, 47.56523364515569],
        [-122.38117218017578, 47.56621817878201],
        [-122.3712158203125, 47.57235661809739],
        [-122.37602233886717, 47.584747123985615],
        [-122.39138603210449, 47.58659965790016]
    ),
    // Holes
    [
        new LinearRing(
            [-122.39859580993652, 47.578957532923376],
            [-122.40468978881836, 47.57548347095205],
            [-122.39593505859376, 47.570271945800094],
            [-122.3920726776123, 47.57606249728773],
            [-122.39859580993652, 47.578957532923376]
        ),
        new LinearRing(
            [-122.3836612701416, 47.58156292813543],
            [-122.38829612731934, 47.57114056934196],
            [-122.37456321716309, 47.57420959047542],
            [-122.37868309020995, 47.58023129789275],
            [-122.3836612701416, 47.58156292813543]
        )
    ]
)




println "# Interior Rings = ${polygon.numInteriorRing}"
(0..<polygon.numInteriorRing).each { int i ->
    println " ${polygon.getInteriorRingN(i)}"
}

println "Interior Rings"
polygon.interiorRings.each { LinearRing ring ->
    println " ${ring}"
}
```

```
# Interior Rings = 2
LINEARRING (-122.39859580993652 47.578957532923376, -122.40468978881836
47.57548347095205, -122.39593505859376 47.570271945800094, -122.3920726776123
47.57606249728773, -122.39859580993652 47.578957532923376)
LINEARRING (-122.3836612701416 47.58156292813543, -122.38829612731934
47.57114056934196, -122.37456321716309 47.57420959047542, -122.37868309020995
47.58023129789275, -122.3836612701416 47.58156292813543)
```



Interior Rings

```
LINEARRING (-122.39859580993652 47.578957532923376, -122.40468978881836
47.57548347095205, -122.39593505859376 47.570271945800094, -122.3920726776123
47.57606249728773, -122.39859580993652 47.578957532923376)
LINEARRING (-122.3836612701416 47.58156292813543, -122.38829612731934
47.57114056934196, -122.37456321716309 47.57420959047542, -122.37868309020995
47.58023129789275, -122.3836612701416 47.58156292813543)
```

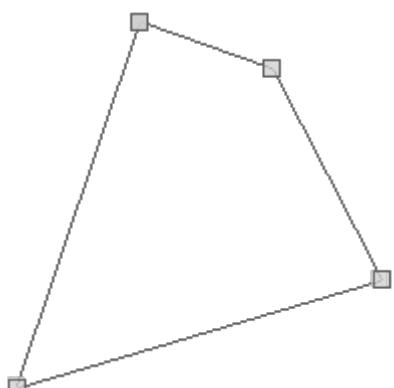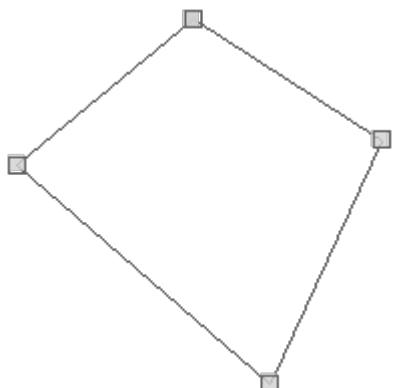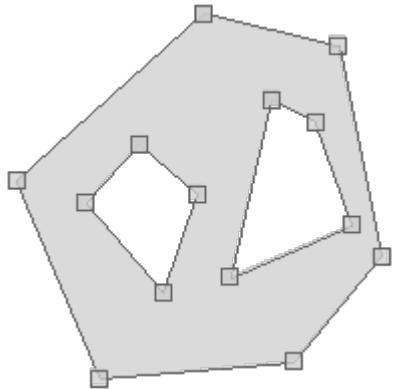



Add a Polygon to another Polygon to create a MultiPolygon

```
Polygon polygon1 = new Polygon ([[  
    [-122.2723388671875, 47.818687628247105],  
    [-122.37945556640624, 47.66168780332917],  
    [-121.95373535156249, 47.67093619422418],  
    [-122.2723388671875, 47.818687628247105]  
])  
Polygon polygon2 = new Polygon ([[  
    [-122.76672363281249, 47.42437092240516],  
    [-122.76672363281249, 47.59505101193038],  
    [-122.52227783203125, 47.59505101193038],  
    [-122.52227783203125, 47.42437092240516],  
    [-122.76672363281249, 47.42437092240516]  
])  
MultiPolygon multiPolygon = polygon1 + polygon2
```



Split a Polygon with a LineString

```
Polygon polygon = new Polygon(  
    new LinearRing(  
        [-122.39138603210449, 47.58659965790016],  
        [-122.41250038146973, 47.57681522195182],  
        [-122.40305900573729, 47.56523364515569],  
        [-122.38117218017578, 47.56621817878201],  
        [-122.3712158203125, 47.57235661809739],  
        [-122.37602233886717, 47.584747123985615],  
        [-122.39138603210449, 47.58659965790016]  
    )  
)  
  
LineString lineString = new LineString([  
    [-122.3924160003662, 47.56395951534652],  
    [-122.38649368286131, 47.58729434121508]  
)  
  
MultiPolygon multiPolygon = polygon.split(lineString)
```

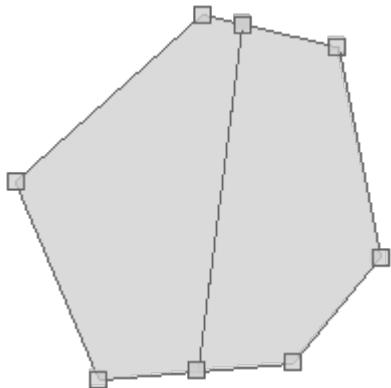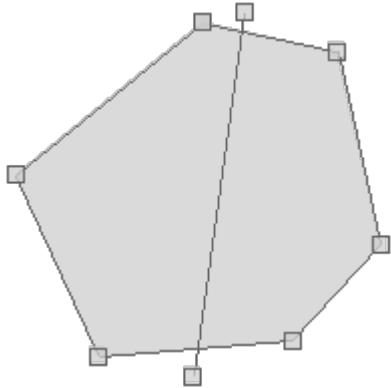


MultiLineStrings

Add a LineString to a MultiLineString to get a new MultiLineString

```
MultiLineString multiLineString = new MultiLineString([
    new LineString (
        [-122.3822021484375, 47.57837853860192],
        [-122.32452392578125, 47.48380086737799]
    ),
    new LineString (
        [-122.32452392578125, 47.48380086737799],
        [-122.29705810546874, 47.303447043862626]
    )
])

LineString lineString = new LineString (
    [-122.29705810546874, 47.303447043862626],
    [-122.42889404296875, 47.23262467463881]
)

MultiLineString newMultiLineString = multiLineString + lineString
```

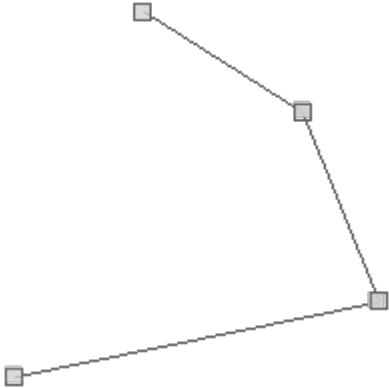


Merge the LineStrings in a MultiLineString

```
MultiLineString multiLineString = new MultiLineString([
    new LineString (
        [-122.3822021484375, 47.57837853860192],
        [-122.32452392578125, 47.48380086737799]
    ),
    new LineString (
        [-122.32452392578125, 47.48380086737799],
        [-122.29705810546874, 47.303447043862626]
    ),
    new LineString (
        [-122.29705810546874, 47.303447043862626],
        [-122.42889404296875, 47.23262467463881]
    )
])
MultiLineString mergedMultiLineString = multiLineString.merge()

println "Original MultiLineString = ${multiLineString}"
println "Merged MultiLineString = ${mergedMultiLineString}"
```


```
Original MultiLineString = MULTILINESTRING ((-122.3822021484375 47.57837853860192,
-122.32452392578125 47.48380086737799), (-122.32452392578125 47.48380086737799,
-122.29705810546874 47.303447043862626), (-122.29705810546874 47.303447043862626,
-122.42889404296875 47.23262467463881))
```

```
Merged MultiLineString = MULTILINESTRING ((-122.3822021484375 47.57837853860192,
-122.32452392578125 47.48380086737799, -122.29705810546874 47.303447043862626,
-122.42889404296875 47.23262467463881))
```

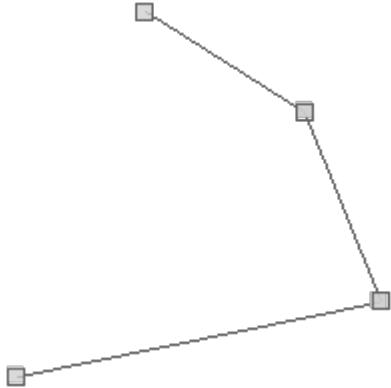

Create Points along a MultiLineString


```
MultiLineString lines = new MultiLineString(  
    new LineString([-5.70068359375, 45.1416015625], [2.47314453125,  
53.9306640625]),  
    new LineString([-1.21826171875, 53.9306640625], [8.88916015625,  
46.1962890625]),  
    new LineString([0.71533203125, 42.63671875], [7.13134765625, 50.37109375]),  
    new LineString([-5.83251953125, 46.943359375], [4.45068359375, 42.98828125])  
)  
MultiPoint points = lines.createPointsAlong(1)
```

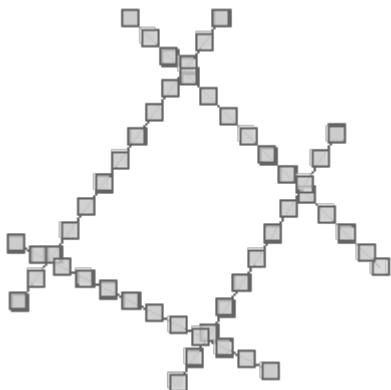

MultiPolygons

Add a Polygon to a MultiPolygon to get a new MultiPolygon


```
MultiPolygon multiPolygon = new MultiPolygon (   
    new Polygon ([[  
        [-122.2723388671875, 47.818687628247105],  
        [-122.37945556640624, 47.66168780332917],  
        [-121.95373535156249, 47.67093619422418],  
        [-122.2723388671875, 47.818687628247105]  
    ]]),  
    new Polygon ([[  
        [-122.76672363281249, 47.42437092240516],  
        [-122.76672363281249, 47.59505101193038],  
        [-122.52227783203125, 47.59505101193038],  
        [-122.52227783203125, 47.42437092240516],  
        [-122.76672363281249, 47.42437092240516]  
    ]])  
)  
Polygon polygon = new Polygon ([[  
    [-122.32177734375, 47.54501765940571],  
    [-122.27645874023438, 47.36673410912714],  
    [-122.03887939453125, 47.44480754169437],  
    [-122.15972900390624, 47.55150616084034],  
    [-122.32177734375, 47.54501765940571]  
])  
  
MultiPolygon newMultiPolygon = multiPolygon + polygon
```

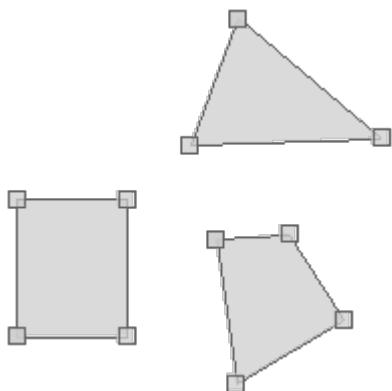


Split a MultiPolygon with a LineString

```
MultiPolygon multiPolygon = new MultiPolygon (   
    new Polygon ([[  
        [-122.2723388671875, 47.818687628247105],  
        [-122.37945556640624, 47.66168780332917],  
        [-121.95373535156249, 47.67093619422418],  
        [-122.2723388671875, 47.818687628247105]  
    ]]),  
    new Polygon ([[  
        [-122.76672363281249, 47.42437092240516],  
        [-122.76672363281249, 47.59505101193038],  
        [-122.52227783203125, 47.59505101193038],  
        [-122.52227783203125, 47.42437092240516],  
        [-122.76672363281249, 47.42437092240516]  
    ]]),  
    new Polygon ([[  
        [-122.32177734375, 47.54501765940571],  
        [-122.27645874023438, 47.36673410912714],  
        [-122.03887939453125, 47.44480754169437],  
        [-122.15972900390624, 47.55150616084034],  
        [-122.32177734375, 47.54501765940571]  
    ]])  
)  
  
LineString lineString = new LineString([[-122.84362792968749, 47.484728927366504],  
    [-122.05810546875, 47.50421439972969],  
    [-122.35748291015625, 47.85832433461554]  
)  
  
Geometry splitGeometry = multiPolygon.split(lineString)
```

Before

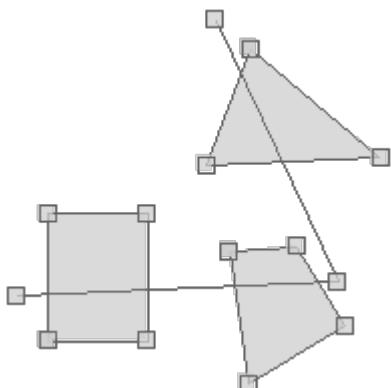

After

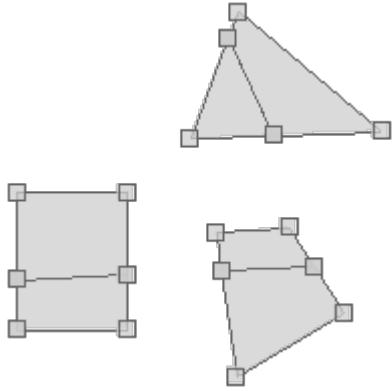


Geometry Collections


Add a Geometry to a Geometry Collection

```
GeometryCollection geometryCollection = new GeometryCollection([
    new Point(-122.38654196262358, 47.581211931059826),
    new LineString([
        [-122.3865446448326, 47.58118841055313],
        [-122.38657146692276, 47.58067638459562]
    ]),
    new Polygon(new LinearRing([
        [-122.38693356513977, 47.58088445228483],
        [-122.38672703504562, 47.58088445228483],
        [-122.38672703504562, 47.58096225129535],
        [-122.38693356513977, 47.58096225129535],
        [-122.38693356513977, 47.58088445228483]
    ]))
])
GeometryCollection newGeometryCollection = geometryCollection + new Point(-
122.38718032836913, 47.58121374032914)
```

Original Geometry Collection

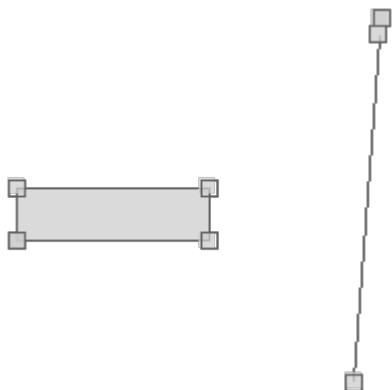


New Geometry Collection

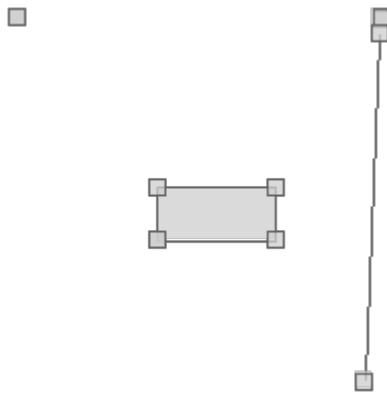


Get a subset of Geometries from a Geometry Collection


```
GeometryCollection geometryCollection = new GeometryCollection([
    new Point(-122.38654196262358, 47.581211931059826),
    new LineString([
        [-122.3865446448326, 47.58118841055313],
        [-122.38657146692276, 47.58067638459562]
    ]),
    new Polygon(new LinearRing([
        [-122.38693356513977, 47.58088445228483],
        [-122.38672703504562, 47.58088445228483],
        [-122.38672703504562, 47.58096225129535],
        [-122.38693356513977, 47.58096225129535],
        [-122.38693356513977, 47.58088445228483]
    ]))
])
```

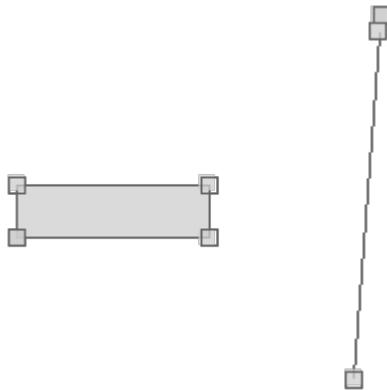

```
Polygon slicedGeometryCollection1 = geometryCollection.slice(2)
```

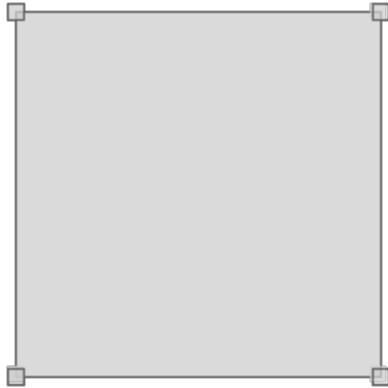

```
GeometryCollection slicedGeometryCollection2 = geometryCollection.slice(0,2)
```

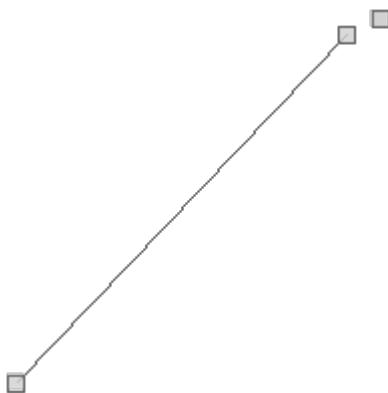

Get a Geometry from a GeometryCollection that is the most type specific as possible.

```
GeometryCollection geometryCollection1 = new GeometryCollection([
    new Point(-122.38654196262358, 47.581211931059826),
    new Point(-122.38718032836913, 47.58121374032914),
])
Geometry narrowedGeometry1 = geometryCollection1.narrow()
println "Narrow Geometry #1 = ${narrowedGeometry1.wkt}"
```



```
Narrow Geometry #1 = MULTIPOINT ((-122.38654196262358 47.581211931059826), (-122.38718032836913 47.58121374032914))
```

```

GeometryCollection geometryCollection2 = new GeometryCollection([
    new Point(-122.38654196262358, 47.581211931059826),
    new Polygon(new LinearRing([
        [-122.38693356513977, 47.58088445228483],
        [-122.38672703504562, 47.58088445228483],
        [-122.38672703504562, 47.58096225129535],
        [-122.38693356513977, 47.58096225129535],
        [-122.38693356513977, 47.58088445228483]
    ]))
])
Geometry narrowedGeometry2 = geometryCollection2.narrow()
println "Narrow Geometry #2 = ${narrowedGeometry2.wkt}"

```



Narrow Geometry #2 = GEOMETRYCOLLECTION (POINT (-122.38654196262358 47.581211931059826), POLYGON ((-122.38693356513977 47.58088445228483, -122.38672703504562 47.58088445228483, -122.38672703504562 47.58096225129535, -122.38693356513977 47.58096225129535, -122.38693356513977 47.58088445228483)))


Circular Strings

Get Curved WKT from a Circular Strings

```

CircularString circularString = new CircularString([
    [-122.464599609375, 47.247542522268006],
    [-122.03613281249999, 47.37789454155521],
    [-122.37670898437499, 47.58393661978134]
])
println "WKT = ${circularString.wkt}"
println "Curved WKT = ${circularString.curvedWkt}"

```

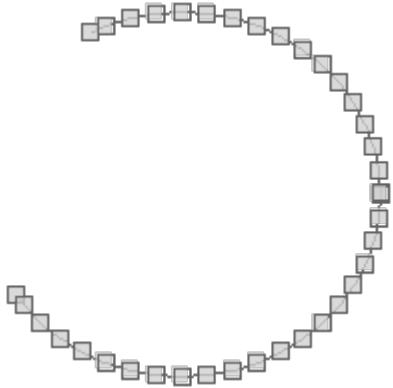

```

WKT = LINESTRING (-122.464599609375 47.247542522268006, -122.45502379201072
47.23410579860775, -122.43487808337773 47.21113402059189, -122.41190630536187
47.19098831195889, -122.38650151145399 47.1740133713689, -122.35909838472138
47.160499644761764, -122.33016580026003 47.150678355746436, -122.3001988026117
47.14471754930094, -122.26971013541457 47.14271921647622, -122.23922146821744
47.14471754930094, -122.2092544705691 47.150678355746436, -122.18032188610776
47.160499644761764, -122.15291875937515 47.1740133713689, -122.12751396546727
47.19098831195889, -122.10454218745141 47.21113402059189, -122.08439647881842
47.23410579860775, -122.06742153822843 47.25951059251563, -122.05390781162129
47.28691371924824, -122.04408652260595 47.315846303709584, -122.03812571616047
47.34581330135792, -122.03612738333574 47.37630196855505, -122.03613281249999
47.37789454155521, -122.03812571616047 47.406790635752174, -122.04408652260595
47.43675763340051, -122.05390781162129 47.465690217861855, -122.06742153822843
47.49309334459446, -122.08439647881842 47.518498138502345, -122.10454218745141
47.5414699165182, -122.12751396546727 47.561615625151205, -122.15291875937515
47.578590565741194, -122.18032188610776 47.59210429234833, -122.2092544705691
47.60192558136366, -122.23922146821744 47.60788638780915, -122.26971013541457
47.60988472063387, -122.3001988026117 47.60788638780915, -122.33016580026003
47.60192558136366, -122.35909838472138 47.59210429234833, -122.37670898437499
47.58393661978134)

Curved WKT = CIRCULARSTRING (-122.464599609375 47.247542522268006,
-122.03613281249999 47.37789454155521, -122.37670898437499 47.58393661978134)


```

Get control points from a Circular Strings

```

CircularString circularString = new CircularString([
    [-122.464599609375, 47.247542522268006],
    [-122.03613281249999, 47.37789454155521],
    [-122.37670898437499, 47.58393661978134]
])
List<Point> points = circularString.controlPoints
points.each { Point point -
    println point
}


```

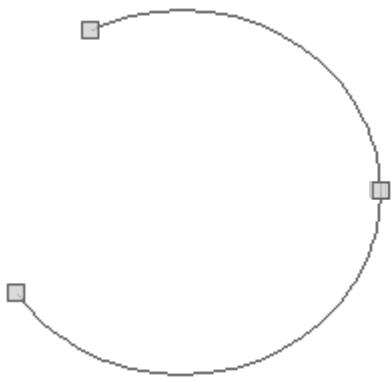

```
POINT (-122.464599609375 47.247542522268006)
POINT (-122.03613281249999 47.37789454155521)
POINT (-122.37670898437499 47.58393661978134)
```

Convert a Circural Strings to a Linear Geometry

```
CircularString circularString = new CircularString([
    [-122.464599609375, 47.247542522268006],
    [-122.03613281249999, 47.37789454155521],
    [-122.37670898437499, 47.58393661978134]
])
Geometry linear = circularString.linear
println linear.wkt
```

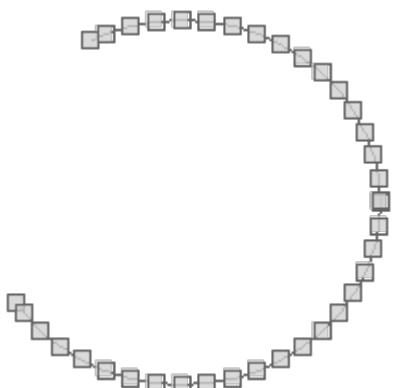

```

LINESTRING (-122.464599609375 47.247542522268006, -122.45502379201072
47.23410579860775, -122.43487808337773 47.21113402059189, -122.41190630536187
47.19098831195889, -122.38650151145399 47.1740133713689, -122.35909838472138
47.160499644761764, -122.33016580026003 47.150678355746436, -122.3001988026117
47.14471754930094, -122.26971013541457 47.14271921647622, -122.23922146821744
47.14471754930094, -122.2092544705691 47.150678355746436, -122.18032188610776
47.160499644761764, -122.15291875937515 47.1740133713689, -122.12751396546727
47.19098831195889, -122.10454218745141 47.21113402059189, -122.08439647881842
47.23410579860775, -122.06742153822843 47.25951059251563, -122.05390781162129
47.28691371924824, -122.04408652260595 47.315846303709584, -122.03812571616047
47.34581330135792, -122.03612738333574 47.37630196855505, -122.03613281249999
47.37789454155521, -122.03812571616047 47.406790635752174, -122.04408652260595
47.43675763340051, -122.05390781162129 47.465690217861855, -122.06742153822843
47.49309334459446, -122.08439647881842 47.518498138502345, -122.10454218745141
47.5414699165182, -122.12751396546727 47.561615625151205, -122.15291875937515
47.578590565741194, -122.18032188610776 47.59210429234833, -122.2092544705691
47.60192558136366, -122.23922146821744 47.60788638780915, -122.26971013541457
47.60988472063387, -122.3001988026117 47.60788638780915, -122.33016580026003
47.60192558136366, -122.35909838472138 47.59210429234833, -122.37670898437499
47.58393661978134)

```


Circular Rings

Get Curved WKT from a Circular Ring

```

CircularRing circularRing = new CircularRing([
    [-118.47656249999999, 41.508577297439324],
    [-109.6875, 57.51582286553883],
    [-93.8671875, 42.032974332441405],
    [-62.57812500000001, 30.14512718337613],
    [-92.10937499999999, 7.36246686553575],
    [-127.265625, 14.604847155053898],
    [-118.47656249999999, 41.508577297439324]
])
println "WKT = ${circularRing.wkt}"
println "Curved WKT = ${circularRing.curvedWkt}"


```

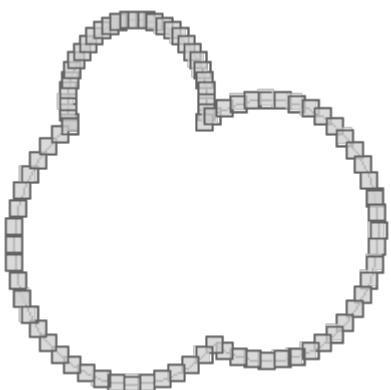

WKT = LINEARRING (-118.47656249999999 41.508577297439324, -118.58869123015454
 41.90177457905915, -118.91479847512255 43.54122641035521, -119.02412442253559
 45.20921804090461, -118.91479847512254 46.87720967145401, -118.58869123015452
 48.51666150275007, -118.05138247300695 50.099522059417374, -117.31206570548476
 51.5987081584795, -116.38339084245754 52.98856831012859, -115.28124776830907
 54.24532162182789, -114.02449445660977 55.34746469597637, -112.63463430496068
 56.27613955900357, -111.13544820589856 57.01545632652577, -109.6875 57.51582286553883,
 -109.55258764923124 57.55276508367335, -107.91313581793518 57.878872328641364,
 -106.24514418738578 57.988198276054405, -104.57715255683637 57.878872328641364,
 -102.93770072554031 57.55276508367335, -101.354840168873 57.01545632652578,
 -99.85565406981087 56.27613955900357, -98.46579391816178 55.34746469597637,
 -97.20904060646248 54.245321621827884, -96.106897532314 52.98856831012859,
 -95.1782226692868 51.598708158479496, -94.4389059017646 50.09952205941737,
 -93.90159714461703 48.516661502750054, -93.57548989964901 46.877209671454,
 -93.46616395223596 45.209218040904595, -93.57548989964901 43.54122641035519,
 -93.8671875 42.032974332441405, -92.52944589377745 42.87620255408929,
 -90.13998424943786 44.054554634672606, -87.61715897053443 44.91093841996456,
 -85.00413629704852 45.43070094596436, -82.34562577139023 45.604948931746776,
 -79.68711524573195 45.430700945964375, -77.07409257224603 44.910938419964566,
 -74.5512672933426 44.05455463467261, -72.161805649003 42.8762025540893,
 -69.9465919904458 41.396044109014326, -67.94352923754218 39.63940522082037,
 -66.18689034934822 37.63634246791675, -64.70673190427324 35.42112880935956,
 -63.52837982368993 33.031667165019954, -62.67199603839798 30.508841886116528,
 -62.57812500000001 30.14512718337613, -62.15223351239817 27.89581921263062,
 -61.97798552661577 25.237308686972334, -62.15223351239817 22.578798161314044,
 -62.67199603839798 19.96577548782814, -63.528379823689924 17.44295020892471,
 -64.70673190427324 15.053488564585109, -66.1868903493482 12.838274906027912,
 -67.94352923754217 10.835212153124287, -69.94659199044578 9.07857326493033,
 -72.16180564900299 7.598414819855357, -74.55126729334258 6.420062739272041,
 -77.074092572246 5.563678953980087, -79.68711524573192 5.043916427980278,
 -82.3456257713902 4.869668442197874, -85.0041362970485 5.043916427980275,
 -87.6171589705344 5.56367895398008, -90.13998424943783 6.4200627392720335,
 -92.10937499999999 7.36246686553575, -94.00832592648507 5.722586433241055,
 -96.36933879828982 4.1450080684486394, -98.91606817456315 2.889100125199903,
 -101.60493880959024 1.9763515366073001, -104.38994338131 1.4223796840833565,
 -107.22342968935116 1.2366631796147836, -110.05691599739234 1.4223796840833742,
 -112.84192056911209 1.9763515366073285, -115.53079120413918 2.8891001251999526,
 -118.0775205804125 4.145008068448703, -120.43853345221724 5.72258643324113,
 -122.57343223472039 7.594842416368291, -124.44568821784753 9.729741198871434,
 -126.02326658263995 12.090754070676176, -127.265625 14.604847155053898,
 -127.27917452588868 14.637483446949501, -128.19192311448128 17.32635408197659,
 -128.74589496700523 20.111358653696357, -128.93161147147381 22.944844961737523,
 -128.74589496700523 25.77833126977869, -128.19192311448128 28.56333584149845,
 -127.27917452588866 31.25220647652554, -126.0232665826399 33.79893585279886,
 -124.44568821784749 36.159948724603595, -122.57343223472034 38.29484750710674,
 -120.4385334522172 40.167103490233885, -118.47656249999999 41.508577297439324)
 Curved WKT = CIRCULARSTRING (-118.47656249999999 41.508577297439324, -109.6875
 57.51582286553883, -93.8671875 42.032974332441405, -62.57812500000001
 30.14512718337613, -92.10937499999999 7.36246686553575, -127.265625
 14.604847155053898, -118.47656249999999 41.508577297439324)

Get control points from a Circular Ring


```
CircularRing circularRing = new CircularRing([
    [-118.4765624999999, 41.508577297439324],
    [-109.6875, 57.51582286553883],
    [-93.8671875, 42.032974332441405],
    [-62.57812500000001, 30.14512718337613],
    [-92.10937499999999, 7.36246686553575],
    [-127.265625, 14.604847155053898],
    [-118.47656249999999, 41.508577297439324]
])
List<Point> points = circularRing.controlPoints
points.each { Point point ->
    println point
}
```

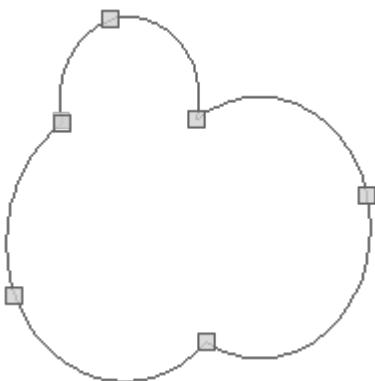

```
POINT (-118.4765624999999 41.508577297439324)
POINT (-109.6875 57.51582286553883)
POINT (-93.8671875 42.032974332441405)
POINT (-62.57812500000001 30.14512718337613)
POINT (-92.10937499999999 7.36246686553575)
POINT (-127.265625 14.604847155053898)
POINT (-118.47656249999999 41.508577297439324)
```

Convert a Circular Ring to a Linear Geometry

```
CircularRing circularRing = new CircularRing([
    [-118.4765624999999, 41.508577297439324],
    [-109.6875, 57.51582286553883],
    [-93.8671875, 42.032974332441405],
    [-62.57812500000001, 30.14512718337613],
    [-92.10937499999999, 7.36246686553575],
    [-127.265625, 14.604847155053898],
    [-118.47656249999999, 41.508577297439324]
])
Geometry linear = circularRing.linear
println linear.wkt
```

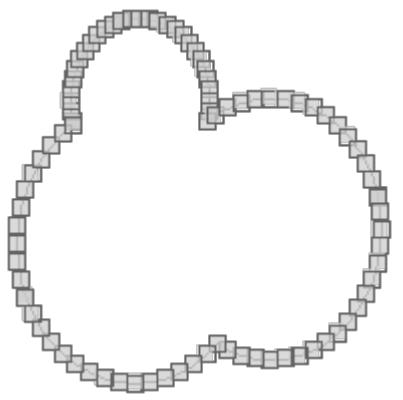


LINEARRING (-118.47656249999999 41.508577297439324, -118.58869123015454
41.90177457905915, -118.91479847512255 43.54122641035521, -119.02412442253559
45.20921804090461, -118.91479847512254 46.87720967145401, -118.58869123015452
48.51666150275007, -118.05138247300695 50.099522059417374, -117.31206570548476
51.5987081584795, -116.38339084245754 52.98856831012859, -115.28124776830907
54.24532162182789, -114.02449445660977 55.34746469597637, -112.63463430496068
56.27613955900357, -111.13544820589856 57.01545632652577, -109.6875 57.51582286553883,
-109.55258764923124 57.55276508367335, -107.91313581793518 57.878872328641364,
-106.24514418738578 57.988198276054405, -104.57715255683637 57.878872328641364,
-102.93770072554031 57.55276508367335, -101.354840168873 57.01545632652578,
-99.85565406981087 56.27613955900357, -98.46579391816178 55.34746469597637,
-97.20904060646248 54.245321621827884, -96.106897532314 52.98856831012859,
-95.1782226692868 51.598708158479496, -94.4389059017646 50.09952205941737,
-93.90159714461703 48.516661502750054, -93.57548989964901 46.877209671454,
-93.46616395223596 45.209218040904595, -93.57548989964901 43.54122641035519,
-93.8671875 42.032974332441405, -92.52944589377745 42.87620255408929,
-90.13998424943786 44.054554634672606, -87.61715897053443 44.91093841996456,
-85.00413629704852 45.43070094596436, -82.34562577139023 45.604948931746776,
-79.68711524573195 45.430700945964375, -77.07409257224603 44.910938419964566,
-74.5512672933426 44.05455463467261, -72.161805649003 42.8762025540893,
-69.9465919904458 41.396044109014326, -67.94352923754218 39.63940522082037,
-66.18689034934822 37.63634246791675, -64.70673190427324 35.42112880935956,
-63.52837982368993 33.031667165019954, -62.67199603839798 30.508841886116528,
-62.57812500000001 30.14512718337613, -62.15223351239817 27.89581921263062,
-61.97798552661577 25.237308686972334, -62.15223351239817 22.578798161314044,
-62.67199603839798 19.96577548782814, -63.528379823689924 17.44295020892471,
-64.70673190427324 15.053488564585109, -66.1868903493482 12.838274906027912,
-67.94352923754217 10.835212153124287, -69.94659199044578 9.07857326493033,
-72.16180564900299 7.598414819855357, -74.55126729334258 6.420062739272041,
-77.074092572246 5.563678953980087, -79.68711524573192 5.043916427980278,
-82.3456257713902 4.869668442197874, -85.0041362970485 5.043916427980275,
-87.6171589705344 5.56367895398008, -90.13998424943783 6.4200627392720335,
-92.10937499999999 7.36246686553575, -94.00832592648507 5.722586433241055,
-96.36933879828982 4.1450080684486394, -98.91606817456315 2.889100125199903,
-101.60493880959024 1.9763515366073001, -104.38994338131 1.4223796840833565,
-107.22342968935116 1.2366631796147836, -110.05691599739234 1.4223796840833742,
-112.84192056911209 1.9763515366073285, -115.53079120413918 2.8891001251999526,
-118.0775205804125 4.145008068448703, -120.43853345221724 5.72258643324113,
-122.57343223472039 7.594842416368291, -124.44568821784753 9.729741198871434,
-126.02326658263995 12.090754070676176, -127.265625 14.604847155053898,
-127.27917452588868 14.637483446949501, -128.19192311448128 17.32635408197659,
-128.74589496700523 20.111358653696357, -128.93161147147381 22.944844961737523,
-128.74589496700523 25.77833126977869, -128.19192311448128 28.56333584149845,
-127.27917452588866 31.25220647652554, -126.0232665826399 33.79893585279886,
-124.44568821784749 36.159948724603595, -122.57343223472034 38.29484750710674,
-120.4385334522172 40.167103490233885, -118.47656249999999 41.508577297439324)

Compound Curves

Get Curved WKT from a Compound Curves

```
CompoundCurve compoundCurve = new CompoundCurve([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ])
])
println "WKT = ${compoundCurve.wkt}"
println "Curved WKT = ${compoundCurve.curvedWkt}"
```

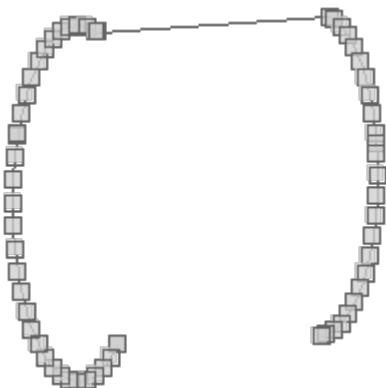


```

WKT = LINESTRING (27.0703125 23.885837699862005, 27.02233144941429 23.848852560584696,
25.52476733728419 22.848212211944787, 23.909405319245256 22.051603821364196,
22.203884687289097 21.472657579267327, 20.43738737228814 21.121279416370683,
18.640138633067632 21.003481510461857, 16.842889893847126 21.121279416370697,
15.076392578846168 21.47265757926735, 13.370871946890016 22.051603821364225,
11.755509928851087 22.848212211944826, 10.25794581672099 23.84885256058474,
8.903803347661489 25.036403633488828, 7.716252274757407 26.390546102548335,
6.7156119261174965 27.888110214678434, 5.9190035355369055 29.503472232717364,
5.340057293440033 31.208992864673522, 4.988679130543385 32.97549017967448,
4.870881224634555 34.77273891889499, 4.988679130543391 36.569987658115494,
5.340057293440042 38.33648497311645, 5.919003535536916 40.0420056050726, 5.9765625
40.17887331434696, 6.715611926117511 41.65736762311153, 7.716252274757425
43.15493173524163, 8.903803347661508 44.509074204301136, 10.257945816721014
45.69662527720522, 11.755509928851112 46.697265625845134, 13.370871946890045
47.493874016425735, 15.076392578846201 48.072820258522604, 16.84288989384716
48.424198421419256, 18.64013863306767 48.54199632732809, 20.437387372288185
48.424198421419256, 22.203884687289143 48.072820258522604, 22.5 47.98992166741417,
71.71875 49.15296965617039, 72.58658076138722 48.95345106044013, 74.12646468490567
48.43073090444655, 75.58494601643166 47.71148750685246, 76.93706973601536
46.80802732160264, 78.1597006319352 45.7358088029532, 79.23191915058463
44.51317790703337, 80.13537933583444 43.161054187449665, 80.85462273342853
41.70257285592368, 81.37734288942211 40.16268893240523, 81.5625 39.36827914916011,
81.69459591702073 38.56775025776221, 81.80095352896302 36.94504667491831,
81.69459591702073 35.322343092074405, 81.37734288942211 33.72740441743139,
80.85462273342853 32.18752049391294, 80.13537933583444 30.72903916238695,
79.23191915058463 29.376915442803245, 78.1597006319352 28.154284546883417,
76.93706973601536 27.08206602823398, 75.58494601643166 26.17860584298416,
74.12646468490567 25.45936244539007, 72.58658076138722 24.93664228939649,
70.9916420867442 24.619389261797874, 69.9609375 24.5271348225978)
Curved WKT = COMPOUNDCURVE (CIRCULARSTRING (27.0703125 23.885837699862005, 5.9765625
40.17887331434696, 22.5 47.98992166741417), (22.5 47.98992166741417, 71.71875
49.15296965617039), CIRCULARSTRING (71.71875 49.15296965617039, 81.5625
39.36827914916011, 69.9609375 24.5271348225978))

```

Get component LineStrings from a Compound Curves


```
CompoundCurve compoundCurve = new CompoundCurve([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ])
])
List<LineString> lineStrings = compoundCurve.components
lineStrings.each { LineString lineString ->
    println lineString
}
```

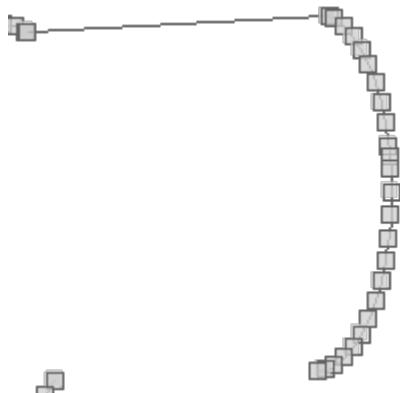

LINestring (27.0703125 23.885837699862005, 27.02233144941429 23.848852560584696, 25.52476733728419 22.848212211944787, 23.909405319245256 22.051603821364196, 22.203884687289097 21.472657579267327, 20.43738737228814 21.121279416370683, 18.640138633067632 21.003481510461857, 16.842889893847126 21.121279416370697, 15.076392578846168 21.47265757926735, 13.370871946890016 22.051603821364225, 11.755509928851087 22.848212211944826, 10.25794581672099 23.84885256058474, 8.903803347661489 25.036403633488828, 7.716252274757407 26.390546102548335, 6.7156119261174965 27.888110214678434, 5.9190035355369055 29.503472232717364, 5.340057293440033 31.208992864673522, 4.988679130543385 32.97549017967448, 4.870881224634555 34.77273891889499, 4.988679130543391 36.569987658115494, 5.340057293440042 38.33648497311645, 5.919003535536916 40.0420056050726, 5.9765625 40.17887331434696, 6.715611926117511 41.65736762311153, 7.716252274757425 43.15493173524163, 8.903803347661508 44.509074204301136, 10.257945816721014 45.69662527720522, 11.755509928851112 46.697265625845134, 13.370871946890045 47.493874016425735, 15.076392578846201 48.072820258522604, 16.84288989384716 48.424198421419256, 18.64013863306767 48.54199632732809, 20.437387372288185 48.424198421419256, 22.203884687289143 48.072820258522604, 22.5 47.98992166741417) LINestring (22.5 47.98992166741417, 71.71875 49.15296965617039) LINestring (71.71875 49.15296965617039, 72.58658076138722 48.95345106044013, 74.12646468490567 48.43073090444655, 75.58494601643166 47.71148750685246, 76.93706973601536 46.80802732160264, 78.1597006319352 45.7358088029532, 79.23191915058463 44.51317790703337, 80.13537933583444 43.161054187449665, 80.85462273342853 41.70257285592368, 81.37734288942211 40.16268893240523, 81.5625 39.36827914916011, 81.69459591702073 38.56775025776221, 81.80095352896302 36.94504667491831, 81.69459591702073 35.322343092074405, 81.37734288942211 33.72740441743139, 80.85462273342853 32.18752049391294, 80.13537933583444 30.72903916238695, 79.23191915058463 29.376915442803245, 78.1597006319352 28.154284546883417, 76.93706973601536 27.08206602823398, 75.58494601643166 26.17860584298416, 74.12646468490567 25.45936244539007, 72.58658076138722 24.93664228939649, 70.9916420867442 24.619389261797874, 69.9609375 24.5271348225978)

Convert a Compound Curves to a Linear Geometry

```
CompoundCurve compoundCurve = new CompoundCurve([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ])
])
Geometry linear = compoundCurve.linear
println linear.wkt
```

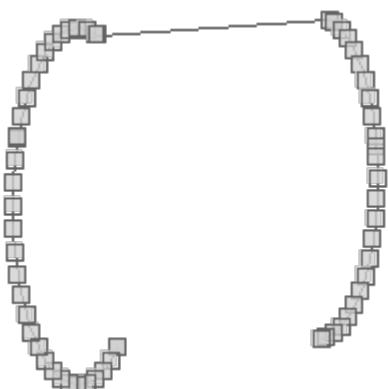


LINestring (27.0703125 23.885837699862005, 27.02233144941429 23.848852560584696, 25.52476733728419 22.848212211944787, 23.909405319245256 22.051603821364196, 22.203884687289097 21.472657579267327, 20.43738737228814 21.121279416370683, 18.640138633067632 21.003481510461857, 16.842889893847126 21.121279416370697, 15.076392578846168 21.47265757926735, 13.370871946890016 22.051603821364225, 11.755509928851087 22.848212211944826, 10.25794581672099 23.84885256058474, 8.903803347661489 25.036403633488828, 7.716252274757407 26.390546102548335, 6.7156119261174965 27.888110214678434, 5.9190035355369055 29.503472232717364, 5.340057293440033 31.208992864673522, 4.988679130543385 32.97549017967448, 4.870881224634555 34.77273891889499, 4.988679130543391 36.569987658115494, 5.340057293440042 38.33648497311645, 5.919003535536916 40.0420056050726, 5.9765625 40.17887331434696, 6.715611926117511 41.65736762311153, 7.716252274757425 43.15493173524163, 8.903803347661508 44.509074204301136, 10.257945816721014 45.69662527720522, 11.755509928851112 46.697265625845134, 13.370871946890045 47.493874016425735, 15.076392578846201 48.072820258522604, 16.84288989384716 48.424198421419256, 18.64013863306767 48.54199632732809, 20.437387372288185 48.424198421419256, 22.203884687289143 48.072820258522604, 22.5 47.98992166741417, 71.71875 49.15296965617039, 72.58658076138722 48.95345106044013, 74.12646468490567 48.43073090444655, 75.58494601643166 47.71148750685246, 76.93706973601536 46.80802732160264, 78.1597006319352 45.7358088029532, 79.23191915058463 44.51317790703337, 80.13537933583444 43.161054187449665, 80.85462273342853 41.70257285592368, 81.37734288942211 40.16268893240523, 81.5625 39.36827914916011, 81.69459591702073 38.56775025776221, 81.80095352896302 36.94504667491831, 81.69459591702073 35.322343092074405, 81.37734288942211 33.72740441743139, 80.85462273342853 32.18752049391294, 80.13537933583444 30.72903916238695, 79.23191915058463 29.376915442803245, 78.1597006319352 28.154284546883417, 76.93706973601536 27.08206602823398, 75.58494601643166 26.17860584298416, 74.12646468490567 25.45936244539007, 72.58658076138722 24.93664228939649, 70.9916420867442 24.619389261797874, 69.9609375 24.5271348225978)

Compound Rings

Get Curved WKT from a Compound Rings

```
CompoundRing compoundRing = new CompoundRing([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ]),
    new LineString([
        [69.9609375, 24.5271348225978],
        [27.0703125, 23.885837699862005],
    ])
])
println "WKT = ${compoundRing.wkt}"
println "Curved WKT = ${compoundRing.curvedWkt}"
```

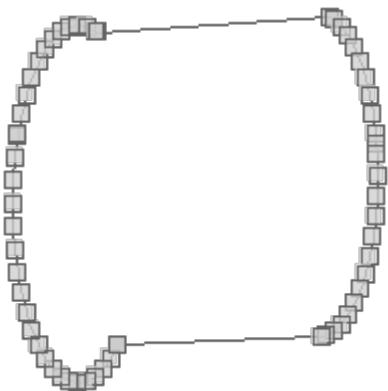


WKT = LINEARRING (27.0703125 23.885837699862005, 27.02233144941429 23.848852560584696,
 25.52476733728419 22.848212211944787, 23.909405319245256 22.051603821364196,
 22.203884687289097 21.472657579267327, 20.43738737228814 21.121279416370683,
 18.640138633067632 21.003481510461857, 16.842889893847126 21.121279416370697,
 15.076392578846168 21.47265757926735, 13.370871946890016 22.051603821364225,
 11.755509928851087 22.848212211944826, 10.25794581672099 23.84885256058474,
 8.903803347661489 25.036403633488828, 7.716252274757407 26.390546102548335,
 6.7156119261174965 27.888110214678434, 5.9190035355369055 29.503472232717364,
 5.340057293440033 31.208992864673522, 4.988679130543385 32.97549017967448,
 4.870881224634555 34.77273891889499, 4.988679130543391 36.569987658115494,
 5.340057293440042 38.33648497311645, 5.919003535536916 40.0420056050726, 5.9765625
 40.17887331434696, 6.715611926117511 41.65736762311153, 7.716252274757425
 43.15493173524163, 8.903803347661508 44.509074204301136, 10.257945816721014
 45.69662527720522, 11.755509928851112 46.697265625845134, 13.370871946890045
 47.493874016425735, 15.076392578846201 48.072820258522604, 16.84288989384716
 48.424198421419256, 18.64013863306767 48.54199632732809, 20.437387372288185
 48.424198421419256, 22.203884687289143 48.072820258522604, 22.5 47.98992166741417,
 71.71875 49.15296965617039, 72.58658076138722 48.95345106044013, 74.12646468490567
 48.43073090444655, 75.58494601643166 47.71148750685246, 76.93706973601536
 46.80802732160264, 78.1597006319352 45.7358088029532, 79.23191915058463
 44.51317790703337, 80.13537933583444 43.161054187449665, 80.85462273342853
 41.70257285592368, 81.37734288942211 40.16268893240523, 81.5625 39.36827914916011,
 81.69459591702073 38.56775025776221, 81.80095352896302 36.94504667491831,
 81.69459591702073 35.322343092074405, 81.37734288942211 33.72740441743139,
 80.85462273342853 32.18752049391294, 80.13537933583444 30.72903916238695,
 79.23191915058463 29.376915442803245, 78.1597006319352 28.154284546883417,
 76.93706973601536 27.08206602823398, 75.58494601643166 26.17860584298416,
 74.12646468490567 25.45936244539007, 72.58658076138722 24.93664228939649,
 70.9916420867442 24.619389261797874, 69.9609375 24.5271348225978, 27.0703125
 23.885837699862005)

Curved WKT = COMPOUNDCURVE (CIRCULARSTRING (27.0703125 23.885837699862005, 5.9765625
 40.17887331434696, 22.5 47.98992166741417), (22.5 47.98992166741417, 71.71875
 49.15296965617039), CIRCULARSTRING (71.71875 49.15296965617039, 81.5625
 39.36827914916011, 69.9609375 24.5271348225978), (69.9609375 24.5271348225978,
 27.0703125 23.885837699862005))

Get component LineStrings from a Compound Rings


```
CompoundRing compoundRing = new CompoundRing([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ]),
    new LineString([
        [69.9609375, 24.5271348225978],
        [27.0703125, 23.885837699862005],
    ])
])
List<LineString> lineStrings = compoundRing.components
lineStrings.each { LineString lineString ->
    println lineString
}
```

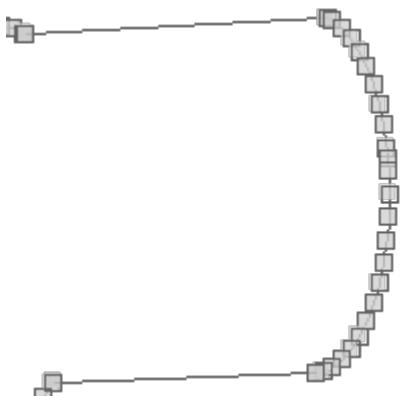

LINestring (27.0703125 23.885837699862005, 27.02233144941429 23.848852560584696, 25.52476733728419 22.848212211944787, 23.909405319245256 22.051603821364196, 22.203884687289097 21.472657579267327, 20.43738737228814 21.121279416370683, 18.640138633067632 21.003481510461857, 16.842889893847126 21.121279416370697, 15.076392578846168 21.47265757926735, 13.370871946890016 22.051603821364225, 11.755509928851087 22.848212211944826, 10.25794581672099 23.84885256058474, 8.903803347661489 25.036403633488828, 7.716252274757407 26.390546102548335, 6.7156119261174965 27.888110214678434, 5.9190035355369055 29.503472232717364, 5.340057293440033 31.208992864673522, 4.988679130543385 32.97549017967448, 4.870881224634555 34.77273891889499, 4.988679130543391 36.569987658115494, 5.340057293440042 38.33648497311645, 5.919003535536916 40.0420056050726, 5.9765625 40.17887331434696, 6.715611926117511 41.65736762311153, 7.716252274757425 43.15493173524163, 8.903803347661508 44.509074204301136, 10.257945816721014 45.69662527720522, 11.755509928851112 46.697265625845134, 13.370871946890045 47.493874016425735, 15.076392578846201 48.072820258522604, 16.84288989384716 48.424198421419256, 18.64013863306767 48.54199632732809, 20.437387372288185 48.424198421419256, 22.203884687289143 48.072820258522604, 22.5 47.98992166741417) LINestring (22.5 47.98992166741417, 71.71875 49.15296965617039) LINestring (71.71875 49.15296965617039, 72.58658076138722 48.95345106044013, 74.12646468490567 48.43073090444655, 75.58494601643166 47.71148750685246, 76.93706973601536 46.80802732160264, 78.1597006319352 45.7358088029532, 79.23191915058463 44.51317790703337, 80.13537933583444 43.161054187449665, 80.85462273342853 41.70257285592368, 81.37734288942211 40.16268893240523, 81.5625 39.36827914916011, 81.69459591702073 38.56775025776221, 81.80095352896302 36.94504667491831, 81.69459591702073 35.322343092074405, 81.37734288942211 33.72740441743139, 80.85462273342853 32.18752049391294, 80.13537933583444 30.72903916238695, 79.23191915058463 29.376915442803245, 78.1597006319352 28.154284546883417, 76.93706973601536 27.08206602823398, 75.58494601643166 26.17860584298416, 74.12646468490567 25.45936244539007, 72.58658076138722 24.93664228939649, 70.9916420867442 24.619389261797874, 69.9609375 24.5271348225978) LINestring (69.9609375 24.5271348225978, 27.0703125 23.885837699862005)

Convert a Compound Rings to a Linear Geometry

```
CompoundRing compoundRing = new CompoundRing([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ]),
    new LineString([
        [69.9609375, 24.5271348225978],
        [27.0703125, 23.885837699862005],
    ])
])
Geometry linear = compoundRing.linear
println linear.wkt
```

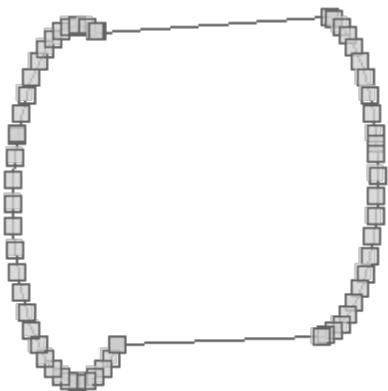

```
LINEARRING (27.0703125 23.885837699862005, 27.02233144941429 23.848852560584696,
25.52476733728419 22.848212211944787, 23.909405319245256 22.051603821364196,
22.203884687289097 21.472657579267327, 20.43738737228814 21.121279416370683,
18.640138633067632 21.003481510461857, 16.842889893847126 21.121279416370697,
15.076392578846168 21.47265757926735, 13.370871946890016 22.051603821364225,
11.755509928851087 22.848212211944826, 10.25794581672099 23.84885256058474,
8.903803347661489 25.036403633488828, 7.716252274757407 26.390546102548335,
6.7156119261174965 27.888110214678434, 5.9190035355369055 29.503472232717364,
5.340057293440033 31.208992864673522, 4.988679130543385 32.97549017967448,
4.870881224634555 34.77273891889499, 4.988679130543391 36.569987658115494,
5.340057293440042 38.33648497311645, 5.919003535536916 40.0420056050726, 5.9765625
40.17887331434696, 6.715611926117511 41.65736762311153, 7.716252274757425
43.15493173524163, 8.903803347661508 44.509074204301136, 10.257945816721014
45.69662527720522, 11.755509928851112 46.697265625845134, 13.370871946890045
47.493874016425735, 15.076392578846201 48.072820258522604, 16.84288989384716
48.424198421419256, 18.64013863306767 48.54199632732809, 20.437387372288185
48.424198421419256, 22.203884687289143 48.072820258522604, 22.5 47.98992166741417,
71.71875 49.15296965617039, 72.58658076138722 48.95345106044013, 74.12646468490567
48.43073090444655, 75.58494601643166 47.71148750685246, 76.93706973601536
46.80802732160264, 78.1597006319352 45.7358088029532, 79.23191915058463
44.51317790703337, 80.13537933583444 43.161054187449665, 80.85462273342853
41.70257285592368, 81.37734288942211 40.16268893240523, 81.5625 39.36827914916011,
81.69459591702073 38.56775025776221, 81.80095352896302 36.94504667491831,
81.69459591702073 35.322343092074405, 81.37734288942211 33.72740441743139,
80.85462273342853 32.18752049391294, 80.13537933583444 30.72903916238695,
79.23191915058463 29.376915442803245, 78.1597006319352 28.154284546883417,
76.93706973601536 27.08206602823398, 75.58494601643166 26.17860584298416,
74.12646468490567 25.45936244539007, 72.58658076138722 24.93664228939649,
70.9916420867442 24.619389261797874, 69.9609375 24.5271348225978, 27.0703125
23.885837699862005)
```

Processing Geometries

Get the geometry type (*Point*, *LineString*, *Polygon*, ect...) from a Geometry

```
Geometry geom = Geometry.fromString("POINT (-124.80 48.92)")
String type = geom.geometryType
println type
```

Point

Determine if one Geometry exactly equal another Geometry.

```
Point point1 = new Point(-121.915, 47.390)
Point point2 = new Point(-121.915, 47.390)
Point point3 = new Point(-121.409, 47.413)

boolean does1equal2 = point1.equals(point2)
println "Does ${point1} equal ${point2}? ${does1equal2 ? 'Yes' : 'No'}"

boolean does1equal3 = point1.equals(point3)
println "Does ${point1} equal ${point3}? ${does1equal3 ? 'Yes' : 'No'}"

boolean does2equal3 = point2.equals(point3)
println "Does ${point2} equal ${point3}? ${does2equal3 ? 'Yes' : 'No'}"
```

```
Does POINT (-121.915 47.39) equal POINT (-121.915 47.39)? Yes
Does POINT (-121.915 47.39) equal POINT (-121.409 47.413)? No
Does POINT (-121.915 47.39) equal POINT (-121.409 47.413)? No
```

Determine if one Geometry equals another Geometry topologically.

```
Point point1 = new Point(-121.915, 47.390)
Point point2 = new Point(-121.915, 47.390)
Point point3 = new Point(-121.409, 47.413)

boolean does1equal2 = point1.equalsTopo(point2)
println "Does ${point1} equal ${point2}? ${does1equal2 ? 'Yes' : 'No'}"

boolean does1equal3 = point1.equalsTopo(point3)
println "Does ${point1} equal ${point3}? ${does1equal3 ? 'Yes' : 'No'}"

boolean does2equal3 = point2.equalsTopo(point3)
println "Does ${point2} equal ${point3}? ${does2equal3 ? 'Yes' : 'No'}"
```

```
Does POINT (-121.915 47.39) equal POINT (-121.915 47.39)? Yes
Does POINT (-121.915 47.39) equal POINT (-121.409 47.413)? No
Does POINT (-121.915 47.39) equal POINT (-121.409 47.413)? No
```

Determine if one Geometry equals another Geometry when both are normalized.

```
Geometry geom1 = Geometry.fromWKT("POLYGON ((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4))")
Geometry geom2 = Geometry.fromWKT("POLYGON ((1 3, 2 4, 4 4, 6 3, 6 1, 2 1, 1 3))")
Geometry geom3 = Geometry.fromWKT("POLYGON ((1 1, 1 4, 4 4, 4 1, 1 1))")

boolean does1equal2 = geom1.equalsNorm(geom2)
println "Does ${geom1} equal ${geom2}? ${does1equal2} ? 'Yes' : 'No'"

boolean does1equal3 = geom1.equalsNorm(geom3)
println "Does ${geom1} equal ${geom3}? ${does1equal3} ? 'Yes' : 'No'"

boolean does2equal3 = geom2.equalsNorm(geom3)
println "Does ${geom2} equal ${geom3}? ${does2equal3} ? 'Yes' : 'No'"
```

```
Does POLYGON ((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4)) equal POLYGON ((1 3, 2 4, 4 4, 6 3, 6 1, 2 1, 1 3))? Yes
Does POLYGON ((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4)) equal POLYGON ((1 1, 1 4, 4 4, 4 1, 1 1))? No
Does POLYGON ((1 3, 2 4, 4 4, 6 3, 6 1, 2 1, 1 3)) equal POLYGON ((1 1, 1 4, 4 4, 4 1, 1 1))? No
```

Get a Geometry by index in a GeometryCollection

```
MultiPoint multiPoint = new MultiPoint([
    new Point(-122.3876953125, 47.5820839916191),
    new Point(-122.464599609375, 47.25686404408872),
    new Point(-122.48382568359374, 47.431803338643334)
])
Point p1 = multiPoint[0]
println p1

Point p2 = multiPoint[1]
println p2

Point p3 = multiPoint[2]
println p3
```

```
POINT (-122.3876953125 47.5820839916191)
POINT (-122.464599609375 47.25686404408872)
POINT (-122.48382568359374 47.431803338643334)
```


Cast a Geometry to a Bounds or to a Point

```
Geometry geometry = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])
```

```
Bounds bounds = geometry as Bounds  
println bounds
```

```
Point point = geometry as Point  
println point
```

```
(-122.64,46.308,-120.981,47.413)  
POINT (-121.73789467295867 46.95085967283822)
```

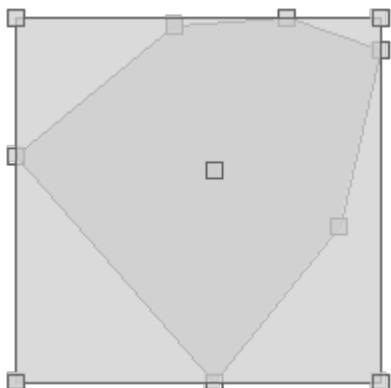

Get the area of a Geometry

```
Polygon polygon = new Polygon([[  
    [-124.80, 48.92],  
    [-126.21, 45.33],  
    [-114.60, 45.08],  
    [-115.31, 51.17],  
    [-121.99, 52.05],  
    [-124.80, 48.92]  
]])  
double area = polygon.area  
println area
```

```
62.4026
```


Get the length of a Geometry

```
LineString lineString = new LineString([-122.69, 49.61], [-99.84, 45.33])
double length = lineString.length
println length
```

```
23.24738479915536
```


Buffer a Point

```
Point point = new Point(-123, 46)
Geometry bufferedPoint = point.buffer(2)
```

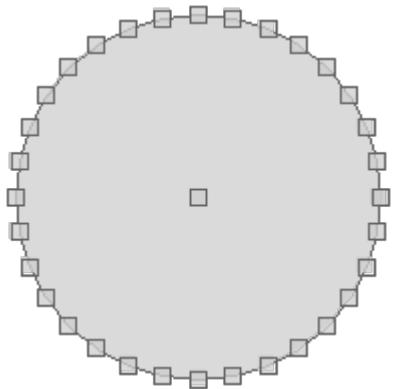


Buffer a LineString with a butt cap

```
LineString line = new LineString([
    [-122.563, 47.576],
    [-112.0166, 46.589],
    [-101.337, 47.606]
])
Geometry bufferedLine1 = line.buffer(2.1, 10, Geometry.CAP_BUTT)
```

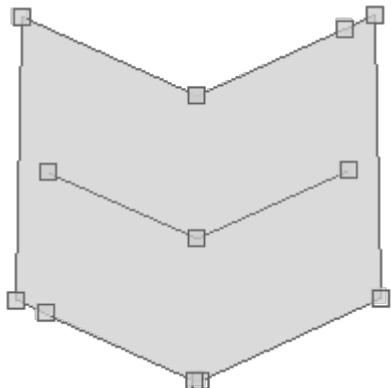


Buffer a LineString with a round cap

```
Geometry bufferedLine2 = line.buffer(2.1, 10, Geometry.CAP_ROUND)
```

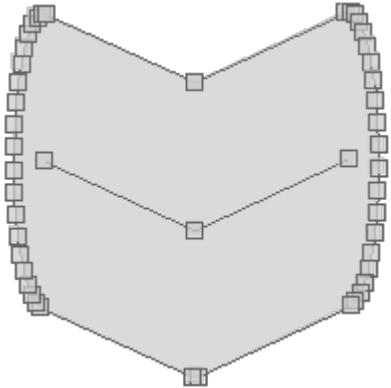


Buffer a LineString with a square cap

```
Geometry bufferedLine3 = line.buffer(2.1, 10, Geometry.CAP_SQUARE)
```

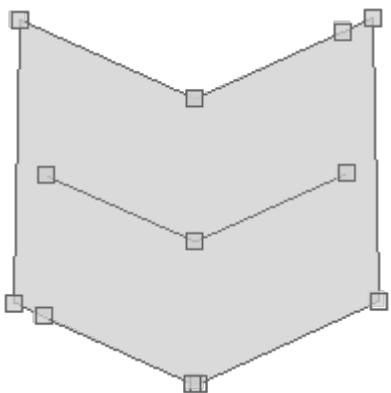


Buffer a LineString on the right side only

```
LineString line = new LineString([
    [-122.563, 47.576],
    [-112.0166, 46.589],
    [-101.337, 47.606]
])
Geometry rightBufferedLine = line.singleSidedBuffer(1.5)
```

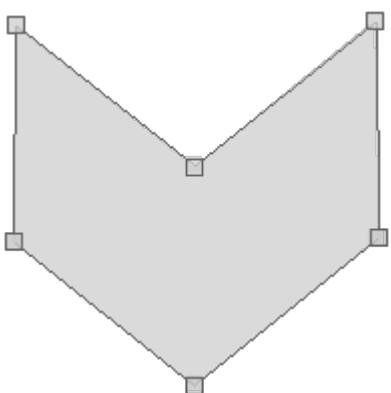


Buffer a LineString on the left side only

```
Geometry leftBufferedLine = line.singleSidedBuffer(-1.5)
```

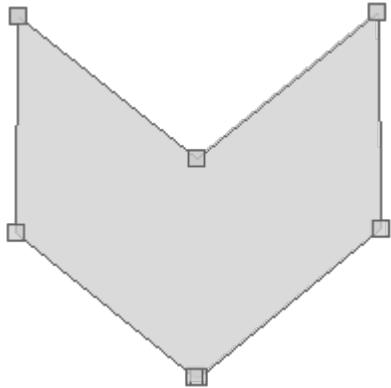


Buffer a LineString with a beginning and end distance.

```
LineString line = new LineString([
    [-122.38494873046875, 47.57281986733871],
    [-122.27508544921875, 47.342545069660225],
    [-122.15972900390624, 47.14302937421008],
    [-121.96197509765625, 47.03082254778662],
    [-121.73950195312499, 46.89586230605985],
    [-121.56372070312499, 46.81509864599243]
])
Geometry buffer = line.variableBuffer([0.03, 0.07])
```

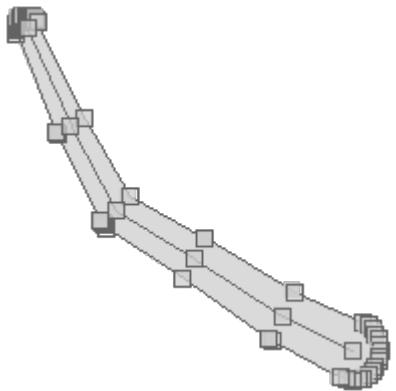


Buffer a LineString with a beginning, middle, and end distance.

```
LineString line = new LineString([
    [-122.38494873046875, 47.57281986733871],
    [-122.27508544921875, 47.342545069660225],
    [-122.15972900390624, 47.14302937421008],
    [-121.96197509765625, 47.03082254778662],
    [-121.73950195312499, 46.89586230605985],
    [-121.56372070312499, 46.81509864599243]
])
Geometry buffer = line.variableBuffer([0.03, 0.07, 0.1])
```

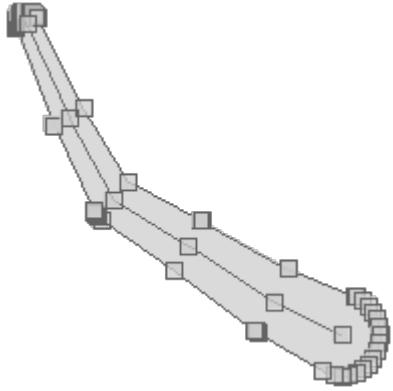


Buffer a LineString with a list of distances.

```
LineString line = new LineString([
    [-122.38494873046875, 47.57281986733871],
    [-122.27508544921875, 47.342545069660225],
    [-122.15972900390624, 47.14302937421008],
    [-121.96197509765625, 47.03082254778662],
    [-121.73950195312499, 46.89586230605985],
    [-121.56372070312499, 46.81509864599243]
])
Geometry buffer = line.variableBuffer([0.03, 0.05, 0.07, 0.09, 0.1, 0.2])
```

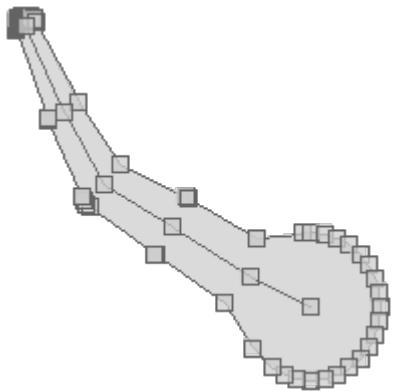

Check whether a Geometry contains another Geometry


```
Polygon polygon1 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
])  
  
boolean contains = polygon1.contains(polygon2)  
println contains
```

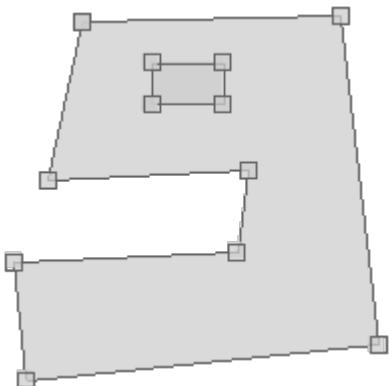

```
true
```

Check whether a Geometry is within another Geometry

```
Polygon polygon1 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
])  
  
boolean within = polygon1.within(polygon2)  
println within
```

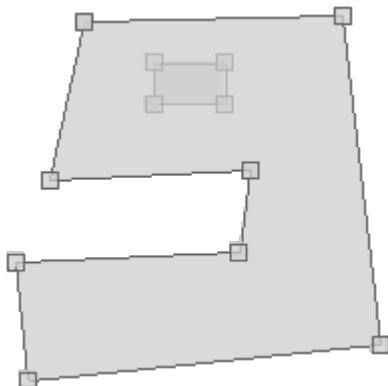

```
true
```

```
Polygon polygon3 = new Polygon([[  
    [-120.563, 46.739],  
    [-119.948, 46.739],  
    [-119.948, 46.965],  
    [-120.563, 46.965],  
    [-120.563, 46.739]  
])  
  
within = polygon1.within(polygon3)  
println within
```




```
false
```

Check whether a Geometry touches another Geometry

```
LineString line1 = new LineString([
    [-122.38651514053345, 47.58219978280006],
    [-122.38651514053345, 47.58020234903306]
])

LineString line2 = new LineString([
    [-122.38651514053345, 47.58124449789785],
    [-122.38333940505981, 47.58124449789785]
])


boolean touches = line1.touches(line2)
```

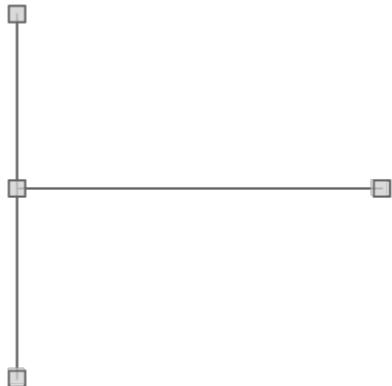

```
true
```

```
LineString line3 = new LineString([
    [-122.386257648468, 47.58183793450921],
    [-122.38348960876465, 47.5818668824645]
])


touches = line1.touches(line3)
```

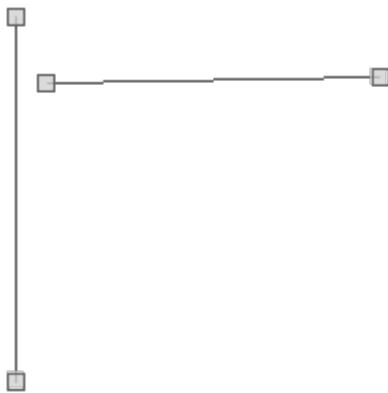

```
false
```


Create a convexhull Geometry around a Geometry

```
Geometry geometry = new MultiPoint(  
    new Point(-119.882, 47.279),  
    new Point(-100.195, 46.316),  
    new Point(-111.796, 42.553),  
    new Point(-90.7031, 34.016)  
)  
Geometry convexHull = geometry.convexHull
```

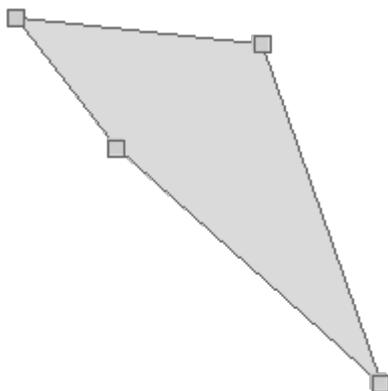


Check whether a Geometry covers another Geometry

```
Polygon polygon1 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
])  
  
boolean isCovered = polygon1.covers(polygon2)  
println isCovered
```

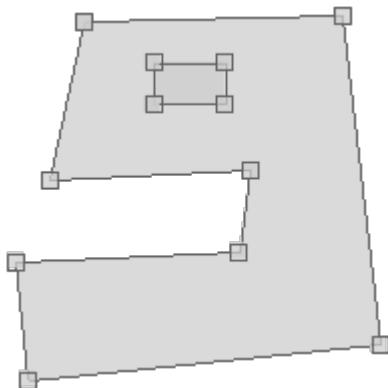

true


```
Polygon polygon3 = new Polygon([[  
    [-120.563, 46.739],  
    [-119.948, 46.739],  
    [-119.948, 46.965],  
    [-120.563, 46.965],  
    [-120.563, 46.739]  
])  
  
isCovered = polygon1.covers(polygon3)  
println isCovered
```

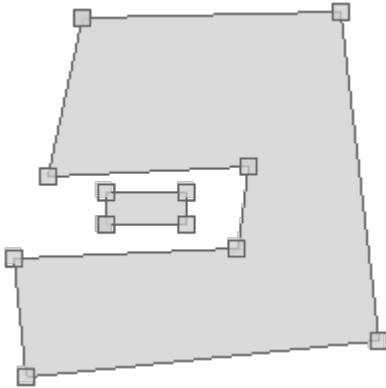

```
false
```


Check whether a Geometry is covered by another Geometry

```
Polygon polygon1 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
])  
  
boolean isCoveredBy = polygon2.coveredBy(polygon1)  
println isCoveredBy
```

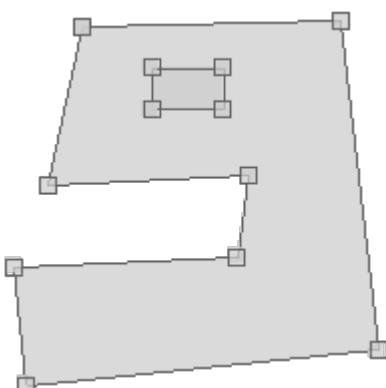

```
true
```


```
Polygon polygon3 = new Polygon([[  
    [-120.563, 46.739],  
    [-119.948, 46.739],  
    [-119.948, 46.965],  
    [-120.563, 46.965],  
    [-120.563, 46.739]  
])  
  
isCoveredBy = polygon3.coveredBy(polygon1)  
println isCoveredBy
```

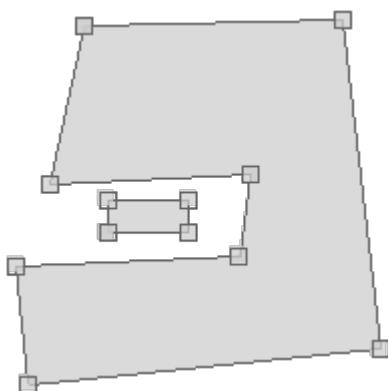

```
false
```

Check whether one Geometry crosses another Geometry


```
LineString line1 = new LineString([-122.486, 47.256], [-121.695, 46.822])  
LineString line2 = new LineString([-122.387, 47.613], [-121.750, 47.353])  
LineString line3 = new LineString([-122.255, 47.368], [-121.882, 47.746])  
  
boolean doesCross12 = line1.crosses(line2)  
println doesCross12  
  
boolean doesCross13 = line1.crosses(line3)  
println doesCross13  
  
boolean doesCross23 = line2.crosses(line3)  
println doesCross23
```

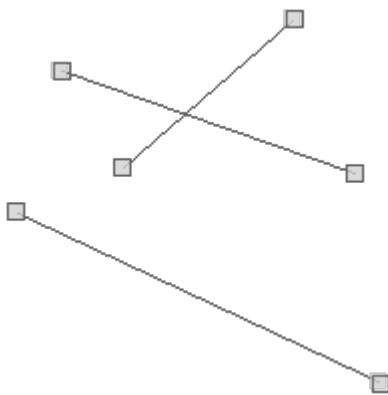

```
false  
false  
true
```


Calculate the difference between two Geometries

```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Geometry difference = polygon1.difference(polygon2)
```

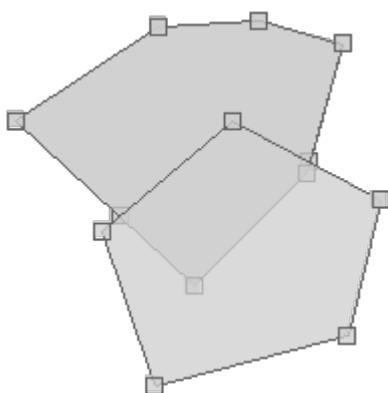


Calculate the symmetric difference between two Geometries

```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Geometry symDifference = polygon1.symDifference(polygon2)
```

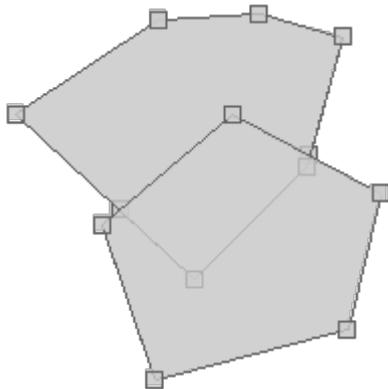

Check whether one Geometry is disjoint from another Geometry

```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
])  
  
boolean isDisjoint12 = polygon1.disjoint(polygon2)  
println isDisjoint12  
  
boolean isDisjoint13 = polygon1.disjoint(polygon3)  
println isDisjoint13  
  
boolean isDisjoint23 = polygon2.disjoint(polygon3)  
println isDisjoint23
```

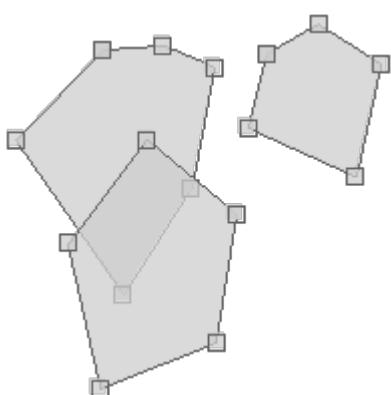

```
false  
true  
true
```

Calculate the distance bewteen two Geometries

```
Point point1 = new Point(-122.442, 47.256)  
Point point2 = new Point(-122.321, 47.613)  
double distance = point1.distance(point2)  
println distance
```


□

□

```
0.37694827231332195
```


Get Bounds from a Geometry

```
Point point = new Point(-123,46)  
Polygon polygon = point.buffer(2)  
Bounds bounds = polygon.bounds
```

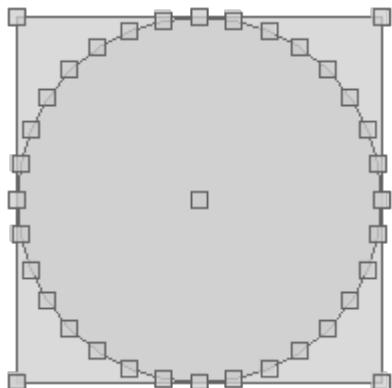


Get the Boundary from a Geometry

```
Polygon polygon = new Polygon([
    [
        [-121.915, 47.390],
        [-122.640, 46.995],
        [-121.739, 46.308],
        [-121.168, 46.777],
        [-120.981, 47.316],
        [-121.409, 47.413],
        [-121.915, 47.390]
    ],
    [
        [-122.255, 46.935],
        [-121.992, 46.935],
        [-121.992, 47.100],
        [-122.255, 47.100],
        [-122.255, 46.935]
    ],
    [
        [-121.717, 46.777],
        [-121.398, 46.777],
        [-121.398, 47.002],
        [-121.717, 47.002],
        [-121.717, 46.777]
    ]
])
Geometry boundary = polygon.boundary
```

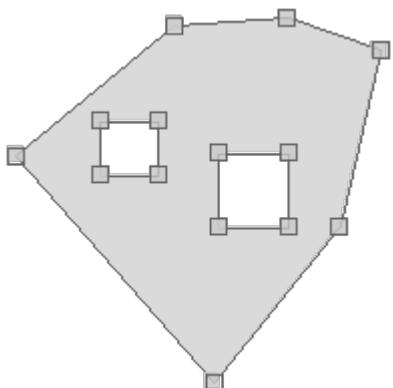


Get the Centroid from a Geometry

```
Polygon polygon = new Polygon([[  
    [-118.937, 48.327],  
    [-121.157, 48.356],  
    [-121.684, 46.331],  
    [-119.355, 46.498],  
    [-119.355, 47.219],  
    [-120.629, 47.219],  
    [-120.607, 47.783],  
    [-119.201, 47.739],  
    [-118.937, 48.327]  
])  
Geometry centroid = polygon.centroid
```

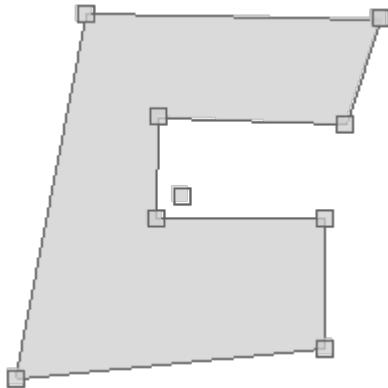

Get the Interior Point from a Geometry

```
Polygon polygon = new Polygon([[  
    [-118.937, 48.327],  
    [-121.157, 48.356],  
    [-121.684, 46.331],  
    [-119.355, 46.498],  
    [-119.355, 47.219],  
    [-120.629, 47.219],  
    [-120.607, 47.783],  
    [-119.201, 47.739],  
    [-118.937, 48.327]  
])  
Geometry interiorPoint = polygon.interiorPoint
```

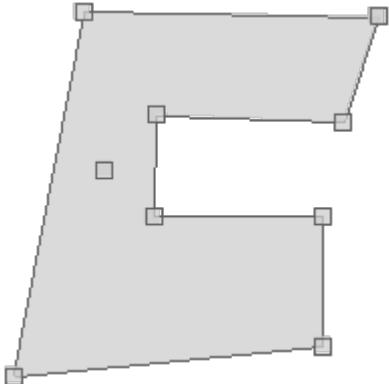

Get the number of Geometries

```
MultiPoint multiPoint = new MultiPoint([
    new Point(-122.3876953125, 47.5820839916191),
    new Point(-122.464599609375, 47.25686404408872),
    new Point(-122.48382568359374, 47.431803338643334)
])
int number = multiPoint.numGeometries
println number
```



3

Get a Geometry by index

```
MultiPoint multiPoint = new MultiPoint([
    new Point(-122.3876953125, 47.5820839916191),
    new Point(-122.464599609375, 47.25686404408872),
    new Point(-122.48382568359374, 47.431803338643334)
])
(0..<multiPoint.getNumGeometries()).each { int i ->
    Geometry geometry = multiPoint.getGeometryN(i)
    println geometry.wkt
}
```

```
POINT (-122.3876953125 47.5820839916191)
POINT (-122.464599609375 47.25686404408872)
POINT (-122.48382568359374 47.431803338643334)
```


Get a List of Geometries

```
MultiPoint multiPoint = new MultiPoint([
    new Point(-122.3876953125, 47.5820839916191),
    new Point(-122.464599609375, 47.25686404408872),
    new Point(-122.48382568359374, 47.431803338643334)
])
List<Geometry> geometries = multiPoint.geometries
geometries.each { Geometry geometry ->
    println geometry.wkt
}
```

```
POINT (-122.3876953125 47.5820839916191)
POINT (-122.464599609375 47.25686404408872)
POINT (-122.48382568359374 47.431803338643334)
```

Get the number of Points in a Geometry

```
Polygon polygon = new Polygon([[  
    [-120.563, 46.739],  
    [-119.948, 46.739],  
    [-119.948, 46.965],  
    [-120.563, 46.965],  
    [-120.563, 46.739]  
])  
int number = polygon.numPoints  
println number
```

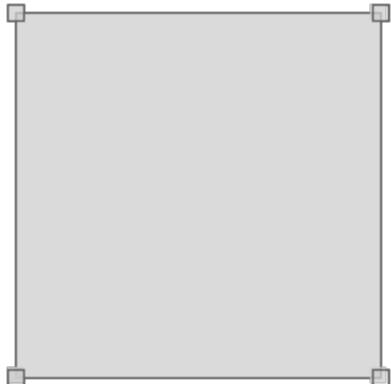

5


Create a Geometry of a String

```
Geometry geometry = Geometry.createFromText("Geo")
```




Create a Sierpinski Carpet in a given Bounds and with a number of points

```
Bounds bounds = new Bounds(21.645,36.957,21.676,36.970, "EPSG:4326")
Geometry geometry = Geometry.createSierpinskiCarpet(bounds, 50)
```

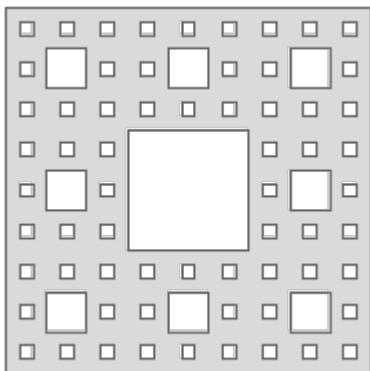


Create a Kock Snowflake in a given Bounds and with a number of points

```
Bounds bounds = new Bounds(21.645,36.957,21.676,36.970, "EPSG:4326")
Geometry geometry = Geometry.createKochSnowflake(bounds, 50)
```

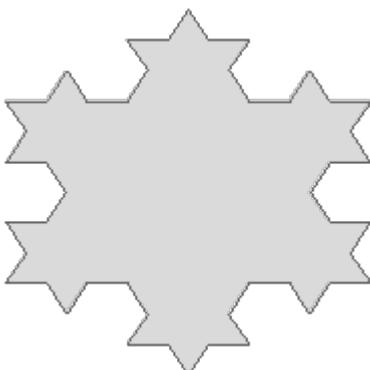


Perform a cascaded union on a List of Polygons.

```
Geometry randomPoints = Geometry.createRandomPoints(new Bounds(-180,-90,180,90,
"EPSG:4326").geometry, 100)
List<Geometry> bufferedPoints = randomPoints.collect{Geometry geom -> geom.buffer(
4.5)}
Geometry unionedGeometry = Geometry.cascadedUnion(bufferedPoints)
```

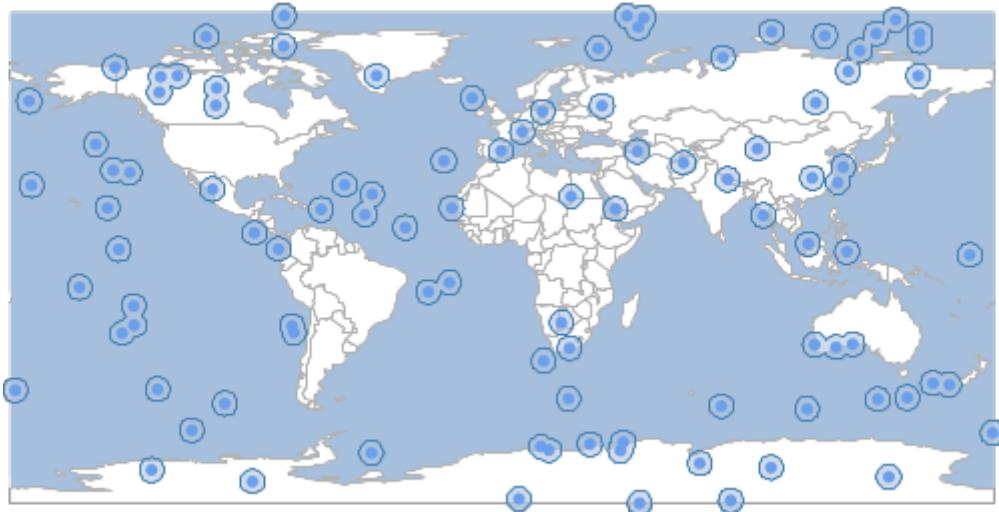


Create a number of random points within a given Geometry

```
Geometry geometry = new Bounds(-180, -90, 180, 90).geometry  
MultiPoint randomPoints = Geometry.createRandomPoints(geometry, 100)
```

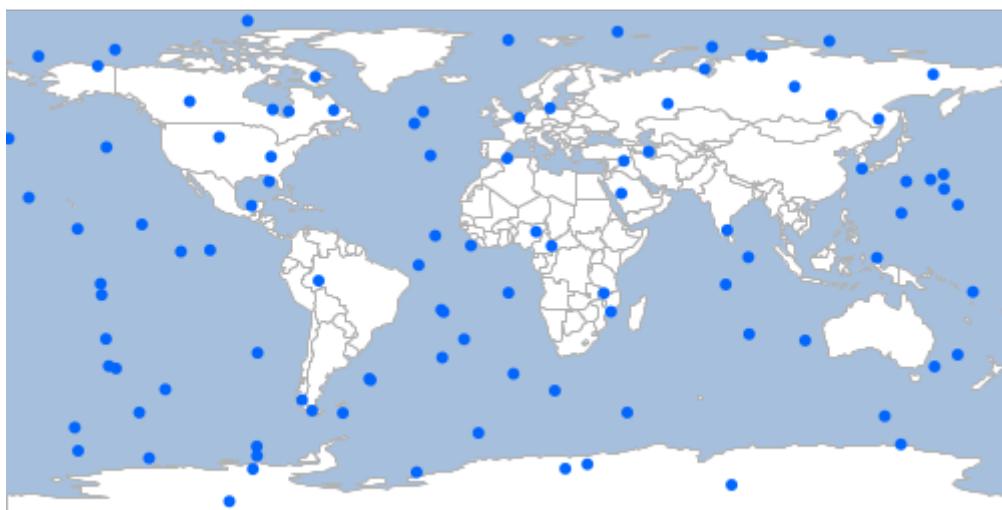


Create a number of random points within a given Geometry where the points are constrained to the cells of a grid

```
Bounds bounds = new Bounds(-180, -90, 180, 90)  
MultiPoint randomPoints = Geometry.createRandomPointsInGrid(bounds, 100, true, 0.5)
```

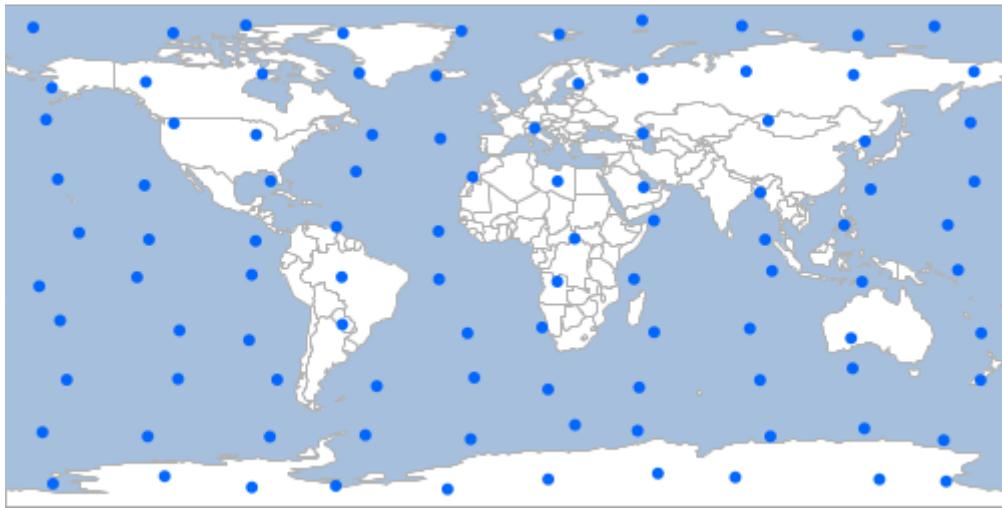


Create a delaunay triangle diagram around a Geometry

```
Geometry points = Geometry.createRandomPoints(new Bounds(-180, -90, 180, 90).geometry,  
100)  
Geometry delaunayTriangle = points.delaunayTriangleDiagram
```

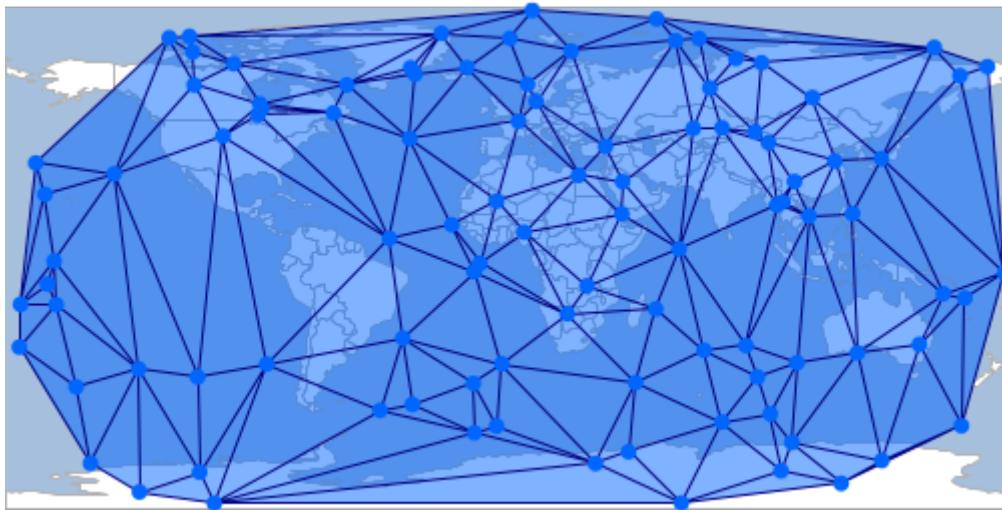


Create a voronoi diagram around a Geometry

```
Geometry points = Geometry.createRandomPoints(new Bounds(-180, -90, 180, 90).geometry,  
100)  
Geometry voronoiDiagram = points.voronoiDiagram
```

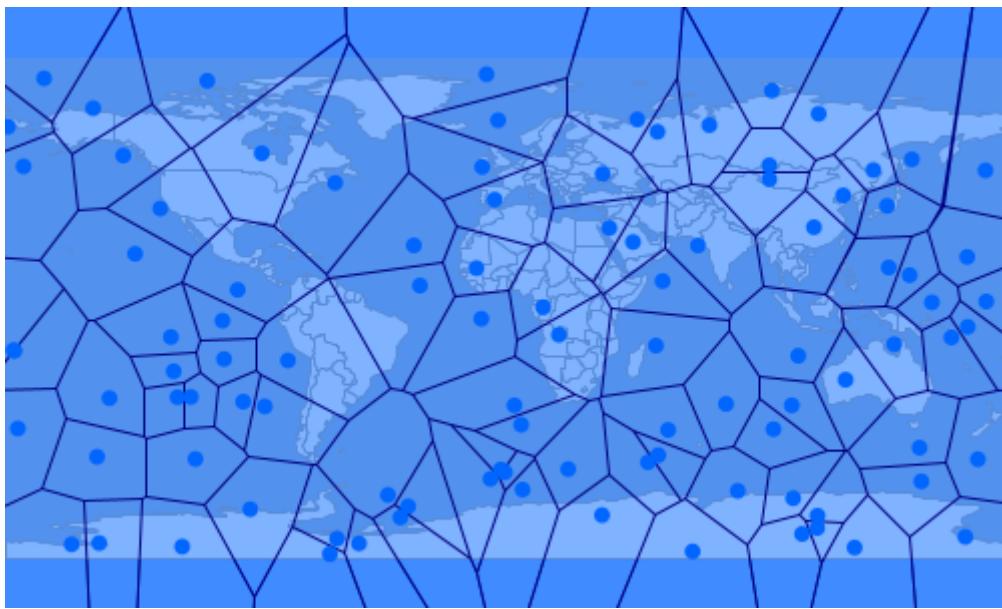

Triangulate inside of a Geometry.

```
Geometry geometry = Geometry.fromWKT("POLYGON ((-120.047607421875 48.100094697973795,
-121.53076171875 48.44377831058802, " +
    "-122.03613281249999 47.5394554474239, -120.81665039062499 47.249406957888446,
-121.78344726562499 46.437856895024204, " +
    "-119.20166015625 46.31658418182218, -118.05908203124999 47.39834920035926,
-117.61962890624999 48.50204750525715, " +
    "-119.3115234375 48.65468584817256, -119.20166015625 47.82053186746053,
-120.003662109375 47.60616304386874, " +
    "-120.0146484375 48.06339653776211, -120.047607421875 48.100094697973795))")
Geometry triangles = geometry.triangulate()
```

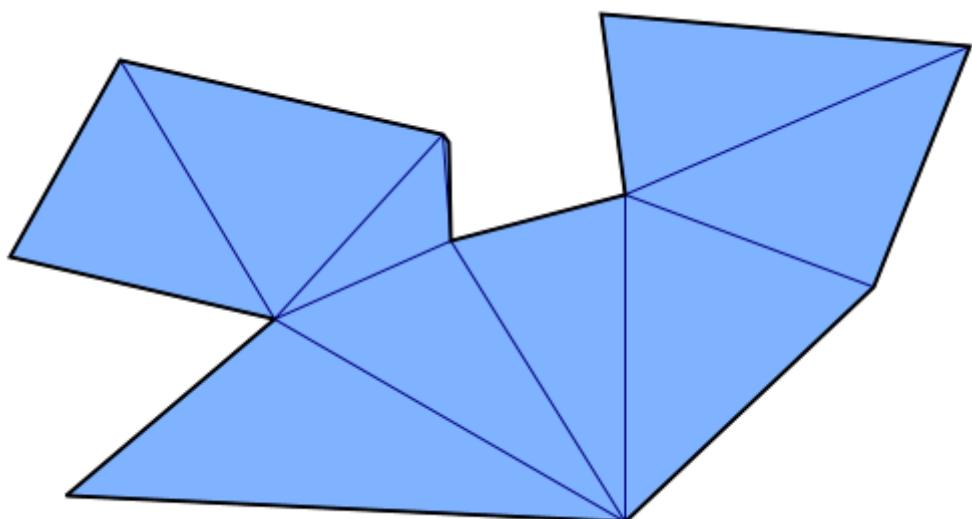


Calculate the union of two Geometries

```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])
```


```
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])
```

```
Geometry union = polygon1.union(polygon2)
```

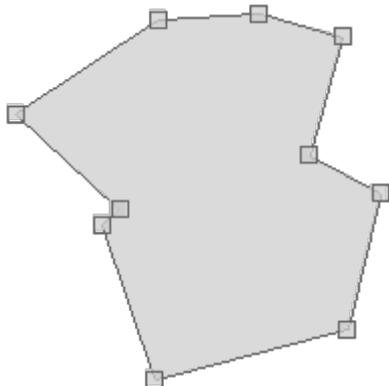


Calculate the intersection between two Geometries

```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Geometry intersection = polygon1.intersection(polygon2)
```

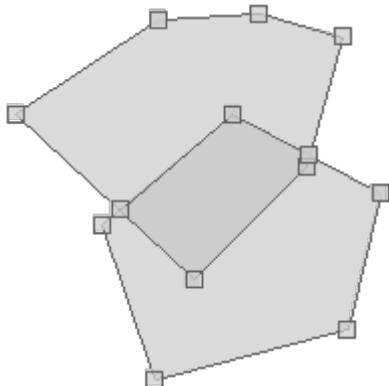

Check whether one Geometry intersects from another Geometry


```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
])  
  
boolean does1intersect2 = polygon1.intersects(polygon2)  
println does1intersect2  
  
boolean does1intersect3 = polygon1.intersects(polygon3)  
println does1intersect3  
  
boolean does2intersect3 = polygon2.intersects(polygon3)  
println does2intersect3
```

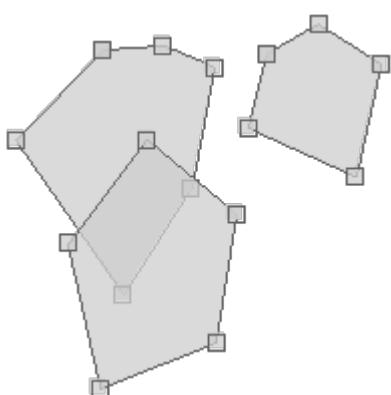

```
true  
false  
false
```

Check whether one Geometry overlaps from another Geometry


```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
]])  
  
boolean does1overlap2 = polygon1.overlaps(polygon2)  
println does1overlap2  
  
boolean does1overlap3 = polygon1.overlaps(polygon3)  
println does1overlap3  
  
boolean does2overlap3 = polygon2.overlaps(polygon3)  
println does2overlap3
```

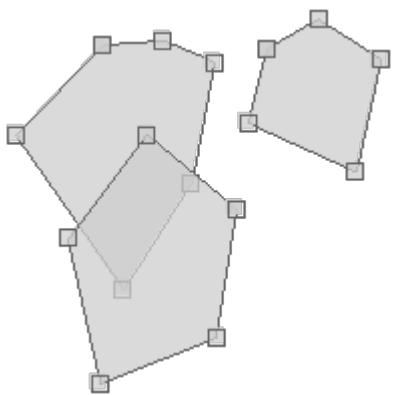

```
true  
false  
false
```


Calculate the octagonal envelope of a Geometry

```
Geometry geometry = new Polygon ([[  
    [-122.20367431640624, 47.543163654317304],  
    [-122.3712158203125, 47.489368981370724],  
    [-122.33276367187499, 47.35371061951363],  
    [-122.11029052734374, 47.3704545156932],  
    [-122.08831787109375, 47.286681888764214],  
    [-122.28332519531249, 47.2270293988673],  
    [-122.2174072265625, 47.154237057576594],  
    [-121.904296875, 47.32579231609051],  
    [-122.06085205078125, 47.47823216312885],  
    [-122.20367431640624, 47.543163654317304]  
]])  
Geometry octagonalEnvelope = geometry.octagonalEnvelope
```

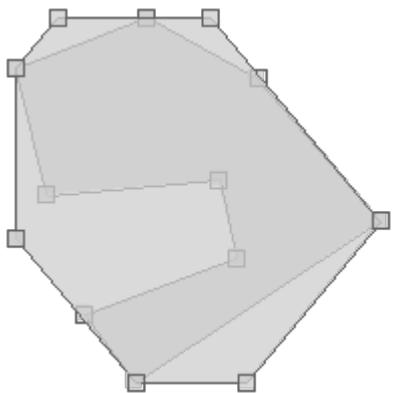


Calculate the minimum rectangle of a Geometry

```
Geometry geometry = new Polygon ([[  
    [-122.20367431640624, 47.543163654317304],  
    [-122.3712158203125, 47.489368981370724],  
    [-122.33276367187499, 47.35371061951363],  
    [-122.11029052734374, 47.3704545156932],  
    [-122.08831787109375, 47.286681888764214],  
    [-122.28332519531249, 47.2270293988673],  
    [-122.2174072265625, 47.154237057576594],  
    [-121.904296875, 47.32579231609051],  
    [-122.06085205078125, 47.47823216312885],  
    [-122.20367431640624, 47.543163654317304]  
])  
Geometry minimumRectangle = geometry.minimumRectangle
```

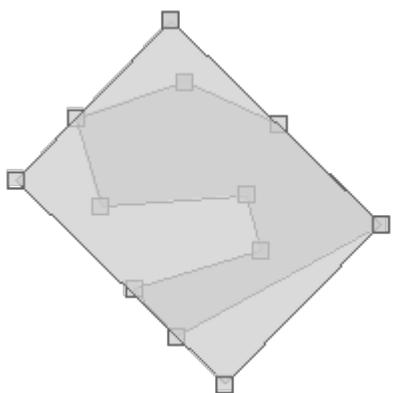


Calculate the minimum circle of a Geometry

```
Geometry geometry = new Polygon ([[  
    [-122.20367431640624, 47.543163654317304],  
    [-122.3712158203125, 47.489368981370724],  
    [-122.33276367187499, 47.35371061951363],  
    [-122.11029052734374, 47.3704545156932],  
    [-122.08831787109375, 47.286681888764214],  
    [-122.28332519531249, 47.2270293988673],  
    [-122.2174072265625, 47.154237057576594],  
    [-121.904296875, 47.32579231609051],  
    [-122.06085205078125, 47.47823216312885],  
    [-122.20367431640624, 47.543163654317304]  
])  
Geometry minimumBoundingCircle = geometry.minimumBoundingCircle
```

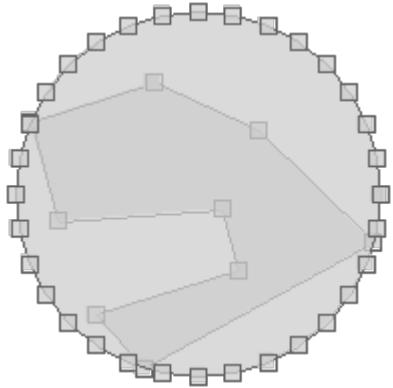


Calculate the minimum diameter of a Geometry

```
Geometry geometry = new Polygon ([[  
    [-122.20367431640624, 47.543163654317304],  
    [-122.3712158203125, 47.489368981370724],  
    [-122.33276367187499, 47.35371061951363],  
    [-122.11029052734374, 47.3704545156932],  
    [-122.08831787109375, 47.286681888764214],  
    [-122.28332519531249, 47.2270293988673],  
    [-122.2174072265625, 47.154237057576594],  
    [-121.904296875, 47.32579231609051],  
    [-122.06085205078125, 47.47823216312885],  
    [-122.20367431640624, 47.543163654317304]  
]])  
Geometry minimumDiameter = geometry.minimumDiameter
```

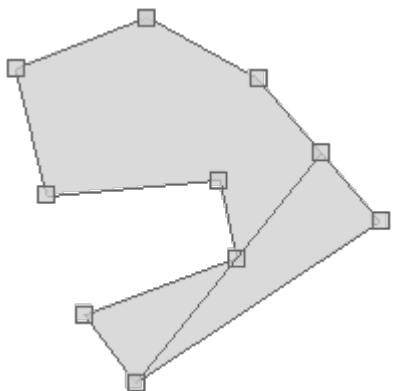


Calculate the minimum clearance of a Geometry

```
Geometry geometry = new Polygon ([[  
    [-122.20367431640624, 47.543163654317304],  
    [-122.3712158203125, 47.489368981370724],  
    [-122.33276367187499, 47.35371061951363],  
    [-122.11029052734374, 47.3704545156932],  
    [-122.08831787109375, 47.286681888764214],  
    [-122.28332519531249, 47.2270293988673],  
    [-122.2174072265625, 47.154237057576594],  
    [-121.904296875, 47.32579231609051],  
    [-122.06085205078125, 47.47823216312885],  
    [-122.20367431640624, 47.543163654317304]  
])  
Geometry minimumClearance = geometry.minimumClearance
```

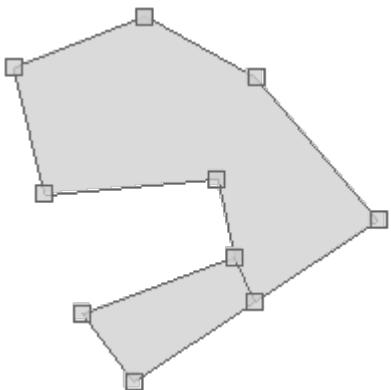


Calculate the largest empty circle within a Geometry

```
Geometry g = Geometry.fromWKT("POLYGON ((-122.38855361938475 47.5805786829606,  
-122.38636493682861 47.5783206388176, " +  
    "-122.38700866699219 47.5750491969984, -122.38177299499512 47.57502024527343,  
" +  
    "-122.38481998443604 47.5780600889959, -122.38151550292969 47.5805786829606, "  
+  
    "-122.38855361938475 47.5805786829606))")  
Geometry circle = g.getLargestEmptyCircle(1.0)
```

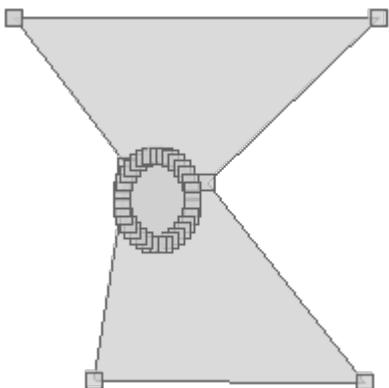


Calculate the maximum inscribed circle within a Geometry

```
Geometry g = Geometry.fromWKT("POLYGON ((-122.38855361938475 47.5805786829606,  
-122.38636493682861 47.5783206388176, " +  
    "-122.38700866699219 47.5750491969984, -122.38177299499512 47.57502024527343,  
" +  
    "-122.38481998443604 47.5780600889959, -122.38151550292969 47.5805786829606, "  
+  
    "-122.38855361938475 47.5805786829606))")  
Geometry circle = g.getMaximumInscribedCircle(1.0)
```

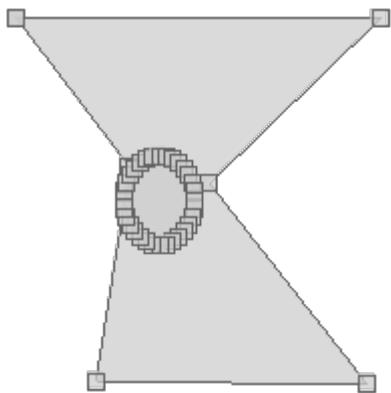

Offset a LineString by a given distance. Positive distances will offset to the right. Negative distance will offset to the left.

```
LineString line = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798]  
)  
LineString positive = line.offset(1.2)  
LineString negative = line.offset(-2.4)
```

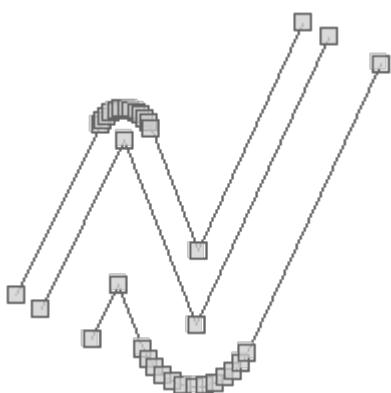

Get the dimension of a Geometry

```
Point point = Geometry.fromWKT("POINT (-122.3437 47.7540)")  
println "Point Dimension = ${point.dimension}"  
  
LineString lineString = Geometry.fromWKT("LINESTRING (-122.525 47.256, -122.376  
47.595)")  
println "LineString Dimension = ${lineString.dimension}"  
  
Polygon polygon = Geometry.fromWKT("POLYGON ((-122.590 47.204, -122.365 47.204,  
-122.365 47.312, -122.590 47.312, -122.590 47.204))")  
println "Polygon Dimension = ${polygon.dimension}"
```

```
Point Dimension = 0  
LineString Dimension = 1  
Polygon Dimension = 2
```


Determine if a Geometry is empty or not

```
Geometry geom1 = Geometry.fromWKT("POINT EMPTY")  
boolean isGeom1Empty = geom1.empty  
println "Is ${geom1.wkt} empty? ${isGeom1Empty ? 'Yes' : 'No'}"  
  
Geometry geom2 = Geometry.fromWKT("POINT (-122.3437 47.7540)")  
boolean isGeom2Empty = geom2.empty  
println "Is ${geom2.wkt} empty? ${isGeom2Empty ? 'Yes' : 'No'}"
```

```
Is POINT EMPTY empty? Yes  
Is POINT (-122.3437 47.754) empty? No
```


Determine if a Geometry is rectangular

```
Geometry geom1 = Geometry.fromWKT("POLYGON ((-122.590 47.204, -122.365 47.204,  
-122.365 47.312, -122.590 47.312, -122.590 47.204))")  
boolean isGeom1Rect = geom1.isRectangle()  
println "Is the geometry a rectangle? ${isGeom1Rect ? 'Yes' : 'No'}"
```

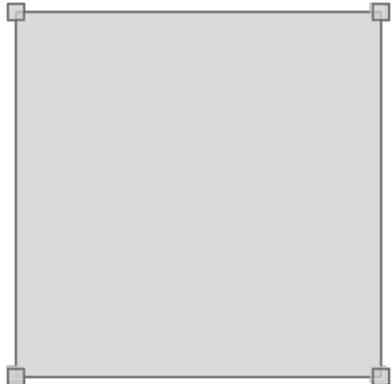

Is the geometry a rectangle? Yes


```
Geometry geom2 = Geometry.fromWKT("POLYGON ((-122.360 47.215, -122.656 46.912,  
-121.838 46.931, -122.360 47.215))")  
boolean isGeom2Rect = geom2.isRectangle()  
println "Is the geometry a rectangle? ${isGeom2Rect ? 'Yes' : 'No'}"
```

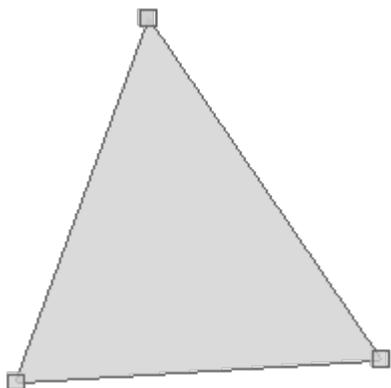

Is the geometry a rectangle? No


Determine if a Geometry is simple

```
Geometry geom1 = new LineString(  
    [-122.323, 47.599],  
    [-122.385, 47.581]  
)  
boolean isGeom1Simple = geom1.simple  
println "Is the Geometry simple? ${isGeom1Simple}"
```

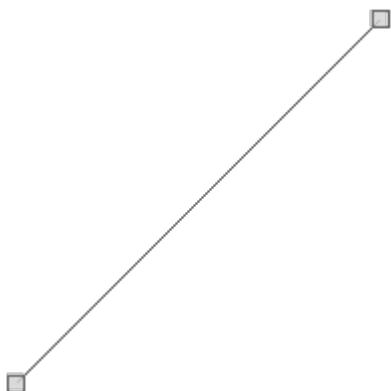

Is the Geometry simple? true


```
Geometry geom2 = new LineString(  
    [-122.356, 47.537],  
    [-122.295, 47.580],  
    [-122.284, 47.532],  
    [-122.353, 47.574]  
)  
boolean isGeom2Simple = geom2.simple  
println "Is the Geometry simple? ${isGeom2Simple}"
```

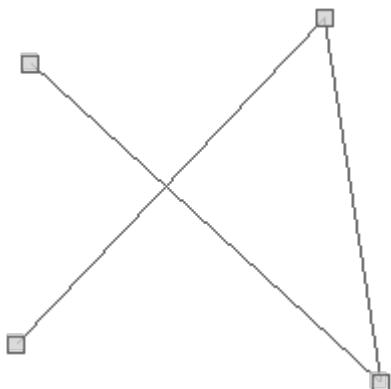

Is the Geometry simple? false


Determine if a Geometry is valid

```
Geometry geom1 = new LineString(  
    [-122.323, 47.599],  
    [-122.385, 47.581]  
)  
boolean isGeom1Valid = geom1.valid  
println "Is the Geometry valid? ${isGeom1Valid}"
```

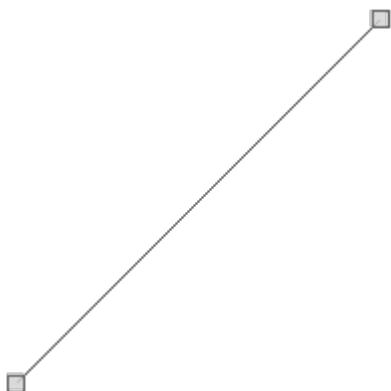

Is the Geometry valid? true


```
Geometry geom2 = new Polygon(new LinearRing([
    [48.16406, 42.29356],
    [35.15625, 25.79989],
    [64.33593, 24.52713],
    [26.71875, 39.09596],
    [48.16406, 42.29356],
]))
boolean isGeom2Valid = geom2.valid
println "Is the Geometry valid? ${isGeom2Valid}"
println geom2.validReason
```

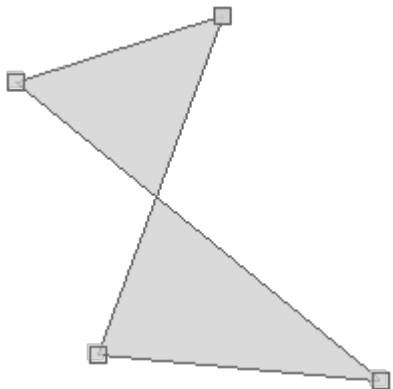

Is the Geometry valid? false
Self-intersection

Fix a Geometry


```
Geometry line = new LineString([[0, 0], [0, 0], [0, 0], [0, 0], [0, 0], [1, 1]])
println "LineString with duplicated Points = ${line.wkt}"
Geometry fixedLine = line.fix()
println "Fixed LineString = ${fixedLine}"
```

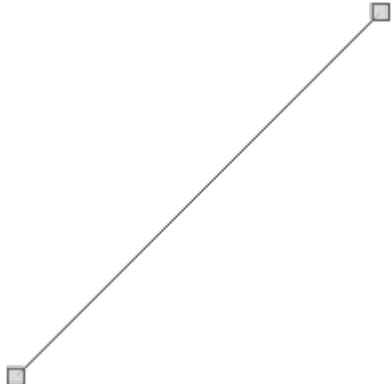

```
LineString with duplicated Points = LINESTRING (0 0, 0 0, 0 0, 0 0, 0 0, 1 1)  
Fixed LineString = LINESTRING (0 0, 1 1)
```


Determine if a Geometry is curved

```
Geometry geom1 = new CircularString([  
    [-122.464599609375, 47.247542522268006],  
    [-122.03613281249999, 47.37789454155521],  
    [-122.37670898437499, 47.58393661978134]  
)  
  
boolean isGeom1Curved = geom1.curved  
println "Is the Geometry valid? ${isGeom1Curved}"
```

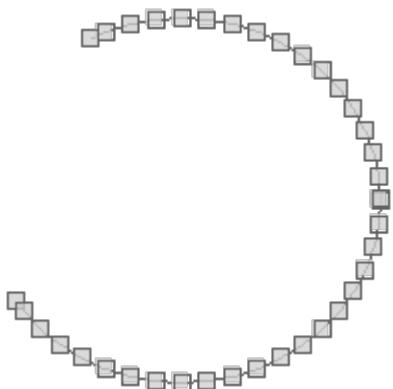

```
Is the Geometry curved? true
```

```
Geometry geom2 = new LineString(  
    [-122.323, 47.599],  
    [-122.385, 47.581])  
  
boolean isGeom2Curved = geom2.curved  
println "Is the Geometry valid? ${isGeom2Curved}"
```

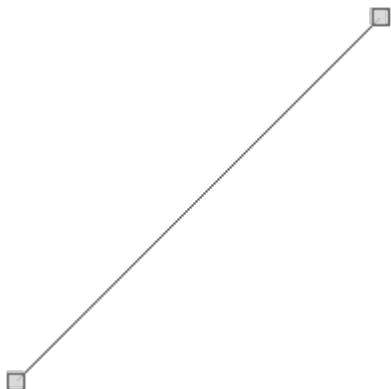

Is the Geometry curved? false

Determine if a Geometry is within a given distance of another Geometry

```
Geometry geom1 = new Point(-88.945, 41.771)
Geometry geom2 = new Point(-113.906, 37.160)

double distance1 = 26.0
boolean isWithin1 = geom1.isWithinDistance(geom2, distance1)
println "Is ${geom1} within ${distance1} of ${geom2}? ${isWithin1 ? 'Yes' : 'No'}"
```


Is POINT (-88.945 41.771) within 26.0 of POINT (-113.906 37.16)? Yes

```
double distance2 = 15.5
boolean isWithin2 = geom1.isWithinDistance(geom2, distance2)
println "Is ${geom1} within ${distance2} of ${geom2}? ${isWithin2 ? 'Yes' : 'No'}"
```

Is POINT (-88.945 41.771) within 15.5 of POINT (-113.906 37.16)? No

Normalizing a Geometry changes the Geometry in place.


```
Geometry geometry = Geometry.fromWKT("POLYGON((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4))")
geometry.normalize()
println "Normalized Geometry = ${geometry}"
```

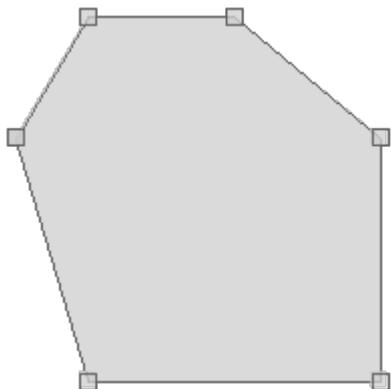

```
Normalized Geometry = POLYGON ((1 3, 2 4, 4 4, 6 3, 6 1, 2 1, 1 3))
```

Calculating a normalized Geometry from a Geometry does not change the original Geometry.


```
Geometry geometry = Geometry.fromWKT("POLYGON((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4))")
Geometry normalizedGeometry = geometry.norm
println "Un-normalized Geometry = ${geometry}"
println "Normalized Geometry      = ${normalizedGeometry}"
```

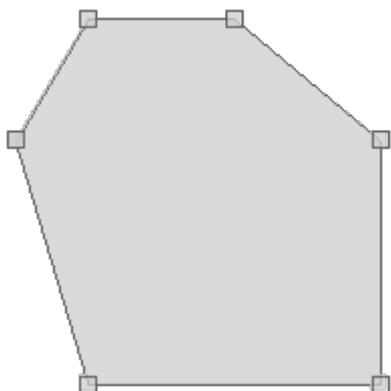

```
Un-normalized Geometry = POLYGON ((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4))
Normalized Geometry = POLYGON ((1 3, 2 4, 4 4, 6 3, 6 1, 2 1, 1 3))
```


Smooth a Geometry

```
Geometry geometry = Geometry.fromWKT("POLYGON((10 0, 10 20, 0 20, 0 30, 30 30, 30 20,
20 20, 20 0, 10 0))")
Geometry smoothed = geometry.smooth(0.75)
```

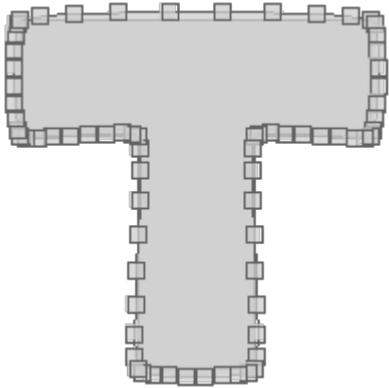

Calculate the DE-9IM Intersection Matrix between two geometries.

```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
IntersectionMatrix matrix = polygon1.relate(polygon2)  
println "Intersection Matrix = ${matrix}"  
println "Contains = ${matrix.contains}"  
println "Covered By = ${matrix.coveredBy}"  
println "Covers = ${matrix.covers}"  
println "Disjoint = ${matrix.disjoint}"  
println "Intersects = ${matrix.intersects}"  
println "Within = ${matrix.within}"
```

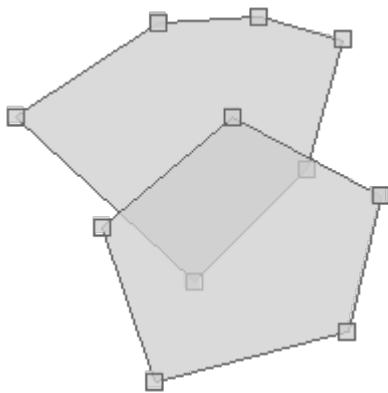

```

Intersection Matrix = 212101212
Contains = false
Covered By = false
Covers = false
Disjoint = false
Intersects = true
Within = false


```

Determine if a Geometry relates to another Geometry according to the given DE-9IM Intersection Matrix string

```

Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
])  
  
println polygon1.relate(polygon2, "212101212")
println polygon1.relate(polygon2, "111111111")
println polygon1.relate(polygon2, "222222222")


```

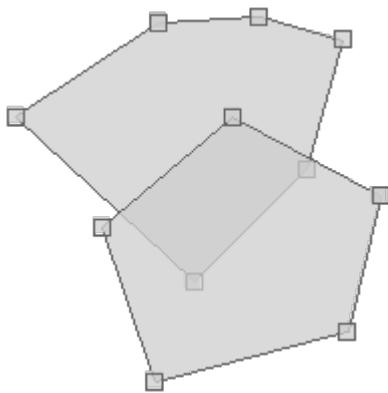


```
true  
false  
false
```

Densify a Geometry by adding points at a given interval.

```
Geometry geometry = new LineString([  
    [-122.28062152862547, 47.12986316579223],  
    [-122.2809863090515, 47.12935221617075],  
    [-122.2809863090515, 47.12786313499169],  
    [-122.28111505508421, 47.127731743474406],  
    [-122.28137254714966, 47.127673347140345],  
    [-122.28178024291992, 47.12768794622986],  
    [-122.28227376937865, 47.128067521151195],  
    [-122.28227376937865, 47.12906024275466]  
])  
Geometry densified = geometry.densify(0.0001)  
println "# of points in original geometry = ${geometry.numPoints}"  
println "# of points in densified geometry = ${densified.numPoints}"
```

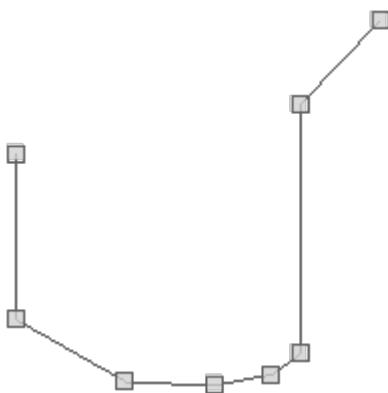


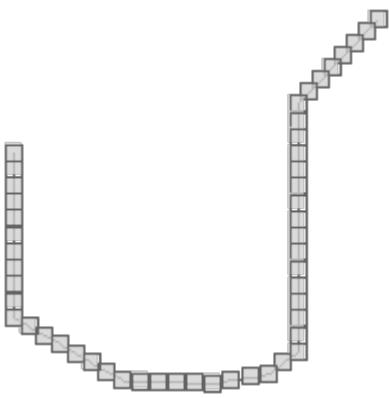


```
# of points in original geometry = 8  
# of points in densified geometry = 50
```

Simplify a Geometry by removing points at a given interval.

```
Geometry geometry = new LineString([  
    [-123.59619140625001, 47.338822694822],  
    [-123.04687499999999, 47.010225655683485],  
    [-122.2119140625, 46.965259400349275],  
    [-121.201171875, 47.17477833929903],  
    [-120.87158203125, 47.487513008956554],  
    [-120.62988281249999, 48.31242790407178],  
    [-120.84960937499999, 48.647427805533546],  
    [-121.59667968749999, 48.850258199721495],  
    [-122.36572265625, 48.980216985374994],  
    [-123.134765625, 48.83579746243093],  
    [-123.3984375, 48.44377831058802],  
    [-123.59619140625001, 48.10743118848039],  
    [-123.85986328124999, 47.62097541515849]  
)  
Geometry simplified = geometry.simplify(0.5)  
println "# of points in original geometry = ${geometry.numPoints}"  
println "# of points in simplified geometry = ${simplified.numPoints}"
```

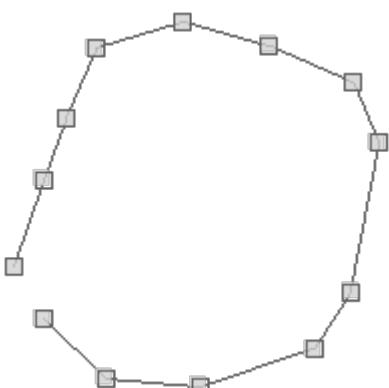


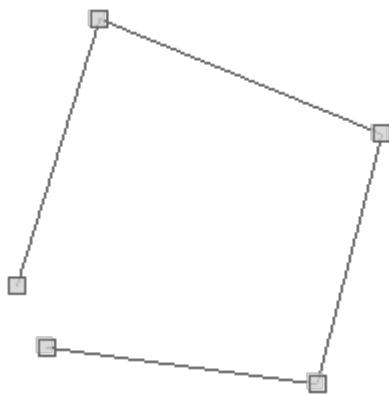


```
# of points in original geometry = 13  
# of points in simplified geometry = 5
```

Simplify a Geometry by removing points at a given interval but preserve the topological structure.

```
Geometry geometry = new LineString([  
    [-123.59619140625001, 47.338822694822],  
    [-123.04687499999999, 47.010225655683485],  
    [-122.2119140625, 46.965259400349275],  
    [-121.201171875, 47.17477833929903],  
    [-120.87158203125, 47.487513008956554],  
    [-120.62988281249999, 48.31242790407178],  
    [-120.84960937499999, 48.647427805533546],  
    [-121.59667968749999, 48.850258199721495],  
    [-122.36572265625, 48.980216985374994],  
    [-123.134765625, 48.83579746243093],  
    [-123.3984375, 48.44377831058802],  
    [-123.59619140625001, 48.10743118848039],  
    [-123.85986328124999, 47.62097541515849]  
)  
Geometry simplified = geometry.simplifyPreservingTopology(0.1)  
println "# of points in original geometry = ${geometry.numPoints}"  
println "# of points in simplified geometry = ${simplified.numPoints}"
```

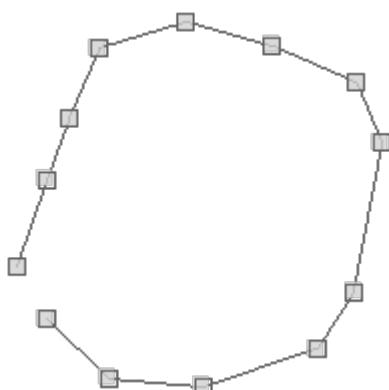


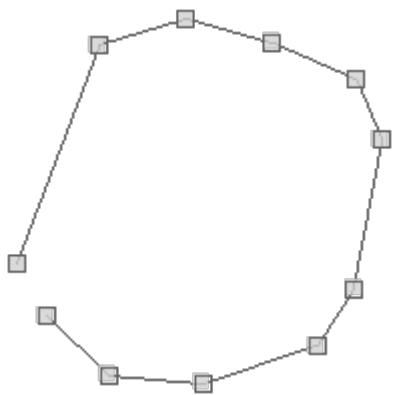

```
# of points in original geometry = 13  
# of points in simplified geometry = 11
```

Translate or move a geometry a given distance along the x and y axis.

```
Geometry geometry = new Polygon(new LinearRing([  
    [-121.83837890625, 47.5913464767971],  
    [-122.76123046875, 46.9802523552188],  
    [-122.67333984374, 46.3014061543733],  
    [-121.00341796874, 46.3772542051002],  
    [-121.22314453124, 47.1448974855539],  
    [-121.83837890625, 47.5913464767971]  
]))  
Geometry translatedGeometry = geometry.translate(2.1, 3.2)
```




Scale a geometry a given amount in an x and y direction around the origin

```
Geometry geometry = new Polygon(new LinearRing([
    [-121.83837890625, 47.5913464767971],
    [-122.76123046875, 46.9802523552188],
    [-122.67333984374, 46.3014061543733],
    [-121.00341796874, 46.3772542051002],
    [-121.22314453124, 47.1448974855539],
    [-121.83837890625, 47.5913464767971]
]))
Geometry scaledGeometry = geometry.scale(1.1,1.2)
println scaledGeometry
```





Scale a geometry a given amount in an x and y direction around a point

```
Geometry geometry = new Polygon(new LinearRing([
    [-121.83837890625, 47.5913464767971],
    [-122.76123046875, 46.9802523552188],
    [-122.67333984374, 46.3014061543733],
    [-121.00341796874, 46.3772542051002],
    [-121.22314453124, 47.1448974855539],
    [-121.83837890625, 47.5913464767971]
]))
Point centroid = geometry.centroid
Geometry scaledGeometry = geometry.scale(1.1, 1.1, centroid.x, centroid.y)
```

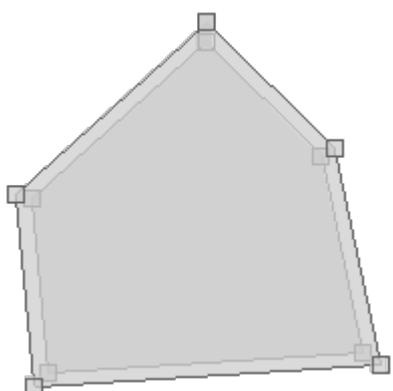


Rotate a Geometry around it's origin by a given angle theta (in radians).

```
Geometry geometry = new Polygon(new LinearRing([
    [-121.83837890625, 47.5913464767971],
    [-122.76123046875, 46.9802523552188],
    [-122.67333984374, 46.3014061543733],
    [-121.00341796874, 46.3772542051002],
    [-121.22314453124, 47.1448974855539],
    [-121.83837890625, 47.5913464767971]
]))
Geometry theta = geometry.rotate(Math.toRadians(45))
```

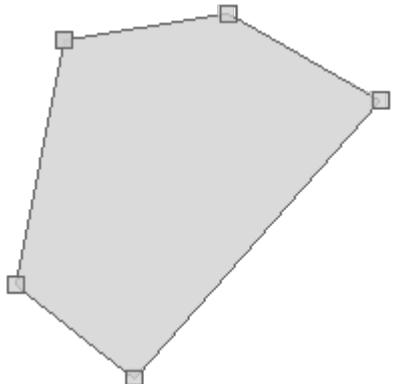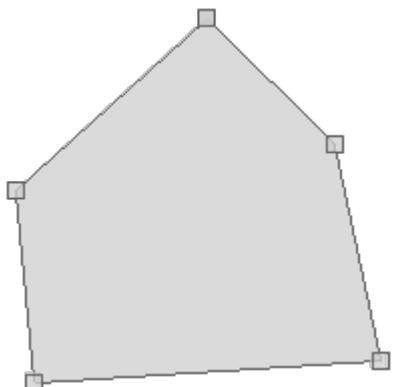


Rotate a Geometry around an XY coordinate by a given angle theta (in radians).

```
Geometry thetaXY = geometry.rotate(Math.toRadians(90), geometry.centroid.x, geometry.centroid.y)
```

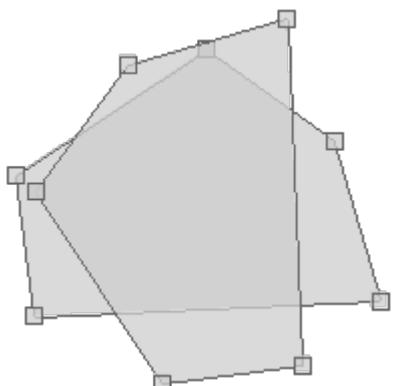


Rotate a Geometry around it's origin by a given angle sine and cosine (in radians).

```
Geometry sinCos = geometry.rotate(Math.toRadians(15), Math.toRadians(35))
```

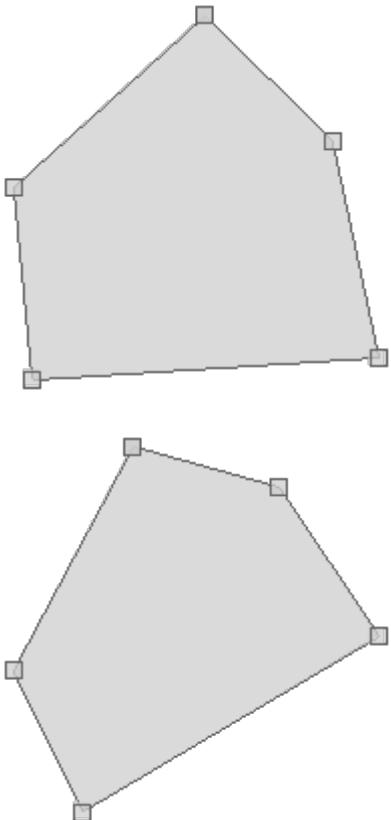



Rotate a Geometry around an XY coordinate by a given angle sine and cosine (in radians).

```
Geometry sinCosXY = geometry.rotate(Math.toRadians(15), Math.toRadians(35), geometry.centroid.x, geometry.centroid.y)
```

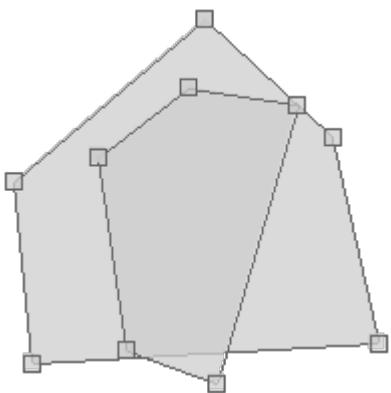


Shear a Geometry around it's origin by a given distance along the x and y axis.

```
Geometry geometry = new Polygon(new LinearRing([
    [-121.83837890625, 47.5913464767971],
    [-122.76123046875, 46.9802523552188],
    [-122.67333984374, 46.3014061543733],
    [-121.00341796874, 46.3772542051002],
    [-121.22314453124, 47.1448974855539],
    [-121.83837890625, 47.5913464767971]
]))
Geometry shearedGeometry = geometry.shear(0.1,0.4)
```

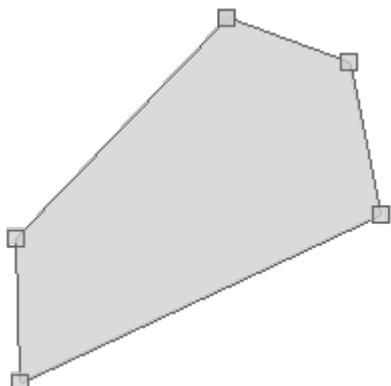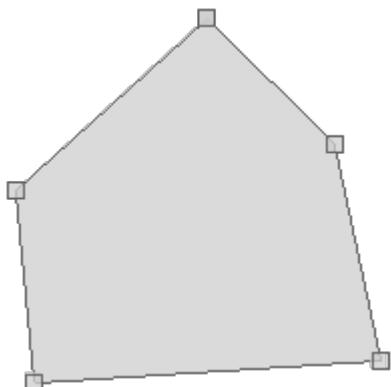



Reflect a Geometry around an XY coordinate for given distance along the x and y axis

```
Geometry geometry = new Polygon(new LinearRing([
    [-121.83837890625, 47.5913464767971],
    [-122.76123046875, 46.9802523552188],
    [-122.67333984374, 46.3014061543733],
    [-121.00341796874, 46.3772542051002],
    [-121.22314453124, 47.1448974855539],
    [-121.83837890625, 47.5913464767971]
])
)
Point centroid = geometry.centroid
Geometry reflectedGeometry = geometry.reflect(0.1,0.4, centroid.x, centroid.y)
```

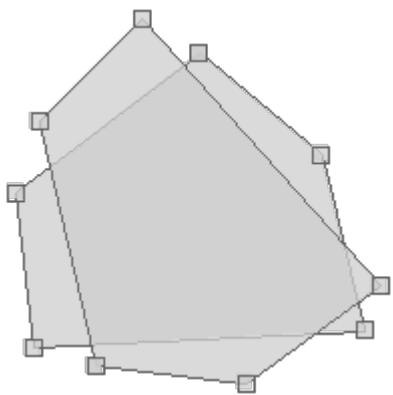

Reflect a Geometry around the origin for given distance along the x and y axis

```
Geometry reflectedAroundOrigin = geometry.reflect(0.5, 0.34)
```

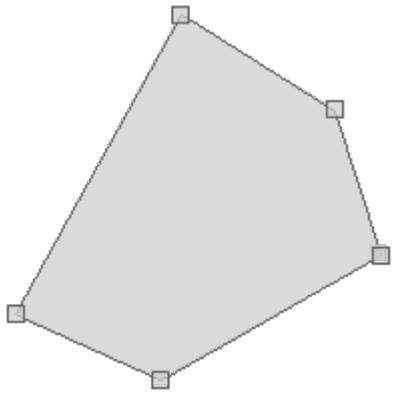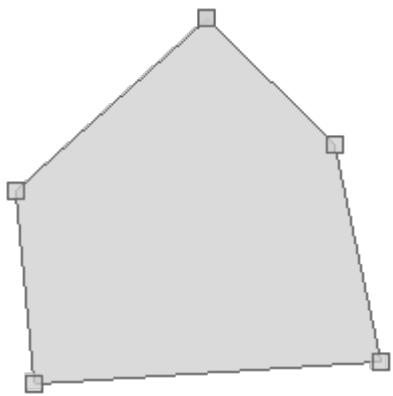

Reduce the precision of a Geometry's coordinates.

```
Geometry g1 = new Point(5.19775390625, 51.07421875)
println "Original Geometry: ${g1.wkt}"

Geometry g2 = g1.reducePrecision()
println "Floating Point Geometry: ${g2.wkt}"


Geometry g3 = g1.reducePrecision("fixed", scale: 100)
println "Fixed Point Geometry: ${g3.wkt}"

Geometry g4 = g1.reducePrecision("floating_single", pointwise: true, removecollapsed: true)
println "Floating Point Single Geometry: ${g4.wkt}"
```

```
Original Geometry: POINT (5.19775390625 51.07421875)
Floating Point Geometry: POINT (5.19775390625 51.07421875)
Fixed Point Geometry: POINT (5.2 51.07)
Floating Point Single Geometry: POINT (5.19775390625 51.07421875)
```

Find the nearest points in one Geometry to another

```
Geometry point = new Point( -122.3845276236534, 47.58285653105873)
Geometry polygon = Geometry.fromWKT("POLYGON ((-122.3848307132721 47.58285110342092,
+
    "-122.38484144210814 47.58255620092149, -122.38469392061235
47.582558010144346, " +
        "-122.3846912384033 47.5825797208137, -122.38460808992384 47.58258695770149, "
+
        "-122.38460808992384 47.582628569786834, -122.38458126783371
47.58263037900717, " +
            "-122.38458126783371 47.58277330721735, -122.38460540771483 47.58277149800195,
" +
            "-122.38460540771483 47.582805873084084, -122.38467246294022 47.5828131099406,
" +
            "-122.38467246294022 47.58285110342092, -122.3848307132721
47.58285110342092))")
List<Point> nearestPoints = polygon.getNearestPoints(point)
```

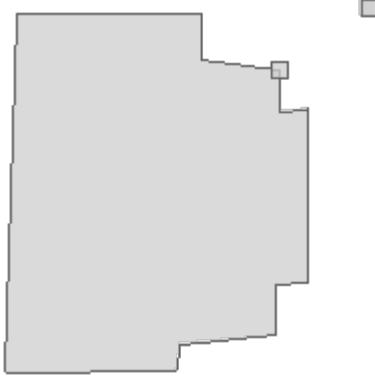

Convert a Geometry to a PreparedGeometry for more efficient spatial queries.

```
Geometry geometry = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
PreparedGeometry preparedGeometry = geometry.prepare()  
  
Closure timer = { Closure action ->  
    long start = System.nanoTime()  
    action.call()  
    long end = System.nanoTime()  
    end - start  
}  
  
MultiPoint points = Geometry.createRandomPoints(new Bounds(-180, -90, 180, 90)  
).geometry, 100000)  
  
long timeWithGeometry = timer({ ->  
    points.geometries.each { Point point ->  
        geometry.contains(point)  
    }  
})  
println "Time with Geometry      = ${timeWithGeometry} nanoseconds"  
  
long timeWithPreparedGeometry = timer({ ->  
    points.geometries.each { Point point ->  
        preparedGeometry.contains(point)  
    }  
})  
println "Time with PreparedGeometry = ${timeWithPreparedGeometry} nanoseconds"
```

```
Time with Geometry      = 282340578 nanoseconds
Time with PreparedGeometry = 115484229 nanoseconds
```

Convert a Geometry to a PreparedGeometry using a static method for more efficient spatial queries.

```
Geometry geometry = new Polygon([
    [-121.915, 47.390],
    [-122.640, 46.995],
    [-121.739, 46.308],
    [-121.168, 46.777],
    [-120.981, 47.316],
    [-121.409, 47.413],
    [-121.915, 47.390]
])
PreparedGeometry preparedGeometry = Geometry.prepare(geometry)

Closure timer = { Closure action ->
    long start = System.nanoTime()
    action.call()
    long end = System.nanoTime()
    end - start
}

MultiPoint points = Geometry.createRandomPoints(new Bounds(-180, -90, 180, 90)
).geometry, 100000)

long timeWithGeometry = timer({ ->
    points.geometries.each { Point point ->
        geometry.contains(point)
    }
})
println "Time with Geometry      = ${timeWithGeometry} nanoseconds"

long timeWithPreparedGeometry = timer({ ->
    points.geometries.each { Point point ->
        preparedGeometry.contains(point)
    }
})
println "Time with PreparedGeometry = ${timeWithPreparedGeometry} nanoseconds"
```

```
Time with Geometry      = 131588182 nanoseconds
Time with PreparedGeometry = 126221803 nanoseconds
```

Prepared Geometry


PreparedGeometry are more efficient for spatial queries.

You can create a PreparedGeometry by wrapping an existing Geometry. You can then get the original Geometry with the geometry property.

```
Polygon polygon = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
]])
```


```
PreparedGeometry preparedGeometry = new PreparedGeometry(polygon)
```

```
Geometry geometry = preparedGeometry.geometry
```

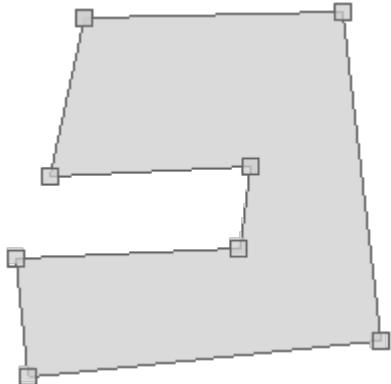


Check whether a PreparedGeometry contains another Geometry

```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
]])  
  
boolean contains = polygon1.contains(polygon2)  
println contains
```

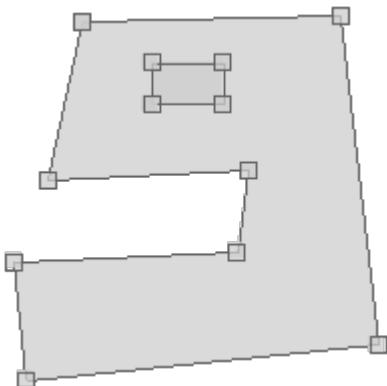


true

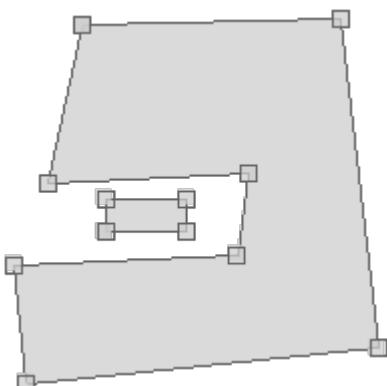


```
false
```

Check whether a `PreparedGeometry` properly contains another `Geometry`. This means that every point in the other geometry doesn't intersect with the first.

```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-122.50064849853516, 47.22096718353454],  
    [-122.41928100585938, 47.22096718353454],  
    [-122.41928100585938, 47.277365616965646],  
    [-122.50064849853516, 47.277365616965646],  
    [-122.50064849853516, 47.22096718353454]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-122.44571685791014, 47.24031721435104],  
    [-122.42958068847656, 47.24031721435104],  
    [-122.42958068847656, 47.253135632244216],  
    [-122.44571685791014, 47.253135632244216],  
    [-122.44571685791014, 47.24031721435104]  
]])  
  
boolean contains = polygon1.containsProperly(polygon2)  
println contains
```

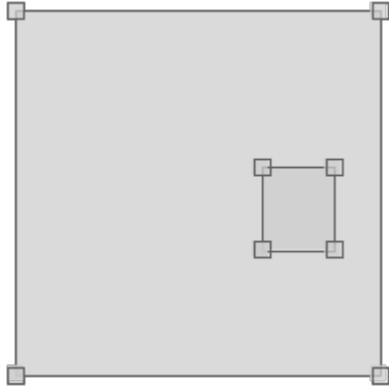


```
true
```

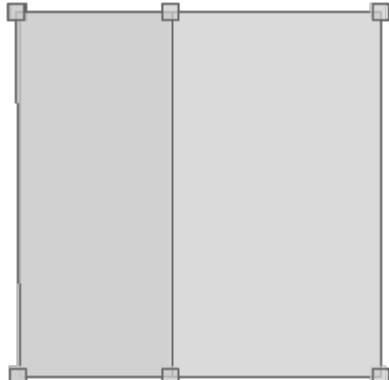


```
false
```

Check whether a `PreparedGeometry` is covered by another `Geometry`.

```
Polygon polygon1 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
]]);  
  
PreparedGeometry polygon2 = new PreparedGeometry(new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
]]));  
  
boolean isCoveredBy = polygon2.coveredBy(polygon1)  
println isCoveredBy
```

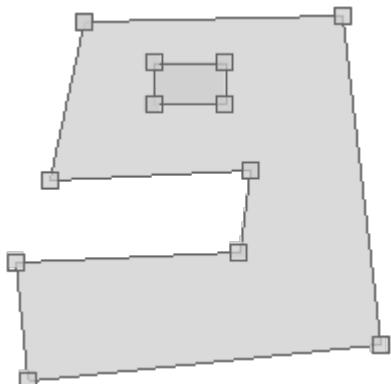


```
true
```

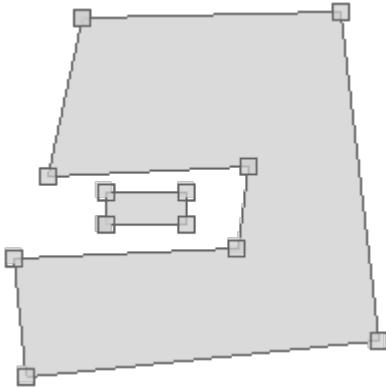


```
false
```

Check whether a PreparedGeometry covers another Geometry.

```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
]])  
  
boolean isCovered = polygon1.covers(polygon2)  
println isCovered
```

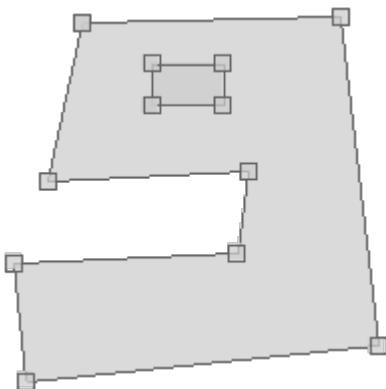


true

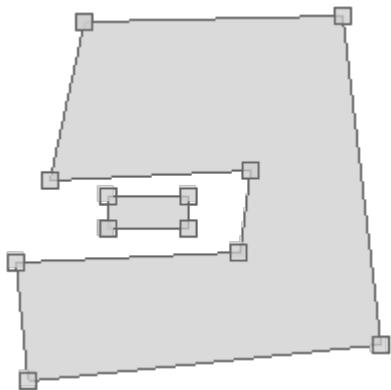

false

Check whether a PreparedGeometry crosses another Geometry.


```
PreparedGeometry line1 = new PreparedGeometry(new LineString([-122.387, 47.613], [-121.750, 47.353]))  
LineString line2 = new LineString([-122.255, 47.368], [-121.882, 47.746])  
LineString line3 = new LineString([-122.486, 47.256], [-121.695, 46.822])  
  
boolean doesCross12 = line1.crosses(line2)  
println doesCross12  
  
boolean doesCross13 = line1.crosses(line3)  
println doesCross13
```

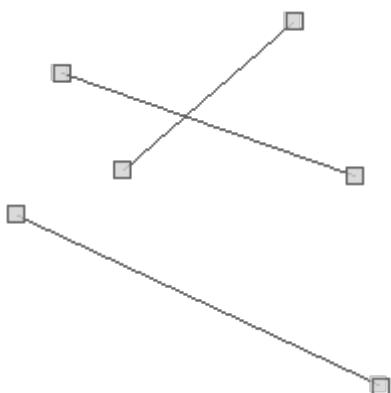

true
false

Check whether a PreparedGeometry is disjoint from another Geometry.


```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
]])  
  
boolean isDisjoint12 = polygon1.disjoint(polygon2)  
println isDisjoint12  
  
boolean isDisjoint13 = polygon1.disjoint(polygon3)  
println isDisjoint13
```

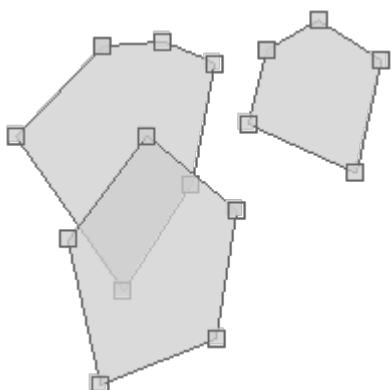

```
false  
true
```

Check whether a PreparedGeometry intersects another Geometry.


```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
]])  
  
boolean does1intersect2 = polygon1.intersects(polygon2)  
println does1intersect2  
  
boolean does1intersect3 = polygon1.intersects(polygon3)  
println does1intersect3
```

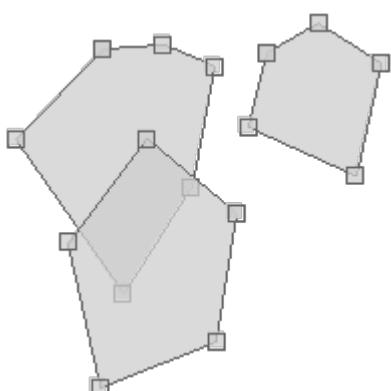

```
true  
false
```

Check whether a PreparedGeometry overlaps another Geometry.


```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
]])  
  
boolean does1overlap2 = polygon1.overlaps(polygon2)  
println does1overlap2  
  
boolean does1overlap3 = polygon1.overlaps(polygon3)  
println does1overlap3
```

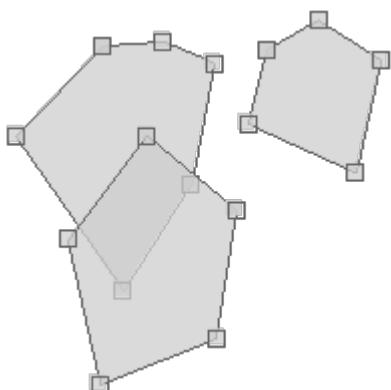

```
true  
false
```


Check whether a PreparedGeometry touches another Geometry.

```
PreparedGeometry line1 = new PreparedGeometry(new LineString([
    [-122.38651514053345, 47.58219978280006],
    [-122.38651514053345, 47.58020234903306]
]))  
  
LineString line2 = new LineString([
    [-122.38651514053345, 47.58124449789785],
    [-122.38333940505981, 47.58124449789785]
])  
  
boolean touches = line1.touches(line2)
```

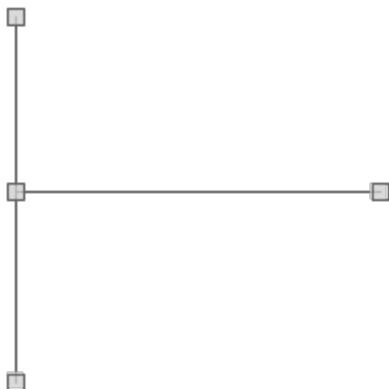

true


```
LineString line3 = new LineString([
    [-122.386257648468, 47.58183793450921],
    [-122.38348960876465, 47.5818668824645]
])  
  
touches = line1.touches(line3)
```

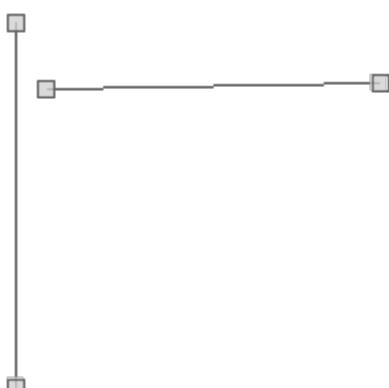

false

Check whether a `PreparedGeometry` is within another `Geometry`.

```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
]])  
  
boolean within = polygon1.within(polygon2)  
println within
```

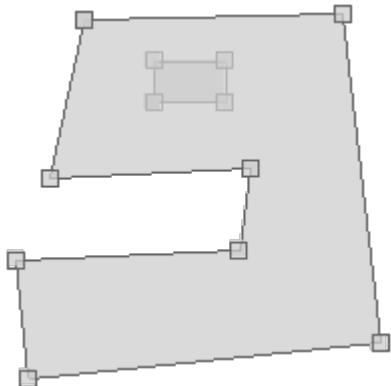

```
true
```

```
Polygon polygon3 = new Polygon([[  
    [-120.563, 46.739],  
    [-119.948, 46.739],  
    [-119.948, 46.965],  
    [-120.563, 46.965],  
    [-120.563, 46.739]  
]])
```

```
within = polygon1.within(polygon3)  
println within
```



```
false
```

Reading and Writing Geometries

The [geoscript.geom.io](#) package has several Readers and Writers for converting geoscript.geom.Geometry to and from strings.

Readers and Writers

Find all Geometry Readers

```
List<Reader> readers = Readers.list()
readers.each { Reader reader ->
    println reader.className
}
```

```
GeobufReader
GeoJSONReader
GeoRSSReader
Gml2Reader
Gml3Reader
GpxReader
KmlReader
WkbReader
WktReader
GeoPackageReader
GooglePolylineEncoder
TWkbReader
YamlReader
```

Find a Geometry Reader

```
String wkt = "POINT (-123.15 46.237)"
Reader reader = Readers.find("wkt")
Geometry geometry = reader.read(wkt)
```



Find all Geometry Writers

```
List<Writer> writers = Writers.list()
writers.each { Writer writer ->
    println writer.class.getSimpleName
}
```

```
GeobufWriter
GeoJSONWriter
GeoRSSWriter
Gml2Writer
Gml3Writer
GpxWriter
KmlWriter
WkbWriter
WktWriter
GeoPackageWriter
GooglePolylineEncoder
YamlWriter
TWkbWriter
```

Find a Geometry Writer

```
Geometry geometry = new Point(-122.45, 43.21)
Writer writer = Writers.find("geojson")
String geojson = writer.write(geometry)
println geojson
```

```
{"type": "Point", "coordinates": [-122.45, 43.21]}
```

Create a Geometry from a String. The string will be parse by each Geometry Reader.

```
Geometry geom1 = Geometry.fromString('POINT (-123.15 46.237)')
println geom1

Geometry geom2 = Geometry.fromString
('{"type":"LineString","coordinates":[[3.198,43.164],[6.713,49.755],[9.702,42.592],[15
.32,53.798]]}')
println geom2

Geometry geom3 = Geometry.fromString('<Point><coordinates>-
123.15,46.237</coordinates></Point>')
println geom3
```

```
POINT (-123.15 46.237)
LINESTRING (3.198 43.164, 6.713 49.755, 9.702 42.592, 15.32 53.798)
POINT (-123.15 46.237)
```

WKB


Read a Geometry from WKB using the WkbReader

```
String wkb = "000000001C05EC999999999A40471E5604189375"
WkbReader reader = new WkbReader()
Geometry geometry = reader.read(wkb)
```



Read a Geometry from WKB using the Geometry.fromWKB() static method

```
String wkb =
"0000000020000004400995810624DD2F404594FDF3B645A2401ADA1CAC0831274048E0A3D70A3D71402
3676C8B43958140454BC6A7EF9DB2402EA3D70A3D70A4404AE624DD2F1AA0"
Geometry geometry = Geometry.fromWKB(wkb)
```

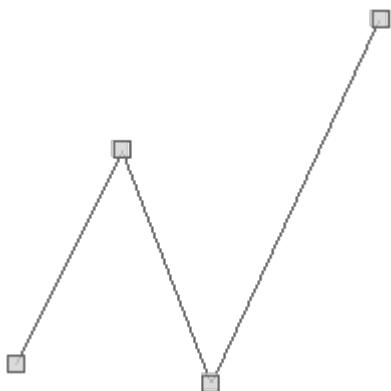

Get the WKB of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)
String wkb = geometry.wkb
println wkb
```

```
000000001C05EC999999999A40471E5604189375
```

Write a Geometry to WKB using the WkbWriter

```
Geometry geometry = new LineString(
    [3.198, 43.164],
    [6.713, 49.755],
    [9.702, 42.592],
    [15.32, 53.798]
)
WkbWriter writer = new WkbWriter()
String wkb = writer.write(geometry)
println wkb
```

```
00000000200000004400995810624DD2F404594FDF3B645A2401ADA1CAC0831274048E0A3D70A3D714023
676C8B43958140454BC6A7EF9DB2402EA3D70A3D70A4404AE624DD2F1AA0
```

WKT


Read a Geometry from WKT using the WktReader

```
String wkt = "POINT (-123.15 46.237)"
WktReader reader = new WktReader()
Geometry geometry = reader.read(wkt)
```



Read a Geometry from WKT using the `Geometry.fromWKT()` static method

```
String wkt = "LINESTRING (3.198 43.164, 6.7138 49.755, 9.702 42.592, 15.327 53.798)"  
Geometry geometry = Geometry.fromWKT(wkt)
```

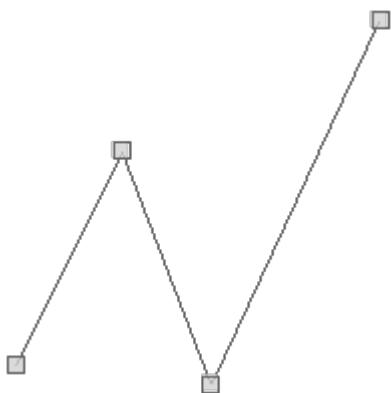

Get the WKT of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)  
String wkt = geometry.wkt  
println wkt
```

```
POINT (-123.15 46.237)
```

Write a Geometry to WKT using the `WktWriter`

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798]  
)  
WktWriter writer = new WktWriter()  
String wkt = writer.write(geometry)  
println wkt
```

```
LINestring (3.198 43.164, 6.713 49.755, 9.702 42.592, 15.32 53.798)
```

TWKB

Get a Geometry from a TWKB Encoded String

```
String twkb = "E10801BFCBB99609A0D3F9B80300"  
Geometry geometry = Geometry.fromTwkb(twkb)
```

□

Get TWKB Encoded String from a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)  
String twkb = geometry.twkb  
println twkb
```

```
E10801BFCBB99609A0D3F9B80300
```

Read a Geometry from TWKB hex encoded String

```
TWkbReader reader = new TWkbReader()  
Geometry geometry = reader.read("E10801BFCBB99609A0D3F9B80300")  
println geometry.wkt
```

```
POINT (-123.15 46.237)
```



Write a Geometry to a TWKB hex encoded String using the TwkbWriter

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798]  
)  
TWkbWriter writer = new TWkbWriter()  
String twkb = writer.write(geometry)  
println twkb
```

```
E2080104C0E7BF1E80B7D29B0300E0E2C221E0D3ED3E00A0D7C01CDFF2A74400C0F4C935C099EF6A00
```

GeoJSON


Read a Geometry from GeoJSON using the GeoJSONReader

```
String json = '{"type":"Point","coordinates":[-123.15,46.237]}'  
GeoJSONReader reader = new GeoJSONReader()  
Geometry geometry = reader.read(json)
```



Read a Geometry from GeoJSON using the Geometry.fromGeoJSON() static method

```
String json =  
'{"type": "LineString", "coordinates": [[3.198, 43.164], [6.713, 49.755], [9.702, 42.592], [15.  
32, 53.798]]}'  
Geometry geometry = Geometry.fromGeoJSON(json)
```

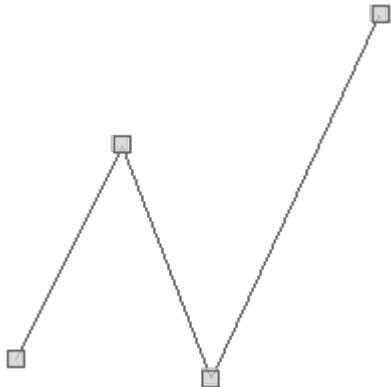

Get the GeoJSON of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)  
String json = geometry.geoJSON  
println json
```

```
{"type": "Point", "coordinates": [-123.15, 46.237]}
```

Write a Geometry to GeoJSON using the GeoJSONWriter

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798])  
GeoJSONWriter writer = new GeoJSONWriter()  
String json = writer.write(geometry)  
println json
```

```
{"type": "LineString", "coordinates": [[3.198, 43.164], [6.713, 49.755], [9.702, 42.592], [15.3  
2, 53.798]]}
```

GeoPackage

Read a Geometry from GeoPackage hex encoded string using the GeoPackageReader

```
String str =  
"4750000200000000c05ec9999999999ac05ec9999999999a40471e560418937540471e560418937500000  
00001c05ec9999999999a40471e5604189375"  
GeoPackageReader reader = new GeoPackageReader()  
Geometry geometry = reader.read(str)
```



Read a Geometry from GeoPackage bytes using the GeoPackageReader

```
byte[] bytes =  
"4750000200000000c05ec9999999999ac05ec9999999999a40471e560418937540471e560418937500000  
00001c05ec9999999999a40471e5604189375".decodeHex()  
GeoPackageReader reader = new GeoPackageReader()  
Geometry geometry = reader.read(bytes)
```



Write a Geometry to a GeoPackage hex encoded string

```
Geometry geometry = new Point(-123.15, 46.237)  
GeoPackageWriter writer = new GeoPackageWriter()  
String str = writer.write(geometry)  
println str
```

```
4750000200000000c05ec9999999999ac05ec9999999999a40471e560418937540471e560418937500000  
00001c05ec9999999999a40471e5604189375
```

Write a Geometry to a GeoPackage byte array

```
Geometry geometry = new Point(-123.15, 46.237)
GeoPackageWriter writer = new GeoPackageWriter()
byte[] bytes = writer.writeBytes(geometry)
println bytes.encodeHex()
```

```
4750000200000000c05ec999999999ac05ec999999999a40471e560418937540471e5604189375000000
0001c05ec999999999a40471e5604189375
```

KML


Read a Geometry from KML using the KmlReader

```
String kml = "<Point><coordinates>-123.15,46.237</coordinates></Point>"
KmlReader reader = new KmlReader()
Geometry geometry = reader.read(kml)
```



Read a Geometry from KML using the Geometry.fromKml() static method

```
String kml = "<LineString><coordinates>3.198,43.164 6.713,49.755 9.702,42.592
15.32,53.798</coordinates></LineString>"
Geometry geometry = Geometry.fromKml(kml)
```

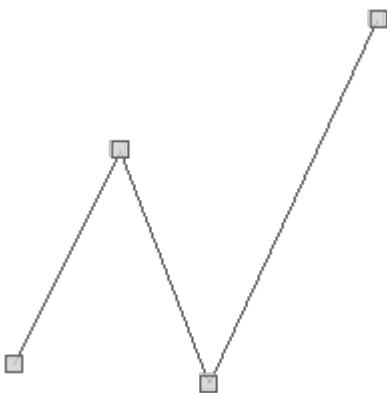

Get the KML of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)
String kml = geometry.kml
println kml
```

```
<Point><coordinates>-123.15,46.237</coordinates></Point>
```

Write a Geometry to KML using the KmlWriter

```
Geometry geometry = new LineString(
    [3.198, 43.164],
    [6.713, 49.755],
    [9.702, 42.592],
    [15.32, 53.798]
)
KmlWriter writer = new KmlWriter()
String kml = writer.write(geometry)
println kml
```

```
<LineString><coordinates>3.198,43.164 6.713,49.755 9.702,42.592
15.32,53.798</coordinates></LineString>
```

Geobuf


Read a Geometry from Geobuf using the GeobufReader

```
String geobuf = "10021806320c08001a08dffab87590958c2c"
GeobufReader reader = new GeobufReader()
Geometry geometry = reader.read(geobuf)
```



Read a Geometry from Geobuf using the Geometry.fromGeobuf() static method

```
String geobuf =  
"10021806322408021a20e0b08603c0859529f089ad03b0c8a40690efec02efb1ea06a0e5ad05e0f5d70a"  
Geometry geometry = Geometry.fromGeobuf(geobuf)
```

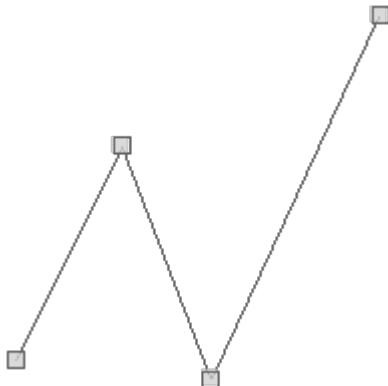

Get the Geobuf of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)  
String geobuf = geometry.geobuf  
println geobuf
```

```
10021806320c08001a08dffab87590958c2c
```

Write a Geometry to Geobuf using the GeobufWriter

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798]  
)  
GeobufWriter writer = new GeobufWriter()  
String geobuf = writer.write(geometry)  
println geobuf
```

```
10021806322408021a20e0b08603c0859529f089ad03b0c8a40690efec02efb1ea06a0e5ad05e0f5d70a
```

GML 2


Read a Geometry from GML2 using the Gml2Reader

```
String gml2 = "<gml:Point><gml:coordinates>-123.15,46.237</gml:coordinates></gml:Point>"  
Gml2Reader reader = new Gml2Reader()  
Geometry geometry = reader.read(gml2)
```



Read a Geometry from GML2 using the Geometry.fromGML2() static method

```
String gml2 = "<gml:LineString><gml:coordinates>3.198,43.164 6.713,49.755 9.702,42.592  
15.32,53.798</gml:coordinates></gml:LineString>"  
Geometry geometry = Geometry.fromGML2(gml2)
```

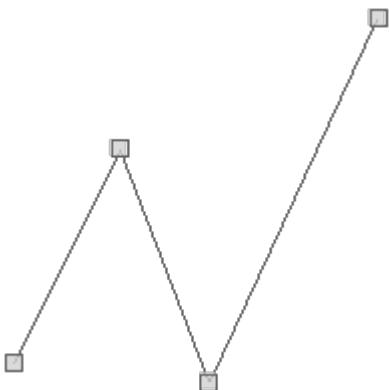

Get the GML2 of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)  
String gml2 = geometry.gml2  
println gml2
```

```
<gml:Point><gml:coordinates>-123.15,46.237</gml:coordinates></gml:Point>
```

Write a Geometry to GML2 using the Gml2Writer

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798]  
)  
Gml2Writer writer = new Gml2Writer()  
String gml2 = writer.write(geometry)  
println gml2
```

```
<gml:LineString><gml:coordinates>3.198,43.164 6.713,49.755 9.702,42.592  
15.32,53.798</gml:coordinates></gml:LineString>
```

GML 3


Read a Geometry from GML3 using the Gml3Reader

```
String gml3 = "<gml:Point><gml:pos>-123.15 46.237</gml:pos></gml:Point>"  
Gml3Reader reader = new Gml3Reader()  
Geometry geometry = reader.read(gml3)
```



Read a Geometry from GML3 using the Geometry.fromGML3() static method

```
String gml3 = "<gml:LineString><gml:posList>3.198 43.164 6.713 49.755 9.702 42.592  
15.32 53.798</gml:posList></gml:LineString>"  
Geometry geometry = Geometry.fromGML3(gml3)
```

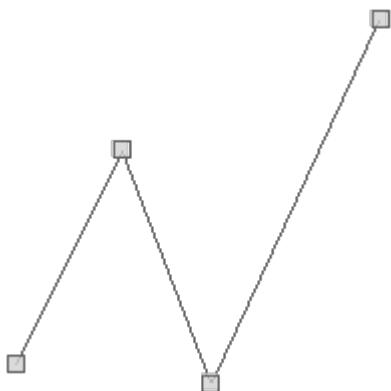

Get the GML3 of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)
String gml3 = geometry.gml3
println gml3
```

```
<gml:Point><gml:pos>-123.15 46.237</gml:pos></gml:Point>
```

Write a Geometry to GML3 using the Gml3Writer

```
Geometry geometry = new LineString(
    [3.198, 43.164],
    [6.713, 49.755],
    [9.702, 42.592],
    [15.32, 53.798]
)
Gml3Writer writer = new Gml3Writer()
String gml3 = writer.write(geometry)
println gml3
```

```
<gml:LineString><gml:posList>3.198 43.164 6.713 49.755 9.702 42.592 15.32
53.798</gml:posList></gml:LineString>
```

GPX


Read a Geometry from GPX using the GpxReader

```
String gpx = "<wpt lat='46.237' lon='-123.15' />"
GpxReader reader = new GpxReader()
Geometry geometry = reader.read(gpx)
```



Read a Geometry from GPX using the `Geometry.fromGPX()` static method

```
String gpx = "<rte><rtept lat='43.164' lon='3.198' /><rtept lat='49.755' lon='6.713' /><rtept lat='42.592' lon='9.702' /><rtept lat='53.798' lon='15.32' /></rte>"  
Geometry geometry = Geometry.fromGpx(gpx)
```

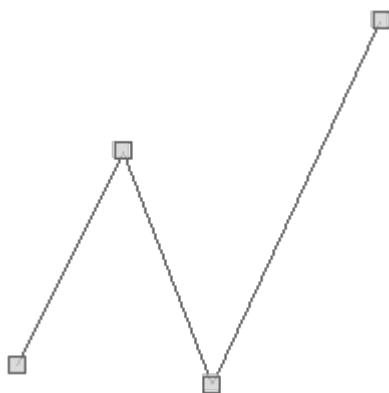

Get the GPX of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)  
String gpx = geometry.gpx  
println gpx
```

```
<wpt lat='46.237' lon='-123.15' />
```

Write a Geometry to GPX using the `GpxWriter`

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798])  
GpxWriter writer = new GpxWriter()  
String gpx = writer.write(geometry)  
println gpx
```

```
<rte><rtept lat='43.164' lon='3.198' /><rtept lat='49.755' lon='6.713' /><rtept  
lat='42.592' lon='9.702' /><rtept lat='53.798' lon='15.32' /></rte>
```

GeoRSS

Read a Geometry from GeoRSS using the GeoRSSReader

```
String georss = "<georss:point>46.237 -123.15</georss:point>"  
GeoRSSReader reader = new GeoRSSReader()  
Geometry geometry = reader.read(georss)
```



Write a Geometry to GeoRSS using the GeoRSSWriter


```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798])  
GeoRSSWriter writer = new GeoRSSWriter()  
String georss = writer.write(geometry)  
println georss
```

```
<georss:line>43.164 3.198 49.755 6.713 42.592 9.702 53.798 15.32</georss:line>
```

Google Polyline

Read a Geometry from a Google Polyline Encoded String using the GeoRSSReader

```
String str = "_p~iF~ps|U_ullnnqC_mqNvxq`@"  
GooglePolylineEncoder encoder = new GooglePolylineEncoder()  
Geometry geometry = encoder.read(str)
```

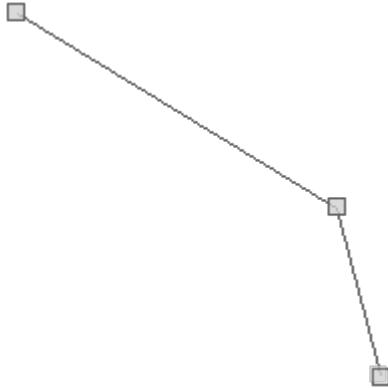

Write a Geometry to a Google Polyline Encoded String using the GeoRSSWriter

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798]  
)  
GooglePolylineEncoder encoder = new GooglePolylineEncoder()  
String str = encoder.write(geometry)  
println str
```

```
_nmfGoroRwhfg@womTv_vj@gxfQotkcAogha@
```

YAML

Get a Geometry from a GeoYaml String

```
String yaml = """---  
geometry:  
  type: "Point"  
  coordinates:  
  - -122.23  
  - 45.67  
"""  
Geometry geometry = Geometry.fromYaml(yaml)
```



Get GeoYaml from a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)
String yaml = geometry.yaml
println yaml
```

```
---
geometry:
  type: Point
  coordinates:
    - -123.15
    - 46.237
```

Read a Geometry from a GeoYaml String using the YamlReader

```
String yaml = """---
geometry:
  type: "Point"
  coordinates:
    - -122.23
    - 45.67
"""
YamlReader reader = new YamlReader()
Geometry geometry = reader.read(yaml)
```



Write a Geometry to a GeoYaml String using the YamlWriter

```
Geometry geometry = new LineString(
  [3.198, 43.164],
  [6.713, 49.755],
  [9.702, 42.592],
  [15.32, 53.798]
)
YamlWriter writer = new YamlWriter()
String yaml = writer.write(geometry)
println yaml
```

```
---
```

```
geometry:  
  type: LineString  
  coordinates:  
    - [ 3.198, 43.164 ]  
    - [ 6.713, 49.755 ]  
    - [ 9.702, 42.592 ]  
    - [ 15.32, 53.798 ]
```

Bounds Recipes


The Bounds class is in the [geoscript.geom](#) package.

It represents a minimum bounding box or rectangle, so it has minimum and maximum x and y coordinates in a specified projection.

Creating Bounds


Create a Bounds from four coordinates (minx, miny, maxx, maxy) and a projection.

```
Bounds bounds = new Bounds(-127.265, 43.068, -113.554, 50.289, "EPSG:4326")
```

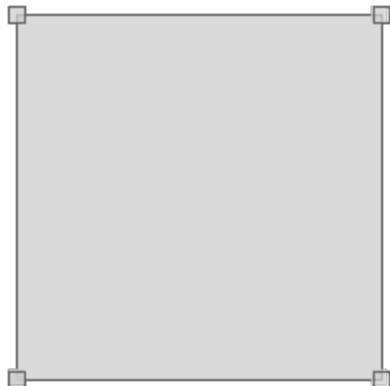


Create a Bounds from four coordinates (minx, miny, maxx, maxy) without a projection. The projection can be set later.

```
Bounds bounds = new Bounds(-127.265, 43.068, -113.554, 50.289)  
bounds.proj = new Projection("EPSG:4326")
```

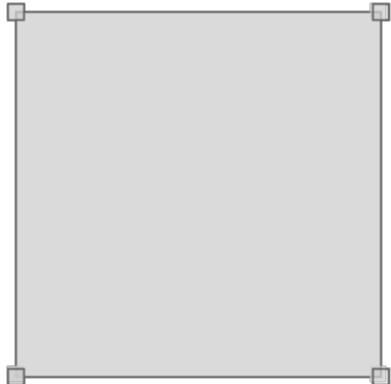


Create a *Bounds* from a string with commas delimiting minx, miny, maxx, maxy and projection values.

```
Bounds bounds = Bounds.fromString("-127.265,43.068,-113.554,50.289,EPGS:4326")
```

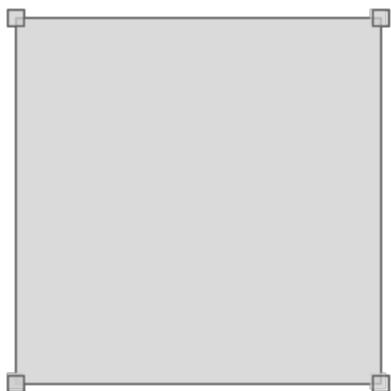

Create a *Bounds* from a string with spaces delimiting minx, miny, maxx, maxy and projection values.

```
Bounds bounds = Bounds.fromString("12.91992187499998 40.84706035607122 15.99609375  
41.77131167976407 EPSG:4326")
```

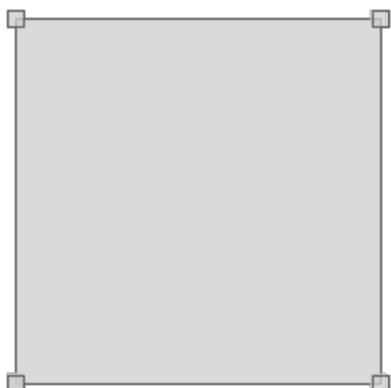

Getting Bounds Properties

Create a Bounds and view it's string representation

```
Bounds bounds = new Bounds(-127.265, 43.068, -113.554, 50.289, "EPSG:4326")
String boundsStr = bounds.toString()
println boundsStr
```

```
(-127.265,43.068,-113.554,50.289,EPSG:4326)
```

Get the minimum x coordinate

```
double minX = bounds.minX
println minX
```

```
-127.265
```

Get the minimum y coordinate

```
double minY = bounds.minY
println minY
```

```
43.068
```

Get the maximum x coordinate

```
double maxX = bounds.maxX
println maxX
```

```
-113.554
```

Get the maximum y coordinate

```
double maxY = bounds.maxY
println maxY
```

```
50.289
```

Get the Projection

```
Projection proj = bounds.proj
println proj.id
```

EPSG:4326

Get the area

```
double area = bounds.area  
println area
```

99.00713100000004

Get the width

```
double width = bounds.width  
println width
```

13.71099999999999

Get the height

```
double height = bounds.height  
println height
```

7.221000000000004


Get the aspect ratio

```
double aspect = bounds.aspect  
println aspect
```

1.8987674837280144


A Bounds is not a Geometry but you can get a Geometry from a Bounds

```
Bounds bounds = new Bounds(-122.485, 47.246, -122.452, 47.267, "EPSG:4326")  
Geometry geometry = bounds.geometry
```

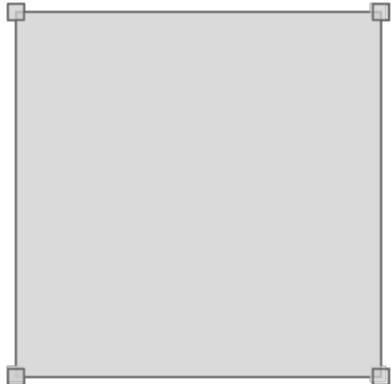

You can also get a Polygon from a Bounds

```
Bounds bounds = new Bounds(-122.485, 47.246, -122.452, 47.267, "EPSG:4326")
Polygon polygon = bounds.polygon
```

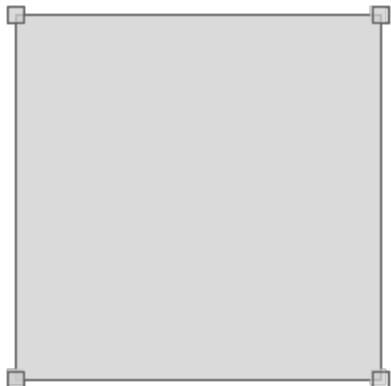

Get the four corners from a Bounds as a List of Points

```
Bounds bounds = new Bounds(-122.485, 47.246, -122.452, 47.267, "EPSG:4326")
List<Point> points = bounds.corners
```



Processing Bounds

Reproject a Bounds from one Projection to another.

```
Bounds bounds = new Bounds(-122.485, 47.246, -122.452, 47.267, "EPSG:4326")
println bounds
```


```
(-122.485,47.246,-122.452,47.267,EPSG:4326)
```

```
Bounds reprojectedBounds = bounds.reproject("EPSG:2927")
println reprojectedBounds
```

```
(1147444.7684518,703506.2231641796,1155828.1202425023,711367.9403610165,EPSG:2927)
```


Expand a Bounds by a given distance

```
Bounds bounds1 = new Bounds(-127.265, 43.068, -113.554, 50.289, "EPSG:4326")
Bounds bounds2 = new Bounds(-127.265, 43.068, -113.554, 50.289, "EPSG:4326")
bounds2.expandBy(10.1)
```

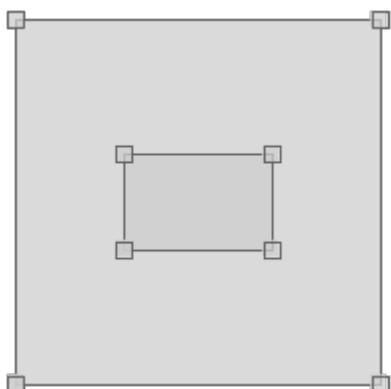


Expand a Bounds to include another Bounds

```
Bounds bounds1 = new Bounds(8.4375, 37.996162679728116, 19.6875, 46.07323062540835,
"EPSG:4326")
Bounds bounds2 = new Bounds(22.5, 31.952162238024975, 30.937499999999996,
37.43997405227057, "EPSG:4326")
bounds1.expand(bounds2)
```

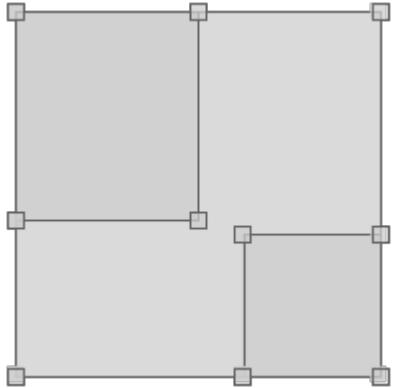


Scale an existing Bounds some distance to create a new Bounds

```
Bounds bounds1 = new Bounds(-127.265, 43.068, -113.554, 50.289, "EPSG:4326")
Bounds bounds2 = bounds1.scale(2)
```

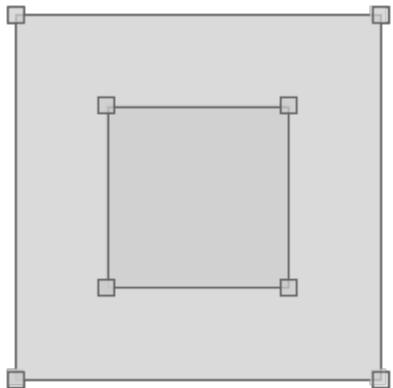

Divide a Bounds into smaller tiles or Bounds

```
Bounds bounds = new Bounds(-122.485, 47.246, -122.452, 47.267, "EPSG:4326")
List<Bounds> subBounds = bounds.tile(0.25)
```

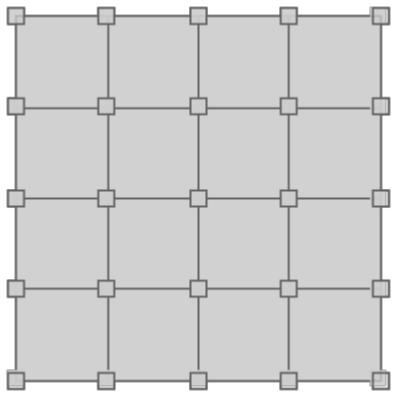

Calculate a quad tree for this Bounds between the start and stop levels. A Closure is called for each new Bounds generated.

```
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326")
bounds.quadTree(0,2) { Bounds b ->
    println b
}
```

```
(-180.0,-90.0,180.0,90.0,EPSG:4326)
(-180.0,-90.0,0.0,0.0,EPSG:4326)
(-180.0,0.0,0.0,90.0,EPSG:4326)
(0.0,-90.0,180.0,0.0,EPSG:4326)
(0.0,0.0,180.0,90.0,EPSG:4326)
```

Determine whether a Bounds is empty or not. A Bounds is empty if it is null or it's area is 0.

```
Bounds bounds = new Bounds(0,10,10,20)
println bounds.isEmpty()
```


```
false
```

```
Bounds emptyBounds = new Bounds(0,10,10,10)
println emptyBounds.isEmpty()
```

```
true
```


Determine if a Bounds contains another Bounds

```
Bounds bounds1 = new Bounds(-107.226, 34.597, -92.812, 43.068)
Bounds bounds2 = new Bounds(-104.326, 37.857, -98.349, 40.913)
println bounds1.contains(bounds2)
```

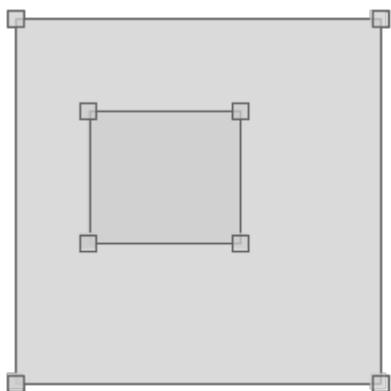

true


```
Bounds bounds3 = new Bounds(-112.412, 36.809, -99.316, 44.777)
println bounds1.contains(bounds3)
```

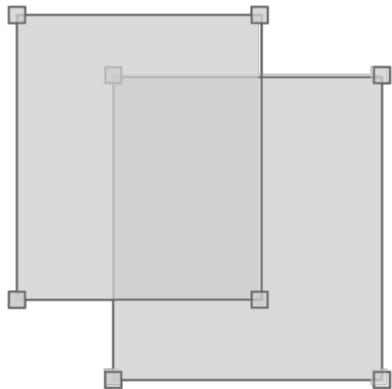

false


Determine if a Bounds contains a Point

```
Bounds bounds = new Bounds(-107.226, 34.597, -92.812, 43.068)
Point point1 = new Point(-95.976, 39.639)
println bounds.contains(point1)
```

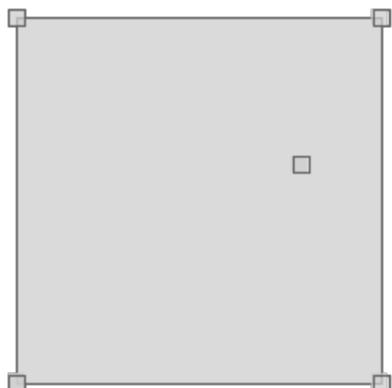

true


```
Point point2 = new Point(-89.384, 38.959)
println bounds.contains(point2)
```

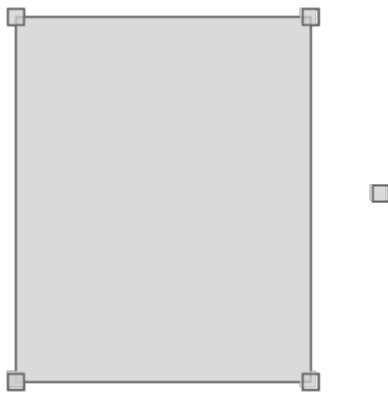

true


Determine if two Bounds intersect

```
Bounds bounds1 = new Bounds(-95.885, 46.765, -95.788, 46.811)
Bounds bounds2 = new Bounds(-95.847, 46.818, -95.810, 46.839)
println bounds1.intersects(bounds2)
```

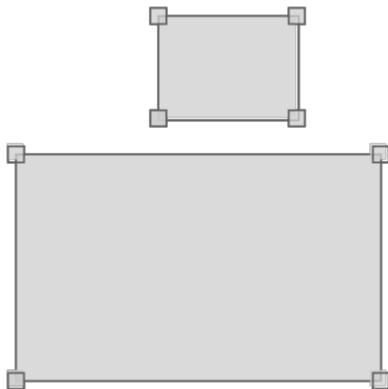

false


```
Bounds bounds3 = new Bounds(-95.904, 46.747, -95.839, 46.792)
println bounds1.intersects(bounds3)
```

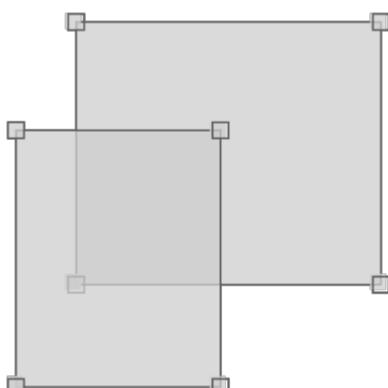

```
true
```


Calculate the intersection between two Bounds

```
Bounds bounds1 = new Bounds(-95.885, 46.765, -95.788, 46.811)
Bounds bounds2 = new Bounds(-95.904, 46.747, -95.839, 46.792)
Bounds bounds3 = bounds1.intersection(bounds2)
```

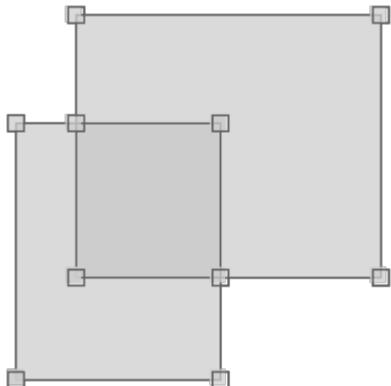


Generate a grid from a Bounds with a given number of columns and rows and the polygon shape. Other shapes include: polygon, point, circle/ellipse, hexagon, hexagon-inv).

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
Geometry geometry = bounds.getGrid(5,4,"polygon")
```

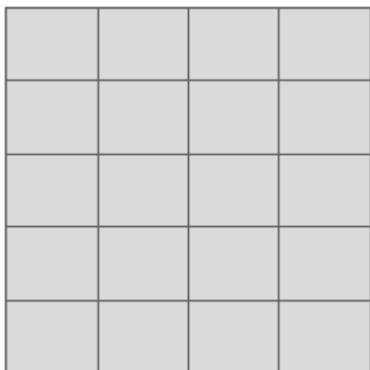


Generate a grid from a Bounds with a given number of columns and rows and a point shape. A Closure that is called with a geometry, column, and row for each grid cell that is created.

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
List geometries = []
Geometry geometry = bounds.generateGrid(10,8,"point") { Geometry g, int col, int row
->
    geometries.add(g)
}
```

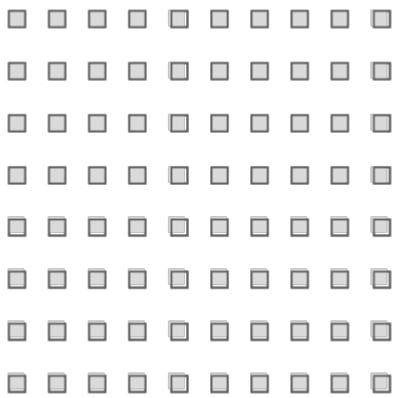


Generate a grid from a Bounds with a given cell width and height and a circle/ellipse shape.

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
Geometry geometry = bounds.getGrid(72.0,72.0,"circle")
```

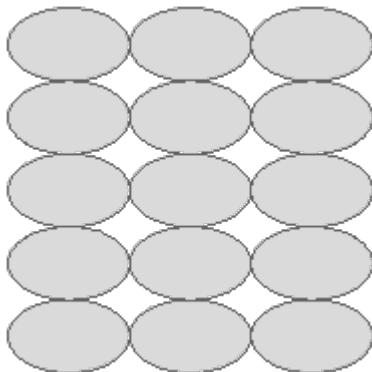


Generate a grid from a Bounds with a given cell width and height and a hexagon shape. A Closure is called with a geometry, column, and row for each grid cell generated.

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
List geometries = []
Geometry geometry = bounds.generateGrid(72.0,72.0,"hexagon") { Geometry g, int col,
int row ->
    geometries.add(g)
}
```

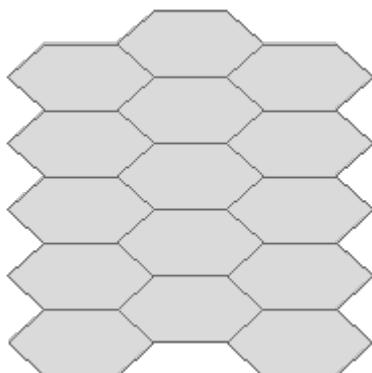


Generate a grid from a Bounds with a given cell width and height and an inverted hexagon shape.

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
Geometry geometry = bounds.getGrid(5,5,"hexagon-inv")
```

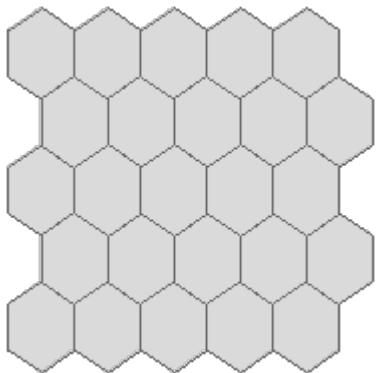


Generate a grid from a Bounds with a given cell width and height and a triangle shape.

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
Geometry geometry = bounds.getGrid(5,5,"triangle")
```

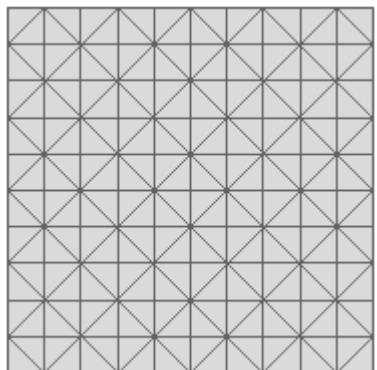


Create a rectangle from a Bounds with a given number of Points and a rotation angle in radians.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createRectangle(20,Math.toRadians(45))
```

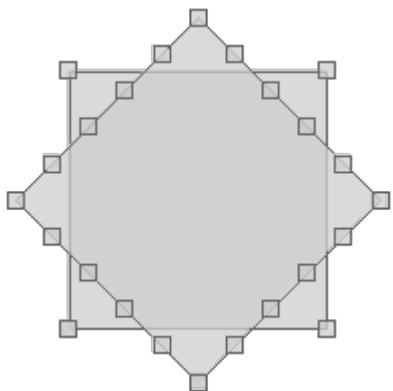


Create an ellipse from a Bounds. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createEllipse()
```

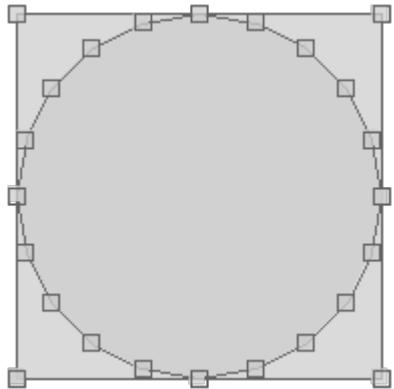


Create a squircle from a Bounds. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createSquircle()
```

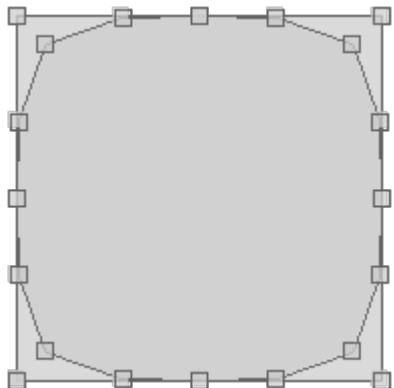


Create a super circle from a Bounds with a given power. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createSuperCircle(1.75)
```

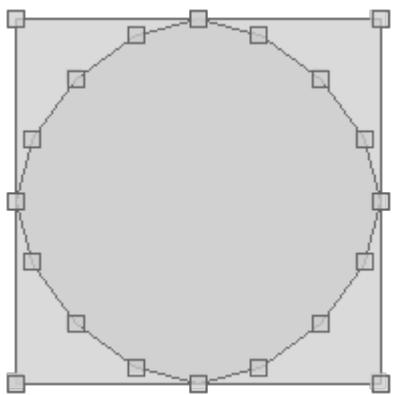


Create an arc from a Bounds with a start angle and angle extent. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
LineString lineString = bounds.createArc(Math.toRadians(45), Math.toRadians(90))
```

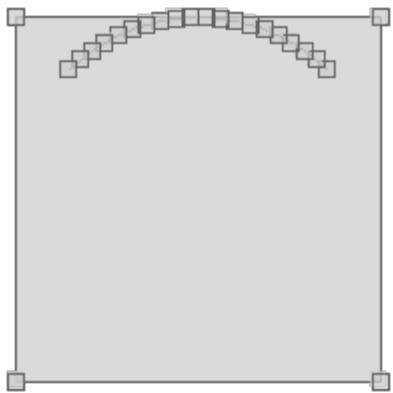


Create an arc polygon from a Bounds with a start angle and angle extent. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createArcPolygon(Math.toRadians(45), Math.toRadians(90))
```

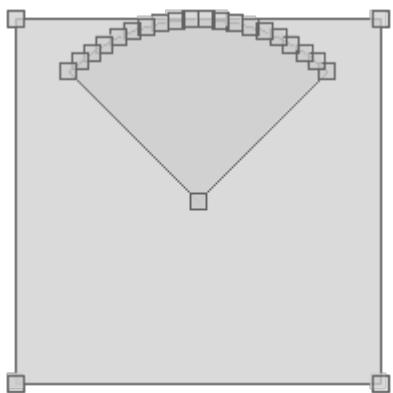


Create a sine star from a Bounds with a number of arms and an arm length ratio. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createSineStar(5, 2.3)
```

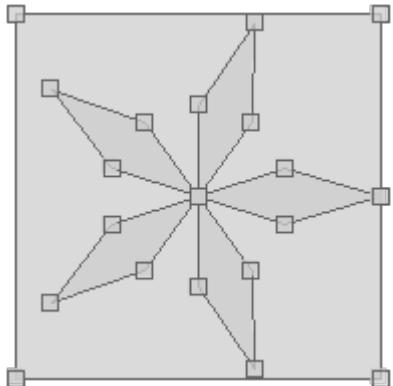

Create a hexagon from a Bounds that is either inverted (false) or not (true).

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createHexagon(false)
```

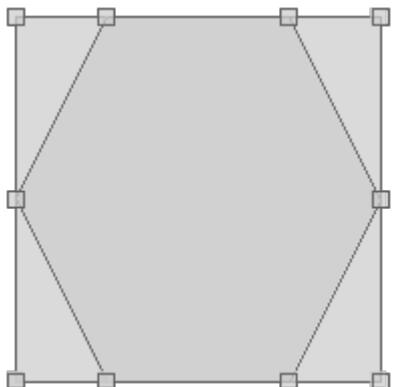

Projection Recipes

The Projection classes are in the [geoscript.proj](#) package.

Creating Projections

Create a Projection from an EPSG Code

```
Projection proj = new Projection("EPSG:4326")
println proj.wkt
```

```
GEOGCS["WGS 84",
  DATUM["World Geodetic System 1984",
    SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG", "7030"]],
    AUTHORITY["EPSG", "6326"]],
  PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG", "8901"]],
  UNIT["degree", 0.017453292519943295],
  AXIS["Geodetic longitude", EAST],
  AXIS["Geodetic latitude", NORTH],
  AUTHORITY["EPSG", "4326"]]
```

Create a Projection from a WKT Projection String

```
Projection proj = new Projection("""GEOGCS["WGS 84",
DATUM["World Geodetic System 1984",
SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG", "7030"]],
AUTHORITY["EPSG", "6326"]],
PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG", "8901"]],
UNIT["degree", 0.017453292519943295],
AXIS["Geodetic longitude", EAST],
AXIS["Geodetic latitude", NORTH],
AUTHORITY["EPSG", "4326"]]""")
```

```
GEOGCS["WGS 84",
  DATUM["World Geodetic System 1984",
    SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG", "7030"]],
    AUTHORITY["EPSG", "6326"]],
  PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG", "8901"]],
  UNIT["degree", 0.017453292519943295],
  AXIS["Geodetic longitude", EAST],
  AXIS["Geodetic latitude", NORTH],
  AUTHORITY["EPSG", "4326"]]
```

Create a Projection from well known name

```
Projection proj = new Projection("Mollweide")
println proj.wkt
```

```
PROJCS["Mollweide",
    GEOGCS["WGS84",
        DATUM["WGS84",
            SPHEROID["WGS84", 6378137.0, 298.257223563]],
        PRIMEM["Greenwich", 0.0],
        UNIT["degree", 0.017453292519943295],
        AXIS["Longitude", EAST],
        AXIS["Latitude", NORTH]],
    PROJECTION["Mollweide"],
    PARAMETER["semi-minor axis", 6378137.0],
    PARAMETER["False easting", 0.0],
    PARAMETER["False northing", 0.0],
    PARAMETER["Longitude of natural origin", 0.0],
    UNIT["m", 1.0],
    AXIS["Easting", EAST],
    AXIS["Northing", NORTH]]
```

Get a List of all supported Projections (this is really slow)

```
List<Projection> projections = Projection.projections()
```

```
EPSG:4326  
EPSG:4269  
EPSG:26918  
EPSG:2263  
EPSG:2927  
...
```

Getting Projection Properties

Get the id

```
Projection proj = new Projection("EPSG:4326")
String id = proj.id
```

```
EPSG:4326
```

Get the srs

```
String srs = proj.srs
```

```
EPSG:4326
```

Get the epsg code

```
int epsg = proj.epsg
```

```
4326
```

Get the WKT

```
String wkt = proj.wkt
```

```
GEOGCS["WGS 84",
    DATUM["World Geodetic System 1984",
        SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG","7030"]],
        AUTHORITY["EPSG","6326"]],
    PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG","8901"]],
    UNIT["degree", 0.017453292519943295],
    AXIS["Geodetic longitude", EAST],
    AXIS["Geodetic latitude", NORTH],
    AUTHORITY["EPSG","4326"]]
```

Get the Bounds in the native Projection

```
Bounds bounds = proj.bounds
```

```
(-180.0,-90.0,180.0,90.0,EPSC:4326)
```

Get the Bounds in the EPSG:4326

```
Bounds geoBounds = proj.geoBounds
```

```
(-180.0,-90.0,180.0,90.0,EPSC:4326)
```

Using Projections

Transform a Geometry from one projection to another using the Projection static method with strings

```
Geometry epsg4326Geom = new Point(-122.440, 47.245)
Geometry epsg2927Geom = Projection.transform(epsg4326Geom, "EPSG:4326", "EPSG:2927")
println epsg2927Geom
```

```
POINT (1158609.2040371664 703068.0661327793)
```

Transform a Geometry from one projection to another using the Projection static method with Projections

```
Projection epsg4326 = new Projection("EPSG:4326")
Projection epsg2927 = new Projection("EPSG:2927")
Geometry epsg4326Geom = new Point(-122.440, 47.245)
Geometry epsg2927Geom = Projection.transform(epsg4326Geom, epsg4326, epsg2927)
println epsg2927Geom
```

```
POINT (1158609.2040371664 703068.0661327793)
```

Transform a Geometry from one projection to another using two Projections

```
Projection fromProj = new Projection("EPSG:4326")
Projection toProj = new Projection("EPSG:2927")
Geometry geom = new Point(-122.440, 47.245)
Geometry projectedGeom = fromProj.transform(geom, toProj)
println projectedGeom
```

```
POINT (1158609.2040371664 703068.0661327793)
```

Transform a Geometry from one projection to another using a Projections and a String

```
Projection fromProj = new Projection("EPSG:4326")
Geometry geom = new Point(-122.440, 47.245)
Geometry projectedGeom = fromProj.transform(geom, "EPSG:2927")
println projectedGeom
```

```
POINT (1158609.2040371664 703068.0661327793)
```

Using Geodetic

Create a Geodetic object with an ellipsoid

```
Geodetic geodetic = new Geodetic("wgs84")
println geodetic
```

```
Geodetic [SPHEROID["WGS 84", 6378137.0, 298.257223563]]
```

Calculate the forward and back azimuth and distance between the given two Points.

```
Geodetic geodetic = new Geodetic("clrk66")
Point bostonPoint = new Point(-71.117, 42.25)
Point portlandPoint = new Point(-123.683, 45.52)
Map results = geodetic.inverse(bostonPoint, portlandPoint)
double forwardAzimuth = results.forwardAzimuth
println forwardAzimuth
```

```
-66.52547810974724
```

```
double backAzimuth = results.backAzimuth
println backAzimuth
```

```
75.65817457195088
```

```
double distance = results.distance
println distance
```

```
4164050.459880065
```

Calculate a new Point and back azimuth given the starting Point, azimuth, and distance.

```
Geodetic geodetic = new Geodetic("clrk66")
Point bostonPoint = new Point(-71.117, 42.25)
Map results = geodetic.forward(bostonPoint, -66.531, 4164192.708)
Point point = results.point
println point
```

```
POINT (-123.6835797667373 45.51642779589723)
```

```
double azimuth = results.backAzimuth
println azimuth
```

```
75.65337425050723
```

Place the given number of points between starting and ending Points

```
Geodetic geodetic = new Geodetic("clrk66")
Point bostonPoint = new Point(-71.117, 42.25)
Point portlandPoint = new Point(-123.683, 45.52)
List<Point> points = geodetic.placePoints(bostonPoint, portlandPoint, 10)
points.each { Point point ->
    println point.wkt
}
```

```
POINT (-75.41357382496236 43.52791689304304)
POINT (-79.8828640042499 44.63747566950249)
POINT (-84.51118758826816 45.565540142641005)
POINT (-89.27793446221685 46.300124344169255)
POINT (-94.15564606698499 46.83102721803566)
POINT (-99.11079892605703 47.15045006457598)
POINT (-104.10532353179985 47.25351783423774)
POINT (-109.09873812691617 47.13862709798196)
POINT (-114.05062990603696 46.80756425557422)
POINT (-118.92312608779855 46.26537395700513)
```

Using Decimal Degrees

Create a new `DecimalDegrees` from a longitude and latitude

```
DecimalDegrees decimalDegrees = new DecimalDegrees(-122.525619, 47.212023)
println decimalDegrees
```

```
-122° 31' 32.2284" W, 47° 12' 43.2828" N
```

Create a new `DecimalDegrees` from a Point

```
DecimalDegrees decimalDegrees = new DecimalDegrees(new Point(-122.525619,47.212023))
println decimalDegrees
```

```
POINT (-122.52561944444444 47.21202222222222)
```

Create a new `DecimalDegrees` from a Longitude and Latitude string

```
DecimalDegrees decimalDegrees = new DecimalDegrees("-122.525619, 47.212023")
println decimalDegrees
```

```
-122° 31' 32.2284" W, 47° 12' 43.2828" N
```

Create a new `DecimalDegrees` from two strings with `glyphs`

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122\u00B0 31' 32.23\" W",  
"47\u00B0 12' 43.28\" N")  
println decimalDegrees
```

```
-122° 31' 32.2300" W, 47° 12' 43.2800" N
```

Create a new `DecimalDegrees` from two strings

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m  
43.28s N")  
println decimalDegrees
```

```
-122° 31' 32.2300" W, 47° 12' 43.2800" N
```

Create a new `DecimalDegrees` from a single Degrees Minutes Seconds formatted string

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W, 47d 12m 43.28s  
N")  
println decimalDegrees
```

```
-122° 31' 32.2300" W, 47° 12' 43.2800" N
```

Create a new `DecimalDegrees` from a single Decimal Degree Minutes formatted string with `glyphs`

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122\u00B0 31.5372' W, 47\u00B0 12.7213' N")  
println decimalDegrees
```

```
-122° 31' 32.2320" W, 47° 12' 43.2780" N
```

Create a new `DecimalDegrees` from a single Decimal Degree Minutes formatted string

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31.5372m W, 47d 12.7213m N")  
println decimalDegrees
```

```
-122° 31' 32.2320" W, 47° 12' 43.2780" N
```

Get degrees minutes seconds from a DecimalDegrees object

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m  
43.28s N")  
Map dms = decimalDegrees.dms  
println "Degrees: ${dms.longitude.degrees}"  
println "Minutes: ${dms.longitude.minutes}"  
println "Seconds: ${dms.longitude.seconds}"
```

```
Degrees: -122  
Minutes: 31  
Seconds: 32.22999999998388
```

```
println "Degrees: ${dms.latitude.degrees}"  
println "Minutes: ${dms.latitude.minutes}"  
println "Seconds: ${dms.latitude.seconds}"
```

```
Degrees: 47  
Minutes: 12  
Seconds: 43.28000000006396
```

Convert a DecimalDegrees object to a DMS String with glyphs

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m  
43.28s N")  
println decimalDegrees.toDms(true)
```

```
-122° 31' 32.2300" W, 47° 12' 43.2800" N
```

Convert a DecimalDegrees object to a DMS String without glyphs

```
println decimalDegrees.toDms(false)
```

```
-122d 31m 32.2300s W, 47d 12m 43.2800s N
```

Get degrees minutes from a DecimalDegrees object

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m  
43.28s N")  
Map dms = decimalDegrees.ddm  
println "Degrees: ${dms.longitude.degrees}"  
println "Minutes: ${dms.longitude.minutes}"
```

```
Degrees: -122  
Minutes: 31.537166666666398
```

```
println "Degrees: ${dms.latitude.degrees}"  
println "Minutes: ${dms.latitude.minutes}"
```

```
Degrees: 47  
Minutes: 12.7213333333344
```

Convert a `DecimalDegrees` object to a DDM String with glyphs

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m  
43.28s N")  
println decimalDegrees.toDdm(true)
```

```
-122° 31.5372' W, 47° 12.7213' N
```

Convert a `DecimalDegrees` object to a DDM String without glyphs

```
println decimalDegrees.toDdm(false)
```

```
-122d 31.5372m W, 47d 12.7213m N
```

Get a `Point` from a `DecimalDegrees` object

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m  
43.28s N")  
Point point = decimalDegrees.point
```

```
POINT (-122.52561944444444 47.212022222222222224)
```

Spatial Index Recipes

The Index classes are in the `geoscript.index` package.

Using STRTree

Create a STRtree spatial index

```
STRtree index = new STRtree()
```

Insert Geometries and their Bounds

```
index.insert(new Bounds(0,0,10,10), new Point(5,5))
index.insert(new Bounds(2,2,6,6), new Point(4,4))
index.insert(new Bounds(20,20,60,60), new Point(30,30))
index.insert(new Bounds(22,22,44,44), new Point(32,32))
```

Get the size of the index

```
int size = index.size
println size
```

```
4
```

Query the index

```
List results = index.query(new Bounds(1,1,5,5))
results.each { Geometry geometry ->
    println geometry
}
```

```
POINT (4 4)
POINT (5 5)
```

Using HPRtree

Create a HPRtree spatial index

```
HPRtree index = new HPRtree()
```

Insert Geometries and their Bounds

```
index.insert(new Bounds(0,0,10,10), new Point(5,5))
index.insert(new Bounds(2,2,6,6), new Point(4,4))
index.insert(new Bounds(20,20,60,60), new Point(30,30))
index.insert(new Bounds(22,22,44,44), new Point(32,32))
```

Get the size of the index

```
int size = index.size  
println size
```

4

Query the index

```
List results = index.query(new Bounds(1,1,5,5))  
results.each { Geometry geometry ->  
    println geometry  
}
```

POINT (5 5)
POINT (4 4)

Using Quadtree

Create a Quadtree spatial index

```
Quadtree index = new Quadtree()
```

Insert Geometries and their Bounds

```
index.insert(new Bounds(0,0,10,10), new Point(5,5))  
index.insert(new Bounds(2,2,6,6), new Point(4,4))  
index.insert(new Bounds(20,20,60,60), new Point(30,30))  
index.insert(new Bounds(22,22,44,44), new Point(32,32))
```

Get the size of the index

```
int size = index.size  
println size
```

4

Query the index with a Bounds

```
List results = index.query(new Bounds(1,1,5,5))  
results.each { Geometry geometry ->  
    println geometry  
}
```

```
POINT (30 30)
POINT (32 32)
POINT (5 5)
POINT (4 4)
```

Query the entire index

```
List allResults = index.queryAll()
allResults.each { Geometry geometry ->
    println geometry
}
```

```
POINT (30 30)
POINT (32 32)
POINT (5 5)
POINT (4 4)
```

Remove an item from the index

```
Geometry itemToRemove = allResults[0]
boolean removed = index.remove(itemToRemove.bounds, itemToRemove)
println "Removed? ${removed}"
println "Size = ${index.size}"
```

```
Removed = true
Size = 3
```

Using GeoHash

Encode a Point as a String

```
GeoHash geohash = new GeoHash()
Point point = new Point(112.5584, 37.8324)
String hash = geohash.encode(point)
println hash
```

```
ww8p1r4t8
```

Decode a Point from a String

```
GeoHash geohash = new GeoHash()  
Point point = geohash.decode("ww8p1r4t8")  
println point
```

```
POINT (112.55838632583618 37.83238649368286)
```

Encode a Point as a Long

```
GeoHash geohash = new GeoHash()  
Point point = new Point(112.5584, 37.8324)  
long hash = geohash.encodeLong(point)  
println long
```

```
4064984913515641
```

Decode a Point from a Long

```
GeoHash geohash = new GeoHash()  
Point point = geohash.decode(4064984913515641)  
println point
```

```
POINT (112.55839973688126 37.83240124583244)
```

Decode a Bounds from a String

```
GeoHash geohash = new GeoHash()  
Bounds bounds = geohash.decodeBounds("ww8p1r4t8")  
println bounds
```

```
(112.55836486816406,37.83236503601074,112.5584077835083,37.83240795135498)
```

Decode a Bounds from a Long

```
GeoHash geohash = new GeoHash()  
Bounds bounds = geohash.decodeBounds(4064984913515641)  
println bounds
```

```
(112.55836486816406,37.83236503601074,112.5584077835083,37.83240795135498)
```

Find neighboring geohash strings

```
GeoHash geohash = new GeoHash()
String hash = "dqcjq"
String north      = geohash.neighbor(hash, GeoHash.Direction.NORTH)
String northwest = geohash.neighbor(hash, GeoHash.Direction.NORTHWEST)
String west       = geohash.neighbor(hash, GeoHash.Direction.WEST)
String southwest = geohash.neighbor(hash, GeoHash.Direction.SOUTHWEST)
String south      = geohash.neighbor(hash, GeoHash.Direction.SOUTH)
String southeast = geohash.neighbor(hash, GeoHash.Direction.SOUTHEAST)
String east       = geohash.neighbor(hash, GeoHash.Direction.EAST)
String northeast = geohash.neighbor(hash, GeoHash.Direction.NORTHEAST)
String str = """
    | ${northwest} ${north} ${northeast}
    | ${west} ${hash} ${east}
    | ${southwest} ${south} ${southeast}
"""
"".stripMargin()
println str
```

```
dqcjt dqcjw dqcjx
dqcjm dqcjq dqcjr
dqcjj dqcjn dqcjp
```

Find neighboring geohash longs

```
GeoHash geohash = new GeoHash()
long hash = 1702789509
long north      = geohash.neighbor(hash, GeoHash.Direction.NORTH)
long northwest = geohash.neighbor(hash, GeoHash.Direction.NORTHWEST)
long west       = geohash.neighbor(hash, GeoHash.Direction.WEST)
long southwest = geohash.neighbor(hash, GeoHash.Direction.SOUTHWEST)
long south      = geohash.neighbor(hash, GeoHash.Direction.SOUTH)
long southeast = geohash.neighbor(hash, GeoHash.Direction.SOUTHEAST)
long east       = geohash.neighbor(hash, GeoHash.Direction.EAST)
long northeast = geohash.neighbor(hash, GeoHash.Direction.NORTHEAST)
String str = """
    | ${northwest} ${north} ${northeast}
    | ${west} ${hash} ${east}
    | ${southwest} ${south} ${southeast}
"""
"".stripMargin()
println str
```

```
1702789434 1702789520 1702789522
1702789423 1702789509 1702789511
1702789422 1702789508 1702789510
```

Find all neighboring geohash strings

```
GeoHash geohash = new GeoHash()
String hash = "dqcjq"
Map neighbors = geohash.neighbors(hash)
String north      = neighbors[GeoHash.Direction.NORTH]
String northwest = neighbors[GeoHash.Direction.NORTHWEST]
String west       = neighbors[GeoHash.Direction.WEST]
String southwest = neighbors[GeoHash.Direction.SOUTHWEST]
String south      = neighbors[GeoHash.Direction.SOUTH]
String southeast = neighbors[GeoHash.Direction.SOUTHEAST]
String east       = neighbors[GeoHash.Direction.EAST]
String northeast = neighbors[GeoHash.Direction.NORTHEAST]
String str = """
    | ${northwest} ${north} ${northeast}
    | ${west} ${hash} ${east}
    | ${southwest} ${south} ${southeast}
"""
"".stripMargin()
println str
```

```
dqcjt dqcjw dqcjx
dqcjm dqcjq dqcjr
dqcjj dqcjn dqcjp
```

Find all neighboring geohash longs

```
GeoHash geohash = new GeoHash()
long hash = 1702789509
Map neighbors = geohash.neighbors(hash)
long north      = neighbors[GeoHash.Direction.NORTH]
long northwest = neighbors[GeoHash.Direction.NORTHWEST]
long west       = neighbors[GeoHash.Direction.WEST]
long southwest = neighbors[GeoHash.Direction.SOUTHWEST]
long south      = neighbors[GeoHash.Direction.SOUTH]
long southeast = neighbors[GeoHash.Direction.SOUTHEAST]
long east       = neighbors[GeoHash.Direction.EAST]
long northeast = neighbors[GeoHash.Direction.NORTHEAST]
String str = """
    | ${northwest} ${north} ${northeast}
    | ${west} ${hash} ${east}
    | ${southwest} ${south} ${southeast}
"""
"".stripMargin()
println str
```

```
1702789434 1702789520 1702789522
1702789423 1702789509 1702789511
1702789422 1702789508 1702789510
```

Find all geohashes as strings within a Bounds

```
GeoHash geohash = new GeoHash()
List<String> bboxes = geohash.bboxes(new Bounds(120, 30, 120.0001, 30.0001), 8)
bboxes.each { String hash ->
    println hash
}
```

```
wtm6dtm6
wtm6dtm7
```

Find all geohashes as longs within a Bounds

```
GeoHash geohash = new GeoHash()
List<Long> bboxes = geohash.bboxesLong(new Bounds(120, 30, 120.0001, 30.0001), 40)
bboxes.each { long hash ->
    println hash
}
```

```
989560464998
989560464999
```


Viewer Recipes

The Viewer classes are in the [geoscript.viewer](#) package.

Drawing geometries


Draw a geometry in a simple GUI

```
Polygon polygon = new Polygon([
    [-101.35986328125, 47.754097979680026],
    [-101.5576171875, 46.93526088057719],
    [-100.12939453125, 46.51351558059737],
    [-99.77783203125, 47.44294999517949],
    [-100.45898437499999, 47.88688085106901],
    [-101.35986328125, 47.754097979680026]
])
Viewer.draw(polygon)
```

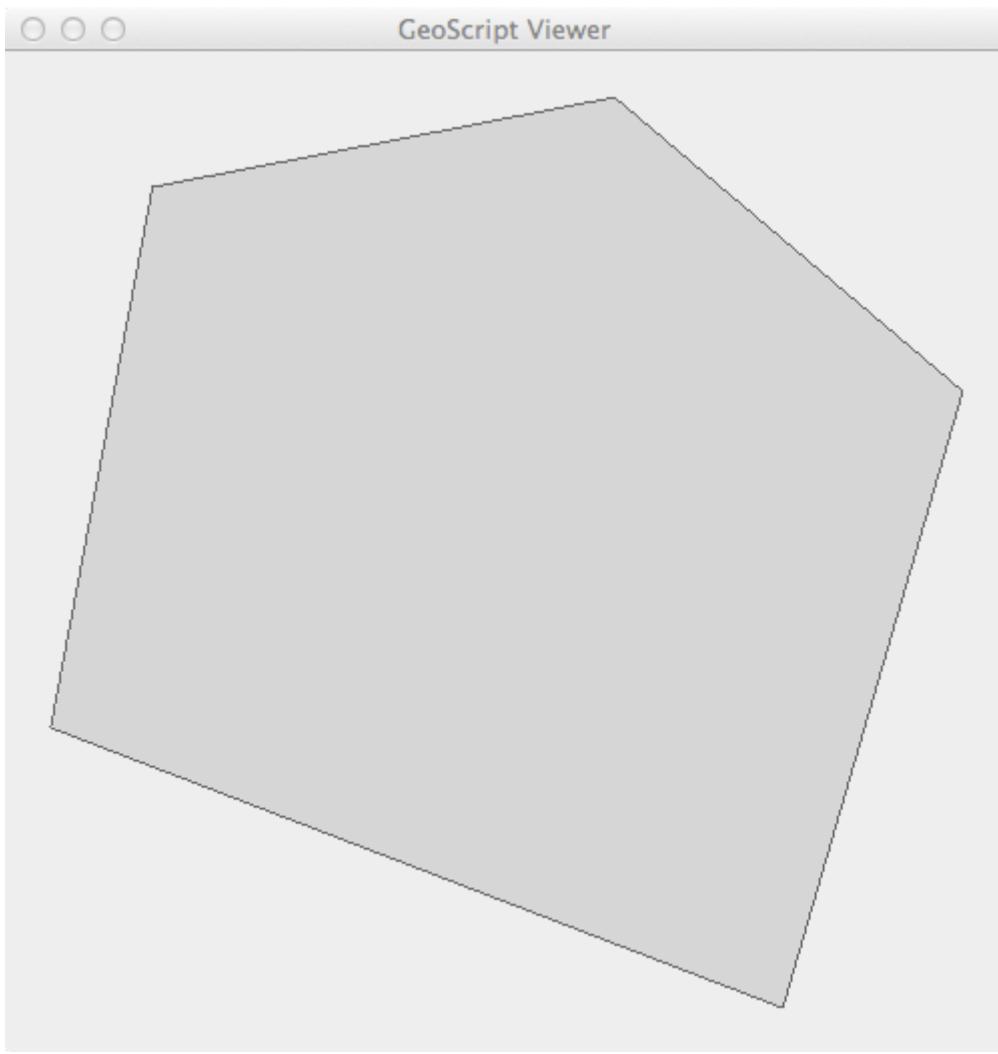


Draw a geometry to an image

```
Polygon polygon = new Polygon([[  
    [-101.35986328125, 47.754097979680026],  
    [-101.5576171875, 46.93526088057719],  
    [-100.12939453125, 46.51351558059737],  
    [-99.77783203125, 47.44294999517949],  
    [-100.45898437499999, 47.88688085106901],  
    [-101.35986328125, 47.754097979680026]  
])  
BufferedImage image = Viewer.drawToImage(polygon)
```

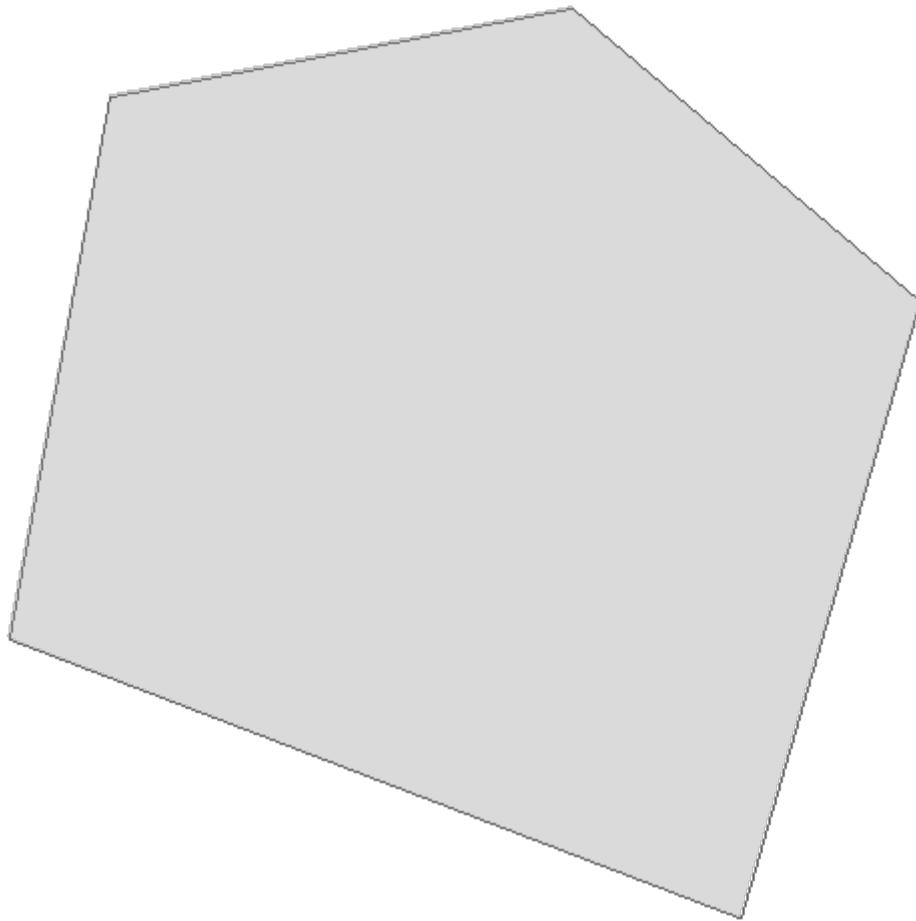


Draw a geometry to an image with options

```
Polygon polygon = new Polygon([[  
    [-101.35986328125, 47.754097979680026],  
    [-101.5576171875, 46.93526088057719],  
    [-100.12939453125, 46.51351558059737],  
    [-99.77783203125, 47.44294999517949],  
    [-100.4589843749999, 47.88688085106901],  
    [-101.35986328125, 47.754097979680026]  
]])  
BufferedImage image = Viewer.drawToImage(  
    polygon,  
    size: [200,200],  
    drawCoords: true,  
    fillCoords: true,  
    fillPolys: true  
)
```

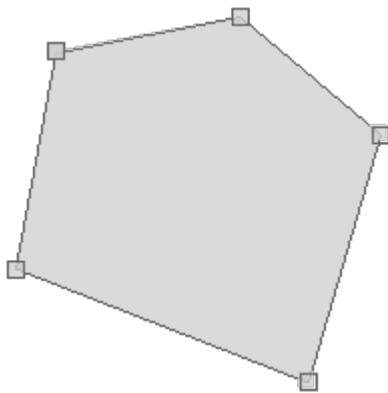


Draw a List of geometries to an image

```
Point point = new Point(-123.11, 47.23)
Geometry buffer = point.buffer(4)
Geometry bounds = buffer.bounds.geometry
BufferedImage image = Viewer.drawToImage(
    [bounds, buffer, point],
    size: [200,200],
    drawCoords: true,
    fillCoords: true,
    fillPolys: true
)
```

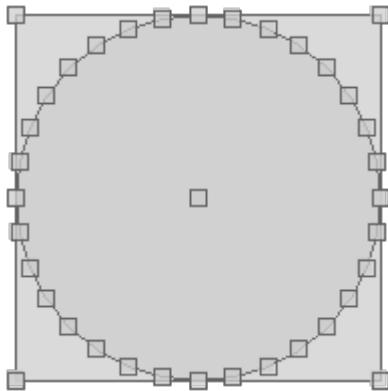

Draw a List of Geometries to a File

```
Point point = new Point(-123.11, 47.23)
Geometry buffer = point.buffer(4)
File file = new File("geometry.png")
Viewer.drawToFile([buffer, point], file, size: [200,200])
```

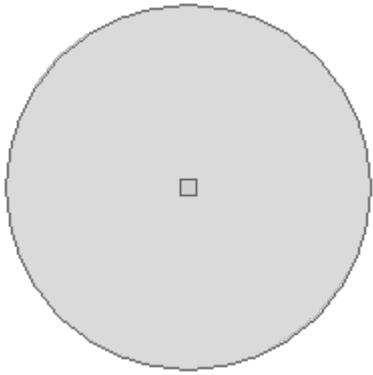

Draw a Geometry to a Base64 Encoded String


```
Polygon polygon = new Polygon([[  
    [-101.35986328125, 47.754097979680026],  
    [-101.5576171875, 46.93526088057719],  
    [-100.12939453125, 46.51351558059737],  
    [-99.77783203125, 47.44294999517949],  
    [-100.45898437499999, 47.88688085106901],  
    [-101.35986328125, 47.754097979680026]  
])  
String base64EncodedString = Viewer.drawToBase64EncodedString(polygon)  
println base64EncodedString
```

```
image/png;base64,iVBORw0KGgoAAAANSUhEUgAAAfQAAAH0CAYAAADL1t+KAAAR/E1EQVR4Xu3bC47kxrVFU  
c1VA30z0JT8ELKvXXWU9UkyfiTXBhZg2Smp08jk...
```

Plotting geometries


Plot a geometry in a simple GUI

```
Polygon polygon = new Polygon([[  
    [-101.35986328125, 47.754097979680026],  
    [-101.5576171875, 46.93526088057719],  
    [-100.12939453125, 46.51351558059737],  
    [-99.77783203125, 47.44294999517949],  
    [-100.45898437499999, 47.88688085106901],  
    [-101.35986328125, 47.754097979680026]  
])  
Viewer.plot(polygon)
```

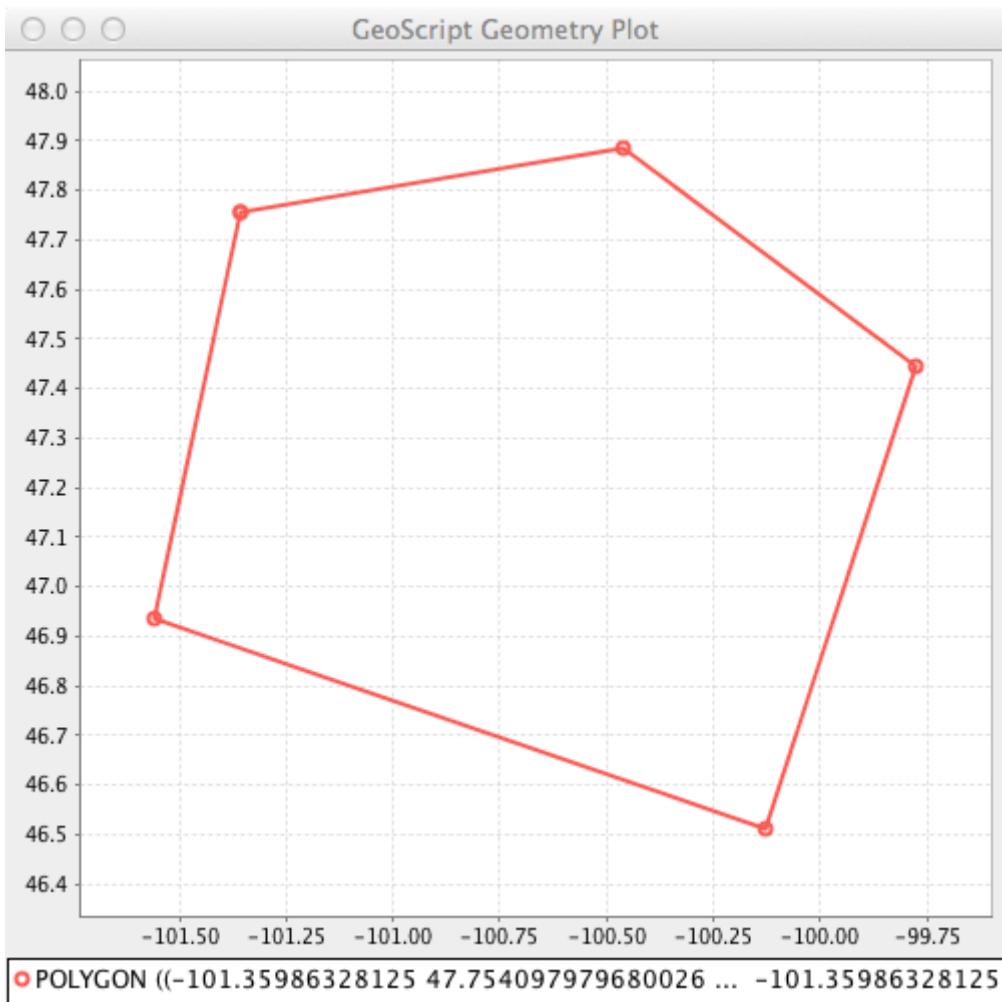


Plot a Geometry to an image

```
Polygon polygon = new Polygon([
    [-101.35986328125, 47.754097979680026],
    [-101.5576171875, 46.93526088057719],
    [-100.12939453125, 46.51351558059737],
    [-99.77783203125, 47.44294999517949],
    [-100.45898437499999, 47.88688085106901],
    [-101.35986328125, 47.754097979680026]
])
BufferedImage image = Viewer.plotToImage(polygon)
```

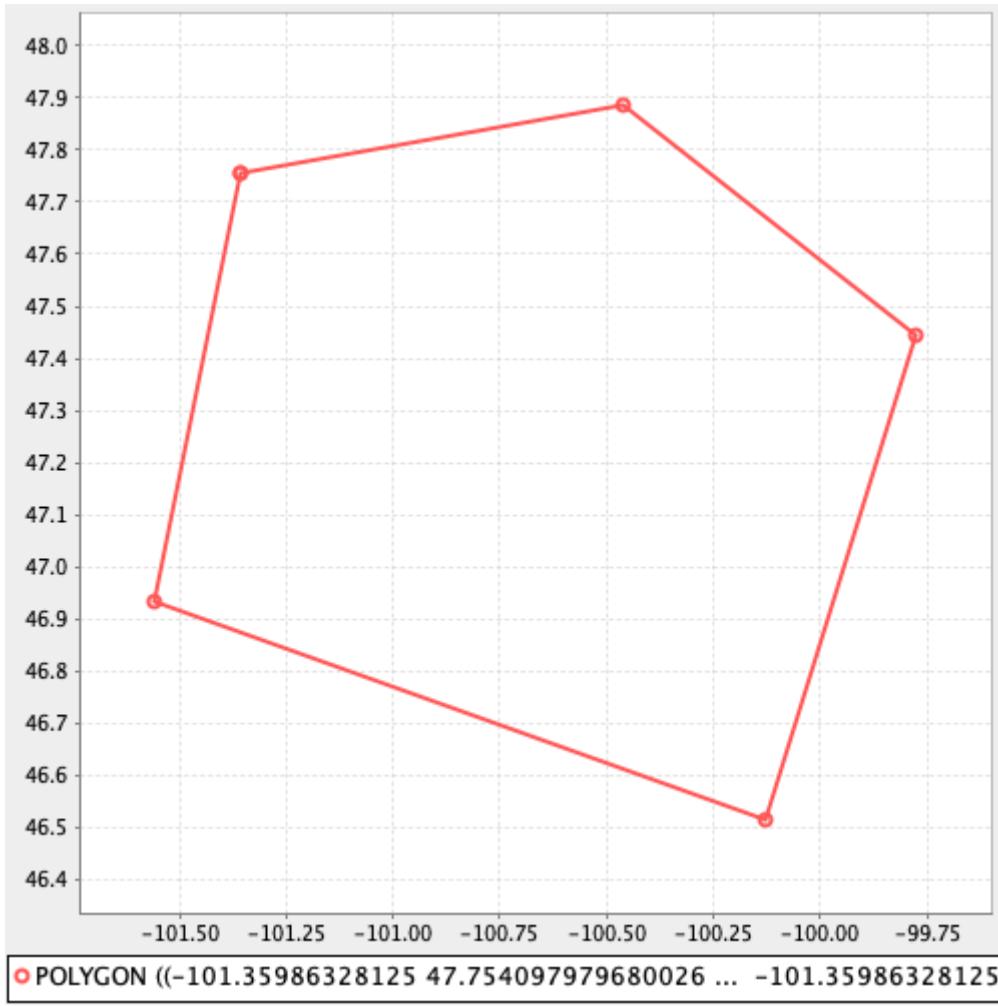


Plot a List of Geometries to an image

```
Point point = new Point(-123.11, 47.23)
Geometry buffer = point.buffer(4)
Geometry bounds = buffer.bounds.geometry
BufferedImage image = Viewer.plotToImage(
    [bounds, buffer, point],
    size: [300,300],
    drawCoords: true,
    fillCoords: true,
    fillPolys: true
)
```

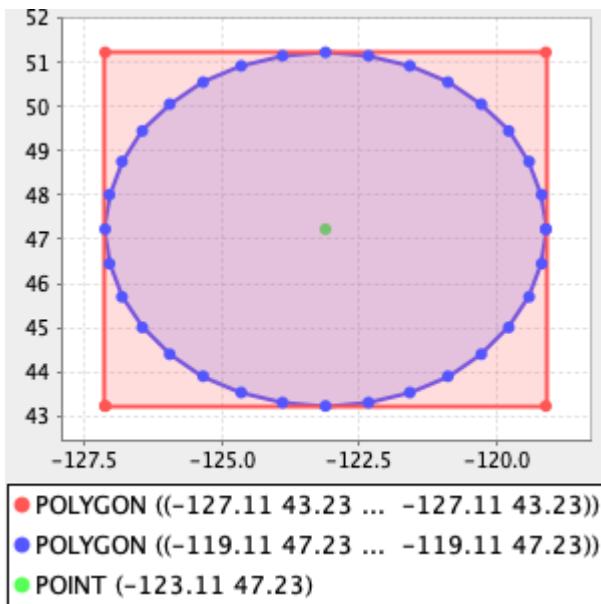

Plot a Geometry to a File

```
Point point = new Point(-123.11, 47.23)
Geometry buffer = point.buffer(4)
File file = new File("geometry.png")
Viewer.plotToFile([buffer, point], file, size: [300,300])
```

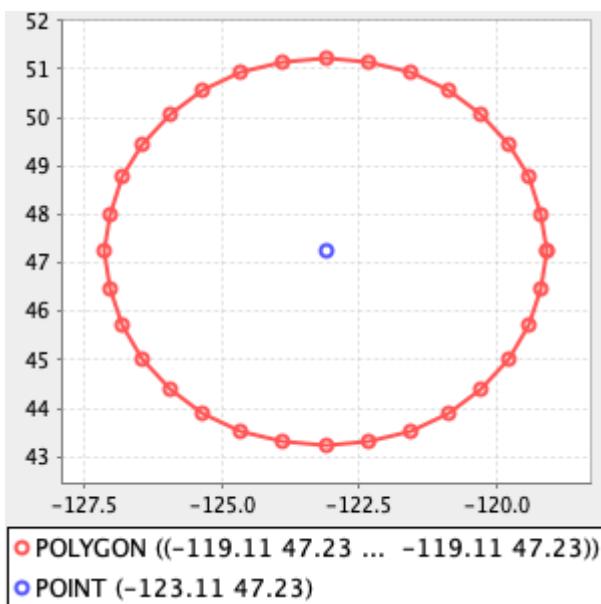


Plot Recipes

The Plot classes are in the [geoscript.plot](#) package.

Processing Charts


Show a chart in a GUI

```
List data = [  
    [1,10],[45,12],[23,3],[5,20]  
]  
Chart chart = Bar.xy(data)
```

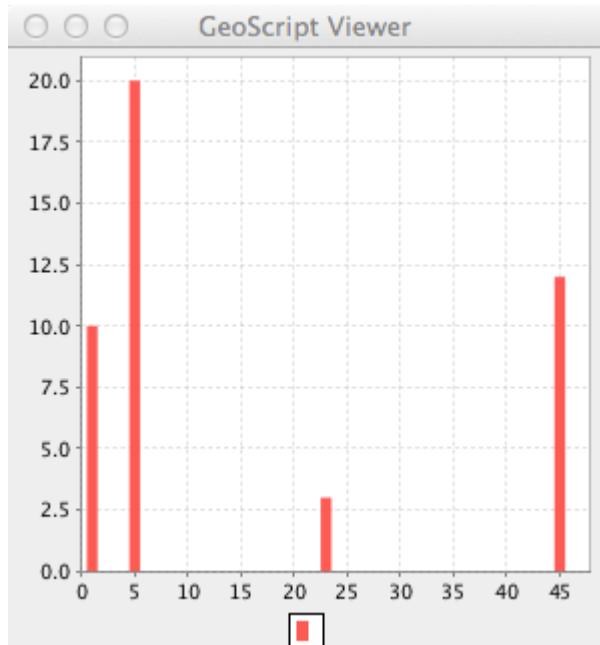


Get an image from a chart

```
Map data = [  
    "A":20,"B":45,"C":2,"D":14  
]  
Chart chart = Pie.pie(data)  
BufferedImage image = chart.image
```

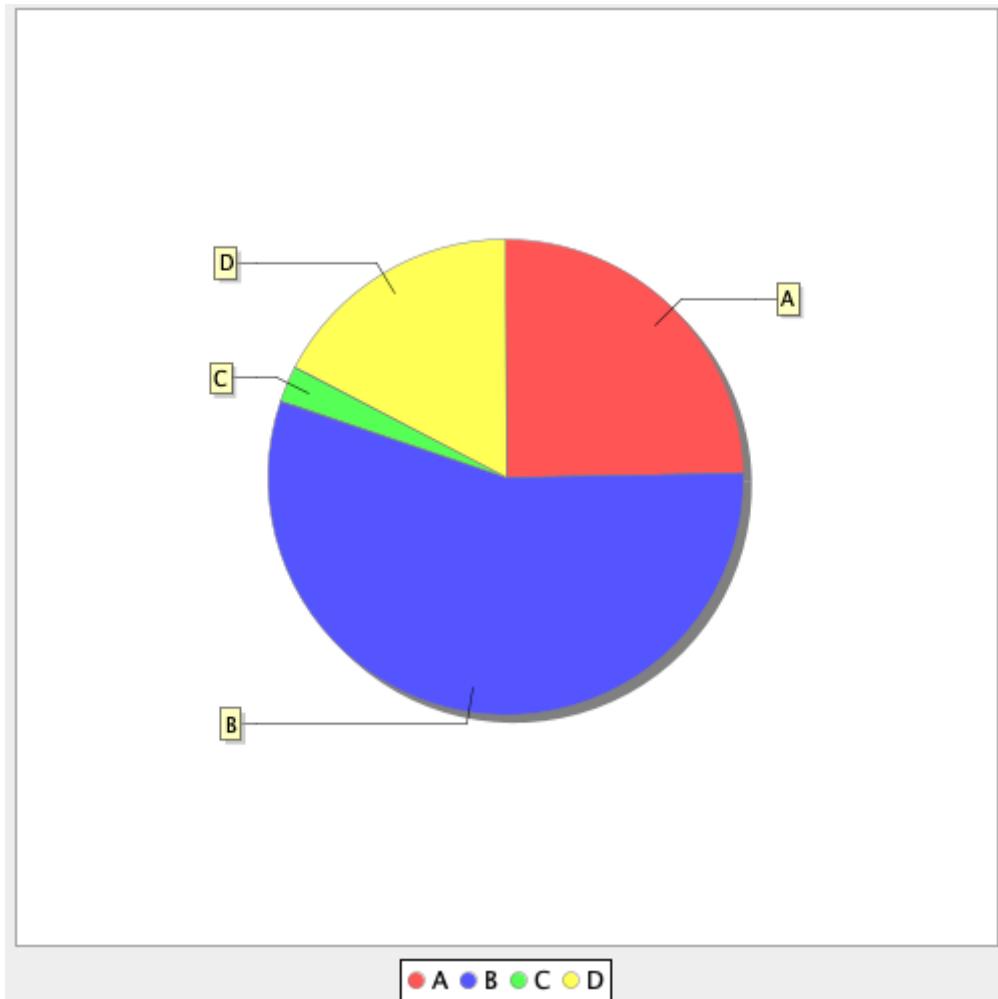


Save a chart to a file

```
Map data = [
    "A": [1, 10, 20],
    "B": [45, 39, 10],
    "C": [40, 30, 20],
    "D": [14, 25, 19]
]
Chart chart = Box.box(data)
File file = new File("chart.png")
chart.save(file)
```

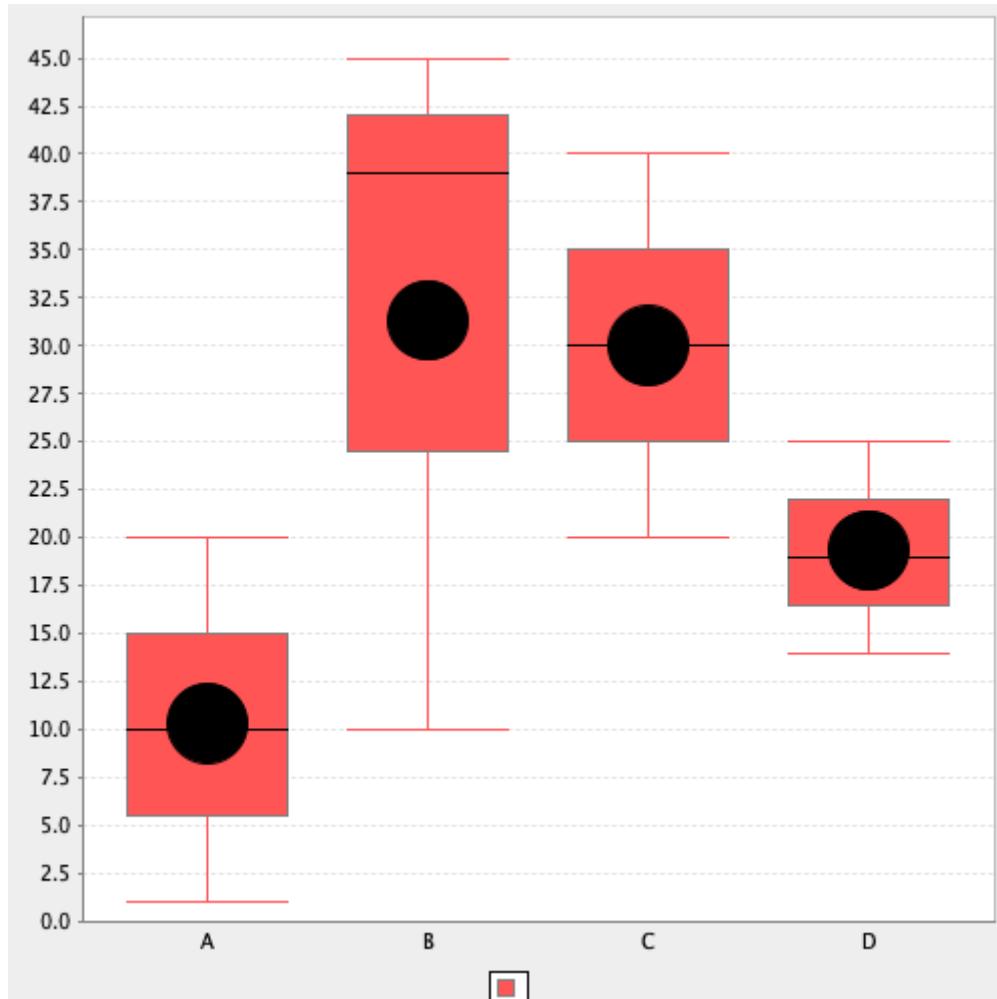

Overlay multiple charts


```
List data = [  
    [1,10],[45,12],[23,3],[5,20]  
]  
Chart chart1 = Bar.xy(data)  
Chart chart2 = Curve.curve(data)  
Chart chart3 = Regression.linear(data)  
chart1.overlay([chart2,chart3])
```

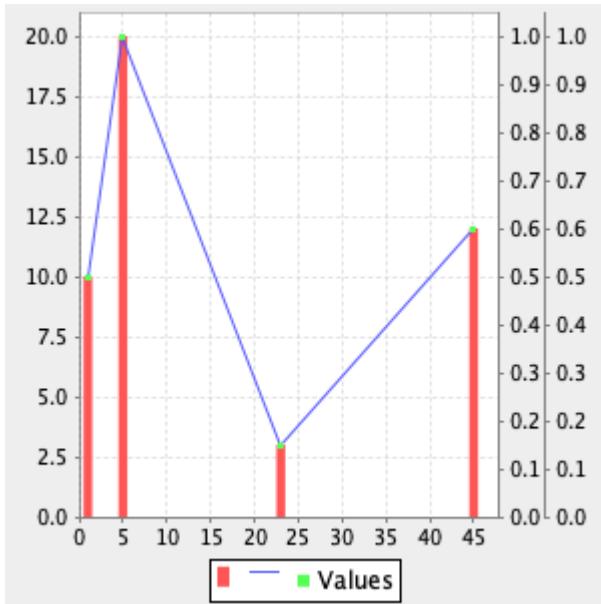

Creating Bar Charts


Create a basic bar chart

```
List data = [
    [1,10],[45,12],[23,3],[5,20]
]
Chart chart = Bar.xy(data)
```

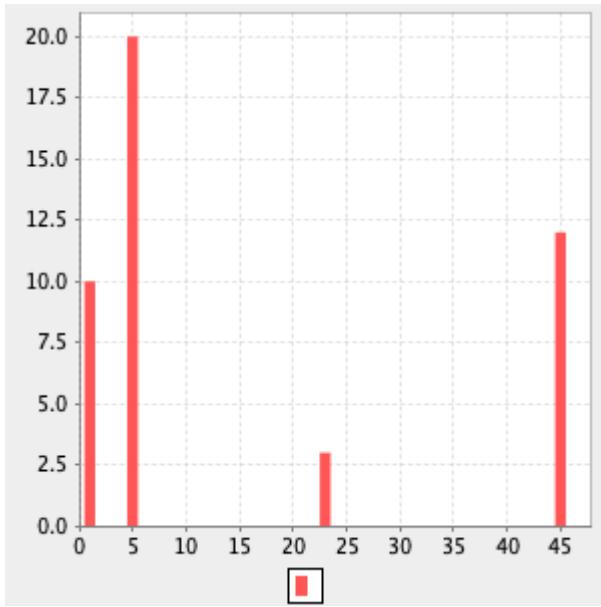


Create a bar chart with categories

```
Map data = [
    "A":20, "B":45, "C":2, "D":14
]
Chart chart = Bar.category(data)
```

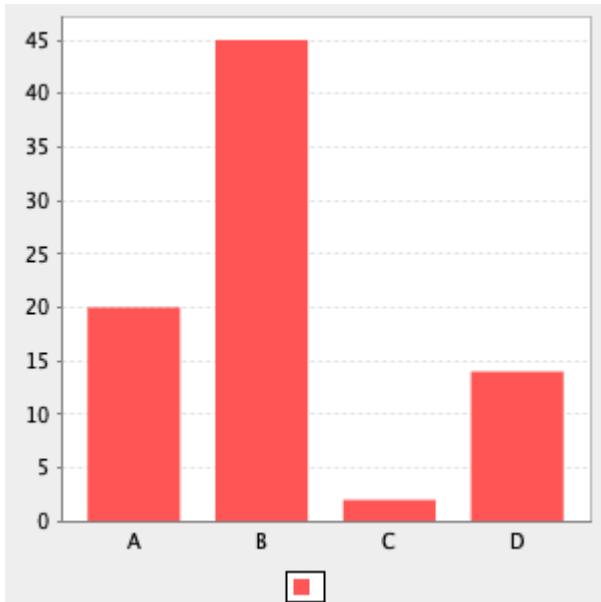


Create a stacked bar chart with two series of data

```
Map data = [
    "A": ["B":50, "C":25, "D":25],
    "F": ["G":75, "H":10, "I":15]
]
Chart chart = Bar.category(data, stacked: true)
```

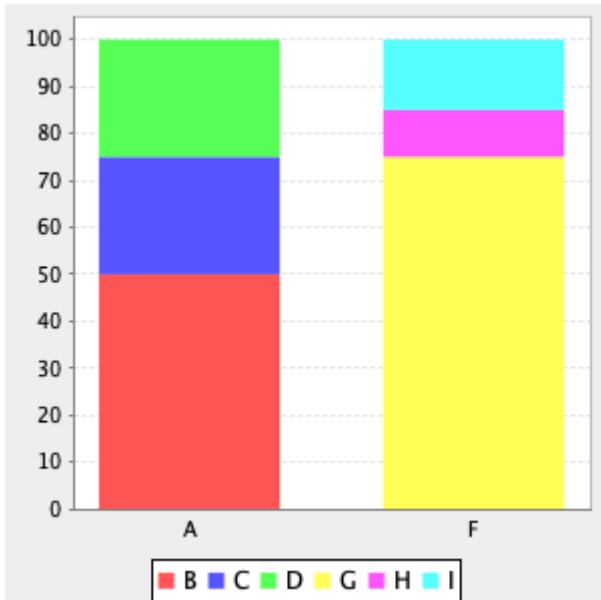

Create a 3D bar chart with categories


```
Map data = [
    "A":20, "B":45, "C":2, "D":14
]
Chart chart = Bar.category(data, trid: true)
```

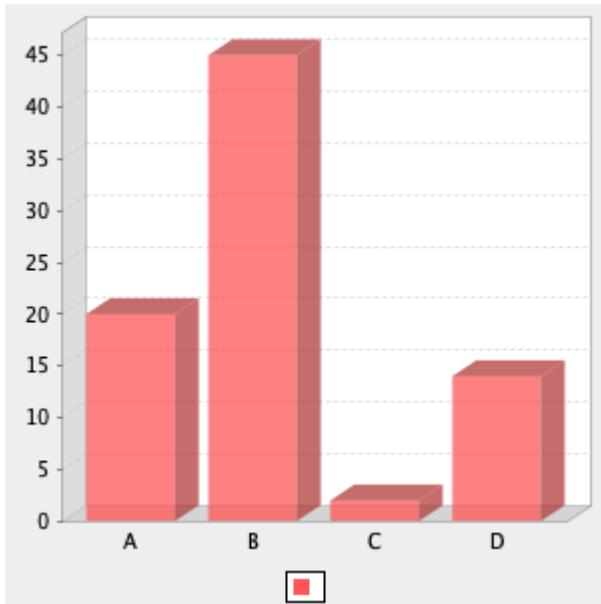

Creating Pie Charts


Create a pie chart

```
Map data = [
    "A":20, "B":45, "C":2, "D":14
]
Chart chart = Pie.pie(data)
```

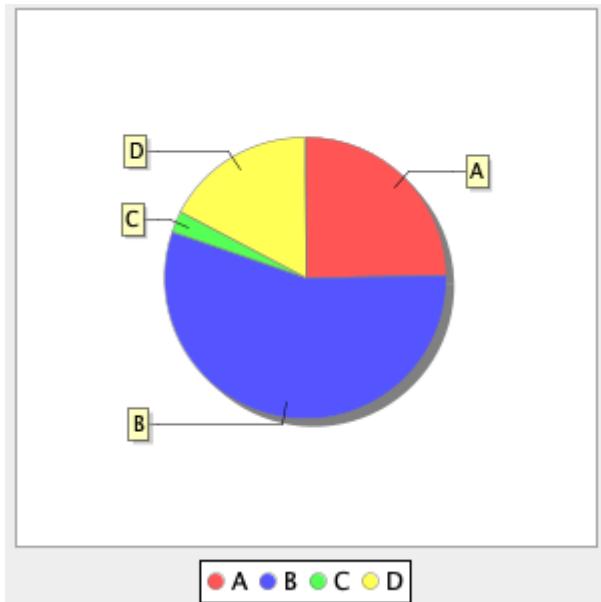

Create a 3D pie chart


```
Map data = [
    "A":20, "B":45, "C":2, "D":14
]
Chart chart = Pie.pie(data, trid: true)
```

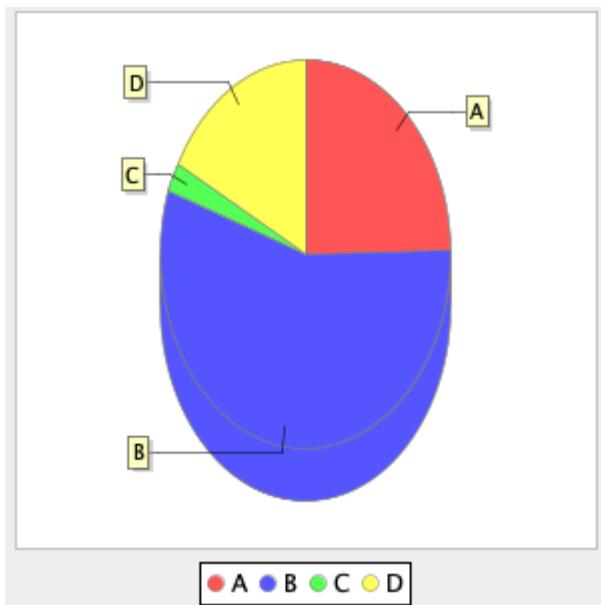

Creating Box Charts

Create a box chart


```
Map data = [
    "A": [1, 10, 20],
    "B": [45, 39, 10],
    "C": [40, 30, 20],
    "D": [14, 25, 19]
]
Chart chart = Box.box(data)
```

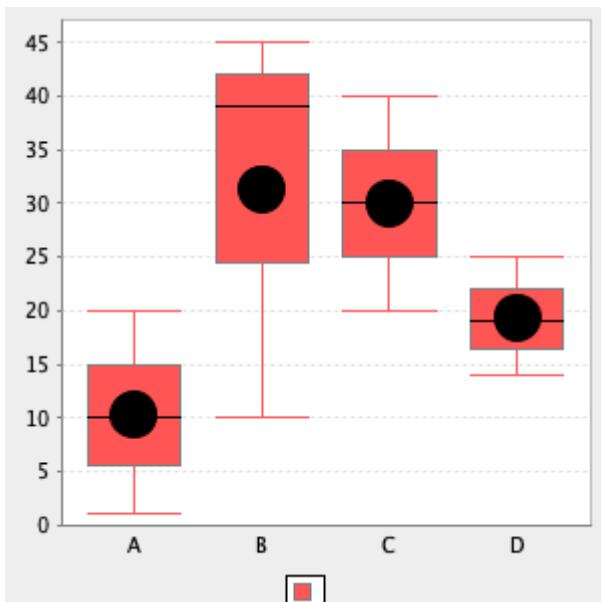

Creating Curve Charts


Create a curve chart

```
List data = [  
    [1,10],[45,12],[23,3],[5,20]  
]  
Chart chart = Curve.curve(data)
```

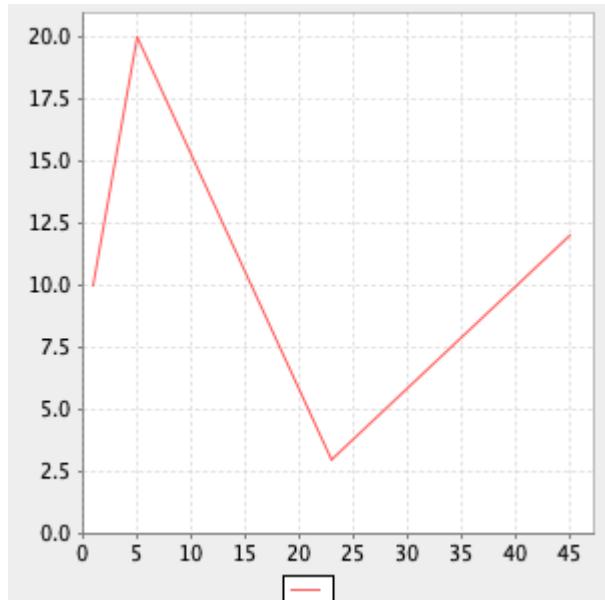


Create a smooth curve chart

```
List data = [  
    [1,10],[45,12],[23,3],[5,20]  
]  
Chart chart = Curve.curve(data, smooth: true)
```

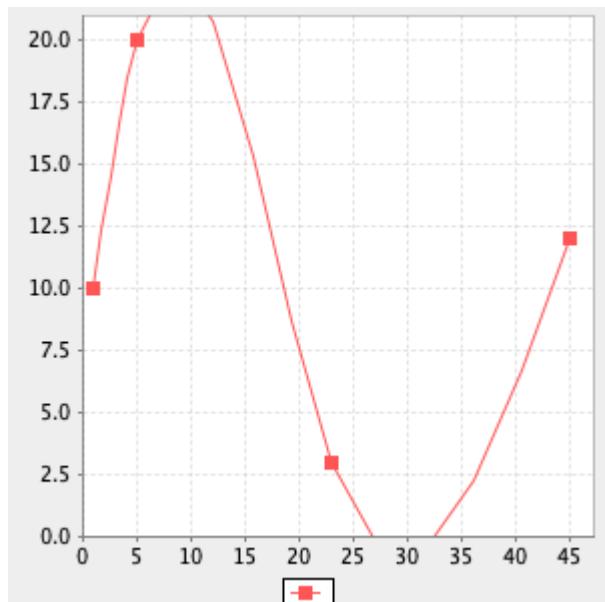

Create a 3D curve chart


```
List data = [  
    [1,10],[45,12],[23,3],[5,20]  
]  
Chart chart = Curve.curve(data, trid: true)
```

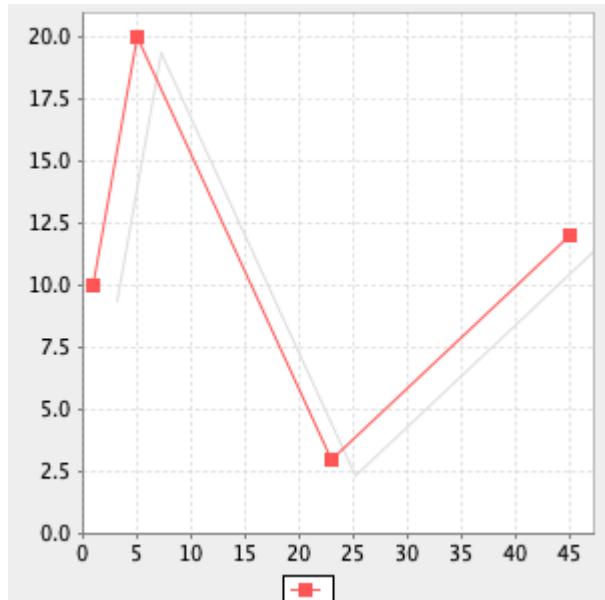

Creating Regression Charts


Create a linear regression chart

```
MultiPoint mulitPoint = Geometry.createRandomPoints(new Bounds(0,0,100,100).geometry,  
10)  
List data = mulitPoint.geometries.collect{ Point pt ->  
    [pt.x, pt.y]  
}  
Chart chart = Regression.linear(data)
```

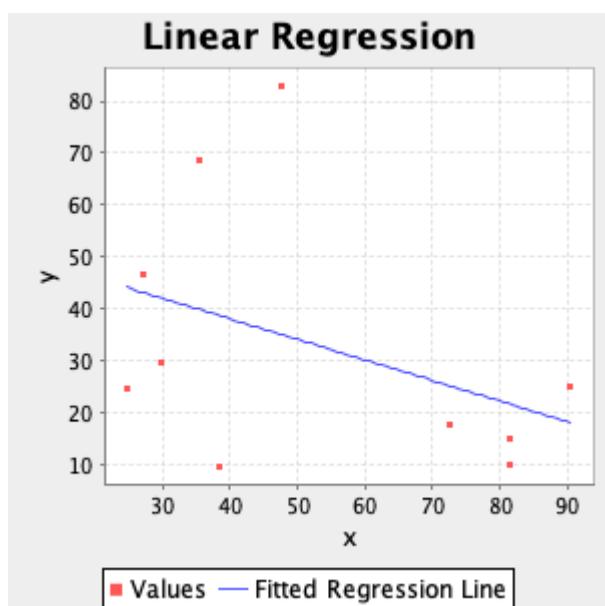

Create a power regression chart


```
MultiPoint multiPoint = Geometry.createRandomPoints(new Bounds(0,0,100,100).geometry,  
10)  
List data = multiPoint.geometries.collect{ Point pt ->  
    [pt.x, pt.y]  
}  
Chart chart = Regression.power(data)
```

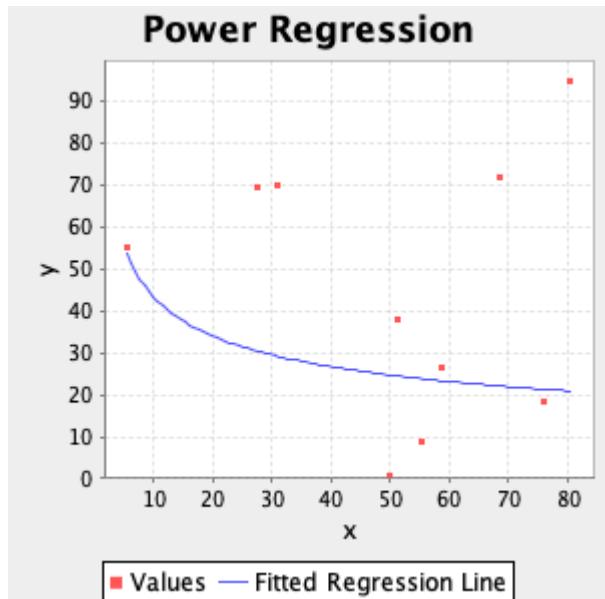

Creating Scatter Plot Charts


Create a scatter plot chart

```
MultiPoint multiPoint = Geometry.createRandomPoints(new Bounds(0,0,100,100).geometry,  
10)  
List data = multiPoint.geometries.collect{ Point pt ->  
    [pt.x, pt.y]  
}  
Chart chart = Scatter.scatterplot(data)
```

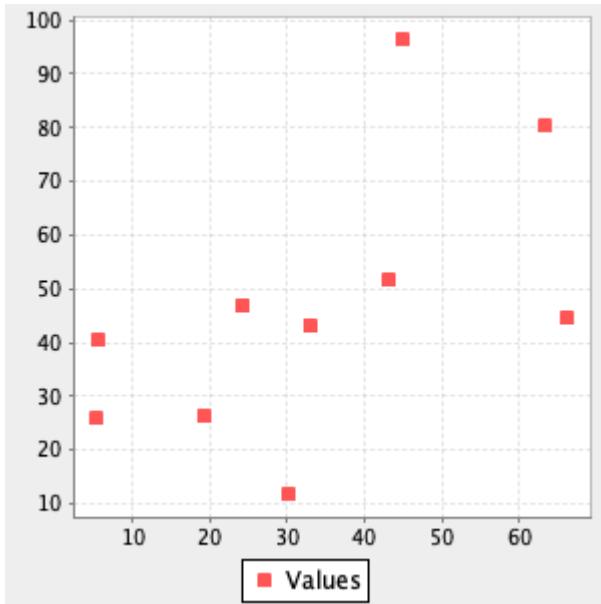

Create a scatter plot chart with options

```
MultiPoint multiPoint = Geometry.createRandomPoints(new Bounds(0,0,100,100).geometry,
10)
List data = multiPoint.geometries.collect{ Point pt ->
[pt.x, pt.y]
}
Chart chart = Scatter.scatterplot(data, legend: false, xLabel: "X Coordinates",
yLabel: "Y Coordinates")
```

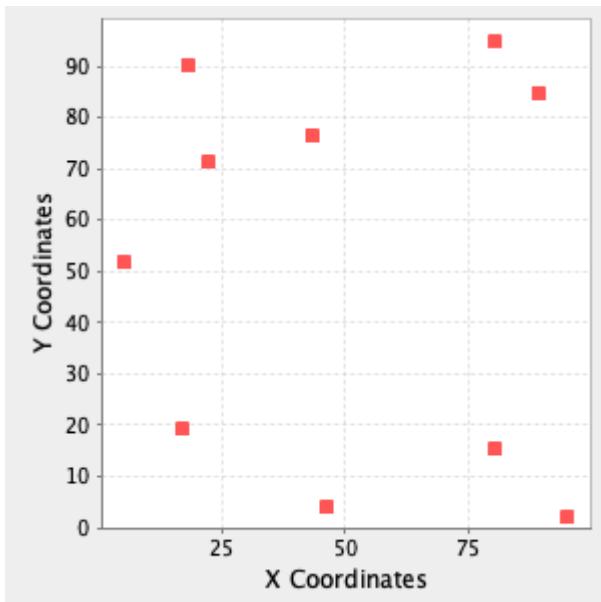

Feature Recipes

The Feature classes are in the [geoscript.feature](#) package.

The major classes in this package include Field, Schema, and Feature.

A Field has a name and a type and describes a column of data.

A Schema is a collection of Fields together with a name. Schemas are used to create new Layers.

A Feature contains a geometry and a collection of attributes. A collection of Features is called a Layer.

Creating Fields

Create a Field with a name and a type

```
Field field = new Field("name", "String")
println field
```

name: String

Create a Geometry Field with a name and a geometry type and an optional projection

```
Field field = new Field("geom", "Point", "EPSG:4326")
println field
```

geom: Point(EPSG:4326)

Create a Field with a List of Strings (name, type, projection)

```
Field field = new Field(["geom", "Polygon", "EPSG:4326"])
println field
```

geom: Polygon(EPSG:4326)

Create a Field from a Map where keys are name, type, proj

```
Field field = new Field([
    "name": "geom",
    "type": "LineString",
    "proj": new Projection("EPSG:4326")
])
println field
```

geom: LineString(EPSG:4326)

Access a Field's properties

```
Field field = new Field("geom", "Point", "EPSG:4326")
println "Name = ${field.name}"
println "Type = ${field.typ}"
println "Projection = ${field.proj}"
println "Is Geometry = ${field.geometry}"
```

```
Name = geom
Type = Point
Projection = "EPSG:4326"
Is Geometry = true
```

Creating Schemas

Create a Schema from a list of Fields

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
println schema
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

Create a Schema from a list of Lists

```
Schema schema = new Schema("cities", [
    ["geom", "Point", "EPSG:4326"],
    ["id", "Integer"],
    ["name", "String"]
])
println schema
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

Create a Schema from a list of Maps

```
Schema schema = new Schema("cities", [
    [name: "geom", type: "Point", proj: "EPSG:4326"],
    [name: "id", type: "Integer"],
    [name: "name", type: "String"]
])
println schema
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

Create a Schema from a string

```
Schema schema = new Schema("cities", "geom:Point:srid=4326,id:Integer,name:String")
println schema
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

Getting Schema Properties

Get the Schema's name

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
], "https://github.com/jericks/geoscript-groovy-cookbook")
String name = schema.name
println name
```

```
cities
```

Get the Schema's geometry Field

```
Field geomField = schema.geom
println geomField
```

```
geom: Point(EPSG:4326)
```

Get the Schema's Projection

```
Projection proj = schema.proj  
println proj
```

```
EPSG:4326
```

Get the Schema's URI

```
String uri = schema.uri  
println uri
```

```
https://github.com/jericks/geoscript-groovy-cookbook
```

Get the Schema's specification string

```
String spec = schema.spec  
println spec
```

```
geom:Point:srid=4326,id:Integer,name:String
```

Getting Schema Fields

Get the Schema's Fields

```
Schema schema = new Schema("cities", [  
    new Field("geom", "Point", "EPSG:4326"),  
    new Field("id", "Integer"),  
    new Field("name", "String")  
])  
List<Field> fields = schema.fields  
fields.each { Field field ->  
    println field  
}
```

```
geom: Point(EPSG:4326)  
id: Integer  
name: String
```

Get a Field

```
Field nameField = schema.field("name")
println nameField
```

```
name: String
```

Get a Field

```
Field idField = schema.get("id")
println idField
```

```
id: Integer
```

Check if a Schema has a Field

```
boolean hasArea = schema.has("area")
println "Has area Field? ${hasArea}"

boolean hasGeom = schema.has("geom")
println "Has geom Field? ${hasGeom}"
```

```
false
true
```

Modifying Schemas

Change the projection of a Schema

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema reprojectedSchema = schema.reproject("EPSG:2927", "cities_spws")
```

```
cities_spws geom: Point(EPSG:2927), id: Integer, name: String
```

Change the geometry type of a Schema

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema polyognSchema = schema.changeGeometryType("Polygon", "cities_buffer")
```

```
cities_buffer geom: Polygon(EPSG:4326), id: Integer, name: String
```

Change a Field definition of a Schema

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema guidSchema = schema.changeField(schema.field('id'), new Field('guid', 'String'),
'cities_guid')
```

```
cities_guid geom: Point(EPSG:4326), guid: String, name: String
```

Change Field definitions of a Schema

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema updatedSchema = schema.changeFields(
[
    (schema.field('id')) : new Field('guid', 'String'),
    (schema.field('name')) : new Field('description', 'String')
], 'cities_updated')
```

```
cities_updated geom: Point(EPSG:4326), guid: String, description: String
```

Add a Field to a Schema

```
Schema schema = new Schema("countries", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema updatedSchema = schema.addField(new Field("area", "Double"), "countries_area")
```

countries_area geom: Polygon(EPSG:4326), id: Integer, name: String, area: Double

Add a List of Fields to a Schema

```
Schema schema = new Schema("countries", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema updatedSchema = schema.addFields([
    new Field("area", "Double"),
    new Field("perimeter", "Double"),
], "countries_areaperimeter")
```

countries_areaperimeter geom: Polygon(EPSG:4326), id: Integer, name: String, area: Double, perimeter: Double

Remove a Field from a Schema

```
Schema schema = new Schema("countries", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("area", "Double")
])
Schema updatedSchema = schema.removeField(schema.field("area"), "countries_updated")
```

countries_updated geom: Polygon(EPSG:4326), id: Integer, name: String

Remove a List of Fields from a Schema

```
Schema schema = new Schema("countries", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("area", "Double")
])
Schema updatedSchema = schema.removeFields([
    schema.field("area"),
    schema.field("name")
], "countries_updated")
```

```
countries_updated geom: Polygon(EPSG:4326), id: Integer
```

Create a new Schema from an existing Schema but only including a subset of Fields

```
Schema schema = new Schema("countries", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("area", "Double")
])
Schema updatedSchema = schema.removeFields([
    schema.field("area"),
    schema.field("name")
], "countries_updated")
```

```
countries_updated geom: Polygon(EPSG:4326), name: String
```

Combining Schemas

Combining two Schemas results in a Map with two values: schema and fields. The schema property contains the new Schema. The fields property is List of two Maps which both contain a mapping between the fields of the original Schema and the newly created Schema.

Optional arguments to the Schema.addSchema method are:

- postfixAll: Whether to postfix all field names (true) or not (false). If true, all Fields from the this current Schema will have '1' at the end of their name while the other Schema's Fields will have '2'. Defaults to false.
- includeDuplicates: Whether or not to include duplicate fields names. Defaults to false. If a duplicate is found a '2' will be added.
- maxFieldNameLength: The maximum new Field name length (mostly to support shapefiles where Field names can't be longer than 10 characters)

- firstPostfix: The postfix string (default is '1') for Fields from the current Schema. Only applicable when postfixAll or includeDuplicates is true.
- secondPostfix: The postfix string (default is '2') for Fields from the other Schema. Only applicable when postfixAll or includeDuplicates is true.

Combine two Schemas with no duplicate fields and no postfixes to field names

```
Schema shopSchema = new Schema("shops", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])

Schema cafeSchema = new Schema("cafes", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("address", "String")
])

Map result = shopSchema.addSchema(cafeSchema, "business")

Schema combinedSchema = result.schema
println combinedSchema
```

```
business geom: Point(EPSG:4326), id: Integer, name: String, address: String
```

```
Map<String, String> shopSchemaFieldMapping = result.fields[0]
println shopSchemaFieldMapping
```

```
[geom:geom, id:id, name:name]
```

```
Map<String, String> cafeSchemaSchemaFieldMapping = result.fields[1]
println cafeSchemaSchemaFieldMapping
```

```
[address:address]
```

Combine two Schemas with no duplicate fields and postfixes

```
Schema shopSchema = new Schema("shops", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])

Schema cafeSchema = new Schema("cafes", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("address", "String")
])

Map result = shopSchema.addSchema(cafeSchema, "business", postfixAll: true,
includeDuplicates: false)

Schema combinedSchema = result.schema
println combinedSchema
```

```
business geom: Point(EPSG:4326), id1: Integer, name1: String, id2: Integer, name2: String, address2: String
```

```
Map<String, String> shopSchemaFieldMapping = result.fields[0]
println shopSchemaFieldMapping
```

```
[geom:geom, id:id1, name:name1]
```

```
Map<String, String> cafeSchemaFieldMapping = result.fields[1]
println cafeSchemaFieldMapping
```

```
[id:id2, name:name2, address:address2]
```

Creating Features from a Schema

Create a Feature from a Schema with a Map of values

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = schema.feature([
    id: 1,
    name: 'Seattle',
    geom: new Point( -122.3204, 47.6024)
], "city.1")
println feature
```

```
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

Create a Feature from a Schema with a List of values. The order of the values must match the order of the Fields.

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = schema.feature([
    new Point( -122.3204, 47.6024),
    1,
    'Seattle'
], "city.1")
println feature
```

```
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

Create a Feature from a Schema with another Feature.

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature1 = new Feature([
    id: 1,
    name: 'Seattle',
    geom: new Point( -122.3204, 47.6024)
], "city.1", schema)
println feature1
Feature feature2 = schema.feature(feature1)
println feature2
```

```
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

Create an empty Feature from a Schema.

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = schema.feature()
println feature
```

```
cities.fid-5c38dcc0_18b82f0ec42_-5cec geom: null, id: null, name: null
```

Reading and Writing Schemas

The Schema IO classes are in the [geoscript.feature.io](#) package.

Finding Schema Writer and Readers

List all Schema Writers

```
List<SchemaWriter> writers = SchemaWriters.list()
writers.each { SchemaWriter writer ->
    println writer.class.getSimpleName
}
```

```
JsonSchemaWriter  
StringSchemaWriter  
XmlSchemaWriter
```

Find a Schema Writer

```
Schema schema = new Schema("cities", [  
    new Field("geom", "Point", "EPSG:4326"),  
    new Field("id", "Integer"),  
    new Field("name", "String")  
])  
  
SchemaWriter writer = SchemaWriters.find("string")  
String schemaStr = writer.write(schema)  
println schemaStr
```

```
geom:Point:srid=4326,id:Integer,name:String
```

List all Schema Readers

```
List<SchemaReader> readers = SchemaReaders.list()  
readers.each { SchemaReader reader ->  
    println reader.className  
}
```

```
JsonSchemaReader  
StringSchemaReader  
XmlSchemaReader
```

Find a Schema Reader

```
SchemaReader reader = SchemaReaders.find("string")  
Schema schema = reader.read("geom:Point:srid=4326,id:Integer,name:String")  
println schema
```

```
layer geom: Point(EPSG:4326), id: Integer, name: String
```

String

Read a Schema from a String

```
StringSchemaReader reader = new StringSchemaReader()
Schema schema = reader.read("geom:Point:srid=4326,id:Integer,name:String", name:
"points")
println schema
```

```
points geom: Point(EPSG:4326), id: Integer, name: String
```

Write a Schema to a String

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
StringSchemaWriter writer = new StringSchemaWriter()
String schemaStr = writer.write(schema)
println schemaStr
```

```
geom:Point:srid=4326,id:Integer,name:String
```

JSON

Read a Schema from a JSON

```
JsonSchemaReader reader = new JsonSchemaReader()
Schema schema = reader.read("""
"name": "cities",
"projection": "EPSG:4326",
"geometry": "geom",
"fields": [
{
  "name": "geom",
  "type": "Point",
  "geometry": true,
  "projection": "EPSG:4326"
},
{
  "name": "id",
  "type": "Integer"
},
{
  "name": "name",
  "type": "String"
}
]
""")
println schema
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

Write a Schema to a JSON

```
Schema schema = new Schema("cities", [
  new Field("geom", "Point", "EPSG:4326"),
  new Field("id", "Integer"),
  new Field("name", "String")
])

JsonSchemaWriter writer = new JsonSchemaWriter()
String schemaStr = writer.write(schema)
println schemaStr
```

```
{
  "name": "cities",
  "projection": "EPSG:4326",
  "geometry": "geom",
  "fields": [
    {
      "name": "geom",
      "type": "Point",
      "geometry": true,
      "projection": "EPSG:4326"
    },
    {
      "name": "id",
      "type": "Integer"
    },
    {
      "name": "name",
      "type": "String"
    }
  ]
}
```

XML

Read a Schema from a XML

```
XmlSchemaReader reader = new XmlSchemaReader()
Schema schema = reader.read("""<schema>
<name>cities</name>
<projection>EPSG:4326</projection>
<geometry>geom</geometry>
<fields>
  <field>
    <name>geom</name>
    <type>Point</type>
    <projection>EPSG:4326</projection>
  </field>
  <field>
    <name>id</name>
    <type>Integer</type>
  </field>
  <field>
    <name>name</name>
    <type>String</type>
  </field>
</fields>
</schema>""")
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

Write a Schema to a XML

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
XmlSchemaWriter writer = new XmlSchemaWriter()
String schemaStr = writer.write(schema)
println schemaStr
```

```
<schema>
  <name>cities</name>
  <projection>EPSG:4326</projection>
  <geometry>geom</geometry>
  <fields>
    <field>
      <name>geom</name>
      <type>Point</type>
      <projection>EPSG:4326</projection>
    </field>
    <field>
      <name>id</name>
      <type>Integer</type>
    </field>
    <field>
      <name>name</name>
      <type>String</type>
    </field>
  </fields>
</schema>
```

Creating Features

Create an empty Feature from a Map of values and a Schema.

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    id: 1,
    name: "Seattle",
    geom: new Point(-122.3204, 47.6024)
], "city.1", schema)
println feature
```

```
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

Create an empty Feature from a List of values and a Schema.

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)
println feature
```

```
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

Create an empty Feature from a Map of values. The Schema is inferred from the values.

```
Feature feature = new Feature([
    id: 1,
    name: "Seattle",
    geom: new Point(-122.3204, 47.6024)
], "city.1")
println feature
```

```
feature.city.1 id: 1, name: Seattle, geom: POINT (-122.3204 47.6024)
```

Getting Feature Properties

Get a Feature's ID

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String id = feature.id
println id
```

```
city.1
```

Get a Feature's Geometry

```
Geometry geometry = feature.geom
println geometry
```

```
POINT (-122.3204 47.6024)
```

Get a Feature's Bounds

```
Bounds bounds = feature.bounds
println bounds
```

```
(-122.3204,47.6024,-122.3204,47.6024,EPSG:4326)
```

Get a Feature's attributes

```
Map attributes = feature.attributes
println attributes
```

```
[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]
```

Getting Feature Attributes

Get an attribute from a Feature using a Field name

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

int id = feature.get("id")
println id
```

1

Get an attribute from a Feature using a Field

```
String name = feature.get(schema.field("name"))
println name
```

Seattle

Set an attribute of a Feature using a Field name and a new value

```
feature.set("name", "Tacoma")
println feature["name"]
```

Tacoma

Set an attribute of a Feature using a Field and a new value

```
feature.set(schema.field("name"), "Mercer Island")
println feature["name"]
```

Mercer Island

Set attributes of a Feature using a Map of new values

```
feature.set([id: 2])
println feature["id"]
```

```
2
```

Set a new Geometry value

```
feature.geom = new Point(-122.2220, 47.5673)
println feature.geom
```

```
POINT (-122.222 47.5673)
```

Reading and Writing Features

The Feature IO classes are in the [geoscript.feature.io](#) package.

Finding Feature Writer and Readers

List all Feature Writers

```
List<Writer> writers = Writers.list()
writers.each { Writer writer ->
    println writer.className
}
```

```
GeobufWriter
GeoJSONWriter
GeoRSSWriter
GmlWriter
GpxWriter
KmlWriter
YamlWriter
```

Find a Feature Writer

```
Writer writer = Writers.find("geojson")
println writer.className
```

```
GeoJSONWriter
```

List all Feature Readers

```
List<Reader> readers = Readers.list()
readers.each { Reader reader ->
    println reader.class.getSimpleName
}
```

```
GeobufReader
GeoJSONReader
GeoRSSReader
GmlReader
GpxReader
KmlReader
YamlReader
```

Find a Feature Reader

```
Reader reader = Readers.find("geojson")
println reader.class.getSimpleName
```

```
GeoJSONReader
```

GeoJSON

Get a GeoJSON String from a Feature

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String geojson = feature.geoJSON
println geojson
```

```
{"type": "Feature", "geometry": {"type": "Point", "coordinates": [-122.3204, 47.6024]}, "properties": {"id": 1, "name": "Seattle"}, "id": "city.1"}
```

Write a Feature to GeoJSON

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

GeoJSONWriter writer = new GeoJSONWriter()
String geojson = writer.write(feature)
println geojson
```

```
{"type": "Feature", "geometry": {"type": "Point", "coordinates": [-122.3204, 47.6024]}, "properties": {"id": 1, "name": "Seattle"}, "id": "city.1"}
```

Get a Feature from GeoJSON

```
String geojson = '{"type": "Feature", "geometry": {"type": "Point", "coordinates": [-122.3204, 47.6024]}, "properties": {"id": 1, "name": "Seattle"}, "id": "city.1"}'
Feature feature = Feature.fromGeoJSON(geojson)
println feature
```

```
feature.city.1 id: 1, name: Seattle, geometry: POINT (-122.3204 47.6024)
```

Read a Feature from GeoJSON

```
GeoJSONReader reader = new GeoJSONReader()
String geojson = '{"type": "Feature", "geometry": {"type": "Point", "coordinates": [-122.3204, 47.6024]}, "properties": {"id": 1, "name": "Seattle"}, "id": "city.1"}'
Feature feature = reader.read(geojson)
println feature
```

```
feature.city.1 id: 1, name: Seattle, geometry: POINT (-122.3204 47.6024)
```

GeoBuf

Get a GeoBuf String from a Feature

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String geobuf = feature.geobuf
println geobuf
```

```
0a0269640a046e616d65100218062a2b0a0c08001a089fd8d374c0ebb22d5a06636974792e316a0218016a
090a0753656174746c65720400000101
```

Get a Feature from a GeoBuf String

```
String geobuf =
'0a0269640a046e616d65100218062a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a07536561747
46c65'
Feature feature = Feature.fromGeobuf(geobuf)
println feature
```

```
features. geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

Write a Feature to a GeoBuf String

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

GeobufWriter writer = new GeobufWriter()
String geobuf = writer.write(feature)
println geobuf
```

```
0a0269640a046e616d65100218062a2b0a0c08001a089fd8d374c0ebb22d5a06636974792e316a0218016a  
090a0753656174746c65720400000101
```

Read a Feature from a GeoBuf String

```
GeobufReader reader = new GeobufReader()  
String geobuf =  
'0a0269640a046e616d65100218062a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a07536561747  
46c65'  
Feature feature = reader.read(geobuf)  
println feature
```

```
features. geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

GeoRSS

Get a GeoRSS String from a Feature

```
Schema schema = new Schema("cities", [  
    new Field("geom", "Point", "EPSG:4326"),  
    new Field("id", "Integer"),  
    new Field("name", "String")  
])  
Feature feature = new Feature([  
    new Point(-122.3204, 47.6024),  
    1,  
    "Seattle"  
, "city.1", schema)  
  
String georss = feature.geoRSS  
println georss
```

```
<entry xmlns:georss='http://www.georss.org/georss'  
      xmlns='http://www.w3.org/2005/Atom'><title>city.1</title><summary>[geom:POINT (-  
122.3204 47.6024), id:1, name:Seattle]</summary><updated>Mon Oct 30 16:36:01 PDT  
2023</updated><georss:point>47.6024 -122.3204</georss:point></entry>
```

Get a Feature from a GeoRSS String

```
String georss = """<entry xmlns:georss='http://www.georss.org/georss'  
      xmlns='http://www.w3.org/2005/Atom'>  
  <title>city.1</title>  
  <summary>[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]</summary>  
  <updated>Sat Jan 28 15:51:47 PST 2017</updated>  
  <georss:point>47.6024 -122.3204</georss:point>  
</entry>  
""";  
  
Feature feature = Feature.fromGeoRSS(georss)  
println feature
```

```
georss.fid-5c38dcc0_18b82f0ec42_-5cf0 title: city.1, summary: [geom:POINT (-122.3204  
47.6024), id:1, name:Seattle], updated: Sat Jan 28 15:51:47 PST 2017, geom: POINT (-  
122.3204 47.6024)
```

Write a Feature to a GeoRSS String

```
Schema schema = new Schema("cities", [  
    new Field("geom", "Point", "EPSG:4326"),  
    new Field("id", "Integer"),  
    new Field("name", "String")  
])  
Feature feature = new Feature([  
    new Point(-122.3204, 47.6024),  
    1,  
    "Seattle"  
], "city.1", schema)  
  
GeoRSSWriter writer = new GeoRSSWriter()  
String georss = writer.write(feature)  
println georss
```

```
<entry xmlns:georss='http://www.georss.org/georss'  
      xmlns='http://www.w3.org/2005/Atom'><title>city.1</title><summary>[geom:POINT (-  
122.3204 47.6024), id:1, name:Seattle]</summary><updated>Mon Oct 30 16:36:01 PDT  
2023</updated><georss:point>47.6024 -122.3204</georss:point></entry>
```

Read a Feature from a GeoRSS String

```
GeoRSSReader reader = new GeoRSSReader()
String georss = """<entry xmlns:georss='http://www.georss.org/georss'
      xmlns='http://www.w3.org/2005/Atom'>
  <title>city.1</title>
  <summary>[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]</summary>
  <updated>Sat Jan 28 15:51:47 PST 2017</updated>
  <georss:point>47.6024 -122.3204</georss:point>
</entry>
"""

Feature feature = reader.read(georss)
println feature
```

```
georss.fid-5c38dcc0_18b82f0ec42_-5cee title: city.1, summary: [geom:POINT (-122.3204
47.6024), id:1, name:Seattle], updated: Sat Jan 28 15:51:47 PST 2017, geom: POINT (-
122.3204 47.6024)
```

GML

Get a GML String from a Feature

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String gml = feature.gml
println gml
```

```

<gsf:cities xmlns:gsf="http://geoscript.org/feature"
  xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:gml="http://www.opengis.net/gml"
  xmlns:xlink="http://www.w3.org/1999/xlink" fid="city.1">
  <gml:name>Seattle</gml:name>
  <gsf:geom>
    <gml:Point>
      <gml:coord>
        <gml:X>-122.3204</gml:X>
        <gml:Y>47.6024</gml:Y>
      </gml:coord>
    </gml:Point>
  </gsf:geom>
  <gsf:id>1</gsf:id>
</gsf:cities>

```

Get a Feature from a GML String

```

String gml = """<gsf:cities xmlns:gsf="http://geoscript.org/feature"
  xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:gml="http://www.opengis.net/gml"
  xmlns:xlink="http://www.w3.org/1999/xlink" fid="city.1">
  <gml:name>Seattle</gml:name>
  <gsf:geom>
    <gml:Point>
      <gml:coord>
        <gml:X>-122.3204</gml:X>
        <gml:Y>47.6024</gml:Y>
      </gml:coord>
    </gml:Point>
  </gsf:geom>
  <gsf:id>1</gsf:id>
</gsf:cities>
"""

Feature feature = Feature.fromGml(gml)
println feature

```

```
feature.city.1 name: Seattle, id: 1, geom: POINT (-122.3204 47.6024)
```

Write a Feature to a GML String

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

GmlWriter writer = new GmlWriter()
String gml = writer.write(feature)
println gml
```

```
<gsf:cities xmlns:gsf="http://geoscript.org/feature"
  xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:gml="http://www.opengis.net/gml"
  xmlns:xlink="http://www.w3.org/1999/xlink" fid="city.1">
  <gml:name>Seattle</gml:name>
  <gsf:geom>
    <gml:Point>
      <gml:coord>
        <gml:X>-122.3204</gml:X>
        <gml:Y>47.6024</gml:Y>
      </gml:coord>
    </gml:Point>
  </gsf:geom>
  <gsf:id>1</gsf:id>
</gsf:cities>
```

Read a Feature from a GML String

```
GmlReader reader = new GmlReader()
String gml = """<gsf:cities xmlns:gsf="http://geoscript.org/feature"
xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:gml="http://www.opengis.net/gml"
xmlns:xlink="http://www.w3.org/1999/xlink" fid="city.1">
<gml:name>Seattle</gml:name>
<gsf:geom>
<gml:Point>
<gml:coord>
<gml:X>-122.3204</gml:X>
<gml:Y>47.6024</gml:Y>
</gml:coord>
</gml:Point>
</gsf:geom>
<gsf:id>1</gsf:id>
</gsf:cities>
"""
Feature feature = reader.read(gml)
println feature
```

```
feature.city.1 name: Seattle, id: 1, geom: POINT (-122.3204 47.6024)
```

GPX

Get a GPX String from a Feature

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String gpx = feature.gpx
println gpx
```

```
<wpt lat='47.6024' lon='-122.3204'
xmlns='http://www.topografix.com/GPX/1/1'><name>city.1</name></wpt>
```

Get a Feature from a GPX String

```
String gpx = "<wpt lat='47.6024' lon='-122.3204'  
xmlns='http://www.topografix.com/GPX/1/1'><name>city.1</name></wpt>"  
Feature feature = Feature.fromGpx(gpx)  
println feature
```

```
gpx.fid-5c38dcc0_18b82f0ec42_-5ced geom: POINT (-122.3204 47.6024), name: city.1
```

Write a Feature to a GPX String

```
Schema schema = new Schema("cities", [  
    new Field("geom", "Point", "EPSG:4326"),  
    new Field("id", "Integer"),  
    new Field("name", "String")  
])  
Feature feature = new Feature([  
    new Point(-122.3204, 47.6024),  
    1,  
    "Seattle"  
], "city.1", schema)  
  
GpxWriter writer = new GpxWriter()  
String gpx = writer.write(feature)  
println gpx
```

```
<wpt lat='47.6024' lon='-122.3204'  
xmlns='http://www.topografix.com/GPX/1/1'><name>city.1</name></wpt>
```

Read a Feature from a GPX String

```
GpxReader reader = new GpxReader()  
String gpx = "<wpt lat='47.6024' lon='-122.3204'  
xmlns='http://www.topografix.com/GPX/1/1'><name>city.1</name></wpt>"  
Feature feature = reader.read(gpx)  
println feature
```

```
gpx.fid-5c38dcc0_18b82f0ec42_-5cef geom: POINT (-122.3204 47.6024), name: city.1
```

KML

Get a KML String from a Feature

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String kml = feature.kml
println kml
```

```
<kml:Placemark xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1"
  id="city.1"><kml:name>Seattle</kml:name><kml:Point><kml:coordinates>-
122.3204,47.6024</kml:coordinates></kml:Point></kml:Placemark>
```

Get a Feature from a KML String

```
String kml = """<kml:Placemark xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1" id="city.1">
    <kml:name>Seattle</kml:name>
    <kml:Point>
      <kml:coordinates>-122.3204,47.6024</kml:coordinates>
    </kml:Point>
  </kml:Placemark>"""
Feature feature = Feature.fromKml(kml)
println feature
```

```
placemark.city.1 name: Seattle, description: null, Geometry: POINT (-122.3204 47.6024)
```

Write a Feature to a KML String

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

KmlWriter writer = new KmlWriter()
String kml = writer.write(feature)
println kml
```

```
<kml:Placemark xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1"
  id="city.1"><kml:name>Seattle</kml:name><kml:Point><kml:coordinates>-
122.3204,47.6024</kml:coordinates></kml:Point></kml:Placemark>
```

Read a Feature from a KML String

```
KmlReader reader = new KmlReader()
String kml = """<kml:Placemark xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1" id="city.1">
  <kml:name>Seattle</kml:name>
  <kml:Point>
    <kml:coordinates>-122.3204,47.6024</kml:coordinates>
  </kml:Point>
</kml:Placemark>"""
Feature feature = reader.read(kml)
println feature
```

```
placemark.city.1 name: Seattle, description: null, Geometry: POINT (-122.3204 47.6024)
```

YAML

Get a Yaml String from a Feature

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String yaml = feature.yaml
println yaml
```

```
---
type: Feature
properties:
  id: 1
  name: Seattle
geometry:
  type: Point
  coordinates:
  - -122.3204
  - 47.6024
```

Get a Feature from a Yaml String

```
String yaml = """---
type: "Feature"
properties:
  id: 1
  name: "Seattle"
geometry:
  type: "Point"
  coordinates:
  - -122.3204
  - 47.6024
"""

Feature feature = Feature.fromYaml(yaml)
println feature
```

```
feature.1 id: 1, name: Seattle, geom: POINT (-122.3204 47.6024)
```

Write a Feature to a YAML String

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

YamlWriter writer = new YamlWriter()
String yml = writer.write(feature)
println yml
```

```
---
type: Feature
properties:
  id: 1
  name: Seattle
geometry:
  type: Point
  coordinates:
  - -122.3204
  - 47.6024
```

Read a Feature from a YAML String

```
YamlReader reader = new YamlReader()
String yml = """---
type: "Feature"
properties:
  id: 1
  name: "Seattle"
geometry:
  type: "Point"
  coordinates:
  - -122.3204
  - 47.6024
"""

Feature feature = reader.read(yml)
println feature
```

```
feature.1 id: 1, name: Seattle, geom: POINT (-122.3204 47.6024)
```

Filter Recipes

The Filter classes are in the [geoscript.filter](#) package.

Creating Filters

Create a Filter from a CQL string

```
Filter filter = new Filter("name='Seattle'")  
println filter.toString()
```

```
[ name = Seattle ]
```

Create a Filter from a CQL string

```
Filter filter = new Filter  
("<filter><PropertyIsEqualTo><PropertyName>soilType</PropertyName><Literal>Mollisol</Literal></PropertyIsEqualTo></filter>")  
println filter.toString()
```

```
[ soilType = Mollisol ]
```

Create a pass Filter that return true for everything

```
Filter filter = Filter.PASS  
println filter.toString()
```

```
Filter.INCLUDE
```

Create a fail Filter that return false for everything

```
Filter filter = Filter.FAIL  
println filter.toString()
```

```
Filter.EXCLUDE
```

Create a spatial bounding box Filter from a Bounds

```
Filter filter = Filter.bbox(new Bounds(-102, 43.5, -100, 47.5))  
println filter.toString()
```

```
[ the_geom bbox ReferencedEnvelope[-102.0 : -100.0, 43.5 : 47.5] ]
```

Create a spatial contains Filter from a Geometry

```
Filter filter = Filter.contains(Geometry.fromWKT("POLYGON ((-104 45, -95 45, -95 50,  
-104 50, -104 45)"))  
println filter.toString()
```

```
[ the_geom contains POLYGON ((-104 45, -95 45, -95 50, -104 50, -104 45)) ]
```

Create a spatial distance within Filter from a Geometry and a distance

```
Filter filter = Filter.dwithin("the_geom", Geometry.fromWKT("POINT (-100 47)"), 10.2,  
"feet")  
println filter.toString()
```

```
[ the_geom dwithin POINT (-100 47), distance: 10.2 ]
```

Create a spatial crosses Filter from a Geometry

```
Filter filter = Filter.crosses("the_geom", Geometry.fromWKT("LINESTRING (-104 45, -95  
45)"))  
println filter.toString()
```

```
[ the_geom crosses LINESTRING (-104 45, -95 45) ]
```

Create a spatial intersects Filter from a Geometry

```
Filter filter = Filter.intersects(Geometry.fromWKT("POLYGON ((-104 45, -95 45, -95 50,  
-104 50, -104 45)"))  
println filter.toString()
```

```
[ the_geom intersects POLYGON ((-104 45, -95 45, -95 50, -104 50, -104 45)) ]
```

Create a feature id Filter

```
Filter filter = Filter.id("points.1")  
println filter.toString()
```

```
[ points.1 ]
```

Create a feature ids Filter

```
Filter filter = Filter.ids(["points.1", "points.2", "points.3"])
println filter.toString()
```

```
[ points.1, points.2, points.3 ]
```

Create an equals Filter

```
Filter filter = Filter.equals("name", "Washington")
println filter.toString()
```

```
[ name = Washington ]
```

Using Filters

Get a CQL string from a Filter

```
Filter filter = new Filter("name='Seattle'")
String cql = filter.cql
println cql
```

```
name = 'Seattle'
```

Get an XML string from a Filter

```
String xml = filter.xml
println xml
```

```
<ogc:Filter xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:gml="http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc">
  <ogc:PropertyIsEqualTo>
    <ogc:PropertyName>name</ogc:PropertyName>
    <ogc:Literal>Seattle</ogc:Literal>
  </ogc:PropertyIsEqualTo>
</ogc:Filter>
```

Combine Filters with and

```
Filter cityFilter = new Filter("city = 'Seattle'")  
Filter stateFilter = new Filter("state = 'WA'")  
Filter andFilter = cityFilter.and(stateFilter)  
println andFilter
```

```
[[ city = Seattle ] AND [ state = WA ]]
```

Combine Filters with and using the plus operator

```
Filter cityFilter = new Filter("city = 'Seattle'")  
Filter stateFilter = new Filter("state = 'WA'")  
Filter andFilter = cityFilter + stateFilter  
println andFilter
```

```
[[ city = Seattle ] AND [ state = WA ]]
```

Combine Filters with or

```
Filter seattleFilter = new Filter("city = 'Seattle'")  
Filter tacomaFilter = new Filter("city = 'Tacoma'")  
Filter orFilter = seattleFilter.or(tacomaFilter)  
println orFilter
```

```
[[ city = Seattle ] OR [ city = Tacoma ]]
```

Negate a Filter

```
Filter seattleFilter = new Filter("city = 'Seattle'")  
Filter notSeattleFilter = seattleFilter.not  
println notSeattleFilter
```

```
[ NOT [ city = Seattle ] ]
```

Negate a Filter using the minus operator

```
Filter seattleFilter = new Filter("city = 'Seattle'")  
Filter notSeattleFilter = -seattleFilter  
println notSeattleFilter
```

```
[ NOT [ city = Seattle ] ]
```

Simplify a Filter

```
Filter seattleFilter = new Filter("city = 'Seattle'")  
Filter filter = (seattleFilter + Filter.PASS).simplify()  
println filter
```

```
[ city = Seattle ]
```

Evaluating Filters

Test to see if a Filter matches a Feature by attribute

```
Feature feature = new Feature([  
    id: 1,  
    name: "Seattle",  
    geom: new Point(-122.3204, 47.6024)  
, "city.1")  
  
Filter isNameFilter = new Filter("name='Seattle'")  
boolean isName = isNameFilter.evaluate(feature)  
println isName
```

```
true
```

```
Filter isNotNameFilter = new Filter("name='Tacoma'")  
boolean isNotName = isNotNameFilter.evaluate(feature)  
println isNotName
```

```
false
```

Test to see if a Filter matches a Feature by feature id

```
Filter isIdFilter = Filter.id("city.1")  
boolean isId = isIdFilter.evaluate(feature)  
println isId
```

```
true
```

```
Filter isNotIdFilter = Filter.id("city.2")
boolean isNotId = isNotIdFilter.evaluate(feature)
println isNotId
```

false

Test to see if a Filter matches a Feature by a spatial bounding box

```
Filter isInBboxFilter = Filter.bbox("geom", new Bounds(-132.539, 42.811, -111.796,
52.268))
boolean isInBbox = isInBboxFilter.evaluate(feature)
println isInBbox
```

true

```
Filter isNotInBboxFilter = Filter.bbox("geom", new Bounds(-12.656, 18.979, 5.273,
34.597))
boolean isNotInBbox = isNotInBboxFilter.evaluate(feature)
println isNotInBbox
```

false

Creating Literals

Create a literal Expression from a number

```
Expression expression = new Expression(3.56)
println expression
```

3.56

Create a literal Expression from a string

```
Expression expression = new Expression("Seattle")
println expression
```

Seattle

Evaluating a literal Expression just gives you the value

```
Expression expression = new Expression(3.56)
double number = expression.evaluate()
println number
```

```
3.56
```

Creating Properties

Create a Property from a string

```
Property property = new Property("name")
println property
```

```
name
```

Create a Property from a Field

```
Field field = new Field("geom", "Polygon")
Property property = new Property(field)
println property
```

```
geom
```

Evaluating Properties

Evaluate a Property to get values from a Feature. Get the id

```
Feature feature = new Feature([
    id: 1,
    name: "Seattle",
    geom: new Point(-122.3204, 47.6024)
], "city.1")
```

```
Property idProperty = new Property("id")
int id = idProperty.evaluate(feature)
println id
```

```
1
```

Get the name

```
Property nameProperty = new Property("name")
String name = nameProperty.evaluate(feature)
println name
```

```
Seattle
```

Get the geometry

```
Property geomProperty = new Property("geom")
Geometry geometry = geomProperty.evaluate(feature)
println geometry
```

```
POINT (-122.3204 47.6024)
```

Creating Functions

Create a Function from a CQL string

```
Function function = new Function("centroid(the_geom)")
println function
```

```
centroid([the_geom])
```

Create a Function from a name and Expressions

```
Function function = new Function("centroid", new Property("the_geom"))
println function
```

```
centroid([the_geom])
```

Create a Function from a name, a Closure, and Expressions

```
Function function = new Function("my_centroid", {g-> g.centroid}, new Property
("the_geom"))
println function
```

```
my_centroid([the_geom])
```

Create a Function from a CQL string and a Closure

```
Function function = new Function("my_centroid(the_geom)", {g-> g.centroid})
println function
```

```
my_centroid([the_geom])
```

You can get a list of built in Functions

```
List<String> functionNames = Function.getFunctionNames()
println "There are ${functionNames.size()} Functions:"
functionNames.sort().subList(0,10).each { String name ->
    println name
}
```

There are 318 Functions:


And
Area
Categorize
Collection_Average
Collection_Bounds
Collection_Count
Collection_Max
Collection_Median
Collection_Min
Collection_Nearest

Evaluating Functions

Evaluate a geometry Function

```
Feature feature = new Feature([
    id: 1,
    name: "Seattle",
    geom: new Point(-122.3204, 47.6024)
], "city.1")

Function bufferFunction = new Function("buffer(geom, 10)")
Geometry polygon = bufferFunction.evaluate(feature)
```

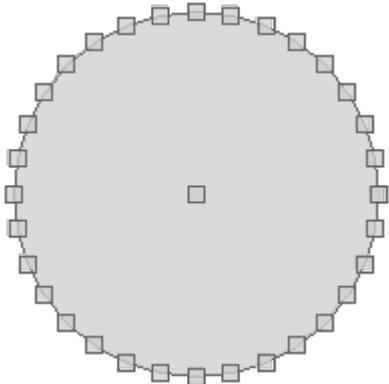

Evaluate a geometry Function

```
Function lowerCaseFunction = new Function("strToLowercase(name)")  
String lowercaseName = lowerCaseFunction.evaluate(feature)  
println lowercaseName
```

```
seattle
```

Process Functions

Process Functions are a combination of Functions and Processes that can be used to create rendering transformations.

Create a Function from a Process that converts geometries in a Layer into a convexhull.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')  
Layer places = workspace.get("places")  
Process process = new Process("convexhull",  
    "Create a convexhull around the features",  
    [features: geoscript.layer.Cursor],  
    [result: geoscript.layer.Cursor],  
    { inputs ->  
        def geoms = new GeometryCollection(inputs.features.collect{ f -> f.geom})  
        def output = new Layer()  
        output.add([geoms.convexHull])  
        [result: output]  
    }  
)  
Function function = new Function(process, new Function("parameter", new Expression  
    ("features")))  
Symbolizer symbolizer = new Transform(function, Transform.RENDERING) + new Fill  
    ("aqua", 0.75) + new Stroke("navy", 0.5)  
places.style = symbolizer
```



Create a `ProcessFunction` from a `Process` that converts geometries in a `Layer` into a `bounds`.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer places = workspace.get("places")
Process process = new Process("bounds",
    "Create a bounds around the features",
    [features: geoscript.layer.Cursor],
    [result: geoscript.layer.Cursor],
    { inputs ->
        def geoms = new GeometryCollection(inputs.features.collect{ f -> f.geom})
        def output = new Layer()
        output.add([geoms.bounds.geometry])
        [result: output]
    }
)
ProcessFunction processFunction = new ProcessFunction(process, new Function
("parameter", new Expression("features")))
Symbolizer symbolizer = new Transform(processFunction, Transform.RENDERING) + new
Fill("aqua", 0.75) + new Stroke("navy", 0.5)
places.style = symbolizer
```



Creating Colors

Create a Color from a RGB color string

```
Color color = new Color("0,255,0")
```



Create a Color from a CSS color name

```
Color color = new Color("silver")
```



Create a Color from a hexadecimal string

```
Color color = new Color("#0000ff")
```



Create a Color from a RGB List

```
Color color = new Color([255,0,0])
```



Create a Color from a RGB Map

```
Color color = new Color([r: 5, g: 35, b:45])
```




Create a Color from a RGB function string

```
Color color = new Color("rgb(0,128,128)")
```



Create a Color from a HLS Map

```
Color color = new Color([h: 0, s: 1.0, l: 0.5])
```




Create a Color from a HSL function string

```
Color color = new Color("hsl(0,1,0.5)")
```



Get a Random Color

```
Color color = Color.getRandom()
```



Get a Random Pastel Color

```
Color color = Color.getRandomPastel()
```



Get a darker Color

```
Color color = new Color("lightblue")
Color darkerColor = color.darker()
```



Get a brighter Color

```
Color color = new Color("purple")
Color brigtherColor = color.brighter()
```



Getting Color Formats

Create a Color

```
Color color = new Color("wheat")
```



Get Hex

```
String hex = color.hex
println hex
```

```
#f5deb3
```

Get RGB

```
List rgb = color.rgb
println rgb
```

```
[245, 222, 179]
```

Get HSL

```
List hsl = color.hsl
println hsl
```

```
[0.10858585256755147, 0.7674419030001307, 0.831372548999999]
```

Get the `java.awt.Color`


```
java.awt.Color awtColor = color.asColor()  
println awtColor
```

```
java.awt.Color[r=245,g=222,b=179]
```

Displaying Colors


Draw a List of Colors to a `BufferedImage`

```
Color color = new Color("pink")  
BufferedImage image = Color.drawToImage(  
    [color.brighter(), color, color.darker()],  
    "vertical",  
    40  
)
```



Draw a List of Colors to a simple GUI

```
List<Color> colors = Color.getPaletteColors("YlOrBr")  
Color.draw(colors, "horizontal", 50)
```

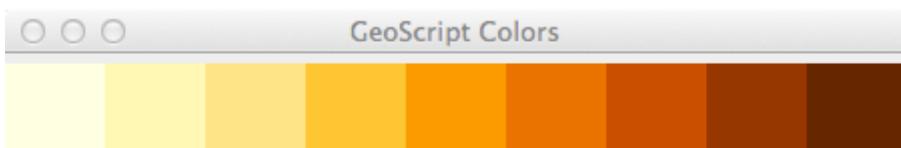

Using Color Palettes

Get all color palettes

```
List<String> allPalettes = Color.getPaletteNames("all")  
allPalettes.each { String name ->  
    println name  
}
```

PiYG
RdGy
Purples
Reds
BuPu
Set1
PuBuGn
Grays
PuOr
Accents
YlGn
YlOrBr
RdPu
PuRd
RdYlGn
Paired
Set3
Set2
GnBu
YlGnBu
RdYlBu
RdBu
BuGn
BrBG
PRGn
Blues
Greens
OrRd
Dark2
Oranges
Spectral
Pastel2
Pastel1
PuBu
YlOrRd
BlueToOrange
GreenToOrange
BlueToRed
GreenToRedOrange
Sunset
Green
YellowToRedHeatMap
BlueToYellowToRedHeatMap
DarkRedToYellowWhiteHeatMap
LightPurpleToDarkPurpleHeatMap
BoldLandUse
MutedTerrain
BoldLandUse
MutedTerrain

Get diverging color palettes

```
List<String> divergingPalettes = Color.getPaletteNames("diverging")
divergingPalettes.each { String name ->
    println name
}
```

```
PiYG
RdGy
PuOr
RdYlGn
RdYlBu
RdBu
BrBG
PRGn
Spectral
BlueToOrange
GreenToOrange
BlueToRed
GreenToRedOrange
```

Get sequential color palettes

```
List<String> sequentialPalettes = Color.getPaletteNames("sequential")
sequentialPalettes.each { String name ->
    println name
}
```

```
Purples
Reds
BuPu
PuBuGn
Grays
YlGn
YlOrBr
RdPu
PuRd
GnBu
YlGnBu
BuGn
Blues
Greens
OrRd
Oranges
PuBu
YlOrRd
Sunset
Green
YellowToRedHeatMap
BlueToYellowToRedHeatMap
DarkRedToYellowWhiteHeatMap
LightPurpleToDarkPurpleHeatMap
BoldLandUse
MutedTerrain
```

Get qualitative color palettes

```
List<String> qualitativePalettes = Color.getPaletteNames("qualitative")
qualitativePalettes.each { String name ->
    println name
}
```

```
Set1
Accents
Paired
Set3
Set2
Dark2
Pastel2
Pastel1
BoldLandUse
MutedTerrain
```

Get a Blue Green Color Palette

```
List colors = Color.getPaletteColors("BuGn")
```



Get a Purple Color Palette with only four colors

```
colors = Color.getPaletteColors("Purples", 4)
```



Get a Blue Green Color Palette

```
colors = Color.getPaletteColors("MutedTerrain")
```



Get a Blue Green Color Palette

```
colors = Color.getPaletteColors("BlueToYellowToRedHeatMap")
```




Create a Color palette by interpolating between two colors

```
Color startColor = new Color("red")
Color endColor = new Color("green")
List<Color> colors = startColor.interpolate(endColor, 10)
```



Create a Color palette by interpolating between two colors

```
Color startColor = new Color("wheat")
Color endColor = new Color("lightblue")
List<Color> colors = Color.interpolate(startColor, endColor, 8)
```



Creating Expressions from CQL

Create a literal number Expression from a CQL String

```
Expression expression = Expression.fromCQL("12")
println expression
```

```
12
```

Create a literal string Expression from a CQL String

```
Expression expression = Expression.fromCQL("'Washington'")
println expression
```

```
Washington
```

Create a Property from a CQL String

```
Property property = Expression.fromCQL("NAME")
println property
```

```
NAME
```

Create a Function from a CQL String

```
Function function = Expression.fromCQL("centroid(the_geom)")
println function
```

```
centroid([the_geom])
```

Create Expression from static imports

You can import short helper methods from the Expressions class.

```
import static geoscript.filter.Expressions.*
```

Create a literal

```
Expression literal = expression(1.2)
```

Create a Color

```
Expression color = color("wheat")
```

Create a Property

```
Expression property = property("ID")
```

Create a Function

```
Expression function = function("max(10,22)")
```

Process Recipes

The Process classes are in the [geoscript.process](#) package.

Execute a built-in Process

Create a Process from a built-in process by name

```
Process process = new Process("vec:Bounds")
String name = process.name
println name
```

vec:Bounds

Get the title

```
String title = process.title
println title
```

Bounds

Get the description

```
String description = process.description
println description
```

Computes the bounding box of the input features.

Get the version

```
String version = process.version  
println version
```

```
1.0.0
```

Get the input parameters

```
Map parameters = process.parameters  
println parameters
```

```
[features:class geoscript.layer.Cursor]
```


Get the output parameters

```
Map results = process.results  
println results
```

```
[bounds:class geoscript.geom.Bounds]
```

Execute the Process to calculate the bounding box of all Features in a Layer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')  
Layer layer = workspace.get("places")  
Map executeResults = process.execute([features: layer])  
Bounds bounds = executeResults.bounds
```

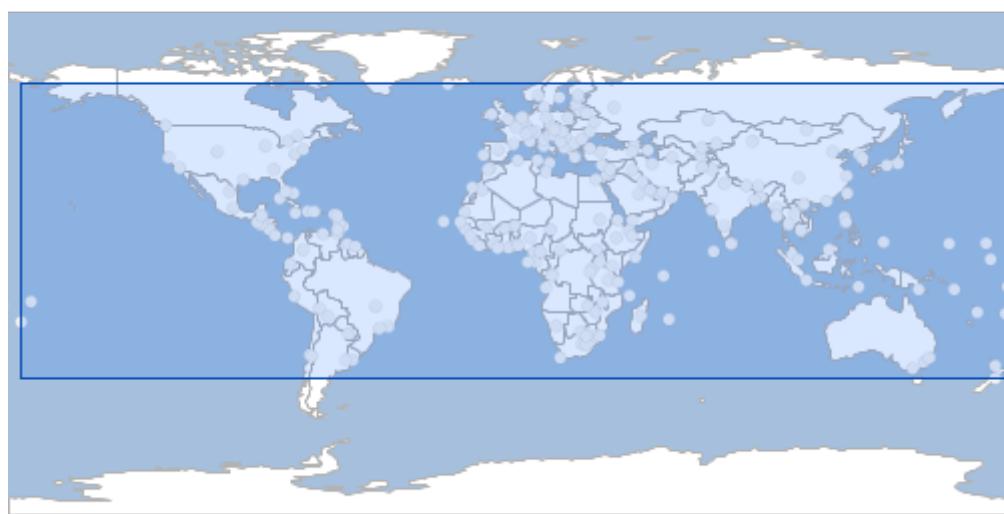

Listing built-in Processes

Get the names of all built-in Processes

```
List<String> processes = Process.processNames  
processes.each { String name ->  
    println name  
}
```

```
vec:Aggregate  
vec:BarnesSurface  
vec:Bounds  
vec:BufferFeatureCollection  
vec:Centroid  
vec:ClassifyByRange  
vec:Clip  
vec:CollectGeometries  
vec:Count  
vec:Feature  
vec:FeatureClassStats  
vec:Grid  
vec:GroupCandidateSelection  
vec:Heatmap  
vec:InclusionFeatureCollection  
vec:IntersectionFeatureCollection  
vec:LRSGeocode  
vec:LRSMeasure  
vec:LRSSegment  
vec:Nearest  
vec:PointBuffers  
vec:PointStacker  
vec:Query  
vec:RectangularClip  
vec:Reproject  
vec:Simplify  
vec:Snap  
vec:Transform  
vec:UnionFeatureCollection  
vec:Unique  
vec:VectorToRaster  
vec:VectorZonalStatistics  
geo:boundary  
geo:splitPolygon  
geo:within  
geo:touches  
geo:convexHull  
geo:area  
geo:crosses  
geo:centerid
```

```
geo:interiorPoint  
geo:getGeometryN  
geo:overlaps  
geo:isSimple  
geo:isWithinDistance  
geo:relate  
geo:densify  
geo:simplify  
geo:numGeometries  
geo:startPoint  
geo:numPoints  
geo:dimension  
geo:exteriorRing  
geo:numInteriorRing  
geo:geometryType  
geo>equalsExact  
geo>equalsExactTolerance  
geo:difference  
geo:isValid  
geo:endPoint  
geo:interiorRingN  
geo:envelope  
geo:reproject  
geo:intersection  
geo:symDifference  
geo:isClosed  
geo:isRing  
geo:union  
geo:length  
geo:buffer  
geo:isEmpty  
geo:contains  
geo:distance  
geo:disjoint  
geo:intersects  
geo:pointN  
geo:relatePattern  
geo:getX  
geo:getY  
geo:polygonize  
polygonlabelprocess:PolyLabeller  
centerLine:centerLine  
skeltonize:centerLine  
ras:AddCovages  
ras:Affine  
ras:AreaGrid  
ras:BandMerge  
ras:BandSelect  
ras:Contour  
ras:ConvolveCoverage  
ras:CovrageClassStats
```

```
ras:CropCoverage
ras:Jiffle
ras:MultiplyCoverages
ras:NormalizeCoverage
ras:PolygonExtraction
ras:RangeLookup
ras:RasterAsPointCollection
ras:RasterZonalStatistics
ras:RasterZonalStatistics2
ras:ScaleCoverage
ras:StyleCoverage
ras:TransparencyFill
geoscript:convexhull
geoscript:bounds
```

Executing a new Process

Create a Process using a Groovy Closure

```
Process process = new Process("convexhull",
    "Create a convexhull around the features",
    [features: geoscript.layer.Cursor],
    [result: geoscript.layer.Cursor],
    { inputs ->
        def geoms = new GeometryCollection(inputs.features.collect{f -> f.geom})
        def output = new Layer()
        output.add([geoms.convexHull])
        [result: output]
    }
)
String name = process.name
println name
```

```
geoscript:convexhull
```

Get the title

```
String title = process.title
println title
```

```
convexhull
```

Get the description

```
String description = process.description  
println description
```

Create a convexhull around the features

Get the version

```
String version = process.version  
println version
```

1.0.0

Get the input parameters

```
Map parameters = process.parameters  
println parameters
```

[features:class geoscript.layer.Cursor]


Get the output parameters

```
Map results = process.results  
println results
```

[result:class geoscript.layer.Cursor]

Execute the Process created from a Groovy Closure

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')  
Layer layer = workspace.get("places")  
Map executeResults = process.execute([features: layer.cursor])  
Cursor convexHullCursor = executeResults.result
```

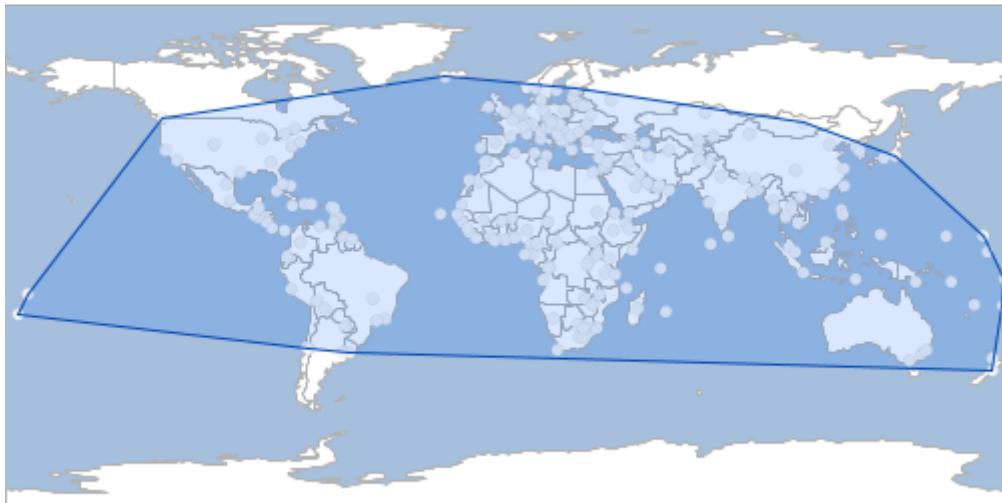

Process Functions

Process Functions are a combination of Functions and Processes that can be used to create rendering transformations.

Create a Function from a Process that converts geometries in a Layer into a convexhull.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer places = workspace.get("places")
Process process = new Process("convexhull",
    "Create a convexhull around the features",
    [features: geoscript.layer.Cursor],
    [result: geoscript.layer.Cursor],
    { inputs ->
        def geoms = new GeometryCollection(inputs.features.collect{ f -> f.geom})
        println geoms
        def output = new Layer()
        output.add([geoms.convexHull])
        [result: output]
    }
)
Function function = new Function(process, new Function("parameter", new Expression
("features")))
Symbolizer symbolizer = new Transform(function, Transform.RENDERING) + new Fill
("aqua", 0.75) + new Stroke("navy", 0.5)
places.style = symbolizer
```



Create a ProcessFunction from a Process that converts geometries in a Layer into a bounds.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer places = workspace.get("places")
Process process = new Process("bounds",
    "Create a bounds around the features",
    [features: geoscript.layer.Cursor],
    [result: geoscript.layer.Cursor],
    { inputs ->
        def geoms = new GeometryCollection(inputs.features.collect{ f -> f.geom})
        def output = new Layer()
        output.add([geoms.bounds.geometry])
        [result: output]
    }
)
ProcessFunction processFunction = new ProcessFunction(process, new Function
("parameter", new Expression("features")))
Symbolizer symbolizer = new Transform(processFunction, Transform.RENDERING) + new
Fill("aqua", 0.75) + new Stroke("navy", 0.5)
places.style = symbolizer
```



Render Recipes

The Render classes are in the [geoscript.render](#) package.

Creating Maps

Create a Map with Layers and render to a File.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
File file = new File("map.png")
map.render(file)
```



Create a Map with Layers and render to a file name.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
map.render("map.png")
```




Create a Map with Layers and render to an OutputStream.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->
    map.render(outputStream)
}
```




Create a Map with Layers and render to an BufferedImage.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
BufferedImage image = map.renderToImage()
```

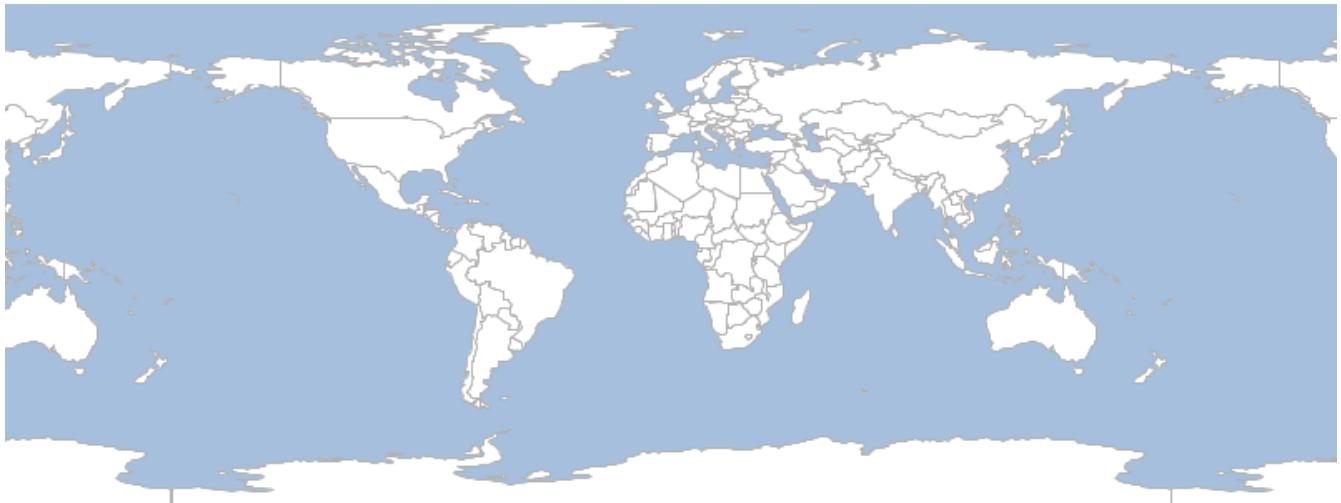


Create a Map with Layers and render to a Graphics2D object.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
BufferedImage image = new BufferedImage(800, 300, BufferedImage.TYPE_INT_ARGB)
Graphics2D graphics = image.graphics
map.render(graphics)
graphics.dispose()
```

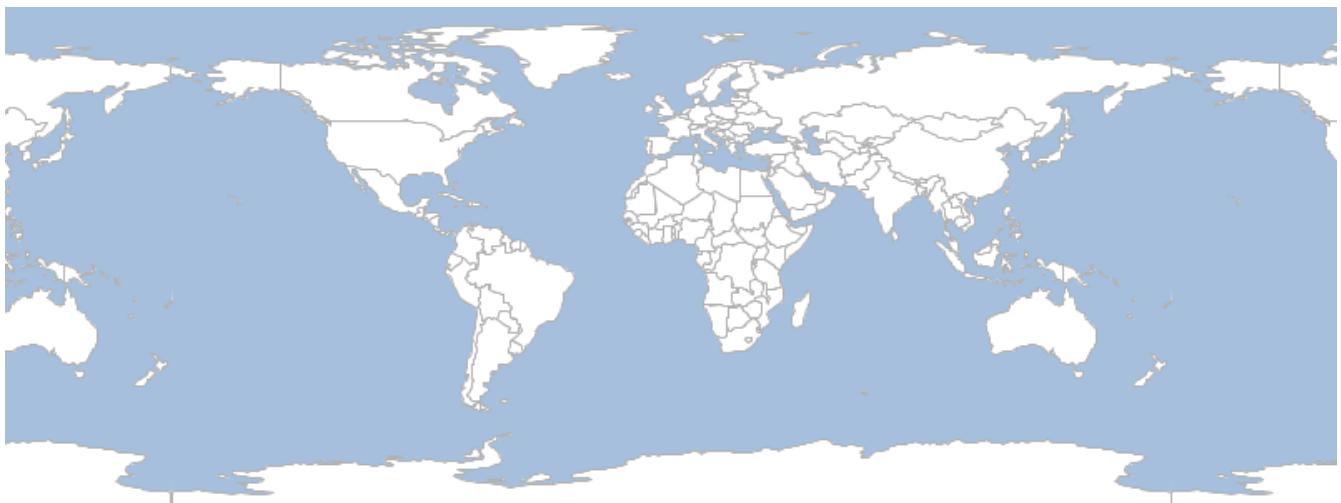

Create a Map with Layers and display in a simple UI.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
map.display()
```

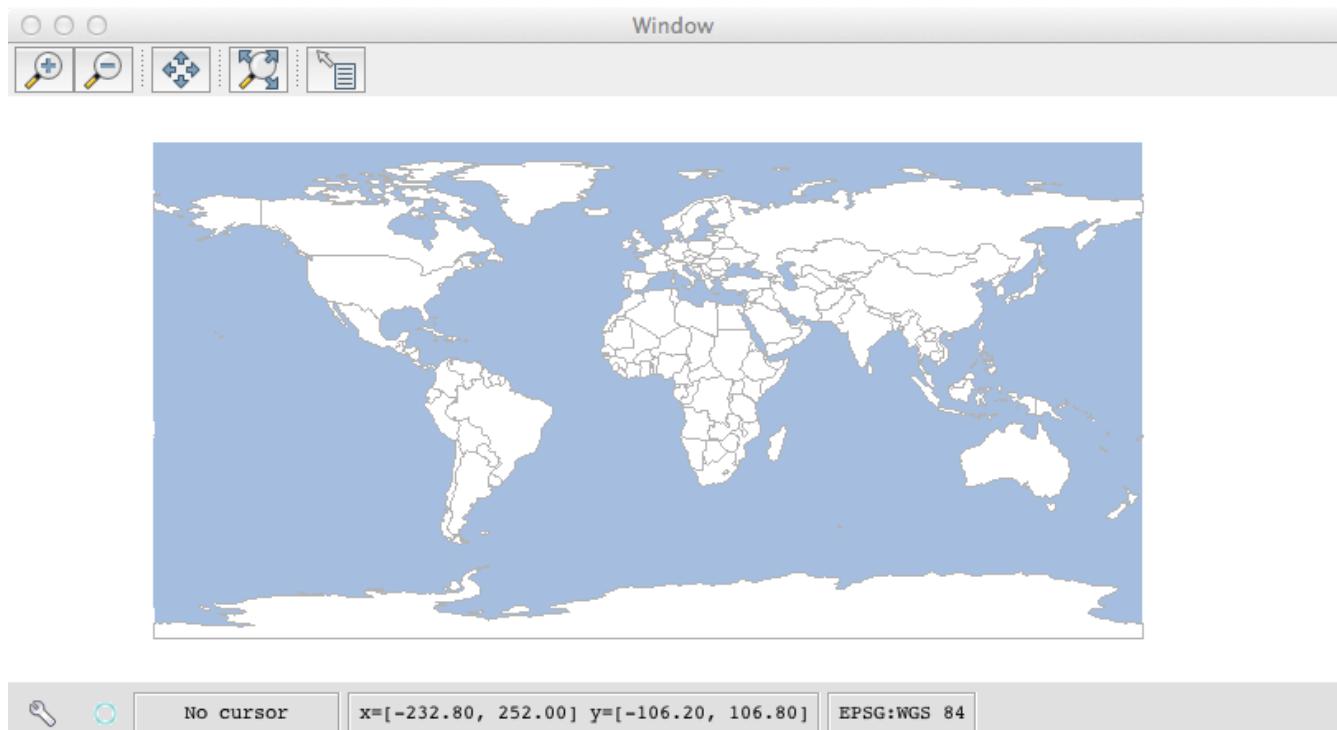

Map Properties

Get Map properties

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Map map = new Map(
    width: 600,
    height: 600,
    backgroundColor: "#a5bfdd",
    layers: [countries],
    type: "png",
    proj: "EPSG:3857",
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    fixAspectRatio: false
)
File file = new File("map.png")
map.render(file)
```



Get width and height

```
int width = map.width  
int height = map.height  
println "Width and Height = ${width} x ${height}"
```

Width and Height = 600 x 600

Get the Bounds

```
Bounds bounds = map.bounds  
println "Bounds = ${bounds}"
```

Bounds = (-2.0037508342789244E7, -1.997186888040857E7, 2.0037508342789244E7, 1.9971868880408563E7, EPSG:3857)

Get the Projection

```
Projection projection = map.proj  
println "Projeciton = ${projection}"
```

Projeciton = EPSG:3857

Get the Layers

```
List<Layer> layers = map.layers  
println "Layers:"  
layers.each { Layer layer ->  
    println "    ${layer.name}"  
}
```

Layers:
countries

Get the renderer type

```
String type = map.type  
println "Type = ${type}"
```

Type = png

Get whether we are fixing the aspect ratio or not.

```
boolean shouldFixAspectRatio = map.fixAspectRatio
println "Fix Aspect Ratio = ${shouldFixAspectRatio}"
```

Fix Aspect Ratio = false

Get the background color

```
String backgroundColor = map.backgroundColor
println "Background Color = ${backgroundColor}"
```

Background Color = #a5bfdd

Get the scale

```
double scale = map.scaleDenominator
println "Scale = ${scale}"
```

Scale = 2.385417659855862E8

Advanced Properties

You can set the scale computation to be accurate (the default) or ogc compliant.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 400,
    height: 300,
    layers: [ocean, countries],
    bounds: new Bounds(-162.070313, 9.968851, -35.507813, 58.995311, "EPSG:4326")
)

map.setScaleComputation("accurate")
File accurateFile = new File("map_accurate.png")
map.render(accurateFile)

map.setScaleComputation("ogc")
File ogcFile = new File("map_ogc.png")
map.render(ogcFile)
```

Accurate



OGC



You can set whether to use advanced projection handling or not. By default this is set to true.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 400,
    height: 300,
    layers: [ocean, countries],
    bounds: new Bounds(-162.070313, 9.968851, -35.507813, 58.995311, "EPSG:4326")
)

map.setAdvancedProjectionHandling(true)
File trueFile = new File("map_advancedproj_true.png")
map.render(trueFile)

map.setAdvancedProjectionHandling(false)
File falseFile = new File("map_advancedproj_false.png")
map.render(falseFile)
```

Yes



No



You can set whether to use continuous map wrapping. The default is true.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 200,
    layers: [ocean, countries]
)

map.setContinuousMapWrapping(true)
File trueFile = new File("map_continuouswrapping_true.png")
map.render(trueFile)

map.setContinuousMapWrapping(false)
File falseFile = new File("map_continuouswrapping_false.png")
map.render(falseFile)
```

Yes




No



Projections


Create a map in the mercator projection

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("black", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd") + new Stroke("black", 0.5)
Layer graticules = workspace.get("graticules")
graticules.style = new Stroke("black", 0.5)
Projection proj = new Projection("Mercator")
Bounds bounds = new Bounds(-179.99, -85.0511, 179.99, 85.0511, "EPSG:4326").reproject
(proj)
Map map = new Map(
    width: 400,
    height: 400,
    proj: proj,
    bounds: bounds,
    layers: [ocean, countries, graticules]
)
File file = new File("map_mercator.png")
map.render(file)
```

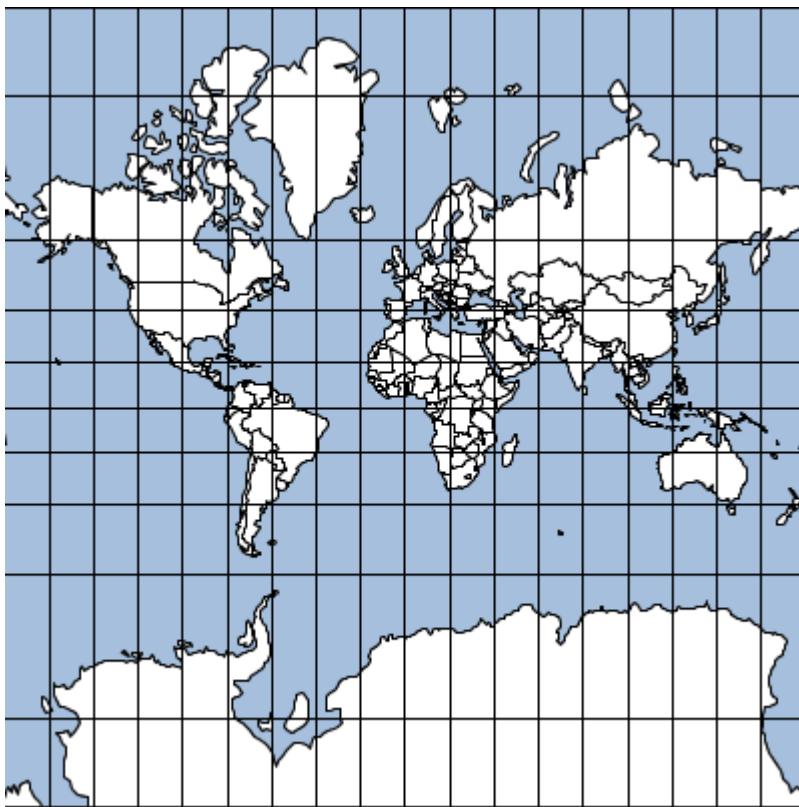


Create a map in the WGS84 projection

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("black", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd") + new Stroke("black", 0.5)
Layer graticules = workspace.get("graticules")
graticules.style = new Stroke("black", 0.5)
Projection proj = new Projection("WGS84")
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326").reproject(proj)
Map map = new Map(
    width: 600,
    height: 350,
    proj: proj,
    bounds: bounds,
    layers: [ocean, countries, graticules]
)
File file = new File("map_wgs84.png")
map.render(file)
```

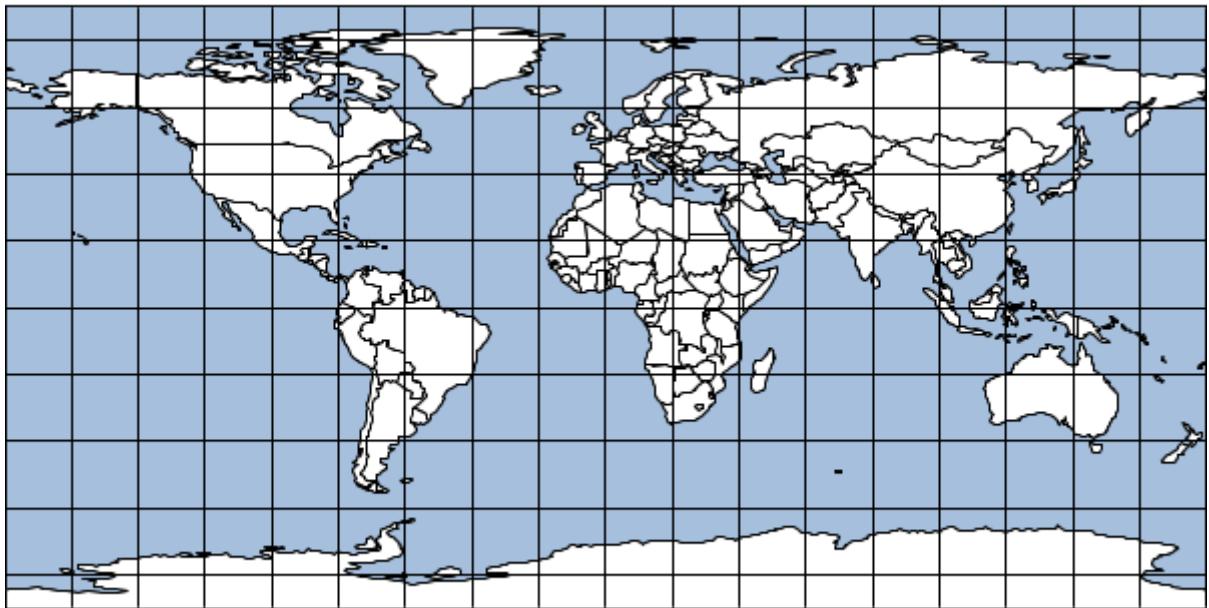


Create a map in the Equal Earth projection

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("black", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd") + new Stroke("black", 0.5)
Layer graticules = workspace.get("graticules")
graticules.style = new Stroke("black", 0.5)
Projection proj = new Projection("EqualEarth")
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326").reproject(proj)
Map map = new Map(
    width: 600,
    height: 350,
    proj: proj,
    bounds: bounds,
    layers: [ocean, countries, graticules]
)
File file = new File("map_equalearth.png")
map.render(file)
```

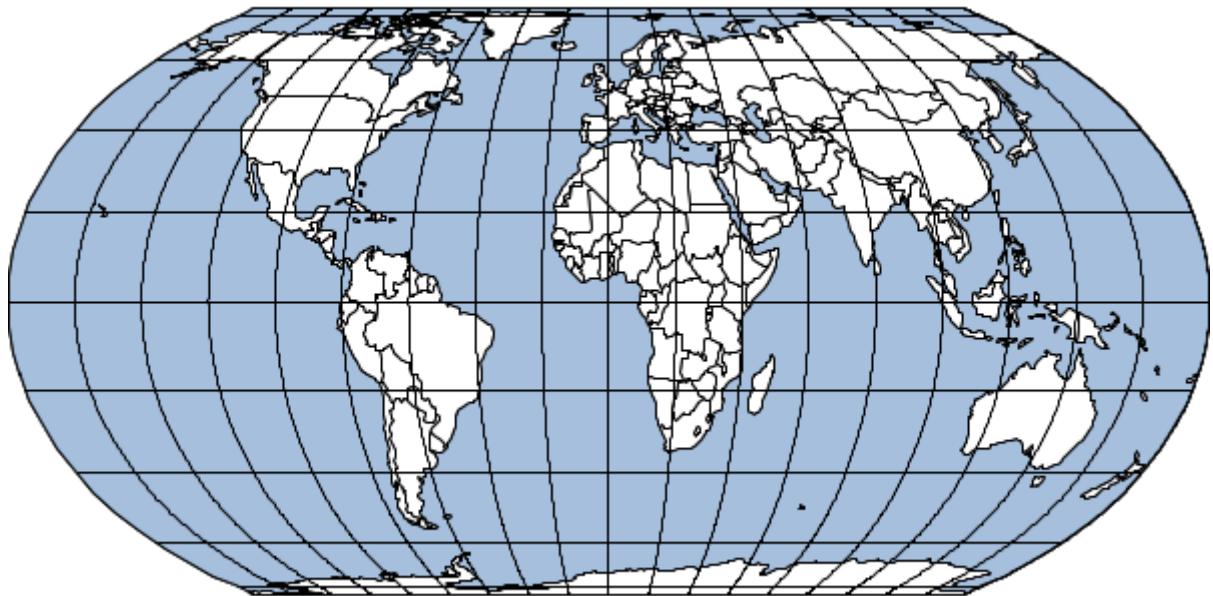


Create a map in the Mollweide projection

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("black", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd") + new Stroke("black", 0.5)
Layer graticules = workspace.get("graticules")
graticules.style = new Stroke("black", 0.5)
Projection proj = new Projection("Mollweide")
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326").reproject(proj)
Map map = new Map(
    width: 600,
    height: 350,
    proj: proj,
    bounds: bounds,
    layers: [ocean, countries, graticules]
)
File file = new File("map_mollweide.png")
map.render(file)
```

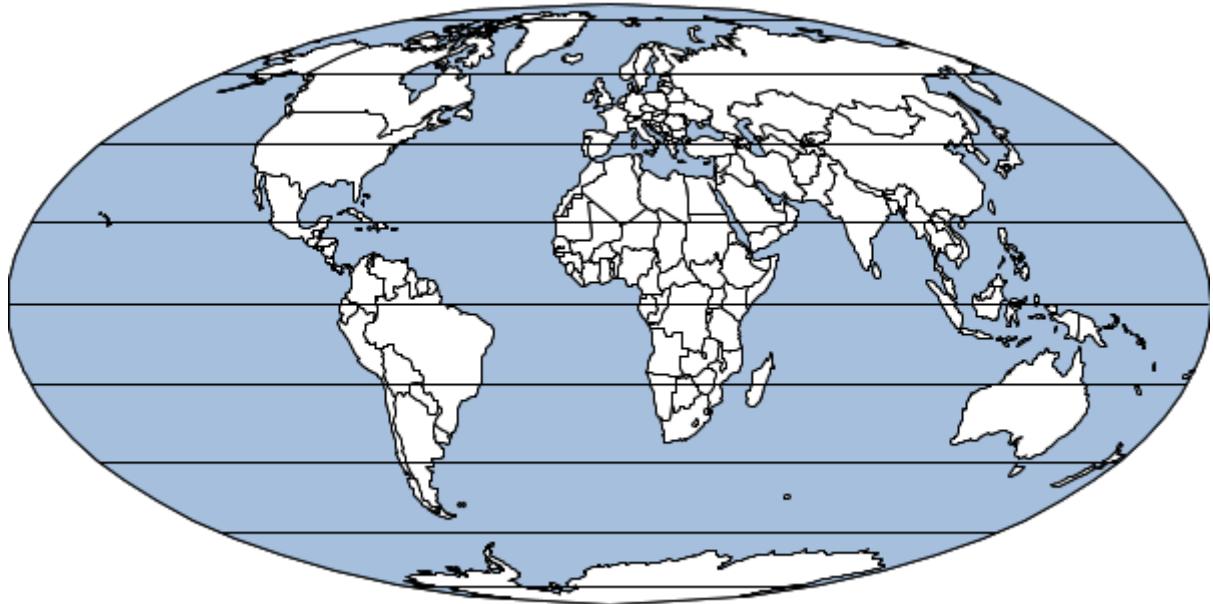


Create a map in the Aitoff projection

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("black", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd") + new Stroke("black", 0.5)
Layer graticules = workspace.get("graticules")
graticules.style = new Stroke("black", 0.5)
Projection proj = new Projection("Aitoff")
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326").reproject(proj)
Map map = new Map(
    width: 600,
    height: 350,
    proj: proj,
    bounds: bounds,
    layers: [ocean, countries, graticules]
)
File file = new File("map_aitoff.png")
map.render(file)
```

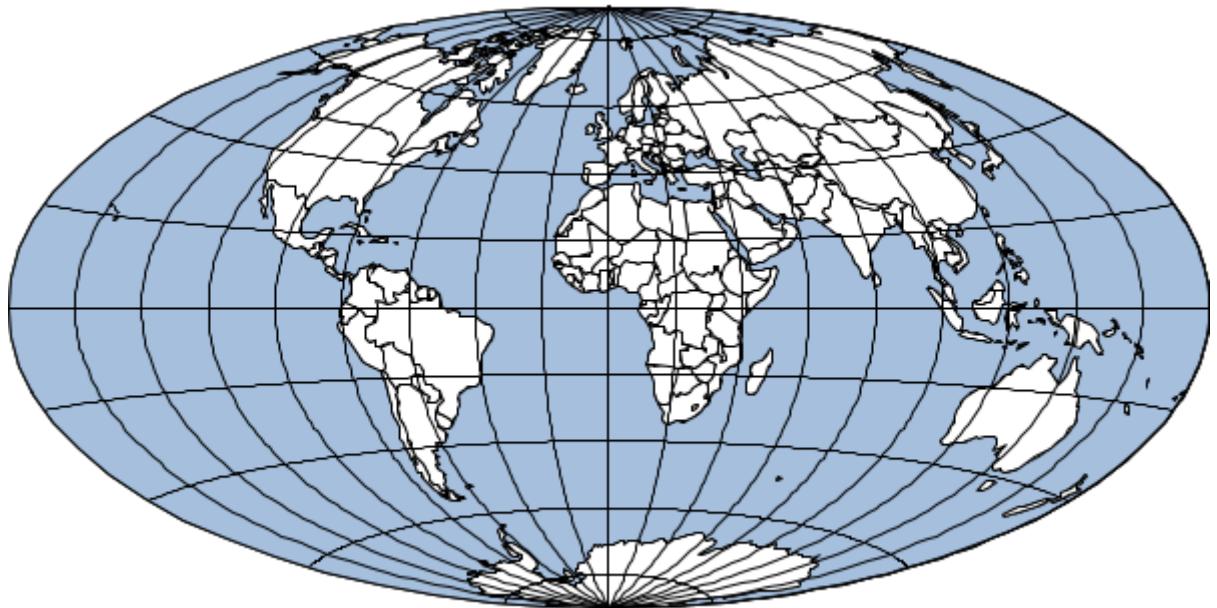


Create a map in the Eckert IV projection

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("black", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd") + new Stroke("black", 0.5)
Layer graticules = workspace.get("graticules")
graticules.style = new Stroke("black", 0.5)
Projection proj = new Projection("EckertIV")
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326").reproject(proj)
Map map = new Map(
    width: 600,
    height: 350,
    proj: proj,
    bounds: bounds,
    layers: [ocean, countries, graticules]
)
File file = new File("map_eckertIV.png")
map.render(file)
```

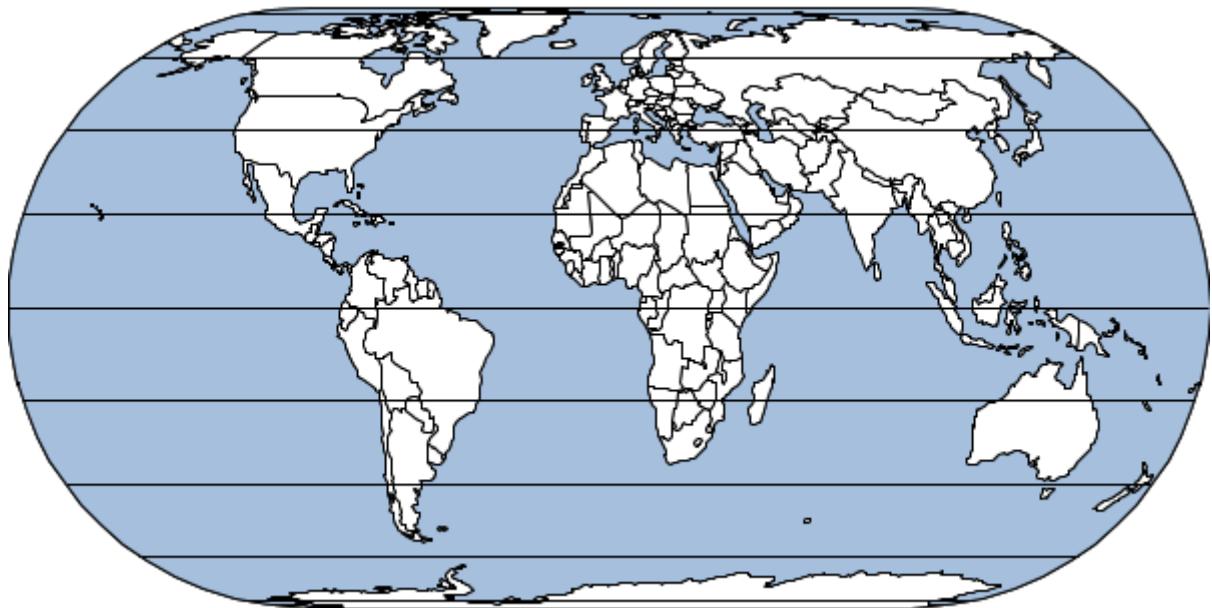


Create a map in the Wagner IV projection

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("black", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd") + new Stroke("black", 0.5)
Layer graticules = workspace.get("graticules")
graticules.style = new Stroke("black", 0.5)
Projection proj = new Projection("WagnerIV")
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326").reproject(proj)
Map map = new Map(
    width: 600,
    height: 350,
    proj: proj,
    bounds: bounds,
    layers: [ocean, countries, graticules]
)
File file = new File("map_wagnerIV.png")
map.render(file)
```

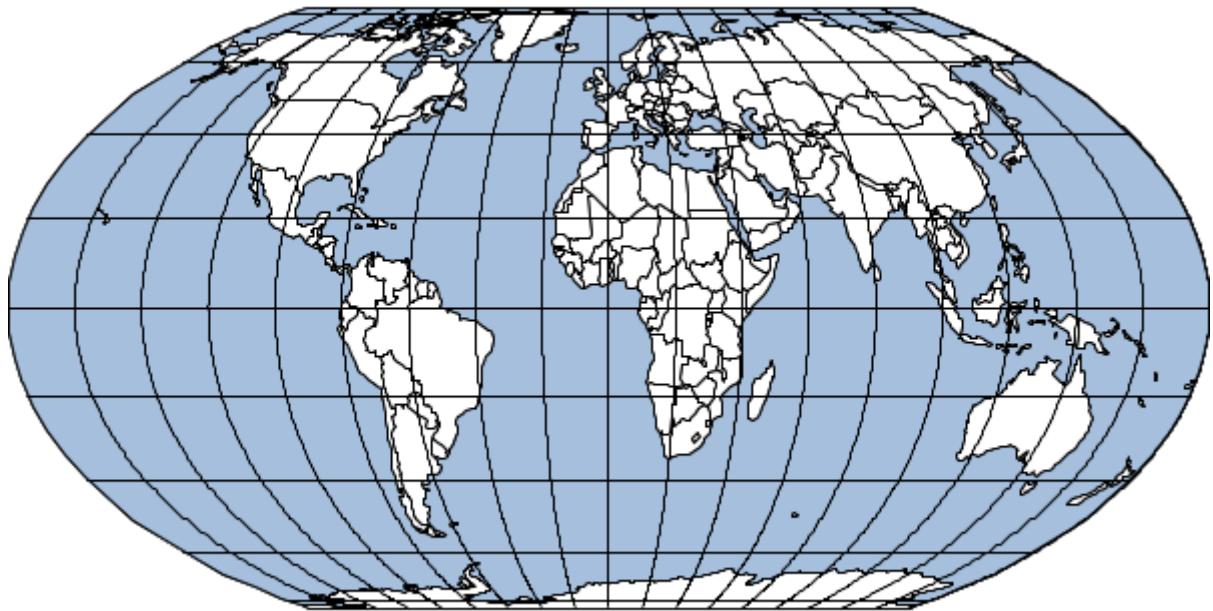


Create a map in the Robinson projection

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("black", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd") + new Stroke("black", 0.5)
Layer graticules = workspace.get("graticules")
graticules.style = new Stroke("black", 0.5)
Projection proj = new Projection("Robinson")
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326").reproject(proj)
Map map = new Map(
    width: 600,
    height: 350,
    proj: proj,
    bounds: bounds,
    layers: [ocean, countries, graticules]
)
File file = new File("map_robinson.png")
map.render(file)
```

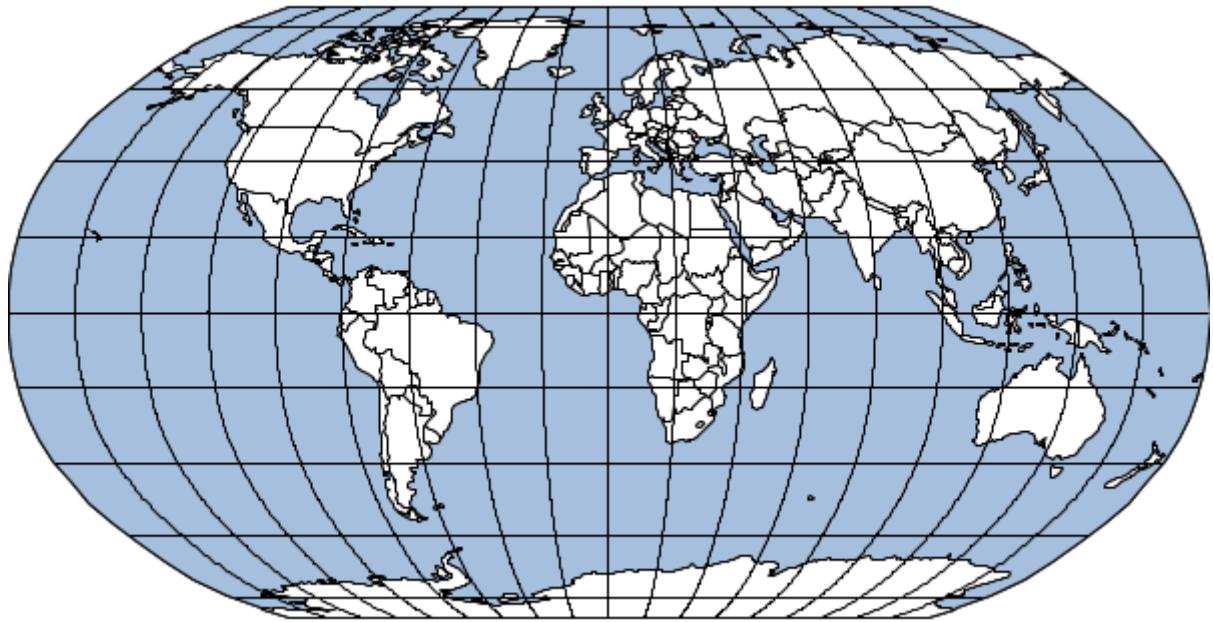


Create a map in the Winkel Tripel projection

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("black", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd") + new Stroke("black", 0.5)
Layer graticules = workspace.get("graticules")
graticules.style = new Stroke("black", 0.5)
Projection proj = new Projection("WinkelTripel")
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326").reproject(proj)
Map map = new Map(
    width: 600,
    height: 350,
    proj: proj,
    bounds: bounds,
    layers: [ocean, countries, graticules]
)
File file = new File("map_winkeltripel.png")
map.render(file)
```

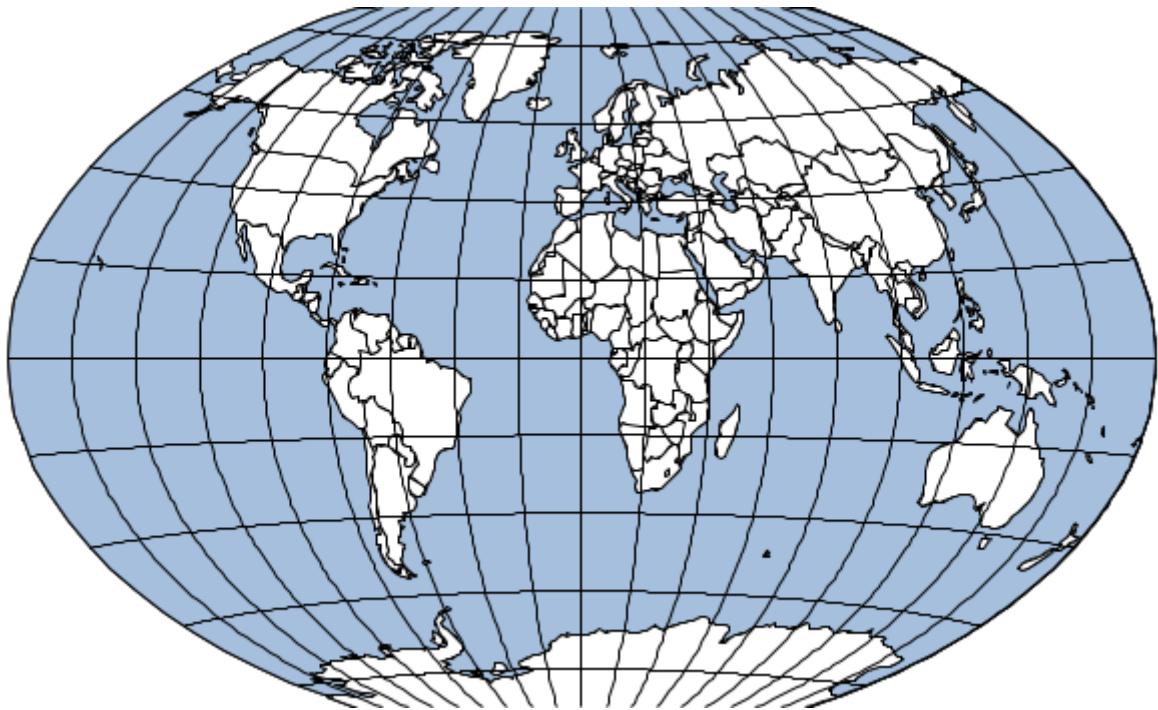

Create a map in the World Vander Grinten I projection

```
Workspace workspace = new Directory('src/main/resources/shapefiles')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("black", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd") + new Stroke("black", 0.5)
Layer graticules = workspace.get("graticules")
graticules.style = new Stroke("black", 0.5)
Projection proj = new Projection("WorldVanderGrintenI")
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326").reproject(proj)
Map map = new Map(
    width: 600,
    height: 350,
    proj: proj,
    bounds: bounds,
    layers: [ocean, countries, graticules]
)
File file = new File("map_worldVanderGrintenIMap.png")
map.render(file)
```

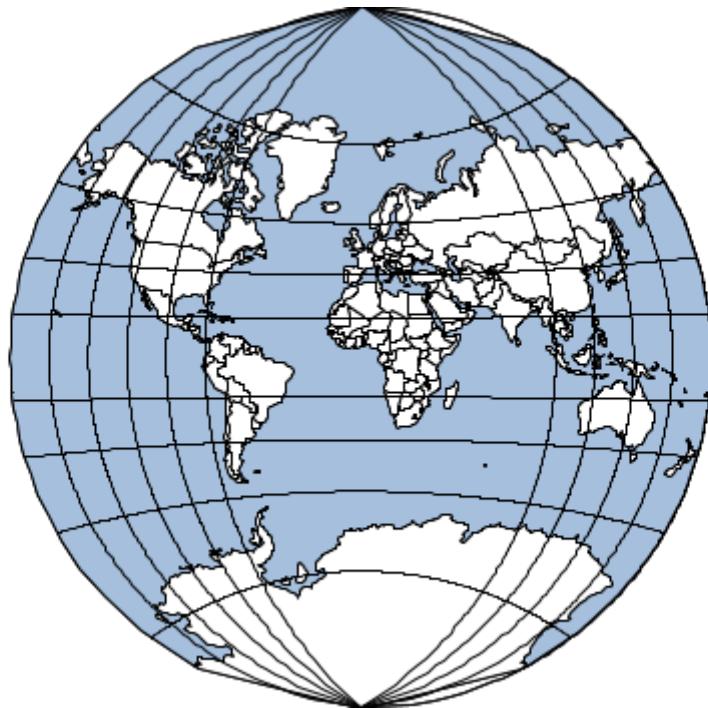

Map Cubes


Create a map cube to a file

```
Workspace workspace = new Directory("src/main/resources/shapefiles")
Layer countries = workspace.get("countries")
Layer ocean = workspace.get("ocean")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
ocean.style = new Fill("#a5bfdd")

MapCube mapCube = new MapCube(
    drawOutline: true,
    drawTabs: true,
    tabSize: 30,
    title: "World Cube",
    source: "Nartual Earth",
    imageType: "png"
)
File file = new File("target/map_cube_file.png")
mapCube.render([ocean, countries], file)
```

World Cube


Natural Earth

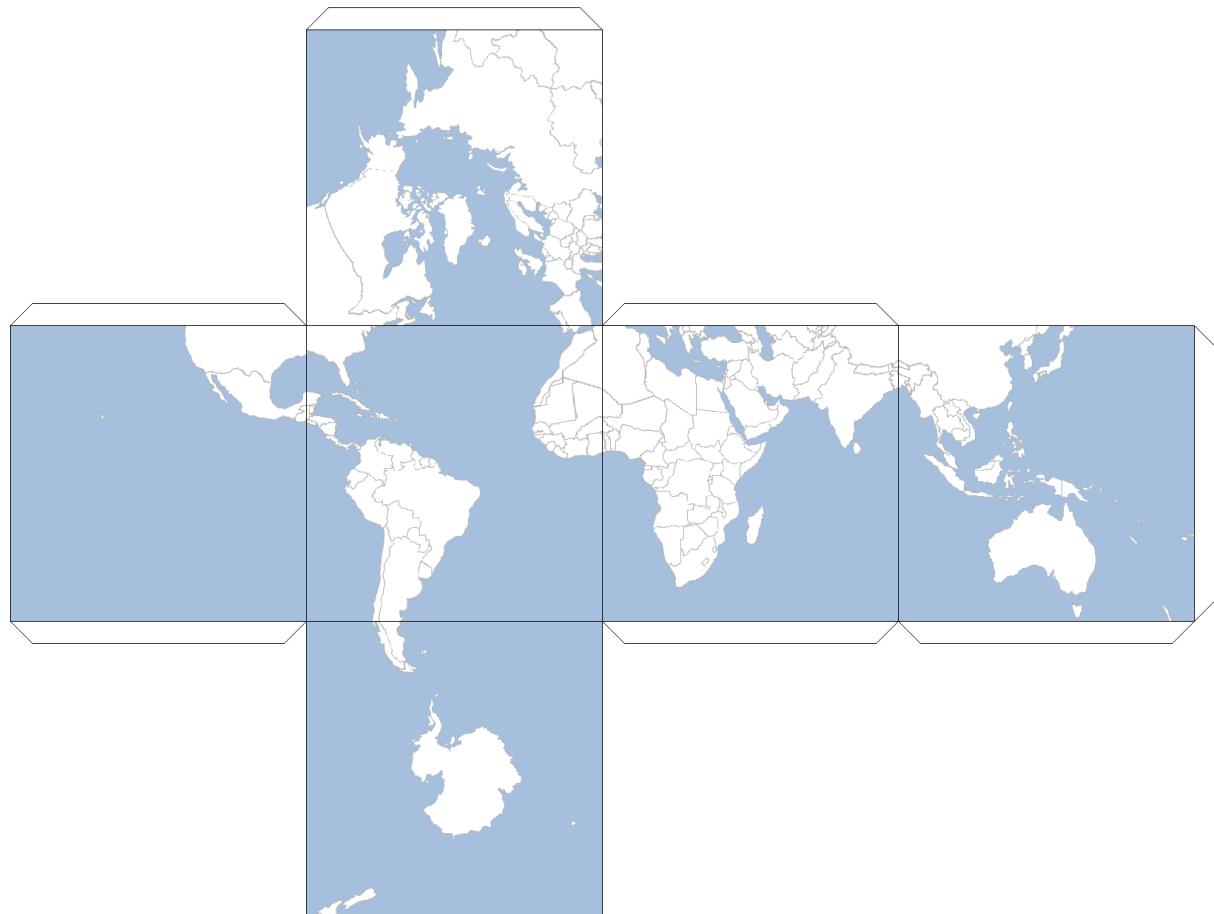

Create a map cube to a byte array

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")


MapCube mapCube = new MapCube()
byte[] bytes = mapCube.render([ocean, countries])
```

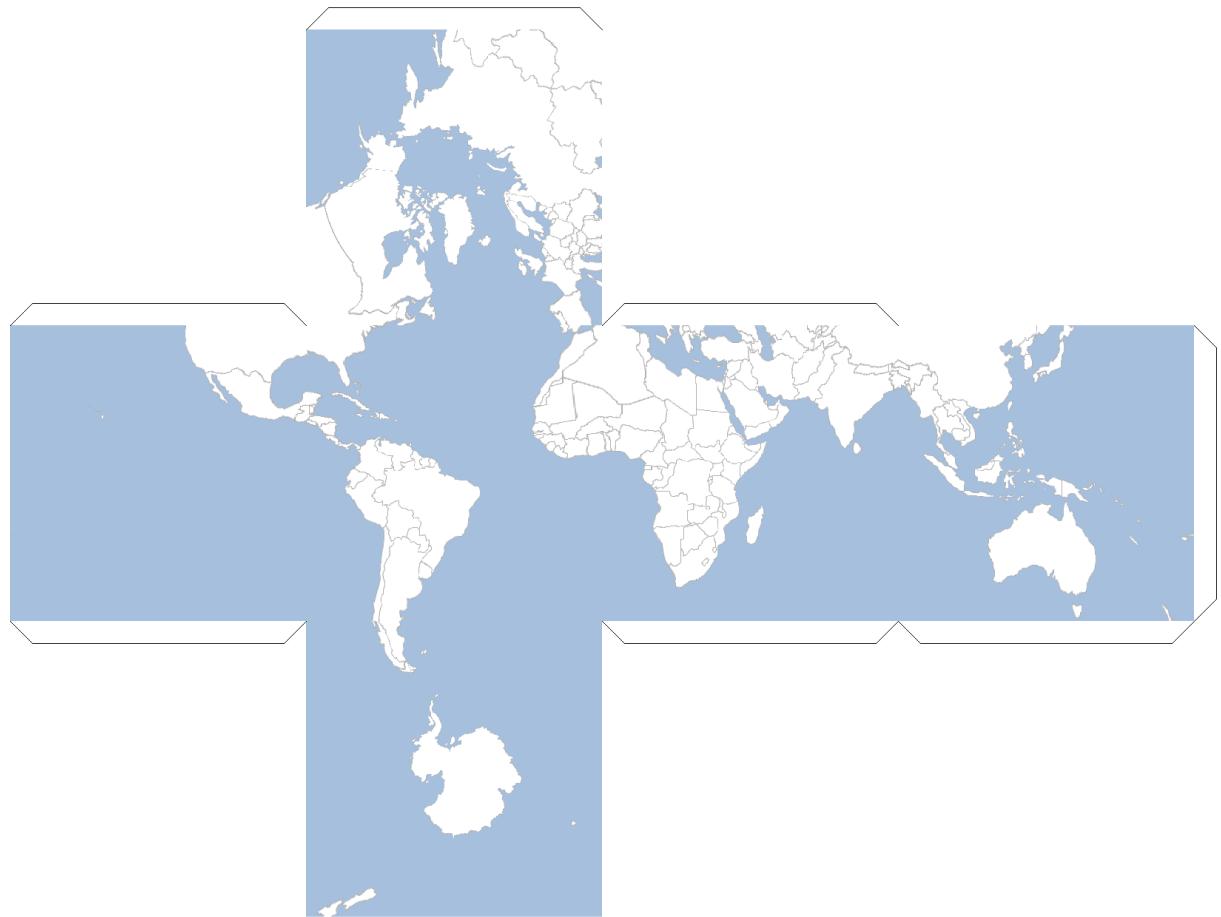

Create a map cube to a byte array

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")

MapCube mapCube = new MapCube()
File file = new File("target/map_cube_stream.png")
file.withOutputStream { OutputStream outputStream ->
    mapCube.render([ocean, countries], outputStream)
}
```

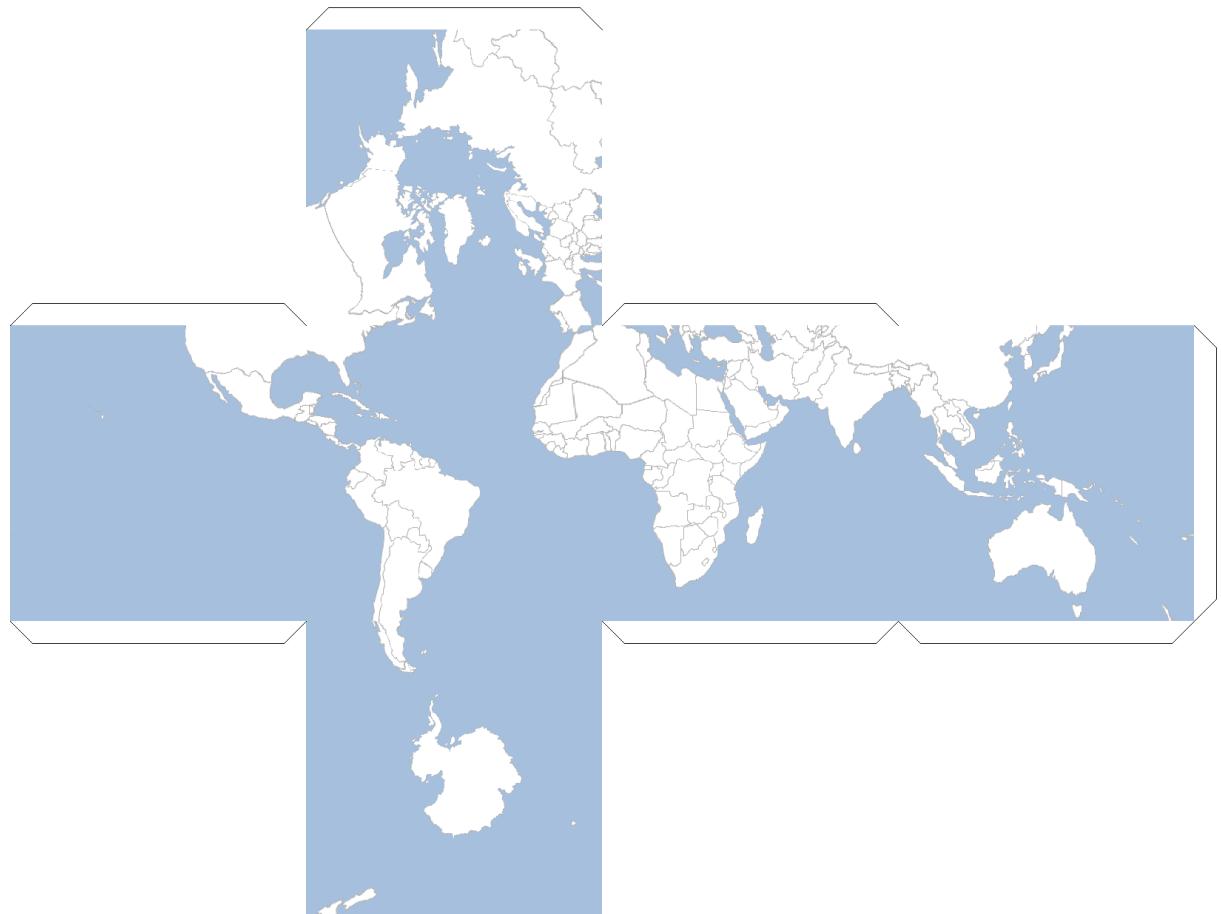

Rendering Maps

Finding Renderers

Get all Renderers

```
List<Renderer> renderers = Renderers.list()
renderers.each { Renderer renderer ->
    println renderer.className
}
```

ASCII
Base64
GeoTIFF
GIF
JPEG
Pdf
PNG
Svg

Get a Renderer


```
Renderer renderer = Renderers.find("png")
println renderer.className
```

PNG

Image

Render a Map to an image using an Image Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Image png = new Image("png")
BufferedImage image = png.render(map)
```

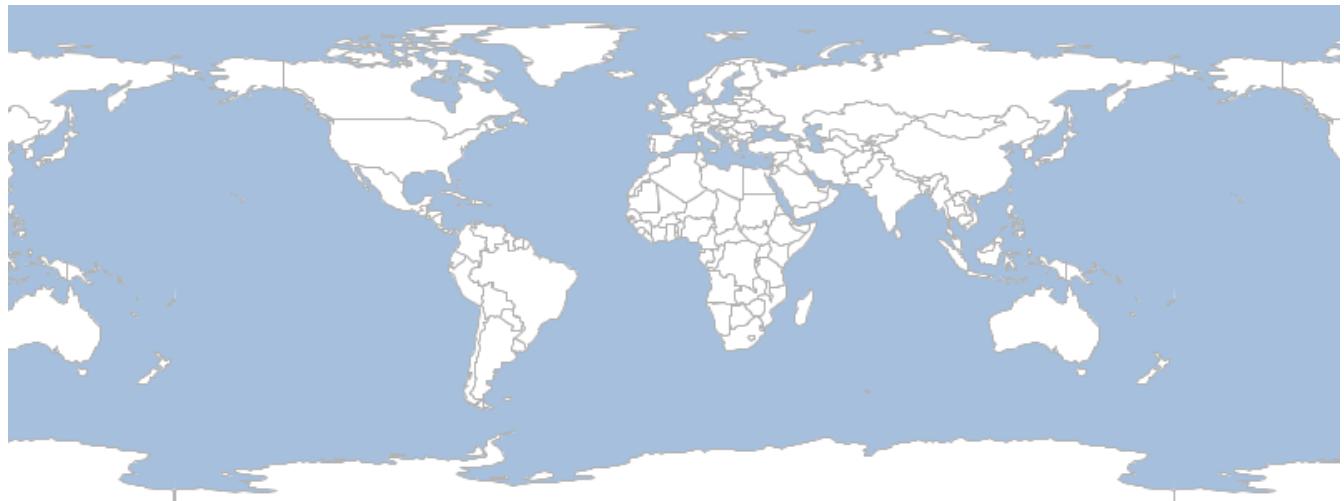

Render a Map to an OutputStream using the Image Renderer


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Image jpeg = new Image("jpeg")
File file = new File("map.jpeg")
FileOutputStream out = new FileOutputStream(file)
jpeg.render(map, out)
out.close()
```



PNG


Render a Map to an Image using the PNG Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
PNG png = new PNG()
BufferedImage image = png.render(map)
```

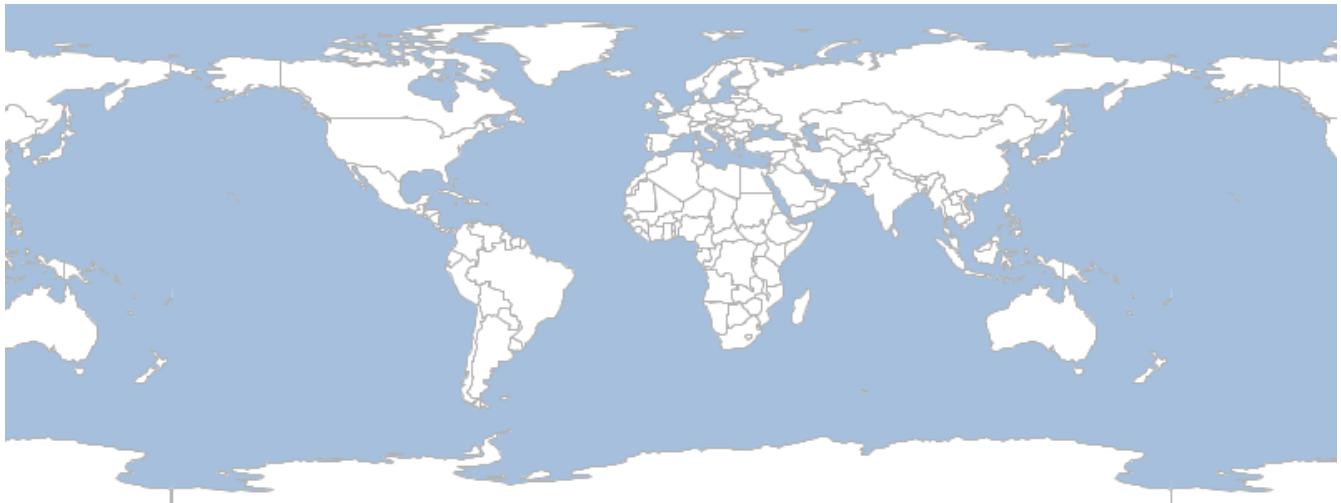

Render a Map to an OutputStream using the PNG Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
PNG png = new PNG()
File file = new File("map.png")
FileOutputStream out = new FileOutputStream(file)
png.render(map, out)
out.close()
```

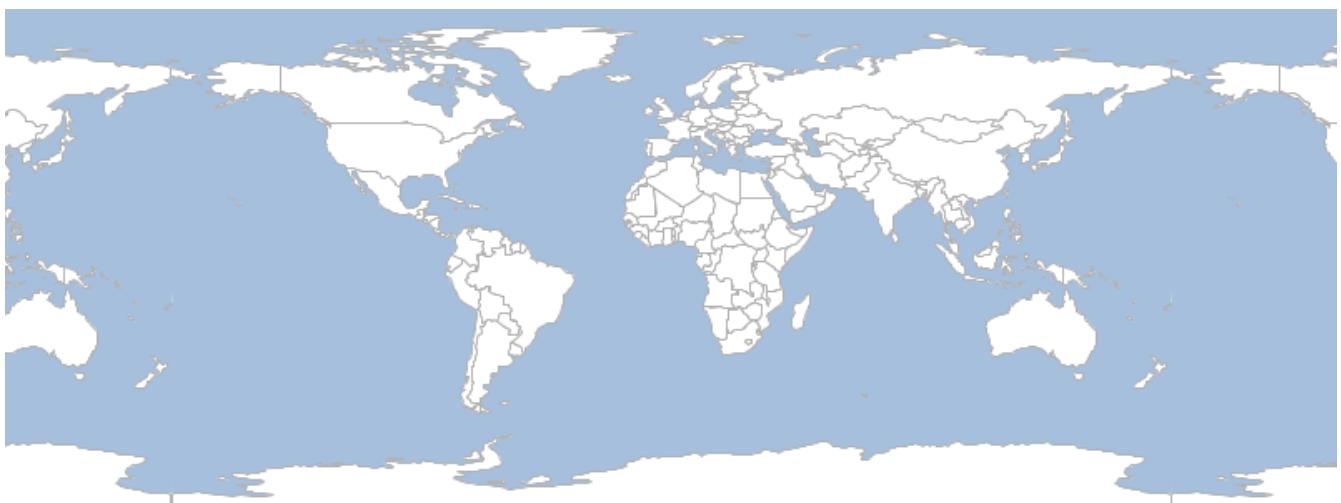

JPEG


Render a Map to an Image using the JPEG Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
JPEG jpeg = new JPEG()
BufferedImage image = jpeg.render(map)
```



Render a Map to an OutputStream using the JPEG Renderer


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
JPEG jpeg = new JPEG()
File file = new File("map.jpeg")
FileOutputStream out = new FileOutputStream(file)
jpeg.render(map, out)
out.close()
```

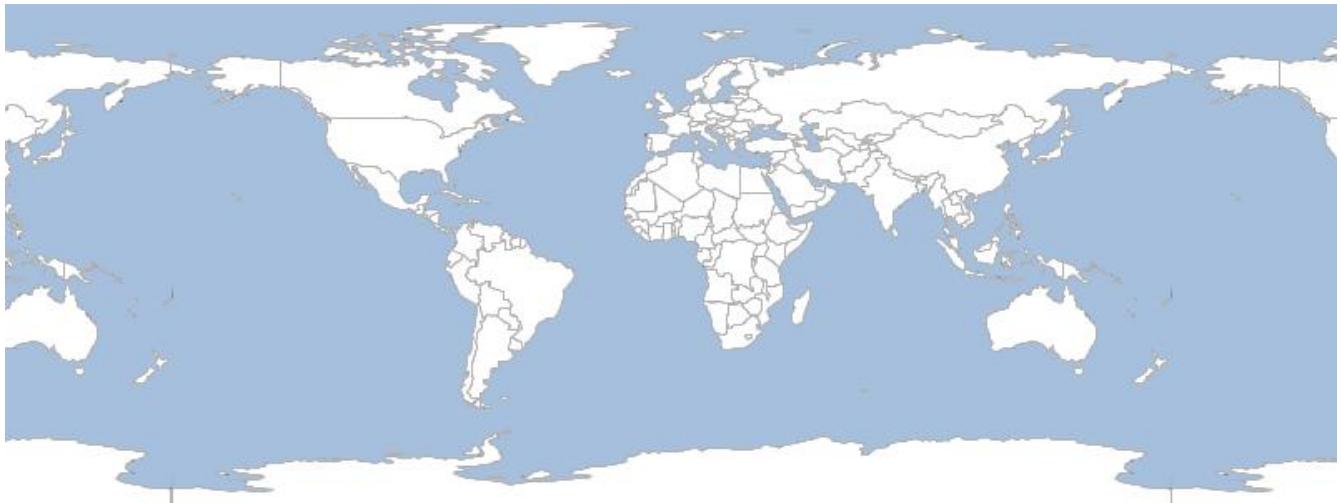

GIF


Render a Map to an Image using the GIF Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
GIF gif = new GIF()
BufferedImage image = gif.render(map)
```

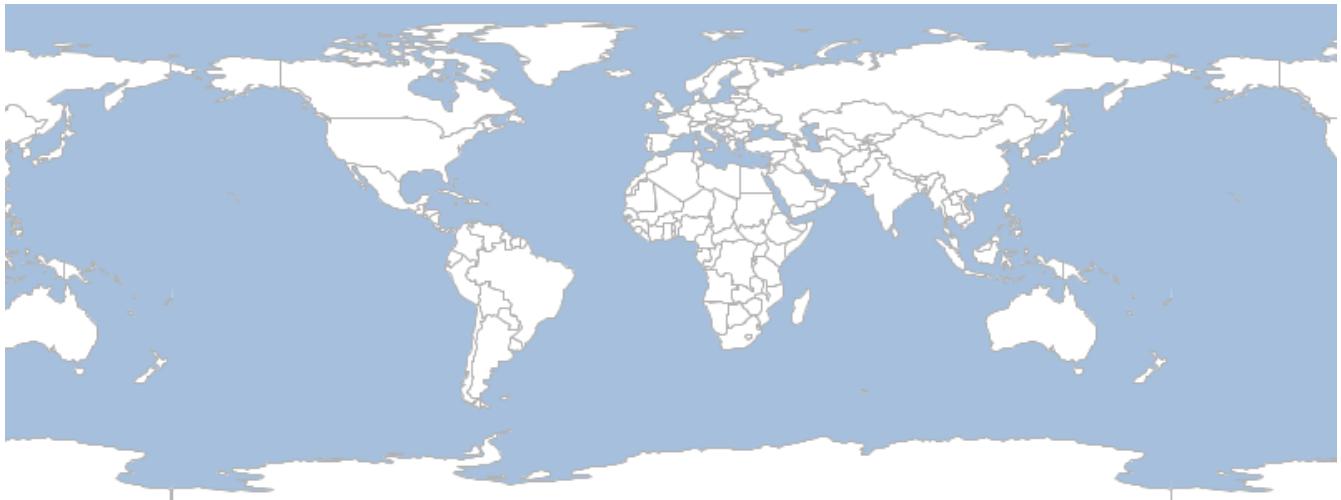

Render a Map to an OutputStream using the GIF Renderer


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
GIF gif = new GIF()
File file = new File("map.gif")
gif.render(map, new FileOutputStream(file))
```

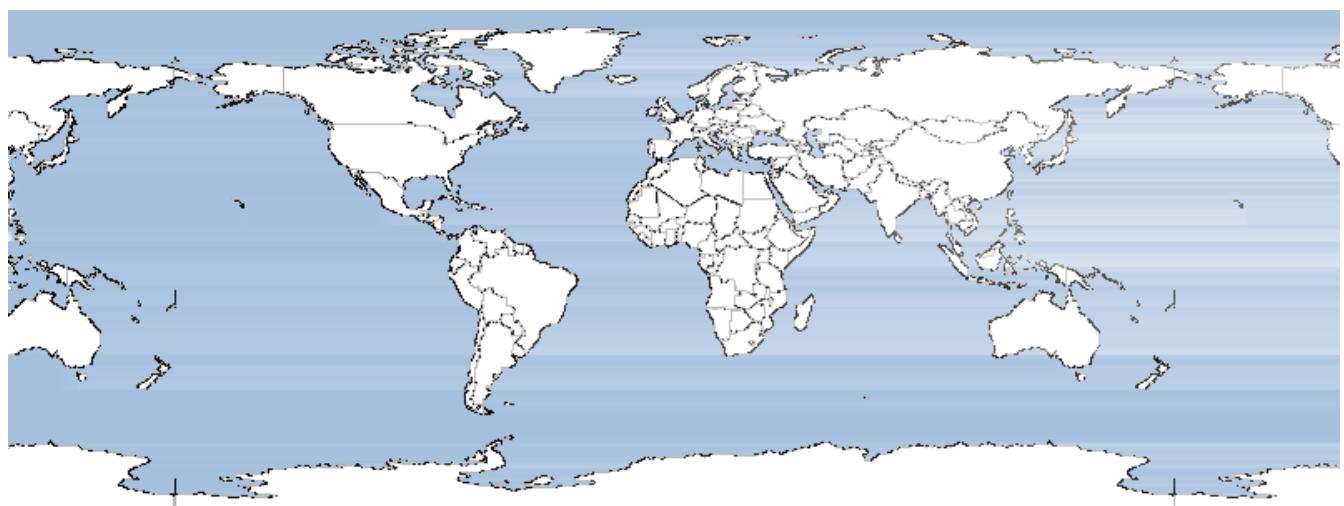


Render a Map to an animated GIF using the GIF Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer states = workspace.get("states")
states.style = new Fill("") + new Stroke("black", 1.0)
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries, states]
)

GIF gif = new GIF()
List images = ["Washington", "Oregon", "California"].collect { String state ->
    map.bounds = states.getFeatures("name = '${state}'")[0].bounds
    def image = gif.render(map)
    image
}
File file = new File("states.gif")
gif.renderAnimated(images, file, 500, true)
```



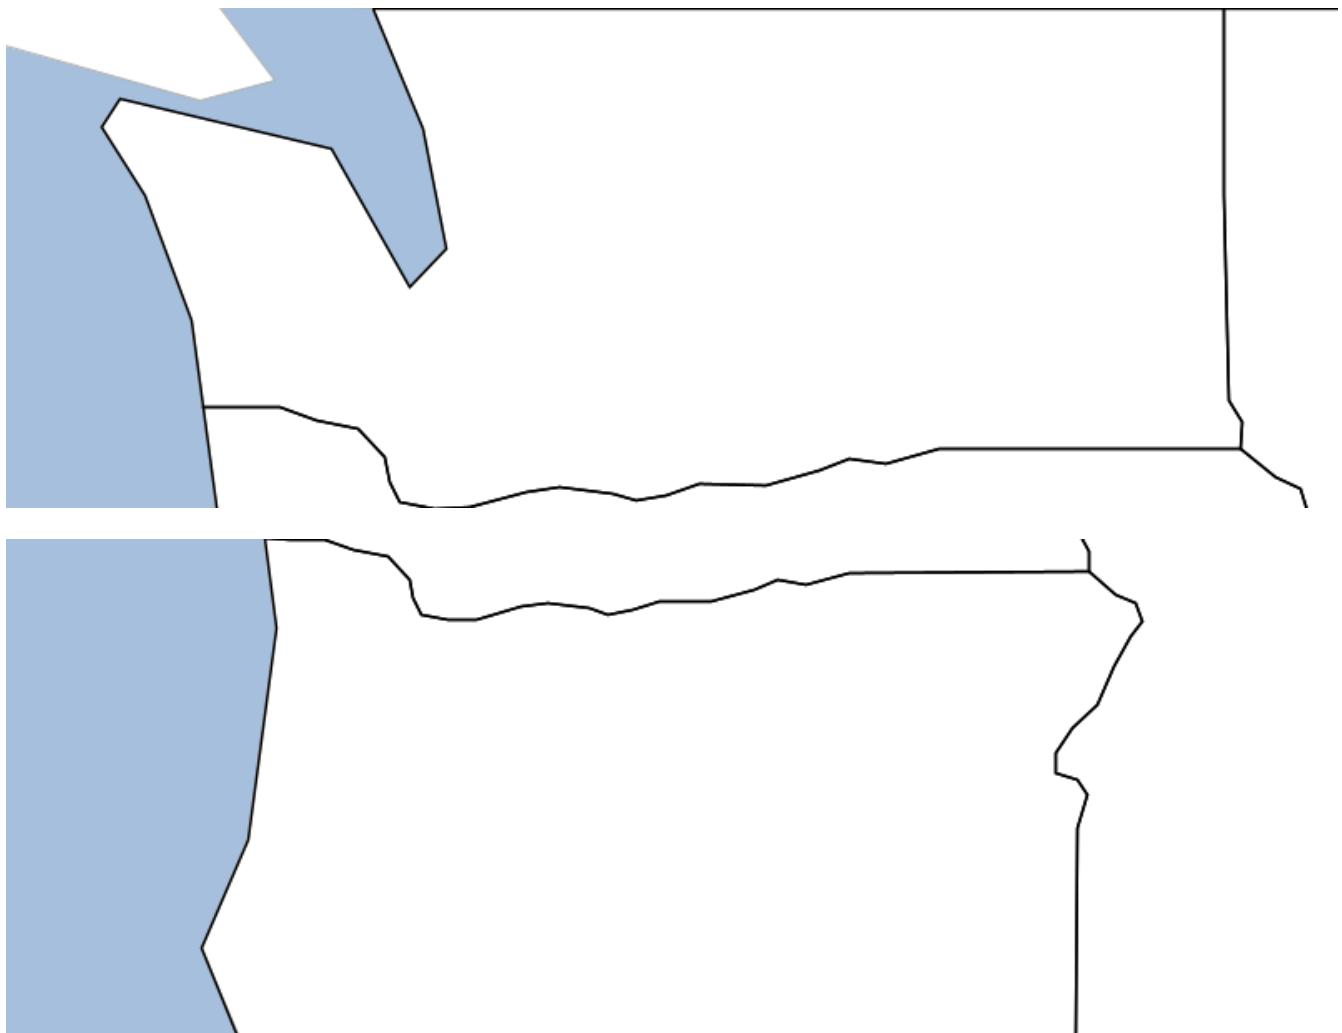


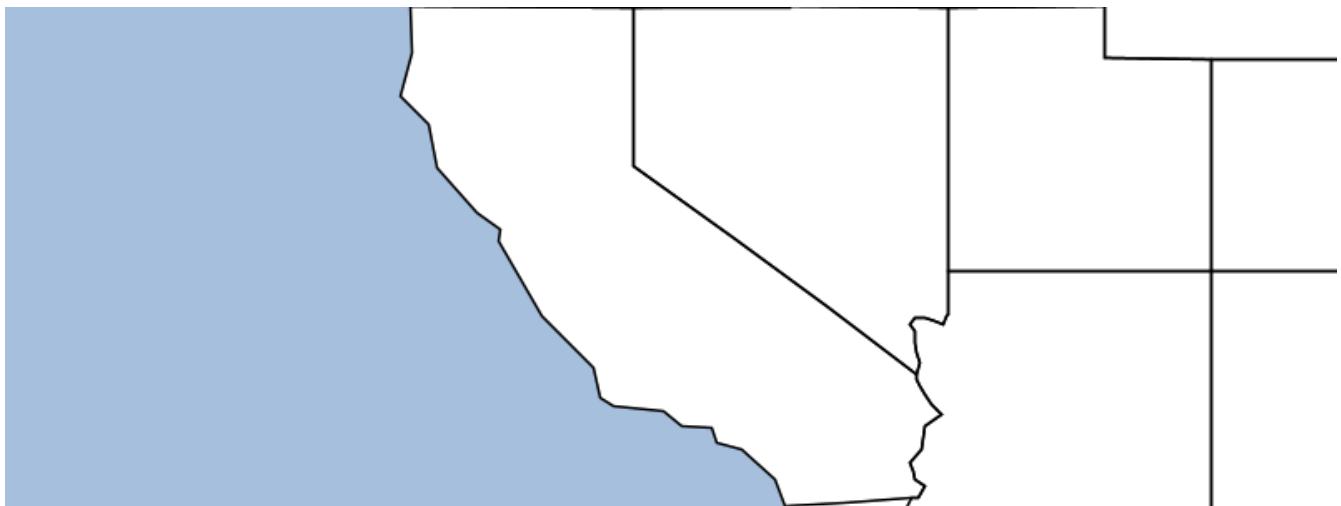

Render a Map to an animated GIF to a byte array using the GIF Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer states = workspace.get("states")
states.style = new Fill("") + new Stroke("black", 1.0)
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries, states]
)


GIF gif = new GIF()
List images = ["Washington", "Oregon", "California"].collect { String state ->
    map.bounds = states.getFeatures("name = '${state}'")[0].bounds
    def image = gif.render(map)
    image
}
File file = new File("states.gif")
byte[] bytes = gif.renderAnimated(images, 500, true)
file.bytes = bytes
```

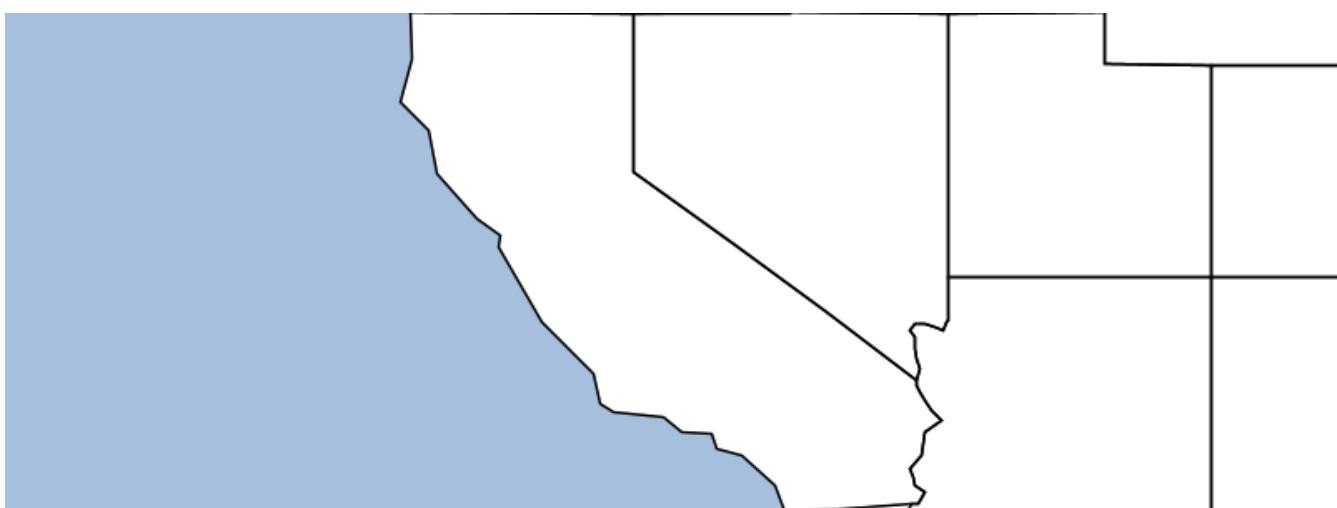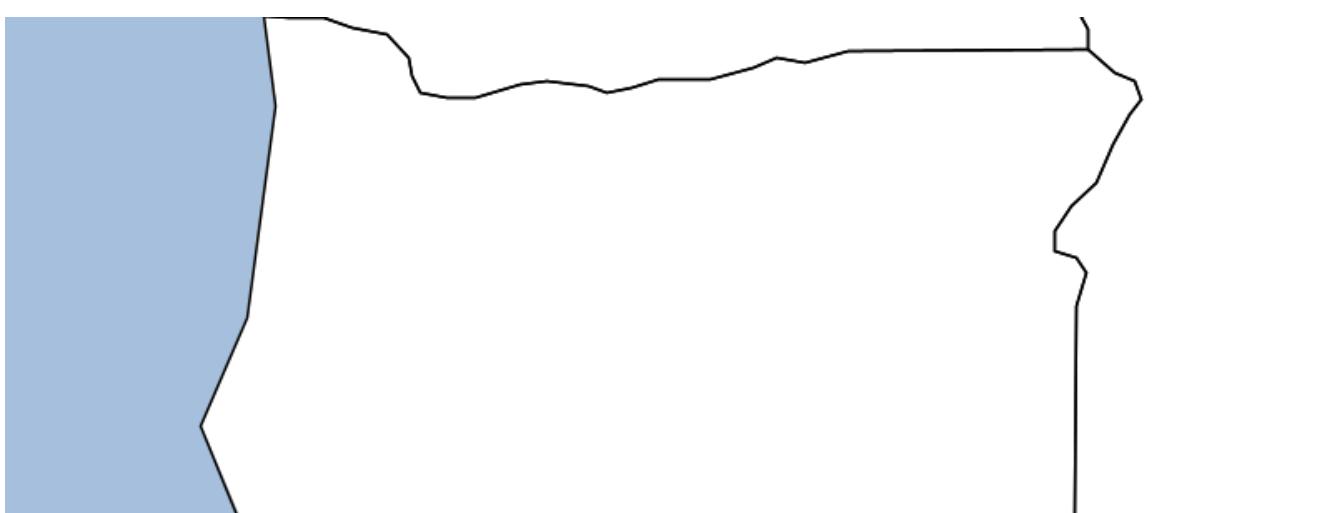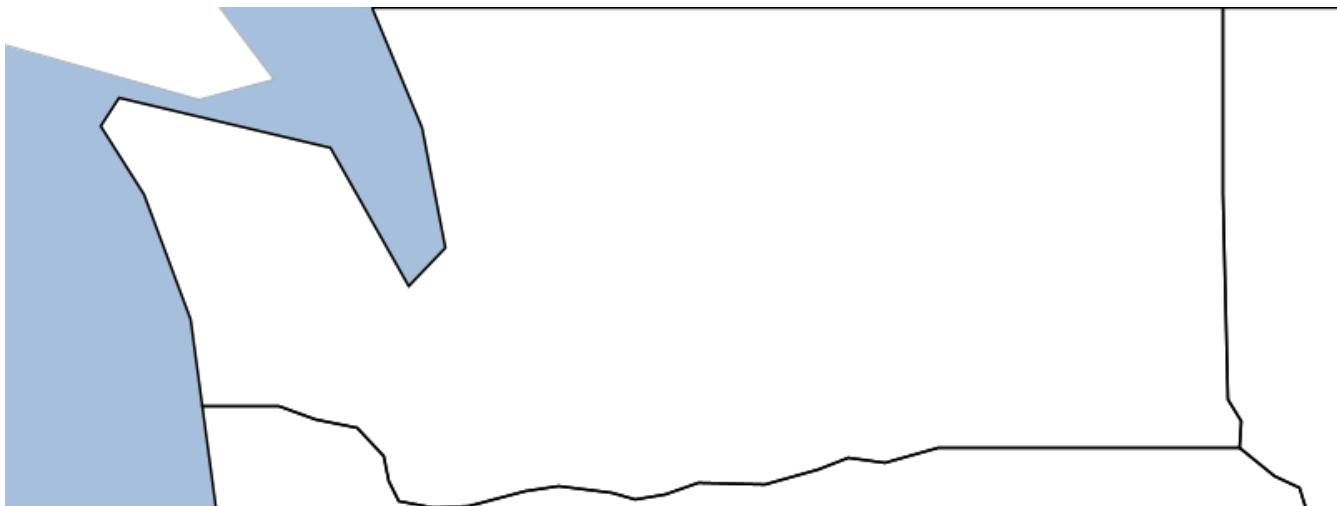

GeoTIFF


Render a Map to an Image using the GeoTIFF Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
GeoTIFF geotiff = new GeoTIFF()
BufferedImage image = geotiff.render(map)
```

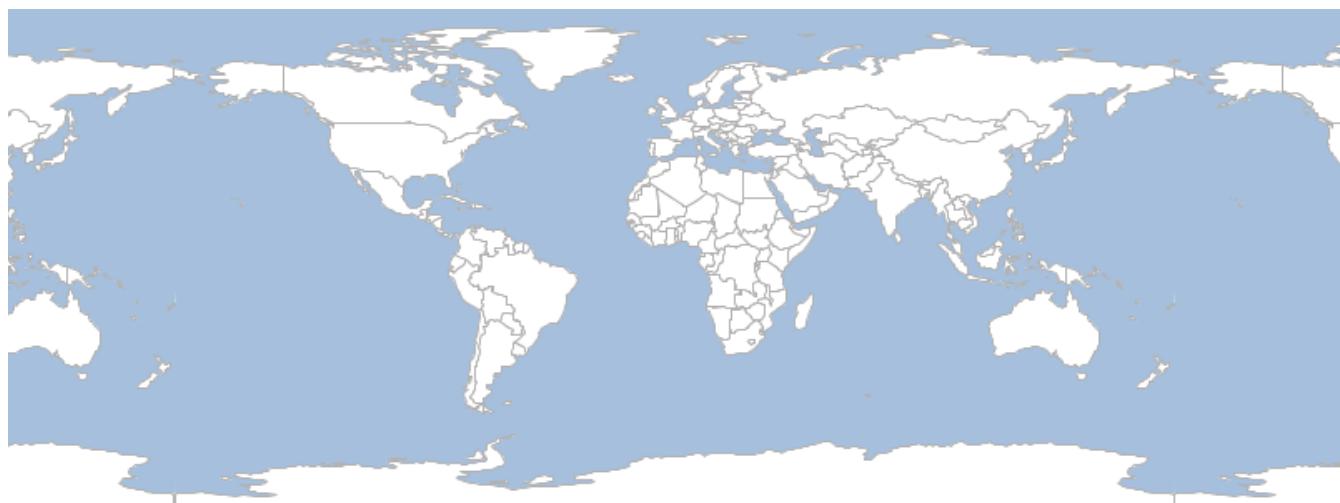

Render a Map to an OutputStream using the GeoTIFF Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
GeoTIFF geotiff = new GeoTIFF()
File file = new File("map.tif")
geotiff.render(map, new FileOutputStream(file))
```

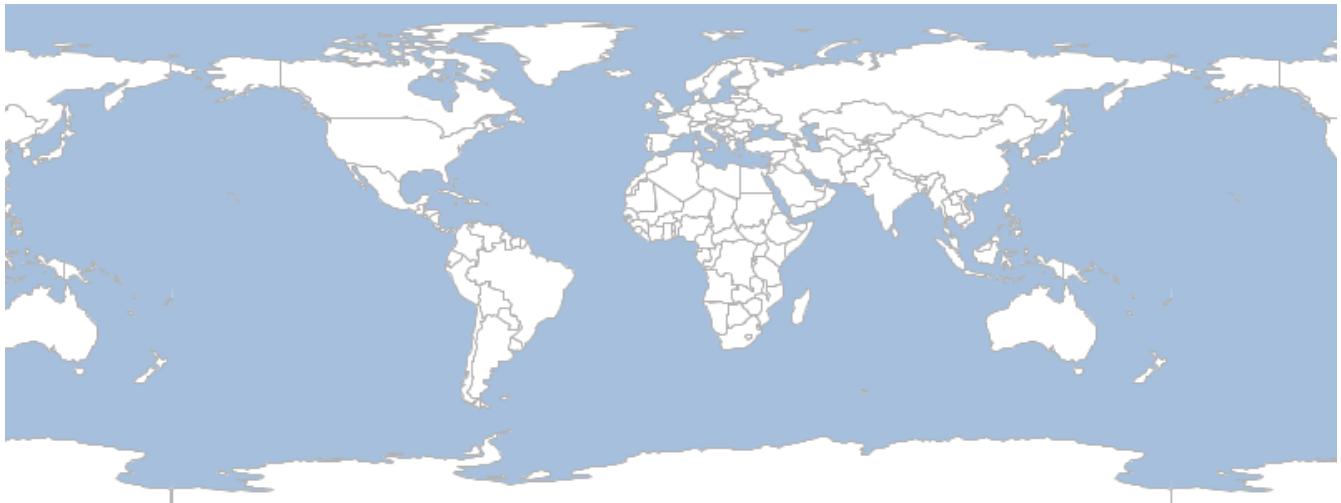

ASCII

Render a Map to an string using the ASCII Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
ASCII ascii = new ASCII(width: 60)
String asciiStr = ascii.render(map)
println asciiStr
```

Render a Map to an text file using the ASCII Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
ASCII ascii = new ASCII(width: 60)
File file = new File("map.txt")
FileOutputStream out = new FileOutputStream(file)
ascii.render(map, out)
out.close()
```

Base64

Render a Map to an string using the Base64 Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Base64 base64 = new Base64()
String base64Str = base64.render(map)
println base64Str
```

image/png;base64,iVBORw0KGgoAAAANSUhEUqAAAYAAAAEsC...

Render a Map to an text file using the Base64 Renderer


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Base64 base64 = new Base64()
File file = new File("map.txt")
base64.render(map, new FileOutputStream(file))
```

```
iVBORw0KGgoAAAANSUhEUgAAAYAAAAEsCAYAAAA7Ldc6AACAAE...
```

PDF


Render a Map to a PDF Document using the PDF Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Pdf pdf = new Pdf()
com.lowagie.text.Document document = pdf.render(map)
```

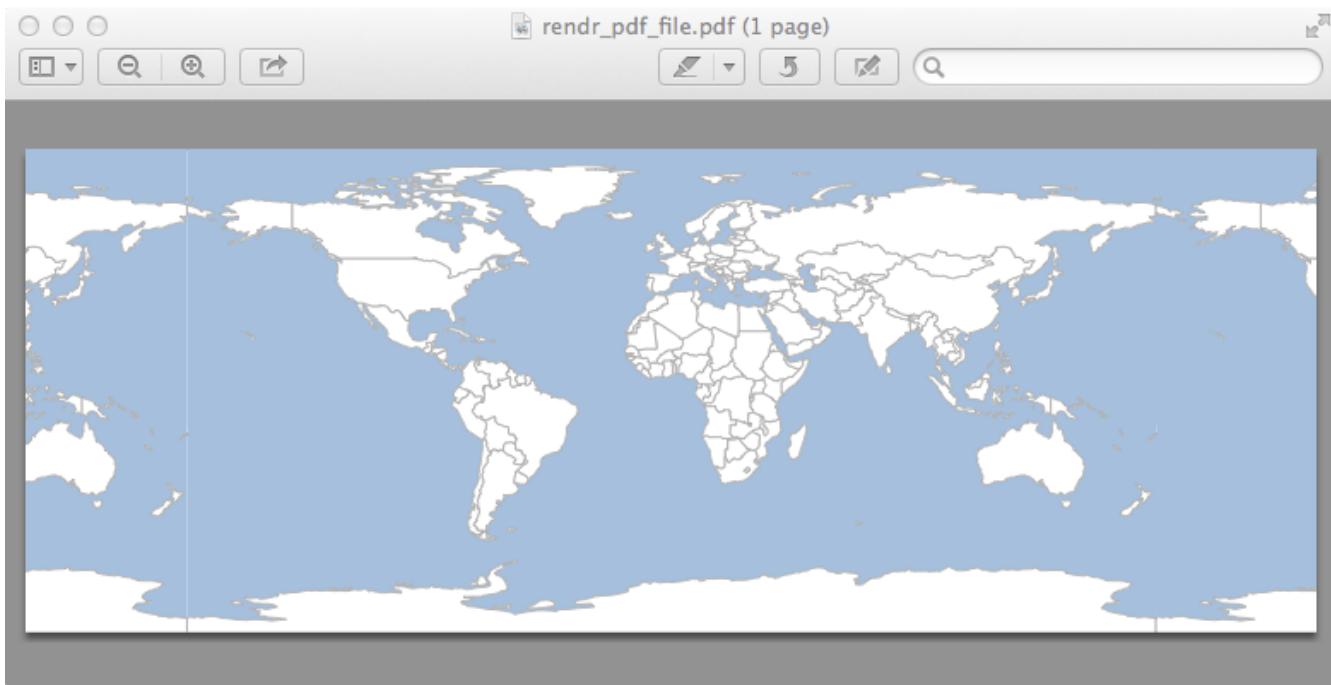

Render a Map to a PDF file using the PDF Renderer


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Pdf pdf = new Pdf()
File file = new File("map.pdf")
pdf.render(map, new FileOutputStream(file))
```

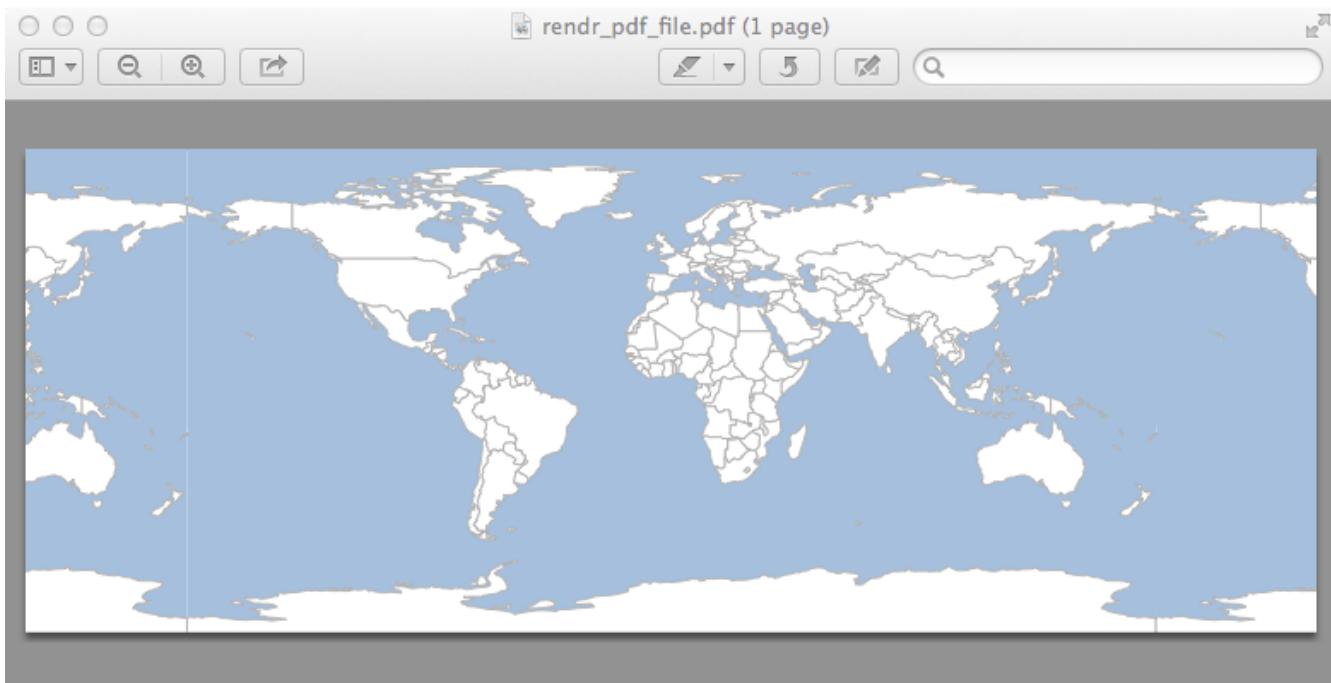

SVG


Render a Map to a SVG Document using the SVG Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Svg svg = new Svg()
org.w3c.dom.Document document = svg.render(map)
```

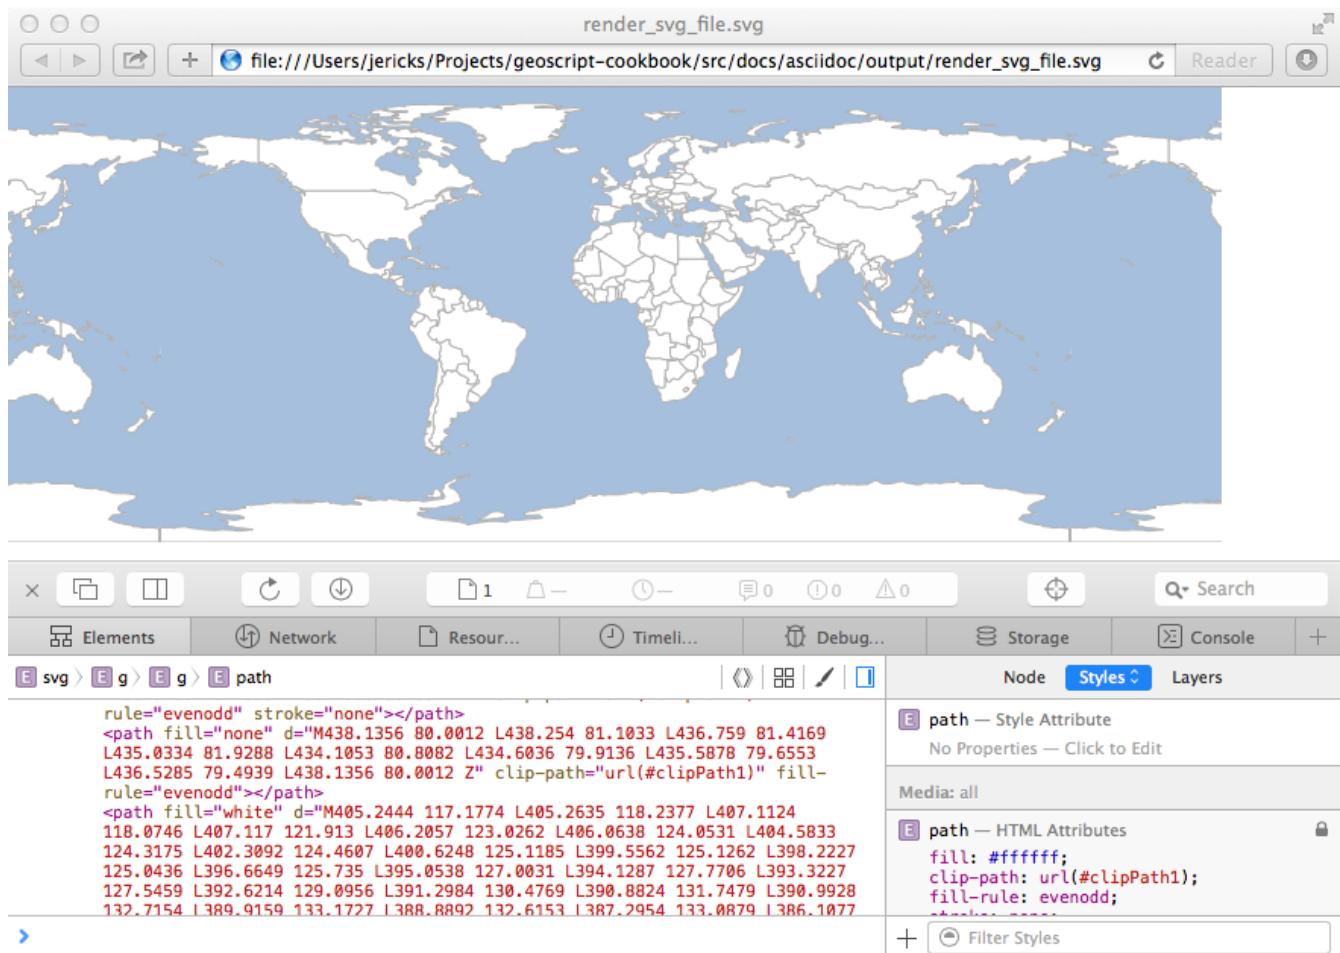

Render a Map to a SVG file using the SVG Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Svg svg = new Svg()
File file = new File("map.svg")
FileOutputStream out = new FileOutputStream(file)
svg.render(map, out)
out.close()
```

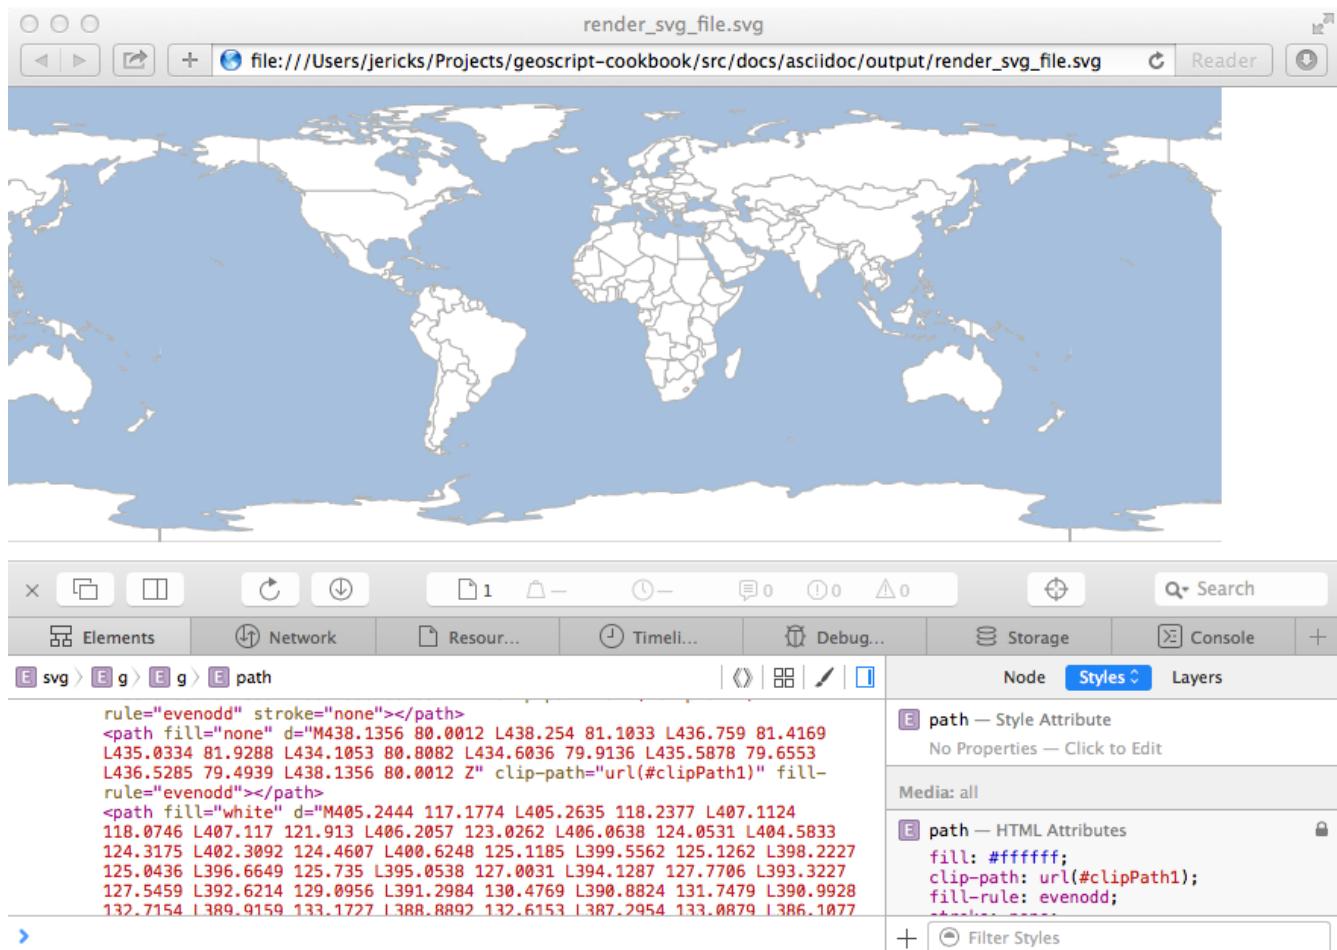

Displaying Maps

Finding Displayers

Get all Displayers

```
List<Displayer> displayers = Displayers.list()
displayers.each { Displayer displayer -
    println displayer.class.getSimpleName
}
```

MapWindow
Window

Get a Displayer

```
Displayer displayer = Displayers.find("window")
println displayer.class.getSimpleName
```

Window

Window

Display a Map in a simple GUI


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Window window = new Window()
window.display(map)
```



MapWindow

Display a Map in a interactive GUI

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
MapWindow window = new MapWindow()
window.display(map)
```

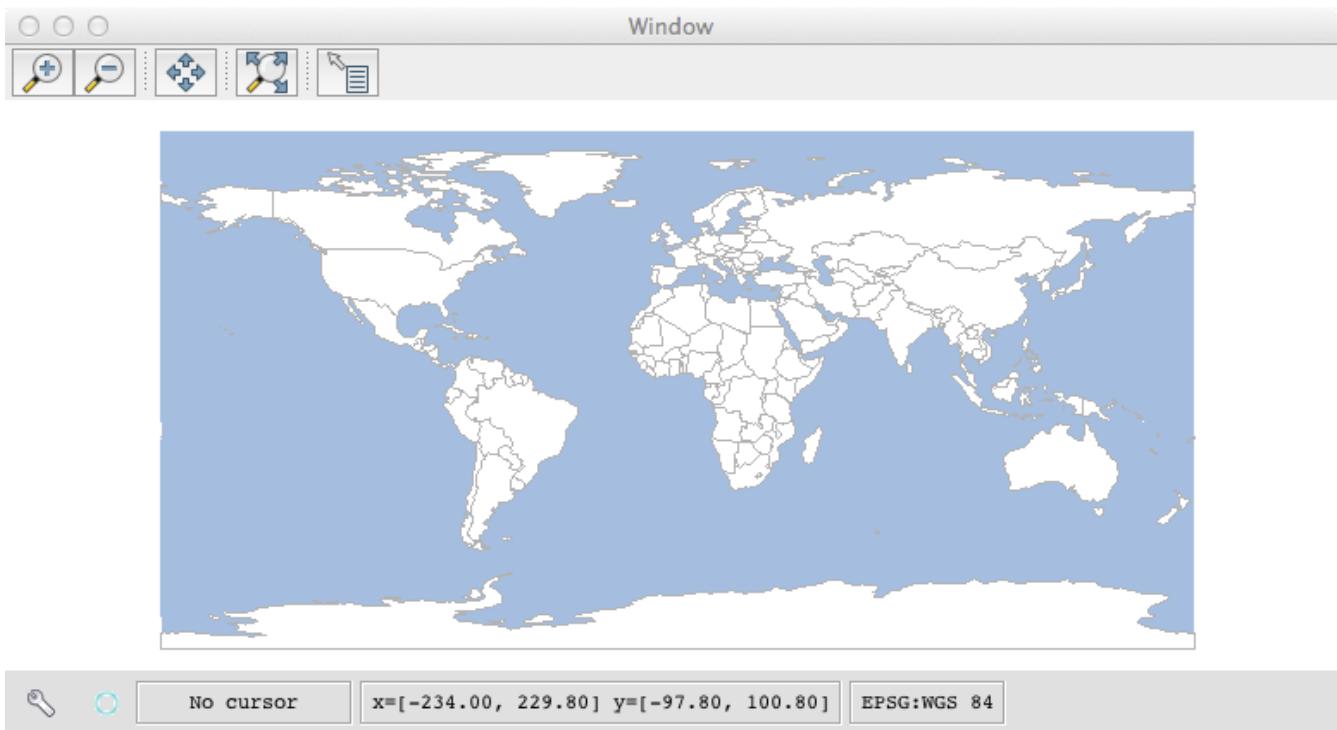

Drawing

The Draw class is an easy way to quickly render a Geometry, a List of Geometries, a Feature, or a Layer to an Image, a File, an OutputStream, or a GUI.


Drawing to a File or GUI

All of the draw methods take a single required parameter but can also take the following optional parameters:

- style = A Style
- bounds = The Bounds
- size = The size of the canvas ([400,350])
- out = The OutputStream, File, or File name. If null (which is the default) a GUI will be opened.
- format = The format ("jpeg", "png", "gif")
- proj = The Projection


Draw a Geometry to a File

```
File file = new File("geometry.png")
Geometry geometry = new Point(-122.376, 47.587).buffer(0.5)
Draw.draw(geometry,
    style: new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5),
    bounds: new Bounds(-122.876, 47.087, -121.876, 48.087),
    size: [400, 400],
    format: "png",
    proj: "EPSG:4326",
    backgroundColor: "#a5bfdd",
    out: file
)
```

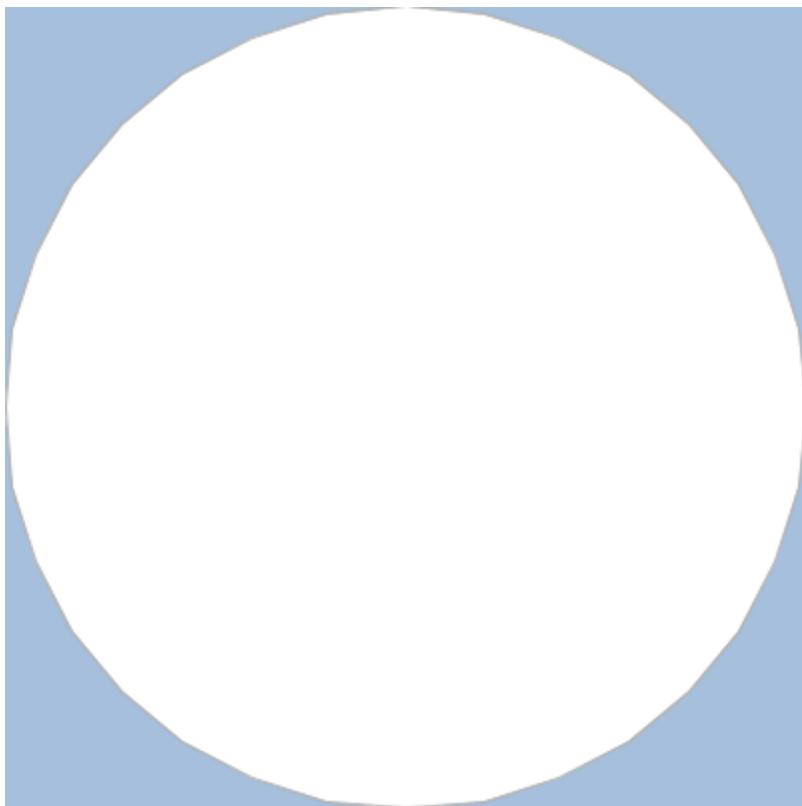

Draw a List of Geometries to an OutputStream

```
Point point = new Point(-122.376, 47.587)
List geometries = [1.5, 1.0, 0.5].collect { double distance ->
    point.buffer(distance)
}
File file = new File("geometries.png")
OutputStream outputStream = new FileOutputStream(file)
Draw.draw(geometries, out: outputStream, format: "png")
outputStream.flush()
outputStream.close()
```

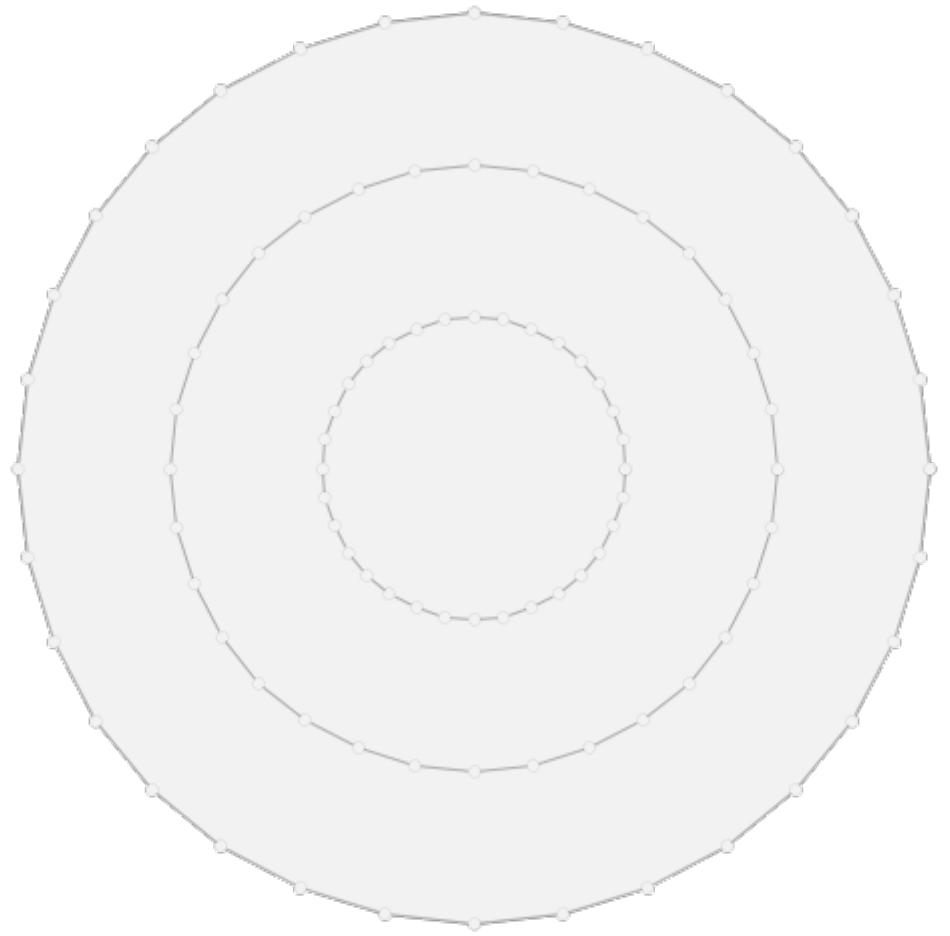


Draw a Feature to a file name

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
Feature feature = layer.first(filter: "name='Washington'")
Draw.draw(feature, bounds: feature.bounds, out: "feature.png")
```




Draw a Layer to a GUI

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
layer.style = new Fill("LightSteelBlue") + new Stroke("LightSlateGrey", 0.25)
Draw.draw(layer, bounds: layer.bounds)
```

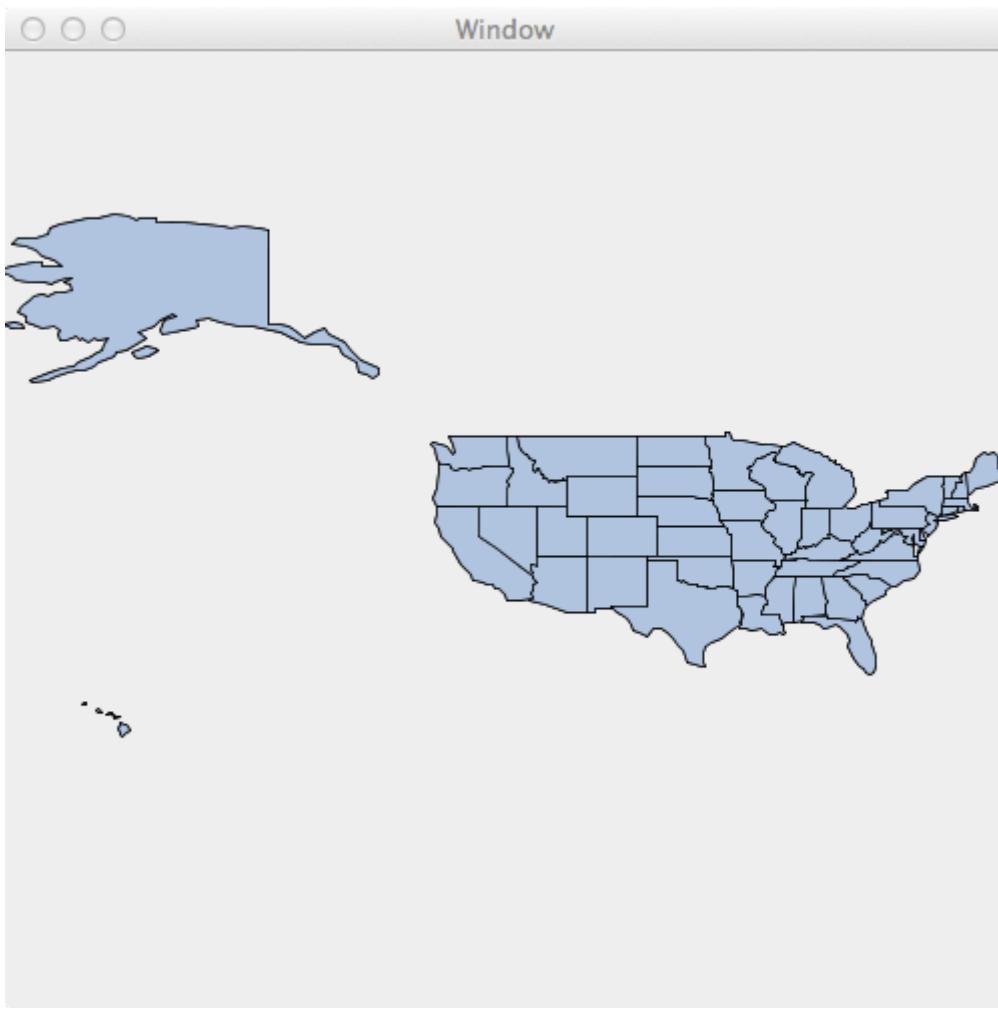

Draw a Raster to a File

```
File file = new File("earth.png")
Raster raster = new geoscript.layer.GeoTIFF(new File('src/main/resources/earth.tif')
)).read()
Draw.draw(raster, bounds: raster.bounds, size: [400,200], out: file)
```

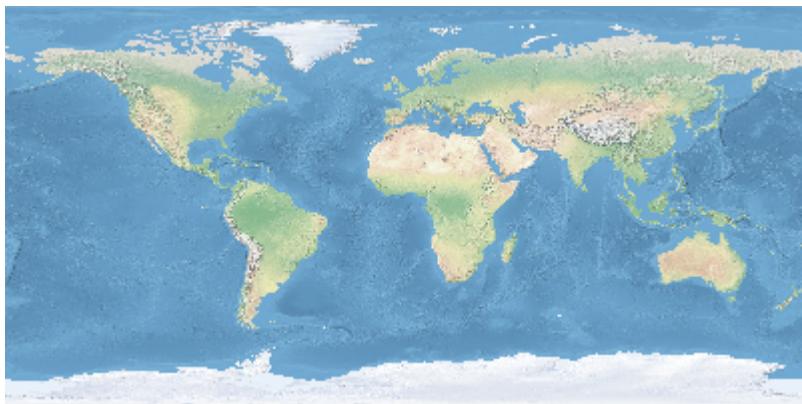

Drawing to an Image


All of the drawToImage methods take a single required parameter but can also take the following optional parameters:

- style = A Style

- bounds = The Bounds
- size = The size of the canvas ([400,350])
- imageType = The format ("jpeg", "png", "gif")
- proj = The Projection


Draw a Geometry to an Image

```
Geometry geometry = new Point(-122.376, 47.587).buffer(0.5)
BufferedImage image = Draw.drawImage(geometry,
    style: new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5),
    bounds: new Bounds(-122.876,47.087,-121.876,48.087),
    size: [400,400],
    imageType: "png",
    proj: "EPSG:4326",
    backgroundColor: "#a5bfdd"
)
```

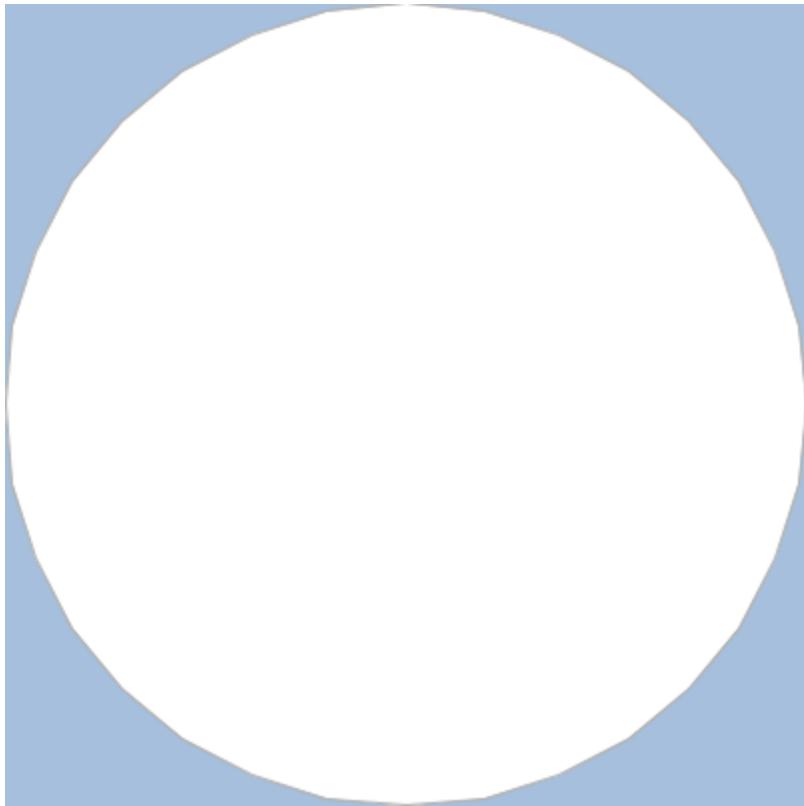

Draw a List of Geometries to an Image

```
Point point = new Point(-122.376, 47.587)
List geometries = [1.5, 1.0, 0.5].collect { double distance ->
    point.buffer(distance)
}
BufferedImage image = Draw.drawImage(geometries)
```

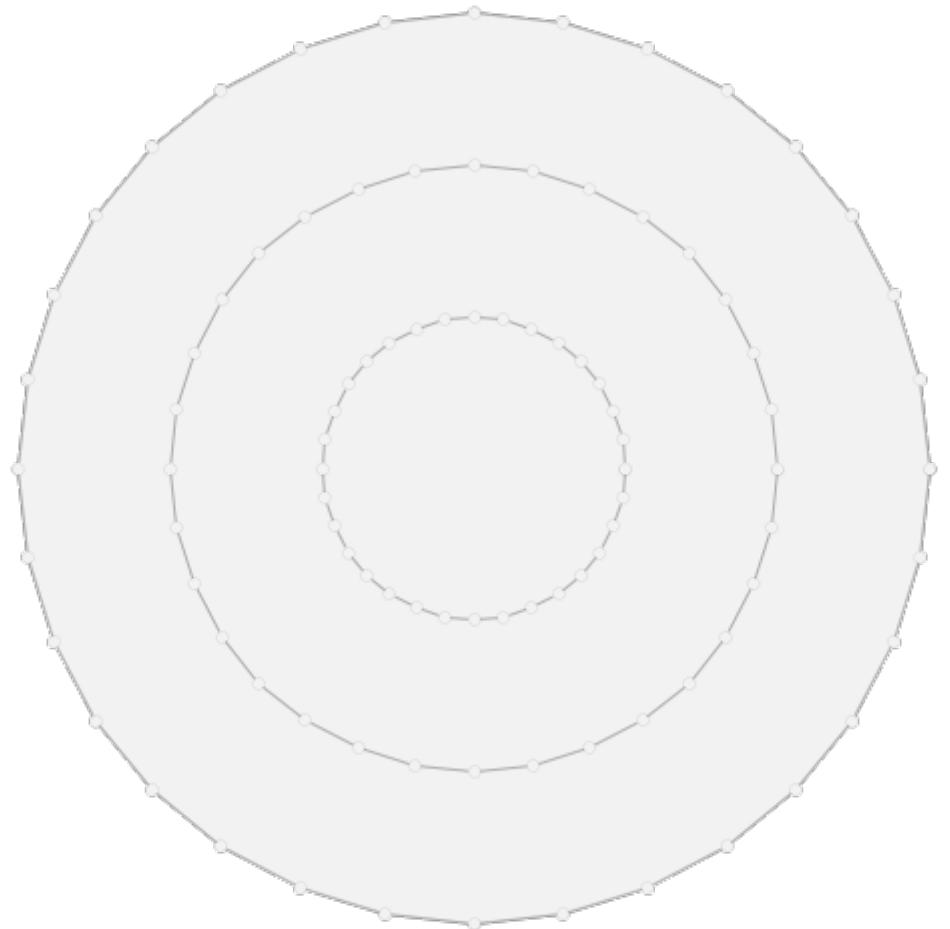


Draw a Feature to an Image

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
Feature feature = layer.first(filter: "name='Washington'")
BufferedImage image = Draw.drawToImage(feature, bounds: feature.bounds)
```




Draw a Layer to an Image

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
layer.style = new Fill("LightSteelBlue") + new Stroke("LightSlateGrey", 0.25)
BufferedImage image = Draw.drawImage(layer, bounds: layer.bounds)
```

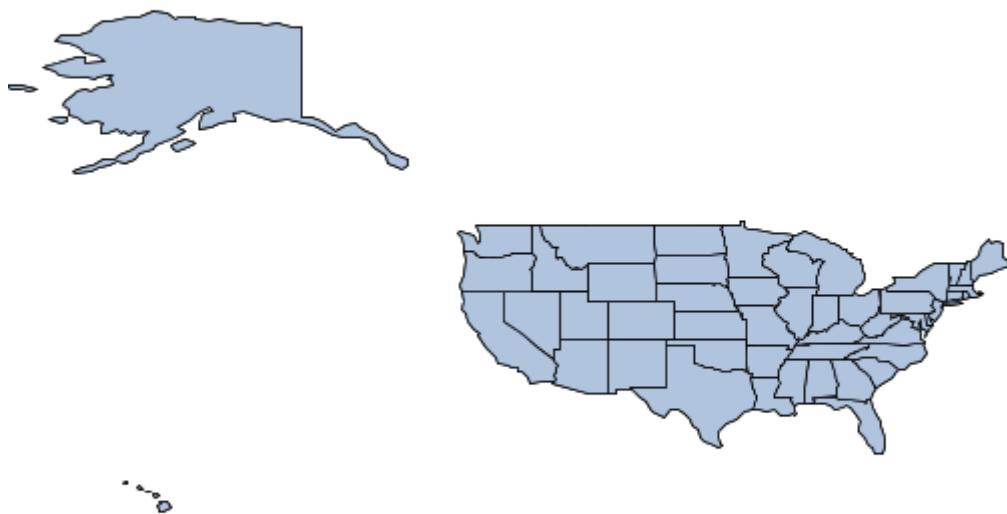

Draw a Raster to an Image

```
Raster raster = new geoscript.layer.GeoTIFF(new File('src/main/resources/earth.tif')).  
read()  
BufferedImage image = Draw.drawToImage(raster, bounds: raster.bounds, size: [400,200])
```

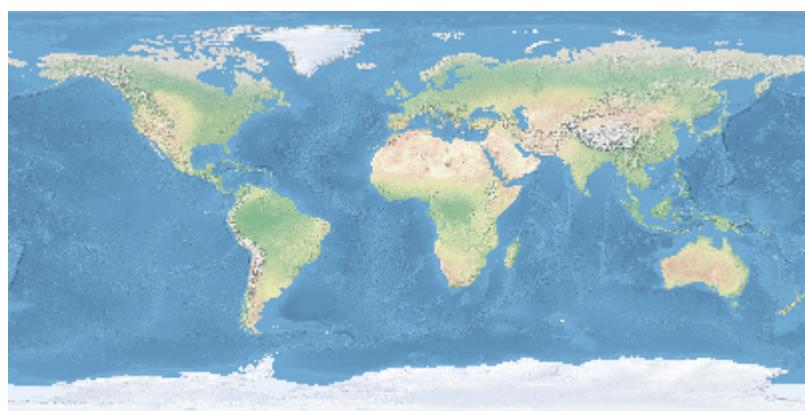


Plotting

Plotting to a File or GUI

The Plot module can plot a Geometry, a list of Geometries, a Feature, or a Layer to a File, a File name, an OutputStream, or a simple GUI.


Plot a Geometry to a File

```
File file = new File("geometry.png")
Geometry geometry = new Point(-122.376, 47.587).buffer(0.5)
Plot.plot(geometry, out: file)
```

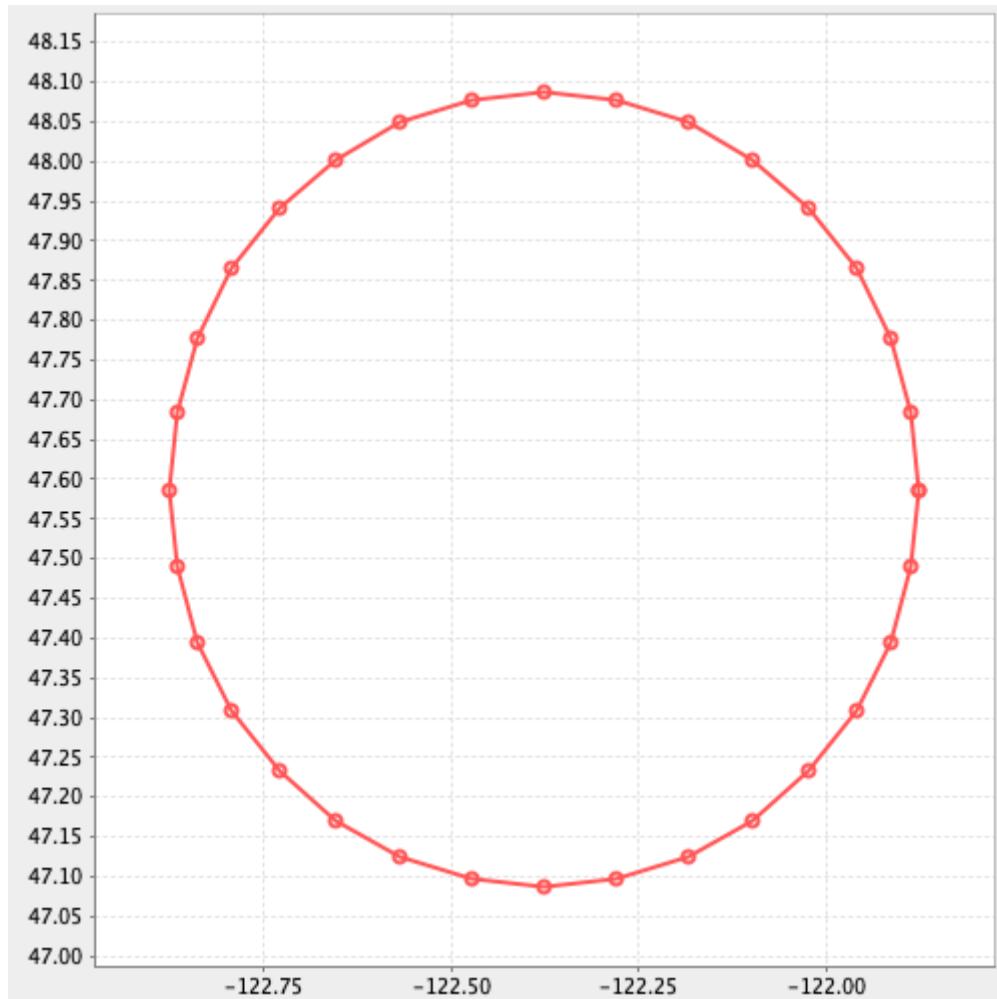


Plot a List of Geometries to an OutputStream

```
Point point = new Point(-122.376, 47.587)
List geometries = [1.5, 1.0, 0.5].collect { double distance ->
    point.buffer(distance)
}
File file = new File("geometries.png")
OutputStream outputStream = new FileOutputStream(file)
Plot.plot(geometries, out: outputStream)
outputStream.flush()
outputStream.close()
```

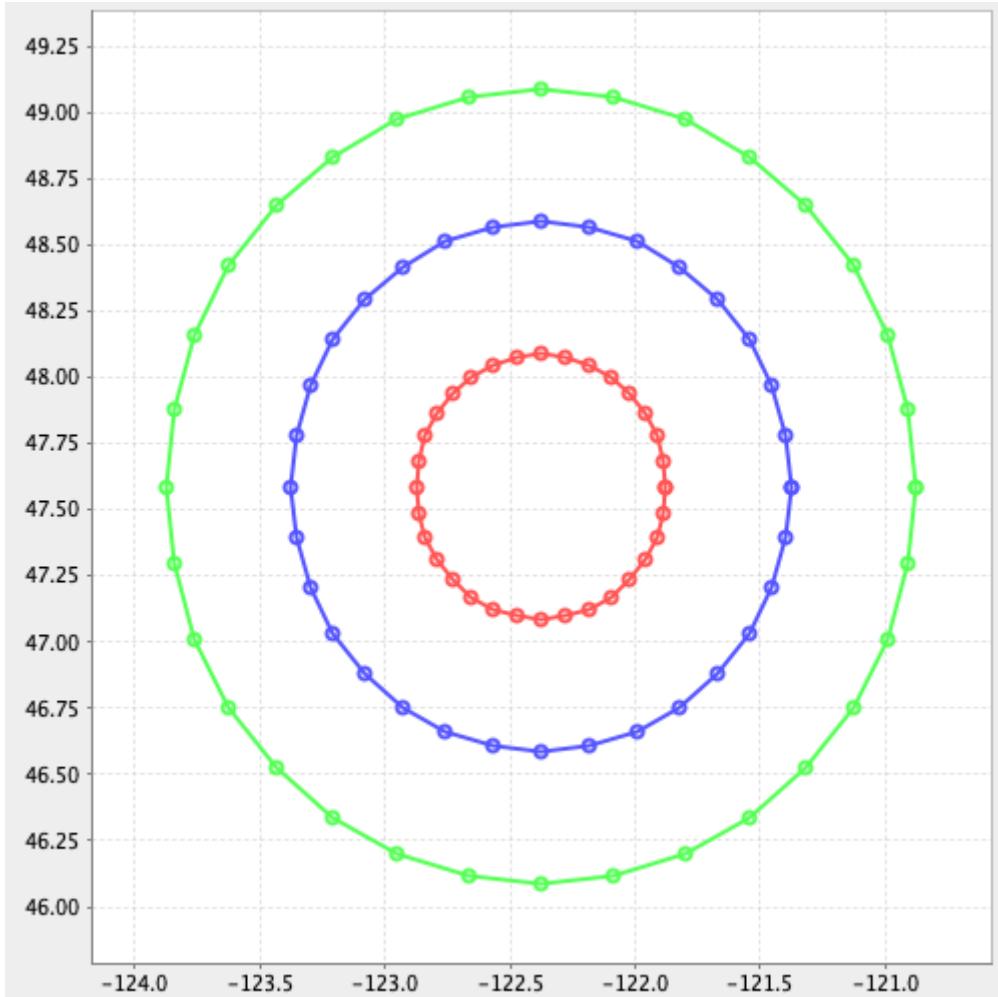


Plot a Feature to a File name

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
Feature feature = layer.first(filter: "name='Washington'")
Plot.plot(feature, out: "feature.png")
```

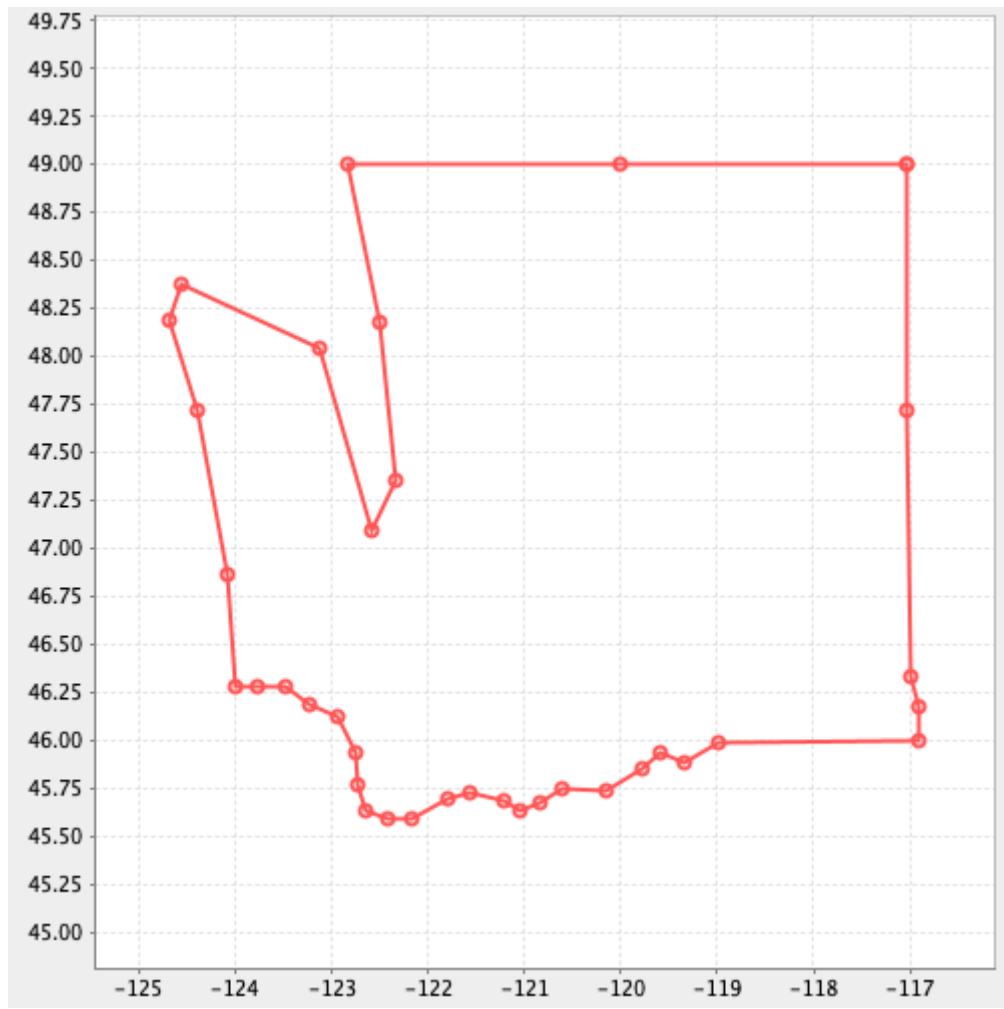

Plot a Layer to a GUI

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
Plot.plot(layer)
```

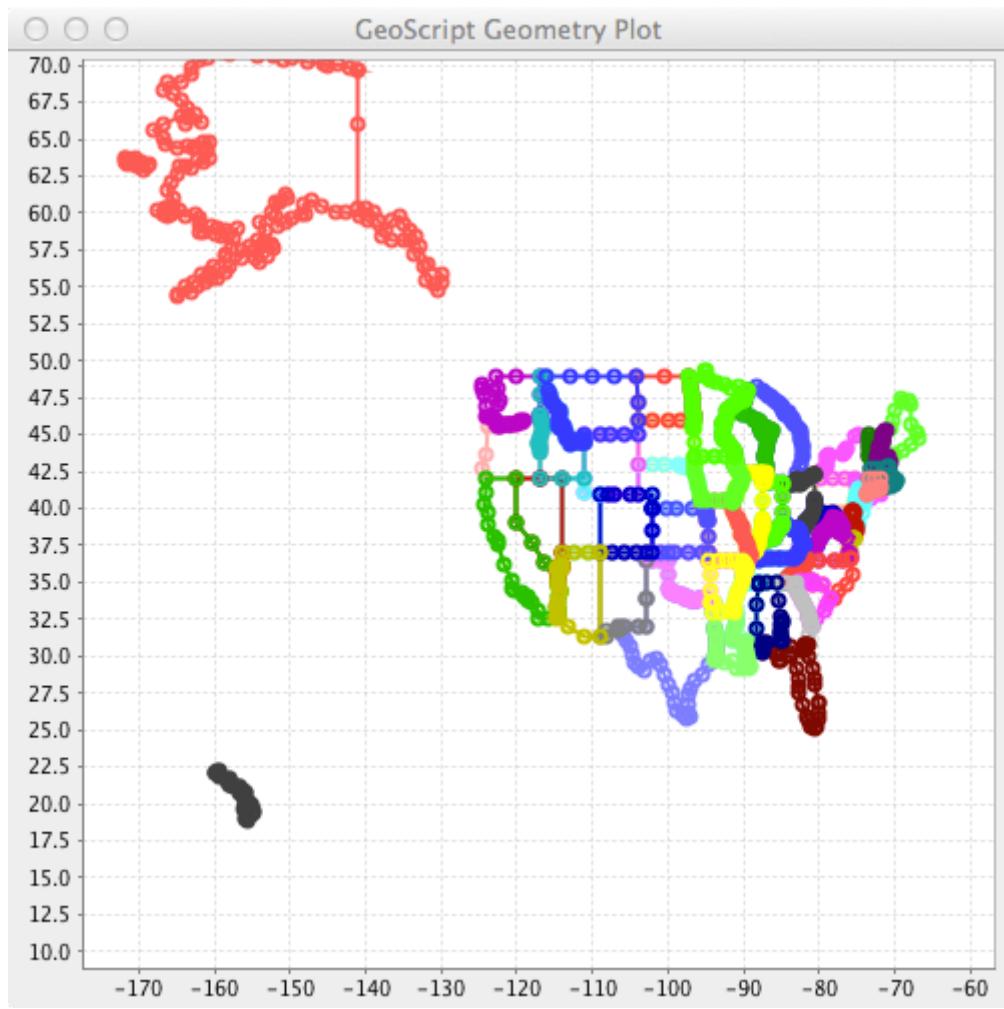



Plotting to an Image

The Plot module can plot a Geometry, a list of Geometries, a Feature, or a Layer to an image.

Plot a Geometry to an Image


```
Geometry geometry = new Point(-122.376, 47.587).buffer(0.5)
BufferedImage image = Plot.plotToImage(geometry, size: [400,400],)
```

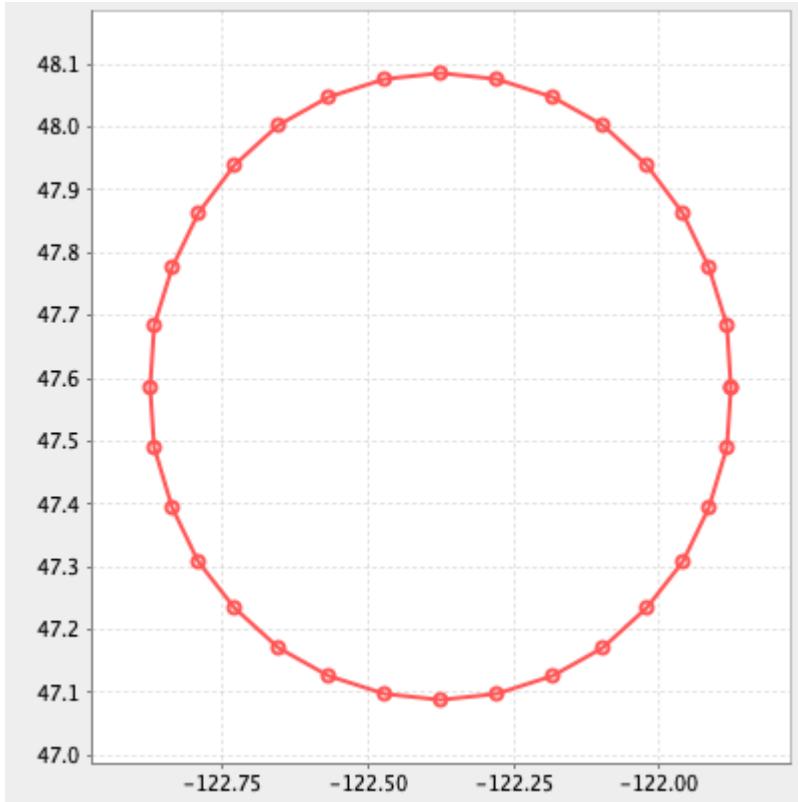

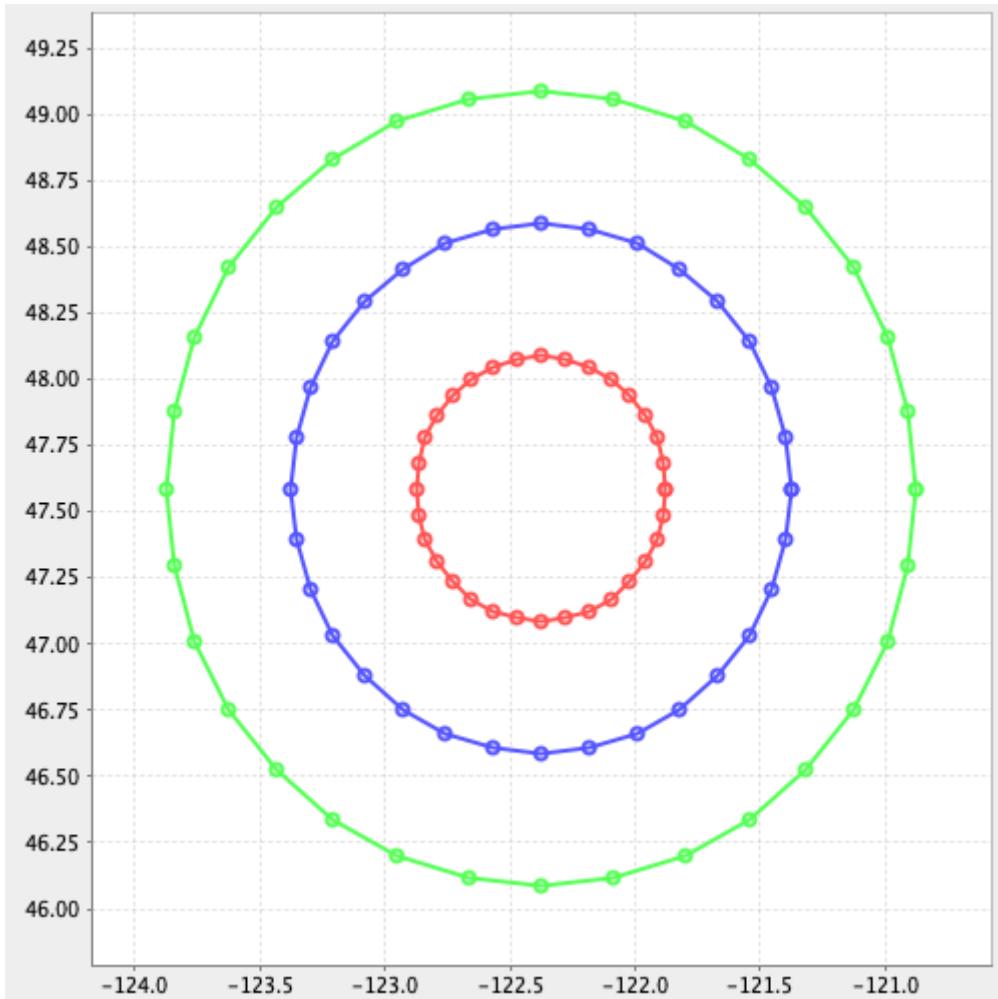


Plot a Feature to an Image

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
Feature feature = layer.first(filter: "name='Washington'")
BufferedImage image = Plot.plotToImage(feature, bounds: feature.bounds)
```

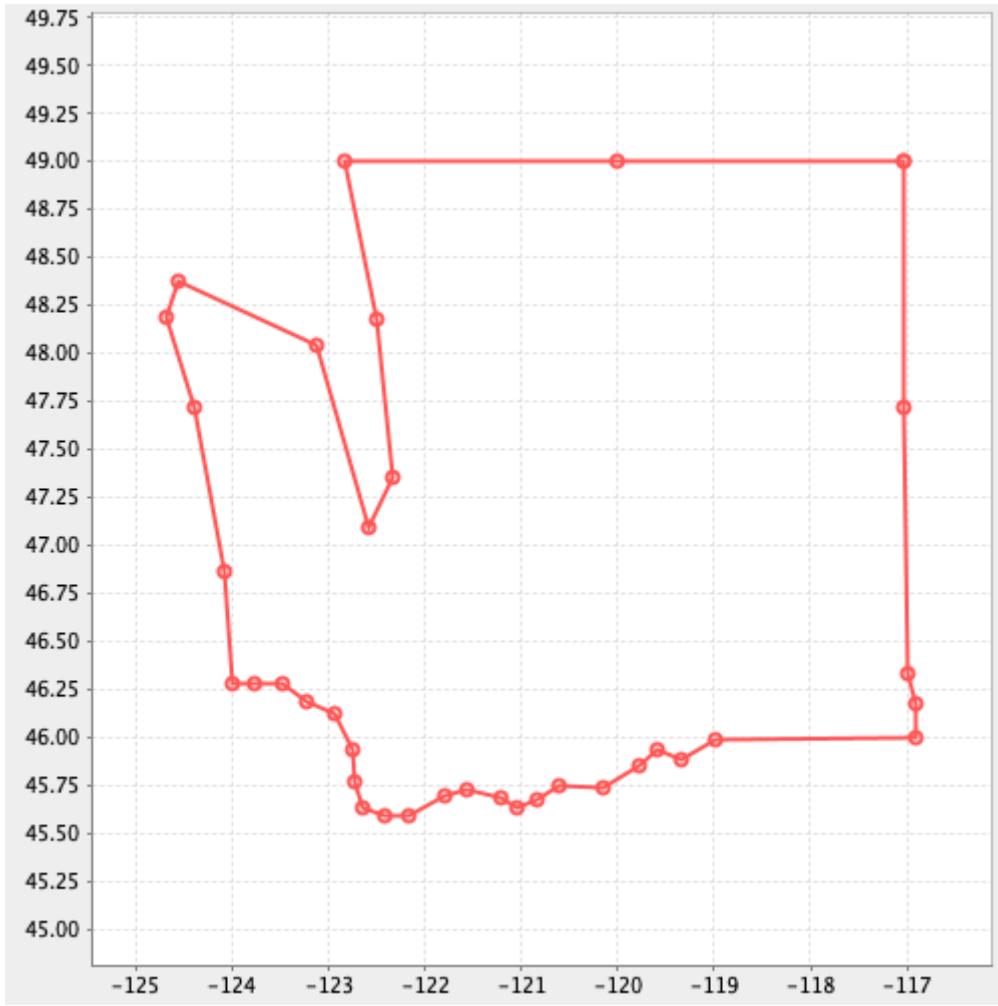

Plot a Layer to an Image

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
BufferedImage image = Plot.plotToImage(layer, bounds: layer.bounds)
```

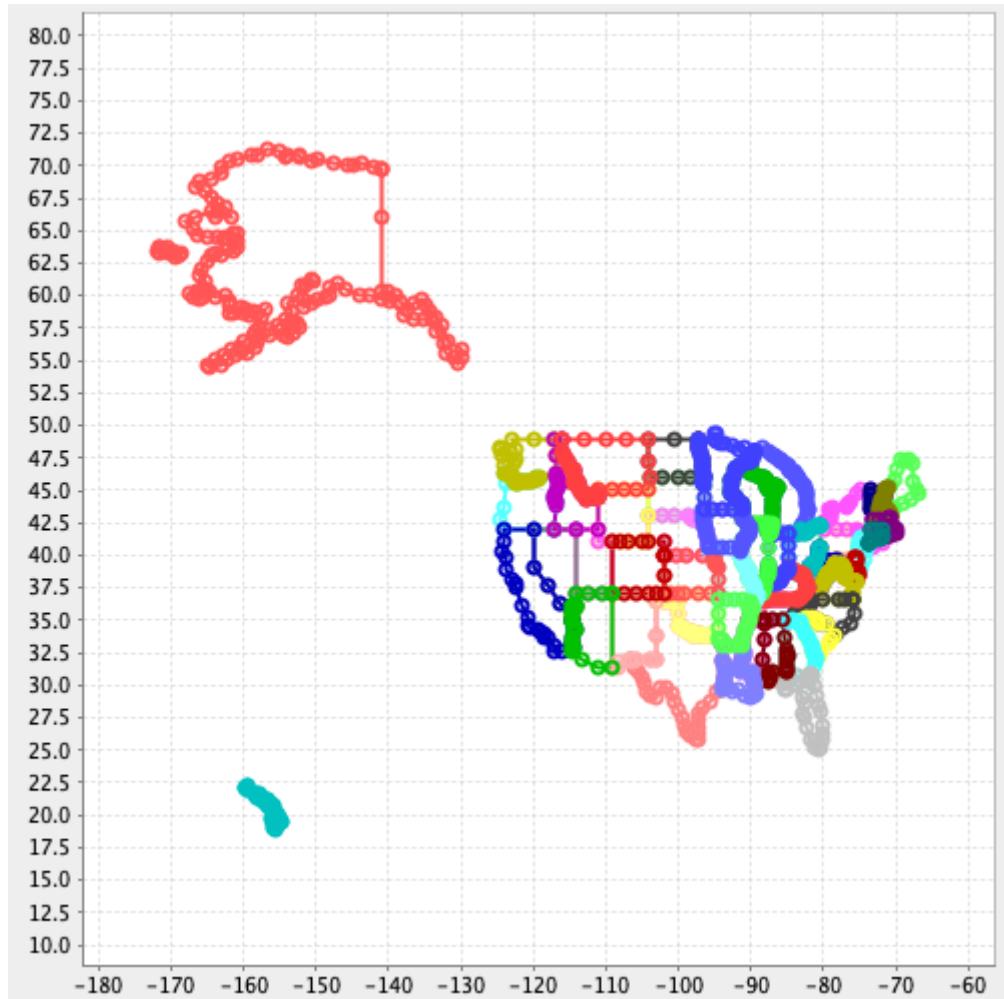

Reading Maps

The IO module can read Maps from JSON or XML documents.

Finding Map Readers

List all Map Readers

```
List<MapReader> readers = MapReaders.list()
readers.each { MapReader reader ->
    println reader.name
}
```

xml
json
yaml

Find a Map Reader

```
MapReader reader = MapReaders.find("json")
println reader.name
```

JSON

JSON Map Format


```
{
  "width": 400,
  "height": 400,
  "type": "png",
  "backgroundColor": "blue",
  "fixAspectRatio": true,
  "proj": "EPSG:4326",
  "bounds": {
    "minX": -135.911779,
    "minY": 36.993573,
    "maxX": -96.536779,
    "maxY": 51.405899
  },
  "layers": [
    {"layertype": "layer", "file": "shps/states.shp"}
  ]
}
```

- **width** = The map width is optional and defaults to 600.
- **height** = The map height is optional and defaults to 400.
- **type** = The image type (png, jpeg, gif) is optional and defaults to png.
- **backgroundColor** = The map background color is optional and transparent by default.
- **fixAspectRatio** = Whether to fix the aspect ratio or not. It is optional and the default is true.
- **proj** = The optional map projection. The default is determined by the layers or the bounds.
- **bounds** = The optional map bounds. The default is the full extent of the layers.
- **layers** = The only required property. A list of layer configurations.
 - **layertype** = The layer type is required. Values can be layer (vector), raster, or tile.
 - **layername** = The name of the layer is optional and defaults to first layer.
 - **style** = The layer style is optional but can be a SLD or CSS file.

Read a Map from a JSON String.

```
String json = """{
    "width": 400,
    "height": 400,
    "type": "png",
    "backgroundColor": "blue",
    "proj": "EPSG:4326",
    "bounds": {
        "minX": -135.911779,
        "minY": 36.993573,
        "maxX": -96.536779,
        "maxY": 51.405899
    },
    "layers": [
        {
            "layertype": "layer",
            "dbtype": "geopkg",
            "database": "src/main/resources/data.gpkg",
            "layername": "ocean",
            "style": "src/main/resources/ocean.sld"
        },
        {
            "layertype": "layer",
            "dbtype": "geopkg",
            "database": "src/main/resources/data.gpkg",
            "layername": "countries",
            "style": "src/main/resources/countries.sld"
        },
        {
            "layertype": "layer",
            "dbtype": "geopkg",
            "database": "src/main/resources/data.gpkg",
            "layername": "states",
            "style": "src/main/resources/states.sld"
        }
    ]
}
"""

MapReader mapReader = new JsonMapReader()
Map map = mapReader.read(json)
BufferedImage image = map.renderToImage()
```

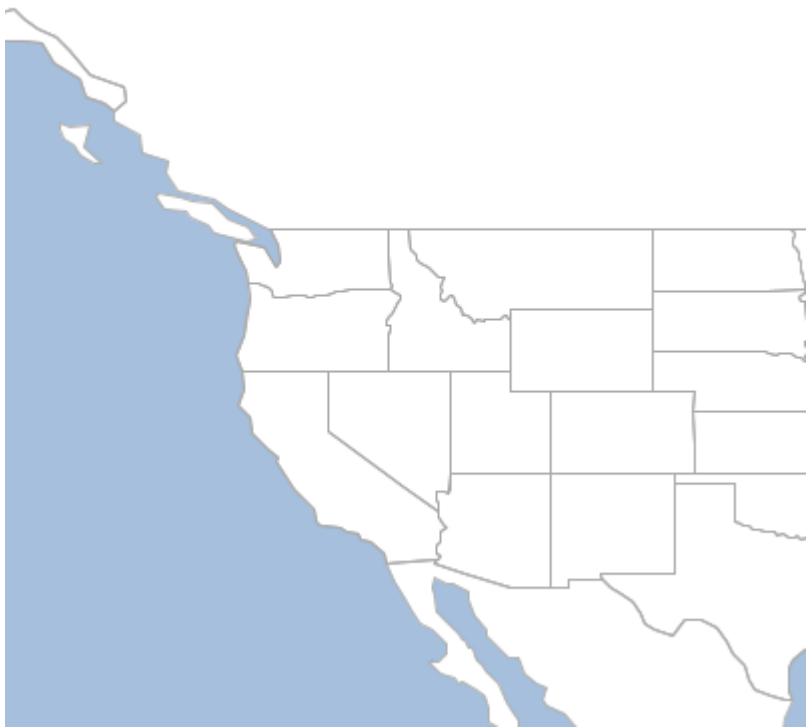


XML

Read a Map from an XML String.

```
String xml = """<map>
<width>400</width>
<height>400</height>
<type>png</type>
<proj>EPSG:4326</proj>
<backgroundColor>blue</backgroundColor>
<fixAspectRatio>true</fixAspectRatio>
<layers>
    <layer>
        <layertype>layer</layertype>
        <dbtype>geopkg</dbtype>
        <database>src/main/resources/data.gpkg</database>
        <layername>ocean</layername>
        <style>src/main/resources/ocean.sld</style>
    </layer>
    <layer>
        <layertype>layer</layertype>
        <dbtype>geopkg</dbtype>
        <database>src/main/resources/data.gpkg</database>
        <layername>countries</layername>
        <style>src/main/resources/countries.sld</style>
    </layer>
    <layer>
        <layertype>layer</layertype>
        <dbtype>geopkg</dbtype>
        <database>src/main/resources/data.gpkg</database>
        <layername>states</layername>
        <style>src/main/resources/states.sld</style>
    </layer>
</layers>
<bounds>
    <minX>-135.911779</minX>
    <minY>36.993573</minY>
    <maxX>-96.536779</maxX>
    <maxY>51.405899</maxY>
</bounds>
</map>
"""

MapReader mapReader = new XmlMapReader()
Map map = mapReader.read(xml)
BufferedImage image = map.renderToImage()
```

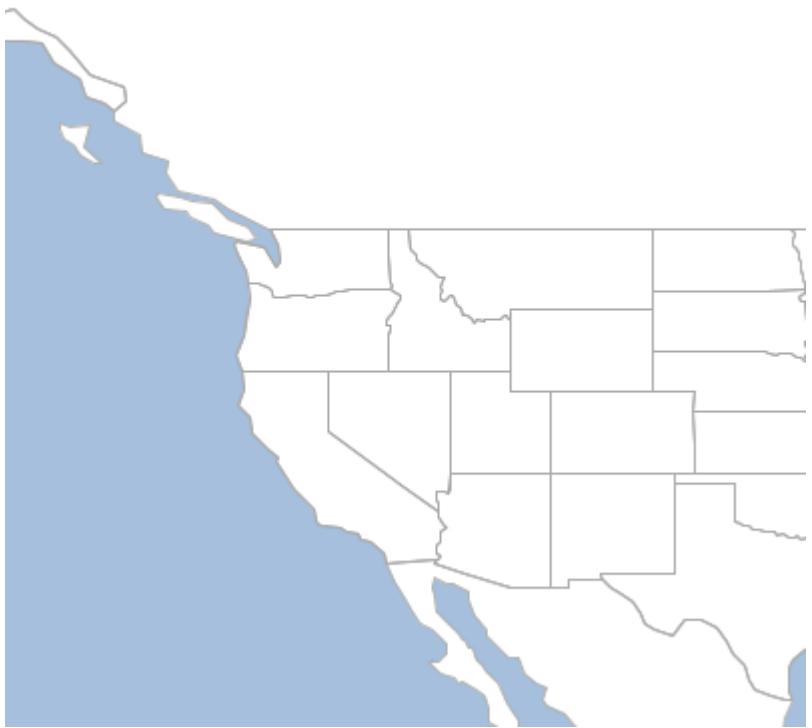


Style Recipes

Styles are found in the [geoscript.style](#) package.

Styles are made up Symbolizers and Composites. A Symbolizer is a particular style like Stroke or Fill. Symbolizers also have methods for controlling the drawing order (zindex), the min and max scale (range), and filtering (where).


Creating Basic Styles

```
Fill fill = new Fill("#6B8E23")
```

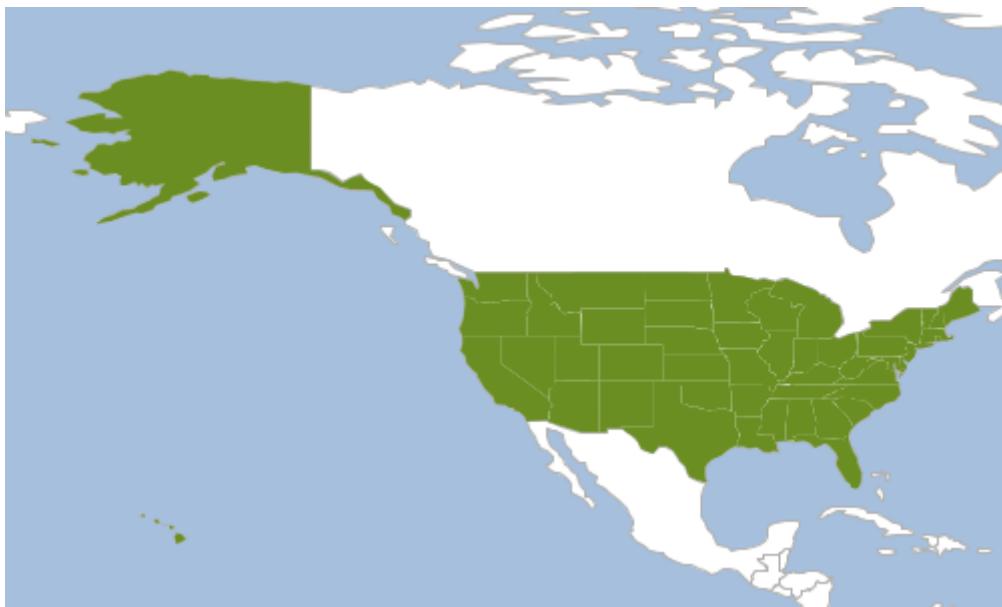

A Composite is simply two or more Symbolizers. So, a Composite would be a combination of a Stroke symbolizer (to style the boundary) and a Fill Symbolizer (to style the interior).



```
Composite composite = new Fill("#6B8E23") + new Stroke("black", 0.75)
```

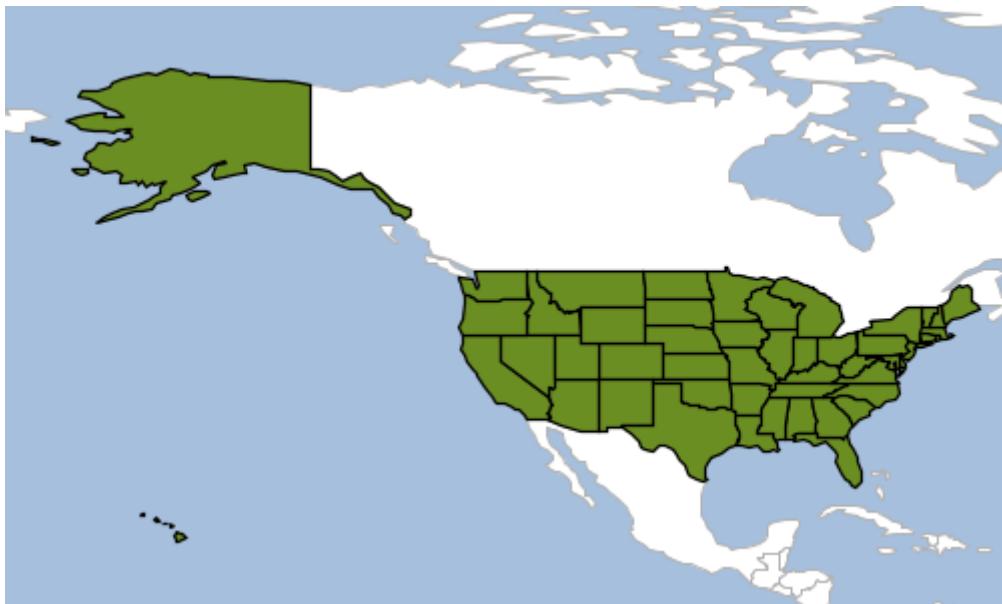

A Symbolizer can have a human readable title. When titles are set on a Composite style, the last title is used.


```
Fill fill = new Fill("#6B8E23").title("States")
println "${fill.title}"
Composite composite = new Fill("#6B8E23") + new Stroke("black", 0.75).title("States
with Outline")
println "${composite.title}"
```

```
States
States with Outline
```

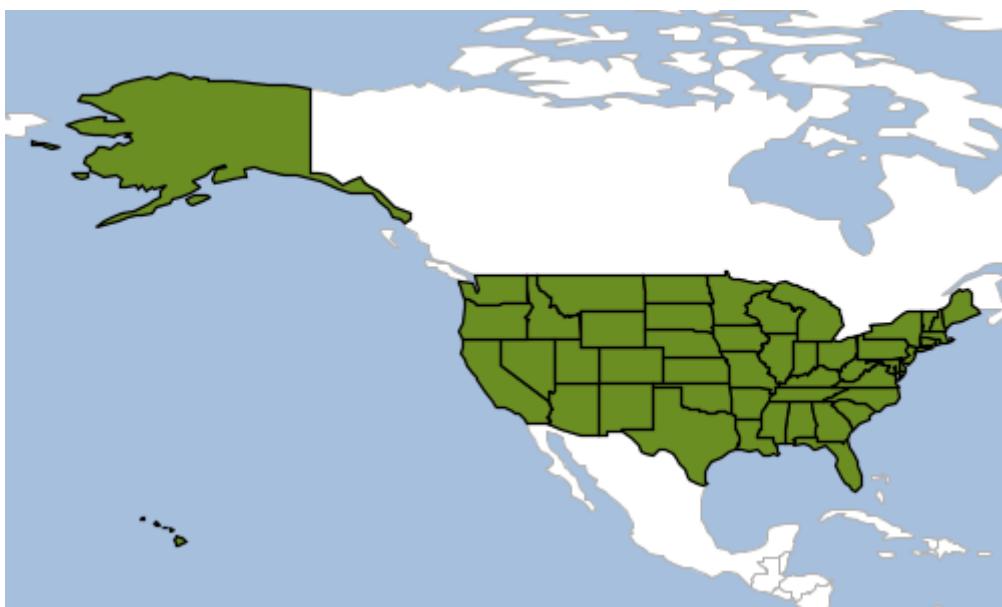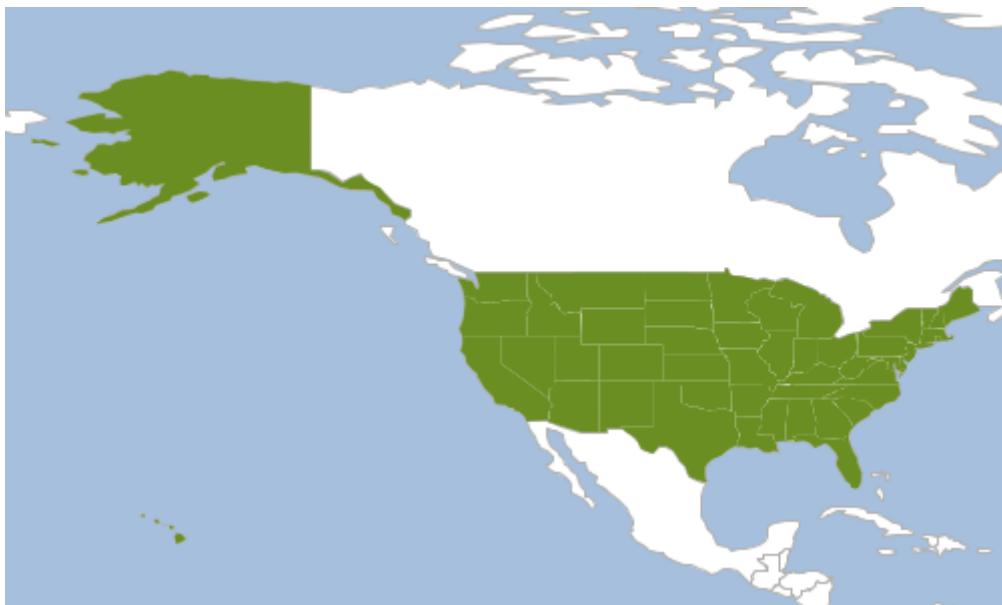


A Symbolizer can use the where method to restrict which features are styled.

```
Symbolizer symbolizer = new Fill("#ffffcc").where("POP_EST < 4504128.33") +  
    new Fill("#41b6c4").where("POP_EST BETWEEN 4504128.33 AND 16639804.33") +  
    new Fill("#253494").where("POP_EST > 16639804.33")
```

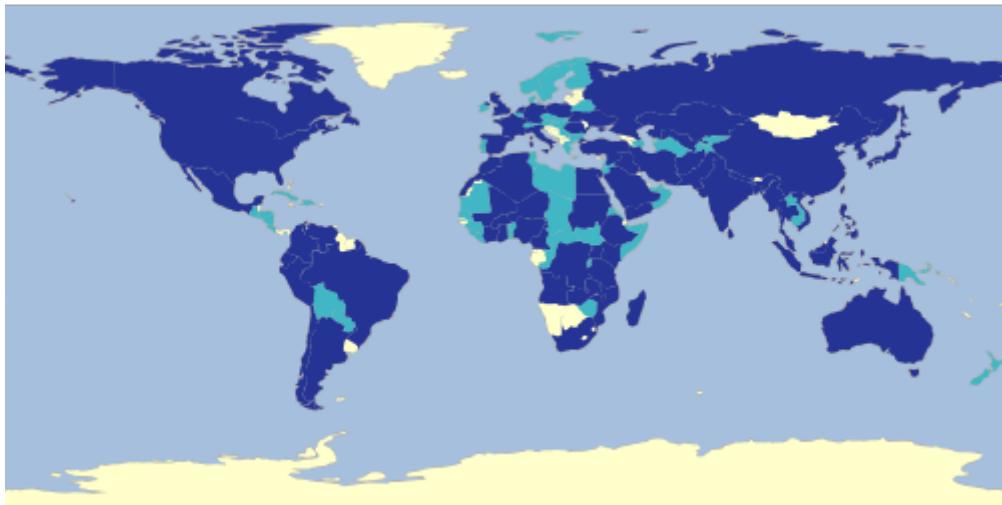


The `zindex` method is used to order Symbolizers on top of each other. In this recipe we use it to create line casings.

```
Symbolizer symbolizer = new Stroke("black", 2.0).zindex(0) + new Stroke("white", 0.1)  
    .zindex(1)
```

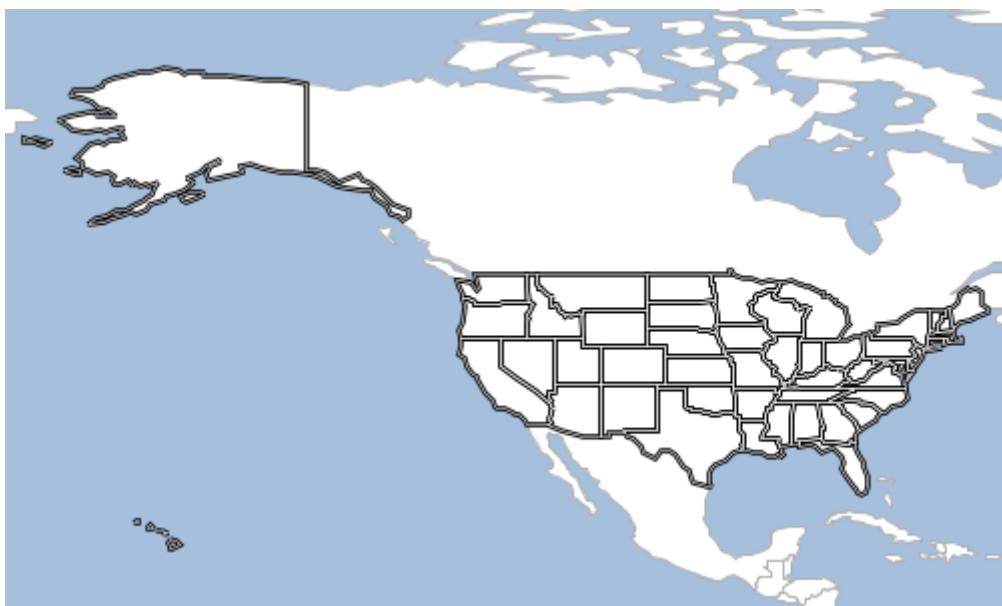

The `scale` method is used to create Symbolizers that are dependent on map scale.

```
Symbolizer symbolizer = (new Fill("white") + new Stroke("black", 0.1)) + new Label  
    ("name")  
        .point(anchor: [0.5, 0.5])  
        .polygonAlign("mbr")  
        .range(max: 16000000)
```

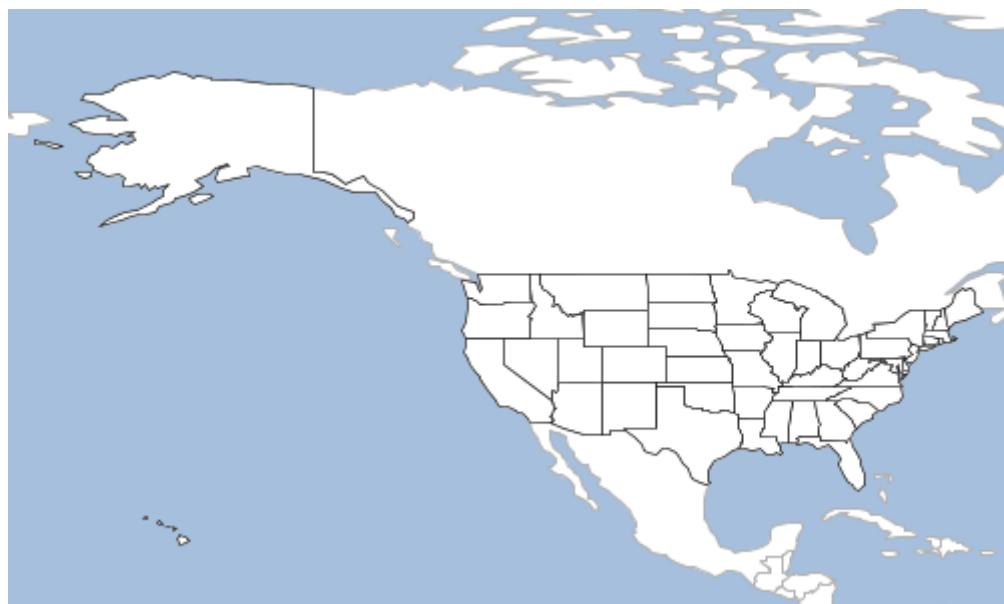

Creating Strokes

Create a Stroke Symbolizer with a Color

```
Stroke stroke = new Stroke("#1E90FF")
```



Create a Stroke Symbolizer with a Color and Width

```
Stroke stroke = new Stroke("#1E90FF", 0.5)
```



Create a Stroke Symbolizer with casing

```
Symbolizer stroke = new Stroke(color: "#333333", width: 5, cap: "round").zindex(0) +  
    new Stroke(color: "#6699FF", width: 3, cap: "round").zindex(1)
```



Create a Stroke Symbolizer with Dashes

```
Stroke stroke = new Stroke("#1E90FF", 0.75, [5,5], "round", "bevel")
```



Create a Stroke Symbolizer with railroad Hatching

```
Symbolizer stroke = new Stroke("#1E90FF", 1) + new Hatch("vertline", new Stroke("#1E90FF", 0.5), 6).zindex(1)
```



Create a Stroke Symbolizer with spaced Shape symbols

```
Symbolizer stroke = new Stroke(width: 0, dash: [4, 4]).shape(new Shape("#1E90FF", 6, "circle").stroke("navy", 0.75))
```



Create a Stroke Symbolizer with alternating spaced Shape symbols


```
Symbolizer stroke = new Stroke("#0000FF", 1, [10,10]).zindex(0) + new Stroke(null, 0, [[5,15],7.5])  
.shape(new Shape(null, 5, "circle").stroke("#000033",1)).zindex(1)
```



Creating Fills


Create a Fill Symbolizer with a Color

```
Fill fill = new Fill("#6B8E23")
```

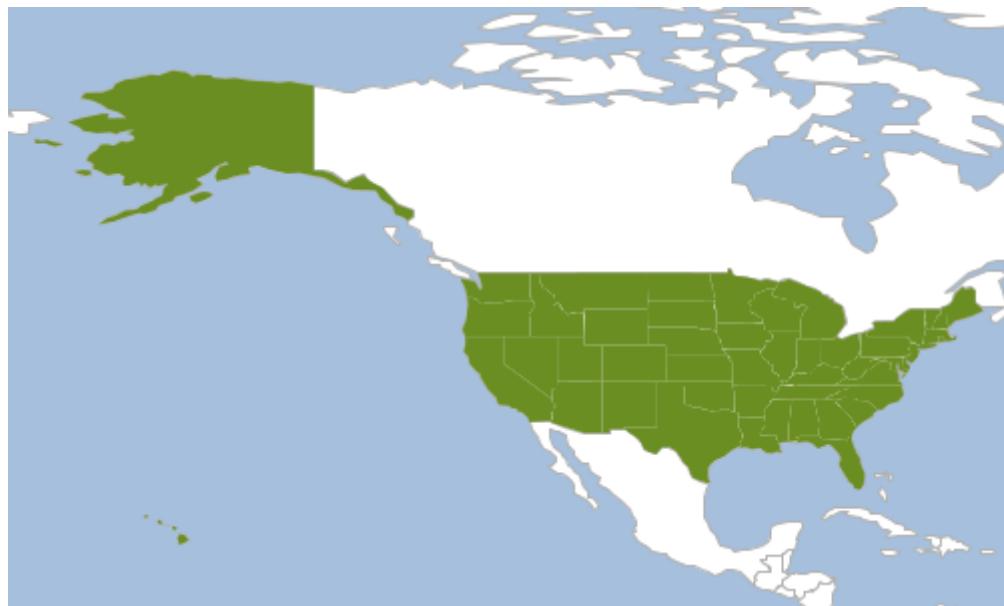


Create a Fill Symbolizer with a Color and a Stroke

```
Symbolizer symbolizer = new Fill("#6B8E23") + new Stroke("black", 0.1)
```

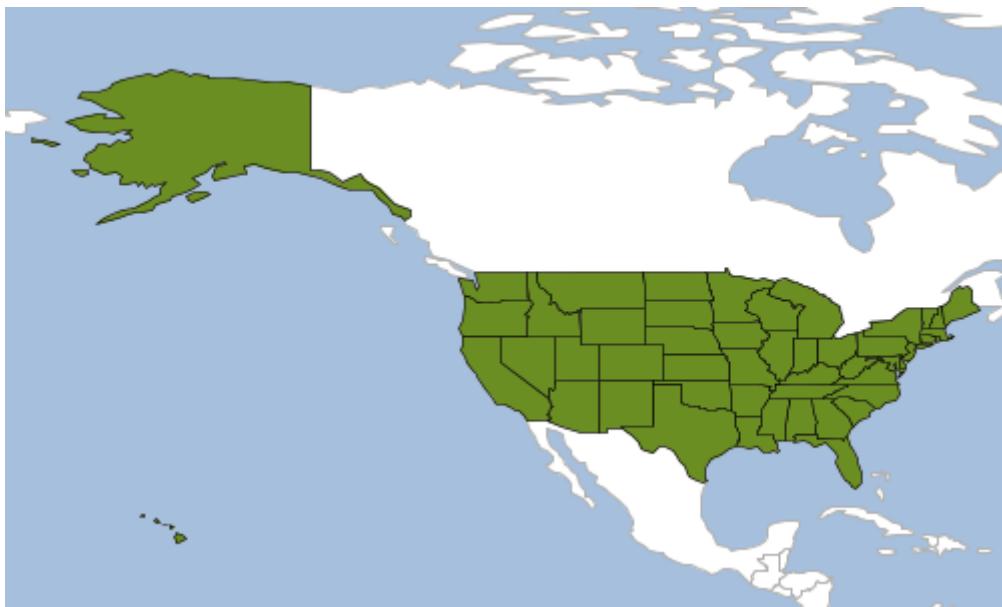


Create a Fill Symbolizer with a Color and Opacity

```
Fill fill = new Fill("#6B8E23", 0.35)
```

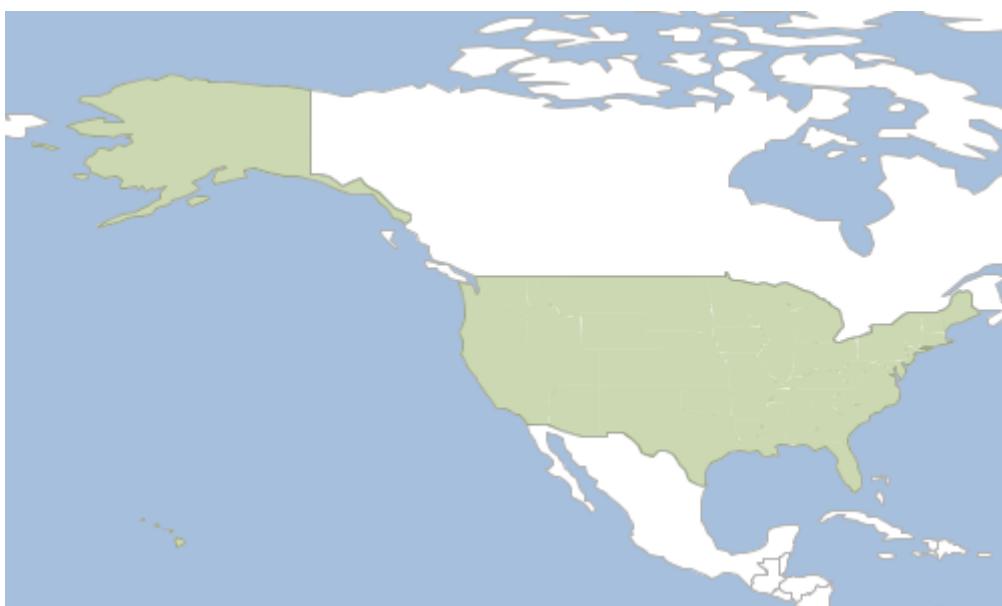


Create a Fill Symbolizer from named parameters

```
Fill fill = new Fill(color: "wheat", opacity: 0.75)
```

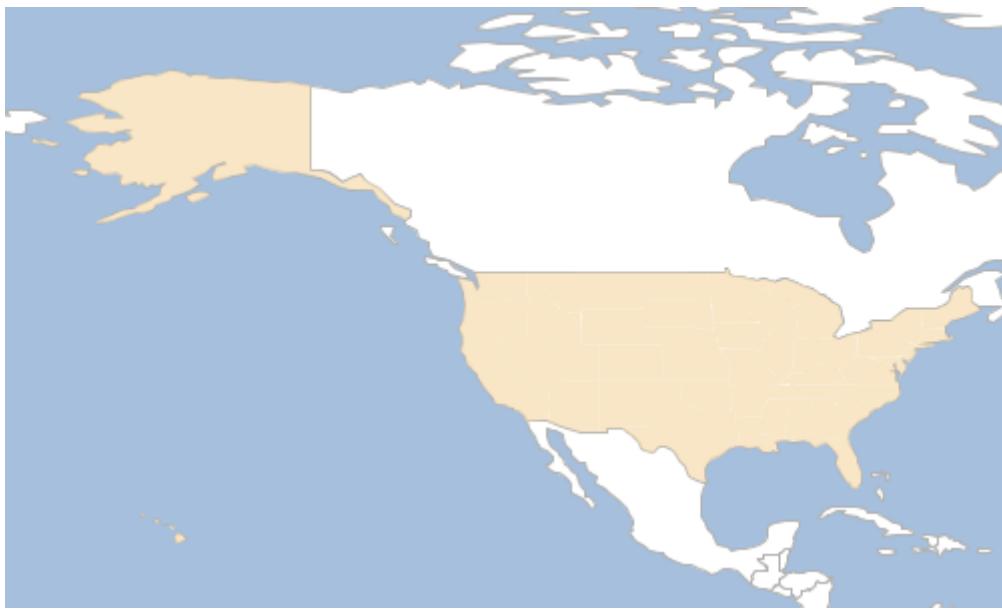


Create a Fill Symbolizer with an Icon

```
Fill fill = new Fill("green").icon('src/main/resources/trees.png', 'image/png')
```

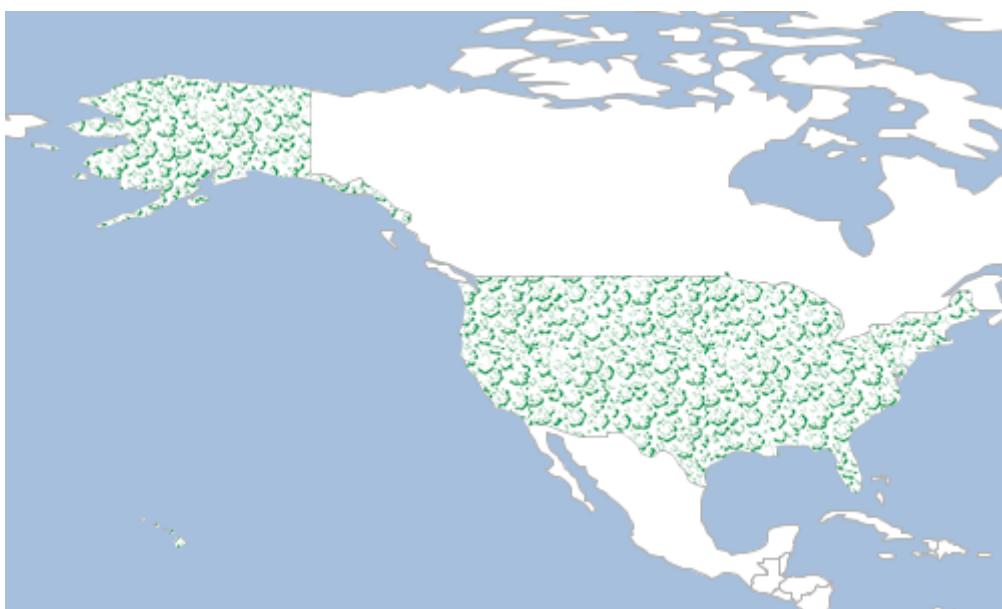


Create a Fill Symbolizer with a Hatch

```
Fill fill = new Fill("green").hatch("slash", new Stroke("green", 0.25), 8)
```

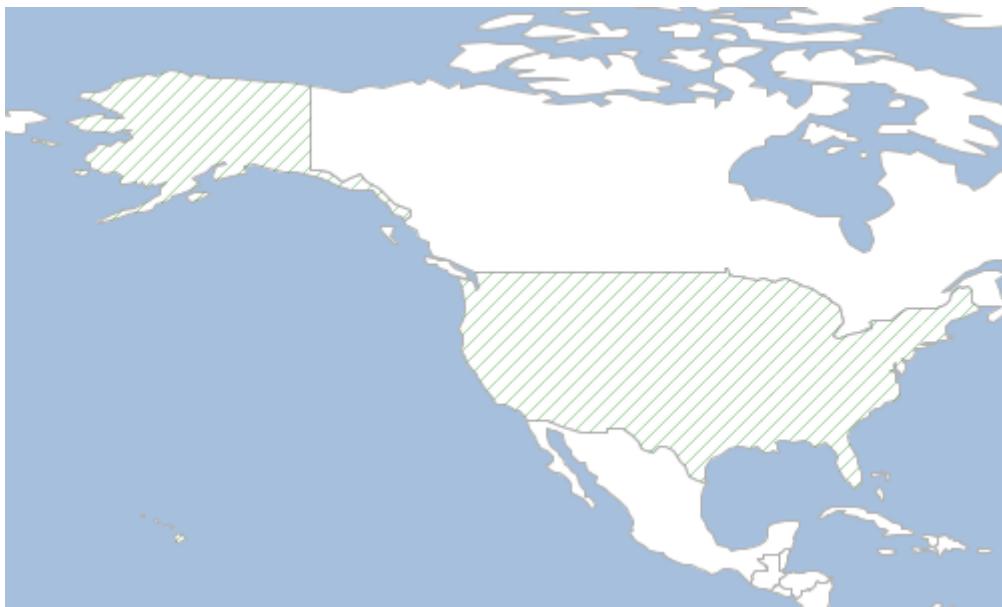


Create a Fill Symbolizer with a random fill

```
Symbolizer symbolizer = new Fill("white").hatch("circle", new Fill("black"), 2).  
random(  
    random: "free",  
    seed: 0,  
    symbolCount: 50,  
    tileSize: 50,  
    rotation: "none"  
) + new Stroke("black", 0.25)
```

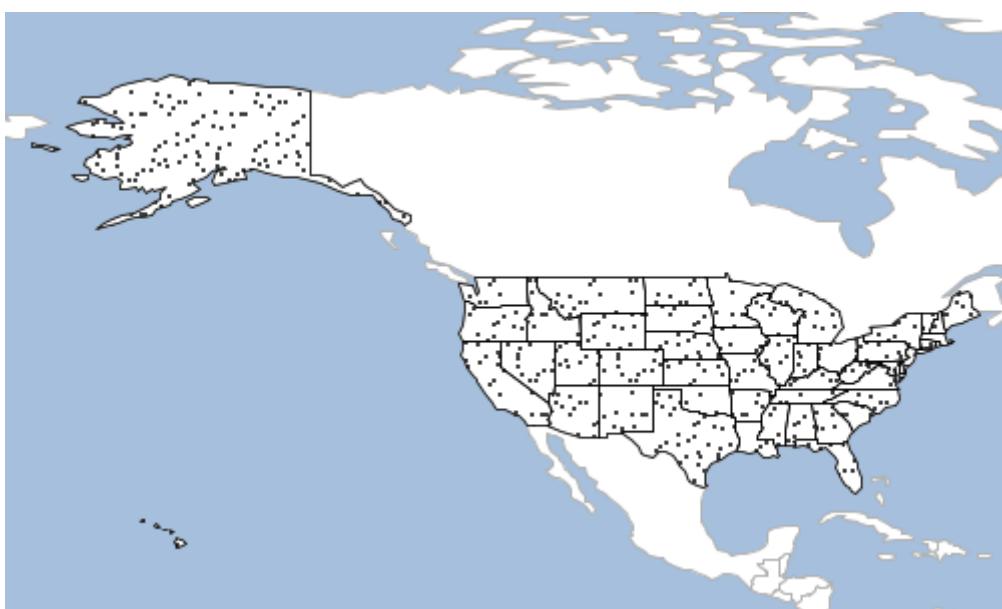

Create a Fill Symbolizer with a Recode Function


```
Function recodeFunction = new Function("Recode(region, " +
    "'West', '#B0C4DE', " +
    "'South', '#00FFFF', " +
    "'Northeast', '#9ACD32', " +
    "'Midwest', '#6495ED')")  
Symbolizer symbolizer = new Fill(recodeFunction) + new Stroke("#999999", 0.1) + new  
Label("postal").point([0.5, 0.5])
```

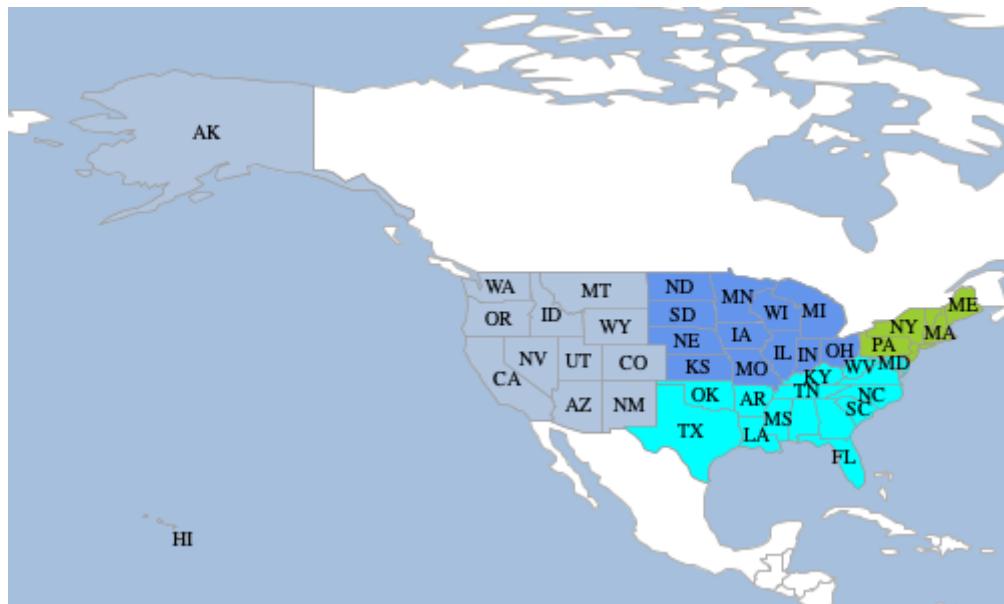

Creating Shapes


Create a Shape Symbolizer with a Color

```
Shape shape = new Shape("navy")
```

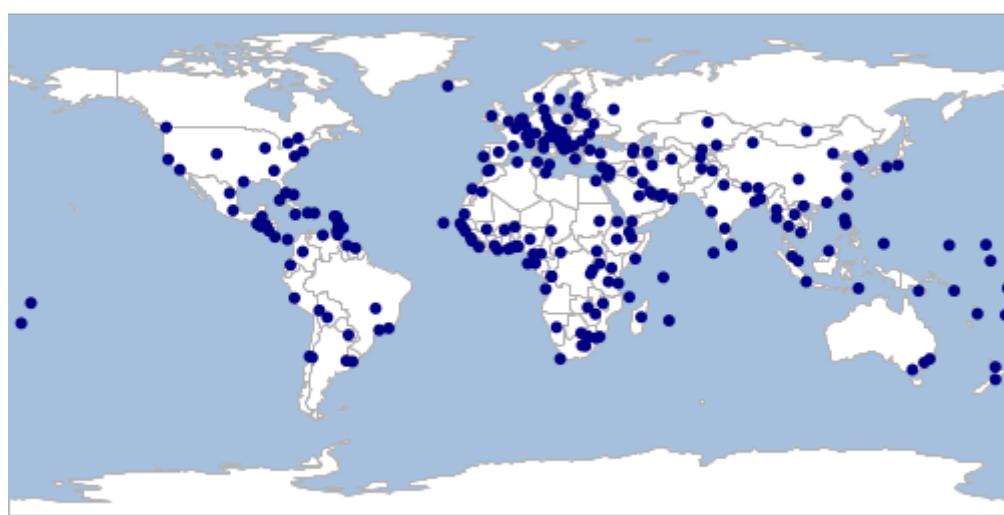

Create a Shape Symbolizer with a color, size, type, opacity and angle

```
Shape shape = new Shape("#9370DB", 8, "triangle", 0.75, 45)
```

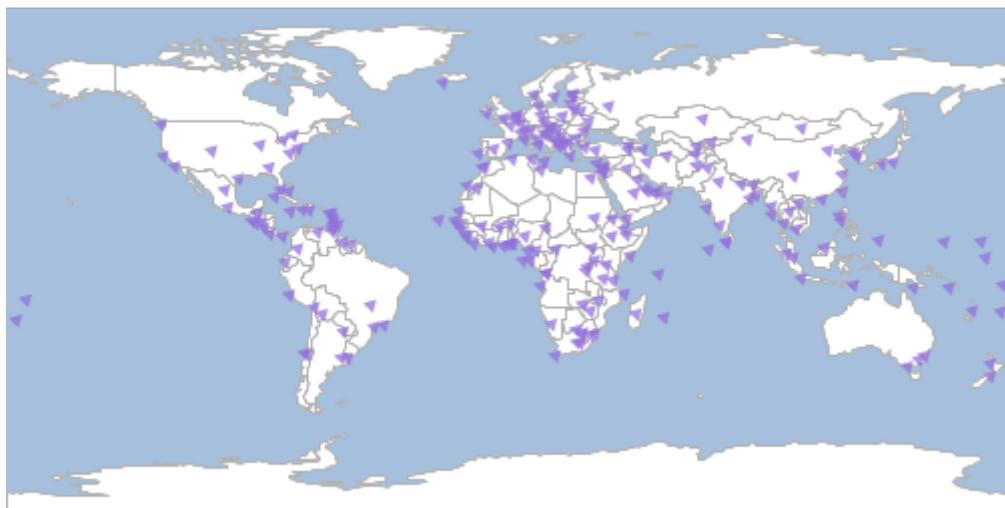


Create a Shape Symbolizer with named parameters

```
Shape shape = new Shape(color: "#8B4513", size: 10, type: "star", opacity: 1.0,  
rotation: 0)
```



Create a Shape Symbolizer with Stroke outline


```
Symbolizer symbolizer = new Shape("white", 10).stroke("navy", 0.5)
```

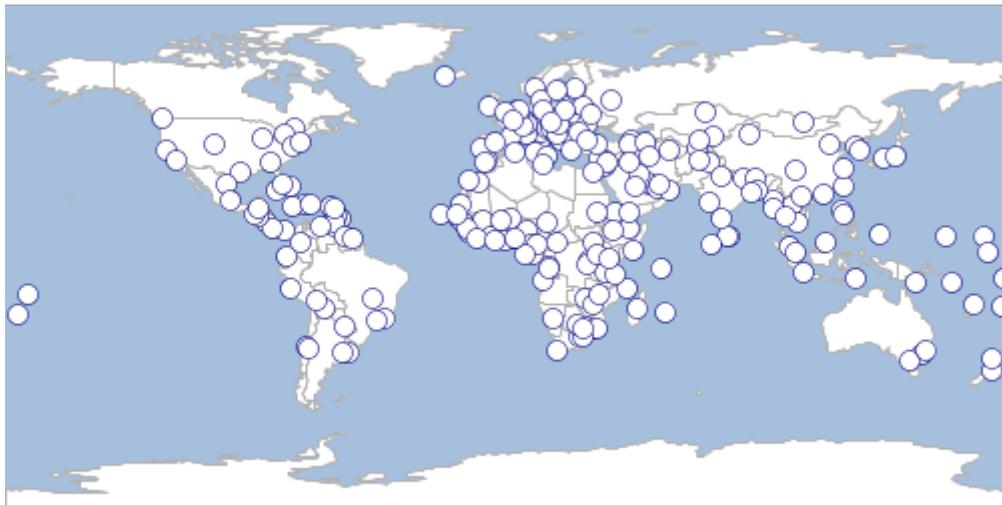

Creating Icons


Create an Icon Symbolizer

```
Symbolizer symbolizer = new Icon("src/main/resources/place.png", "image/png", 12)
```

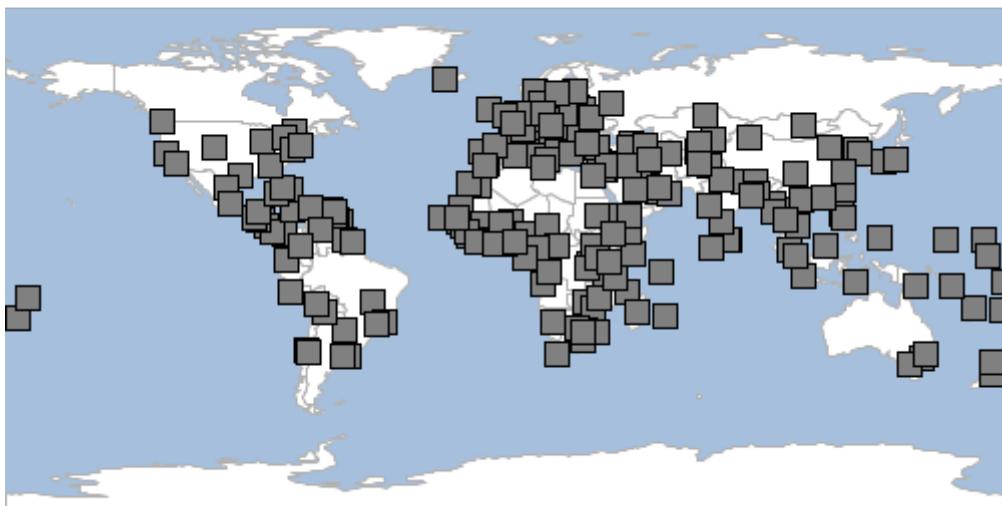

Create an Icon Symbolizer

```
Symbolizer symbolizer = new Icon(url: "src/main/resources/place.png", format: "image/png", size: 10)
```

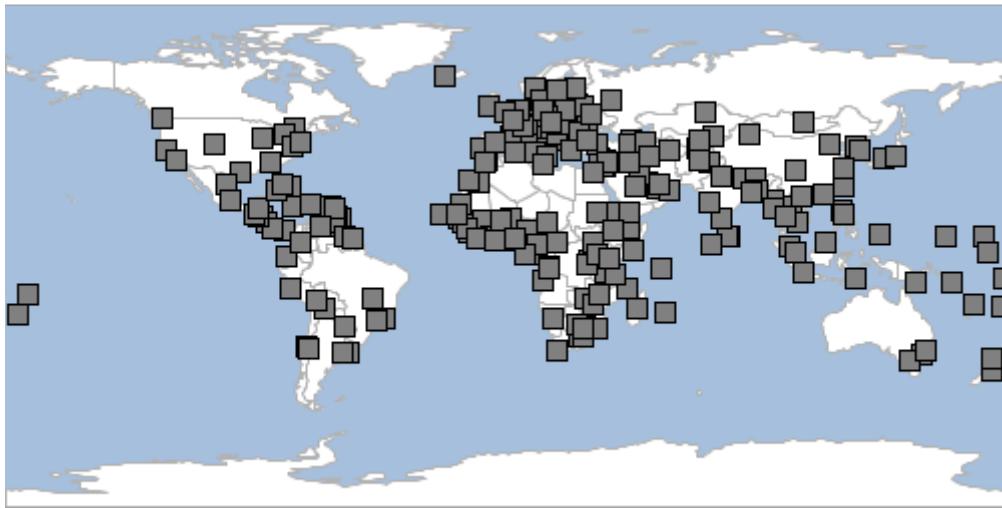

Creating Labels

Create a Label for a Point Layer

```
Symbolizer symbolizer = new Shape("blue", 6).stroke("navy", 0.5) + new Label("NAME")
    .point(
        [0.5, 0.5], ①
        [0, 5.0], ②
        0           ③
    )
```

① anchor

② displacement

③ rotation



Create a Label for a Point Layer with a Font

```
Symbolizer symbolizer = new Shape("blue", 6).stroke("navy", 0.5) + new Label("NAME")
).point(
    [0.5,0.5],
    [0, 5.0],
    0
) + new Font(
    "normal", ①
    "bold", ②
    12, ③
    "Arial" ④
)
```

① style (normal, italic, oblique)

② weight (normal, bold)


③ size (8,12,16,etc..)

④ family (serif, arial, verdana)



Create a Label for a Point Layer with Halo

```
Symbolizer symbolizer = new Shape("blue", 6).stroke("navy", 0.5) + new Label("NAME")
).point(
    [0.5,0.5],
    [0, 5.0],
    0
).fill(new Fill("white")) + new Halo(new Fill("navy"), 2.5)
```

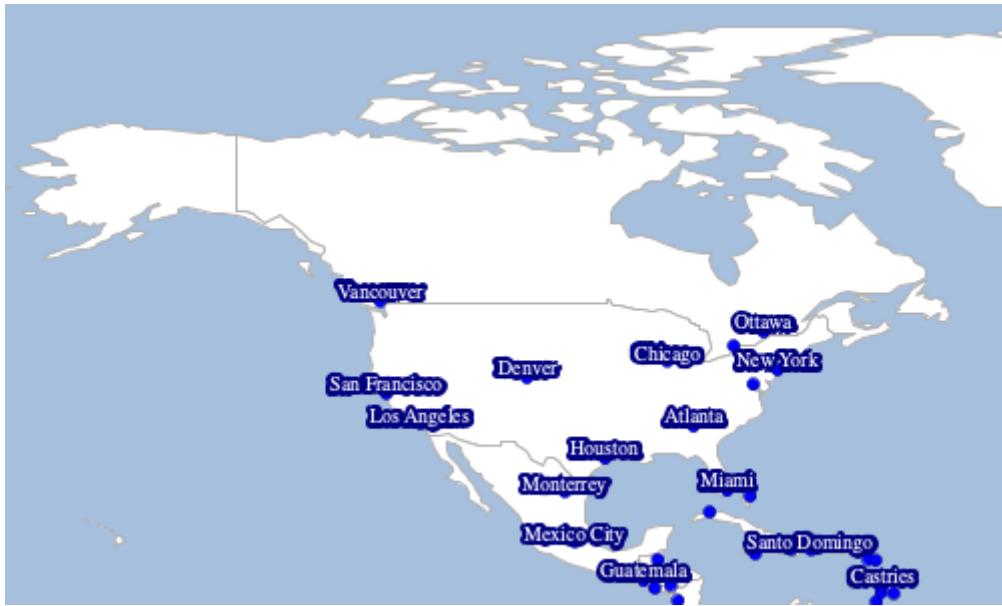

Create a Label for a Polygon Layer

```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.1) + new Label  
("name")  
.point(anchor: [0.5,0.5])  
.polygonAlign("mbr")
```




Create a Label for a Polygon Layer using an Expression

```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.1) + new Label  
(Expression.fromCQL("strToLowerCase(name)"))  
.point(anchor: [0.5,0.5])  
.polygonAlign("mbr")
```



Create a Label for a Polygon Layer using an Expression that concatenates properties and strings.

```
Expression expression = Expression.fromCQL("Concatenate(z, '/', x, '/', y)")
Symbolizer symbolizer = new Stroke("black", 1.0) + new Label(expression)
```

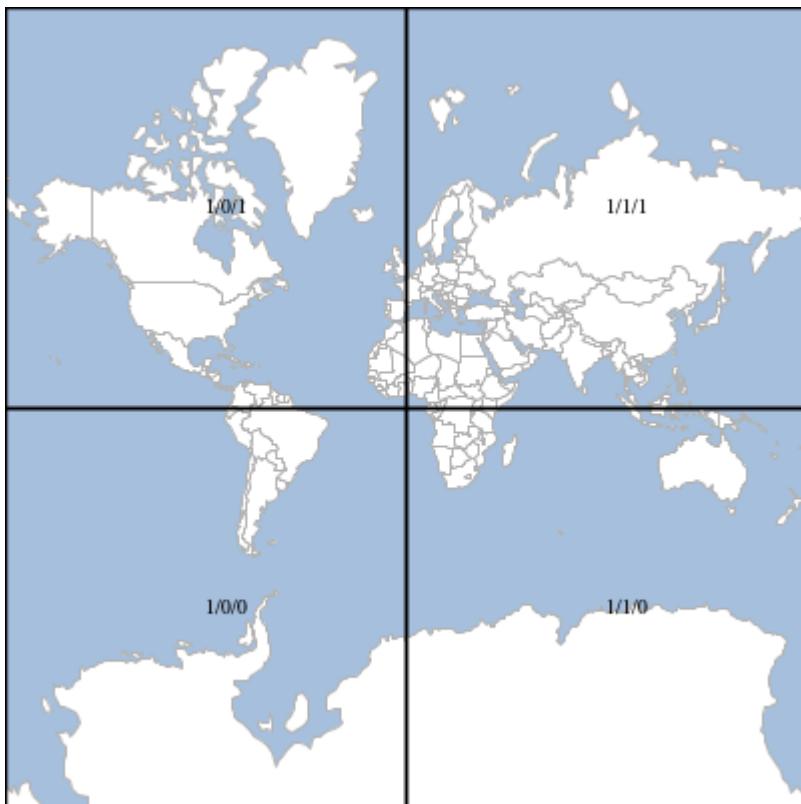

Create a Label for a Polygon Layer with strike through style.

```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.1) + new Label
("name")
    .point(anchor: [0.5,0.5])
    .polygonAlign("mbr")
    .strikethrough(true)
```



Create a Label for a Polygon Layer with word and character spacing.

```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.1) + new Label
("name")
    .point(anchor: [0.5,0.5])
    .polygonAlign("mbr")
    .wordSpacing(8)
    .characterSpacing(5)
```



Create a Label for a Polygon Layer with underlining.

```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.1) + new Label
("name")
    .point(anchor: [0.5,0.5])
    .polygonAlign("mbr")
    .underline(true)
```



Create a Label for a Line Layer

```
Symbolizer symbolizer = new Stroke("blue", 0.75) + new Label("name")
    .fill(new Fill("navy"))
    .linear(follow: true, offset: 50, displacement: 200, repeat: 150
).maxDisplacement(400).maxAngleDelta(90)
    .halo(new Fill("white"), 2.5)
    .font(new Font(size: 10, weight: "bold"))
```



Creating Transforms

Create a normal Transform symbolizer that styles a polygon as a point by calculating it's centroid

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
Symbolizer symbolizer = new Transform("centroid(the_geom)") +
    new Shape(color: "red", size: 10, type: "star")
countries.style = symbolizer
```



Create a rendering Transform symbolizer that styles a point layer by calculating the convex hull


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer places = workspace.get("places")
Process process = new Process("convexhull",
    "Create a convexhull around the features",
    [features: geoscript.layer.Cursor],
    [result: geoscript.layer.Cursor],
    { inputs ->
        def geoms = new GeometryCollection(inputs.features.collect{ f -> f.geom})
        def output = new Layer()
        output.add([geoms.convexHull])
        [result: output]
    }
)
Function function = new Function(process, new Function("parameter", new Expression
("features")))
Symbolizer symbolizer = new Transform(function, Transform.RENDERING) + new Fill
("aqua", 0.75) + new Stroke("navy", 0.5)
places.style = symbolizer
```



Creating Gradients


Create a Gradient Symbolizer from a Layer's Field using quantile method

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
Gradient gradient = new Gradient(countries, "POP_EST", "quantile", 8, "Greens")
countries.style = gradient
```

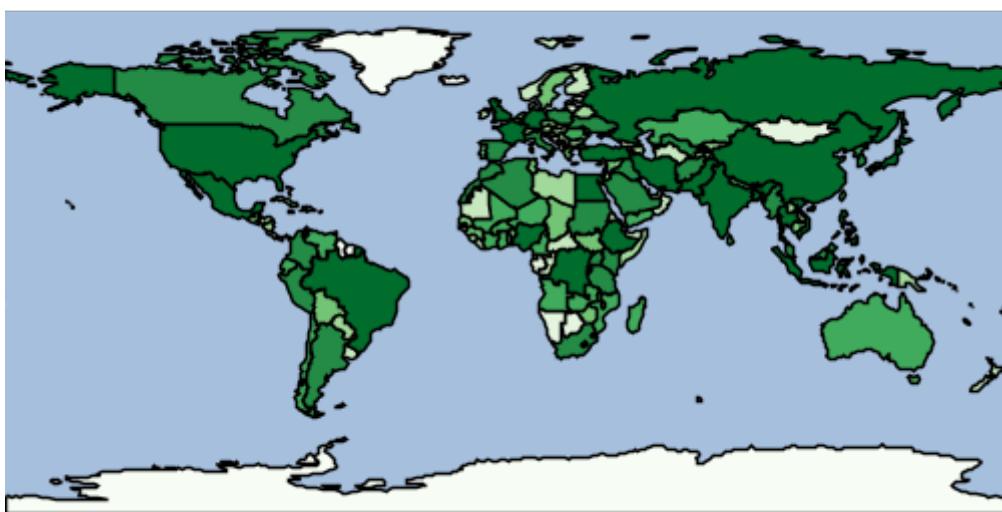


Create a Gradient Symbolizer from a Layer's Field using equal interval method

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
Gradient gradient = new Gradient(countries, "POP_EST", "equalinterval", 3, "Reds")
countries.style = gradient
```

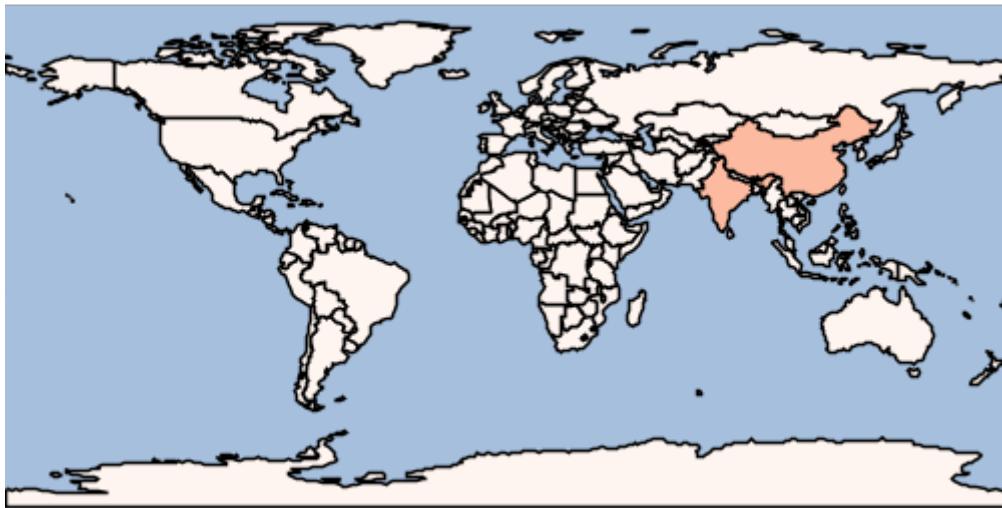

Create a custom Gradient Symbolizer between Symbolizers and values


```
Gradient gradient = new Gradient(  
    new Property("POP2020"),  
    [0, 10000, 20000, 30000],  
    [  
        new Shape("white", 4).stroke("black", 0.5),  
        new Shape("#b0d2e8", 8).stroke("black", 0.5),  
        new Shape("#3e8ec4", 16).stroke("black", 0.5),  
        new Shape("#08306b", 24).stroke("black", 0.5)  
    ],  
    5,  
    "linear"  
)
```

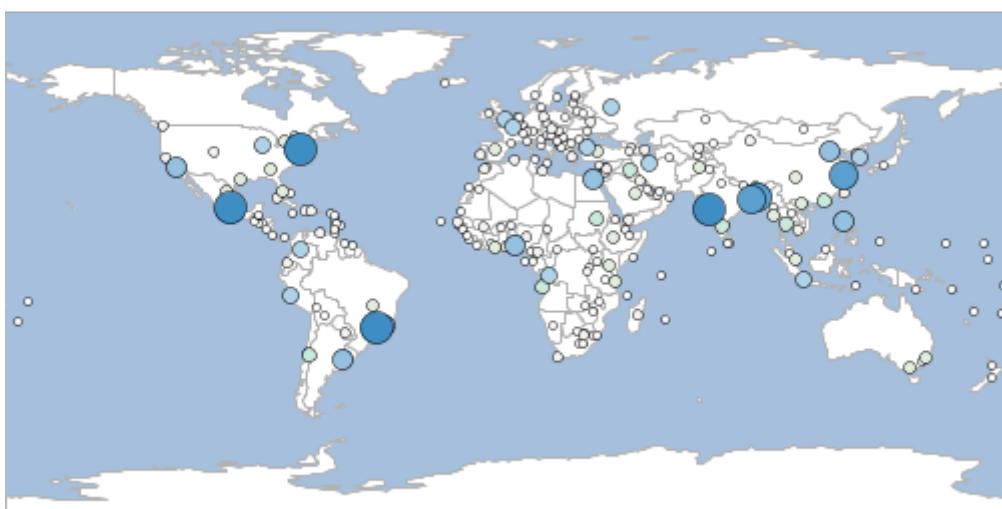

Creating Unique Values


Create a Unique Values Symbolizer from a Layer's Field

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
UniqueValues uniqueValues = new UniqueValues(countries, "NAME")
countries.style = uniqueValues
```

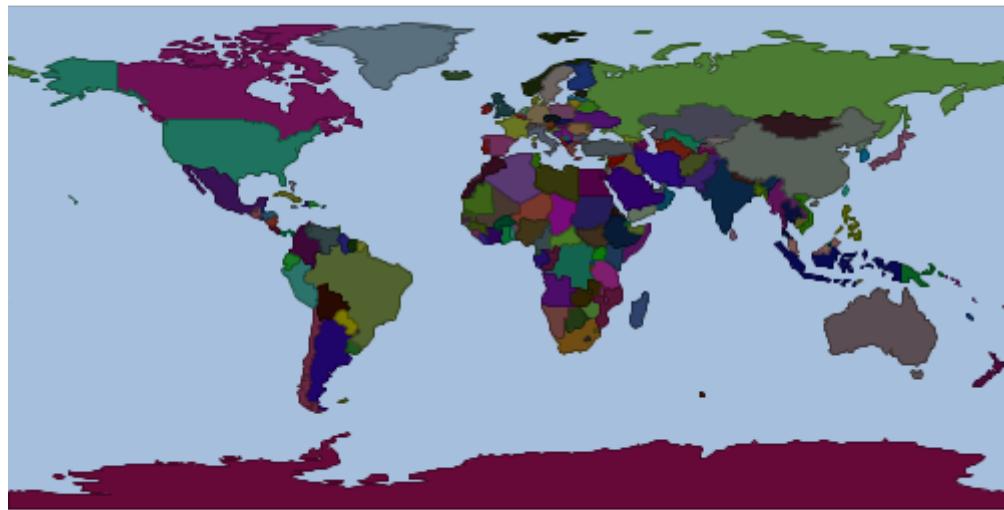


Create a Unique Values Symbolizer from a Layer's Field and a Closure

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
UniqueValues uniqueValues = new UniqueValues(countries, "NAME", {int index, String
value -> Color.getRandom()})
countries.style = uniqueValues
```

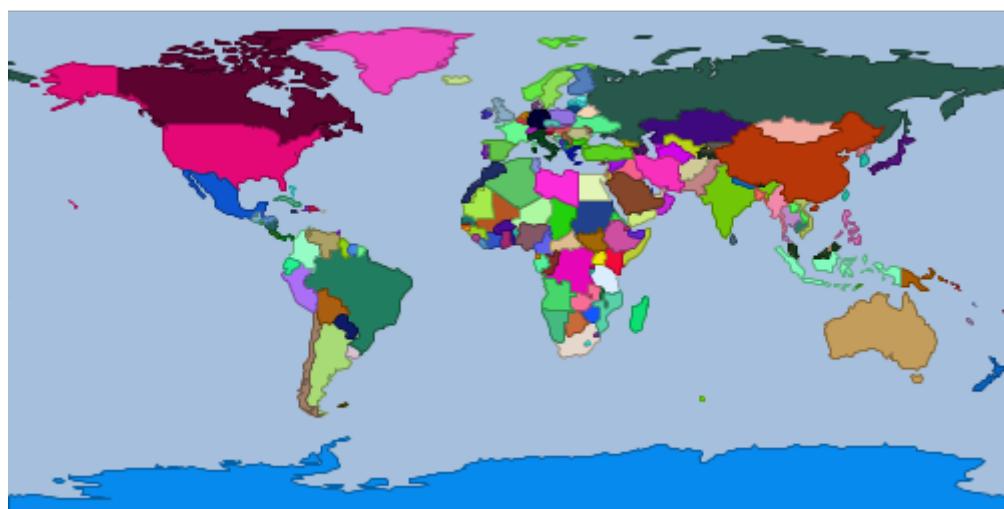

Create a Unique Values Symbolizer from a Layer's Field and a color palette

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
UniqueValues uniqueValues = new UniqueValues(countries, "NAME",
"LightPurpleToDarkPurpleHeatMap")
countries.style = uniqueValues
```

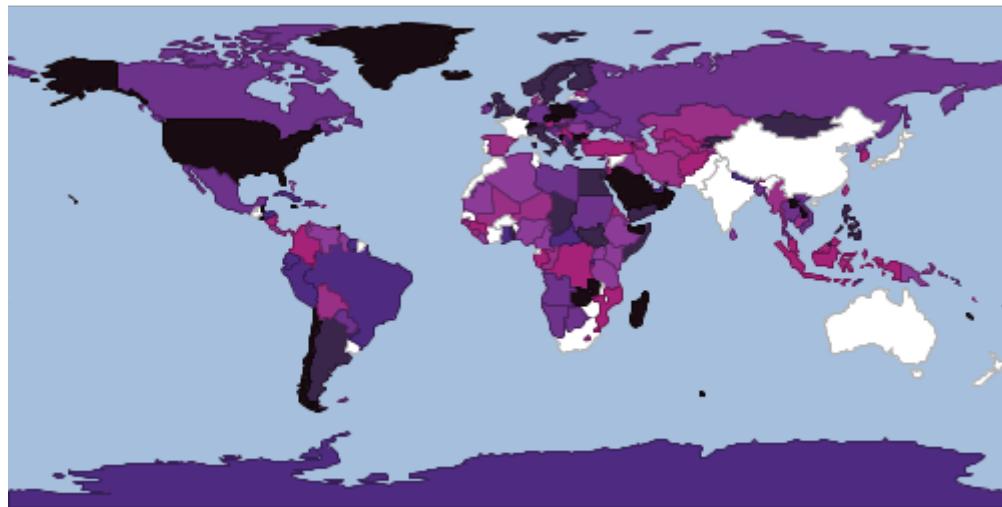


Create a Unique Values Symbolizer from a File with a color per value

```
Workspace workspace = new Directory("src/main/resources/mars")
Layer marsGeology = workspace.get("geo_units_oc_dd")

File uniqueValuesFile = new File
("src/main/resources/mars/I1802ABC_geo_units_RGBlut.txt")
UniqueValuesReader styleReader = new UniqueValuesReader("UnitSymbol", "polygon")
Symbolizer symbolizer = styleReader.read(uniqueValuesFile)
```


```
Unit,R,G,B
AHa,175,0,111
AHat,192,54,22
AHcf,150,70,72
AHh,109,13,60
AHpe,232,226,82
AHT,99,0,95
AHT3,233,94,94
Aa1,255,236,207
Aa2,145,73,76
Aa3,254,212,164
Aa4,212,109,19
Aa5,175,66,28
```

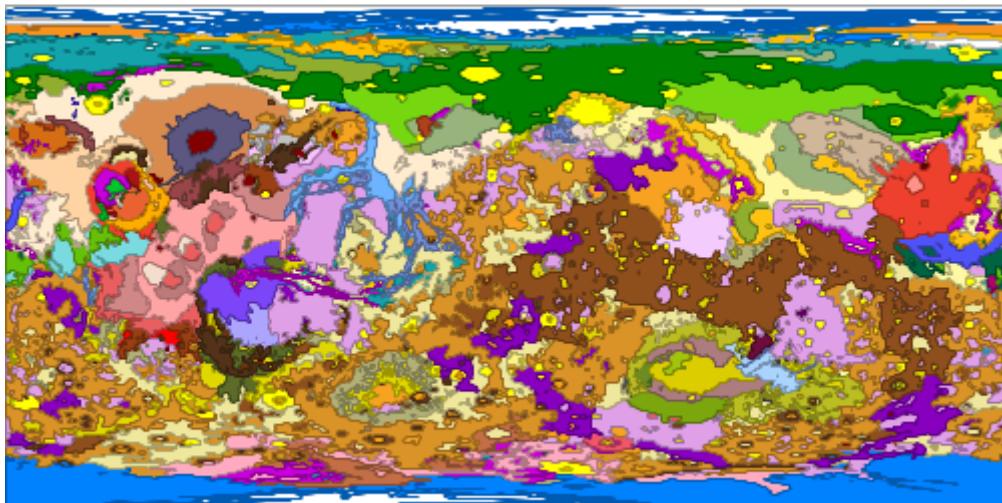

Creating Color Maps


Create a ColorMap Symbolizer for a Raster using a list of Colors

```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
ColorMap colorMap = new ColorMap([
    [color: "#9fd182", quantity:25],
    [color: "#3e7f3c", quantity:470],
    [color: "#133912", quantity:920],
    [color: "#08306b", quantity:1370],
    [color: "#fffff5", quantity:1820],
])
raster.style = colorMap
```

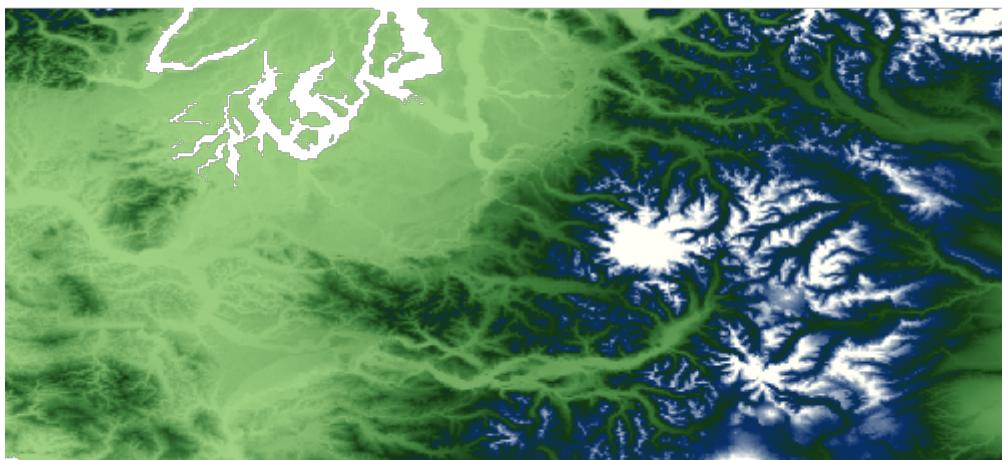

Create a ColorMap Symbolizer for a Raster using a list of Colors with opacity

```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
ColorMap colorMap = new ColorMap([
    [color: "#9fd182", quantity:25],
    [color: "#3e7f3c", quantity:470],
    [color: "#133912", quantity:920],
    [color: "#08306b", quantity:1370],
    [color: "#fffff5", quantity:1820],
]).opacity(0.25)
raster.style = colorMap
```

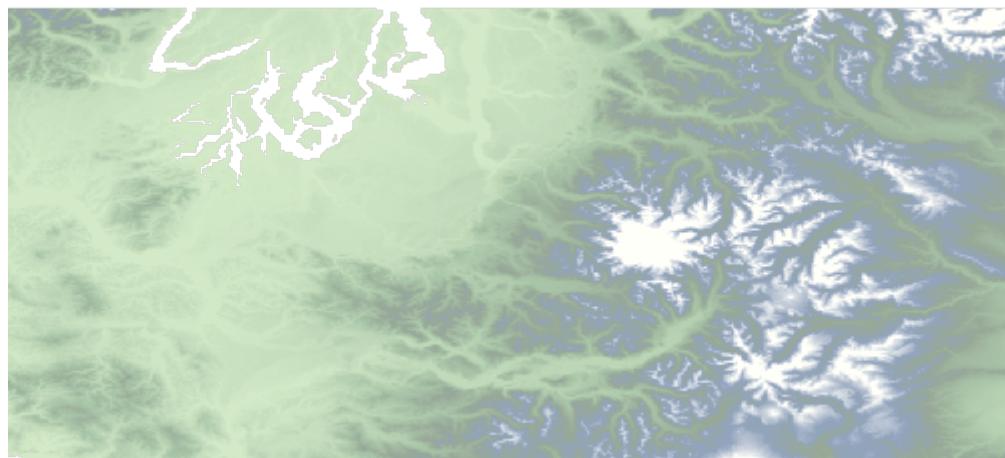

Create a ColorMap Symbolizer for a Raster using a color palette


```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
ColorMap colorMap = new ColorMap(
    25,          ①
    1820,        ②
    "MutedTerrain", ③
    5            ④
)
println colorMap
raster.style = colorMap
```

① min value

② max value

③ color palette name

④ number of categories

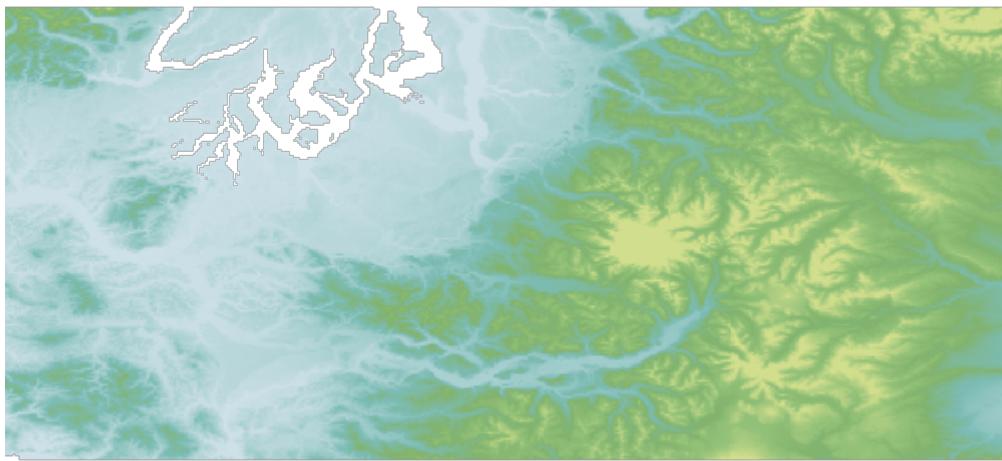

Create a ColorMap Symbolizer with intervals for a Raster using a list of Colors


```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
ColorMap colorMap = new ColorMap([
    [color: "#9fd182", quantity:25],
    [color: "#3e7f3c", quantity:470],
    [color: "#133912", quantity:920],
    [color: "#08306b", quantity:1370],
    [color: "#fffff5", quantity:1820],
], "intervals", true)
raster.style = colorMap
```



Creating Channel Selection and Contrast Enhancement


Create a Raster Symbolizer using ChannelSelection and ContrastEnhancement using the normalize method

```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
Symbolizer symbolizer = new ChannelSelection()
    .gray("1", new ContrastEnhancement("normalize"))
raster.style = symbolizer
```

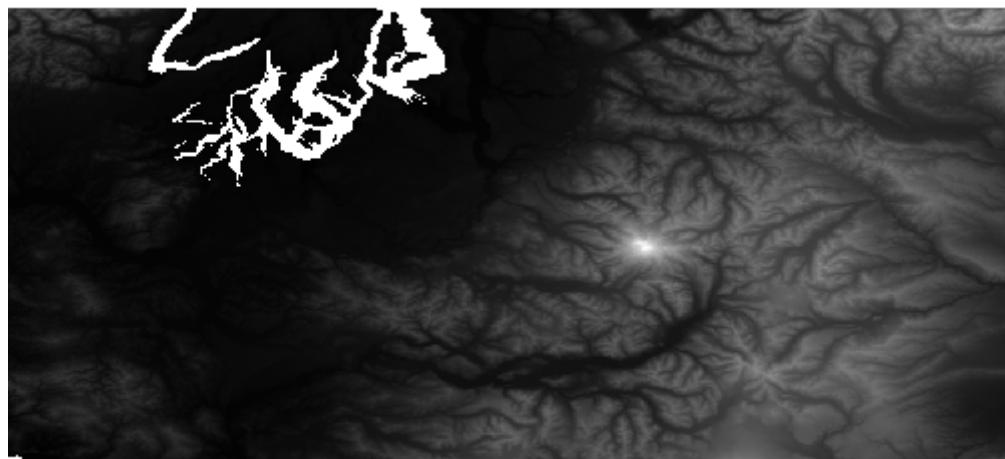

Create a Raster Symbolizer using ChannelSelection and ContrastEnhancement using the histogram method

```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
Symbolizer symbolizer = new ChannelSelection()
    .gray("1", new ContrastEnhancement("histogram", 0.65))
raster.style = symbolizer
```

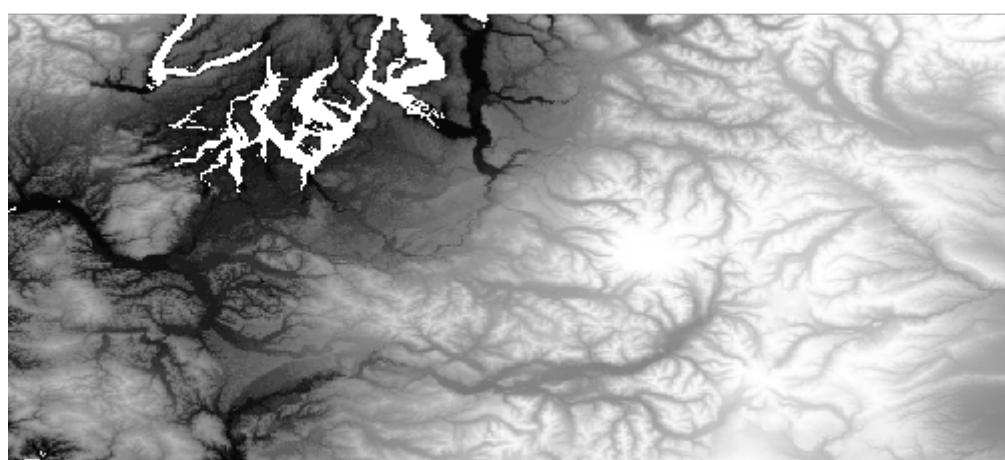

Reading and Writing Styles

Style Readers and Writers are found in the [geoscript.style.io](#) package.

Finding Style Readers and Writers

List all Style Writers

```
List<Writer> writers = Writers.list()
writers.each { Writer writer ->
    println writer.class.getSimpleName
}
```

```
SLDWriter
ColorTableWriter
YSLDWriter
```

Find a Style Writer

```
Writer writer = Writers.find("sld")
println writer.class.getSimpleName
```

```
SLDWriter
```

List all Style Readers

```
List<Reader> readers = Readers.list()
readers.each { Reader reader ->
    println reader.class.getSimpleName
}
```

```
SLDReader
CSSReader
ColorTableReader
YSLDReader
SimpleStyleReader
```

Find a Style Reader

```
Reader reader = Readers.find("sld")
println reader.class.getSimpleName
```

```
SLDReader
```

SLD

GeoScript Groovy can read and write Style Layer Descriptor (SLD) documents.

Write a Symbolizer to SLD

```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.5)
SLDWriter writer = new SLDWriter()
String sld = writer.write(symbolizer)
println sld
```

```
<?xml version="1.0" encoding="UTF-8"?><sld:StyledLayerDescriptor
xmlns:sld="http://www.opengis.net/sld" xmlns="http://www.opengis.net/sld"
xmlns:gml="http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc"
version="1.0.0">
  <sld:UserLayer>
    <sld:LayerFeatureConstraints>
      <sld:FeatureTypeConstraint/>
    </sld:LayerFeatureConstraints>
    <sld:UserStyle>
      <sld:Name>Default Styler</sld:Name>
      <sld:FeatureTypeStyle>
        <sld:Name>name</sld:Name>
        <sld:Rule>
          <sld:PolygonSymbolizer>
            <sld:Fill>
              <sld:CssParameter name="fill">#ffffff</sld:CssParameter>
            </sld:Fill>
          </sld:PolygonSymbolizer>
          <sld:LineSymbolizer>
            <sld:Stroke>
              <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>
            </sld:Stroke>
          </sld:LineSymbolizer>
        </sld:Rule>
      </sld:FeatureTypeStyle>
    </sld:UserStyle>
  </sld:UserLayer>
</sld:StyledLayerDescriptor>
```

Write a Symbolizer to SLD with NamedLayer element.

```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.5)
SLDWriter writer = new SLDWriter()
String sld = writer.write(symbolizer, type: "NamedLayer") ①
println sld
```

① type can be UserLayer (default) or NamedLayer


```
<?xml version="1.0" encoding="UTF-8"?><sld:StyledLayerDescriptor
xmlns:sld="http://www.opengis.net/sld" xmlns="http://www.opengis.net/sld"
xmlns:gml="http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc"
version="1.0.0">
  <sld:NamedLayer>
    <sld:Name/>
    <sld:UserStyle>
      <sld:Name>Default Styler</sld:Name>
      <sld:FeatureTypeStyle>
        <sld:Name>name</sld:Name>
        <sld:Rule>
          <sld:PolygonSymbolizer>
            <sld:Fill>
              <sld:CssParameter name="fill">#ffffff</sld:CssParameter>
            </sld:Fill>
          </sld:PolygonSymbolizer>
          <sld:LineSymbolizer>
            <sld:Stroke>
              <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>
            </sld:Stroke>
          </sld:LineSymbolizer>
        </sld:Rule>
      </sld:FeatureTypeStyle>
    </sld:UserStyle>
  </sld:NamedLayer>
</sld:StyledLayerDescriptor>
```

Read a Style from an SLD String

```
String sld = """<?xml version="1.0" encoding="UTF-8"?>
<sld:StyledLayerDescriptor xmlns="http://www.opengis.net/sld"
  xmlns:sld="http://www.opengis.net/sld" xmlns:ogc="http://www.opengis.net/ogc"
  xmlns:gml="http://www.opengis.net/gml" version="1.0.0">
  <sld:UserLayer>
    <sld:LayerFeatureConstraints>
      <sld:FeatureTypeConstraint/>
    </sld:LayerFeatureConstraints>
    <sld:UserStyle>
      <sld:Name>Default Styler</sld:Name>
      <sld:FeatureTypeStyle>
        <sld:Name>name</sld:Name>
        <sld:Rule>
          <sld:PolygonSymbolizer>
            <sld:Fill>
              <sld:CssParameter name="fill">#ffffff</sld:CssParameter>
            </sld:Fill>
          </sld:PolygonSymbolizer>
          <sld:LineSymbolizer>
            <sld:Stroke>
              <sld:CssParameter name="stroke">#000000</sld:CssParameter>
              <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>
            </sld:Stroke>
          </sld:LineSymbolizer>
        </sld:Rule>
      </sld:FeatureTypeStyle>
    </sld:UserStyle>
  </sld:UserLayer>
</sld:StyledLayerDescriptor>
"""

SLDReader reader = new SLDReader()
Style style = reader.read(sld)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = style
```

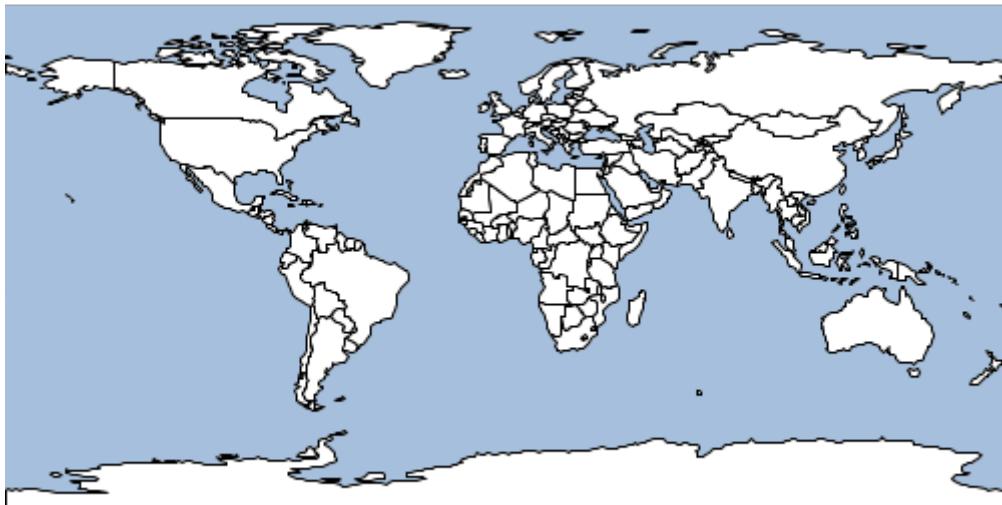

CSS


GeoScript Groovy can only read CSS documents.

Read a Style from an CSS String

```
String css = """
* {
    fill: #eeeeee;
    fill-opacity: 1.0;
    stroke: #000000;
    stroke-width: 1.2;
}
"""

CSSReader reader = new CSSReader()
Style style = reader.read(css)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = style
```

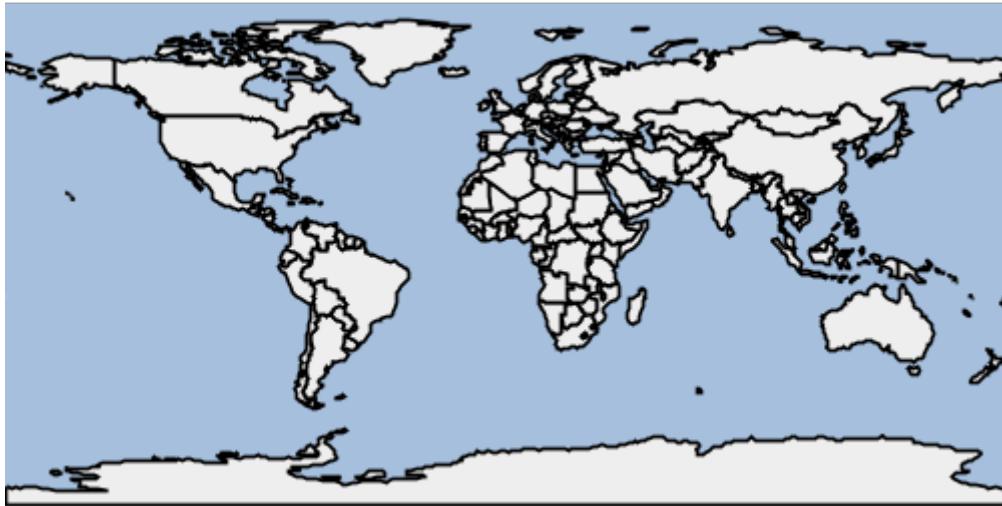

YSLD

GeoScript Groovy can read and write YAML Style Layer Descriptors (YSLD) documents.

Write a Symbolizer to YSLD


```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.5)
YSLDWriter writer = new YSLDWriter()
String ysld = writer.write(symbolizer)
println ysld
```

```
name: Default Styler
feature-styles:
- name: name
  rules:
  - scale: [min, max]
    symbolizers:
    - polygon:
        fill-color: '#FFFFFF'
    - line:
        stroke-color: '#000000'
        stroke-width: 0.5
```

Read a Style from an YAML Style Layer Descriptors (YSLD) String

```
String ysls = """
name: Default Styler
feature-styles:
- name: name
  rules:
  - scale: [min, max]
    symbolizers:
    - polygon:
      fill-color: '#FFFFFF'
    - line:
      stroke-color: '#000000'
      stroke-width: 0.5
"""
YSLDReader reader = new YSLDReader()
Style style = reader.read(ysls)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = style
```

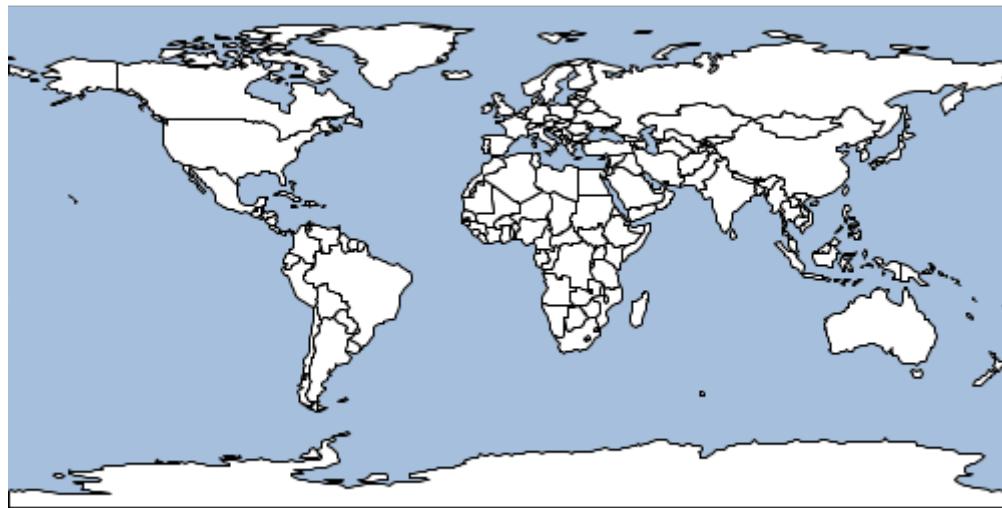

Simple Style Reader

A SimpleStyleReader that can easily create simple Styles using Maps or Strings.

- Fill properties
 - **fill** (color)
 - **fill-opacity** (0-1)
- Stroke properties
 - **stroke** (color)
 - **stroke-width** (double)

- **stroke-opacity** (0-1)
- Shape properties
 - **shape** (color)
 - **shape-size** (double)
 - **shape-type** (circle, square, triangle, star, cross, or x)
- Label properties
 - **label** The name of the Field
 - **label-color** (black)
 - **label-size** (12)
 - **label-style** (normal, italic, oblique)
 - **label-weight** (normal, bold)
 - **label-family** (serif, Arial, Verdana)
 - **label-halo-color** (white)
 - **label-halo-radius** (5)
 - **label-placement** (point, line)
 - **label-point-anchor** (0.5,0.5)
 - **label-point-displace** (1,2)
 - **label-point-rotate** (45)
 - **label-line-offset** (2)
 - **label-line-gap** (3)
 - **label-line-igap** (4)
 - **label-line-align** (true, false)
 - **label-line-follow** (true, false)
 - **label-line-group** (true, false)
 - **label-line-displacement** (4)
 - **label-line-repeat** (true, false)

Read a Style with fill and stroke properties from a Simple Style String

```
String str = "fill=#555555 fill-opacity=0.6 stroke=#555555 stroke-width=0.5"
SimpleStyleReader reader = new SimpleStyleReader()
Style style = reader.read(str)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = style
```



Read a Style with fill, stroke, and label properties from a Simple Style String


```
String str = "fill:white stroke=navy label=NAME label-size=10"  
SimpleStyleReader reader = new SimpleStyleReader()  
Style style = reader.read(str)  
  
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')  
Layer countries = workspace.get("countries")  
countries.style = style
```



Read a Style with shape properties from a Simple Style String


```
String str = "shape-type=circle shape-size=8 shape=orange"
SimpleStyleReader reader = new SimpleStyleReader()
Style style = reader.read(str)
println style

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer places = workspace.get("places")
places.style = style
```

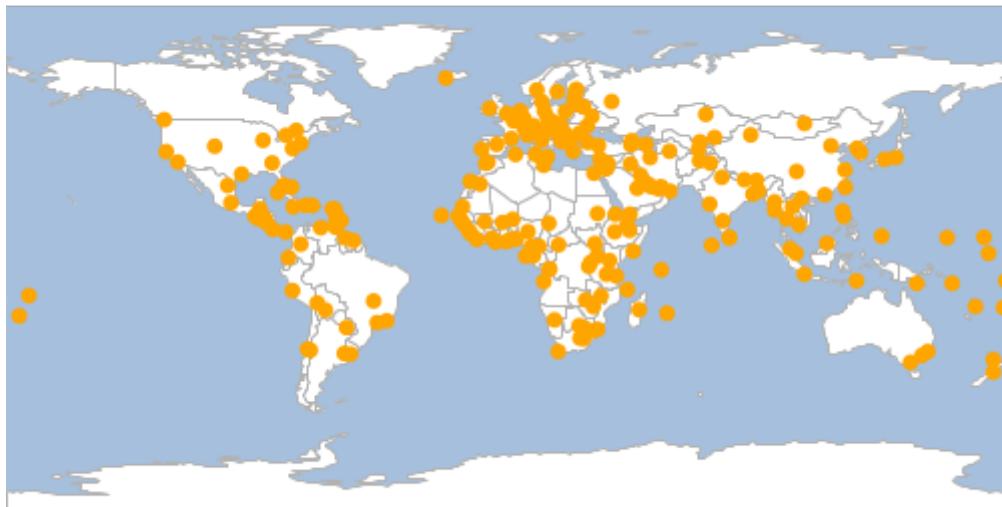

Read a Style with line labels from a Simple Style String.

```
String str = "stroke=blue stroke-width=0.75 label=name label-color=navy label-
placement=line" +
    " label-line-follow=true label-line-offset=2 label-line-displacement=5 label-
line-repeat=10" +
    " label-maxdisplacement=6 label-maxangledelta=90" +
    " label-halo-color=white label-halo-radius=2.5 label-size=10 label-
weight=bold"
SimpleStyleReader reader = new SimpleStyleReader()
Style style = reader.read(str)
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer rivers = workspace.get("rivers")
rivers.style = style
```

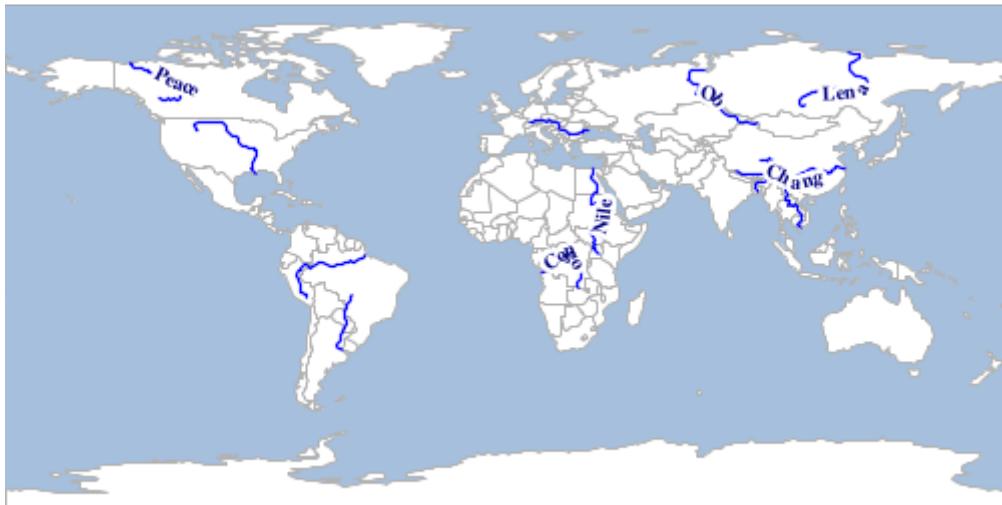

Read a Style with shape and label properties from a Simple Style String

```
String str = "shape=blue shape-size=6 stroke=navy stroke-width=navy stroke-width=0.5  
label=NAME label-placement=point" +  
    " label-point-anchor=0.5,0.5 label-point-displace=0,6 label-point-rotate=0"  
SimpleStyleReader reader = new SimpleStyleReader()  
Style style = reader.read(str)  
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')  
Layer places = workspace.get("places")  
places.style = style
```



Read a Style with fill and stroke properties from a Simple Style Map

```
Map map = [
    'fill': '#555555',
    'fill-opacity': 0.6,
    'stroke': '#555555',
    'stroke-width': 0.5
]
SimpleStyleReader reader = new SimpleStyleReader()
Style style = reader.read(map)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = style
```



Color Table

GeoScript Groovy can read and write color table strings and files. This format can be used with ColorMaps to style Rasters.


Write a ColorMap to a color table string

```
ColorMap colorMap = new ColorMap(25, 1820, "BoldLandUse", 5)
ColorTableWriter writer = new ColorTableWriter()
String str = writer.write(colorMap)
println str
```

```
25.0 178 156 195
473.75 79 142 187
922.5 143 146 56
1371.25 193 132 55
1820.0 181 214 177
```

Read a ColorMap from a color table string

```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
ColorTableReader reader = new ColorTableReader()
ColorMap colorMap = reader.read("""25.0 178 156 195
473.75 79 142 187
922.5 143 146 56
1371.25 193 132 55
1820.0 181 214 177
""")
raster.style = colorMap
```

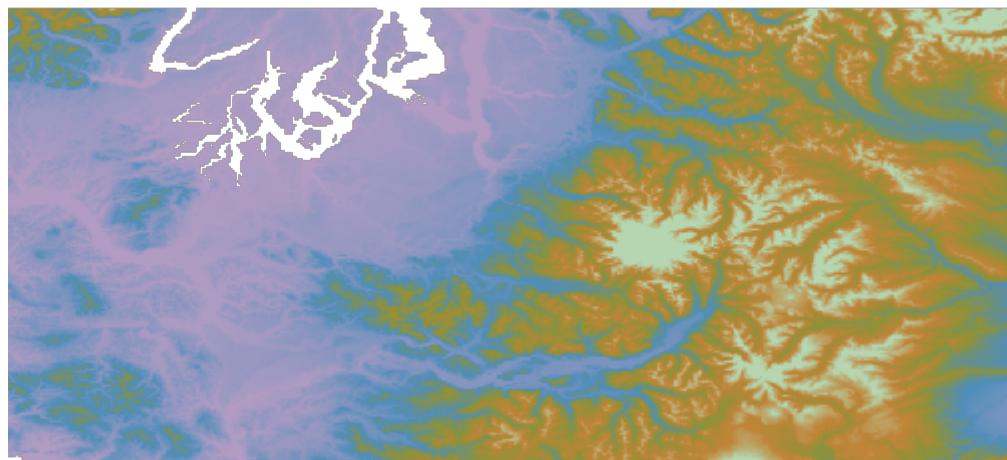

Style Repositories

Style Repositories can be found in the [geoscript.style](#) package.

Style Repositories are useful for storing styles for layers in a directories or databases.

Flat Directory

All files are stored in a single directory.

Store styles in a flat directory.

```
File directory = new File("target/styles")
directory.mkdir()
File file = new File("src/main/resources/states.sld")

StyleRepository styleRepository = new DirectoryStyleRepository(directory)
styleRepository.save("states", "states", file.text)

String sld = styleRepository.getDefaultForLayer("states")
println sld

List<Map<String, String>> stylesForLayer = styleRepository.getForLayer("states")
println stylesForLayer

List<Map<String, String>> allStyles = styleRepository.getAll()
println stylesForLayer

styleRepository.delete("states", "states")
```

Nested Directory

Files are stored in nested directories based on the layer name.

Store styles in nested directories.

```
File directory = new File("target/styles")
directory.mkdir()
File file = new File("src/main/resources/states.sld")

StyleRepository styleRepository = new NestedDirectoryStyleRepository(directory)
styleRepository.save("states", "states", file.text)

String sld = styleRepository.getDefaultForLayer("states")
println sld

List<Map<String, String>> stylesForLayer = styleRepository.getForLayer("states")
println stylesForLayer

List<Map<String, String>> allStyles = styleRepository.getAll()
println stylesForLayer

styleRepository.delete("states", "states")
```

PostGIS Database

Store styles in a PostGIS database.

```
File databaseFile = new File("target/styles_h2.db")
File file = new File("src/main/resources/states.sld")

Sql sql = Sql.newInstance("jdbc:postgres://localhost/world", "user", "pass",
"org.postgresql.Driver")
StyleRepository styleRepository = DatabaseStyleRepository.forPostgres(sql)
styleRepository.save("states", "states", file.text)

String sld = styleRepository.getDefaultForLayer("states")
println sld

List<Map<String, String>> stylesForLayer = styleRepository.getForLayer("states")
println stylesForLayer

List<Map<String, String>> allStyles = styleRepository.getAll()
println stylesForLayer

styleRepository.delete("states", "states")
```

SQLite Database

Store styles in a SQLite database. This works with GeoPackage layers.

```
File databaseFile = new File("target/styles_sqlite.db")
File file = new File("src/main/resources/states.sld")

Sql sql = Sql.newInstance("jdbc:sqlite:${databaseFile.getAbsolutePath}",
"org.sqlite.JDBC")
StyleRepository styleRepository = DatabaseStyleRepository.forSqlite(sql)
styleRepository.save("states", "states", file.text)

String sld = styleRepository.getDefaultForLayer("states")
println sld

List<Map<String, String>> stylesForLayer = styleRepository.getForLayer("states")
println stylesForLayer

List<Map<String, String>> allStyles = styleRepository.getAll()
println stylesForLayer

styleRepository.delete("states", "states")
```

H2 Database

Store styles in a H2 database.

```
File databaseFile = new File("target/styles_h2.db")
File file = new File("src/main/resources/states.sld")

H2 h2 = new H2(databaseFile)
Sql sql = h2.sql
StyleRepository styleRepository = DatabaseStyleRepository.forH2(sql)
styleRepository.save("states", "states", file.text)

String sld = styleRepository.getDefaultForLayer("states")
println sld

List<Map<String, String>> stylesForLayer = styleRepository.getForLayer("states")
println stylesForLayer

List<Map<String, String>> allStyles = styleRepository.getAll()
println stylesForLayer

styleRepository.delete("states", "states")
```

Workspace Recipes

The Workspace classes are in the [geoscript.workspace](#) package.

A Workspace is a collection of Layers. You can create, add, remove, and get Layers. There are many different kinds of Workspaces in GeoScript including Memory, PostGIS, Directory (for Shapefiles), GeoPackage, and many more.

Using Workspaces

Create a Workspace

```
Workspace workspace = new Workspace()
```

Create a Layer

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
println layer
```

```
cities
```

Check whether a Workspace has a Layer by name

```
boolean hasCities = workspace.has("cities")
println hasCities
```

```
true
```

Get a Layer from a Workspace

```
Layer citiesLayer = workspace.get('cities')
println citiesLayer
```

```
cities
```

Add a Layer to a Workspace

```
Schema statesSchema = new Schema("states", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer statesLayer = new Layer("states", statesSchema)
workspace.add(statesLayer)
println workspace.has("states")
```

```
true
```

Get the names of all Layers in a Workspace

```
List<String> names = workspace.names
names.each { String name ->
    println name
}
```

```
PostGIS
SQLite
Directory of spatial files (shapefiles)
H2 (JNDI)
Web Feature Server (NG)
MySQL (JNDI)
Shapefile
H2
GeoPackage
PostGIS (JNDI)
FlatGeobuf
MBTiles with vector tiles
MySQL
Geobuf
Properties
```

Remove a Layer from a Workspace

```
workspace.remove("cities")
println workspace.has('cities')
```

```
false
```

Close the Workspace when you are done

```
workspace.close()
```

Creating an in Memory Workspace

The empty Workspace constructor creates an in Memory Workspace. You can create a Layer by passing a name and a list of Fields. You can then remove the Layer by passing a reference to the Layer.

```
Workspace workspace = new Workspace()

Layer layer = workspace.create("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
println layer

workspace.remove(layer)
println workspace.has(layer.name)
```

```
cities
false
```

Add Layer's Features in Chunks


When adding a large Layer to a Workspace, you can add Features in chunks.

```
Workspace workspace = new Memory()
Layer layer = workspace.create("points", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer")
])
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326")
Geometry.createRandomPoints(bounds.geometry, 500).geometries.eachWithIndex { Geometry
    geom, int i ->
    layer.add([geom: geom, id: i])
}
println "Original Layer has ${layer.count} features.

Layer copyOfLayer = workspace.add(layer, "random points", 100)
println "Copied Layer has ${copyOfLayer.count} features."
```

Original Layer has 500 features.

Copied Layer has 500 features.

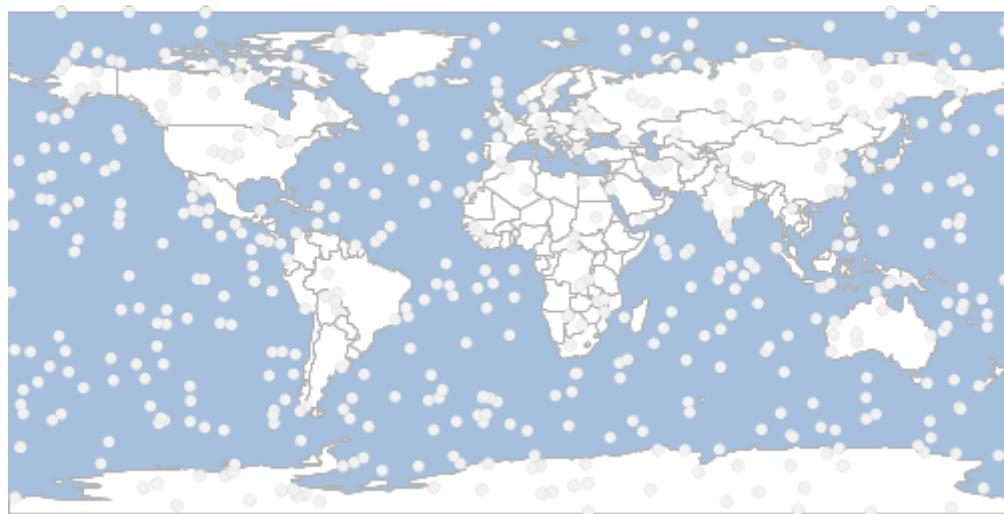

Using a Directory Workspace

A Directory Workspace is a directory of Shapefiles.

Create a Directory Workspace

```
Directory directory = new Directory("src/main/resources/data")
println directory.toString()
```

```
Directory[/Users/jericks/Projects/geoscript-groovy-cookbook/src/main/resources/data]
```

View the Workspace's format

```
String format = directory.format
println format
```

```
Directory
```

View the Workspace's File

```
File file = directory.file
println file
```

```
/Users/jericks/Projects/geoscript-groovy-cookbook/src/main/resources/data
```

View the Workspace's list of Layer names

```
List names = directory.names
names.each { String name ->
    println name
}
```

```
states
```

Get a Layer by name

```
Layer layer = directory.get("states")
int count = layer.count
println "Layer ${layer.name} has ${count} Features."
```

```
Layer states has 49 Features.
```

Close the Directory when done.

```
directory.close()
```

Investigating Workspaces

Get available Workspace names

```
List<String> names = Workspace.getWorkspaceNames()  
names.each { String name ->  
    println name  
}
```

PostGIS
SQLite
Directory of spatial files (shapefiles)
H2 (JNDI)
Web Feature Server (NG)
MySQL (JNDI)
Shapefile
H2
GeoPackage
PostGIS (JNDI)
FlatGeobuf
MBTiles with vector tiles
MySQL
Geobuf
Properties

Get parameters for a Workspace

```
List<Map> parameters = Workspace.getWorkspaceParameters("GeoPackage")  
parameters.each { Map param ->  
    println "Parameter = ${param.key} Type = ${param.type} Required?  
    ${param.required}"  
}
```

Parameter = dbtype Type = java.lang.String Required? true
Parameter = database Type = java.io.File Required? true
Parameter = passwd Type = java.lang.String Required? false
Parameter = namespace Type = java.lang.String Required? false
Parameter = Expose primary keys Type = java.lang.Boolean Required? false
Parameter = fetch size Type = java.lang.Integer Required? false
Parameter = Batch insert size Type = java.lang.Integer Required? false
Parameter = Primary key metadata table Type = java.lang.String Required? false
Parameter = Session startup SQL Type = java.lang.String Required? false
Parameter = Session close-up SQL Type = java.lang.String Required? false
Parameter = Callback factory Type = java.lang.String Required? false
Parameter = read_only Type = java.lang.Boolean Required? false
Parameter = memory map size Type = java.lang.Integer Required? false

Creating Workspaces

Creating a Workspace from a connection string

You can create a Workspace from a connection string that contains parameters in key=value format with optional single quotes.

Create a Shapefile Workspace

```
String connectionString = "url='states.shp' 'create spatial index'=true"
Workspace workspace = Workspace.getWorkspace(connectionString)
```

Create a GeoPackage Workspace

```
connectionString = "dbtype=geopkg database=layers.gpkg"
workspace = Workspace.getWorkspace(connectionString)
```

Create a H2 Workspace

```
connectionString = "dbtype=h2 database=layers.db"
workspace = Workspace.getWorkspace(connectionString)
```

You can use the `withWorkspace` method to automatically handle closing the Workspace.

```
Workspace.withWorkspace("dbtype=geopkg database=src/main/resources/data.gpkg") {
    Workspace workspace ->
        println workspace.format
        println "-----"
        workspace.names.each { String name ->
            println "${name} (${workspace.get(name).count})"
        }
}
```

GeoPackage

```
-----
countries (177)
graticules (27)
ocean (2)
places (243)
rivers (13)
states (51)
```

Creating a Workspace from a connection map

You can create a Workspace from a connection map that contains parameters.

Create a H2 Workspace

```
Map params = [dbtype: 'h2', database: 'test.db']
Workspace workspace = Workspace.getWorkspace(params)
```

Create a PostGIS Workspace

```
params = [
    dbtype : 'postgis',
    database: 'postgres',
    host   : 'localhost',
    port   : 5432,
    user   : 'postgres',
    passwd : 'postgres'
]
workspace = Workspace.getWorkspace(params)
```

Create a GeoBuf Workspace

```
params = [file: 'layers.pbf', precision: 6, dimension:2]
workspace = Workspace.getWorkspace(params)
```

You can use the `withWorkspace` method to automatically handle closing the Workspace.

```
Workspace.withWorkspace([dbtype: 'geopkg', database: 'src/main/resources/data.gpkg'])
{ Workspace workspace ->
    println workspace.format
    println "-----"
    workspace.names.each { String name ->
        println "${name} (${workspace.get(name).count})"
    }
}
```

GeoPackage

```
-----
countries (177)
graticules (27)
ocean (2)
places (243)
rivers (13)
states (51)
```

Creating Directory Workspaces

Create a Directory Workspace from a directory name

```
Workspace workspace = new Directory("src/main/resources/shapefiles")
println workspace.format
println "-----"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

Directory

ocean (2)
countries (177)
graticules (27)

Create a Directory Workspace from a File directory

```
Workspace workspace = new Directory(new File("src/main/resources/shapefiles"))
println workspace.format
println "-----"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

Directory

ocean (2)
countries (177)
graticules (27)

Create a Directory Workspace from a URL

```
Directory directory = Directory.fromURL(
    new URL
    ("http://www.naturalearthdata.com/http://www.naturalearthdata.com/download/110m/cultura
    l/ne_110m_admin_0_countries.zip"),
    new File("naturalearth")
)
println directory.format
println "-----"
directory.names.each { String name ->
    println "${name} (${directory.get(name).count})"
}
```

```
Directory
```

```
-----  
ne_110m_admin_0_countries (177)
```

Creating GeoPackage Workspaces

Create a GeoPackage Workspace from a file name

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
println workspace.format  
println "-----"  
workspace.names.each { String name ->  
    println "${name} (${workspace.get(name).count})"  
}
```

```
GeoPackage
```

```
-----  
countries (177)  
graticules (27)  
ocean (2)  
places (243)  
rivers (13)  
states (51)
```

Create a GeoPackage Workspace from a File

```
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))  
println workspace.format  
println "-----"  
workspace.names.each { String name ->  
    println "${name} (${workspace.get(name).count})"  
}
```

```
GeoPackage
```

```
-----  
countries (177)  
graticules (27)  
ocean (2)  
places (243)  
rivers (13)  
states (51)
```

Creating H2 Workspaces

Create a H2 Workspace from a File

```
Workspace workspace = new H2(new File("src/main/resources/h2/data.db"))
println workspace.format
println "--"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

```
H2
--
LAYER_STYLES (0)
countries (177)
ocean (2)
places (326)
states (52)
```

Create a H2 Workspace with basic parameters

```
H2 h2 = new H2(
    "database",      ①
    "localhost",    ②
    "5421",          ③
    "geo",           ④
    "user",          ⑤
    "password"       ⑥
)
```

- ① Database name
- ② Host name
- ③ Port
- ④ User name
- ⑤ Password

Create a H2 Workspace with named parameters. Only the database name is required.

```
H2 h2 = new H2("database",
    "host": "localhost",
    "port": "5412",
    "schema": "geo",
    "user": "user",
    "password": "secret"
)
```

Creating Geobuf Workspaces

Create a Geobuf Workspace from a File

```
Workspace workspace = new Geobuf(new File("src/main/resources/geobuf"))
println workspace.format
println "-----"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

```
Geobuf
-----
places (326)
ocean (2)
countries (177)
```

Creating Flatgeobuf Workspaces

Create a Flatgeobuf Workspace from a File

```
Workspace workspace = new FlatGeobuf(new File("src/main/resources/flatgeobuf"))
println workspace.format
println "-----"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

```
FlatGeobuf
-----
places (326)
countries (177)
ocean (2)
```

Creating Property Workspaces

Create a Property Workspace from a File

```
Workspace workspace = new Property(new File("src/main/resources/property"))
println workspace.format
println "-----"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

```
Property
```

```
-----  
places (10)  
circles (10)
```

Creating SQLite Workspaces

Create a SQLite Workspace from a File

```
Workspace workspace = new Sqlite(new File("src/main/resources/data.sqlite"))  
println workspace.format  
println "-----"  
workspace.names.each { String name ->  
    println "${name} (${workspace.get(name).count})"  
}
```

```
Sqlite
```

```
-----  
countries (177)  
ocean (2)  
places (326)  
rivers (460)  
states (52)
```

Creating PostGIS Workspaces

Create a PostGIS Workspace with basic parameters

```
PostGIS postgis = new PostGIS(  
    "database",    ①  
    "localhost",   ②  
    "5432",        ③  
    "public",       ④  
    "user",         ⑤  
    "password"      ⑥  
)
```

① Database name

② Host name

③ Port

④ Schema

⑤ User name

⑥ Password

Create a PostGIS Workspace with advanced parameters

```
PostGIS postgis = new PostGIS(  
    "database",          ①  
    "localhost",         ②  
    "5432",              ③  
    "public",             ④  
    "user",               ⑤  
    "password",           ⑥  
    true,                ⑦  
    true,                ⑧  
    "OWNER geo TABLESPACE points" ⑨  
)
```

① Database name

② Host name

③ Port

④ Schema

⑤ User name

⑥ Password

⑦ Estimated Extent

⑧ Create Database

⑨ Create Database Params

Create a PostGIS Workspace with named parameters. Only the database name is required.

```
PostGIS postgis = new PostGIS("database",  
    "host": "localhost",  
    "port": "5432",  
    "schema": "public",  
    "user": "user",  
    "password": "secret",  
    "estimatedExtent": false,  
    "createDatabase": false,  
    "createDatabaseParams": "OWNER geo TABLESPACE points"  
)
```

Delete a PostGIS database.

```
PostGIS.deleteDatabase(  
    "database",      ①  
    "localhost",     ②  
    "5432",          ③  
    "user",           ④  
    "password"       ⑤  
)
```

① Database name

② Host name

③ Port

④ User name

⑤ Password

Delete a PostGIS database with named parameters. Only the database name is required.

```
PostGIS.deleteDatabase("database",
    "host": "localhost",
    "port": "5432",
    "user": "user",
    "password": "secret"
)
```

Creating MySQL Workspaces

Create a MySQL Workspace with basic parameters

```
MySQL mysql = new MySQL(
    "database",      ①
    "localhost",    ②
    "3306",         ③
    "user",          ④
    "password"       ⑤
)
```

① Database name

② Host name

③ Port

④ User name

⑤ Password

Create a MySQL Workspace with named parameters. Only the database name is required.

```
MySQL mysql = new MySQL("database",
    "host": "localhost",
    "port": "3306",
    "user": "user",
    "password": "secret"
)
```

Creating SpatiaLite Workspaces

The SpatiaLite Workspace requires GDAL and OGR to be installed with Java support.

Create a SpatiaLite Workspace with a File name

```
SpatiaLite spatialite = new SpatiaLite("db.sqlite")
```

Create a SpatiaLite Workspace with a File

```
File directory = new File("databases")
File file = new File("db.sqlite")
SpatiaLite spatialite = new SpatiaLite(file)
```

Creating WFS Workspaces

Create a WFS Workspace with a URL

```
WFS wfs = new WFS
("http://localhost:8080/geoserver/ows?service=wfs&version=1.1.0&request=GetCapabilitie
s")
```

Creating OGR Workspaces

The OGR Workspace requires GDAL and OGR to be installed with Java support.

On Ubuntu, you can install GDAL and OGR with the following commands:

```
sudo apt-get install gdal-bin
sudo apt-get install libgdal-java
```

Determine if OGR is available.

```
boolean isAvailable = OGR.isAvailable()
```

Get OGR Drivers.

```
Set<String> drivers = OGR.drivers
```

Get a Shapefile Workspace from OGR.

```
File file = new File("states.shp")
OGR ogr = new OGR("ESRI Shapefile", file.getAbsolutePath())
```

Get a SQLite Workspace from OGR

```
File file = new File("states.sqlite")
OGR ogr = new OGR("SQLite", file.getAbsolutePath())
```

Get a GeoJSON Workspace from OGR

```
File file = new File("states.json")
OGR ogr = new OGR("GeoJSON", file.getAbsolutePath)
```

Database Workspace

SQL

Run SQL queries directly against Database Workspace (PostGIS, MySQL, H2)

```
Database workspace = new H2(new File("src/main/resources/h2/data.db"))
Sql sql = workspace.sql
```

Count the number of results

```
int numberOfPlaces = sql.firstRow("SELECT COUNT(*) as count FROM \"places\"").get("count") as int
println "# of Places = ${numberOfPlaces}"
```

```
# of Places = 326
```

Calculate statistics

```
GroovyRowResult result = sql.firstRow("SELECT MIN(ELEVATION) as min_elev,
MAX(ELEVATION) as max_elev, AVG(ELEVATION) as avg_elev FROM \"places\"")
println "Mininum Elevation = ${result.get('min_elev')}"
println "Maximum Elevation = ${result.get('max_elev')}"
println "Average Elevation = ${result.get('avg_elev')}"
```

```
Mininum Elevation = 0.0
Maximum Elevation = 2320.0
Average Elevation = 30.085889570552148
```


Select rows

```
List<String> names = []
sql.eachRow "SELECT TOP 10 \"NAME\" FROM \"places\" ORDER BY \"NAME\" DESC ", {
    names.add(it["NAME"])
}
names.each { String name ->
    println name
}
```

```
Zürich  
Zibo  
Zhengzhou  
Zagreb  
Yerevan  
Yaounde  
Yamoussoukro  
Xian  
Wuhan  
Windhoek
```

Execute spatial sql

```
Workspace memory = new Memory()  
Layer layer = memory.create("places_polys", [new Field("buffer", "Polygon"), new  
Field("name", "String")])  
sql.eachRow "SELECT ST_Buffer(\"the_geom\", 10) as buffer, \"NAME\" as name FROM  
\\"places\\\"", {row ->  
    Geometry poly = Geometry.fromWKB(row.buffer as byte[])  
    layer.add([buffer: poly, name: row.NAME])  
}
```

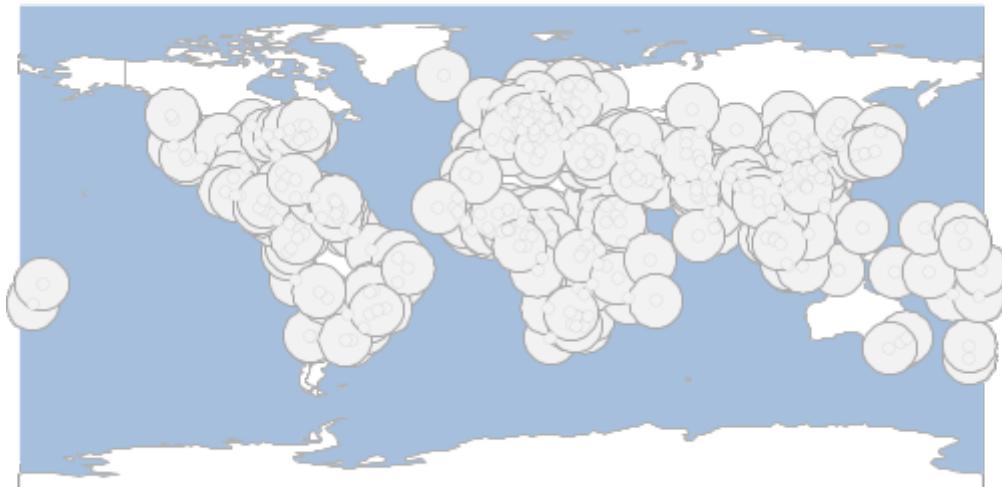


View

Create a new Layer from a SQL View

```
Database workspace = new H2(new File("src/main/resources/h2/data.db"))
Layer layer = workspace.createView(
    "megacities",
    "SELECT * FROM \"places\" WHERE \"MEGACITY\" = '%mega%'", ②
    new Field("the_geom", "Point", "EPSG:4326"), ③
    params: [['mega', '1']] ④
)
boolean hasLayer1 = workspace.has("megacities")
println "Does layer exist? ${hasLayer1}"
```

- ① The layer name
- ② The SQL Statement
- ③ The Geometry Field
- ④ Query Parameters

Does layer exist? true

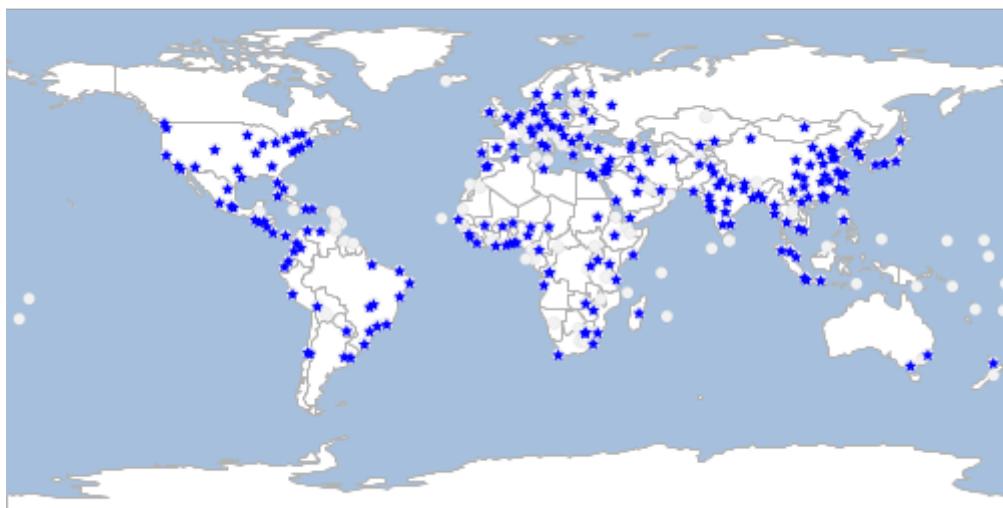

Remove the new Layer created from a SQL View

```
workspace.deleteView("megacities")
boolean hasLayer2 = workspace.has("megacities")
println "Does layer exist? ${hasLayer2}"
```

Does layer exist? false

Index

Create an Index

```
Database workspace = new H2(new File("src/main/resources/h2/data.db"))
workspace.createIndex("places", "name_idx", "NAME", true)
workspace.createIndex("places", "megacity_idx", "MEGACITY", false)
workspace.createIndex("places", "a3_idx", ["SOV_A3", "ADM0_A3"], false)
```

Get an Index

```
List<Map> indexes = workspace.getIndexes("places")
indexes.each { Map index ->
    println "Index name = ${index.name}, unique = ${index.unique}, attributes =
    ${index.attributes}"
}
```

```
Index name = PRIMARY_KEY_C, unique = true, attributes = [fid]
Index name = name_idx, unique = true, attributes = [NAME]
Index name = a3_idx, unique = false, attributes = [SOV_A3, ADM0_A3]
Index name = megacity_idx, unique = false, attributes = [MEGACITY]
```

Remove an Index

```
workspace.deleteIndex("places", "name_idx")
workspace.deleteIndex("places", "megacity_idx")
workspace.deleteIndex("places", "a3_idx")
```

Layer Recipes

The Layer classes are in the [geoscript.layer](#) package.

A Layer is a collection of Features.

Getting a Layer's Properties

Get a Layer from a Workspace and it's name

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("countries")
String name = layer.name
println "Name: ${name}"
```

```
Name: countries
```

The Layer's Format

```
String format = layer.format  
println "Format: ${format}"
```

Format: GeoPackage

Count the number of Features

```
int count = layer.count  
println "# of Features: ${count}"
```

of Features: 177

Get the Layer's Projection

```
Projection proj = layer.proj  
println "Projection: ${proj}"
```

Projection: EPSG:4326

Get the Bounds of the Layer

```
Bounds bounds = layer.bounds  
println "Bounds: ${bounds}"
```

Bounds: (-180.0,-90.0,180.0000000000006,83.64513000000001,EP SG:4326)

Get the minimum and maximum value from a Field.

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("places")  
Map<String,Double> minMax = layer.minmax("POP2050")  
println "Minimum Population in 2050 = ${minMax.min}"  
println "Maximum Population in 2050 = ${minMax.max}"
```

Minimum Population in 2050 = 0
Maximum Population in 2050 = 36400

Calculate a histogram of values for a Field.

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("places")
List<List<Double>> values = layer.histogram("POP2050", 10)
values.each { List<Double> value ->
    println "${value[0]} - ${value[1]}"
}
```

```
0.0 - 3640.0
3640.0 - 7280.0
7280.0 - 10920.0
10920.0 - 14560.0
14560.0 - 18200.0
18200.0 - 21840.0
21840.0 - 25480.0
25480.0 - 29120.0
29120.0 - 32760.0
32760.0 - 36400.0
```

Create a List of interpolated values for a Field using a linear algorithm

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("places")
List<Double> values = layer.interpolate(
    "POP2050", ①
    10,          ②
    "linear"     ③
)
values.each { Double value ->
    println value
}
```

① Field Name

② Number of classes

③ Algorithm

```
0.0  
3640.0  
7280.0  
10920.0  
14560.0  
18200.0  
21840.0  
25480.0  
29120.0  
32760.0  
36400.0
```

Create a List of interpolated values for a Field using a exponential algorithm

```
values = layer.interpolate(  
    "POP2050", ①  
    8,           ②  
    "exp"        ③  
)  
values.each { Double value ->  
    println value  
}
```

① Field Name

② Number of classes

③ Algorithm

```
0.0  
2.7165430207384107  
12.81269202499939  
50.33546414312058  
189.79046097748173  
708.0809561693237  
2634.3298787896188  
9793.31686835896  
36399.99999999998
```

Create a List of interpolated values for a Field using a logarithmic algorithm

```
values = layer.interpolate(  
    "POP2050", ①  
    12,          ②  
    "exp"        ③  
)  
values.each { Double value ->  
    println value  
}
```

① Field Name

② Number of classes

③ Algorithm

```
0.0  
1.3993454247861767  
4.75685846744236  
12.81269202499939  
32.14141941416279  
78.51771304229133  
189.79046097748173  
456.77221963916656  
1097.3536807854464  
2634.3298787896188  
6322.06668747619  
15170.221127213848  
36399.99999999998
```

Getting a Layer's Features

Each Feature

Iterate over a Layer's Features

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("states")  
layer.eachFeature { Feature feature ->  
    println feature["name"]  
}
```

```
Minnesota  
Montana  
North Dakota  
Hawaii  
Idaho  
Washington  
Arizona  
California  
Colorado  
Nevada  
...
```

Iterate over a subset of a Layer's Features

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("states")  
layer.eachFeature("name LIKE 'M%'") { Feature feature ->  
    println feature["name"]  
}
```

```
Minnesota  
Montana  
Missouri  
Massachusetts  
Mississippi  
Maryland  
Maine  
Michigan
```

Iterate over a Layer's Features with parameters.

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("states")  
layer.eachFeature(sort: ["name"], start: 0, max: 5, fields: ["name"], filter: "name  
LIKE 'M%'") { Feature feature ->  
    println feature["name"]  
}
```

```
Maine  
Maryland  
Massachusetts  
Michigan  
Minnesota
```

Parameters

- filter: The Filter or Filter String to limit the Features. Defaults to null.
- sort: A List of Lists that define the sort order [[Field or Field name, "ASC" or "DESC"],...]. Not all Layers support sorting!
- max: The maximum number of Features to include
- start: The index of the record to start the cursor at. Together with maxFeatures this simulates paging. Not all Layers support the start index and paging!
- fields: A List of Fields or Field names to include. Used to select only a subset of Fields.

Read all Features

Read all Feature into a List

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<Feature> features = layer.features

println "# Features = ${features.size()}"
features.each { Feature feature ->
    println feature["name"]
}
```

```
# Features = 51
Minnesota
Montana
North Dakota
Hawaii
Idaho
Washington
Arizona
California
Colorado
Nevada
...
```

Collect values

Collect values from a Layer's Features

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<String> names = layer.collectFromFeature { Feature f ->
    f["name"]
}.sort()

println "# Names = ${names.size()}"
names.each { String name ->
    println name
}
```

```
# Names = 51
Alabama
Alaska
Arizona
Arkansas
California
Colorado
Connecticut
Delaware
District of Columbia
Florida
...
...
```

Collect values from a Layer's Features with parameters.

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<String> names = layer.collectFromFeature(
    sort: ["name"],
    start: 0,
    max: 5,
    fields: ["name"],
    filter: "name LIKE 'M%'") { Feature f ->
    f["name"]
}

println "# Names = ${names.size()}"
names.each { String name ->
    println name
}
```


```
# Names = 5
Maine
Maryland
Massachusetts
Michigan
Minnesota
```

First

Get the first Feature that matches the Filter.

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
Feature feature = layer.first(filter: "name='Washington'")
println feature.get("name")
```

Washington

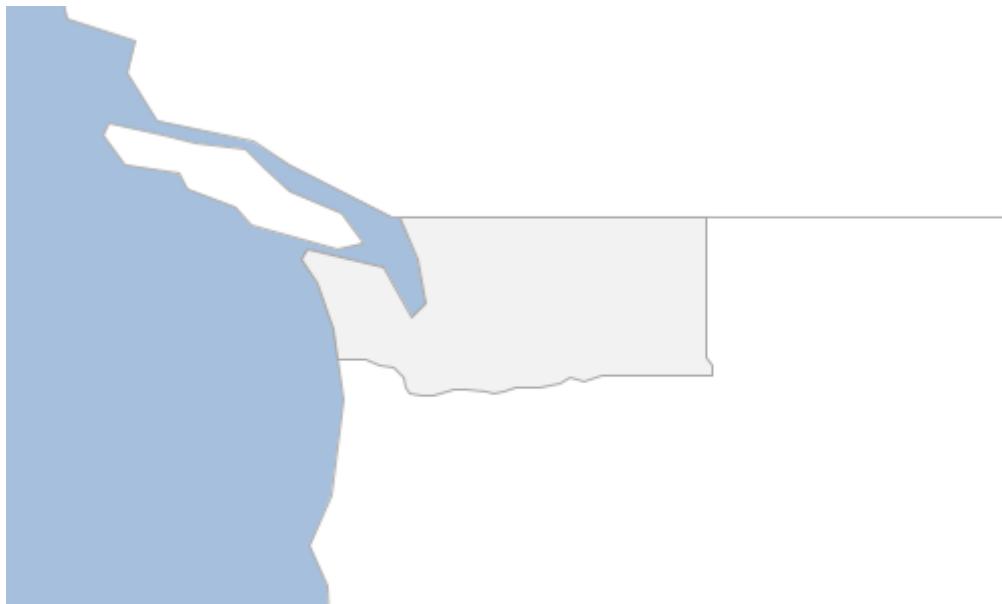

Get the first Feature sorted by name ascending and descending.


```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")

Feature featureAsc = layer.first(sort: "name ASC")
println featureAsc.get("name")

Feature featureDesc = layer.first(sort: "name DESC")
println featureDesc.get("name")
```


Alabama
Wyoming

Filter

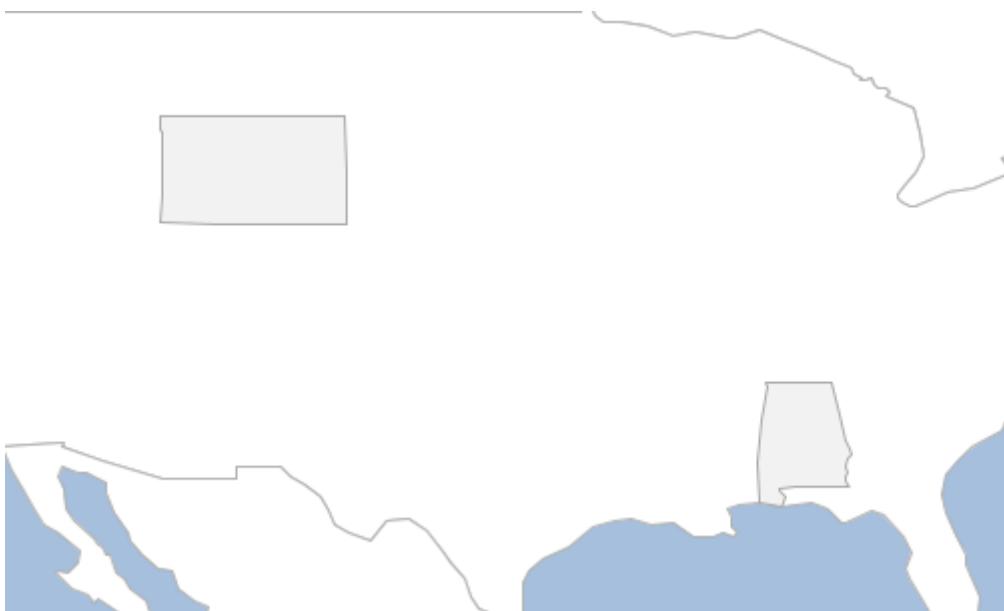

Create a new Layer from an existing Layer with just the Features that match a Filter.

```
Workspace workspace = new Directory("target")
Layer layer = workspace.get("countries")
Layer disputedLayer = layer.filter("TYPE='Indeterminate'")
```

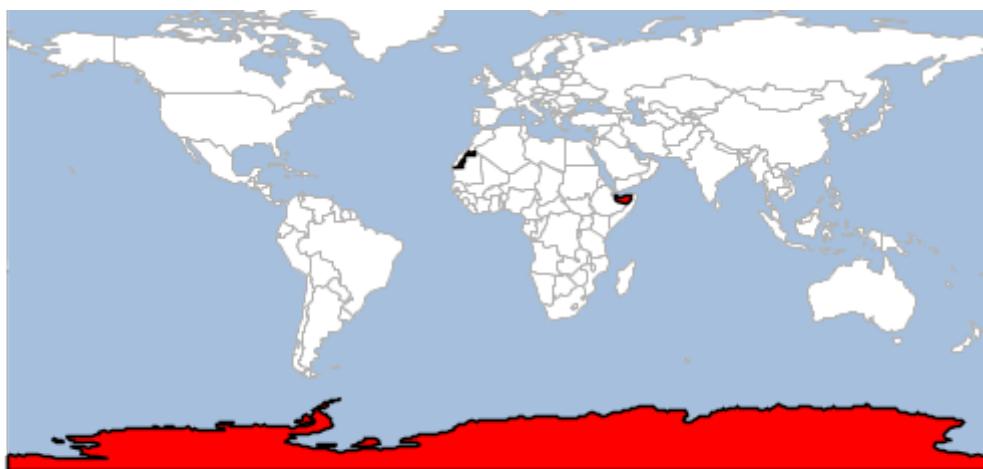

Cursor

Iterate over a Layer's Features with a Cursor

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
Cursor cursor = layer.cursor
cursor.each { Feature feature ->
    println feature["name"]
}
```

Minnesota
Montana
North Dakota
Hawaii
Idaho
Washington
Arizona
California
Colorado
Nevada
...

Iterate over a subset of a Layer's Features with a Cursor

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
Cursor cursor = layer.getCursor(filter: "name LIKE 'M%'")
while(cursor.hasNext()) {
    Feature feature = cursor.next()
    println feature["name"]
}
```

Minnesota
Montana
Missouri
Massachusetts
Mississippi
Maryland
Maine
Michigan

Iterate over a Layer's Features with parameters with a Cursor

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
layer.getCursor(sort: ["name"], start: 0, max: 5, fields: ["name"], filter: "name LIKE
'M%'").each { Feature feature ->
    println feature["name"]
}
```

```
Maine
Maryland
Massachusetts
Michigan
Minnesota
```

Parameters

- filter: The Filter or Filter String to limit the Features. Defaults to null.
- sort: A List of Lists that define the sort order [[Field or Field name, "ASC" or "DESC"],...]. Not all Layers support sorting!
- max: The maximum number of Features to include
- start: The index of the record to start the cursor at. Together with maxFeatures this simulates paging. Not all Layers support the start index and paging!
- fields: A List of Fields or Field names to include. Used to select only a subset of Fields.

Adding, Updating, and Deleting

Add Features to a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)

// Add a Feature with a Map
Map attributes = [
    geom: new Point(-122.333056, 47.609722),
    id: 1,
    name: "Seattle",
    state: "WA"
]
layer.add(attributes)
```

```


// Add a Feature with a List
List values = [
    new Point(-122.459444, 47.241389),
    2,
    "Tacoma",
    "WA"
]
layer.add(values)

// Add a Feature
Feature feature = schema.feature([
    id:3,
    name: "Fargo",
    state: "ND",
    geom: new Point(-96.789444, 46.877222)
])
layer.add(feature)

// Add Features from a List of Maps
List<Map> features = [
    [
        geom: new Point(-100.778889, 46.813333),
        id:4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)

```

id	name	state
1	Seattle	WA
2	Tacoma	WA
3	Fargo	ND
4	Bismarck	ND
5	Mandan	ND

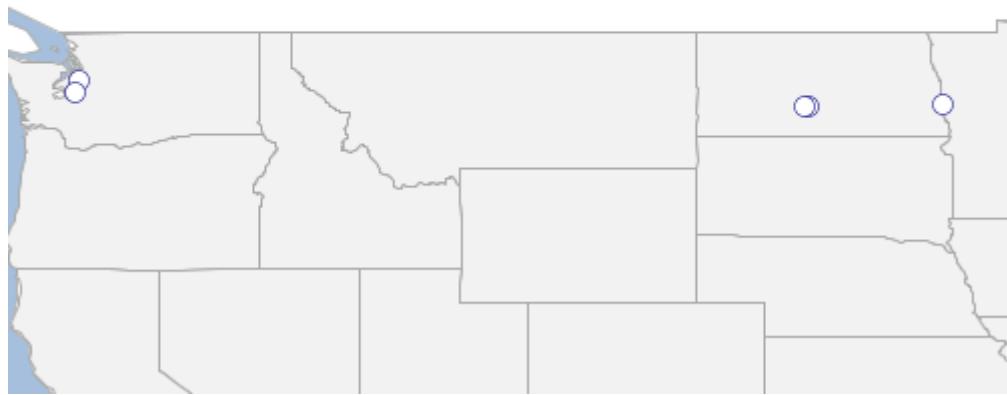


Update Features in a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id:3,
        name: "Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id:4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)

layer.update(layer.schema.state, "North Dakota", "state='ND'")
layer.update(layer.schema.state, "Washington", "state='WA'")
```

id	name	state
1	Seattle	Washington

id	name	state
2	Tacoma	Washington
3	Fargo	North Dakota
4	Bismarck	North Dakota
5	Mandan	North Dakota

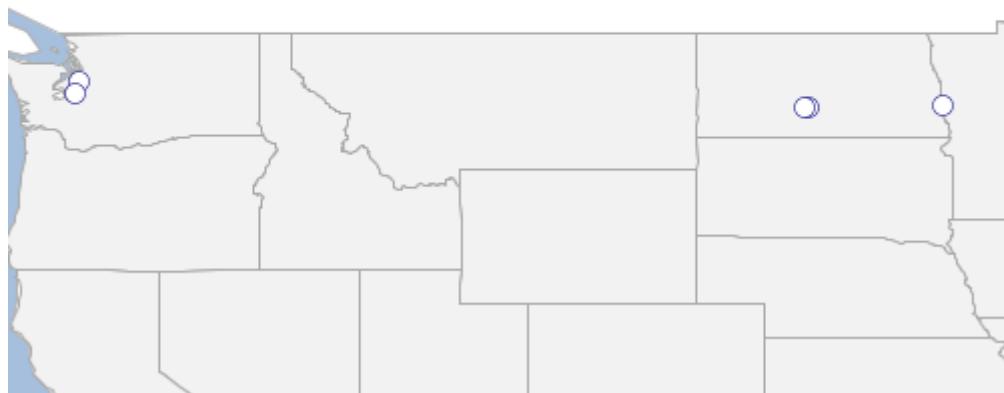

Update Features in a Layer by setting values

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "",
        state: ""
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "",
        state: ""
    ]
]
layer.add(features)

List<Feature> layerFeatures = layer.features
layerFeatures[0].set("name", "Seattle")
layerFeatures[0].set("state", "WA")

layerFeatures[1].set("name", "Tacoma")
layerFeatures[1].set("state", "WA")

layer.update()
```

id	name	state
1	Seattle	WA
2	Tacoma	WA



Delete Features from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id:3,
        name: "Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id:4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)

layer.delete("state='ND'")
```

id	name	state
1	Seattle	WA
2	Tacoma	WA




Add Features to a Layer using a Writer. A Writer can add Features more efficiently because it commits batches of Features in Transactions.

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer")
])
Layer layer = workspace.create(schema)

Bounds bounds = new Bounds(-180,-90,180,90, "EPSG:4326")
MultiPoint points = Geometry.createRandomPoints(bounds.geometry, 100)

geoscript.layer.Writer writer = layer.writer
try {
    points.geometries.eachWithIndex { Point point, int index ->
        Feature feature = writer.newFeature
        feature['id'] = index
        feature['geom'] = point
        writer.add(feature)
    }
} finally {
    writer.close()
}
```

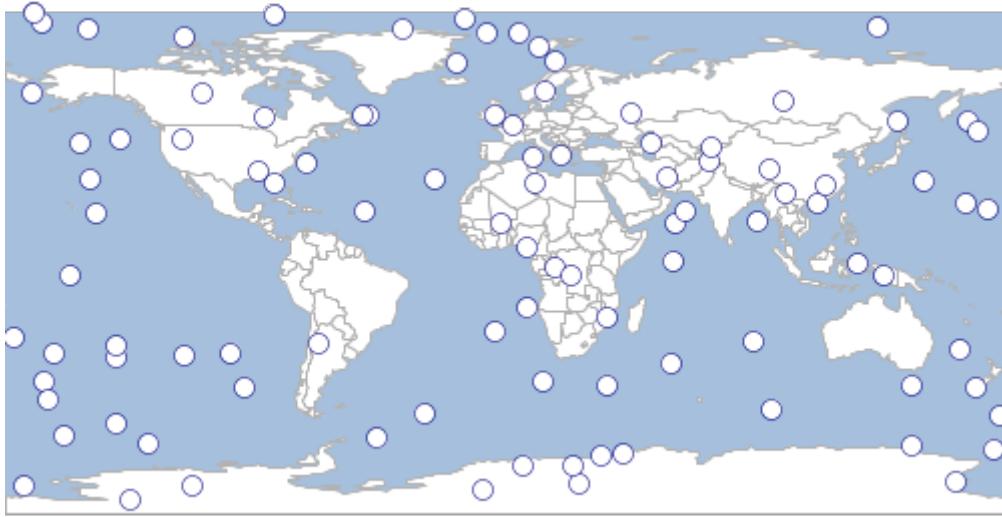


Add Features to a Layer using a Writer inside of a Closure.

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer")
])
Layer layer = workspace.create(schema)

Bounds bounds = new Bounds(-180,-90,180,90, "EPSG:4326")
MultiPoint points = Geometry.createRandomPoints(bounds.geometry, 100)

layer.withWriter { geoscript.layer.Writer writer ->
    points.geometries.eachWithIndex { Point point, int index ->
        Feature feature = writer.newFeature
        feature['id'] = index
        feature['geom'] = point
        writer.add(feature)
    }
}
```

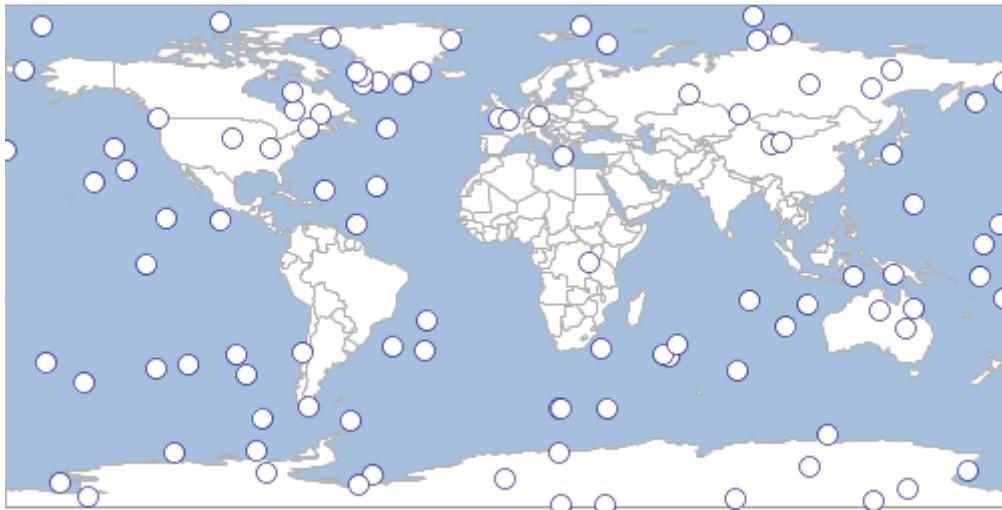

Shapefiles

Shapefiles are a very commonly used format for storing spatial data. So, instead of creating a Directory Workspace and getting the Layer from the Workspace, you can use the Shapefile class.

Read


Read existing Shapefiles

```
Shapefile countries = new Shapefile("src/main/resources/shapefiles/countries.shp")
println "# Features in Countries = ${countries.count}"

Shapefile ocean = new Shapefile(new File("src/main/resources/shapefiles/ocean.shp"))
println "# Features in Ocean = ${ocean.count}"
```

```
# Features in Countries = 177
```

```
# Features in Ocean = 2
```

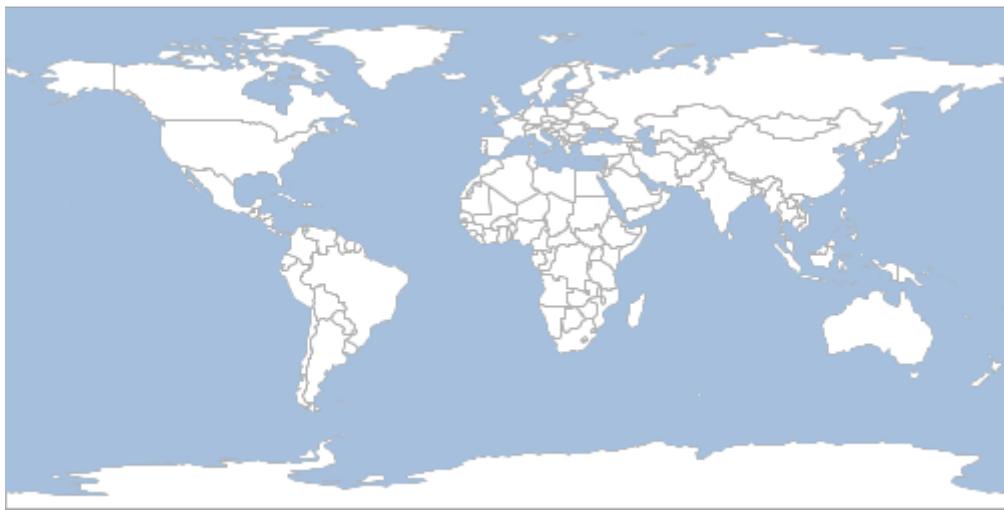


Create

Create a new Shapefile

```
Directory workspace = new Directory("target")
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id:3,
        name: "Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id:4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)
```

id	name	state
1	Seattle	WA
2	Tacoma	WA
3	Fargo	ND

id	name	state
4	Bismarck	ND
5	Mandan	ND

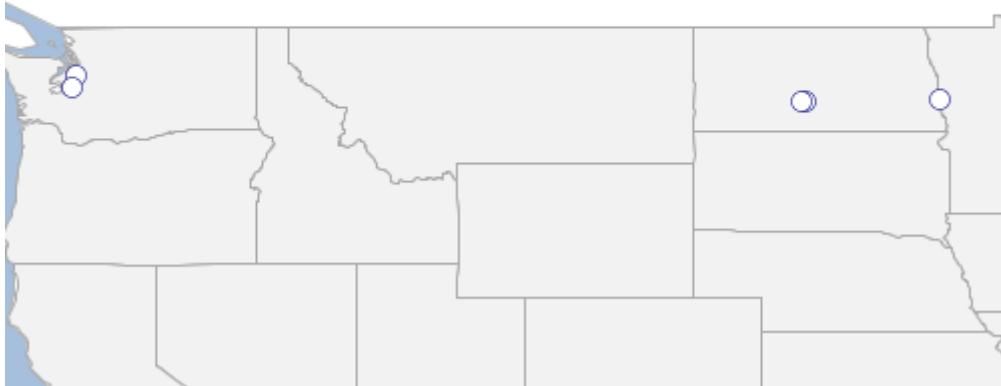

Property

GeoScript can store spatial data in a simple plain text format. With the `Property` class you can access a single property file directly.

Read


Read existing Property files

```
geoscript.layer.Property circles = new geoscript.layer.Property
("src/main/resources/property/circles.properties")
println "# Features in circles = ${circles.count}"

geoscript.layer.Property places = new geoscript.layer.Property(new File
("src/main/resources/property/places.properties"))
println "# Features in places = ${places.count}"
```

```
# Features in circles = 10
```

```
# Features in places = 10
```

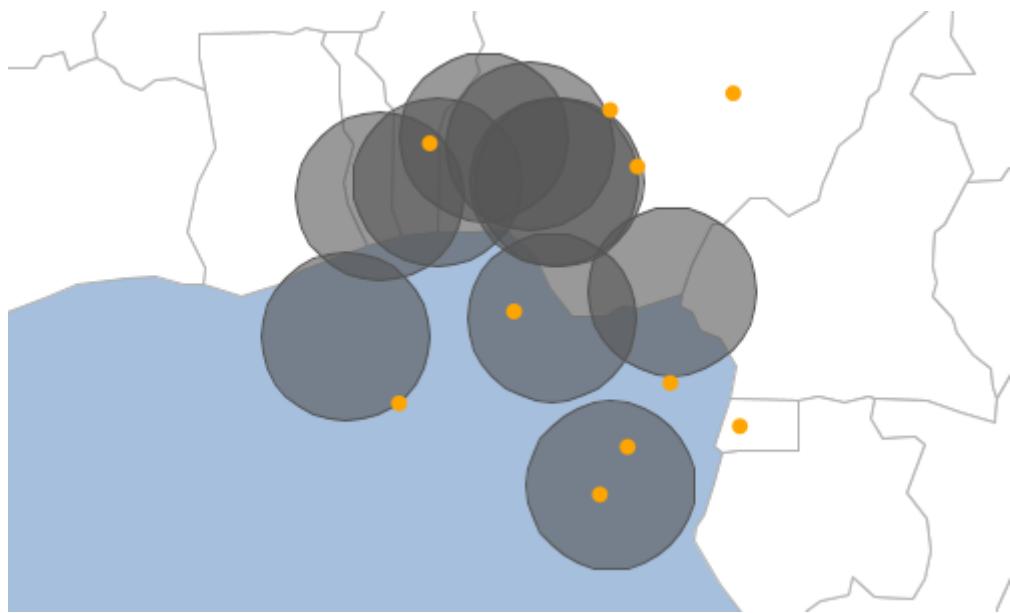


Create

Create a new Property

```
geoscript.workspace.Property workspace = new geoscript.workspace.Property("target")
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id:3,
        name: "Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id:4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)
```

id	name	state
1	Seattle	WA
2	Tacoma	WA
3	Fargo	ND

id	name	state
4	Bismarck	ND
5	Mandan	ND

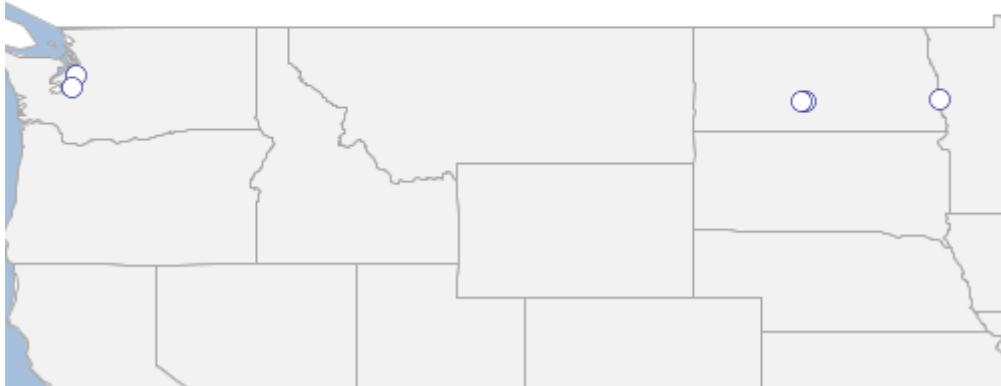

Geoprocessing


Reproject

Reproject a Layer from it's source projection to a target projection

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer states = workspace.get("states")
println "States = ${states.proj}"

Projection projection = new Projection("EPSG:3857")
Workspace outputWorkspace = new Memory()
Layer statesInWebMercator = states.reproject(projection, outputWorkspace,
"states_3857")
println "Reprojected States = ${statesInWebMercator.proj}"
```


```
States = EPSG:4326
Reprojected States = EPSG:3857
```

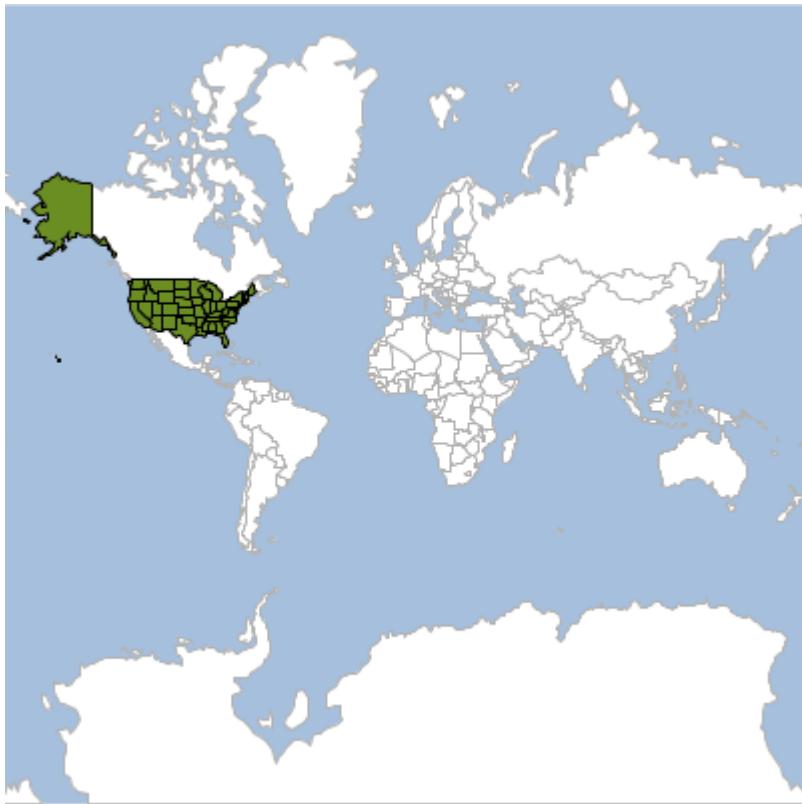

Buffer

Buffer a Layer of populated places


```
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
Layer places = workspace.get("places")
Layer buffer = places.buffer(5)
```

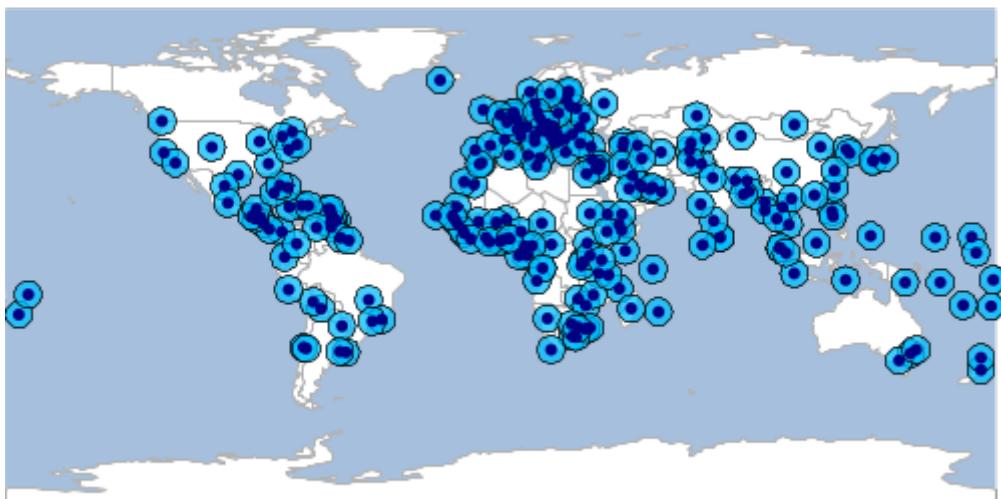

Dissolve

Dissolve a Layer by a Field

```
Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Layer regions = states.dissolve(states.schema.get("SUB_REGION"))
```

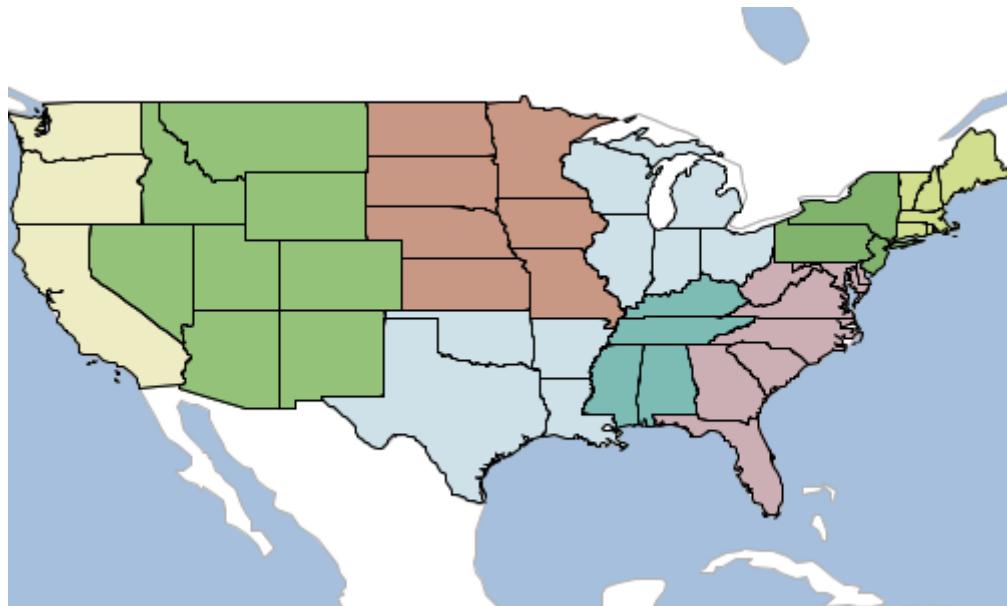

Merge

Merge two Layer together


```
Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Feature washington = states.first(filter: "STATE_NAME='Washington'")
Feature oregon = states.first(filter: "STATE_NAME='Oregon'")

Schema waSchema = new Schema("washington",
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "int")
)
Layer waLayer = new Memory().create(waSchema)
waLayer.withWriter { geoscript.layer.Writer writer ->
    Geometry.createRandomPoints(washington.geom, 50).points.eachWithIndex { Point pt,
        int index ->
        writer.add(waSchema.feature([geom: pt, id: index]))
    }
}
println "The Washington Layer has ${waLayer.count} features"

Schema orSchema = new Schema("oregon",
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "int")
)
Layer orLayer = new Memory().create(orSchema)
orLayer.withWriter { geoscript.layer.Writer writer ->
    Geometry.createRandomPoints(oregon.geom, 50).points.eachWithIndex { Point pt, int
        index ->
        writer.add(orSchema.feature([geom: pt, id: index]))
    }
}
println "The Oregon Layer has ${orLayer.count} features"

Layer mergedLayer = orLayer.merge(waLayer)
println "The merged Layer has ${mergedLayer.count} features"
```

```
The Washington Layer has 50 features
The Oregon Layer has 50 features
The merged Layer has 100 features
```

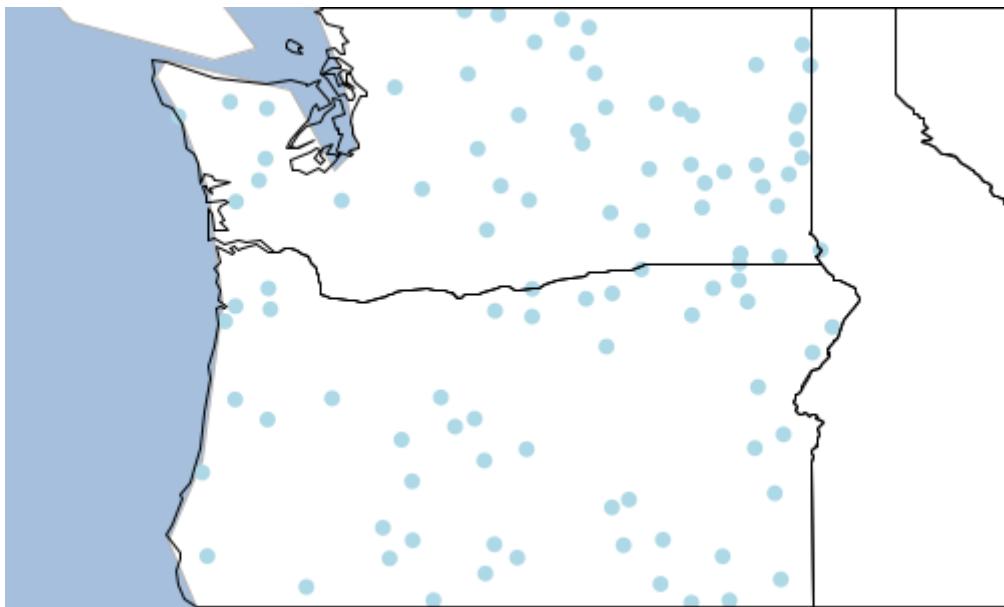

Split

Split a Layer into Layers based on the value from a Field

```
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
Layer rivers = workspace.get("rivers")
Workspace outWorkspace = new Memory()
rivers.split(rivers.schema.get("scalerank"), outWorkspace)

outWorkspace.layers.each { Layer layer ->
    println "${layer.name} has ${layer.count} features"
}
```

```
rivers_1 has 6 features
rivers_2 has 7 features
```




Split a Layer into Layers based on another Layer

```
Schema schema = new Schema("grid", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("col", "int"),
    new Field("row", "int"),
    new Field("row_col", "string")
])
Workspace gridWorkspace = new Directory("target")
Layer gridLayer = gridWorkspace.create(schema)
new Bounds(-180,-90,180,90,"EPSG:4326").generateGrid(2, 3, "polygon", {cell, col, row
->
    gridLayer.add([
        "geom": cell,
        "col": col,
        "row": row,
        "row_col": "${row} ${col}"
    ])
})
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
Layer countries = workspace.get("countries")

Workspace outWorkspace = new Memory()
countries.split(gridLayer, gridLayer.schema.get("row_col"), outWorkspace)

outWorkspace.layers.each { Layer layer ->
    println "${layer.name} has ${layer.count} features"
}
```

```
countries_1_1 has 6 features
countries_1_2 has 6 features
countries_2_1 has 44 features
countries_2_2 has 75 features
countries_3_1 has 13 features
countries_3_2 has 69 features
```

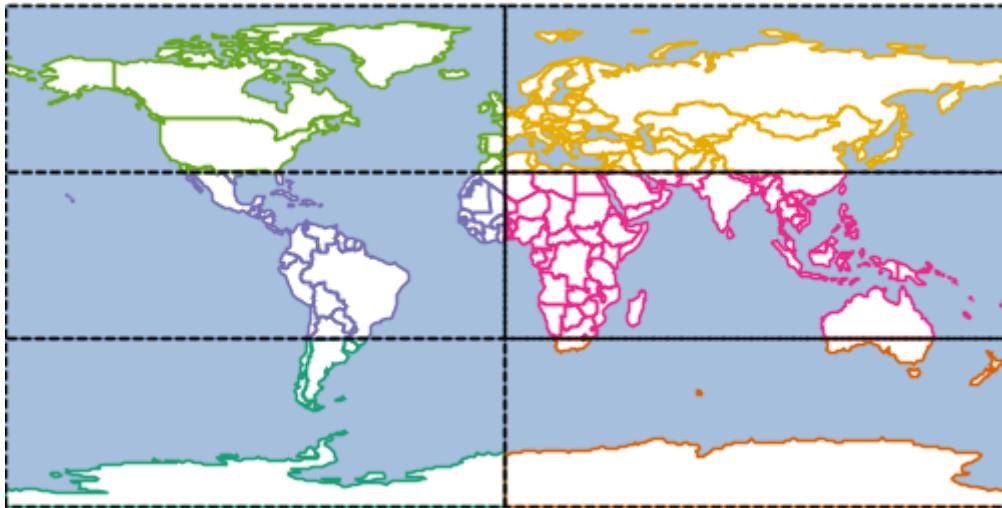


Transform

Transform one Layer into another Layer

```
Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Layer centroids = states.transform("centroids", [
    geom: "centroid(the_geom)",
    name: "strToUpperCase(STATE_NAME)",
    ratio: "FEMALE / MALE"
])
centroids.eachFeature(max: 5) {Feature f ->
    println "${f.geom} ${f['name']} = ${f['ratio']}"
}
```

```
ILLINOIS = 1.0587396098110435
DISTRICT OF COLUMBIA = 1.1447503268897763
DELAWARE = 1.0626439771122835
WEST VIRGINIA = 1.0817203227723509
MARYLAND = 1.0621588832568312
```

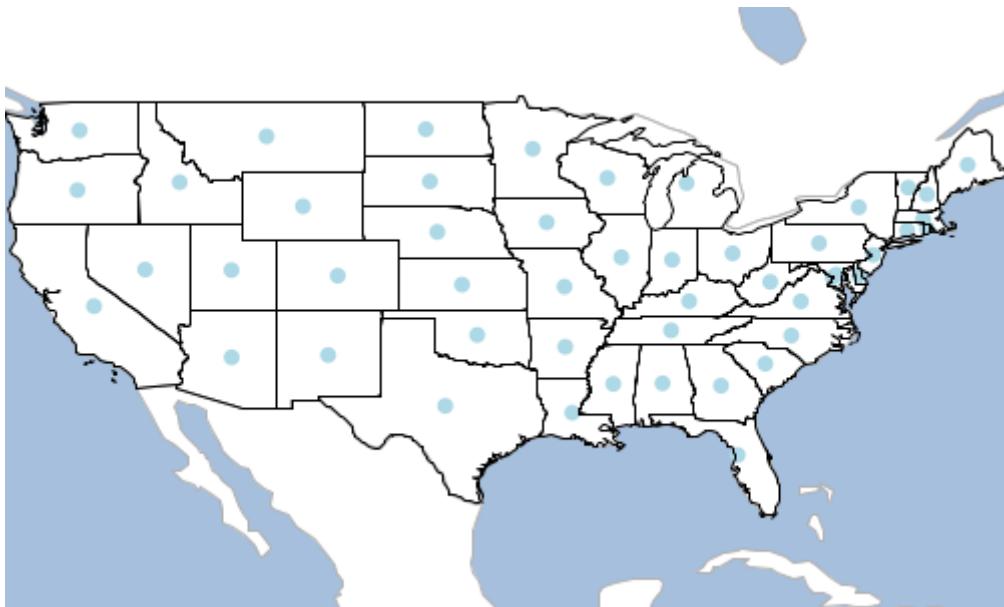

Raster

Create a Raster from the geometry and values of a Layer

```
Workspace workspace = new Memory()
Layer layer = workspace.create("earthquake", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("intensity", "Double")
])
Point point = new Point(-122.387695, 47.572357)


double distance = 5.0
List<Geometry> geometries = (1..5).collect { int i ->
    point.buffer(i * distance)
}

geometries.eachWithIndex { Geometry geometry, int i ->
    if (i > 0) {
        Geometry previousGeometry = geometries.get(i - 1)
        geometry = geometry.difference(previousGeometry)
    }
    layer.add([
        geom: geometry,
        intensity: (i + 1) * 20
    ])
}

Raster raster = layer.getRaster(
    "intensity", ①
    [400,400], ②
    layer.bounds, ③
    "intensity" ④
)
```

- ① Field for values
- ② Raster size (width and height)
- ③ Raster bounds
- ④ Name

Layer

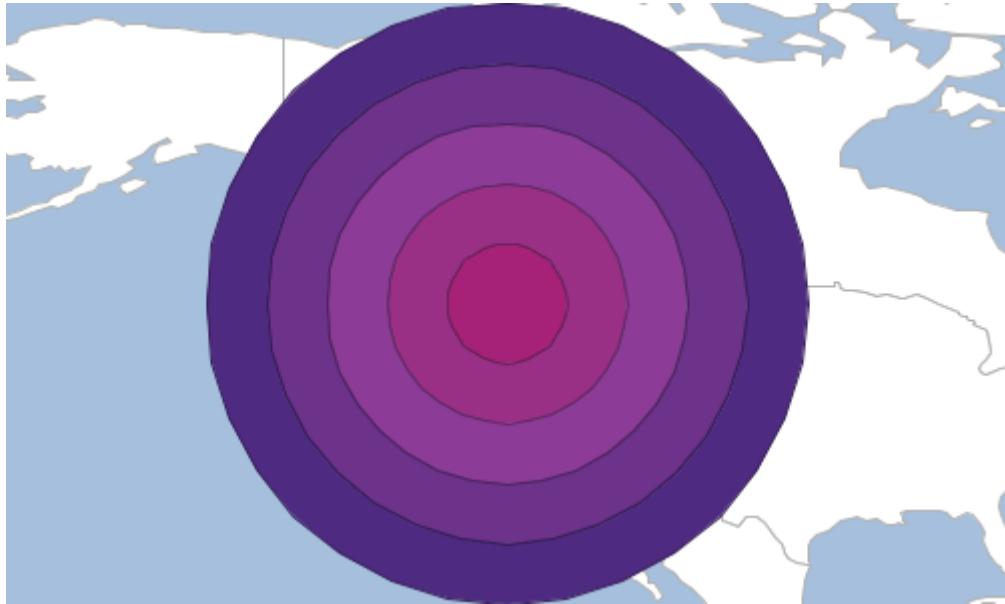

Raster



Layer Algebra


GeoScript can do layer algebra. All of the examples below use Layer A (red) and Layer B (green).



Clip


Clip Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.clip(layerB)
```

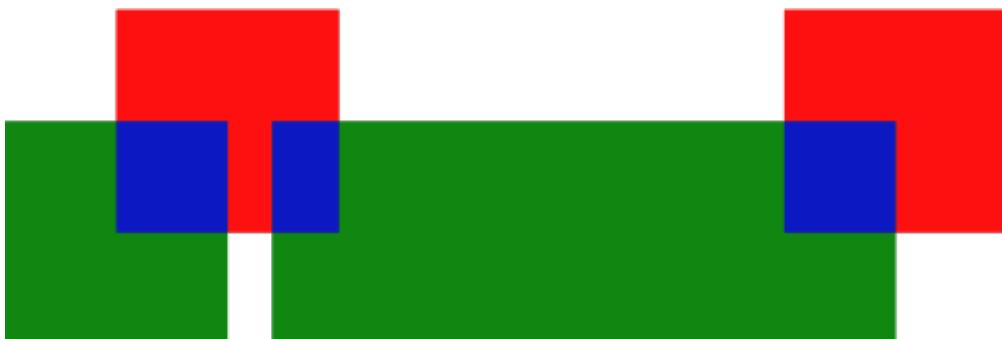

Clip Layer B with Layer A


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.clip(layerA, outWorkspace, outLayer: "ba_clip")
```

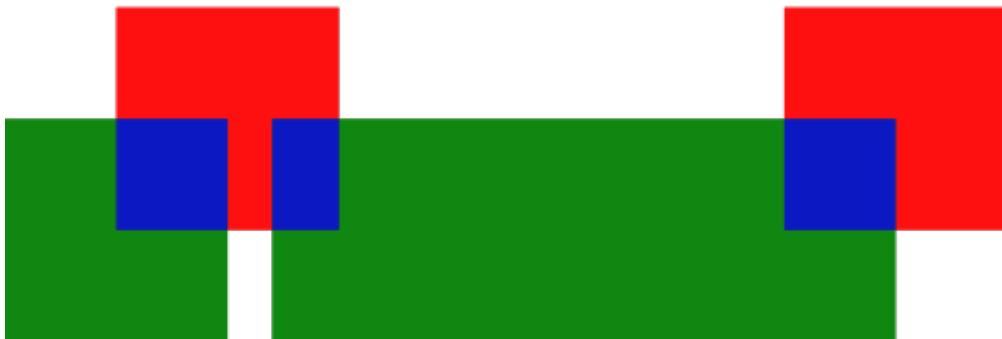

Erase


Erase Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.erase(layerB)
```

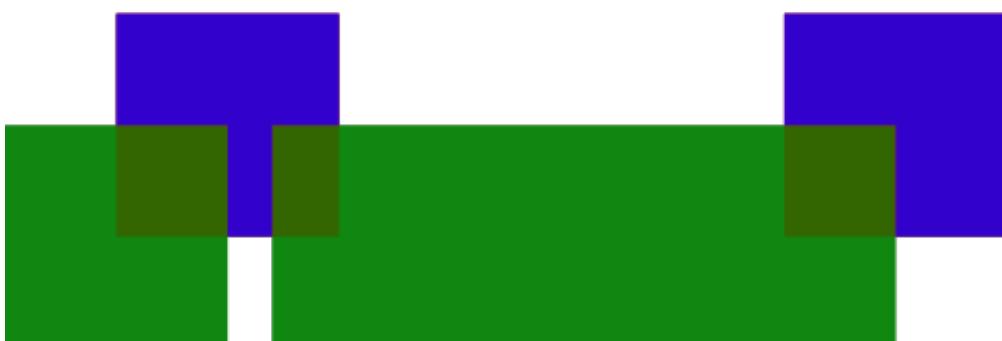

Erase Layer B with Layer A


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.erase(layerA, outWorkspace: outWorkspace, outLayer: "ba_erase")
```

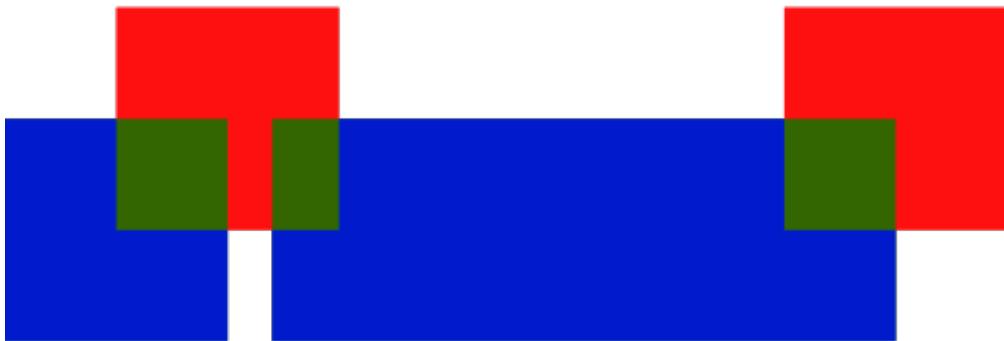

Identity

Identity Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.identity(layerB)
```

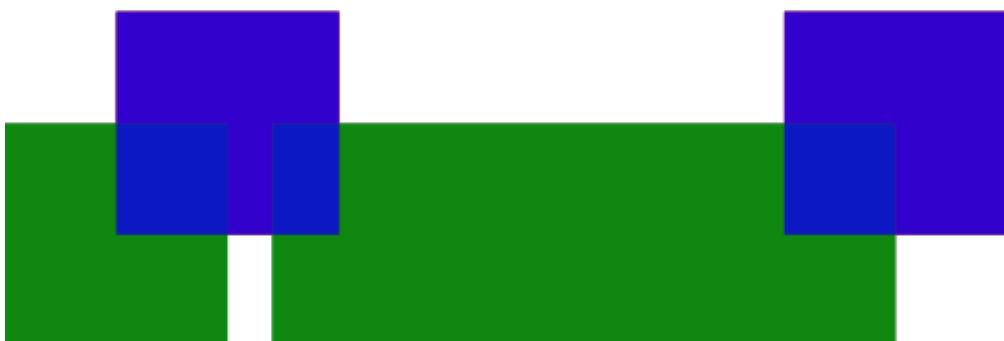

Identity Layer B with Layer A

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.identity(layerA, outWorkspace, outLayer:
"ba_identity")
```



Intersection


Intersection Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.intersection(layerB)
```



Intersection Layer B with Layer A


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.intersection(layerA, outWorkspace, outLayer:
"ba_intersection")
```

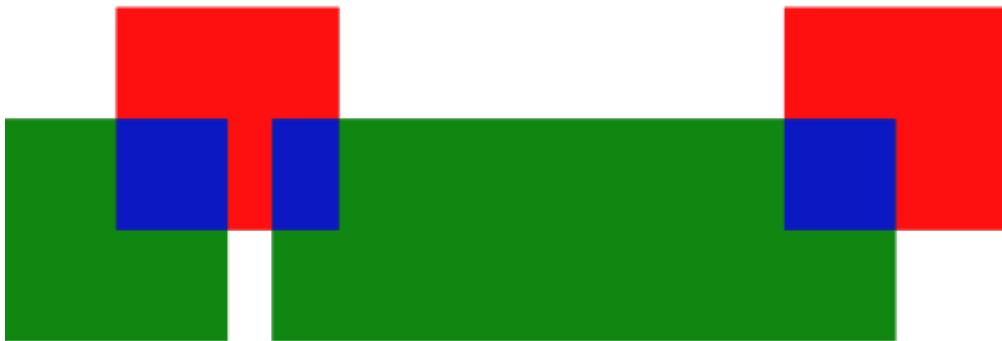

Symmetric Difference


Symmetric Difference Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.symDifference(layerB)
```

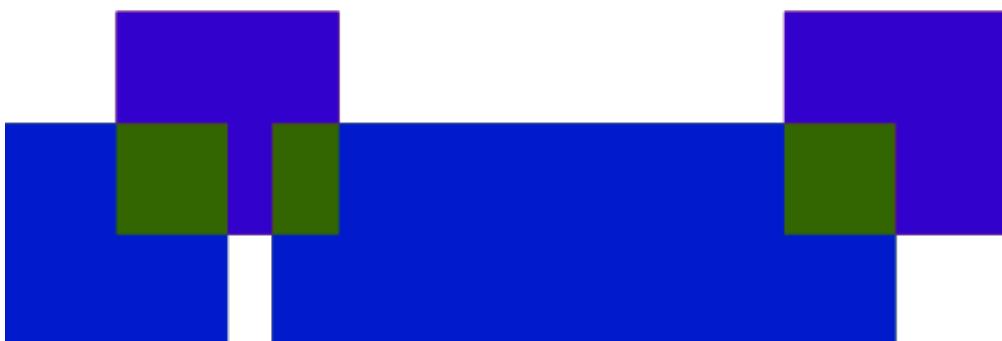

Symmetric Difference Layer B with Layer A


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.symDifference(layerA, outWorkspace: outWorkspace, outLayer:
"ba_symdifference")
```

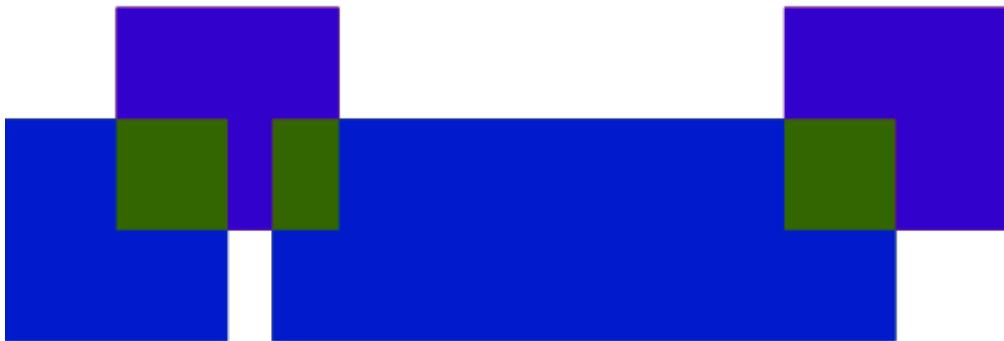

Update


Update Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.update(layerB)
```

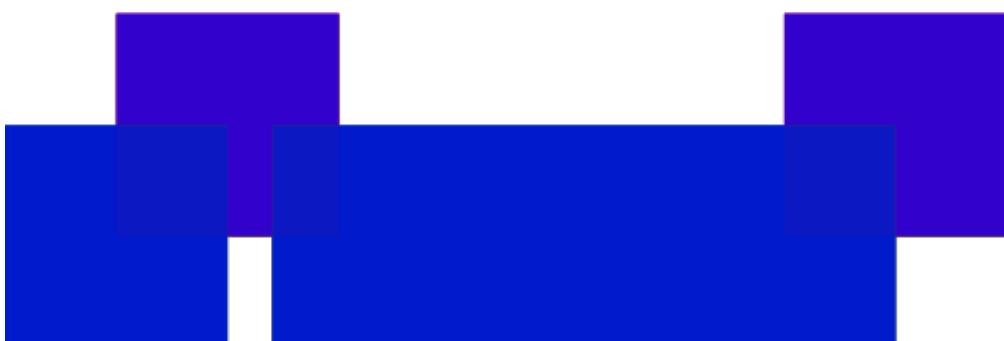

Update Layer B with Layer A


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.update(layerA, outWorkspace: outWorkspace, outLayer:
"ba_update")
```

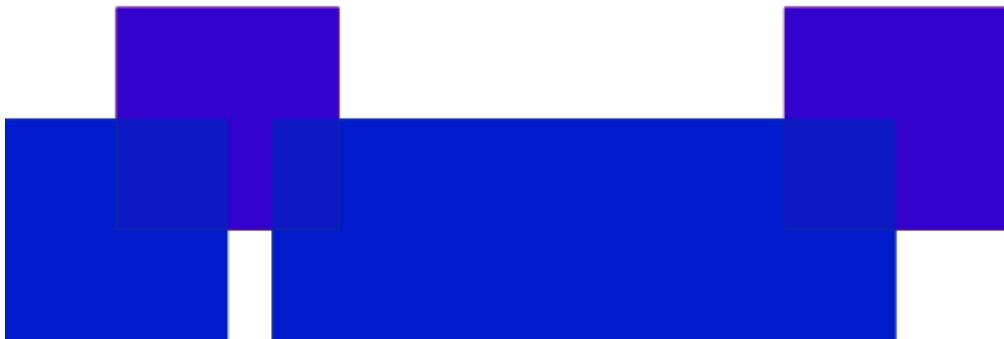

Union


Union Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.union(layerB)
```

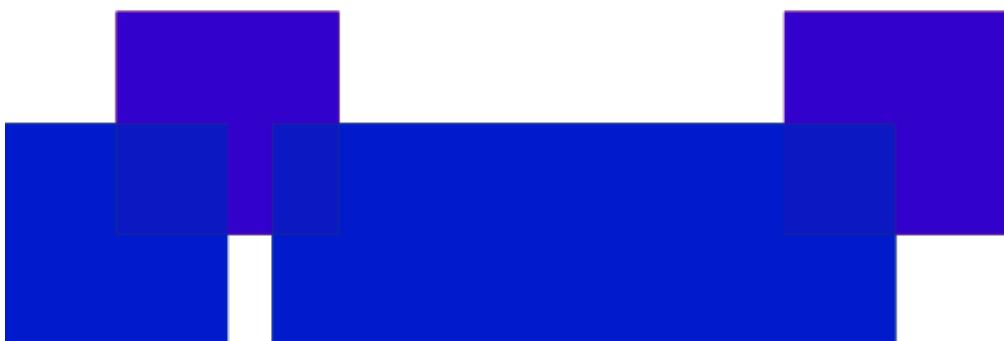

Union Layer B with Layer A

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.union(layerA, outWorkspace: outWorkspace, outLayer: "ba_union")
```

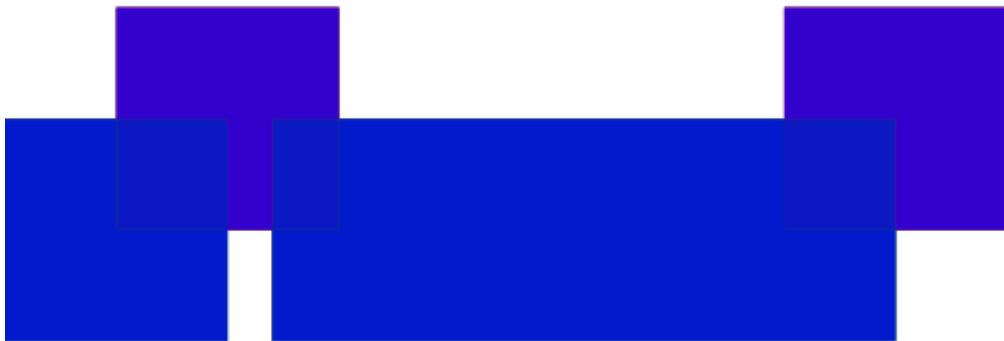

Reading and Writing Layers

The Layer IO classes are in the [geoscript.layer.io](#) package.

Finding Layer Writer and Readers

List all Layer Writers

```
List<Writer> writers = Writers.list()
writers.each { Writer writer ->
    println writer.className
}
```

```
CsvWriter
GeobufWriter
GeoJSONWriter
GeoRSSWriter
GmlWriter
GpxWriter
KmlWriter
MvtWriter
YamlWriter
```

Find a Layer Writer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

Writer writer = Writers.find("csv")
String csv = writer.write(layer)
println csv
```

```
"geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.48416 47.2619)","2","Tacoma"
```

List all Layer Readers

```
List<Reader> readers = Readers.list()
readers.each { Reader reader ->
    println reader.className
}
```

```
CsvReader
GeobufReader
GeoJSONReader
GeoRSSReader
GmlReader
GpxReader
KmlReader
MvtReader
YamlReader
```

Find a Layer Reader

```
Reader reader = Readers.find("csv")
Layer layer = reader.read("""geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.48416 47.2619)","2","Tacoma"
""")
println "# features = ${layer.count}"
```

```
# features = 2
```

GeoJSON

Get GeoJSON String from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String geojson = layer.toJSONString()
println geojson
```

```
{  
  "type": "FeatureCollection",  
  "features": [  
    {  
      "type": "Feature",  
      "geometry": {  
        "type": "Point",  
        "coordinates": [  
          -122.3204,  
          47.6024  
        ]  
      },  
      "properties": {  
        "id": 1,  
        "name": "Seattle"  
      },  
      "id": "fid-5c38dcc0_18b82f0ec42_-5cf9"  
    },  
    {  
      "type": "Feature",  
      "geometry": {  
        "type": "Point",  
        "coordinates": [  
          -122.4842,  
          47.2619  
        ]  
      },  
      "properties": {  
        "id": 2,  
        "name": "Tacoma"  
      },  
      "id": "fid-5c38dcc0_18b82f0ec42_-5cf7"  
    }  
  ]  
}
```

Write a Layer to a GeoJSON String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])


GeoJSONWriter writer = new GeoJSONWriter()
String geojson = writer.write(layer)
println geojson
```

```
{  
  "type": "FeatureCollection",  
  "features": [  
    {  
      "type": "Feature",  
      "geometry": {  
        "type": "Point",  
        "coordinates": [  
          -122.3204,  
          47.6024  
        ]  
      },  
      "properties": {  
        "id": 1,  
        "name": "Seattle"  
      },  
      "id": "fid-5c38dcc0_18b82f0ec42_-70b7"  
    },  
    {  
      "type": "Feature",  
      "geometry": {  
        "type": "Point",  
        "coordinates": [  
          -122.4842,  
          47.2619  
        ]  
      },  
      "properties": {  
        "id": 2,  
        "name": "Tacoma"  
      },  
      "id": "fid-5c38dcc0_18b82f0ec42_-70b5"  
    }  
  ]  
}
```

Read a Layer from a GeoJSON String

```
String geoJson = """
{
  "type": "FeatureCollection",
  "features": [
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.3204,
          47.6024
        ]
      },
      "properties": {
        "id": 1,
        "name": "Seattle"
      },
      "id": "1"
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.681944,
          45.52
        ]
      },
      "properties": {
        "id": 2,
        "name": "Portland"
      },
      "id": "2"
    }
  ]
}
"""

GeoJSONReader reader = new GeoJSONReader()
Layer layer = reader.read(geoJson)
```

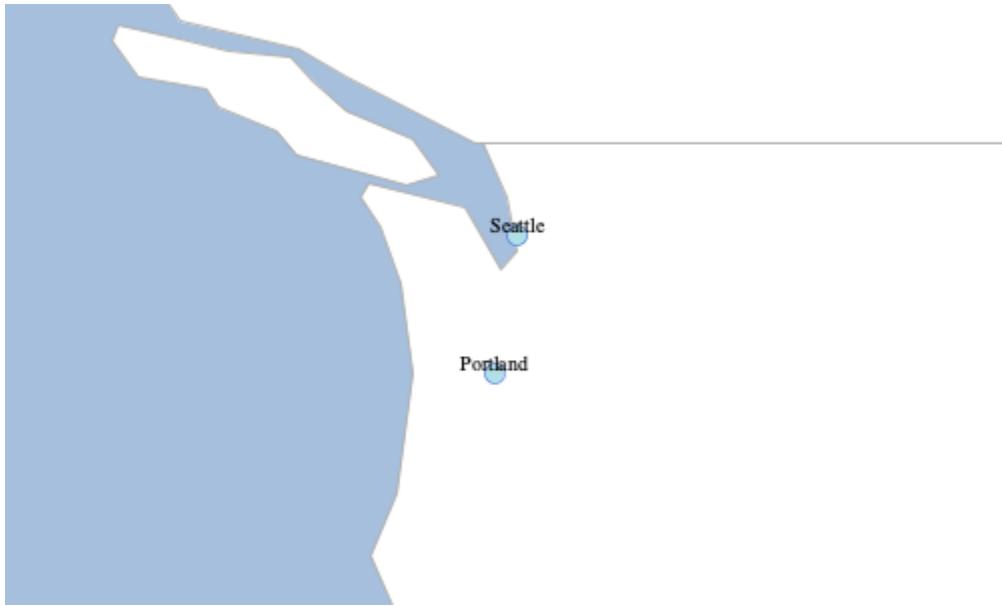

GeoBuf

Get GeoBuf String from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String geobuf = layer.toGeobufString()
println geobuf
```

```
0a0269640a046e616d65100218062289010a430a0c08001a089fd8d374c0ebb22d5a1e6669642d35633338
646363305f31386238326630656334325f2d366435386a0218016a090a0753656174746c65720400000101
0a420a0c08001a08ffd6e77498a3892d5a1e6669642d35633338646363305f31386238326630656334325f
2d366435366a0218026a080a065461636f6d61720400000101
```

Write a Layer to a GeoBuf String


```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.681944, 45.52),
    id: 2,
    name: "Portland"
])

GeobufWriter writer = new GeobufWriter()
String geobuf = writer.write(layer)
println geobuf
```

```
0a0269640a046e616d6510021806228b010a430a0c08001a089fd8d374c0ebb22d5a1e6669642d35633338
646363305f31386238326630656334325f2d366363306a0218016a090a0753656174746c65720400000101
0a440a0c08001a08afe9ff7480d2b42b5a1e6669642d3563338646363305f31386238326630656334325f
2d366362656a0218026a0a0a08506f72746c616e64720400000101
```

Read a Layer from a GeoBuf String

```
String geobuf =
"0a0269640a046e616d6510021806223f0a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a0753656
174746c650a1e0a0c08001a08afe9ff7480d2b42b6a0218026a0a0a08506f72746c616e64"
GeobufReader reader = new GeobufReader()
Layer layer = reader.read(geobuf)
```

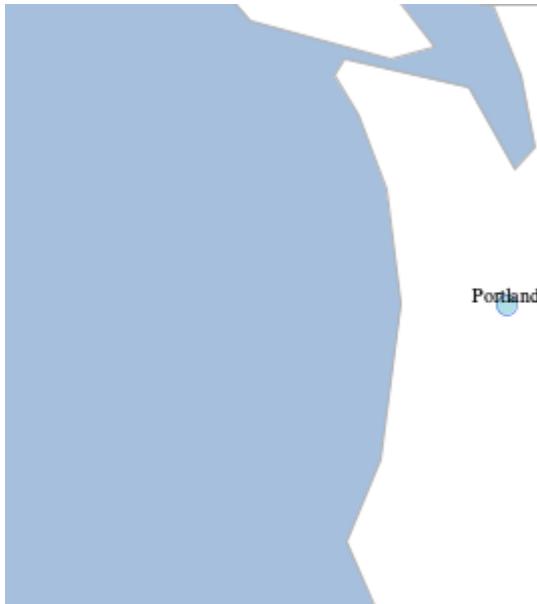

GML

Get GML String from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String gml = layer.toGMLString()
println gml
```

```
<wfs:FeatureCollection xmlns:wfs="http://www.opengis.net/wfs">
<gml:boundedBy xmlns:gml="http://www.opengis.net/gml">
    <gml:Box srsName="http://www.opengis.net/gml/srs/epsg.xml#4326">
        <gml:coord>
            <gml:X>
                -122.48416
            </gml:X>
            <gml:Y>
```

```
    47.2619
    </gml:Y>
  </gml:coord>
  <gml:coord>
    <gml:X>
      -122.3204
    </gml:X>
    <gml:Y>
      47.6024
    </gml:Y>
  </gml:coord>
</gml:Box>
</gml:boundedBy>
<gml:featureMember xmlns:gml="http://www.opengis.net/gml">
  <gsf:cities xmlns:gsf="http://geoscript.org/feature" fid="fid-5c38dcc0_18b82f0ec42_-6562">
    <gml:name>
      Seattle
    </gml:name>
    <gsf:geom>
      <gml:Point>
        <gml:coord>
          <gml:X>
            -122.3204
          </gml:X>
          <gml:Y>
            47.6024
          </gml:Y>
        </gml:coord>
      </gml:Point>
    </gsf:geom>
    <gsf:id>
      1
    </gsf:id>
  </gsf:cities>
</gml:featureMember>
<gml:featureMember xmlns:gml="http://www.opengis.net/gml">
  <gsf:cities xmlns:gsf="http://geoscript.org/feature" fid="fid-5c38dcc0_18b82f0ec42_-6560">
    <gml:name>
      Tacoma
    </gml:name>
    <gsf:geom>
      <gml:Point>
        <gml:coord>
          <gml:X>
            -122.48416
          </gml:X>
          <gml:Y>
            47.2619
          </gml:Y>
```

```
</gml:coord>
</gml:Point>
</gsf:geom>
<gsf:id>
  2
</gsf:id>
</gsf:cities>
</gml:featureMember>
</wfs:FeatureCollection>
```

Write a Layer to a GML String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])
GmlWriter writer = new GmlWriter()
String gml = writer.write(layer)
println gml
```

```

<wfs:FeatureCollection xmlns:gsf="http://geoscript.org/feature"
  xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:wfs="http://www.opengis.net/wfs"
  xmlns:gml="http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc">
  <gml:boundedBy>
    <gml:Box srsName="http://www.opengis.net/gml/srs/epsg.xml#4326">
      <gml:coord>
        <gml:X>-122.48416</gml:X>
        <gml:Y>47.2619</gml:Y>
      </gml:coord>
      <gml:coord>
        <gml:X>-122.3204</gml:X>
        <gml:Y>47.6024</gml:Y>
      </gml:coord>
    </gml:Box>
  </gml:boundedBy>
  <gml:featureMember>
    <gsf:cities fid="fid-5c38dcc0_18b82f0ec42_-6588">
      <gml:name>Seattle</gml:name>
      <gsf:geom>
        <gml:Point>
          <gml:coord>
            <gml:X>-122.3204</gml:X>
            <gml:Y>47.6024</gml:Y>
          </gml:coord>
        </gml:Point>
      </gsf:geom>
      <gsf:id>1</gsf:id>
    </gsf:cities>
  </gml:featureMember>
  <gml:featureMember>
    <gsf:cities fid="fid-5c38dcc0_18b82f0ec42_-6586">
      <gml:name>Tacoma</gml:name>
      <gsf:geom>
        <gml:Point>
          <gml:coord>
            <gml:X>-122.48416</gml:X>
            <gml:Y>47.2619</gml:Y>
          </gml:coord>
        </gml:Point>
      </gsf:geom>
      <gsf:id>2</gsf:id>
    </gsf:cities>
  </gml:featureMember>
</wfs:FeatureCollection>

```

Read a Layer from a GML String

```
String gml = """
<wfs:FeatureCollection xmlns:gsf="http://geoscript.org/feature"
  xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:wfs="http://www.opengis.net/wfs"
  xmlns:gml="http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc">
  <gml:boundedBy>
    <gml:Box srsName="http://www.opengis.net/gml/srs/epsg.xml#4326">
      <gml:coord>
        <gml:X>-122.48416</gml:X>
        <gml:Y>47.2619</gml:Y>
      </gml:coord>
      <gml:coord>
        <gml:X>-122.3204</gml:X>
        <gml:Y>47.6024</gml:Y>
      </gml:coord>
    </gml:Box>
  </gml:boundedBy>
  <gml:featureMember>
    <gsf:cities fid="fid-a7cd555_1634fc34503_-7fff">
      <gml:name>Seattle</gml:name>
      <gsf:geom>
        <gml:Point>
          <gml:coord>
            <gml:X>-122.3204</gml:X>
            <gml:Y>47.6024</gml:Y>
          </gml:coord>
        </gml:Point>
      </gsf:geom>
      <gsf:id>1</gsf:id>
    </gsf:cities>
  </gml:featureMember>
  <gml:featureMember>
    <gsf:cities fid="fid-a7cd555_1634fc34503_-7ffd">
      <gml:name>Portland</gml:name>
      <gsf:geom>
        <gml:Point>
          <gml:coord>
            <gml:X>-122.681944</gml:X>
            <gml:Y>45.52</gml:Y>
          </gml:coord>
        </gml:Point>
      </gsf:geom>
      <gsf:id>2</gsf:id>
    </gsf:cities>
  </gml:featureMember>
</wfs:FeatureCollection>
"""

GmlReader reader = new GmlReader()
Layer layer = reader.read(gml)
```



KML

Get KML String from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])
String kml = layer.toKMLString()
println kml
```

```
<kml:kml xmlns:kml="http://www.opengis.net/kml/2.2">
  <kml:Document>
    <kml:Folder>
      <kml:name>
        cities
      </kml:name>
      <kml:Schema kml:name="cities" kml:id="cities">
        <kml:SimpleField kml:name="id" kml:type="Integer"/>
```

```
<kml:SimpleField kml:name="name" kml:type="String"/>
</kml:Schema>
<kml:Placemark>
  <kml:name>
    fid-5c38dcc0_18b82f0ec42_-5e04
  </kml:name>
  <kml:Style>
    <kml:IconStyle>
      <kml:color>
        ff0000ff
      </kml:color>
    </kml:IconStyle>
  </kml:Style>
  <kml:ExtendedData>
    <kml:SchemaData kml:schemaUrl="#cities">
      <kml:SimpleData kml:name="id">
        1
      </kml:SimpleData>
      <kml:SimpleData kml:name="name">
        Seattle
      </kml:SimpleData>
    </kml:SchemaData>
  </kml:ExtendedData>
  <kml:Point>
    <kml:coordinates>
      -122.3204,47.6024
    </kml:coordinates>
  </kml:Point>
</kml:Placemark>
<kml:Placemark>
  <kml:name>
    fid-5c38dcc0_18b82f0ec42_-5e02
  </kml:name>
  <kml:Style>
    <kml:IconStyle>
      <kml:color>
        ff0000ff
      </kml:color>
    </kml:IconStyle>
  </kml:Style>
  <kml:ExtendedData>
    <kml:SchemaData kml:schemaUrl="#cities">
      <kml:SimpleData kml:name="id">
        2
      </kml:SimpleData>
      <kml:SimpleData kml:name="name">
        Tacoma
      </kml:SimpleData>
    </kml:SchemaData>
  </kml:ExtendedData>
  <kml:Point>
```

```
<kml:coordinates>
    -122.48416,47.2619
</kml:coordinates>
</kml:Point>
</kml:Placemark>
</kml:Folder>
</kml:Document>
</kml:kml>
```

Write a Layer to a KML String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])
KmlWriter writer = new KmlWriter()
String kml = writer.write(layer)
println kml
```

```

<kml:kml xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1">
  <kml:Document>
    <kml:Placemark id="fid-5c38dcc0_18b82f0ec42_-6580">
      <kml:name>Seattle</kml:name>
      <kml:Point>
        <kml:coordinates>-122.3204,47.6024</kml:coordinates>
      </kml:Point>
    </kml:Placemark>
    <kml:Placemark id="fid-5c38dcc0_18b82f0ec42_-657e">
      <kml:name>Tacoma</kml:name>
      <kml:Point>
        <kml:coordinates>-122.48416,47.2619</kml:coordinates>
      </kml:Point>
    </kml:Placemark>
  </kml:Document>
</kml:kml>

```


Read a Layer from a KML String

```

String kml = """
<kml:kml xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1">
  <kml:Document>
    <kml:Placemark id="fid-61215c1b_1634ca279f5_-7fff">
      <kml:name>Seattle</kml:name>
      <kml:Point>
        <kml:coordinates>-122.3204,47.6024</kml:coordinates>
      </kml:Point>
    </kml:Placemark>
    <kml:Placemark id="fid-61215c1b_1634ca279f5_-7ffd">
      <kml:name>Portland</kml:name>
      <kml:Point>
        <kml:coordinates>-122.681944,45.52</kml:coordinates>
      </kml:Point>
    </kml:Placemark>
  </kml:Document>
</kml:kml>
"""

KmlReader reader = new KmlReader()
Layer layer = reader.read(kml)

```

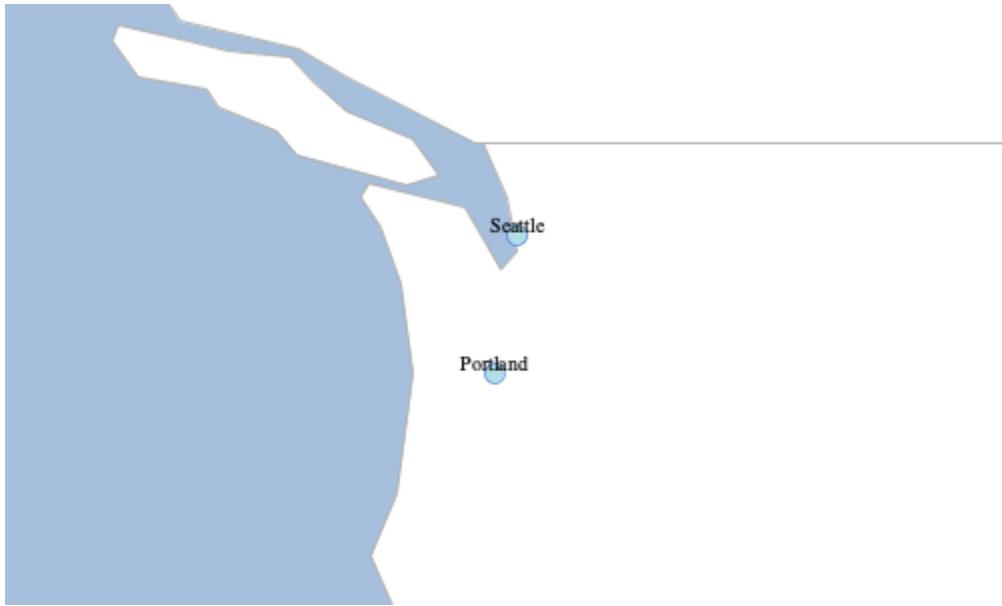

YAML

Convert a Layer to a YAML String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String yaml = layer.toYamlString()
println yaml
```

```

---
type: FeatureCollection
features:
- properties:
  id: 1
  name: Seattle
geometry:
  type: Point
  coordinates:
  - -122.3204
  - 47.6024
- properties:
  id: 2
  name: Tacoma
geometry:
  type: Point
  coordinates:
  - -122.48416
  - 47.2619

```

Write a Layer to a YAML String

```

Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])


YamlWriter writer = new YamlWriter()
String yaml = writer.write(layer)
println yaml

```

```
---  
type: FeatureCollection  
features:  
- properties:  
  id: 1  
  name: Seattle  
geometry:  
  type: Point  
  coordinates:  
  - -122.3204  
  - 47.6024  
- properties:  
  id: 2  
  name: Tacoma  
geometry:  
  type: Point  
  coordinates:  
  - -122.48416  
  - 47.2619
```

Read a Layer from a YAML String

```
String yaml = """---  
type: "FeatureCollection"  
features:  
- properties:  
  id: 1  
  name: "Seattle"  
geometry:  
  type: "Point"  
  coordinates:  
  - -122.3204  
  - 47.6024  
- properties:  
  id: 2  
  name: "Tacoma"  
geometry:  
  type: "Point"  
  coordinates:  
  - -122.48416  
  - 47.2619  
"""  
  
YamlReader reader = new YamlReader()  
Layer layer = reader.read(yaml)
```

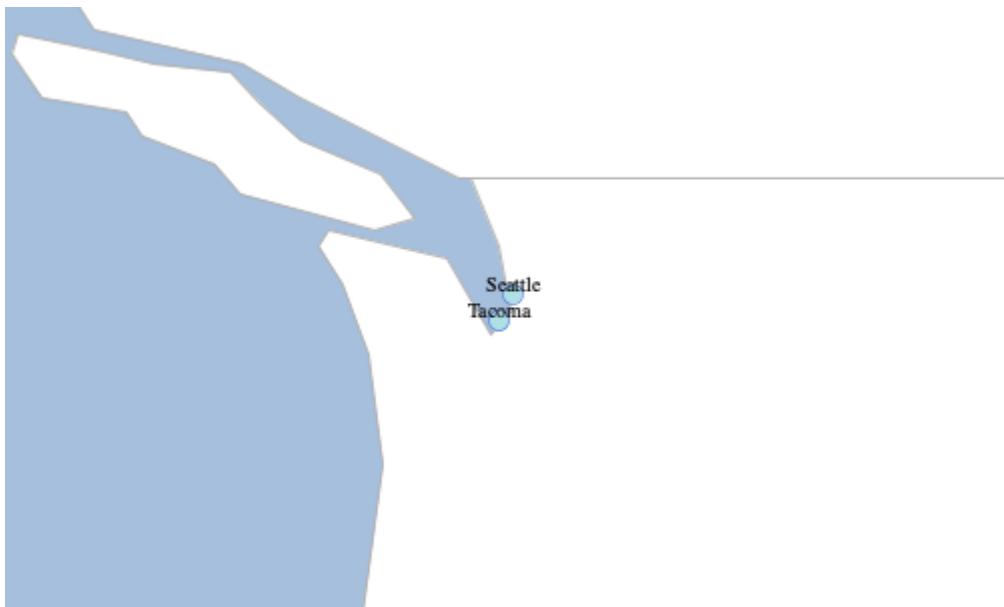

CSV

Write a Layer to a CSV String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

CsvWriter writer = new CsvWriter()
String csv = writer.write(layer)
println csv
```

```
"geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.48416 47.2619)","2","Tacoma"
```

Read a Layer from a CSV String

```
String csv = """geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.681944 45.52)","2","Portland"
"""

CsvReader reader = new CsvReader()
Layer layer = reader.read(csv)
```



GeoRSS

Write a Layer to a GeoRSS String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

GeoRSSWriter writer = new GeoRSSWriter()
String georss = writer.write(layer)
println georss
```

```
<?xml version="1.0" encoding="UTF-8"?><feed
  xmlns:georss="http://www.georss.org/georss" xmlns="http://www.w3.org/2005/Atom">
  <title>cities</title>
  <subtitle>cities geom: Point(EPSG:4326), id: Integer, name: String</subtitle>
  <link>http://geoscript.org/feature</link>
  <entry>
    <title>fid-5c38dcc0_18b82f0ec42_-6cbc</title>
    <summary>[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]</summary>
    <updated>Mon Oct 30 16:35:47 PDT 2023</updated>
    <georss:point>47.6024 -122.3204</georss:point>
  </entry>
  <entry>
    <title>fid-5c38dcc0_18b82f0ec42_-6cba</title>
    <summary>[geom:POINT (-122.48416 47.2619), id:2, name:Tacoma]</summary>
    <updated>Mon Oct 30 16:35:47 PDT 2023</updated>
    <georss:point>47.2619 -122.48416</georss:point>
  </entry>
</feed>
```

Read a Layer from a GeoRSS String

```
String georss = """<?xml version="1.0" encoding="UTF-8"?>
<feed xmlns:georss="http://www.georss.org/georss" xmlns="http://www.w3.org/2005/Atom">
<title>cities</title>
<subtitle>cities geom: Point(EPSG:4326), id: Integer, name: String</subtitle>
<link>http://geoscript.org/feature</link>
<entry>
<title>Seattle</title>
<summary>[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]</summary>
<updated>Fri May 11 15:23:05 PDT 2018</updated>
<georss:point>47.6024 -122.3204</georss:point>
</entry>
<entry>
<title>Portland</title>
<summary>[geom:POINT (-122.681944 45.52), id:2, name:Portland]</summary>
<updated>Fri May 11 15:23:05 PDT 2018</updated>
<georss:point>45.52 -122.681944</georss:point>
</entry>
</feed>
"""

GeoRSSReader reader = new GeoRSSReader()
Layer layer = reader.read(georss)
```



GPX

Write a Layer to a GPX String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])


GpxWriter writer = new GpxWriter()
String gpx = writer.write(layer)
println gpx
```

```
<?xml version="1.0" encoding="UTF-8"?><gpx xmlns="http://www.topografix.com/GPX/1/1"
version="1.1" creator="geoscript">
<wpt lat="47.6024" lon="-122.3204">
    <name>fid-5c38dcc0_18b82f0ec42_-6584</name>
</wpt>
<wpt lat="47.2619" lon="-122.48416">
    <name>fid-5c38dcc0_18b82f0ec42_-6582</name>
</wpt>
</gpx>
```

Read a Layer from a GPX String

```
String gpx = """<?xml version="1.0" encoding="UTF-8"?>
<gpx xmlns="http://www.topografix.com/GPX/1/1" version="1.1" creator="geoscript">
<wpt lat="47.6024" lon="-122.3204">
<name>Seattle</name>
</wpt>
<wpt lat="45.52" lon="-122.681944">
<name>Portland</name>
</wpt>
</gpx>
"""

GpxReader reader = new GpxReader()
Layer layer = reader.read(gpx)
```

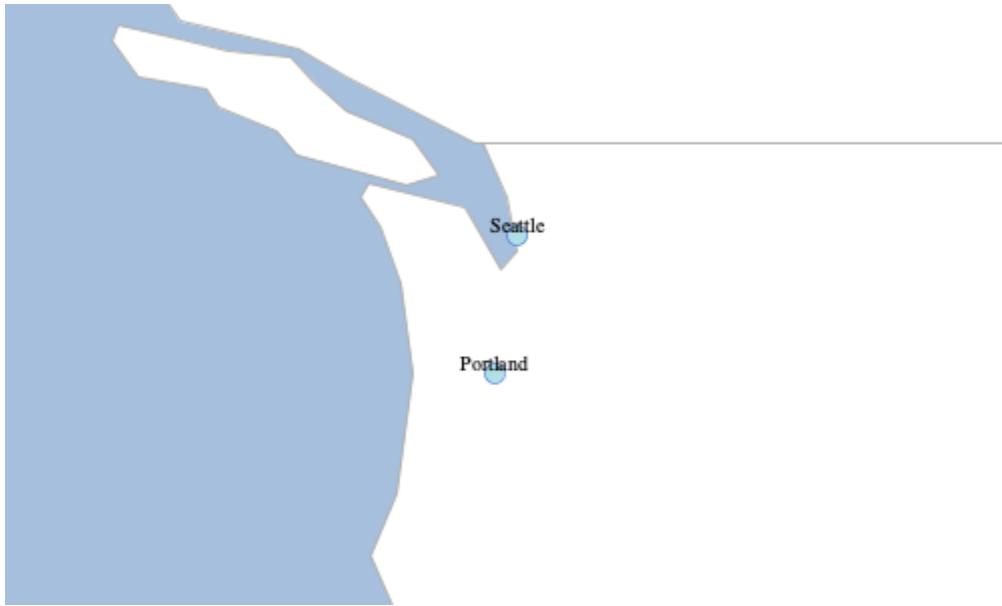

MVT


Write a Layer to a MVT String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])
MvtWriter writer = new MvtWriter()
String mvt = writer.write(layer.reproject(new Projection("EPSG:3857")))
println mvt
```

```
iU1WVAAAAGF4nGNgYGBiYGAQBWIGxo0ZPw5M6bBa6xj0nRDd8rIcKCZZrZS7omR1qKOUL5ibqmS1FJyaWFKSk6
pUi9CVxbjcy9Mh0zHsygrWwt2vgGISEF1GcF0hicn5uYlKtQBZLx7y
```

Read a Layer from a MVT String

```
String mvt =  
"iU1WVAAAAGF4nGNgYGBiYGAQBWIGxoOZPw5M6bBa6xj0nRDd8rIcKCZZrZS...  
6pUi9CVxbjcy9Mh0zHsygrWwt2vgGISEF1GcF0hicn5uYlKtQBZLx7y="  
MvtReader reader = new MvtReader()  
Layer layer = reader.read(mvt)
```

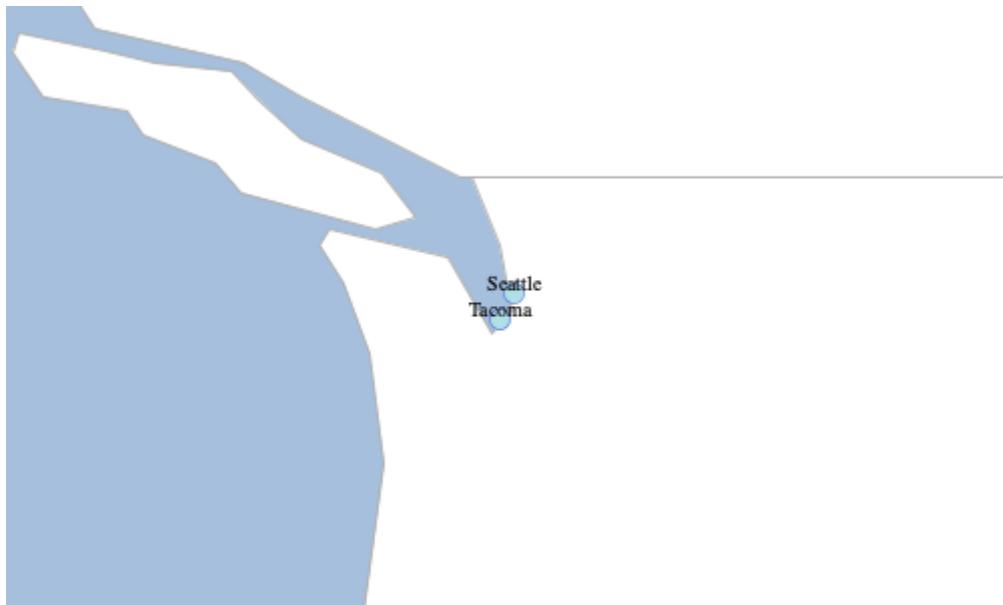

PBF

Write a Layer to PBF bytes

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid(origin: Pyramid.Origin.TOP_LEFT)
Tile tile = new Tile(4,2,5)
Bounds bounds = pyramid.bounds(tile)

byte[] bytes = Pbf.write([layer], bounds)
println bytes.encodeBase64()
```

```
G1YKBmNpdGllcxIPEgQAAAEBGAEiBQmGJNlEg8SBAACAQMYASIFCcojiicaAmlkGgRuYW1lIgIwAiIJCgdTZWF0dGxlIgIwBCIICgZUYWNvbWEogCB4Ag==
```

Read a Layer from a PBF Base64 encoded String

```
byte[] bytes =
"G1YKBmNpdGllcxIPEgQAAAEBGAEiBQmGJNlEg8SBAACAQMYASIFCcojiicaAmlkGgRuYW1lIgIwAiIJCgdTZWF0dGxlIgIwBCIICgZUYWNvbWEogCB4Ag".decodeBase64()

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid(origin: Pyramid.Origin.TOP_LEFT)
Tile tile = new Tile(4,2,5)
Bounds bounds = pyramid.bounds(tile)

List<Layer> layers = Pbf.read(bytes, bounds)
```




Graticules

Square


Create a square graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 20
double spacing = 5
Layer layer = Graticule.createSquares(bounds, length, spacing)
```

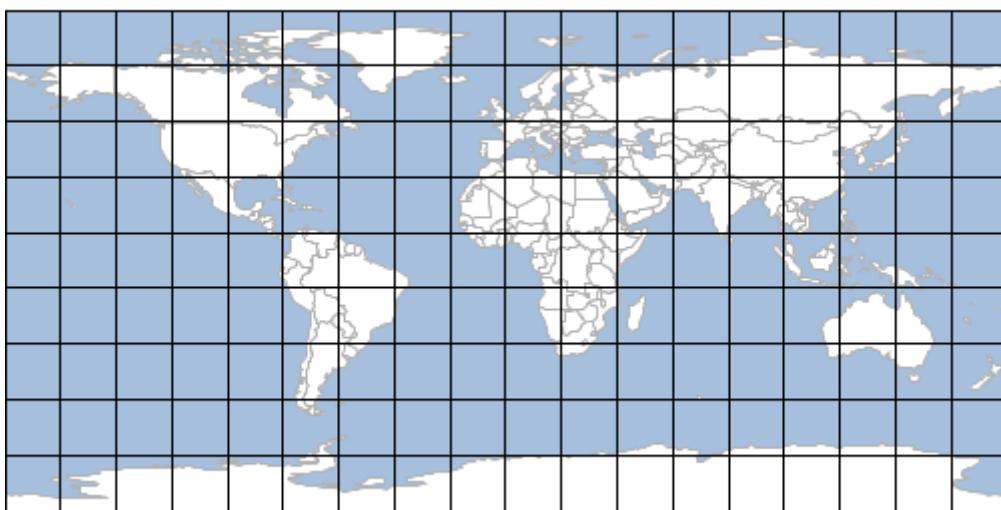

Create a square graticules Shapefile Layer


```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 30
double spacing = -1
Workspace workspace = new Directory("target")
Layer layer = Graticule.createSquares(bounds, length, spacing, workspace: workspace,
layer: "squares")
```

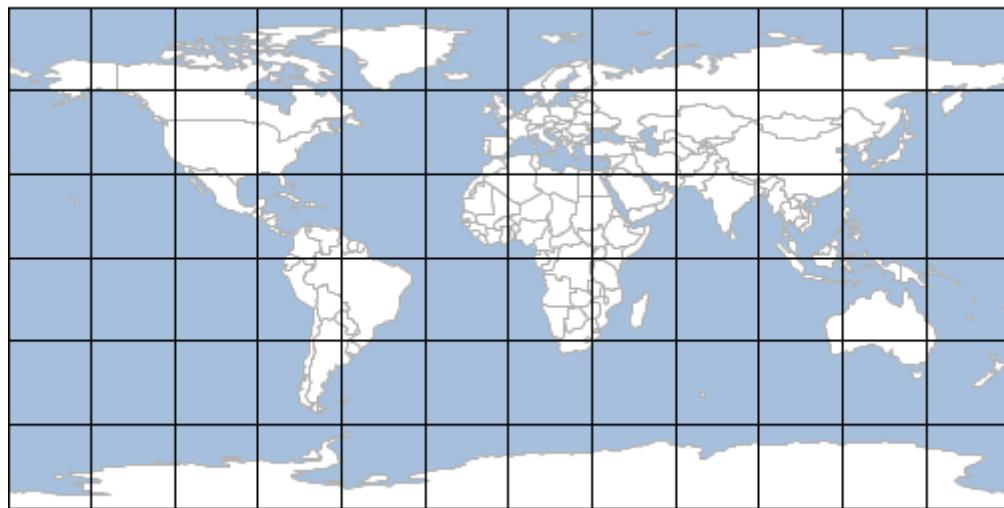

Hexagon


Create a flat hexagon graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 20
double spacing = 5
String orientation = "flat"
Layer layer = Graticule.createHexagons(bounds, length, spacing, orientation)
```

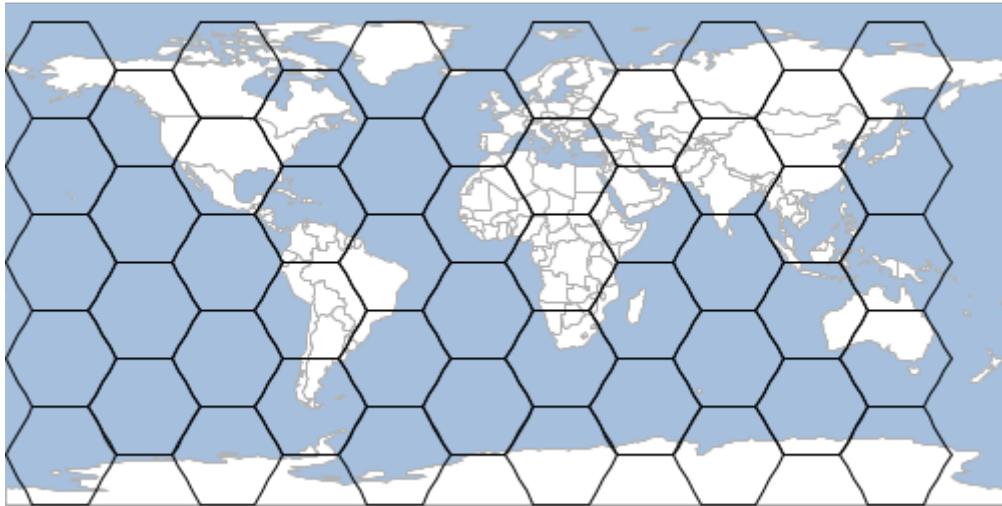


Create a angled hexagon graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 10
double spacing = 5
String orientation = "angled"
Layer layer = Graticule.createHexagons(bounds, length, spacing, orientation)
```

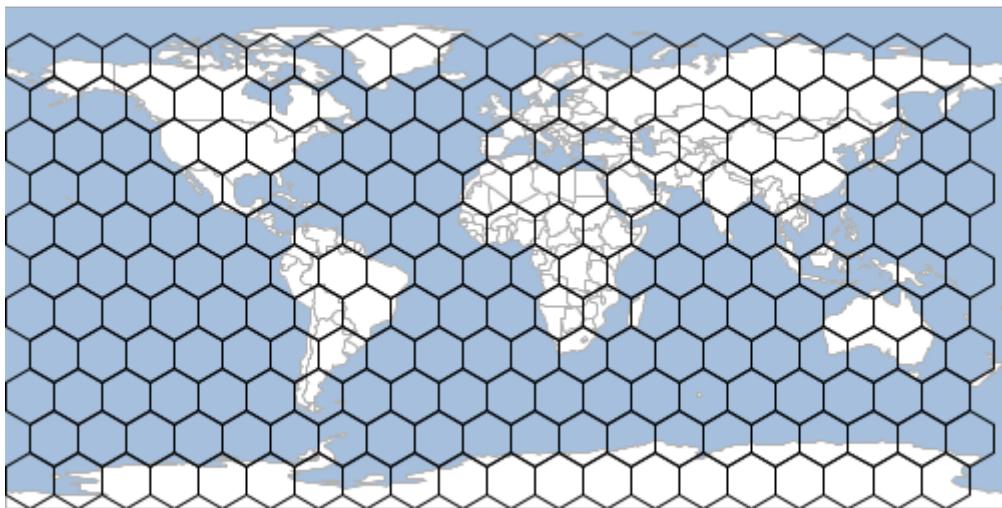


Create a hexagon graticules Layer intersecting Washington States

```
Layer states = new Shapefile("src/main/resources/data/states.shp")
Feature feature = states.first(filter: "STATE_NAME = 'Washington'")
Layer layer = Graticule.createHexagons(feature.bounds.expandBy(1.0), 0.2, -1.0,
"flat", createFeature: { GridElement e ->
    new Point(e.center.x, e.center.y).buffer(0.2).intersects(feature.geom)
})
```

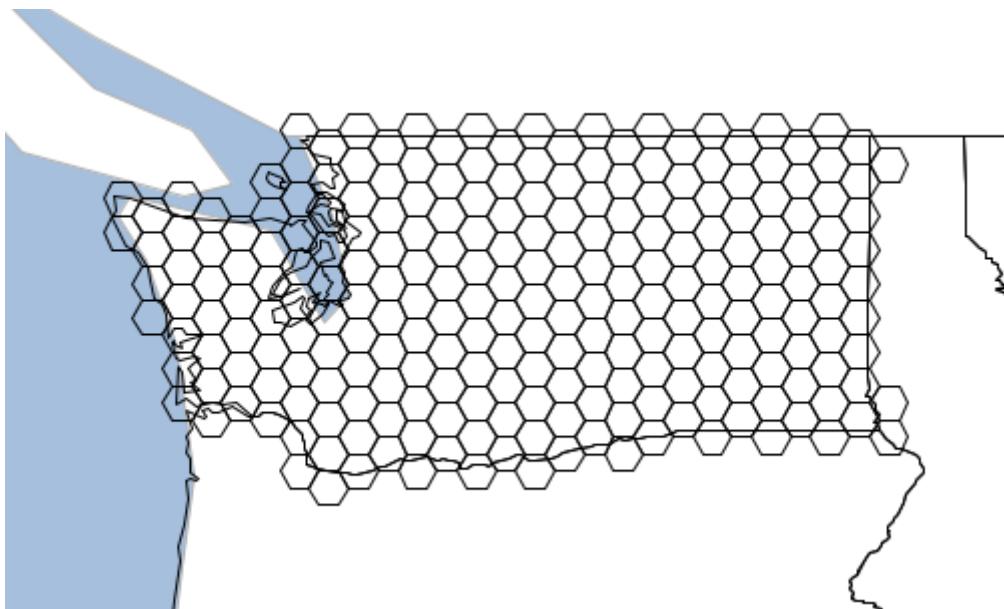

Create a hexagon graticules Layer with a custom schema


```
Layer states = new Shapefile("src/main/resources/data/states.shp")
Schema schema = new Schema("hexagon", [
    new Field("geom", "Polygon"),
    new Field("color", "java.awt.Color")
])
Bounds b = states.bounds.expandBy(1)
Layer layer = Graticule.createHexagons(b, 2.0, -1.0, "flat", schema: schema,
setAttributes: { GridElement e, Map attributes -
    attributes["color"] = Color.randomPastel.asColor()
})
layer.style = new Fill(new Property("color"), 0.5)
```

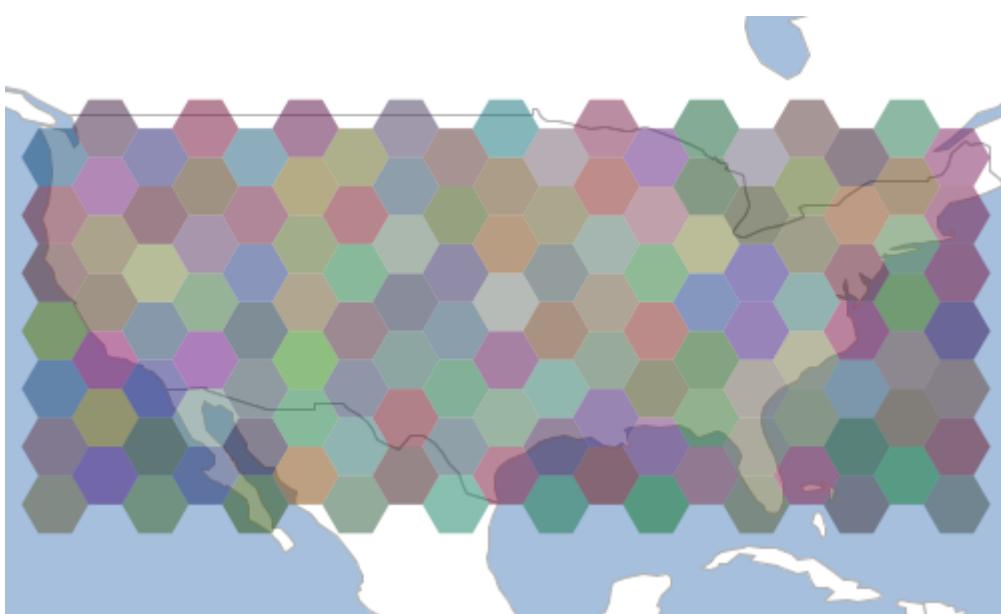

Line

Create a line graticules Layer


```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
Layer layer = Graticule.createLines(bounds, [
    [orientation: 'vertical', level: 2, spacing: 20],
    [orientation: 'vertical', level: 1, spacing: 10 ],
    [orientation: 'horizontal', level: 2, spacing: 20],
    [orientation: 'horizontal', level: 1, spacing: 10 ]
], 2.0)
```

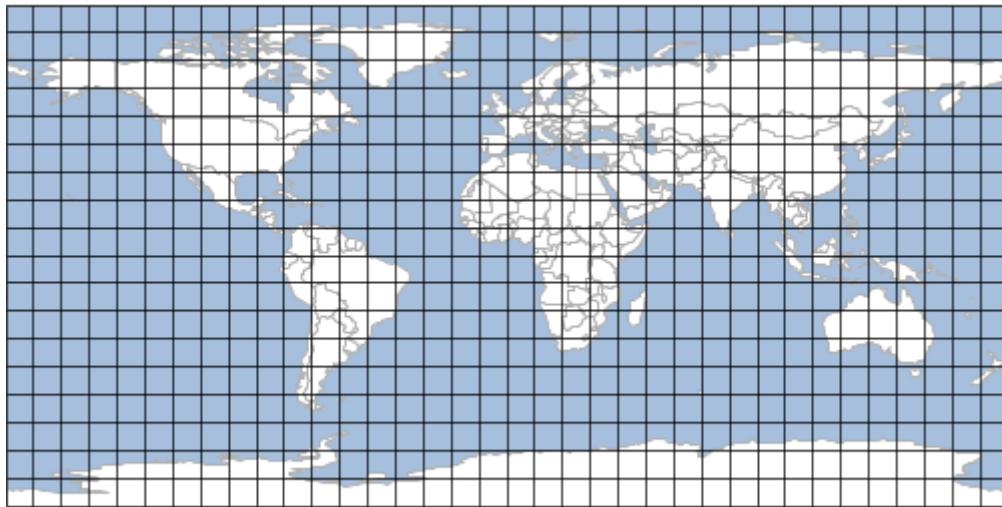

Rectangle

Create a rectangular graticules Layer


```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double width = 20
double height = 10
Layer layer = Graticule.createRectangles(bounds, width, height, -1)
```

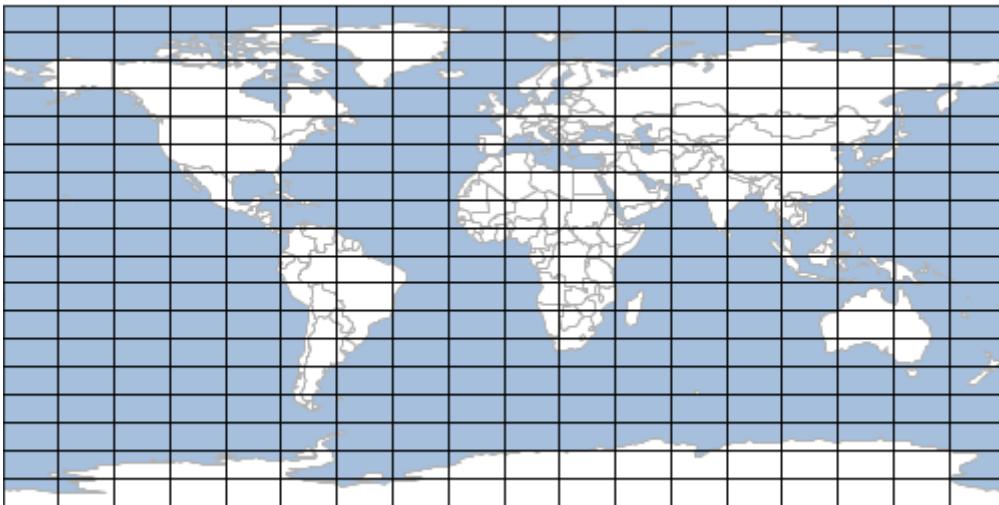

Oval


Create a oval graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 20
Layer layer = Graticule.createOvals(bounds, length)
```

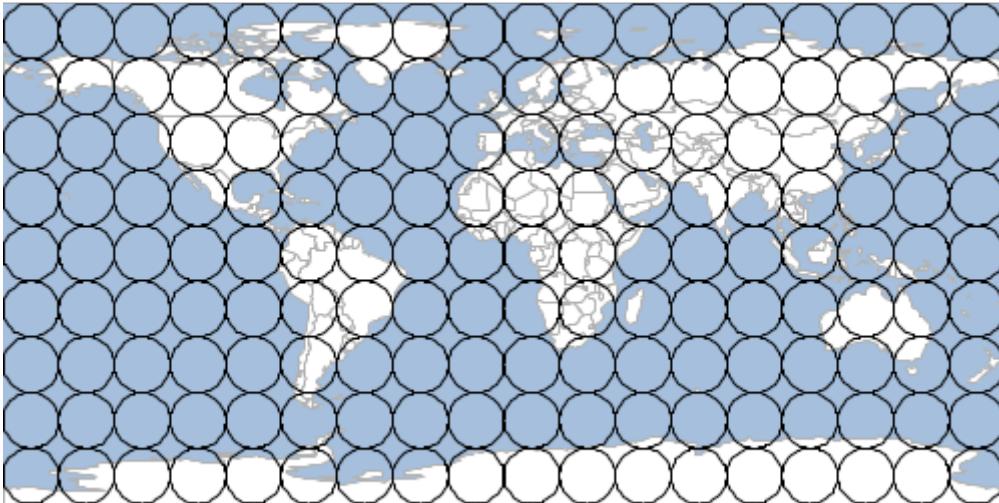

Create a oval graticules Layer intersecting Washington States

```
Layer states = new Shapefile("src/main/resources/data/states.shp")
Feature feature = states.first(filter: "STATE_NAME = 'Washington'")
Layer layer = Graticule.createOvals(feature.bounds.expandBy(1.0), 0.4, createFeature:
{ GridElement e ->
    new Point(e.center.x, e.center.y).buffer(0.2).intersects(feature.geom)
})
```

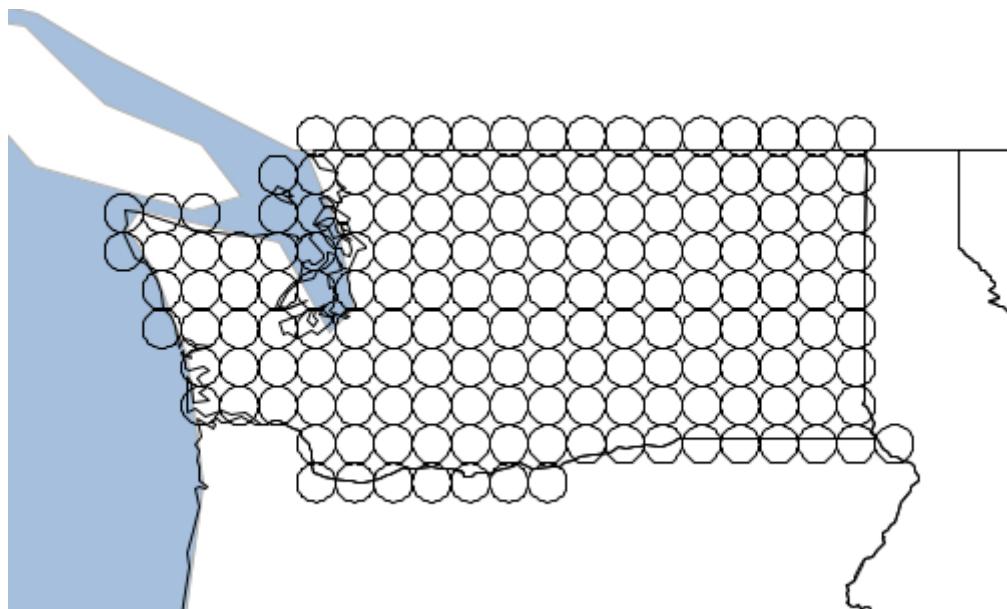

Format Recipes

The Format classes are in the [geoscript.layer](#) package.

A Format is a collection of Rasters.

Get a Format

Get a Format from a File

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
println format.name
```

GeoTIFF

Get Names

Get names of the Rasters in a Format. Some Formats can contain more than one Raster.


```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
List<String> names = format.names
names.each { String name ->
    println name
}
```

earth

Read a Raster

Read a Raster from a File

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
```

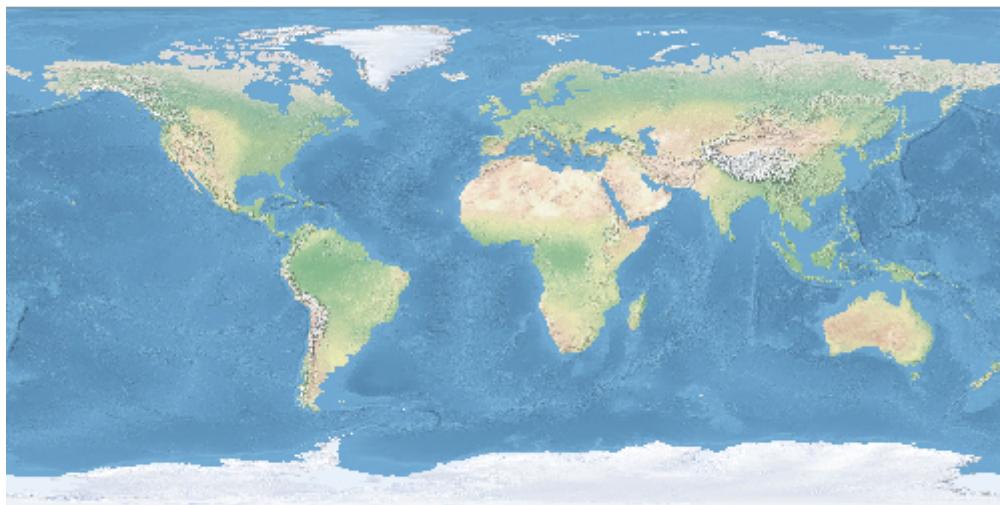


Write a Raster

Write a Raster to a File

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")

File outFile = new File("target/earth.png")
Format outFormat = Format.getFormat(outFile)
outFormat.write(raster)
Raster outRaster = outFormat.read("earth")
```

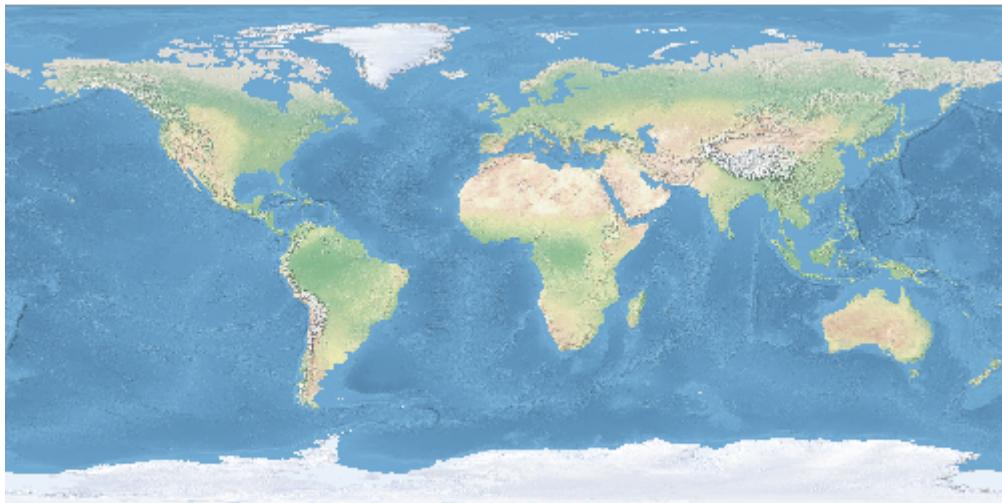

Check for a Raster

Check to see if the Format has a Raster

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)

boolean hasEarth = format.has("earth")
println "Has raster named earth? ${hasEarth}"

boolean hasWorld = format.has("world")
println "Has raster named world? ${hasWorld}"
```


```
Has raster named earth? true
Has raster named world? false
```

GeoTIFF

Read

Read a GeoTIFF Raster from a File

```
File file = new File("src/main/resources/earth.tif")
GeoTIFF geotiff = new GeoTIFF(file)
Raster raster = geotiff.read("earth")
```

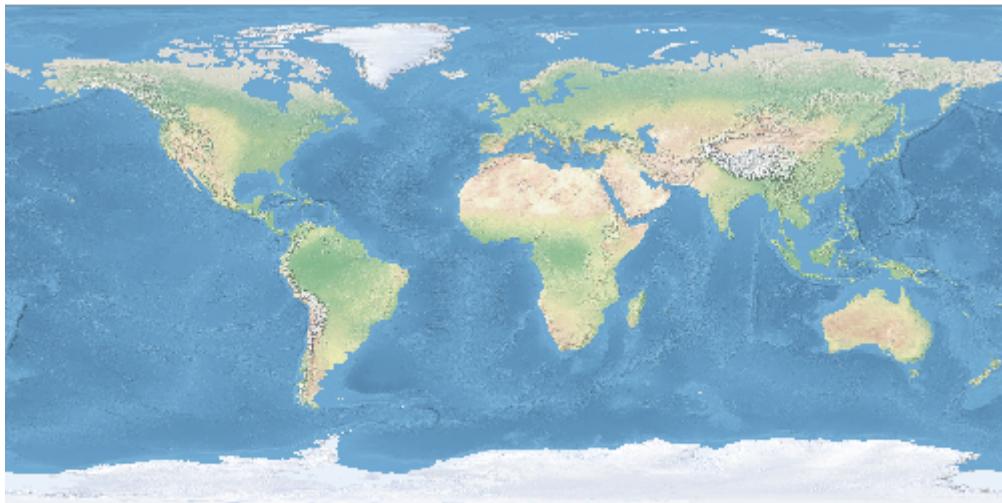


Write

Write a GeoTIFF Raster to an ArcGrid Raster

```
File file = new File("src/main/resources/earth.tif")
GeoTIFF geotiff = new GeoTIFF(file)
Raster raster = geotiff.read("earth")

File arcGridFile = new File("target/earth.asc")
ArcGrid arcGrid = new ArcGrid(arcGridFile)
arcGrid.write(raster)
Raster arcGridRaster = arcGrid.read("earth")
```

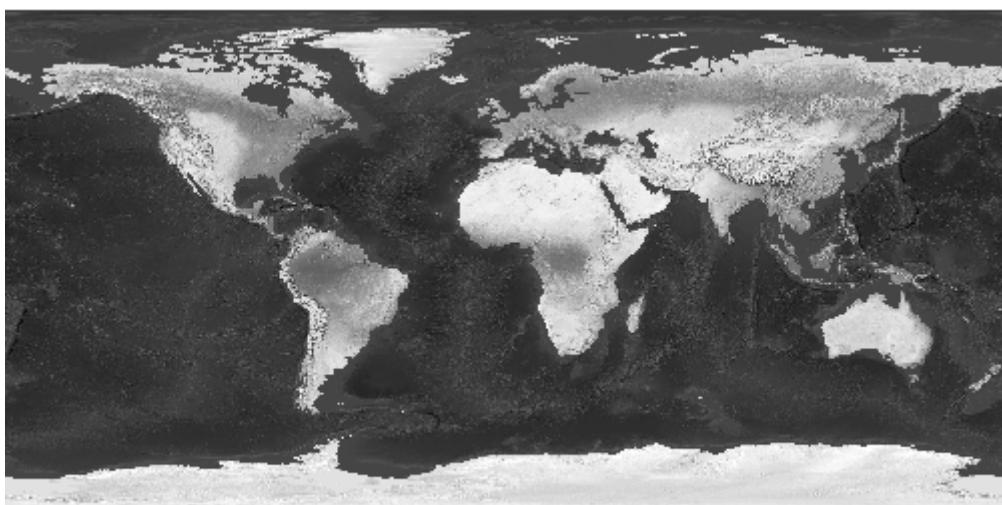


WorldImage

Read

Read a WorldImage Raster from a File

```
File file = new File("src/main/resources/earth.png")
WorldImage worldImage = new WorldImage(file)
Raster raster = worldImage.read("earth")
```

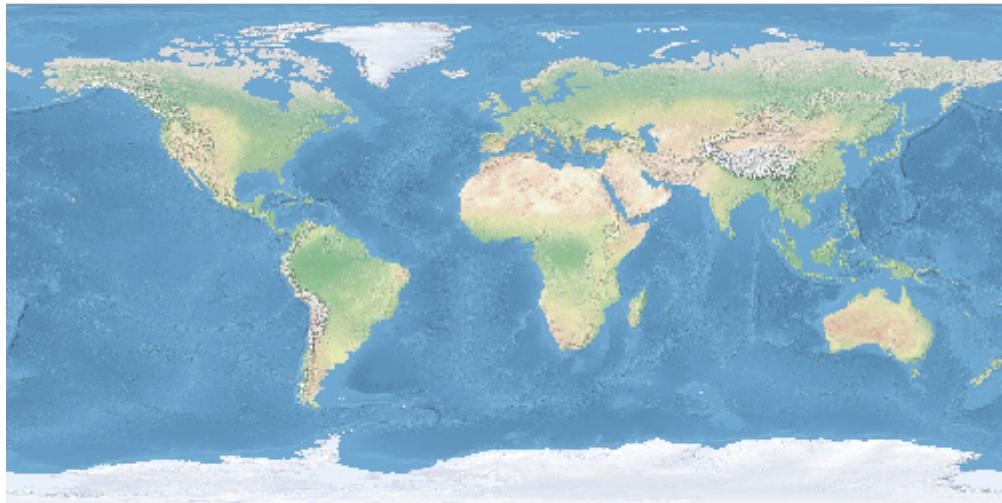

ArcGrid

Read

Read an ArcGrid Raster from a File

```
File file = new File("src/main/resources/raster.asc")
ArcGrid arcGrid = new ArcGrid(file)
Raster raster = arcGrid.read("raster")
```

Read a Grass ArcGrid Raster from a File

```
File file = new File("src/main/resources/grass.arx")
ArcGrid arcGrid = new ArcGrid(file)
Raster raster = arcGrid.read("grass")
```

NetCDF

Read

Read a NetCDF Raster from a File

```
File file = new File("src/main/resources/03-N02.nc")
NetCDF netCDF = new NetCDF(file)
Raster raster = netCDF.read("N02")
```

MrSID

Read

Read a MrSID Raster from a File

```
File file = new File("src/main/resources/ortho.sid")
MrSID mrsid = new MrSID(file)
Raster raster = mrsid.read("ortho")
```


Raster Recipes

The Raster classes are in the [geoscript.layer](#) package.

Raster Properties

Read a Raster from a File

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
```

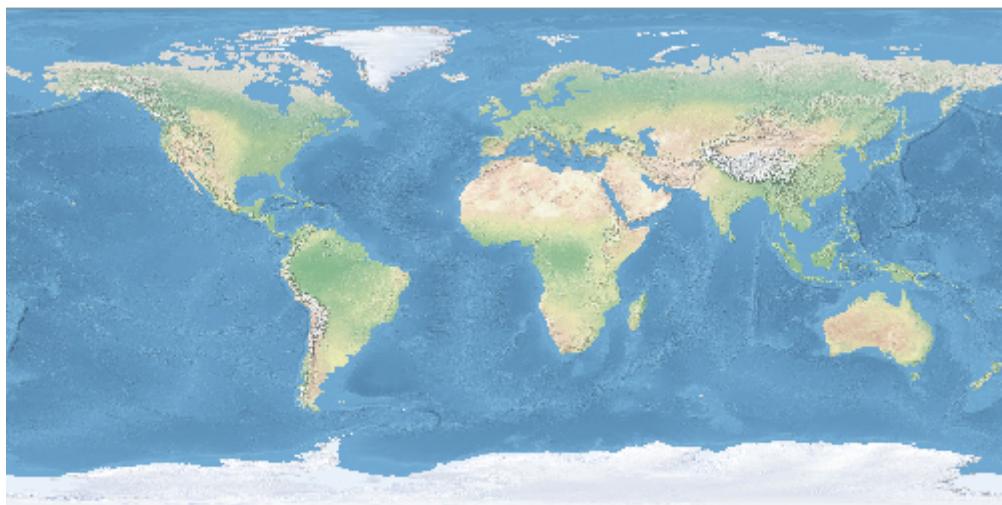

Get the Raster's Bounds.

```
Bounds bounds = raster.bounds  
println "Bounds: ${bounds}"
```

```
Bounds: (-179.9999999999997,-89.9999999998205,179.9999999996405,90.0,EP SG:4326)
```

Get the Raster's Projection.

```
Projection projection = raster.proj  
println "Projection: ${projection}"
```

```
Projection: EPSG:4326
```

Get the Raster's Size.

```
List size = raster.size  
println "Size: ${size[0]}x${size[1]}"
```

```
Size: 800x400
```

Get the Raster's number of columns and rows.

```
int cols = raster.cols  
int rows = raster.rows  
println "Columns: ${cols} Rows: ${rows}"
```

```
Columns: 800 Rows: 400
```

Get the Raster's Bands.

```
List<Band> bands = raster.bands  
println "Bands:"  
bands.each { Band band ->  
    println " ${band}"  
}
```

```
Band:  
  RED_BAND  
  GREEN_BAND  
  BLUE_BAND
```

Get the Raster's block size.

```
List blockSize = raster.blockSize  
println "Block size: ${blockSize[0]}x${blockSize[1]}"
```

```
Block size: 800x8
```

Get the Raster's pixel size.

```
List pixelSize = raster.pixelSize  
println "Pixel size: ${pixelSize[0]}x${pixelSize[1]}"
```

```
Pixel size: 0.4499999999995505x0.449999999999551
```

Get more information about a Raster's Bounds.

```
File file = new File("src/main/resources/earth.tif")  
Format format = Format.getFormat(file)  
Raster raster = format.read("earth")  
List<Band> bands = raster.bands  
bands.each { Band band ->  
    println "${band}"  
    println " Min = ${band.min}"  
    println " Max = ${band.max}"  
    println " No Data = ${band.noData}"  
    println " Is No Data = ${band.isNoData(12.45)}"  
    println " Unit = ${band.unit}"  
    println " Scale = ${band.scale}"  
    println " Offset = ${band.offset}"  
    println " Type = ${band.type}"  
}
```

```
RED_BAND
Min = 0.0
Max = 255.0
No Data = [0.0]
Is No Data = false
Unit = null
Scale = 1.0
Offset = 0.0
Type = byte
```

```
GREEN_BAND
Min = 0.0
Max = 255.0
No Data = [0.0]
Is No Data = false
Unit = null
Scale = 1.0
Offset = 0.0
Type = byte
```

```
BLUE_BAND
Min = 0.0
Max = 255.0
No Data = [0.0]
Is No Data = false
Unit = null
Scale = 1.0
Offset = 0.0
Type = byte
```

Get the minimum and maximum values from a Raster for a band

```
double minValue = raster.getMinValue(0)
double maxValue = raster.getMaxValue(0)
println "Min values: ${minValue} Max values: ${maxValue}"
```

```
Min values: 56.0 Max values: 255.0
```

Get the minimum and maximum values from a Raster for each band

```
Map extrema = raster.extrema
println "Min values: ${extrema.min} Max values: ${extrema.max}"
```

```
Min value: [56.0, 84.0, 91.0] Max value: [255.0, 255.0, 255.0]
```

Get a Point at the given pixel location.

```
Point point = raster.getPoint(7,9)
println "Geographic location at pixel 7,9 is ${point}"
```

```
Geographic location at pixel 7,9 is POINT (-176.625 85.7249984741211)
```

Get a Pixel location at the given Point.

```
List pixel = raster.getPixel(new Point(-176.625, 85.72499))
println "Pixel coordinates at POINT (-176.625 85.7249984741211) is ${pixel[0]}, ${pixel[1]}"
```

```
Pixel coordinates at POINT (-176.625 85.7249984741211) is 7.0, 9.0
```

Determine whether the Raster covers the given Point.

```
boolean containsPoint = raster.contains(new Point(-180, -90))
println "Does raster cover point? ${containsPoint}"
```

```
Does raster cover point? true
```


Determine whether the Raster covers the given Pixel.

```
boolean containsPixel = raster.contains(500,600)
println "Does raster cover pixel? ${containsPixel}"
```

```
Does raster cover pixel? false
```

Get a RenderedImage from the Raster

```
RenderedImage image = raster.image
```

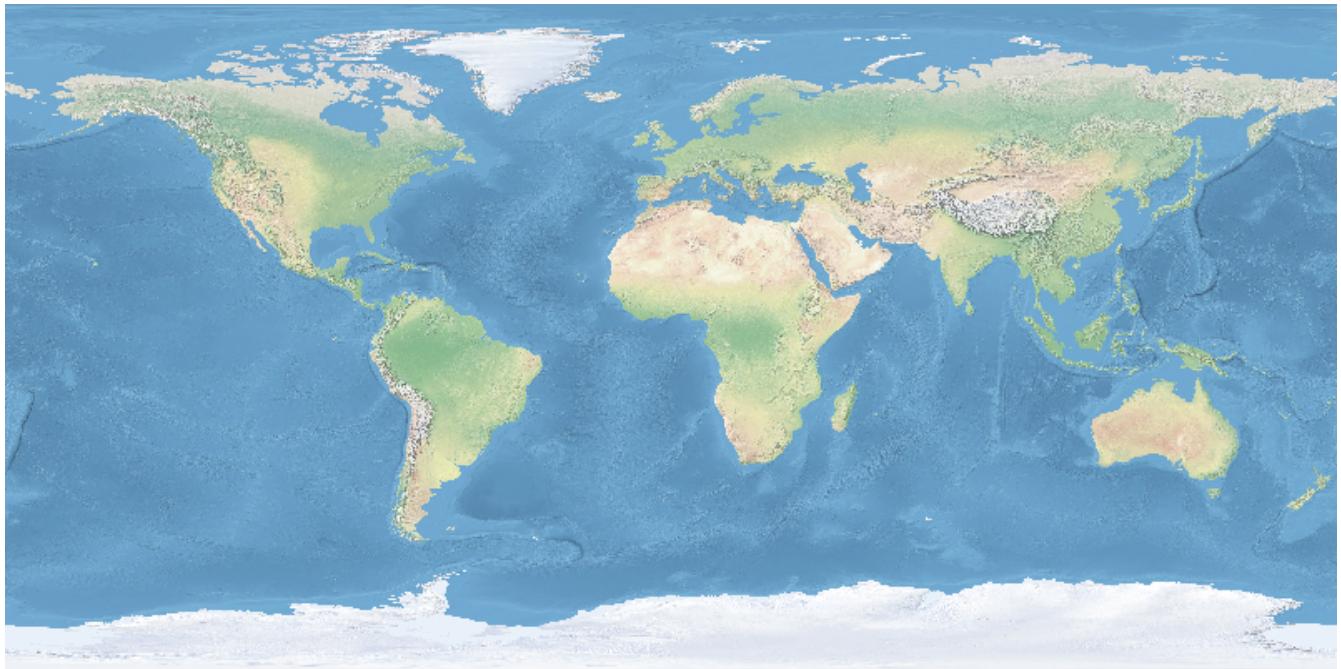

Dispose of the Raster when you are done

```
raster.dispose()
```

Raster Bands

Create a Band

```
Band band = new Band(  
    "red", ①  
    0,      ②  
    255    ③  
)  
println "Band = ${band.toString()} Min = ${band.min} Max = ${band.max}"
```

① Description

② Minimum value

③ Maximum value

```
Band = red Min = 0.0 Max = 255.0
```

Create a Band with a no data value

```

Band band = new Band(
    "red", ①
    0,      ②
    255,    ③
    255    ④
)
println "Band = ${band.toString()} Min = ${band.min} Max = ${band.max} No Data =
${band.noData[0]}"

```

- ① Description
- ② Minimum value
- ③ Maximum value
- ④ No data value

```
Band = red Min = 0.0 Max = 255.0 No Data = 255.0
```


Create a new Raster from Bands and set values to a random color.

```

Raster raster = new Raster(
    new Bounds(-180,-90,180,90,"EPSG:4326"),
    400,300,
    [
        new Band("red", 0, 255, 256),
        new Band("green", 0, 255, 256),
        new Band("blue", 0, 255, 256)
    ]
)

// Set values of each pixel
raster.eachCell { double value, double x, double y ->
    Color color = Color.randomPastel
    raster.setValue([x,y], color.rgb[0], 0)
    raster.setValue([x,y], color.rgb[1], 1)
    raster.setValue([x,y], color.rgb[2], 2)
}


```

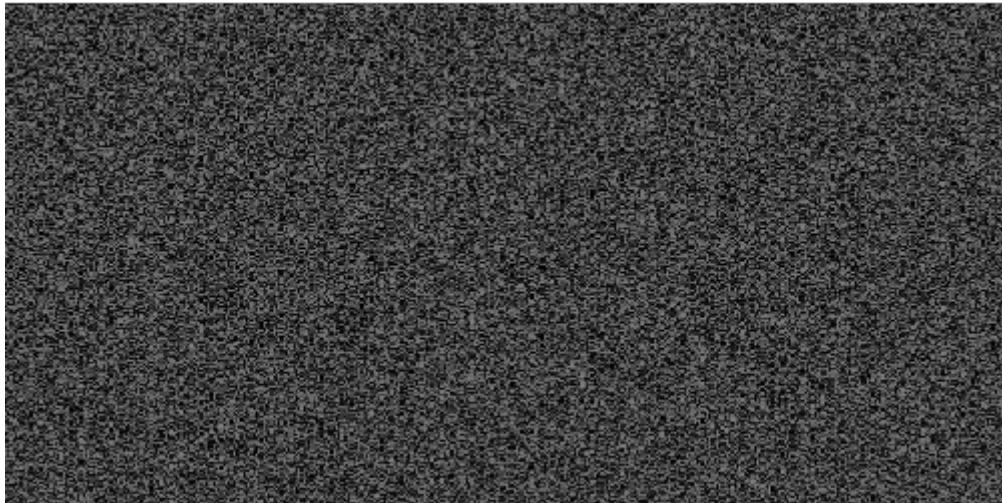

Raster Values

Get values from a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
```

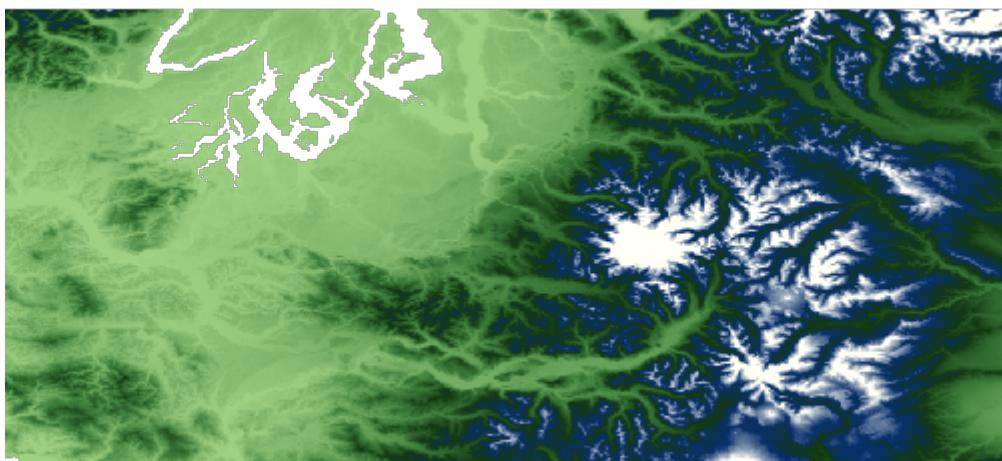

Get values from a Raster with a Point.

```
double elevation = raster.getValue(new Point(-121.799927, 46.867703))
println elevation
```

```
3069.0
```

Get values from a Raster with a Pixel Location.

```
List pixel = [100,200]
elevation = raster.getValue(pixel)
println elevation
```

```
288.0
```

Get neighboring values from a Raster with a Point Location.

```
Map neighborsOfPoint = raster.getNeighbors(new Point(-176.625, 85.72499), 0)
println "Values neighboring POINT (-176.625 85.7249984741211) = ${neighborsOfPoint}"
```

```
Values neighboring POINT (-176.625 85.7249984741211) = [nw:103.0, n:104.0, ne:109.0,
e:109.0, se:111.0, s:110.0, sw:110.0, w:108.0]
```

Get neighboring values from a Raster with a Pixel Location.

```
Map neighborsOfPixel = raster.getNeighbors([7,9], 0)
println "Values neighboring pixel 7,9 = ${neighborsOfPixel}"
```

```
Values neighboring pixel 7,9 = [nw:103.0, n:104.0, ne:109.0, e:109.0, se:111.0,
s:110.0, sw:110.0, w:108.0]
```

Get values from a Raster for a range of pixels in a list of lists.

```
int x = 10
int y = 8
int w = 5
int h = 6
int band = 0
List values = raster.getValues(x, y, w, h, band, false)
println values
```

```
[[1032, 1186, 1340, 1435, 1301], [1143, 1143, 1193, 1224, 1313], [942, 938, 966, 982,
1129], [746, 835, 912, 949, 1028], [723, 948, 1130, 1244, 1211], [673, 890, 1100,
1133, 1024]]
```

Get values from a Raster for a range of pixels in a flat list.

```
List flatValues = raster.getValues(x, y, w, h, band, true)
println flatValues
```

```
[1032, 1186, 1340, 1435, 1301, 1143, 1143, 1193, 1224, 1313, 942, 938, 966, 982, 1129,
746, 835, 912, 949, 1028, 723, 948, 1130, 1244, 1211, 673, 890, 1100, 1133, 1024]
```

Get values from a Raster for a range of pixels as a pretty printed string.

```
String valuesAsString = raster.getValuesAsString(x, y, w, h, band, prettyPrint: true)
println valuesAsString
```

```
-----
| 1032.00 | 1186.00 | 1340.00 | 1435.00 | 1301.00 |
-----
| 1143.00 | 1143.00 | 1193.00 | 1224.00 | 1313.00 |
-----
| 942.00 | 938.00 | 966.00 | 982.00 | 1129.00 |
-----
| 746.00 | 835.00 | 912.00 | 949.00 | 1028.00 |
-----
| 723.00 | 948.00 | 1130.00 | 1244.00 | 1211.00 |
-----
| 673.00 | 890.00 | 1100.00 | 1133.00 | 1024.00 |
-----
```

Iterate over the cells in a Raster.

```
raster.eachCell(bounds: [0,0,5,5]) { double value, double pixelX, double pixelY ->
    println "${pixelX},${pixelY} = ${value}"
}
```

```
0.0,0.0 = 1061.0
1.0,0.0 = 996.0
2.0,0.0 = 945.0
3.0,0.0 = 960.0
4.0,0.0 = 904.0
0.0,1.0 = 1167.0
1.0,1.0 = 1149.0
2.0,1.0 = 1085.0
3.0,1.0 = 966.0
4.0,1.0 = 862.0
0.0,2.0 = 1112.0
1.0,2.0 = 998.0
2.0,2.0 = 882.0
3.0,2.0 = 775.0
4.0,2.0 = 700.0
0.0,3.0 = 990.0
1.0,3.0 = 850.0
2.0,3.0 = 715.0
3.0,3.0 = 638.0
4.0,3.0 = 654.0
0.0,4.0 = 833.0
1.0,4.0 = 706.0
2.0,4.0 = 611.0
3.0,4.0 = 681.0
4.0,4.0 = 841.0
```

Iterate over a window of cells in a Raster.

```
raster.eachWindow (bounds: [0,0,8,8], window: [2,2]) { Number[][] windowsValues,
  double pixelX, double pixelY ->
  println "${pixelX}, ${pixelY} = ${windowsValues}"
}
```

```
0.0,0.0 = [[1061, 996], [1167, 1149]]
1.0,0.0 = [[996, 945], [1149, 1085]]
2.0,0.0 = [[945, 960], [1085, 966]]
3.0,0.0 = [[960, 904], [966, 862]]
4.0,0.0 = [[904, 727], [862, 696]]
5.0,0.0 = [[727, 744], [696, 748]]
6.0,0.0 = [[744, 934], [748, 900]]
7.0,0.0 = [[934, 1099], [900, 1042]]
0.0,1.0 = [[1167, 1149], [1112, 998]]
1.0,1.0 = [[1149, 1085], [998, 882]]
2.0,1.0 = [[1085, 966], [882, 775]]
3.0,1.0 = [[966, 862], [775, 700]]
4.0,1.0 = [[862, 696], [700, 661]]
5.0,1.0 = [[696, 748], [661, 818]]
6.0,1.0 = [[748, 900], [818, 995]]
```

```

7.0,1.0 = [[900, 1042], [995, 1125]]
0.0,2.0 = [[1112, 998], [990, 850]]
1.0,2.0 = [[998, 882], [850, 715]]
2.0,2.0 = [[882, 775], [715, 638]]
3.0,2.0 = [[775, 700], [638, 654]]
4.0,2.0 = [[700, 661], [654, 826]]
5.0,2.0 = [[661, 818], [826, 945]]
6.0,2.0 = [[818, 995], [945, 922]]
7.0,2.0 = [[995, 1125], [922, 1078]]
0.0,3.0 = [[990, 850], [833, 706]]
1.0,3.0 = [[850, 715], [706, 611]]
2.0,3.0 = [[715, 638], [611, 681]]
3.0,3.0 = [[638, 654], [681, 841]]
4.0,3.0 = [[654, 826], [841, 949]]
5.0,3.0 = [[826, 945], [949, 1084]]
6.0,3.0 = [[945, 922], [1084, 1054]]
7.0,3.0 = [[922, 1078], [1054, 1093]]
0.0,4.0 = [[833, 706], [652, 618]]
1.0,4.0 = [[706, 611], [618, 548]]
2.0,4.0 = [[611, 681], [548, 631]]
3.0,4.0 = [[681, 841], [631, 694]]
4.0,4.0 = [[841, 949], [694, 877]]
5.0,4.0 = [[949, 1084], [877, 1018]]
6.0,4.0 = [[1084, 1054], [1018, 1142]]
7.0,4.0 = [[1054, 1093], [1142, 1172]]
0.0,5.0 = [[652, 618], [631, 579]]
1.0,5.0 = [[618, 548], [579, 506]]
2.0,5.0 = [[548, 631], [506, 483]]
3.0,5.0 = [[631, 694], [483, 556]]
4.0,5.0 = [[694, 877], [556, 686]]
5.0,5.0 = [[877, 1018], [686, 825]]
6.0,5.0 = [[1018, 1142], [825, 1004]]
7.0,5.0 = [[1142, 1172], [1004, 1053]]
0.0,6.0 = [[631, 579], [772, 766]]
1.0,6.0 = [[579, 506], [766, 627]]
2.0,6.0 = [[506, 483], [627, 529]]
3.0,6.0 = [[483, 556], [529, 473]]
4.0,6.0 = [[556, 686], [473, 556]]
5.0,6.0 = [[686, 825], [556, 669]]
6.0,6.0 = [[825, 1004], [669, 810]]
7.0,6.0 = [[1004, 1053], [810, 917]]
0.0,7.0 = [[772, 766], [900, 880]]
1.0,7.0 = [[766, 627], [880, 778]]
2.0,7.0 = [[627, 529], [778, 671]]
3.0,7.0 = [[529, 473], [671, 540]]
4.0,7.0 = [[473, 556], [540, 483]]
5.0,7.0 = [[556, 669], [483, 536]]
6.0,7.0 = [[669, 810], [536, 641]]

```

Set values on a Raster

```

File file = new File("src/main/resources/earth.tif")
GeoTIFF geotiff = new GeoTIFF(file)
Raster raster = geotiff.read("earth")

File arcGridFile = new File("target/earth.asc")
ArcGrid arcGrid = new ArcGrid(arcGridFile)
arcGrid.write(raster)
Raster arcGridRaster = arcGrid.read("earth")


arcGridRaster.eachCell {double value, double x, double y ->
    double newValue = value + 100
    arcGridRaster.setValue([x as int, y as int], newValue)
}


File arcGridAddFile = new File("target/earth_100.asc")
ArcGrid arcGridAdd = new ArcGrid(arcGridAddFile)
arcGridAdd.write(arcGridRaster)
Raster arcGridRasterAdd = arcGridAdd.read("earth_100")

List pixels = [
    [92, 298],
    [393.0, 343.0],
    [795.0, 399.0]
]
pixels.each { List pixel ->
    println "Original: ${raster.getValue(pixel)} New: ${arcGridRasterAdd.getValue(pixel)}"
}

```

Original: 97.0 New: 197.0
 Original: 96.0 New: 196.0
 Original: 237.0 New: 337.0

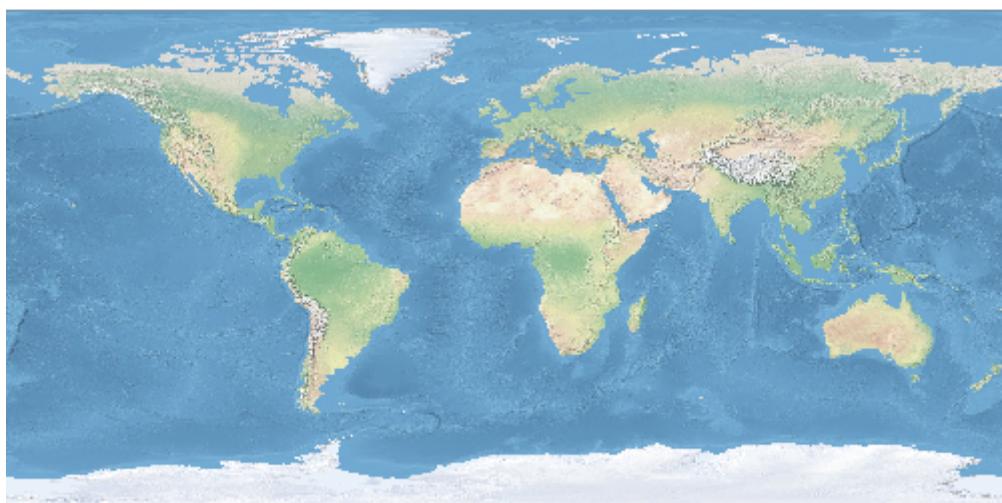

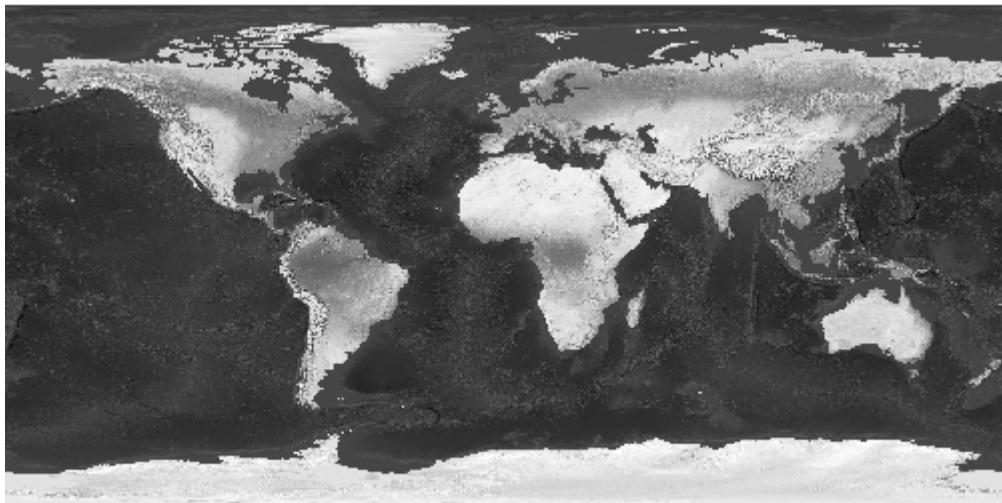

Raster Processing

Crop

Crop a Raster with a Bounds


```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
Raster croppedRaster = raster.crop(new Bounds(-160.927734, 6.751896, -34.716797
, 57.279043, "EPSG:4326"))
```



Project

Reproject a Raster to another Projection

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
Projection projection = new Projection("EPSG:3857")
Raster projectedRaster = raster.crop(projection.geoBounds).reproject(projection)
```

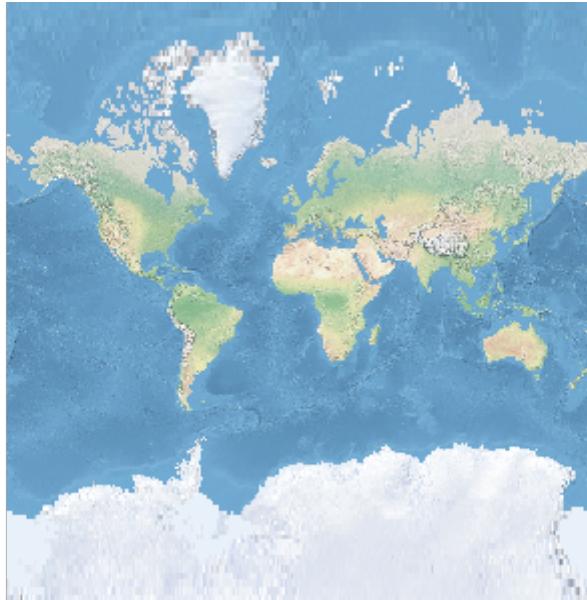


Transform

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
```


Scale a Raster

```
Raster scaledRaster = raster.transform(scalex: 10, scaley: 10)
```

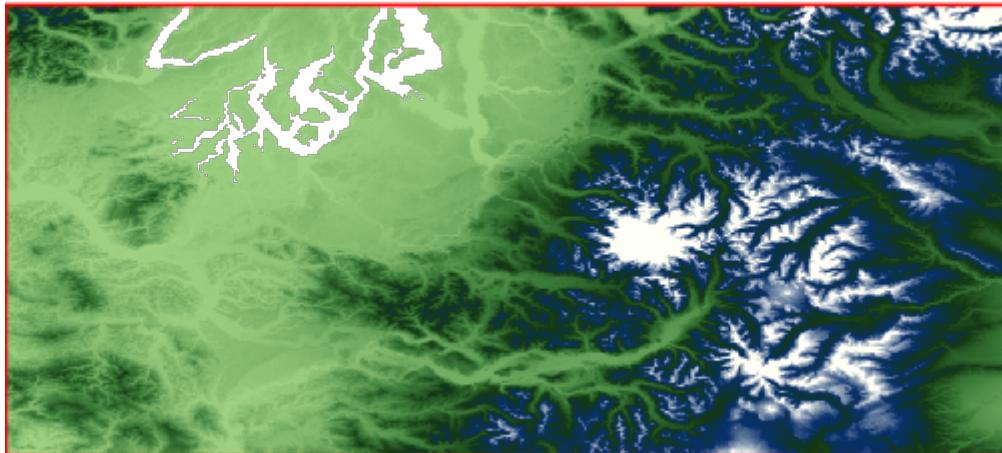


Shear a Raster

```
Raster shearedRaster = raster.transform(shearx: 10, sheary: 10)
```

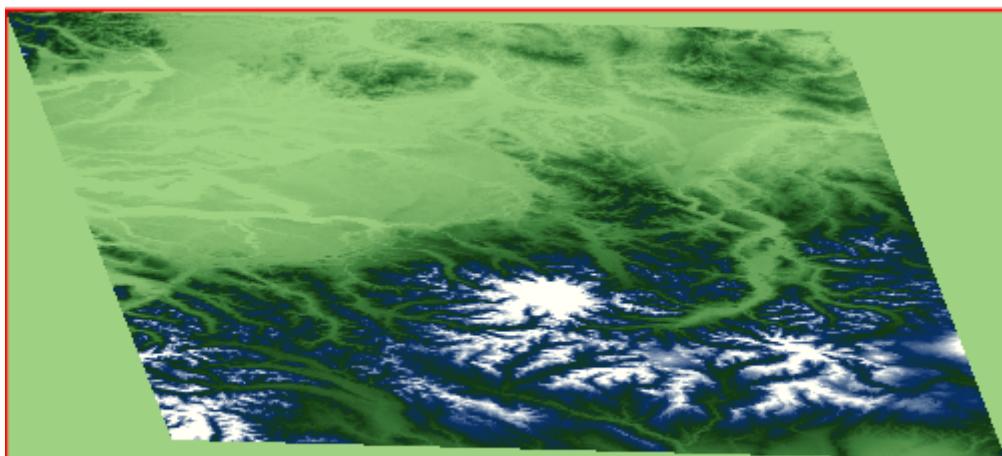


Translate a Raster

```
Raster translatedRaster = raster.transform(translatex: 10.1, translatey: 12.6)
```

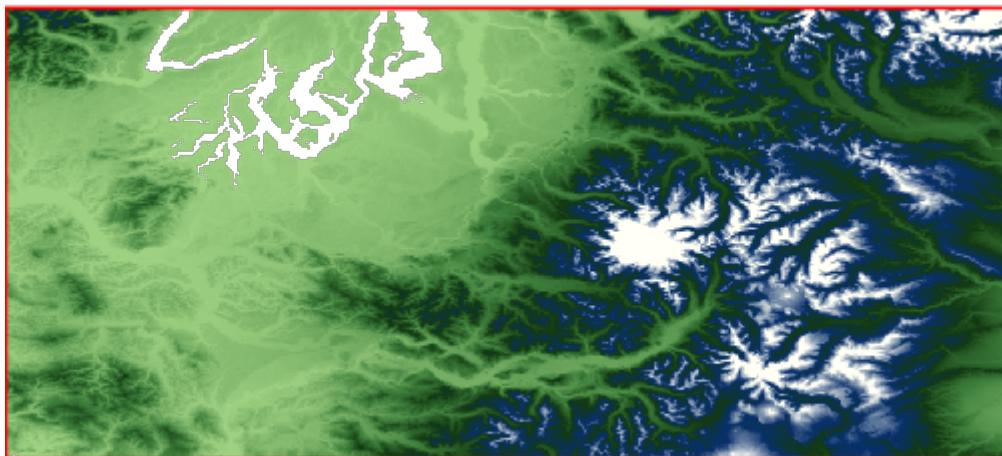

Transform a Raster with a combination of parameters

```
Raster transformedRaster = raster.transform(  
    scalex: 1.1, scaley: 2.1,  
    shearx: 0.4, sheary: 0.3,  
    translatex: 10.1, translatey: 12.6,  
    nodata: [-255],  
    interpolation: "NEAREST"  
)
```

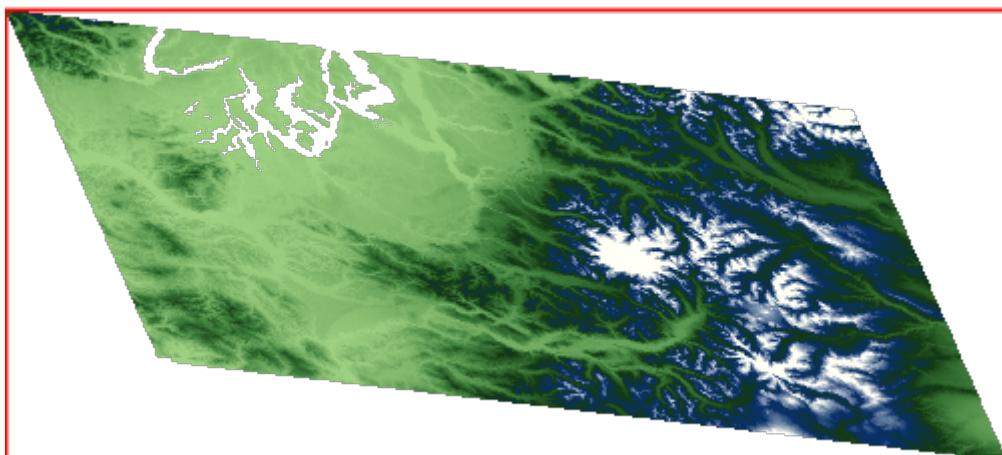

Select Bands

Extract a band from a Raster to create a new Raster

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")

Raster band1 = raster.selectBands([0])
Raster band2 = raster.selectBands([1])
Raster band3 = raster.selectBands([2])
```

Band 1

[raster selectband r] | *raster_selectband_r.png*

Band 2

[raster selectband g] | *raster_selectband_g.png*

Band 3

[raster selectband b] | *raster_selectband_b.png*


Merge

Merge a List of Rasters representing different bands together to create a single Raster

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")

Raster band1 = raster.selectBands([0])
Raster band2 = raster.selectBands([1])
Raster band3 = raster.selectBands([2])

Raster mergedRaster = Raster.merge([band1,band2,band3], transform: "FIRST")
```

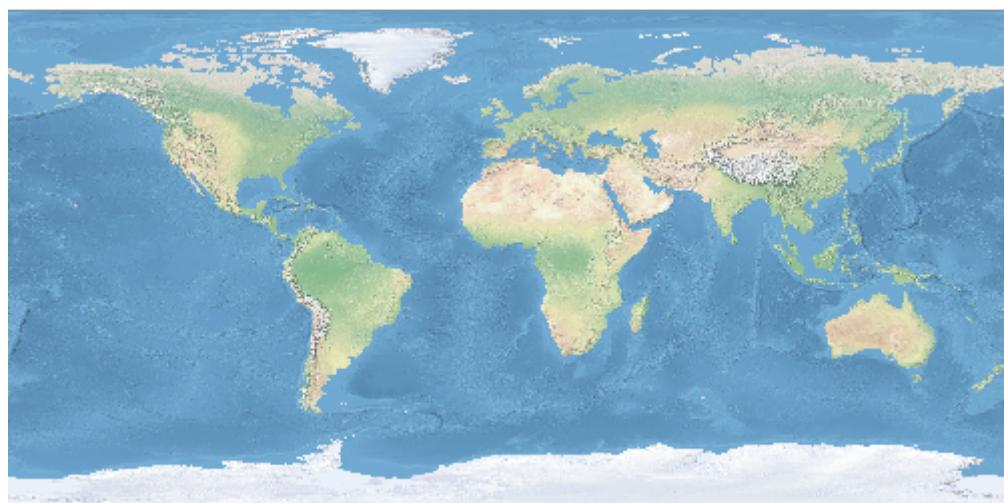



Mosaic

Mosaic a List of Rasters together to create a single Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")

Bounds bounds = raster.bounds
List<Raster> rasters = bounds.tile(0.5).collect { Bounds b ->
    raster.crop(b)
}


Raster mosaicedRaster = Raster.mosaic(rasters)
```

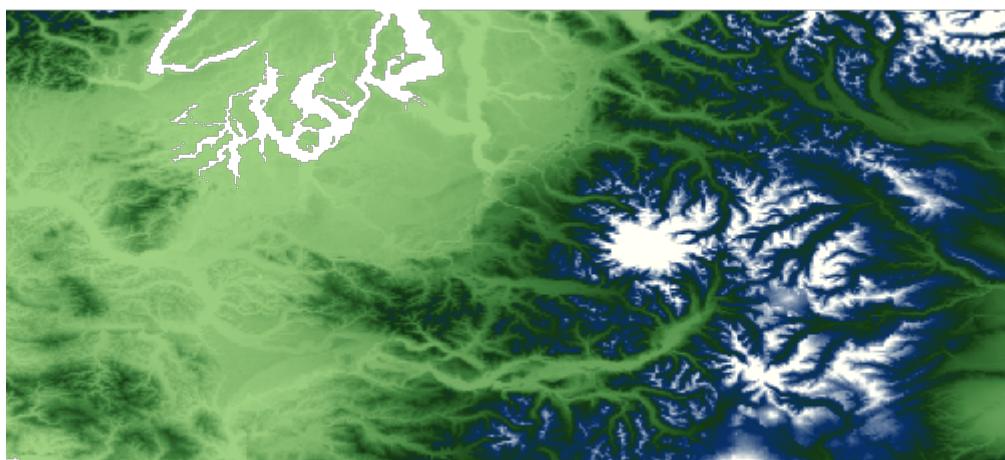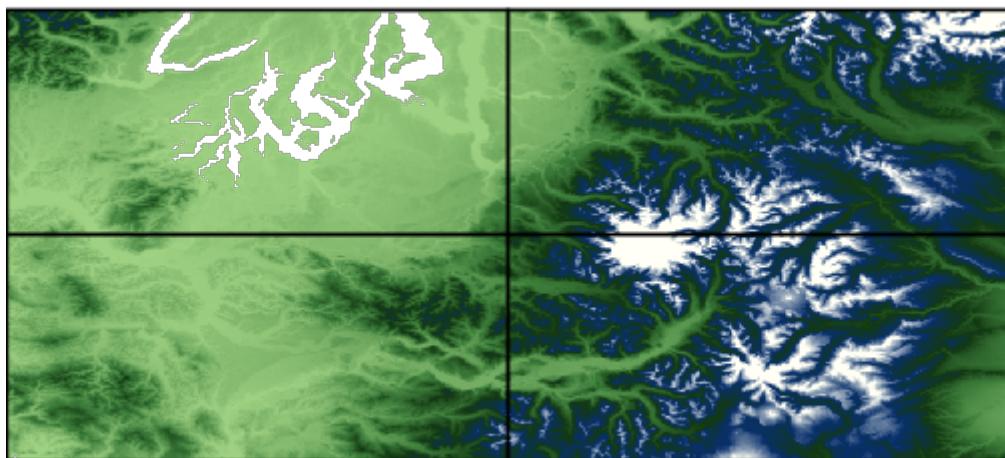

Contours

Create vector contours from a Raster


```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
int band = 0
int interval = 300
boolean simplify = true
boolean smooth = true
Layer contours = raster.contours(band, interval, simplify, smooth)
```

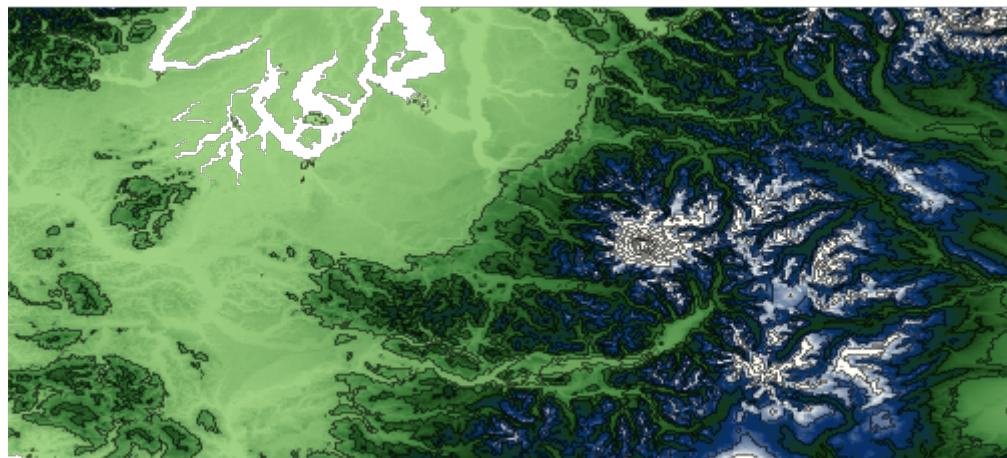

Stylize

Stylize a Raster by baking in a style to create a new Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster stylizedRaster = raster.stylize(new ColorMap([
    [color: "#9fd182", quantity:25],
    [color: "#3e7f3c", quantity:470],
    [color: "#133912", quantity:920],
    [color: "#08306b", quantity:1370],
    [color: "#fffff5", quantity:1820],
]))
```

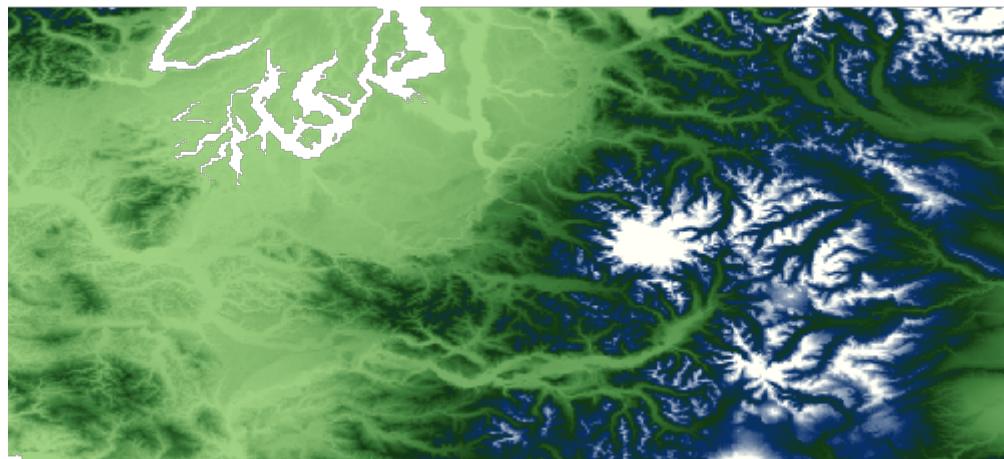

Shaded Relief


Create a shaded relief Raster from another Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster shadedReliefRaster = raster.createShadedRelief(
    1.0, ①
    25, ②
    260 ③
)
```

① scale

② altitude


③ azimuth

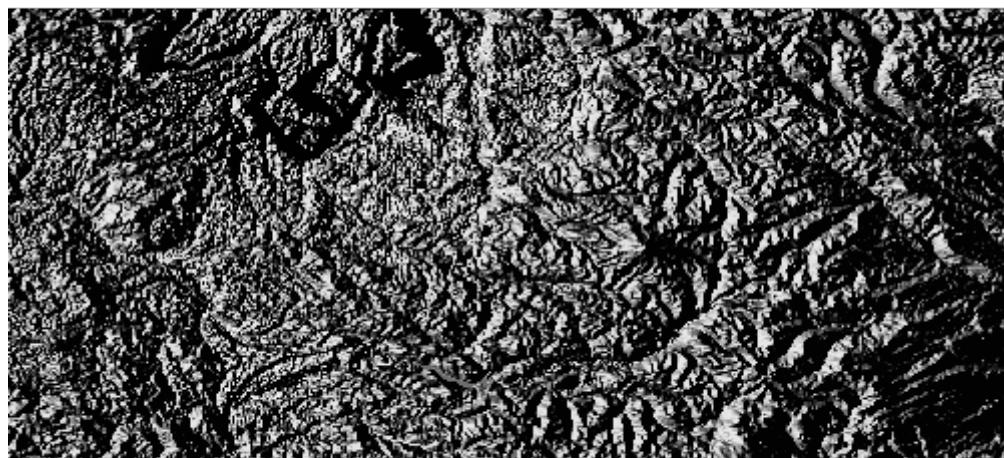

Reclassify

Reclassify a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster reclassifiedRaster = raster.reclassify([
    [min:0,    max:0,    value: 1],
    [min:0,    max:50,   value: 2],
    [min:50,   max:200,  value: 3],
    [min:200,  max:1000, value: 4],
    [min:1000, max:1500, value: 5],
    [min:1500, max:4000, value: 6]
])
```

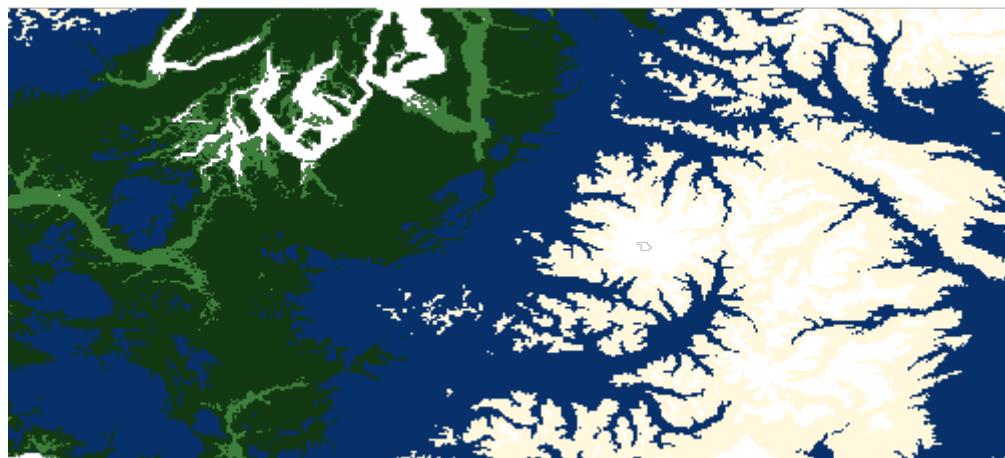


Scale

Scale a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println "Original Raster Size = ${raster.size[0]}x${raster.size[1]}"

Raster scaledRaster = raster.scale(0.5, 0.5)
println "Scaled Raster Size = ${scaledRaster.size[0]}x${scaledRaster.size[1]}"
```

```
Original Raster Size = 800x400
Scaled Raster Size = 400x200
```

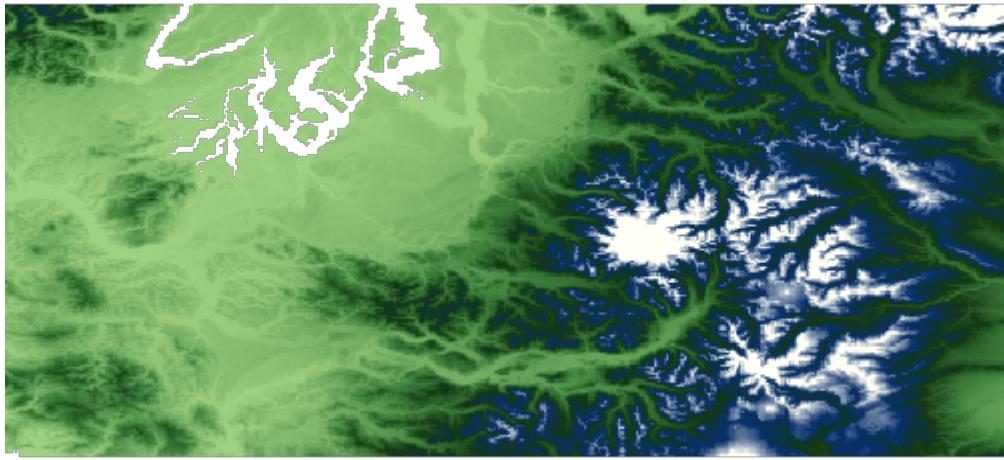


Resample

Resample a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println "Original Raster Bounds = ${raster.bounds}"
println "Original Raster Size = ${raster.size[0]}x${raster.size[1]}"

Raster resampledRaster = raster.resample(size: [400, 400], bbox: raster.bounds.scale(-2))
println "Resampled Raster Bounds = ${resampledRaster.bounds}"
println "Resampled Raster Size =
${resampledRaster.size[0]}x${resampledRaster.size[1]}"
```

```
Original Raster Bounds = (-123.55291606131708,46.25375026634816,-
120.73958272798374,47.522916933014834,EPGS:4326)
Original Raster Size = 800x400
Resampled Raster Bounds = (-124.95958272798374,45.619166933014824,-
119.33291606131708,48.157500266348165,EPGS:4326)
Resampled Raster Size = 400x400
```

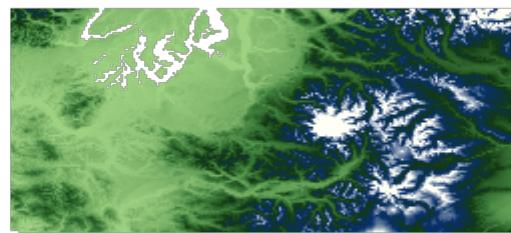


Normalize

Normalize a Raster by diving all values by the maximum value.

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println "Original Raster Min Max values = ${raster.extrema.min[0]} - 
${raster.extrema.max[0]}"

Raster normalizedRaster = raster.normalize()
println "Normalized Raster Min Max values = ${normalizedRaster.extrema.min[0]} - 
${normalizedRaster.extrema.max[0]}"
```

```
Original Raster Min Max values = -23.0 - 4370.0
Normalized Raster Min Max values = -0.005263158120214939 - 1.0
```

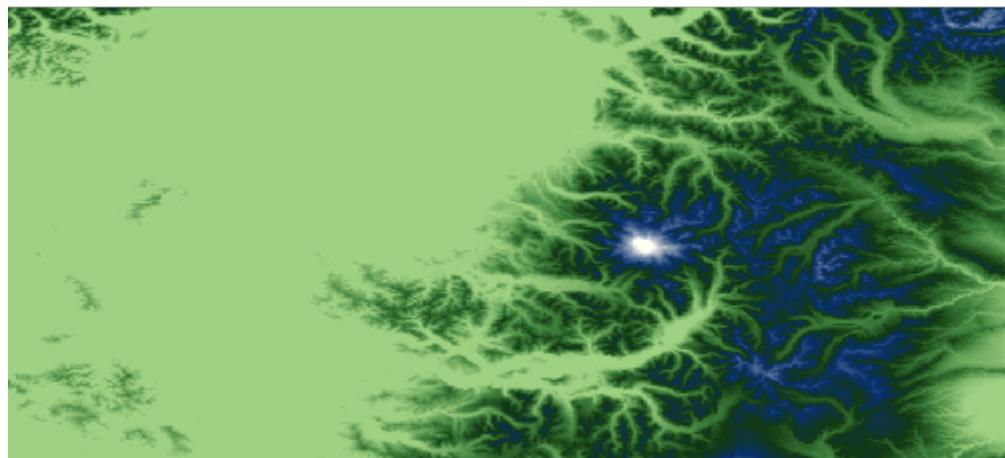


Convolve

Convolve a Raster with a radius.

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println "Original Raster Min Max values = ${raster.extrema.min[0]} -
${raster.extrema.max[0]}"

Raster convolvedRaster = raster.convolve(2)
println "Convolved Raster Min Max values = ${convolvedRaster.extrema.min[0]} -
${convolvedRaster.extrema.max[0]}"
```

```
Original Raster Min Max values = -23.0 - 4370.0
Convolved Raster Min Max values = -32767.0 - 32767.0
```

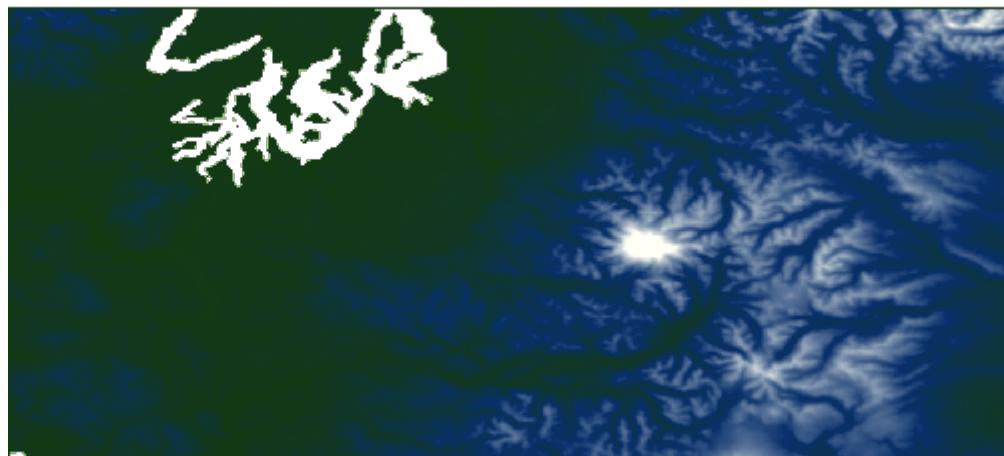


Convolve a Raster with a width and height.

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println "Original Raster Min Max values = ${raster.extrema.min[0]} -
${raster.extrema.max[0]}"

Raster convolvedRaster = raster.convolve(1,2)
println "Convolved Raster Min Max values = ${convolvedRaster.extrema.min[0]} -
${convolvedRaster.extrema.max[0]}"
```

```
Original Raster Min Max values = -23.0 - 4370.0
Convolved Raster Min Max values = -32767.0 - 8675.0
```

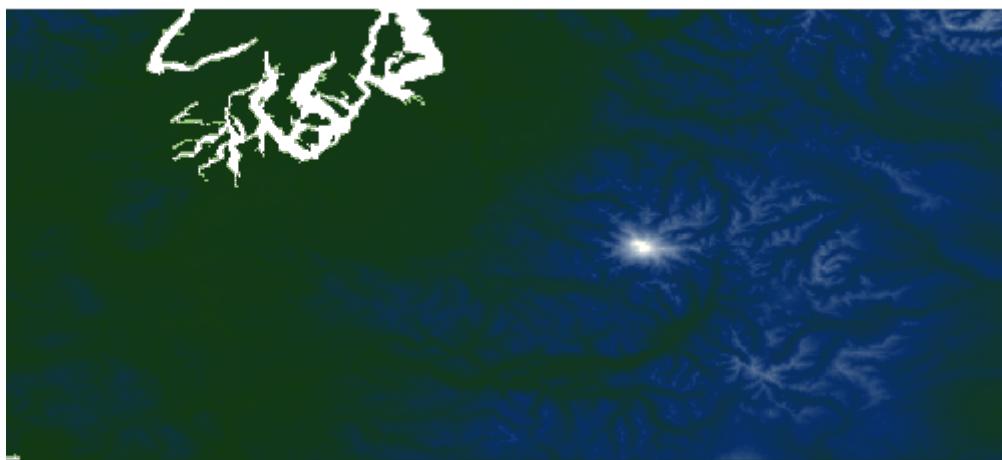

Invert

Invert the values of a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster invertedRaster = raster.invert()
```

Exponent

Calculate the exponent of the values of a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster expRaster = raster.exp()
```




Absolute

Calculate the absolute value of the values of a Raster

```
File file = new File("src/main/resources/absolute.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("absolute")
Raster absolute = raster.absolute()
```

-7.0	3.0	-6.0	3.0
	8.0		1.0
-1.0		-2.0	9.0
-3.0	3.0	-5.0	2.0

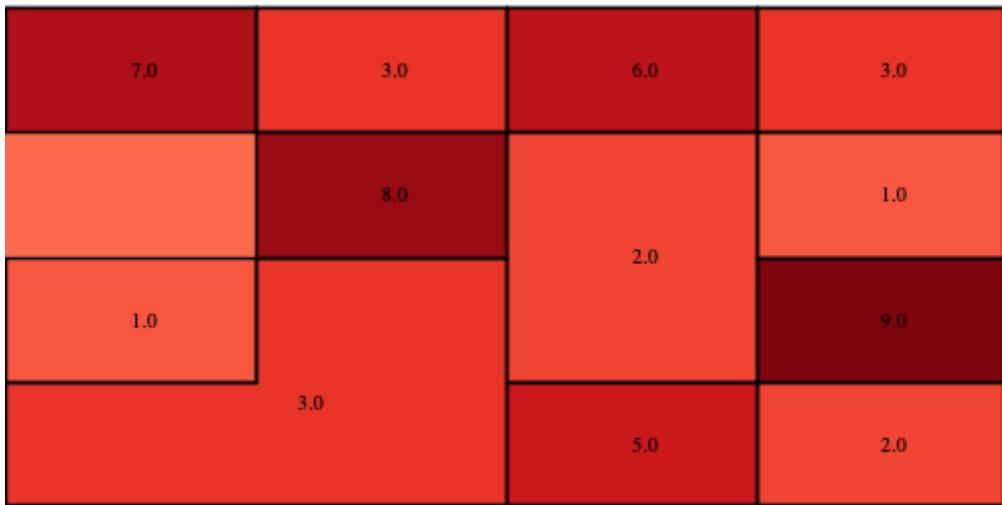

Log

Calculate the log of the values of a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster logRaster = raster.log()
```

Vectorize

Create a Polygon Layer from a Raster

```

File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster reclassifiedRaster = raster.reclassify([
    [min:0,    max:0,    value: 1],
    [min:0,    max:50,   value: 2],
    [min:50,   max:200,  value: 3],
    [min:200,  max:1000, value: 4],
    [min:1000, max:1500, value: 5],
    [min:1500, max:4000, value: 6]
])
Layer layer = reclassifiedRaster.polygonLayer

```



Create a Point Layer from a Raster

```


File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc").crop(new Bounds(-121.878548,46.808402,-121.636505
,46.896097, "EPSG:4326"))
Layer layer = raster.pointLayer

```



Extract a foot print from a Raster

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
Layer layer = raster.extractFootPrint()
```

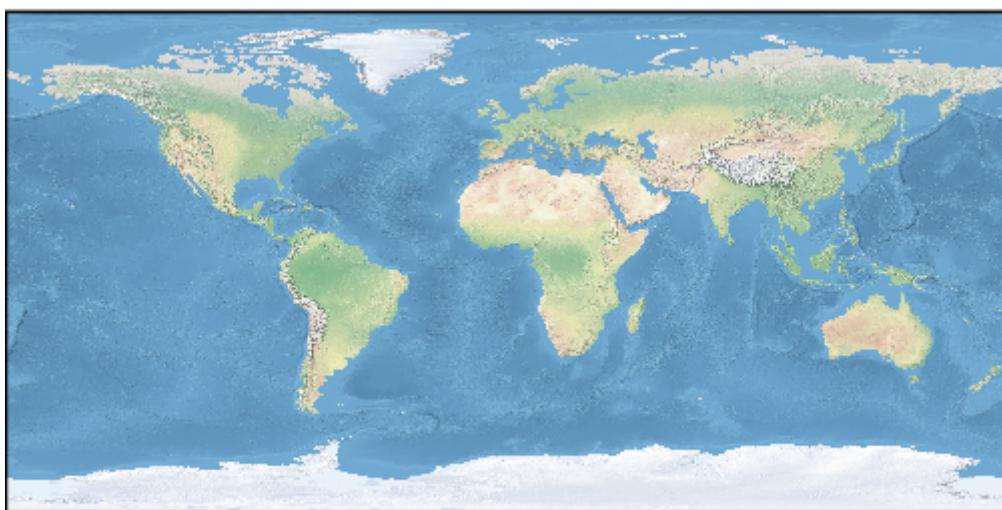

Calculate zonal statistics


```

File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")

Layer zones = new Memory().create("zones", [new Field("geom", "Geometry", "EPSG:4326")])
Bounds bounds = raster.bounds
bounds.tile(0.5).each{b -> zones.add([b.geometry])}

Layer stats = raster.zonalStatistics(0, zones)

```

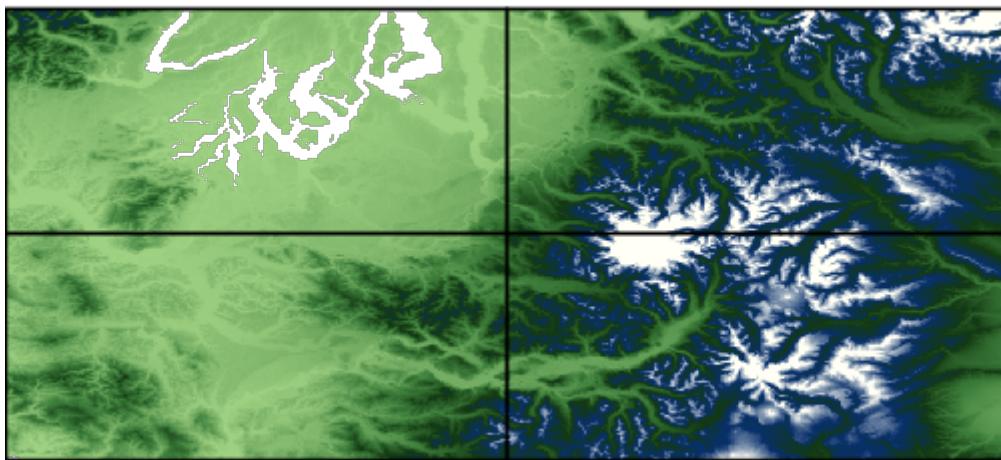

count	min	max	sum	avg	stddev
79950	-3.0	1718.0	2.6618944E7	332.944890556 59943	262.734593744 14483
80000	254.0	4370.0	9.2963902E7	1162.04877499 99913	439.084190796 6851
71728	-23.0	1755.0	1.1585759E7	161.523519406 64724	179.293892277 23505
80000	24.0	2728.0	7.9051464E7	988.143300000 0056	465.840718845 8327

Histogram

Get histogram of the Raster

```


File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")

Histogram histogram = raster.getHistogram()
println "# of bands = ${histogram.numberOfBands}"
println "# Counts = ${histogram.counts().size()}"
println "# Bins = ${histogram.bins().size()}"
println "Count 25 = ${histogram.count(25)}"
println "Bin 45 = ${histogram.bin(45)}"

Chart chart = Bar.xy(histogram.counts().withIndex().collect {int count, int index ->
    [index, count]})
```

```

# of bands = 3
# Counts = 256
# Bins = 256
Count 25 = 0
Bin 45 = [45.0, 46.0]
```

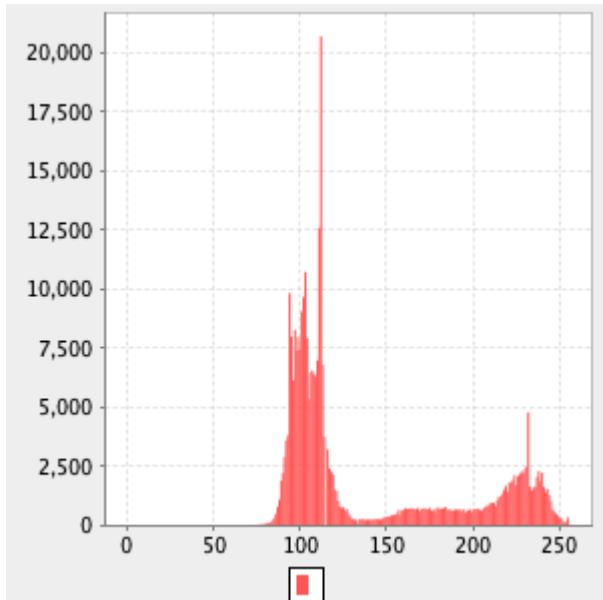

Raster Algebra

Add

Add a constant value to a Raster


```

File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927, 46.867703))
println elevation1

Raster higherRaster = raster.add(100.00)
double elevation2 = higherRaster.getValue(new Point(-121.799927, 46.867703))
println elevation2

```

3069.0
3169.0

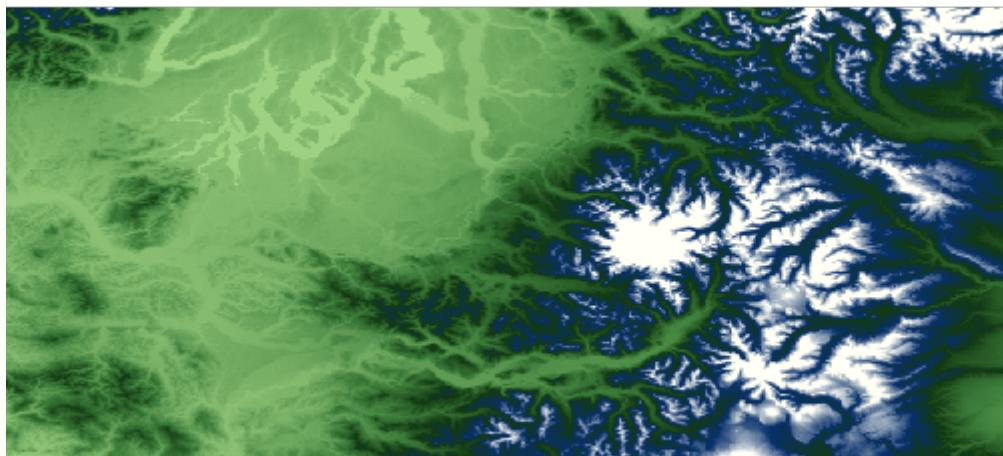

Add two Raster together

```

Raster lowRaster = Format.getFormat(new File("src/main/resources/low.tif")).read(
    "low")
Raster highRaster = Format.getFormat(new File("src/main/resources/high.tif")).read(
    "high")
Raster lowPlusHighRaster = lowRaster.add(highRaster)

```

Low

13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0
1.0	2.0	3.0	4.0

High

17.0	18.0	19.0	20.0
13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0

Low + High

30.0	32.0	34.0	36.0
22.0	24.0	26.0	28.0
14.0	16.0	18.0	20.0
6.0	8.0	10.0	12.0


Subtract

Subtract a constant value from a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927,46.867703))
println elevation1

Raster lowerRaster = raster.minus(50.00)
double elevation2 = lowerRaster.getValue(new Point(-121.799927,46.867703))
println elevation2
```

```
3069.0
3019.0
```

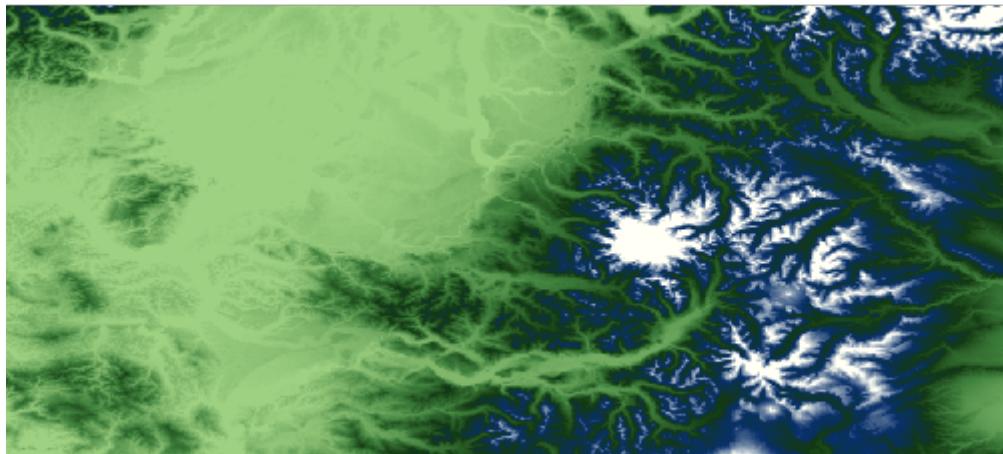


Subtract the Raster from a constant value

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927,46.867703))
println elevation1

Raster lowerRaster = raster.minusFrom(2000.0)
double elevation2 = lowerRaster.getValue(new Point(-121.799927,46.867703))
println elevation2
```

```
3069.0  
-1069.0
```

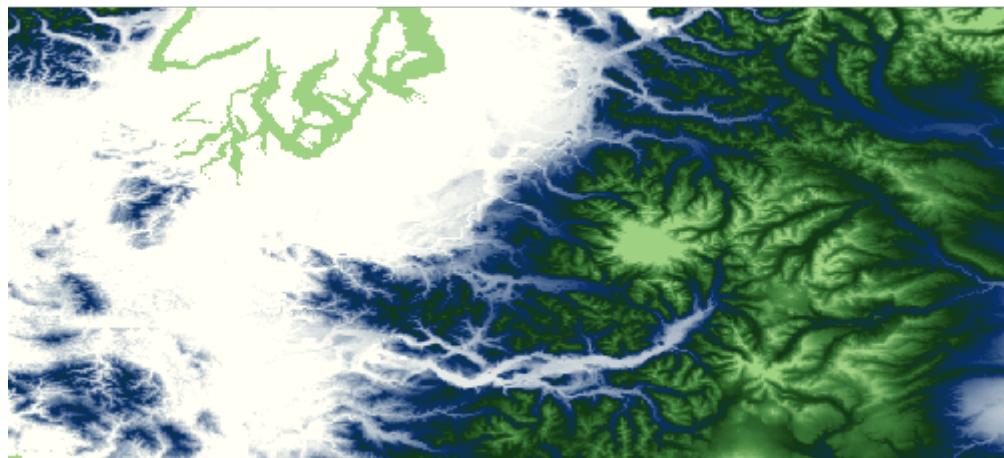

Subtract a Raster from another Raster

```
Raster lowRaster = Format.getFormat(new File("src/main/resources/low.tif")).read("low")
Raster highRaster = Format.getFormat(new File("src/main/resources/high.tif")).read("high")
Raster highMinusLowRaster = highRaster.minus(lowRaster)
```


Low

13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0
1.0	2.0	3.0	4.0

High

17.0	18.0	19.0	20.0
13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0

High - Low

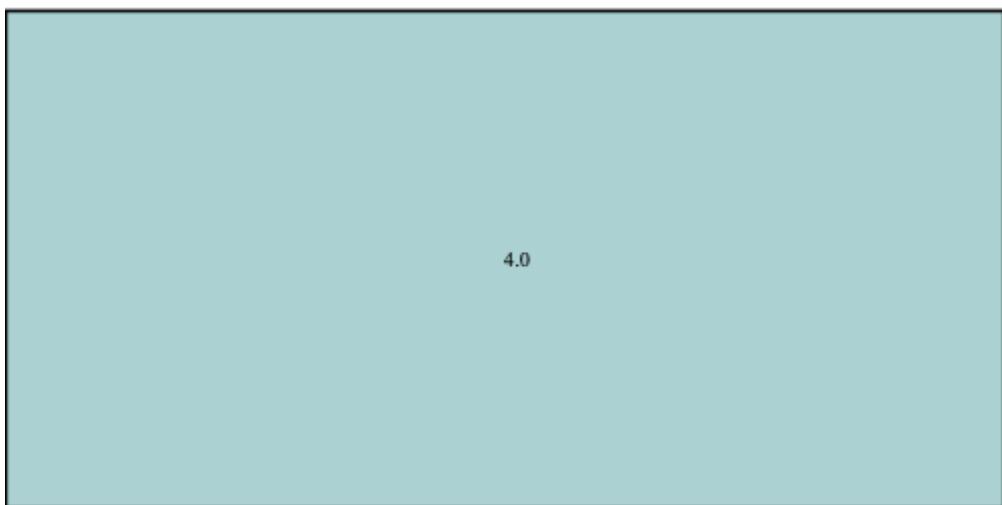


Multiply

Multiply a constant value against a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927, 46.867703))
println elevation1

Raster higherRaster = raster.multiply(2.0)
double elevation2 = higherRaster.getValue(new Point(-121.799927, 46.867703))
println elevation2
```

3069.0
6138.0

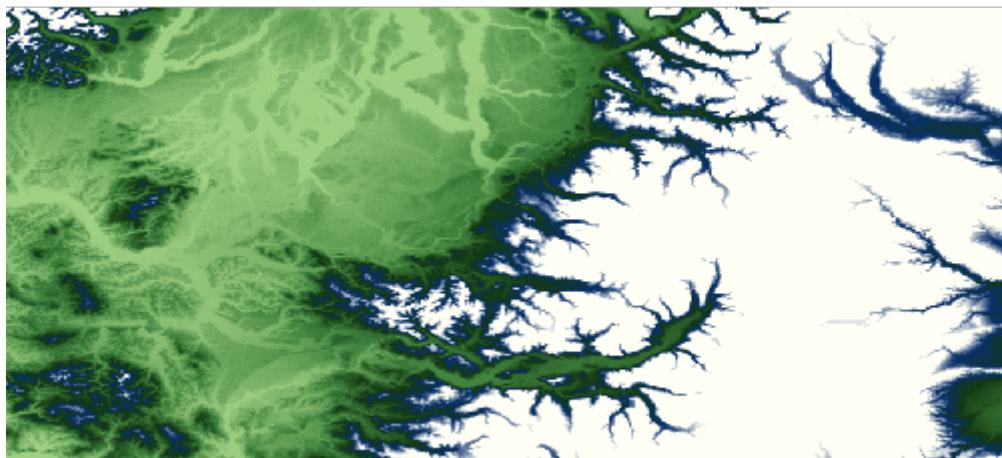

Multiply a Raster with another Raster

```
Raster lowRaster = Format.getFormat(new File("src/main/resources/low.tif")).read("low")
Raster highRaster = Format.getFormat(new File("src/main/resources/high.tif")).read("high")
Raster multiplyRaster = highRaster.multiply(lowRaster)
```

Low

13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0
1.0	2.0	3.0	4.0

High

17.0	18.0	19.0	20.0
13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0

High * Low

221.0	252.0	285.0	320.0
117.0	140.0	165.0	192.0
45.0	60.0	77.0	96.0
5.0	12.0	21.0	32.0


Divide

Divide a constant value against a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927,46.867703))
println elevation1

Raster lowerRaster = raster.divide(2.0)
double elevation2 = lowerRaster.getValue(new Point(-121.799927,46.867703))
println elevation2
```

3069.0
1534.5

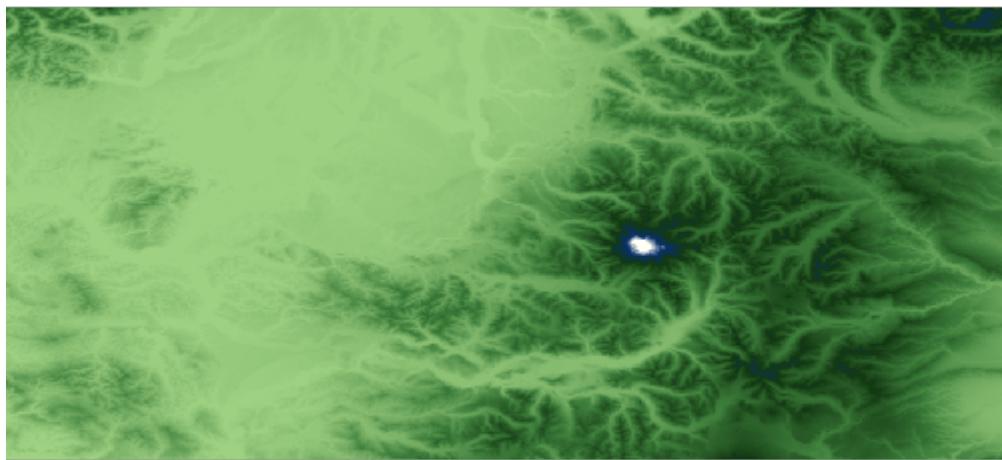

Divide a Raster by another Raster

```
Raster lowRaster = Format.getFormat(new File("src/main/resources/low.tif")).read("low")
Raster highRaster = Format.getFormat(new File("src/main/resources/high.tif")).read("high")
Raster divideRaster = highRaster.divide(lowRaster)
```

Low

13.00	14.00	15.00	16.00
9.00	10.00	11.00	12.00
5.00	6.00	7.00	8.00
1.00	2.00	3.00	4.00

High

17.00	18.00	19.00	20.00
13.00	14.00	15.00	16.00
9.00	10.00	11.00	12.00
5.00	6.00	7.00	8.00

High / Low

1.31	1.29		1.27	1.25
1.44	1.40		1.36	1.33
1.80	1.67		1.57	1.50
5.00	3.00		2.33	2.00

World File

Create a world file from a Bounds and size.

```
File file = new File("target/worldfile.txt")
WorldFile worldFile = new WorldFile(new Bounds(-123.06, 46.66, -121.15, 47.48), [500, 500], file)
println "Pixel Size = ${worldFile.pixelSize[0]} x ${worldFile.pixelSize[1]}"
println "Rotation = ${worldFile.rotation[0]} x ${worldFile.rotation[1]}"
println "Upper Left Coordinate = ${worldFile.ulc.x}, ${worldFile.ulc.y}"
println "File = ${file.text}"
```

Pixel Size = 0.00381999999999993 x -0.0016400000000000006
Rotation = 0.0 x 0.0
Upper Left Coordinate = -123.05809, 47.47918
File = 0.00381999999999993
0.0
0.0
-0.0016400000000000006
-123.05809
47.47918

Create a world file from an existing file.

```
File file = new File("src/main/resources/worldfile.txt")
WorldFile worldFile = new WorldFile(file)
println "Pixel Size = ${worldFile.pixelSize[0]} x ${worldFile.pixelSize[1]}"
println "Rotation = ${worldFile.rotation[0]} x ${worldFile.rotation[1]}"
println "Upper Left Coordinate = ${worldFile.ulc.x}, ${worldFile.ulc.y}"
```

Pixel Size = 0.00381999999999993 x -0.0016400000000000006
Rotation = 0.0 x 0.0
Upper Left Coordinate = -123.05809, 47.47918

Map Algebra

GeoScript uses Jiffle to perform map or raster algebra.

Add two Rasters together

```
Raster lowRaster = Format.getFormat(new File("src/main/resources/low.tif")).read("low")
Raster highRaster = Format.getFormat(new File("src/main/resources/high.tif")).read("high")

MapAlgebra mapAlgebra = new MapAlgebra()
Raster output = mapAlgebra.calculate("dest = raster1 + raster2;", [raster1: lowRaster,
raster2: highRaster], size: [300, 200])
```

Low

13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0
1.0	2.0	3.0	4.0

High

17.0	18.0	19.0	20.0
13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0

High + Low

30.0	32.0	34.0	36.0
22.0	24.0	26.0	28.0
14.0	16.0	18.0	20.0
6.0	8.0	10.0	12.0

Generate a wave Raster

```
MapAlgebra algebra = new MapAlgebra()


String script = """
    init {
        // image centre coordinates
        xc = width() / 2;
        yc = height() / 2;

        // constant term
        C = M_PI * 8;
    }

    dx = (x() - xc) / xc;
    dy = (y() - yc) / yc;
    d = sqrt(dx*dx + dy*dy);

    destImg = sin(C * d);
"""

Raster output = algebra.calculate(script, [:], outputName: "destImg")
```

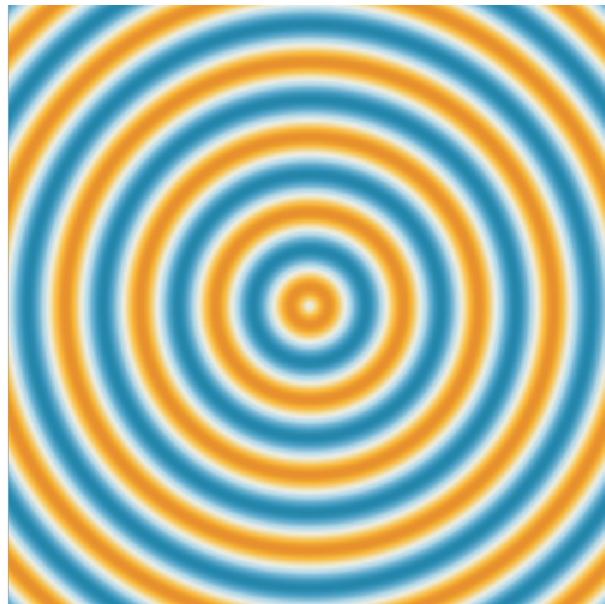

Create a Raster of all cells greater than a given value

```

File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println raster.size
MapAlgebra mapAlgebra = new MapAlgebra()
Raster output = mapAlgebra.calculate("dest = src > 1100;", [src: raster], size: [800, 400])
println output.extrema

```



WMS Recipes

The WMS classes are in the `geoscript.layer` package.

WMS Server

Connect to a WMS Server and list properties

```

WMS wms = new WMS("https://lpdaacserv.cr.usgs.gov/ogc/wms")
println "Name = ${wms.name}"
println "Title = ${wms.title}"
println "Abstract = ${wms.abstract}"
println "Keywords = ${wms.keywords.join(', ')}"
println "Online Resource = ${wms.onlineResource}"
println "Update Sequence = ${wms.updateSequence}"
println "Version = ${wms.version}"
println "Map Formats = ${wms.getMapFormats.join(', ')}"

```

Name = WMS
Title = GeoServer Web Map Service
Abstract = A compliant implementation of WMS plus most of the SLD extension (dynamic styling). Can also generate PDF, SVG, KML, GeoRSS
Keywords = WFS, WMS, GEOSERVER
Online Resource = <http://geoserver.sourceforge.net/html/index.php>
Update Sequence = 35327
Version = 1.3.0
Map Formats = image/png, application/atom+xml, application/pdf, application/rss+xml, application/vnd.google-earth.kml+xml, application/vnd.google-earth.kml+xml;mode=networklink, application/vnd.google-earth.kmz, image/geotiff, image/geotiff8, image/gif, image/jpeg, image/png; mode=8bit, image/svg+xml, image/tiff, image/tiff8, text/html; subtype=openlayers

Get a list of Layers

```
WMS wms = new WMS("https://lpdaacserv.cr.usgs.gov/ogc/wms")
wms.layers.subList(0,10).each { WMS.Layer layer ->
    println layer
}
```

MODIS:MCD12Q1.2016001.006.LandCover
MODIS:MOD09A1.2018073.006.SurRefl
MODIS:MOD09A1.2018081.006.SurRefl
MODIS:MOD09A1.2018089.006.SurRefl
MODIS:MOD09A1.2018097.006.SurRefl
MODIS:MOD09A1.2018105.006.SurRefl
MODIS:MOD09A1.2018113.006.SurRefl
MODIS:MOD09A1.2018121.006.SurRefl
MODIS:MOD09A1.2018129.006.SurRefl
MODIS:MOD09A1.2018137.006.SurRefl

Get a Layer

```
WMS wms = new WMS("https://lpdaacserv.cr.usgs.gov/ogc/wms")
WMS.Layer layer = wms.getLayer("MODIS:MOD09A1.2018185.006.SurRefl")
println "Name = ${layer.name}"
println "Title = ${layer.title}"
println "Bounds = ${layer.bounds}"
println "Lat/Lon Bounds = ${layer.latLonBounds}"
println "Queryable = ${layer.queryable}"
println "Min Scale = ${layer.minScale}"
println "Max Scale = ${layer.maxScale}"
```

```
Name = MODIS:MOD09A1.2018185.006.SurRefl
Title = MOD09A1.2018185.006.SurRefl
Bounds = [(-90.000014399999,-180.0,90.0,180.000028799998,EPSG:4326), (-180.0,-90.000014399999,180.000028799998,90.0,EPSG:4326)]
Lat/Lon Bounds = (-180.0,-90.000014399999,180.000028799998,90.0,EPSG:4326)
Queryable = true
Min Scale = NaN
Max Scale = NaN
```


Get a Raster

```
WMS wms = new WMS("https://lpdaacsvc.cr.usgs.gov/ogc/wms")
Raster raster = wms.getRaster(["MODIS:MOD14A2.2018209.006.Fire"])
```



Get an Image

```
WMS wms = new WMS("https://lpdaacsvc.cr.usgs.gov/ogc/wms")
BufferedImage image = wms.getImage(["MODIS:MOD17A2H.2019041.006.GPP"])
```

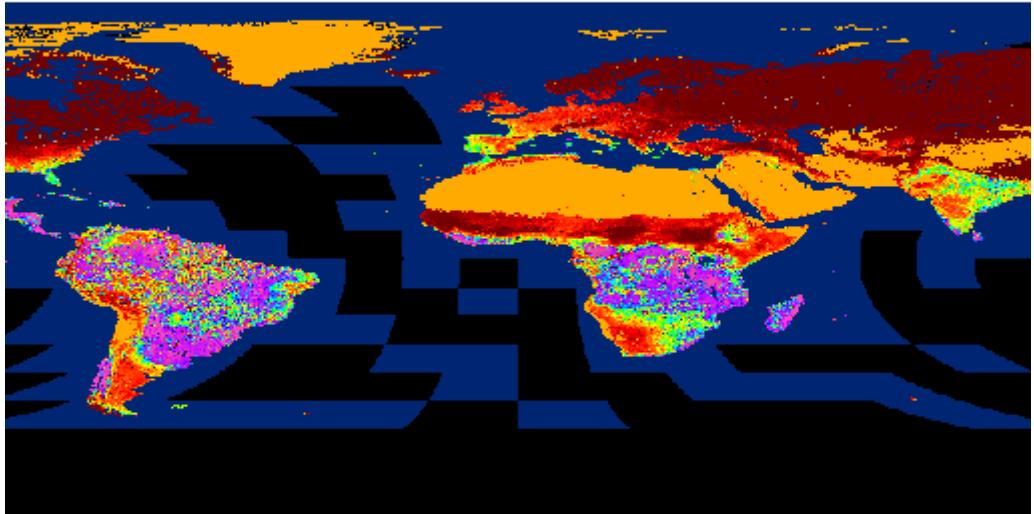


WMSLayer

A WMSLayer is a way to draw one or more WMS layers on a Map.

Use WMS Layers to render a Map

```
WMS wms = new WMS("http://1maps.geo-
solutions.it/geoserver/osm/wms?service=wms&version=1.1.1&request=GetCapabilities")
WMSLayer layer = new WMSLayer(wms, ["icesheet_polygons", "ne_10m_admin_0_countries"])
Map map = new Map(layers: [layer], backgroundColor: "#B0C4DE", bounds: new Bounds(-
179, -85, 179, 85, "EPSG:4326").reproject("EPSG:3857"))
BufferedImage image = map.renderToImage()
```

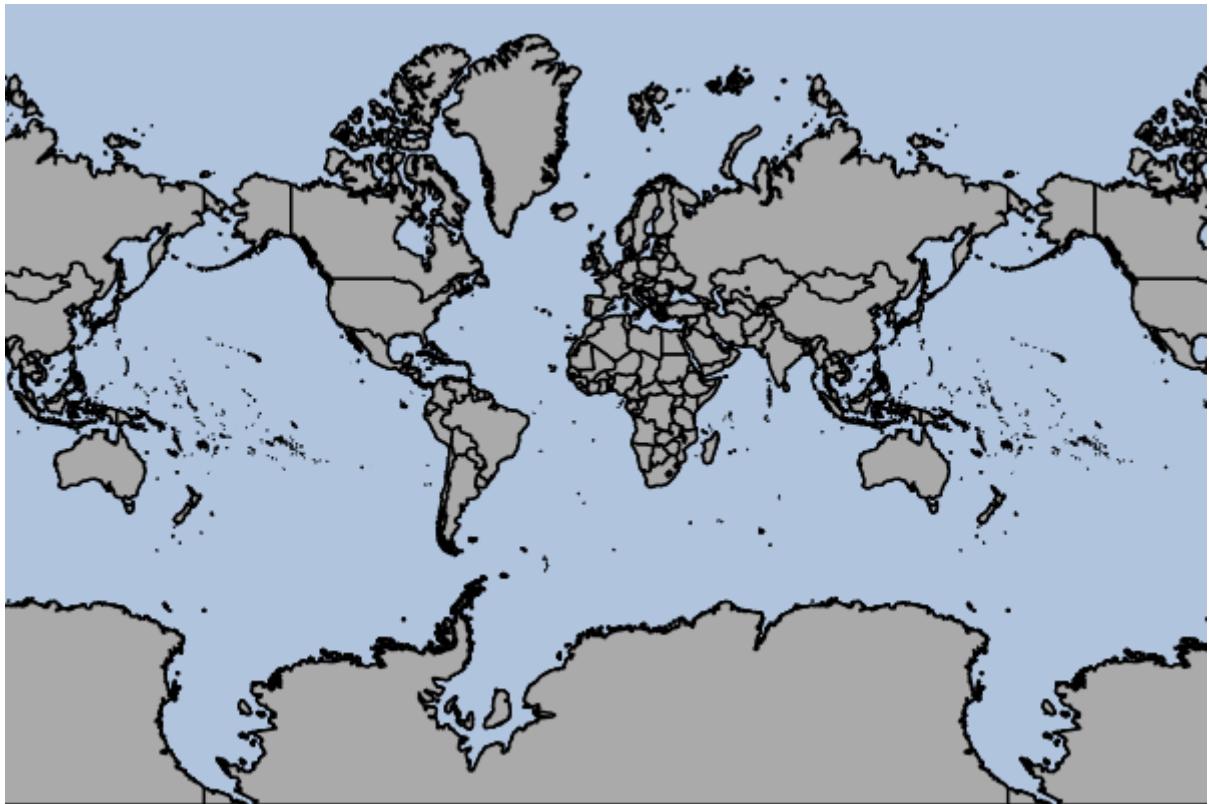

Tile Recipes

The Tile classes are in the [geoscript.layer](#) package.

Tile

Tile Properties

Get a Tile's Properties.

```
byte[] data = new File("src/main/resources/tile.png").bytes
Tile tile = new Tile(2,1,3,data)
println "Z = ${tile.z}"
println "X = ${tile.x}"
println "Y = ${tile.y}"
println "Tile = ${tile.toString()}"
println "# bytes = ${tile.data.length}"
println "Data as base64 encoded string = ${tile.base64String}"
```

```
Z = 2
X = 1
Y = 3
Tile = Tile(x:1, y:3, z:2)
# bytes = 11738
Data as base64 encoded string = iVBORw0KGgoAAAANSUhEUgAAAQAAAAEACAYAAABccqhmAAAt...  
...
```

ImageTile Properties

Some Tiles contain an Image. ImageTile's have an image property.

```
byte[] data = new File("src/main/resources/tile.png").bytes
ImageTile tile = new ImageTile(0,0,0,data)
BufferedImage image = tile.image
```



Grid

A Grid describes a level in a Pyramid of Tiles.

Grid Properties

```
Grid grid = new Grid(1, 2, 2, 78206.0, 78206.0)
println "Zoom Level: ${grid.z}"
println "Width / # Columns: ${grid.width}"
println "Height / # Rows: ${grid.height}"
println "Size / # Tiles: ${grid.size}"
println "X Resolution: ${grid.xResolution}"
println "Y Resolution: ${grid.yResolution}"
```

```
Zoom Level: 1
Width / # Columns: 2
Height / # Rows: 2
Size / # Tiles: 4
X Resolution: 78206.0
Y Resolution: 78206.0
```

Pyramid

Pyramid Properties

Get the Pyramid's Bounds.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
```

```
Bounds bounds = pyramid.bounds  
println bounds
```

```
(-2.003639514788131E7,-  
2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSG:3857)
```

Get the Pyramid's projection.

```
Projection proj = pyramid.proj  
println proj
```

```
EPSG:3857
```

Get the Pyramid's Origin.

```
Pyramid.Origin origin = pyramid.origin  
println origin
```

```
BOTTOM_LEFT
```

Get the Pyramid's Tile Width and Height.

```
int tileSize = pyramid.tileWidth  
int tileHeight = pyramid.tileHeight  
println "${tileWidth} x ${tileHeight}"
```

```
256 x 256
```

Create Pyramids

Create a Global Mercator Pyramid.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
println "Projection: ${pyramid.proj}"
println "Origin: ${pyramid.origin}"
println "Bounds: ${pyramid.bounds}"
println "Max Zoom: ${pyramid.maxGrid.z}"
```

```
Projection: EPSG:3857
Origin: BOTTOM_LEFT
Bounds: (-2.003639514788131E7,-2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPSG:3857)
Max Zoom: 19
```

Create a Global Geodetic Pyramid.

```
Pyramid pyramid = Pyramid.createGlobalGeodeticPyramid()
println "Projection: ${pyramid.proj}"
println "Origin: ${pyramid.origin}"
println "Bounds: ${pyramid.bounds}"
println "Max Zoom: ${pyramid.maxGrid.z}"
```

```
Projection: EPSG:4326
Origin: BOTTOM_LEFT
Bounds: (-179.99,-89.99,179.99,89.99,EPSG:4326)
Max Zoom: 19
```

Create a Global Mercator Pyramid from a well known name.

Well known names include:

- GlobalMercator
- Mercator
- GlobalMercatorBottomLeft
- GlobalMercatorTopLeft
- GlobalGeodetic
- Geodetic

```
Pyramid pyramid = Pyramid.fromString("mercator")
println "Projection: ${pyramid.proj}"
println "Origin: ${pyramid.origin}"
println "Bounds: ${pyramid.bounds}"
println "Max Zoom: ${pyramid.maxGrid.z}"
```


```
Projection: EPSG:3857
Origin: BOTTOM_LEFT
Bounds: (-2.003639514788131E7,-2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EP
Max Zoom: 19
```

Get Bounds from a Pyramid

Get the Bounds for a Tile.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Tile tile = new Tile(2, 1, 1)
Bounds bounds = pyramid.bounds(tile)
println "The bounds of ${tile} is ${bounds}"
```

```
The bounds of Tile(x:1, y:1, z:2) is (-1.0018197573940655E7,-1.0018735602568535E7,0.0,-3.725290298461914E-9,EP
SG:3857)
```

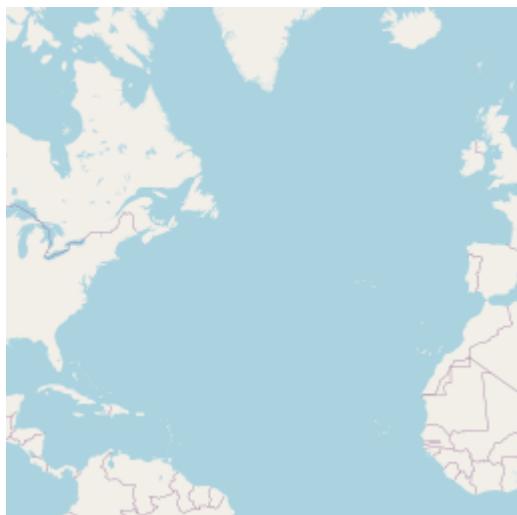

Get the Bounds for an area around a Point at a zoom level.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Point point = Projection.transform(new Point(22.1539306640625, 37.67077737288316),
"EPSG:4326", "EPSG:3857")
int zoomLevel = 8
int width = 400
int height = 400
Bounds bounds = pyramid.bounds(point, zoomLevel, width, height)
println "The bounds around ${point} is ${bounds}"
```

```
The bounds around POINT (2466164.280592927 4533021.525424092) is  
(2343967.405592927,4410824.650424092,2588361.155592927,4655218.400424092,EPGS:3857)
```

Get a Grid from a Pyramid

Get a the min Grid.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()  
Grid grid = pyramid.minGrid  
println "Zoom Level: ${grid.z}"  
println "Width / # Columns: ${grid.width}"  
println "Height / # Rows: ${grid.height}"  
println "Size / # Tiles: ${grid.size}"  
println "X Resolution: ${grid.xResolution}"  
println "Y Resolution: ${grid.yResolution}"
```

```
Zoom Level: 0  
Width / # Columns: 1  
Height / # Rows: 1  
Size / # Tiles: 1  
X Resolution: 156412.0  
Y Resolution: 156412.0
```

Get a the max Grid.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Grid grid = pyramid.maxGrid
println "Zoom Level: ${grid.z}"
println "Width / # Columns: ${grid.width}"
println "Height / # Rows: ${grid.height}"
println "Size / # Tiles: ${grid.size}"
println "X Resolution: ${grid.xResolution}"
println "Y Resolution: ${grid.yResolution}"
```

```
Zoom Level: 19
Width / # Columns: 524288
Height / # Rows: 524288
Size / # Tiles: 274877906944
X Resolution: 0.29833221435546875
Y Resolution: 0.29833221435546875
```

Get a Grid from a Pyramid by Zoom Level.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Grid grid = pyramid.grid(1)
println "Zoom Level: ${grid.z}"
println "Width / # Columns: ${grid.width}"
println "Height / # Rows: ${grid.height}"
println "Size / # Tiles: ${grid.size}"
println "X Resolution: ${grid.xResolution}"
println "Y Resolution: ${grid.yResolution}"
```

```
Zoom Level: 1
Width / # Columns: 2
Height / # Rows: 2
Size / # Tiles: 4
X Resolution: 78206.0
Y Resolution: 78206.0
```

Get a Grid from a Pyramid by a Bounds and Resolution.

```

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Bounds bounds = new Bounds(-123.09, 46.66, -121.13, 47.48, "EPSG:4326").reproject
("EPSG:3857")
Grid grid = pyramid.grid(bounds, bounds.width / 400.0, bounds.height / 200.0)
println "Zoom Level: ${grid.z}"
println "Width / # Columns: ${grid.width}"
println "Height / # Rows: ${grid.height}"
println "Size / # Tiles: ${grid.size}"
println "X Resolution: ${grid.xResolution}"
println "Y Resolution: ${grid.yResolution}"

```

```

Zoom Level: 8
Width / # Columns: 256
Height / # Rows: 256
Size / # Tiles: 65536
X Resolution: 610.984375
Y Resolution: 610.984375

```

Get a Grid from a Pyramid by a Bounds and Size.

```

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Bounds bounds = new Bounds(-123.09, 46.66, -121.13, 47.48, "EPSG:4326").reproject
("EPSG:3857")
Grid grid = pyramid.grid(bounds, 400, 200)
println "Zoom Level: ${grid.z}"
println "Width / # Columns: ${grid.width}"
println "Height / # Rows: ${grid.height}"
println "Size / # Tiles: ${grid.size}"
println "X Resolution: ${grid.xResolution}"
println "Y Resolution: ${grid.yResolution}"

```

```

Zoom Level: 8
Width / # Columns: 256
Height / # Rows: 256
Size / # Tiles: 65536
X Resolution: 610.984375
Y Resolution: 610.984375

```

Get Tile Coordinates

Get the tile coordinates from a Pyramid by Bounds and zoom level

```

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Bounds bounds = new Bounds(-124.7314220000001, 24.955967, -66.969849, 49.371735,
    "EPSG:4326").reproject("EPSG:3857")
long zoomLevel = 4
Map<String, Integer> coords = pyramid.getTileCoordinates(bounds, zoomLevel)
println "Min X = ${coords minX}"
println "Min Y = ${coords minY}"
println "Max X = ${coords maxX}"
println "Max Y = ${coords maxY}"

```

```

Min X = 2
Min Y = 9
Max X = 5
Max Y = 10

```

Get the tile coordinates from a Pyramid by Bounds and Grid

```

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Bounds bounds = new Bounds(20.798492, 36.402494, 22.765045, 37.223768, "EPSG:4326"
    ).reproject("EPSG:3857")
Grid grid = pyramid.grid(10)
Map<String, Integer> coords = pyramid.getTileCoordinates(bounds, grid)
println "Min X = ${coords minX}"
println "Min Y = ${coords minY}"
println "Max X = ${coords maxX}"
println "Max Y = ${coords maxY}"

```

```

Min X = 571
Min Y = 623
Max X = 576
Max Y = 626

```

Reading and Writing Pyramids

The Pyramid IO classes are in the [geoscript.layer.io](#) package.

Finding Pyramid Writer and Readers

List all Pyramid Writers

```

List<PyramidWriter> writers = PyramidWriters.list()
writers.each { PyramidWriter writer -
    println writer.className
}

```

```
CsvPyramidWriter  
GdalTmsPyramidWriter  
JsonPyramidWriter  
XmlPyramidWriter
```

Find a Pyramid Writer

```
Pyramid pyramid = Pyramid.createGlobalGeodeticPyramid(maxZoom: 2)  
PyramidWriter writer = PyramidWriters.find("csv")  
String pyramidStr = writer.write(pyramid)  
println pyramidStr
```

```
EPSG:4326  
-179.99,-89.99,179.99,89.99,EPGS:4326  
BOTTOM_LEFT  
256,256  
0,2,1,0.703125,0.703125  
1,4,2,0.3515625,0.3515625  
2,8,4,0.17578125,0.17578125
```

List all Pyramid Readers

```
List<PyramidReader> readers = PyramidReaders.list()  
readers.each { PyramidReader reader ->  
    println reader.className  
}
```

```
CsvPyramidReader  
GdalTmsPyramidReader  
JsonPyramidReader  
XmlPyramidReader
```

Find a Pyramid Reader

```
PyramidReader reader = PyramidReaders.find("csv")
Pyramid pyramid = reader.read("""EPSG:3857
-2.0036395147881314E7,
-2.0037471205137067E7,2.0036395147881314E7,2.0037471205137067,EPSG:3857
BOTTOM_LEFT
256,256
0,1,1,156412.0,156412.0
1,2,2,78206.0,78206.0
2,4,4,39103.0,39103.0
3,8,8,19551.5,19551.5
4,16,16,9775.75,9775.75
""")  
println pyramid
```

```
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.0036395147881314E7,-2.0037471205137067E7,2.0036395147881314E7,2.0037471205137067,EPSG:3857), origin:BOTTOM_LEFT, tileSize:256, tileHeight:256)
```

JSON

Get a JSON String from a Pyramid.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid(maxZoom: 4)
String json = pyramid.json
println json
```

```
{
  "proj": "EPSG:3857",
  "bounds": {
    "minX": -2.003639514788131E7,
    "minY": -2.0037471205137067E7,
    "maxX": 2.003639514788131E7,
    "maxY": 2.0037471205137067E7
  },
  "origin": "BOTTOM_LEFT",
  "tileSize": {
    "width": 256,
    "height": 256
  },
  "grids": [
    {
      "z": 0,
      "width": 1,
      "height": 1,
      "xres": 156412.0,
```

```
        "yres": 156412.0
    },
    {
        "z": 1,
        "width": 2,
        "height": 2,
        "xres": 78206.0,
        "yres": 78206.0
    },
    {
        "z": 2,
        "width": 4,
        "height": 4,
        "xres": 39103.0,
        "yres": 39103.0
    },
    {
        "z": 3,
        "width": 8,
        "height": 8,
        "xres": 19551.5,
        "yres": 19551.5
    },
    {
        "z": 4,
        "width": 16,
        "height": 16,
        "xres": 9775.75,
        "yres": 9775.75
    }
]
}
```

XML

Get a XML String from a Pyramid.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid(maxZoom: 4)
String xml = pyramid.xml
println xml
```

```
<pyramid>
    <proj>EPSG:3857</proj>
    <bounds>
        <minX>-2.003639514788131E7</minX>
        <minY>-2.0037471205137067E7</minY>
        <maxX>2.003639514788131E7</maxX>
        <maxY>2.0037471205137067E7</maxY>
    </bounds>
```

```
<origin>BOTTOM_LEFT</origin>
<tileSize>
    <width>256</width>
    <height>256</height>
</tileSize>
<grids>
    <grid>
        <z>0</z>
        <width>1</width>
        <height>1</height>
        <xres>156412.0</xres>
        <yres>156412.0</yres>
    </grid>
    <grid>
        <z>1</z>
        <width>2</width>
        <height>2</height>
        <xres>78206.0</xres>
        <yres>78206.0</yres>
    </grid>
    <grid>
        <z>2</z>
        <width>4</width>
        <height>4</height>
        <xres>39103.0</xres>
        <yres>39103.0</yres>
    </grid>
    <grid>
        <z>3</z>
        <width>8</width>
        <height>8</height>
        <xres>19551.5</xres>
        <yres>19551.5</yres>
    </grid>
    <grid>
        <z>4</z>
        <width>16</width>
        <height>16</height>
        <xres>9775.75</xres>
        <yres>9775.75</yres>
    </grid>
</grids>
</pyramid>
```

CSV

Get a CSV String from a Pyramid.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid(maxZoom: 4)
String csv = pyramid.csv
println csv
```

```
EPSG:3857
-2.003639514788131E7,
-2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPGS:3857
BOTTOM_LEFT
256,256
0,1,1,156412.0,156412.0
1,2,2,78206.0,78206.0
2,4,4,39103.0,39103.0
3,8,8,19551.5,19551.5
4,16,16,9775.75,9775.75
```

GDAL XML

Write a Pyramid to a GDAL XML File

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid(maxZoom: 4)
GdalTmsPyramidWriter writer = new GdalTmsPyramidWriter()
String xml = writer.write(pyramid, serverUrl: 'https://myserver.com/${z}/${x}/${y}',
imageFormat: 'png')
println xml
```

```
<GDAL_WMS>
  <Service name='TMS'>
    <ServerURL>https://myserver.com/${z}/${x}/${y}</ServerURL>
    <SRS>EPSG:3857</SRS>
    <ImageFormat>png</ImageFormat>
  </Service>
  <DataWindow>
    <UpperLeftX>-2.003639514788131E7</UpperLeftX>
    <UpperLeftY>2.003747120513706E7</UpperLeftY>
    <LowerRightX>2.003639514788131E7</LowerRightX>
    <LowerRightY>-2.003747120513706E7</LowerRightY>
    <TileLevel>4</TileLevel>
    <TileCountX>1</TileCountX>
    <TileCountY>1</TileCountY>
    <YOrigin>bottom</YOrigin>
  </DataWindow>
  <Projection>EPSG:3857</Projection>
  <BlockSizeX>256</BlockSizeX>
  <BlockSizeY>256</BlockSizeY>
  <BandsCount>3</BandsCount>
</GDAL_WMS>
```

Read a Pyramid from a GDAL XML File

```
String xml = '''<GDAL_WMS>
<Service name='TMS'>
  <ServerURL>https://myserver.com/${z}/${x}/${y}</ServerURL>
  <SRS>EPSG:3857</SRS>
  <ImageFormat>png</ImageFormat>
</Service>
<DataWindow>
  <UpperLeftX>-2.0036395147881314E7</UpperLeftX>
  <UpperLeftY>2.003747120513706E7</UpperLeftY>
  <LowerRightX>2.0036395147881314E7</LowerRightX>
  <LowerRightY>-2.003747120513706E7</LowerRightY>
  <TileLevel>4</TileLevel>
  <TileCountX>1</TileCountX>
  <TileCountY>1</TileCountY>
  <YOrigin>bottom</YOrigin>
</DataWindow>
<Projection>EPSG:3857</Projection>
<BlockSizeX>256</BlockSizeX>
<BlockSizeY>256</BlockSizeY>
<BandsCount>3</BandsCount>
</GDAL_WMS>'''
GdalTmsPyramidReader reader = new GdalTmsPyramidReader()
Pyramid pyramid = reader.read(xml)
```

```
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.0036395147881314E7,-2.003747120513706E7,2.0036395147881314E7,2.003747120513706E7,EPGS:3857), origin:BOTTOM_LEFT, tileSize:256, tileHeight:256)
```

Generating Tiles

Generating Image Tiles


MBTiles

Generate Image Tiles to a MBTiles file

```
File file = new File("target/world.mbtiles")
MBTiles mbtiles = new MBTiles(file, "World", "World Tiles")

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")

ImageTileRenderer renderer = new ImageTileRenderer(mbtiles, [ocean, countries])
TileGenerator generator = new TileGenerator()
generator.generate(mbtiles, renderer, 0, 2)
```

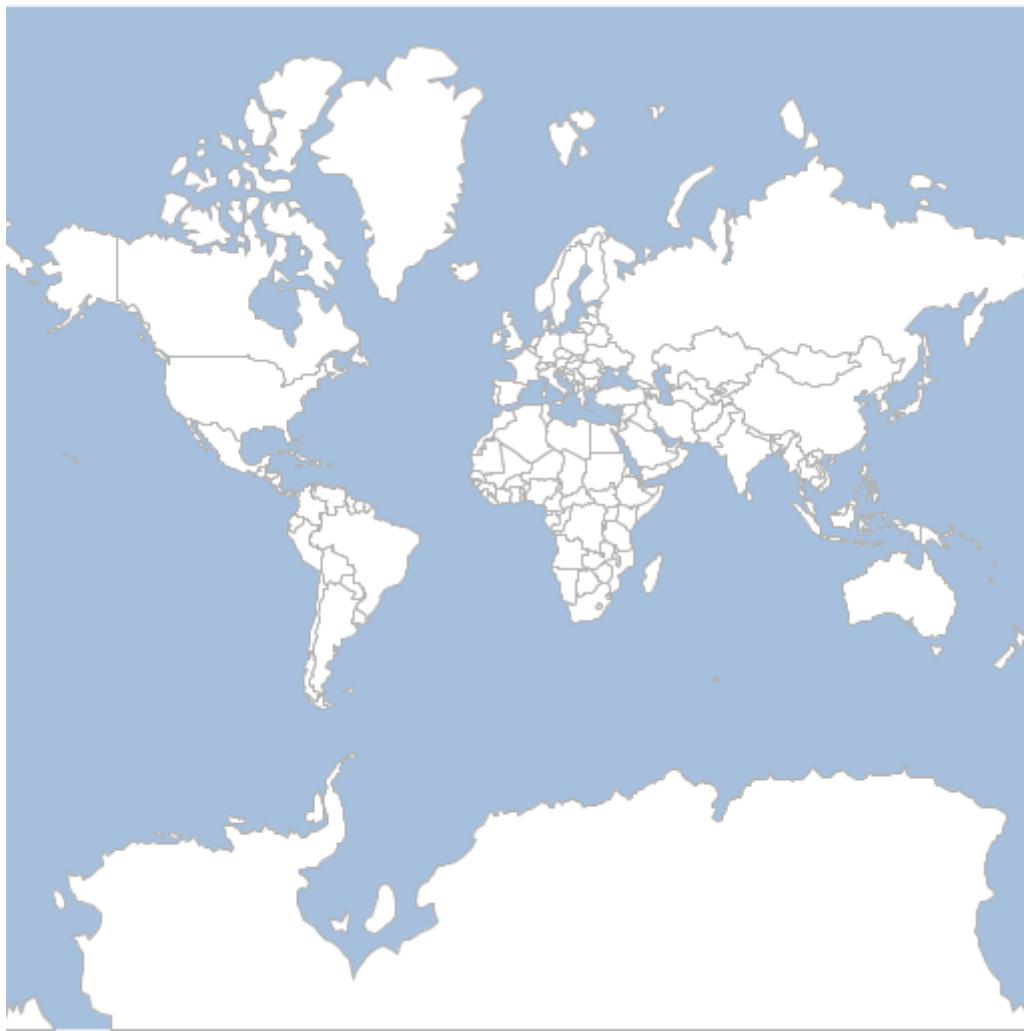

Generate Image Tiles to a MBTiles file with metatiles

```

File file = new File("target/world_meta.mbtiles")
MBTiles mbtiles = new MBTiles(file, "World", "World Tiles")

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")

ImageTileRenderer renderer = new ImageTileRenderer(mbtiles, [ocean, countries])
TileGenerator generator = new TileGenerator()
generator.generate(mbtiles, renderer, 0, 2, metatile: [width:4, height: 4])

```

[tile generate mbtiles metatile] | tile_generate_mbtiles_metatile.png

DBTiles

Generate Image Tiles to a MBTiles like JDBC Database.

```

File file = new File("target/world_tiles.db")
DBTiles dbtiles = new DBTiles("jdbc:h2:${file}", "org.h2.Driver", "World", "World wide
tiles")

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")

ImageTileRenderer renderer = new ImageTileRenderer(dbtiles, [ocean, countries])
TileGenerator generator = new TileGenerator()
generator.generate(dbtiles, renderer, 0, 2)

```




GeoPackage

Generate Image Tiles to a GeoPackage file

```
File file = new File("target/world.gpkg")
geoscript.layer.GeoPackage geopackage = new geoscript.layer.GeoPackage(file, "World",
Pyramid.createGlobalGeodeticPyramid())

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")

ImageTileRenderer renderer = new ImageTileRenderer(geopackage, [ocean, countries])
TileGenerator generator = new TileGenerator()
generator.generate(geopackage, renderer, 0, 2)
```

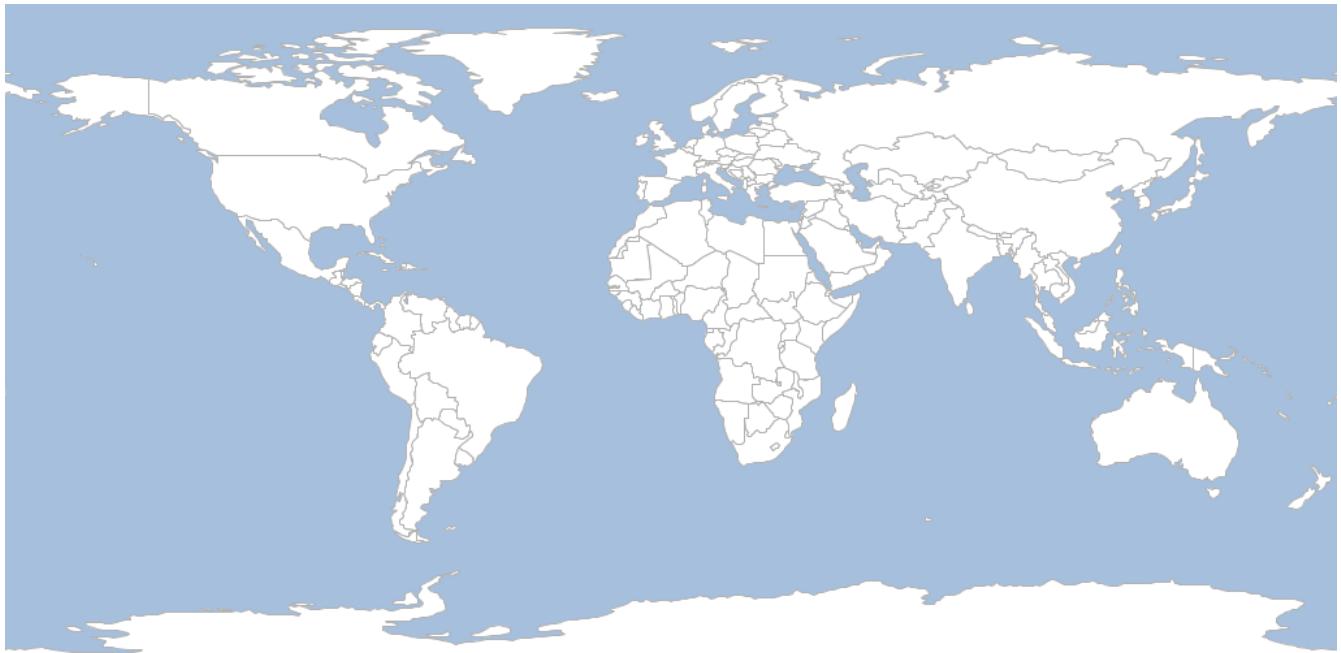


TMS

Generate Image Tiles to a TMS directory

```
File directory = new File("target/tiles")
directory.mkdir()
TMS tms = new TMS("world", "png", directory, Pyramid.createGlobalMercatorPyramid())

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")

ImageTileRenderer renderer = new ImageTileRenderer(tms, [ocean, countries])
TileGenerator generator = new TileGenerator()
generator.generate(tms, renderer, 0, 2)
```

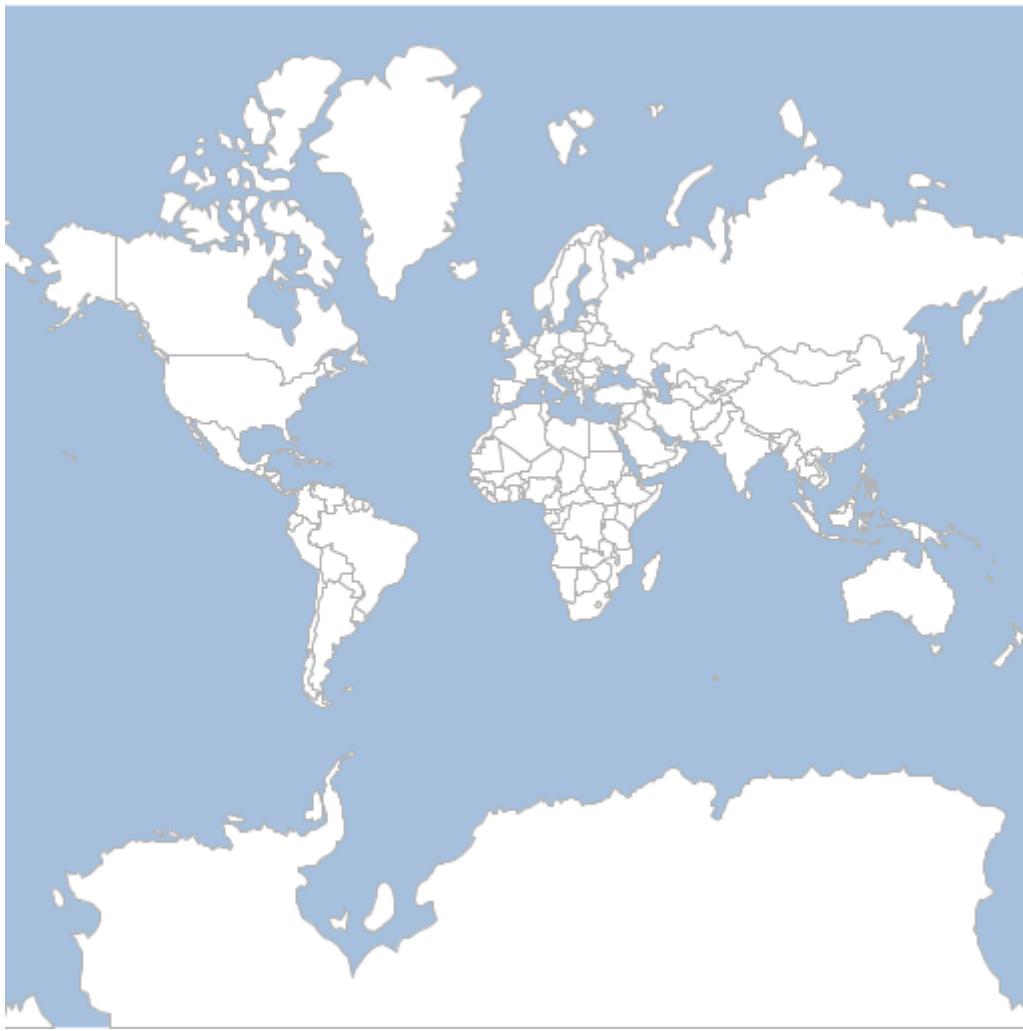


UTFGrid

Generate UTFGrid tiles to a directory

```
File directory = new File("target/utfgrid")
directory.mkdir()
UTFGrid utf = new UTFGrid(directory)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")

UTFGridTileRenderer renderer = new UTFGridTileRenderer(utf, countries, [countries
.schema.get("NAME")])
TileGenerator generator = new TileGenerator()
generator.generate(utf, renderer, 0, 2)
```

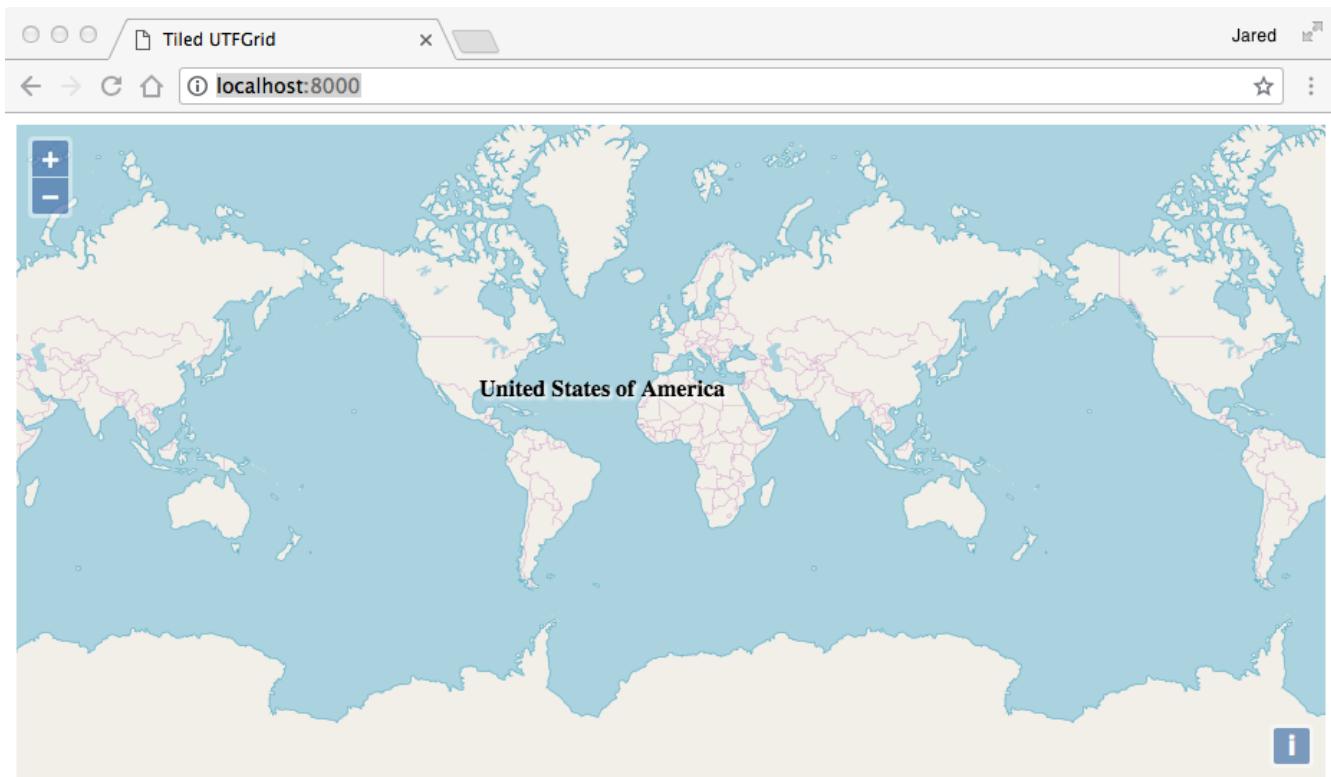

Vector Tiles

Generate vector tiles to a directory

```

File directory = new File("target/pbf")
directory.mkdirs()

Workspace workspace = new Directory("src/main/resources/shapefiles")
Layer countries = workspace.get("countries")
Layer ocean = workspace.get("ocean")

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
pyramid.origin = Pyramid.Origin.TOP_LEFT
VectorTiles vectorTiles = new VectorTiles(
    "world",
    directory,
    pyramid,
    "pbf",
    style: [
        "countries": new Fill("white") + new Stroke("black", 1),
        "ocean": new Fill("blue")
    ]
)
PbfVectorTileRenderer renderer = new PbfVectorTileRenderer([countries, ocean], [
    "countries": ["NAME"],
    "ocean": ["FeatureCla"]
])
TileGenerator generator = new TileGenerator()
generator.generate(vectorTiles, renderer, 0, 2)

```



Generate vector tiles to a MBTiles file


```

File file = new File("target/vectortiles.mbtiles")

Workspace workspace = new Directory("src/main/resources/shapefiles")
Layer countries = workspace.get("countries")
Layer ocean = workspace.get("ocean")

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
pyramid.origin = Pyramid.Origin.TOP_LEFT
VectorTiles vectorTiles = new VectorTiles(
    "world",
    file,
    pyramid,
    "pbf",
    style: [
        "countries": new Fill("white") + new Stroke("black", 1),
        "ocean": new Fill("blue")
    ]
)
PbfVectorTileRenderer renderer = new PbfVectorTileRenderer([countries, ocean], [
    "countries": ["NAME"],
    "ocean": ["FeatureCla"]
])
TileGenerator generator = new TileGenerator()
generator.generate(vectorTiles, renderer, 0, 2)

```

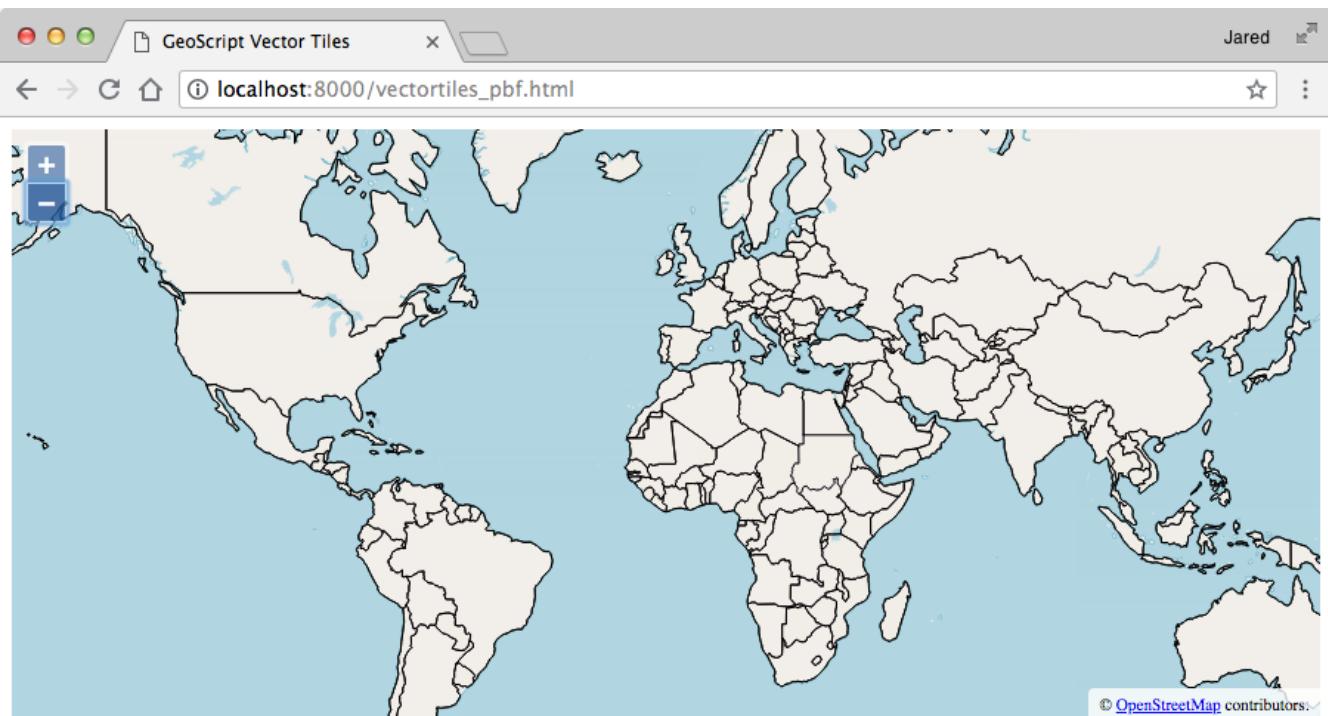

Tile Layer

Tile Layer Properties

Create a TileLayer from an MBTiles File.

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)
```

Get the TileLayer's name.

```
String name = mbtiles.name
println name
```

```
countries
```

Get the TileLayer's Bounds.

```
Bounds bounds = mbtiles.bounds
println bounds
```

```
(-2.003639514788131E7,-
2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSG:3857)
```

Get the TileLayer's Projection.

```
Projection proj = mbtiles.proj
println proj
```

```
EPSG:3857
```

Get the TileLayer's Pyramid.

```
Pyramid pyramid = mbtiles.pyramid
println pyramid
```

```
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.003639514788131E7,-
2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSG:3857),
origin:BOTTOM_LEFT, tileSize:256, tileHeight:256)
```

Get a Tile from a TileLayer.

```
Tile tile = mbtiles.get(0, 0, 0)
println tile
```

```
Tile(x:0, y:0, z:0)
```



Get, put, and delete a Tile from a TileLayer

Get a Tile from a TileLayer.

```
MBTiles layer = new MBTiles(file)
ImageTile tile = layer.get(0,0,0)
```



Add a Tile to a TileLayer.

```
File newTileFile = new File("src/main/resources/yellowtile.png")
ImageTile newTile = new ImageTile(0,0,0, newTileFile.bytes)
layer.put(newTile)
newTile = layer.get(0,0,0)
```



Remove a Tile from a TileLayer.

```
layer.delete(newTile)
newTile = layer.get(0,0,0)
println "Image = ${newTile.image}"
```

```
Image = null
```

Close a TileLayer

```
layer.close()
```

Delete Tiles from a TileLayer

```
MBTiles layer = new MBTiles(file)
layer.tiles(1).each { Tile tile ->
    println "${tile} = ${tile.image == null}"
}
```

```
Tile(x:0, y:0, z:1) = false
Tile(x:1, y:0, z:1) = false
Tile(x:0, y:1, z:1) = false
Tile(x:1, y:1, z:1) = false
```

```
layer.delete(layer.tiles(1))
layer.tiles(1).each { Tile tile ->
    println "${tile} = ${tile.image == null}"
}
```

```
Tile(x:0, y:0, z:1) = true
Tile(x:1, y:0, z:1) = true
Tile(x:0, y:1, z:1) = true
Tile(x:1, y:1, z:1) = true
```

Tiles

Get a TileCursor from a TileLayer with all of the Tiles in a zoom level.

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

long zoomLevel = 1
TileCursor tileCursor = mbtiles.tiles(zoomLevel)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}
```

```
Zoom Level: 1
# of tiles: 4
Bounds: (-2.003639514788131E7,-
2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPGS:3857)
Width / # Columns: 2
Height / # Rows: 2
MinX: 0, MinY: 0, MaxX: 1, MaxY: 1

Tiles:
Tile(x:0, y:0, z:1)
Tile(x:1, y:0, z:1)
Tile(x:0, y:1, z:1)
Tile(x:1, y:1, z:1)
```

Get a TileCursor from a TileLayer with Tiles from a zoom level between min and max x and y coordinates.

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

long zoomLevel = 4
long minX = 2
long minY = 4
long maxX = 5
long maxY = 8
TileCursor tileCursor = mbtiles.tiles(zoomLevel, minX, minY, maxX, maxY)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor.minX}, MinY: ${tileCursor.minY}, MaxX: ${tileCursor.maxX},
MaxY: ${tileCursor.maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}
```

```
Zoom Level: 4
# of tiles: 20
Bounds: (-1.5027296360910982E7, -1.0018735602568535E7, -
5009098.786970327, 2504683.900642129, EPSG:3857)
Width / # Columns: 4
Height / # Rows: 5
MinX: 2, MinY: 4, MaxX: 5, MaxY: 8
```

Tiles:

```
Tile(x:2, y:4, z:4)
Tile(x:3, y:4, z:4)
Tile(x:4, y:4, z:4)
Tile(x:5, y:4, z:4)
Tile(x:2, y:5, z:4)
Tile(x:3, y:5, z:4)
Tile(x:4, y:5, z:4)
Tile(x:5, y:5, z:4)
Tile(x:2, y:6, z:4)
Tile(x:3, y:6, z:4)
Tile(x:4, y:6, z:4)
Tile(x:5, y:6, z:4)
Tile(x:2, y:7, z:4)
Tile(x:3, y:7, z:4)
Tile(x:4, y:7, z:4)
Tile(x:5, y:7, z:4)
Tile(x:2, y:8, z:4)
Tile(x:3, y:8, z:4)
Tile(x:4, y:8, z:4)
Tile(x:5, y:8, z:4)
```

Get a TileCursor from a TileLayer for a zoom level and a given Bounds.

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-102.875977, 45.433154, -96.481934, 48.118434,
"EPSG:4326").reproject("EPSG:3857")
int zoomLevel = 8
TileCursor tileCursor = mbtiles.tiles(bounds, zoomLevel)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}
```

```
Zoom Level: 8
# of tiles: 24
Bounds: (-1.1583540944868883E7,5635538.7764447965,-
1.0644334922311947E7,6261709.751605326,EPSG:3857)
Width / # Columns: 6
Height / # Rows: 4
MinX: 54, MinY: 164, MaxX: 59, MaxY: 167
```

Tiles:

```
Tile(x:54, y:164, z:8)
Tile(x:55, y:164, z:8)
Tile(x:56, y:164, z:8)
Tile(x:57, y:164, z:8)
Tile(x:58, y:164, z:8)
Tile(x:59, y:164, z:8)
Tile(x:54, y:165, z:8)
Tile(x:55, y:165, z:8)
Tile(x:56, y:165, z:8)
Tile(x:57, y:165, z:8)
Tile(x:58, y:165, z:8)
Tile(x:59, y:165, z:8)
Tile(x:54, y:166, z:8)
Tile(x:55, y:166, z:8)
Tile(x:56, y:166, z:8)
Tile(x:57, y:166, z:8)
Tile(x:58, y:166, z:8)
Tile(x:59, y:166, z:8)
Tile(x:54, y:167, z:8)
Tile(x:55, y:167, z:8)
Tile(x:56, y:167, z:8)
Tile(x:57, y:167, z:8)
Tile(x:58, y:167, z:8)
Tile(x:59, y:167, z:8)
```

Get a TileCursor from a TileLayer for a zoom level and given x and y resolutions.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-124.73142200000001, 24.955967, -66.969849, 49.371735,
"EPSG:4326").reproject("EPSG:3857")
double resolutionX = bounds.width / 400
double resolutionY = bounds.height / 300
TileCursor tileCursor = mbtiles.tiles(bounds, resolutionX, resolutionY)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 4
# of tiles: 8
Bounds: (-1.5027296360910982E7,2504683.9006421305,-
5009098.786970327,7514051.701926393,EPSG:3857)
Width / # Columns: 4
Height / # Rows: 2
MinX: 2, MinY: 9, MaxX: 5, MaxY: 10

Tiles:
Tile(x:2, y:9, z:4)
Tile(x:3, y:9, z:4)
Tile(x:4, y:9, z:4)
Tile(x:5, y:9, z:4)
Tile(x:2, y:10, z:4)
Tile(x:3, y:10, z:4)
Tile(x:4, y:10, z:4)
Tile(x:5, y:10, z:4)

```

Get a TileCursor from a TileLayer for a Bounds and a given canvas width and height.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-102.875977, 45.433154, -96.481934, 48.118434,
"EPSG:4326").reproject("EPSG:3857")
int width = 400
int height = 400
TileCursor tileCursor = mbtiles.tiles(bounds, width, height)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 7
# of tiles: 6
Bounds: (-1.1583540944868883E7,5635538.7764447965,-
1.0644334922311947E7,6261709.751605329,EPSG:3857)
Width / # Columns: 3
Height / # Rows: 2
MinX: 27, MinY: 82, MaxX: 29, MaxY: 83

Tiles:
Tile(x:27, y:82, z:7)
Tile(x:28, y:82, z:7)
Tile(x:29, y:82, z:7)
Tile(x:27, y:83, z:7)
Tile(x:28, y:83, z:7)
Tile(x:29, y:83, z:7)

```

Get a TileCursor from a TileLayer around a Point at a given zoom level for a given canvas width and height.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Point point = Projection.transform(new Point(-102.875977, 45.433154), "EPSG:4326",
"EPSG:3857")
int zoomLevel = 12
int width = 400
int height = 400
TileCursor tileCursor = mbtiles.tiles(point, zoomLevel, width, height)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

Zoom Level: 12
of tiles: 9
Bounds: (-1.1466140192049265E7,5674674.46239233,-1.1436790003844362E7,5704026.226852979,EPSG:3857)
Width / # Columns: 3
Height / # Rows: 3
MinX: 876, MinY: 2628, MaxX: 878, MaxY: 2630

Tiles:
Tile(x:876, y:2628, z:12)
Tile(x:877, y:2628, z:12)
Tile(x:878, y:2628, z:12)
Tile(x:876, y:2629, z:12)
Tile(x:877, y:2629, z:12)
Tile(x:878, y:2629, z:12)
Tile(x:876, y:2630, z:12)
Tile(x:877, y:2630, z:12)
Tile(x:878, y:2630, z:12)

Get the tile coordinates from a TileLayer by Bounds and Grid

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)
Bounds bounds = new Bounds(20.798492, 36.402494, 22.765045, 37.223768, "EPSG:4326"
).reproject("EPSG:3857")
Grid grid = mbtiles.pyramid.grid(10)
Map<String, Integer> coords = mbtiles.getTileCoordinates(bounds, grid)
println "Min X = ${coords minX}"
println "Min Y = ${coords minY}"
println "Max X = ${coords maxX}"
println "Max Y = ${coords maxY}"

```

```

Min X = 571
Min Y = 623
Max X = 576
Max Y = 626

```

Get a Layer from a TileLayer representing the outline of the Tiles in the TileCursor.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)
Layer layer = mbtiles.getLayer(mbtiles.tiles(1))

```



id	z	x	y
0	1	0	0

id	z	x	y
1	1	1	0
2	1	0	1
3	1	1	1

Using Tile Layers

Get a TileLayer and make sure it is closed when done.

```
File file = new File("src/main/resources/tiles.mbtiles")
TileLayer.withTileLayer(new MBTiles(file)) { TileLayer tileLayer ->
    println tileLayer.name
    println tileLayer.proj
    println tileLayer.bounds
}
```

```
countries
EPSG:3857
(-2.003639514788131E7, -
2.0037471205137067E7, 2.003639514788131E7, 2.0037471205137067, EPSG:3857)
```

Get Tile Layer from a Map

Get an MBTiles TileLayer from a Map

```
TileLayer mbtiles = TileLayer.getTileLayer([type:'mbtiles', file:
'src/main/resources/tiles.mbtiles'])
println "${mbtiles.name} ${mbtiles.proj} ${mbtiles.bounds} ${mbtiles.pyramid}"
```

```
countries EPSG:3857 (-2.003639514788131E7, -
2.0037471205137067E7, 2.003639514788131E7, 2.0037471205137067, EPSG:3857)
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.003639514788131E7, -
2.0037471205137067E7, 2.003639514788131E7, 2.0037471205137067, EPSG:3857),
origin:BOTTOM_LEFT, tileSize:256, tileHeight:256)
```

Get an GeoPackage TileLayer from a Map

```
TileLayer geopackage = TileLayer.getTileLayer([type: 'geopackage', name: 'world',
file: 'src/main/resources/tiles.gpkg'])
println "${geopackage.name} ${geopackage.proj} ${geopackage.bounds}
${geopackage.pyramid}"
```

```
world EPSG:4326 (-179.99,-89.99,179.99,89.99,EPSC:4326)
geoscript.layer.Pyramid(proj:EPSG:4326, bounds:(-179.99,-
89.99,179.99,89.99,EPSC:4326), origin:TOP_LEFT, tileWidth:256, tileHeight:256)
```

Get an TMS TileLayer from a Map

```
TileLayer tms = TileLayer.getTileLayer([type: 'tms', file: 'src/main/resources/tms',
format: 'png', pyramid: 'globalmercator'])
println "${tms.name} ${tms.proj} ${tms.bounds} ${tms.pyramid}"
```

```
tms EPSG:3857 (-2.003639514788131E7,-
2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSC:3857)
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.003639514788131E7,-
2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSC:3857),
origin:BOTTOM_LEFT, tileWidth:256, tileHeight:256)
```

Get an OSM TileLayer from a Map

```
TileLayer osm = TileLayer.getTileLayer([type: 'osm', url:
'http://a.tile.openstreetmap.org'])
println "${osm.name} ${osm.proj} ${osm.bounds} ${osm.pyramid}"
```

```
OSM EPSG:3857 (-2.003639514788131E7,-
2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSC:3857)
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.003639514788131E7,-
2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSC:3857),
origin:TOP_LEFT, tileWidth:256, tileHeight:256)
```

Get an PBF Vector TileLayer from a Map

```
TileLayer pbf = TileLayer.getTileLayer([type: 'vectortiles', name: 'world', file:
'src/main/resources/pbf', format: 'pbf', pyramid: 'GlobalMercator'])
println "${pbf.name} ${pbf.proj} ${pbf.bounds} ${pbf.pyramid}"
```

```
world EPSG:3857 (-2.003639514788131E7,-
2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSC:3857)
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.003639514788131E7,-
2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSC:3857),
origin:BOTTOM_LEFT, tileWidth:256, tileHeight:256)
```

Get an UTF TileLayer from a Map

```
TileLayer utf = TileLayer.getTileLayer([type: 'utfgrid', file: 'src/main/resources/utf'])
println "${utf.name} ${utf.proj} ${utf.bounds} ${utf.pyramid}"
```

```
utf EPSG:3857 (-2.003639514788131E7,-2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSG:3857)
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.003639514788131E7,-2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSG:3857),
origin:TOP_LEFT, tileSize:256, tileHeight:256)
```

Get Tile Layer from a String

Get an MBTiles TileLayer from a String

```
TileLayer mbtiles = TileLayer.getTileLayer("type=mbtiles
file=src/main/resources/tiles.mbtiles")
println "${mbtiles.name} ${mbtiles.proj} ${mbtiles.bounds} ${mbtiles.pyramid}"
```

```
countries EPSG:3857 (-2.003639514788131E7,-2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSG:3857)
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.003639514788131E7,-2.0037471205137067E7,2.003639514788131E7,2.0037471205137067,EPSG:3857),
origin:BOTTOM_LEFT, tileSize:256, tileHeight:256)
```

Get an GeoPackage TileLayer from a String

```
TileLayer geopackage = TileLayer.getTileLayer("type=geopackage name=world
file=src/main/resources/tiles.gpkg")
println "${geopackage.name} ${geopackage.proj} ${geopackage.bounds}
${geopackage.pyramid}"
```

```
world EPSG:4326 (-179.99,-89.99,179.99,89.99,EPSG:4326)
geoscript.layer.Pyramid(proj:EPSG:4326, bounds:(-179.99,-89.99,179.99,89.99,EPSG:4326), origin:TOP_LEFT, tileSize:256, tileHeight:256)
```

Get an TMS TileLayer from a String

```
TileLayer tms = TileLayer.getTileLayer("type=tms file=src/main/resources/tms
format=png pyramid=globalmercator")
println "${tms.name} ${tms.proj} ${tms.bounds} ${tms.pyramid}"
```

```
tms EPSG:3857 (-2.003639514788131E7,-  
2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPSC:3857)  
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.003639514788131E7,-  
2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPSC:3857),  
origin:BOTTOM_LEFT, tileSize:256, tileHeight:256)
```

Get an OSM TileLayer from a String

```
TileLayer osm = TileLayer.getTileLayer("type=osm url=http://a.tile.openstreetmap.org")  
println "${osm.name} ${osm.proj} ${osm.bounds} ${osm.pyramid}"
```

```
OSM EPSG:3857 (-2.003639514788131E7,-  
2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPSC:3857)  
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.003639514788131E7,-  
2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPSC:3857),  
origin:TOP_LEFT, tileSize:256, tileHeight:256)
```

Get an PBF Vector TileLayer from a String

```
TileLayer pbf = TileLayer.getTileLayer("type=vectortiles name=world  
file=src/main/resources/pbf format=pbf pyramid=GlobalMercator")  
println "${pbf.name} ${pbf.proj} ${pbf.bounds} ${pbf.pyramid}"
```

```
world EPSG:3857 (-2.003639514788131E7,-  
2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPSC:3857)  
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.003639514788131E7,-  
2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPSC:3857),  
origin:BOTTOM_LEFT, tileSize:256, tileHeight:256)
```

Get an UTF TileLayer from a String

```
TileLayer utf = TileLayer.getTileLayer("type=utfgrid file=src/main/resources/utf")  
println "${utf.name} ${utf.proj} ${utf.bounds} ${utf.pyramid}"
```

```
utf EPSG:3857 (-2.003639514788131E7,-  
2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPSC:3857)  
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.003639514788131E7,-  
2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPSC:3857),  
origin:TOP_LEFT, tileSize:256, tileHeight:256)
```

TileRenderer

TileRenderers know how to create a Tile for a given Bounds. GeoScript has TileRenderer for creating images, vector tiles, and utfgrids.

Get default TileRenderer

Get a default TileRenderer for a TileLayer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")

TileLayer tileLayer = TileLayer.getTileLayer([type:'mbtiles', file:
'target/countries.mbtiles'])
TileRenderer tileRenderer = TileLayer.getTileRenderer(tileLayer, [ocean, countries])
Pyramid pyramid = tileLayer.pyramid
Tile tile = tileLayer.get(0,0,0)
Bounds bounds = pyramid.bounds(tile)
tile.data = tileRenderer.render(bounds)
tileLayer.put(tile)
```



ImageTileRenderer

Use an ImageTileRenderer to create an image Tile.

```

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")

TileLayer tileLayer = TileLayer.getTileLayer([type:'mbtiles', file:
'target/countries.mbtiles'])
ImageTileRenderer tileRenderer = new ImageTileRenderer(tileLayer, [ocean, countries])
Pyramid pyramid = tileLayer.pyramid
Tile tile = tileLayer.get(0,0,0)
Bounds bounds = pyramid.bounds(tile)
tile.data = tileRenderer.render(bounds)
tileLayer.put(tile)

```



RasterTileRenderer

Use an RasterTileRenderer to create a image Tiles from a single Raster.

```

File dir = new File("target/earthtiles")
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
TileLayer tileLayer = new TMS("Earth", "png", dir, pyramid)

Format format = new GeoTIFF(new File('src/main/resources/earth.tif'))
Raster raster = format.read()

// Resize and Reproject Raster to Web Mercator
Projection latLonProj = new Projection("EPSG:4326")
Projection mercatorProj = new Projection("EPSG:3857")
Bounds latLonBounds = new Bounds(-179.99, -85.0511, 179.99, 85.0511, latLonProj)
Raster webMercatorRaster = raster.resample(bbox: latLonBounds).reproject(mercatorProj)

RasterTileRenderer tileRenderer = new RasterTileRenderer(webMercatorRaster)
GeneratingTileLayer generatingTileLayer = new GeneratingTileLayer(tileLayer,
tileRenderer)
Tile tile = generatingTileLayer.get(0, 0, 0)

```



VectorTileRenderer

Use an VectorTileRenderer to create a Vector Tile.

```

Workspace workspace = new Directory("src/main/resources/shapefiles")
Layer countries = workspace.get("countries")

File directory = new File("target/country_geojson_tiles")
directory.mkdir()

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
VectorTiles tileLayer = new VectorTiles(
    "countries",
    directory,
    pyramid,
    "geojson"
)

GeoJSONWriter writer = new GeoJSONWriter()
VectorTileRenderer tileRenderer = new VectorTileRenderer(writer, countries, [
countries.schema.get("NAME")])
Tile tile = tileLayer.get(0,0,0)
Bounds bounds = pyramid.bounds(tile)
tile.data = tileRenderer.render(bounds)
tileLayer.put(tile)

```

```
{
  "type": "FeatureCollection", "features": [{"type": "Feature", "geometry": {"type": "MultiPolygon", "coordinates": [[[[-16.0671, 180], [-16.5552, 180], [-16.8014, 179.3641], [-16.7251, 178.7251], [-17.012, 178.5968], [-16.6392, 179.0966], [-16.434, 179.4135], [-16.3791, 180], [-16.0671], [[-17.1256, 178.1256], [-17.5048, 178.3736], [-17.3399, 178.7181], [-17.6285, 178.5527], [-18.1506, 177.9327], [-18.288, 177.3815], [-18.1643, 177.285], [-17.7246, 177.6709], [-17.3811, 178.1256], [-17.5048], [[-179.7933, -16.0209], [-179.9174, -16.5018], [-180, -16.5552], [-180, -16.0671], [-179.7933, -16.0209]]]}}, "properties": {"NAME": "Fiji", "id": "fid-5c38dcc0_18b82f0ec42_-73e1"}, {"type": "Feature", "geometry": {"type": "MultiPolygon", "coordinates": [[[[-1.095, 33.9037], [34.0726, -1.0598], [37.6987, -3.097], [37.7669, -3.6771], [39.2022, -4.6768], [38.7405, -5.9089], [38.7998, -6.4757], [39.44, -6.84], [39.47, -7.1], [39.1947, -7.7039], [39.252, -8.0078], [39.1865, -8.4855], [39.5357, -9.1124], [39.9]]]}}
}
```

PbfVectorTileRenderer

Use an PbfVectorTileRenderer to create a Vector Tile.

```

Workspace workspace = new Directory("src/main/resources/shapefiles")
Layer countries = workspace.get("countries")

File directory = new File("target/country_pbf_tiles")
directory.mkdir()

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
pyramid.origin = Pyramid.Origin.TOP_LEFT
VectorTiles tileLayer = new VectorTiles(
    "countries",
    directory,
    pyramid,
    "pbf"
)

PbfVectorTileRenderer tileRenderer = new PbfVectorTileRenderer(countries, [countries
    .schema.get("NAME")])
Tile tile = tileLayer.get(0,0,0)
Bounds bounds = pyramid.bounds(tile)
tile.data = tileRenderer.render(bounds)
tileLayer.put(tile)

```

UTFGridTileRenderer

Use an UTFGridTileRenderer to create a UTFGrid Tile.

```

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")

File directory = new File("target/countryUtfGrid")
directory.mkdir()
UTFGrid tileLayer = new UTFGrid(directory)

UTFGridTileRenderer tileRenderer = new UTFGridTileRenderer(tileLayer, countries,
[countries.schema.get("NAME")])
Pyramid pyramid = tileLayer.pyramid
Tile tile = tileLayer.get(0,0,0)
Bounds bounds = pyramid.bounds(tile)
tile.data = tileRenderer.render(bounds)
tileLayer.put(tile)

```

```
{
  "grid": [
    "
    "
    "
    "
    "
      !      ###      "
      !!!!!  #####      "
      !!!!!#####      "
      !!!!!!#####      "
      !!!!!!#####      "
      !  !!! #####      %%      $      "
      !  !!! #####      %      $$      "
      !  !!! #####      %      $      "
      !  !!! #####      %      $      "
      !!!!!!  #####      "
  ]
}
```

TileCursor

A TileCursor is a way to get a collection of Tiles from a TileLayer.

Get a TileCursor with all of the Tiles from a TileLayer in a zoom level.

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

long zoomLevel = 1
TileCursor tileCursor = new TileCursor(mbtiles, zoomLevel)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX}, MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
  println t
}
```

```

Zoom Level: 1
# of tiles: 4
Bounds: (-2.003639514788131E7,-
2.003747120513706E7,2.003639514788131E7,2.003747120513706E7,EPGS:3857)
Width / # Columns: 2
Height / # Rows: 2
MinX: 0, MinY: 0, MaxX: 1, MaxY: 1

Tiles:
Tile(x:0, y:0, z:1)
Tile(x:1, y:0, z:1)
Tile(x:0, y:1, z:1)
Tile(x:1, y:1, z:1)

```

Get a TileCursor with Tiles from a TileLayer in a zoom level between min and max x and y coordinates.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

long zoomLevel = 4
long minX = 2
long minY = 4
long maxX = 5
long maxY = 8
TileCursor tileCursor = new TileCursor(mbtiles, zoomLevel, minX, minY, maxX, maxY)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```
Zoom Level: 4
# of tiles: 20
Bounds: (-1.5027296360910982E7, -1.0018735602568535E7, -
5009098.786970327, 2504683.900642129, EPSG:3857)
Width / # Columns: 4
Height / # Rows: 5
MinX: 2, MinY: 4, MaxX: 5, MaxY: 8
```

Tiles:

```
Tile(x:2, y:4, z:4)
Tile(x:3, y:4, z:4)
Tile(x:4, y:4, z:4)
Tile(x:5, y:4, z:4)
Tile(x:2, y:5, z:4)
Tile(x:3, y:5, z:4)
Tile(x:4, y:5, z:4)
Tile(x:5, y:5, z:4)
Tile(x:2, y:6, z:4)
Tile(x:3, y:6, z:4)
Tile(x:4, y:6, z:4)
Tile(x:5, y:6, z:4)
Tile(x:2, y:7, z:4)
Tile(x:3, y:7, z:4)
Tile(x:4, y:7, z:4)
Tile(x:5, y:7, z:4)
Tile(x:2, y:8, z:4)
Tile(x:3, y:8, z:4)
Tile(x:4, y:8, z:4)
Tile(x:5, y:8, z:4)
```

Get a TileCursor with Tiles from a TileLayer in a zoom level for a given Bounds.

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-102.875977, 45.433154, -96.481934, 48.118434,
"EPSG:4326").reproject("EPSG:3857")
int zoomLevel = 8
TileCursor tileCursor = new TileCursor(mbtiles, bounds, zoomLevel)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}
```

```
Zoom Level: 8
# of tiles: 24
Bounds: (-1.1583540944868883E7, 5635538.7764447965, -
1.0644334922311947E7, 6261709.751605326, EPSG:3857)
Width / # Columns: 6
Height / # Rows: 4
MinX: 54, MinY: 164, MaxX: 59, MaxY: 167
```

Tiles:

```
Tile(x:54, y:164, z:8)
Tile(x:55, y:164, z:8)
Tile(x:56, y:164, z:8)
Tile(x:57, y:164, z:8)
Tile(x:58, y:164, z:8)
Tile(x:59, y:164, z:8)
Tile(x:54, y:165, z:8)
Tile(x:55, y:165, z:8)
Tile(x:56, y:165, z:8)
Tile(x:57, y:165, z:8)
Tile(x:58, y:165, z:8)
Tile(x:59, y:165, z:8)
Tile(x:54, y:166, z:8)
Tile(x:55, y:166, z:8)
Tile(x:56, y:166, z:8)
Tile(x:57, y:166, z:8)
Tile(x:58, y:166, z:8)
Tile(x:59, y:166, z:8)
Tile(x:54, y:167, z:8)
Tile(x:55, y:167, z:8)
Tile(x:56, y:167, z:8)
Tile(x:57, y:167, z:8)
Tile(x:58, y:167, z:8)
Tile(x:59, y:167, z:8)
```

Get a TileCursor with Tiles from a TileLayer in a zoom level for a given x and y resolution.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-124.73142200000001, 24.955967, -66.969849, 49.371735,
"EPSG:4326").reproject("EPSG:3857")
double resolutionX = bounds.width / 400
double resolutionY = bounds.height / 300
TileCursor tileCursor = new TileCursor(mbtiles, bounds, resolutionX, resolutionY)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 4
# of tiles: 8
Bounds: (-1.5027296360910982E7,2504683.9006421305,-
5009098.786970327,7514051.701926393,EPSG:3857)
Width / # Columns: 4
Height / # Rows: 2
MinX: 2, MinY: 9, MaxX: 5, MaxY: 10

Tiles:
Tile(x:2, y:9, z:4)
Tile(x:3, y:9, z:4)
Tile(x:4, y:9, z:4)
Tile(x:5, y:9, z:4)
Tile(x:2, y:10, z:4)
Tile(x:3, y:10, z:4)
Tile(x:4, y:10, z:4)
Tile(x:5, y:10, z:4)

```

Get a TileCursor with Tiles from a TileLayer within a Bounds for a given canvas width and height.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-102.875977, 45.433154, -96.481934, 48.118434,
"EPSG:4326").reproject("EPSG:3857")
int width = 400
int height = 400
TileCursor tileCursor = new TileCursor(mbtiles, bounds, width, height)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 7
# of tiles: 6
Bounds: (-1.1583540944868883E7,5635538.7764447965,-
1.0644334922311947E7,6261709.751605329,EPSG:3857)
Width / # Columns: 3
Height / # Rows: 2
MinX: 27, MinY: 82, MaxX: 29, MaxY: 83

Tiles:
Tile(x:27, y:82, z:7)
Tile(x:28, y:82, z:7)
Tile(x:29, y:82, z:7)
Tile(x:27, y:83, z:7)
Tile(x:28, y:83, z:7)
Tile(x:29, y:83, z:7)

```

Get a TileCursor with Tiles from a TileLayer around a Point at a given zoom level for a given canvas width and height.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-102.875977, 45.433154, -96.481934, 48.118434,
"EPSG:4326").reproject("EPSG:3857")
int width = 400
int height = 400
TileCursor tileCursor = new TileCursor(mbtiles, bounds, width, height)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 7
# of tiles: 6
Bounds: (-1.1583540944868883E7,5635538.7764447965,-
1.0644334922311947E7,6261709.751605329,EPSG:3857)
Width / # Columns: 3
Height / # Rows: 2
MinX: 27, MinY: 82, MaxX: 29, MaxY: 83

Tiles:
Tile(x:27, y:82, z:7)
Tile(x:28, y:82, z:7)
Tile(x:29, y:82, z:7)
Tile(x:27, y:83, z:7)
Tile(x:28, y:83, z:7)
Tile(x:29, y:83, z:7)

```

TMS

Access a TileLayer from an TMS directory

```
File dir = new File("src/main/resources/tms")
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
TMS tms = new TMS(
    "world", ①
    "png", ②
    dir, ③
    pyramid ④
)
```

- ① Name
- ② Image type
- ③ Directory
- ④ Pyramid



MBTiles

Access a TileLayer from an MBTiles file

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)
```



DBTiles

Access a TileLayer from an DBTiles H2 database


```
File file = new File("src/main/resources/h2dbtiles/world_tiles.db")
DBTiles dbtiles = new DBTiles("jdbc:h2:${file}", "org.h2.Driver", "World", "World wide
tiles")
```



GeoPackage

Access a TileLayer with a Global Geodetic Pyramid from an GeoPackage file

```
File file = new File("src/main/resources/data.gpkg")
geoscript.layer.GeoPackage geopackage = new geoscript.layer.GeoPackage(file, "world")
```

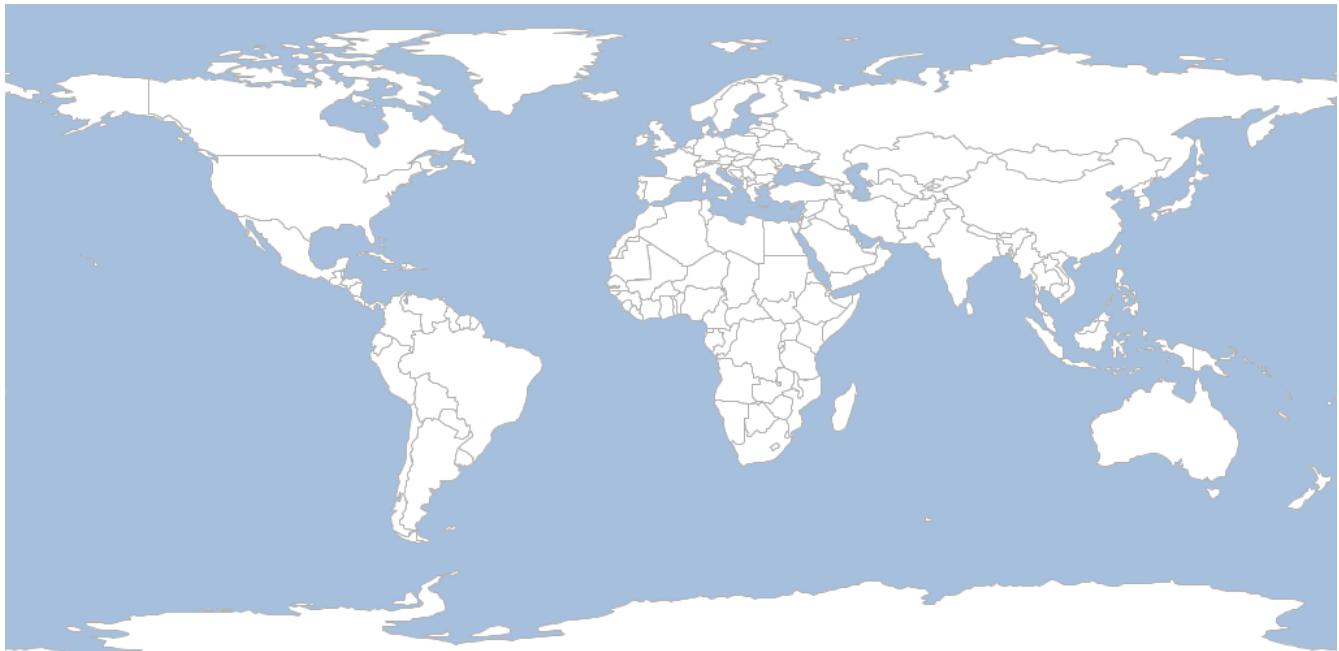

Access a TileLayer with a Global Mercator Pyramid from an GeoPackage file


```
File file = new File("src/main/resources/data.gpkg")
geoscript.layer.GeoPackage geopackage = new geoscript.layer.GeoPackage(file,
"world_mercator")
```



UTFGrid

Access a TileLayer from an UTFGrid directory

```
File dir = new File("src/main/resources/utf")
UTFGrid utfGrid = new UTFGrid(dir)
```

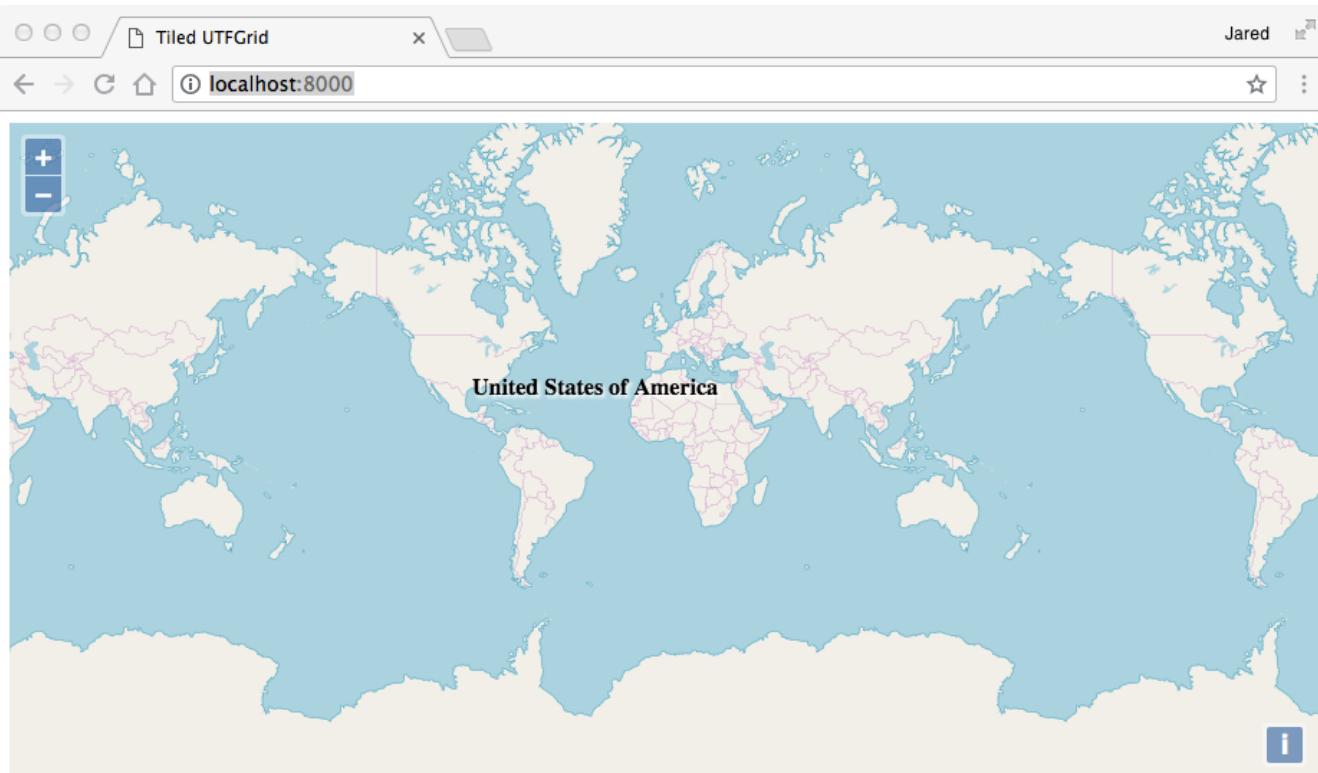

VectorTiles

Access a TileLayer from an VectorTiles directory


```
File dir = new File("src/main/resources/pbf")
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
VectorTiles vectorTiles = new VectorTiles(
    "World", ①
    dir,      ②
    pyramid, ③
    "pbf"    ④
)
```

① Name

② Directory

③ Pyramid

④ Type

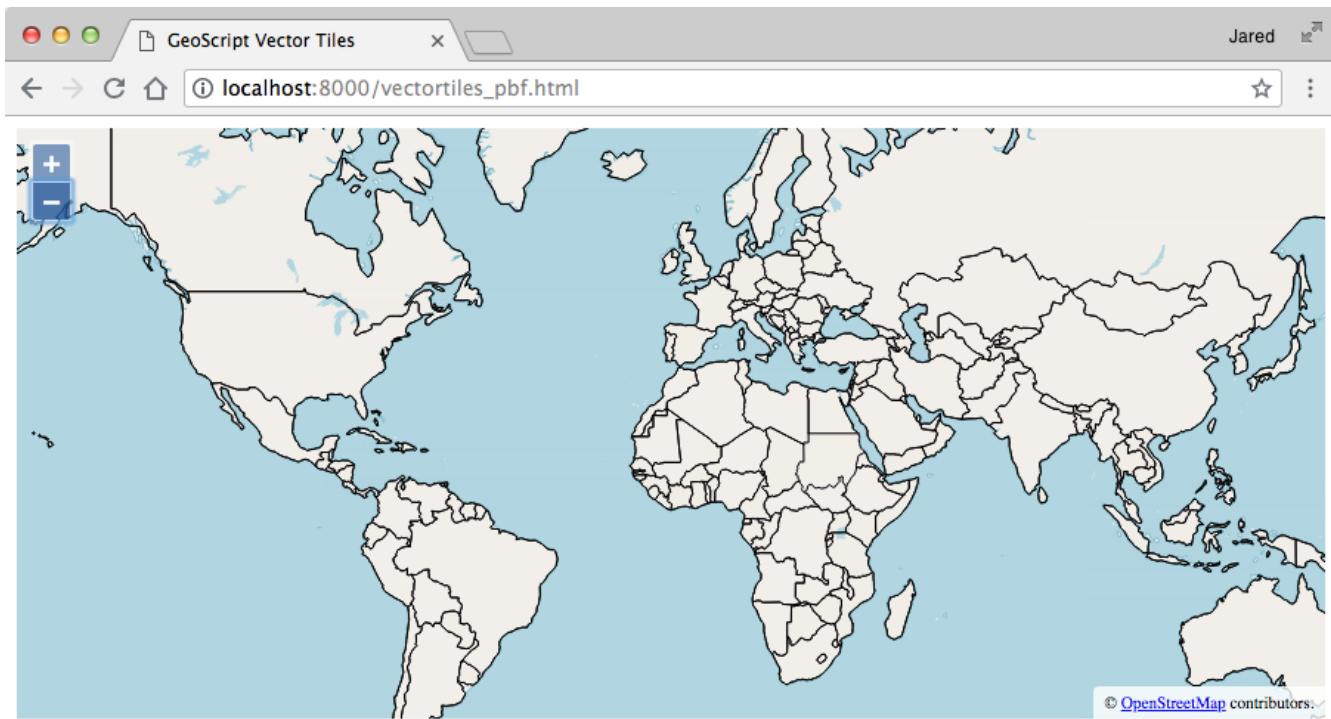

Access a TileLayer from an VectorTiles MBTiles file


```
File file = new File("src/main/resources/vectortiles.mbtiles")
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
VectorTiles vectorTiles = new VectorTiles(
    "World", ①
    file,     ②
    pyramid, ③
    "pbf"    ④
)
```

① Name

② MBTiles File

③ Pyramid

④ Type

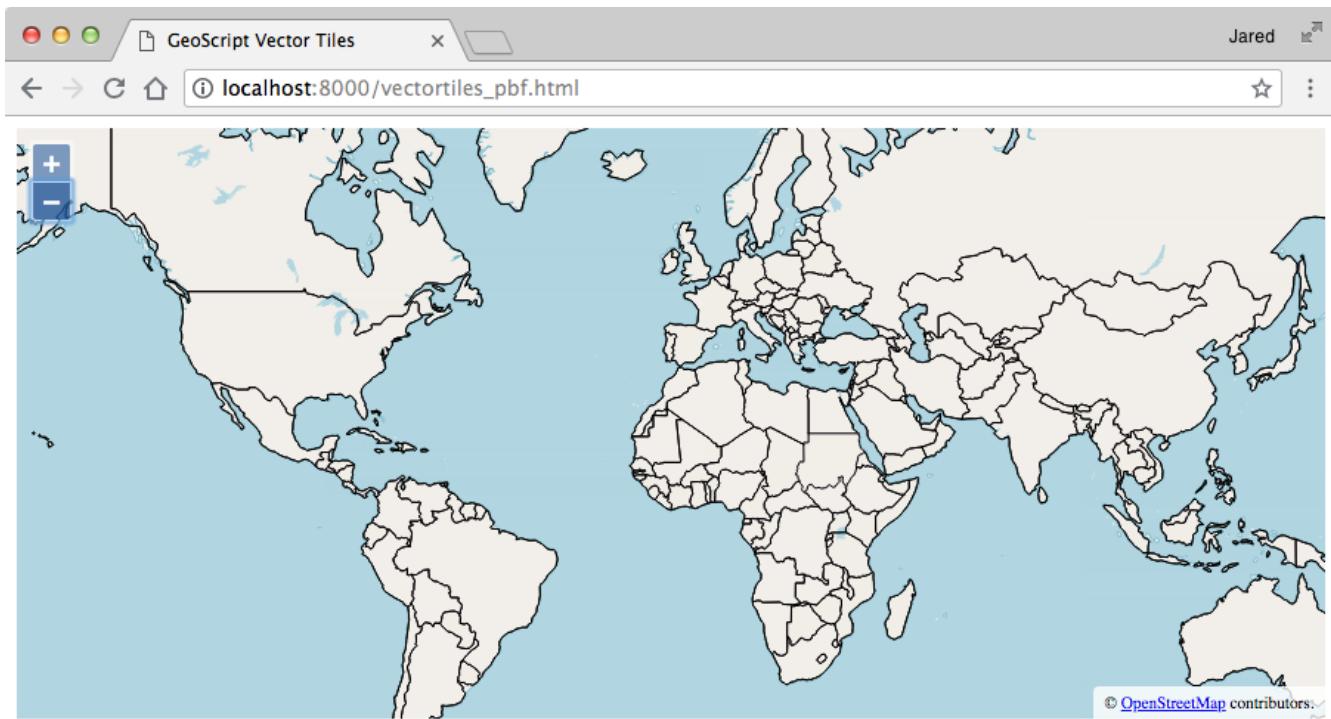

Generating TileLayer

A GeneratingTileLayer can create tiles on demand when they are accessed.

```
File dir = new File("target/worldtiles")
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
TileLayer tileLayer = new TMS("World", "png", dir, pyramid)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
TileRenderer tileRenderer = new ImageTileRenderer(tileLayer, [ocean, countries])


GeneratingTileLayer generatingTileLayer = new GeneratingTileLayer(tileLayer,
tileRenderer)
Tile tile = generatingTileLayer.get(0, 0, 0)
```



OSM


Create a TileLayer for OSM tiles.

```
OSM osm = new OSM()
```

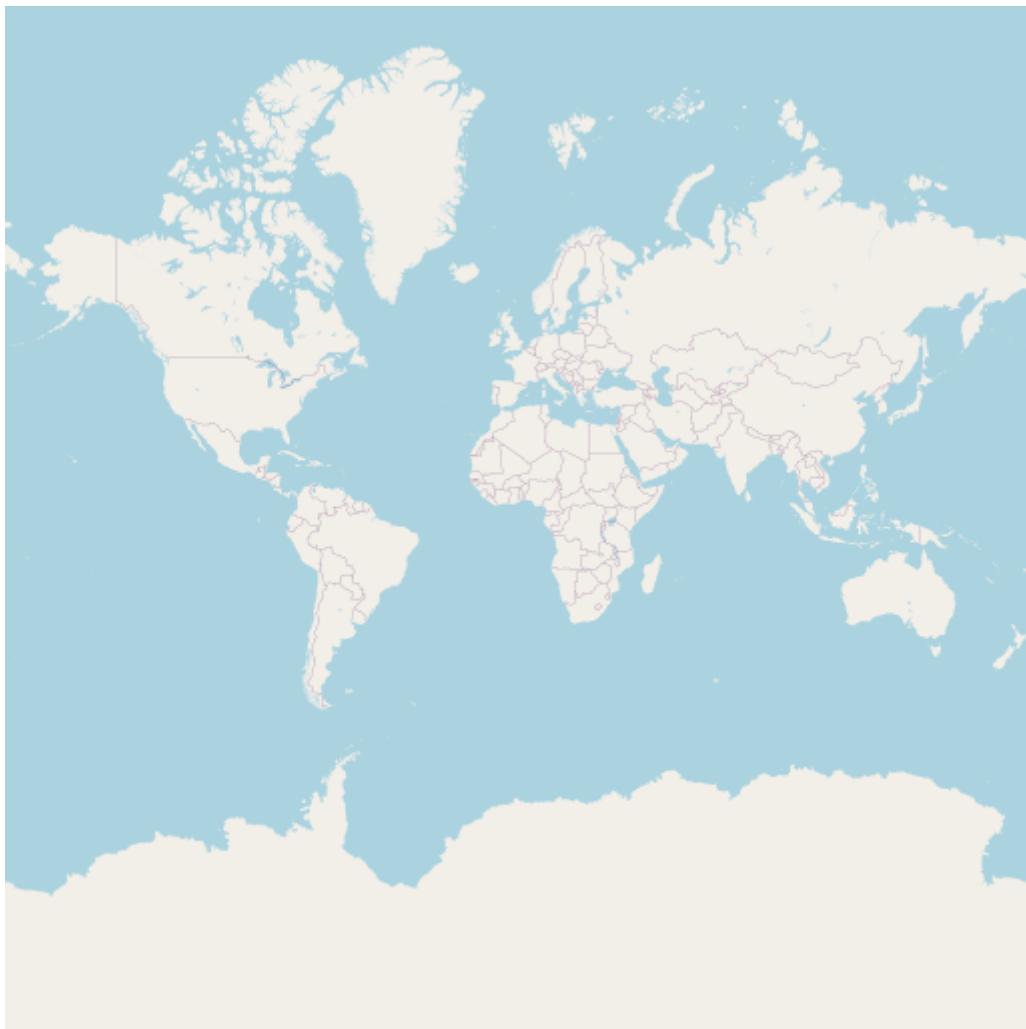

Create a TileLayer for OSM tiles with custom urls.

```
OSM osm = new OSM("OSM", [  
    "http://a.tile.openstreetmap.org",  
    "http://b.tile.openstreetmap.org",  
    "http://c.tile.openstreetmap.org"  
])
```

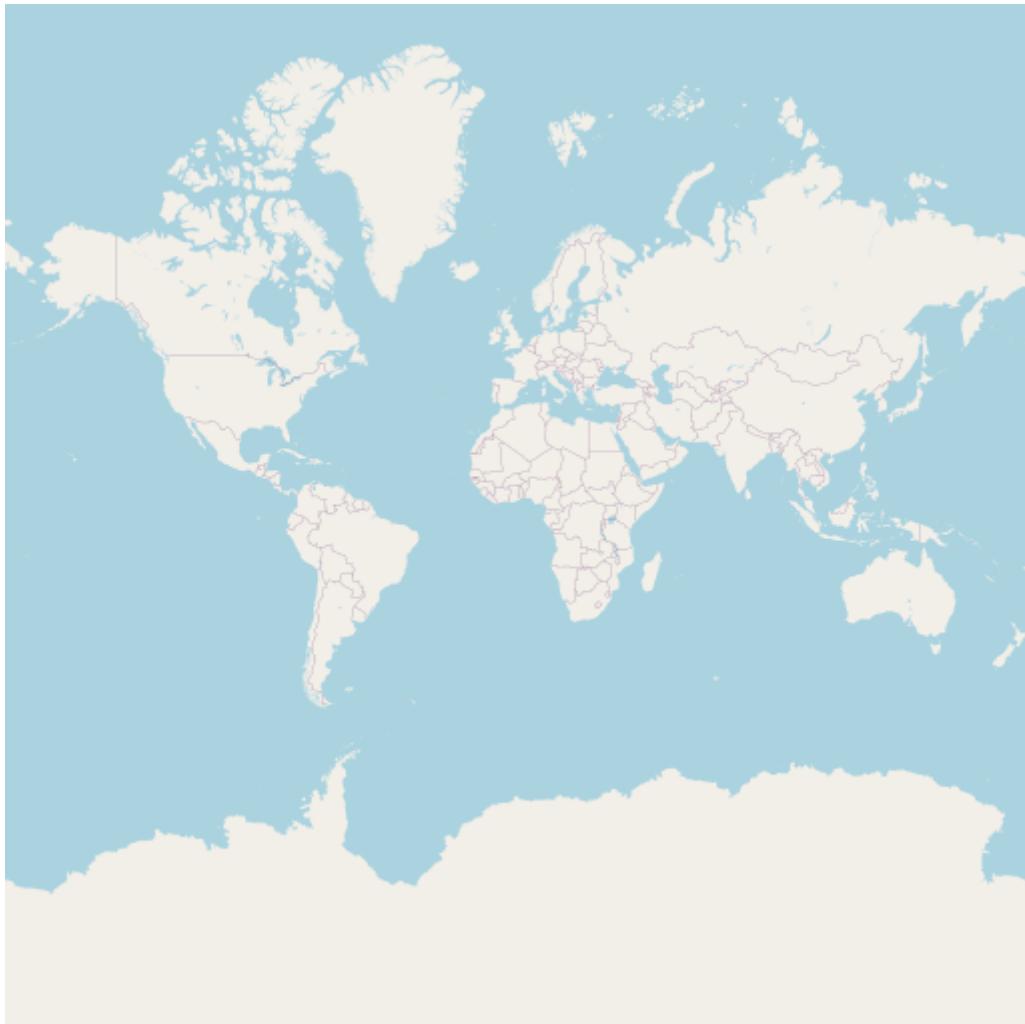

Standard OSM

Create a TileLayer for OSM tiles.

```
OSM osm = OSM.getWellKnownOSM("osm")
```



Stamen Toner

Create a TileLayer for OSM Stamen Toner tiles.

```
OSM osm = OSM.getWellKnownOSM("stamen-toner")
```

Stamen Toner Lite

Create a TileLayer for OSM Stamen Toner Lite tiles.

```
OSM osm = OSM.getWellKnownOSM("stamen-toner-lite")
```

Stamen Water Color

Create a TileLayer for OSM Stamen Water Color tiles.

```
OSM osm = OSM.getWellKnownOSM("stamen-watercolor")
```

Stamen Terrain

Create a TileLayer for OSM Stamen Terrain tiles.

```
OSM osm = OSM.getWellKnownOSM("stamen-terrain")
```

WikiMedia

Create a TileLayer for OSM WikiMedia tiles.

```
OSM osm = OSM.getWellKnownOSM("wikimedia")
```




USGS National Map

Create a TileLayer for USGS National Map tiles.

Topo

```
USGSTileLayer tileLayer = USGSTileLayer.getWellKnown("usgs-topo")
```

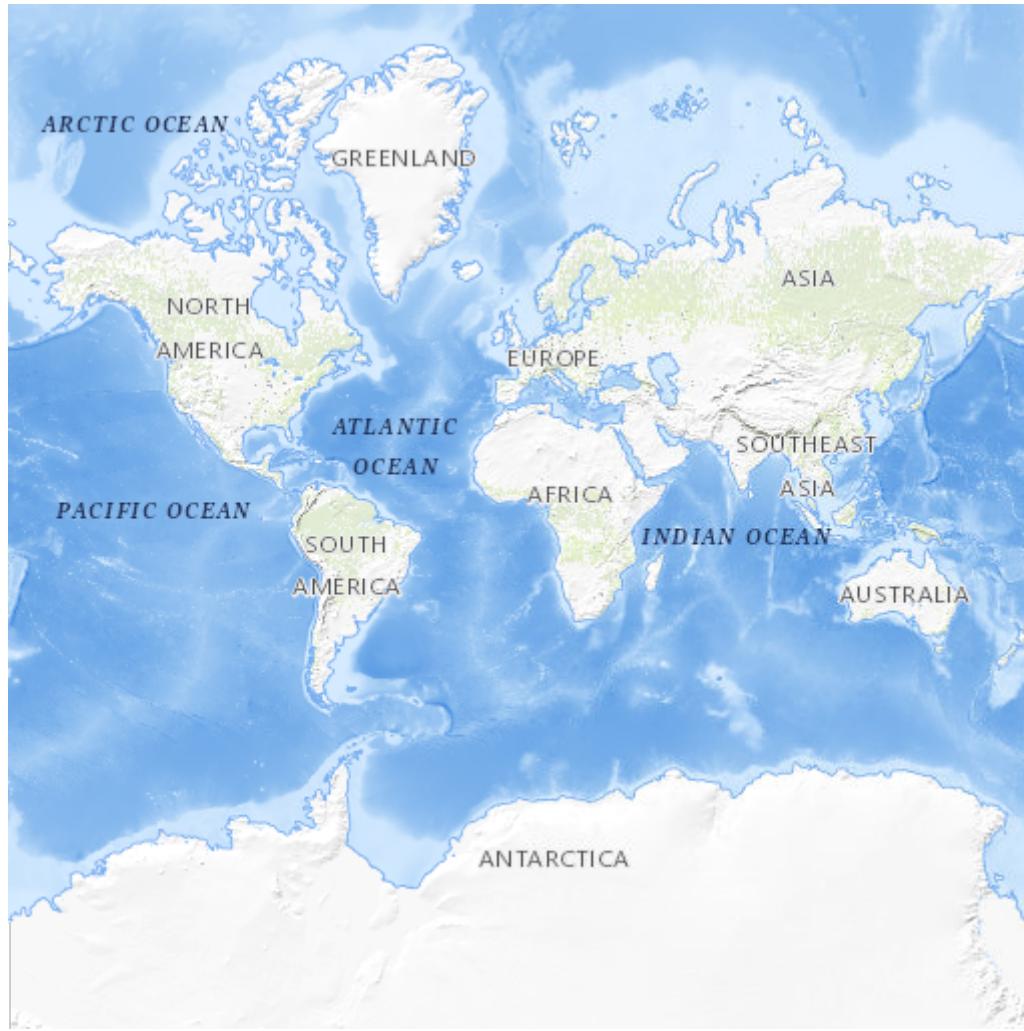

Shaded Relief

```
USGSTileLayer tileLayer = USGSTileLayer.getWellKnown("usgs-shadedrelief")
```




Imagery

```
USGSTileLayer tileLayer = USGSTileLayer.getWellKnown("usgs-imagery")
```



Imagery & Topo

```
USGSTileLayer tileLayer = USGSTileLayer.getWellKnown("usgs-imagerytopo")
```

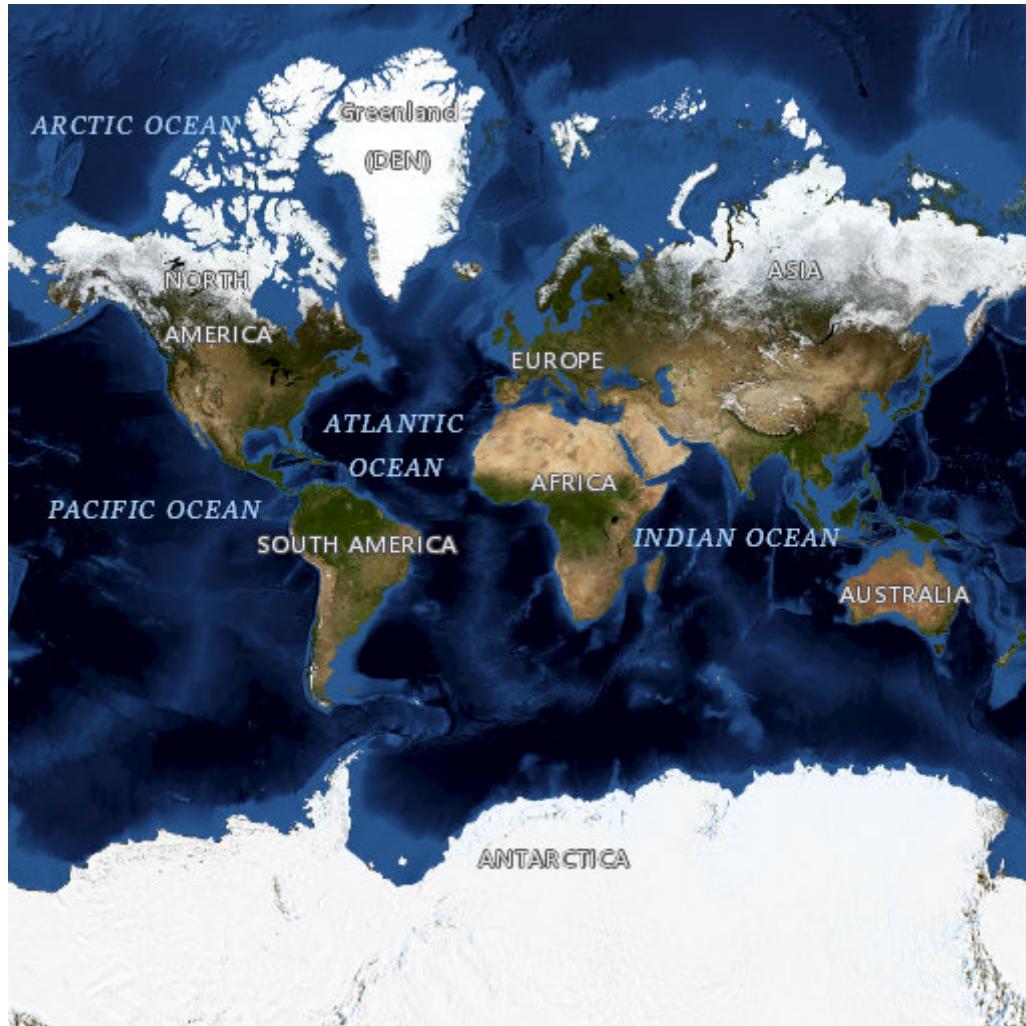

Hydro

```
USGSTileLayer tileLayer = USGSTileLayer.getWellKnown("usgs-hydro")
```



Carto Recipes

The Carto classes are in the [geoscript.carto](#) package.

The Carto package contains classes for creating cartographic documents. All items are added to the document with x and y coordinates whose origin is the upper left and width and a height.

Items

Adding a Map


Add a map

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height -
1)
            .fillColor(Color.WHITE)
        )
        .map(new MapItem(20, 20, pageSize.width - 40, pageSize.height - 40).map
(map))
        .build(outputStream)
}
```

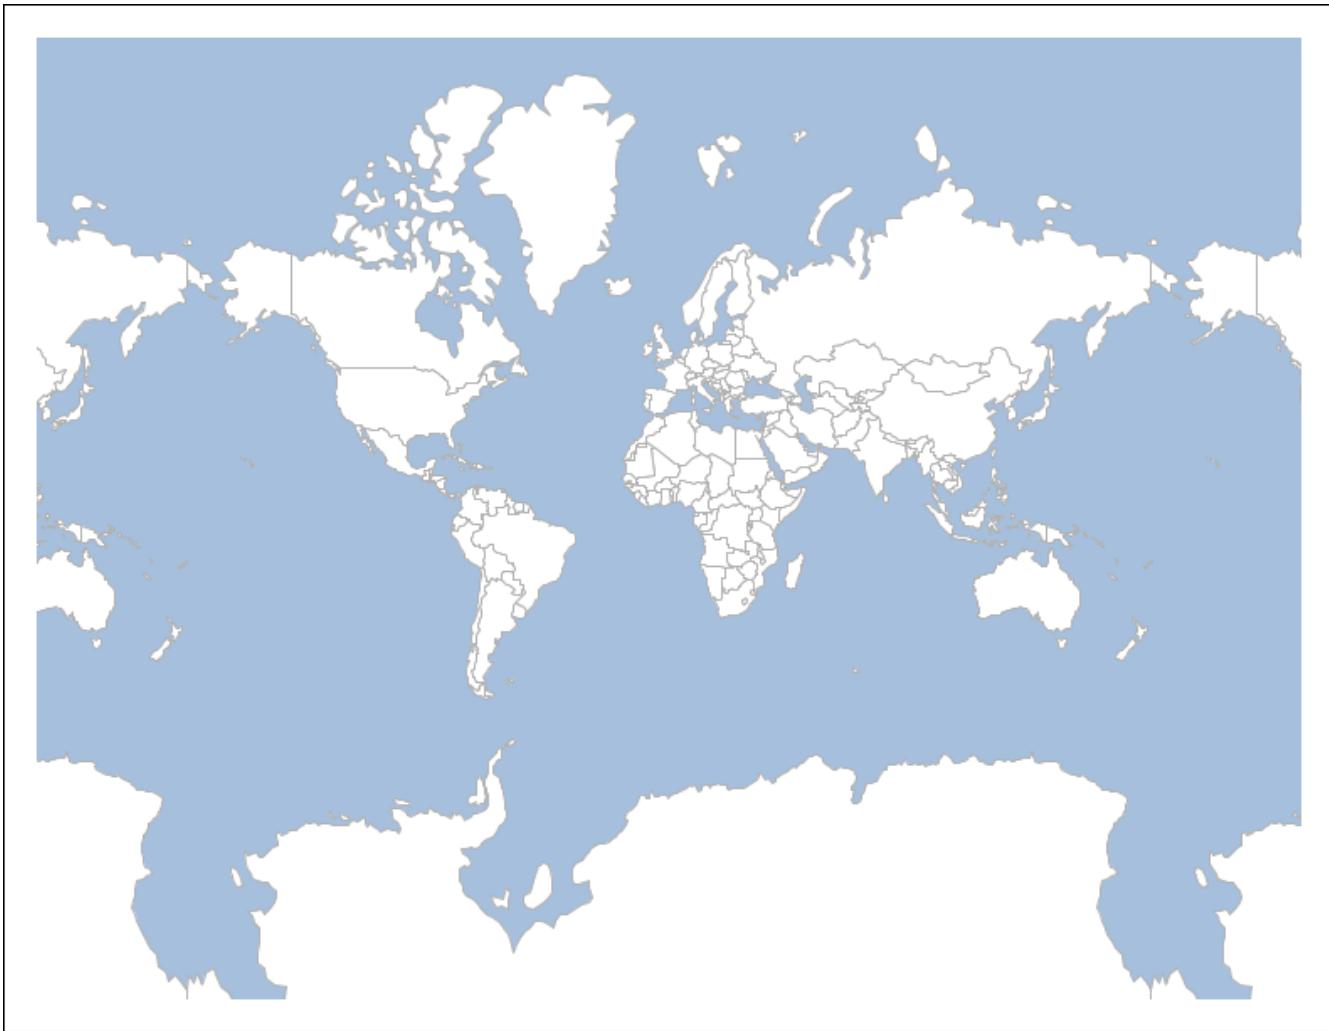

Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
map	geoscript.render.Map	The Map to display

Adding an Overview Map


Add an overview map

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-166.436348, 6.574916, -12.451973, 60.715022, "EPSG:4326"
).reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)
Map overViewMap = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height - 1)
            .fillColor(Color.WHITE)
        )
        .map(new MapItem(20, 20, pageSize.width - 40, pageSize.height - 40).map(map))
        .rectangle(new RectangleItem(20, 20, pageSize.width - 40, pageSize.height -
40))
        .overViewMap(new OverviewMapItem(40, pageSize.height - 240, 200, 200)
            .linkedMap(map)
            .overviewMap(overViewMap)
            .zoomIntoBounds(false)
        )
        .rectangle(new RectangleItem(40, pageSize.height - 240, 200,200))
        .build(outputStream)
    }
}
```

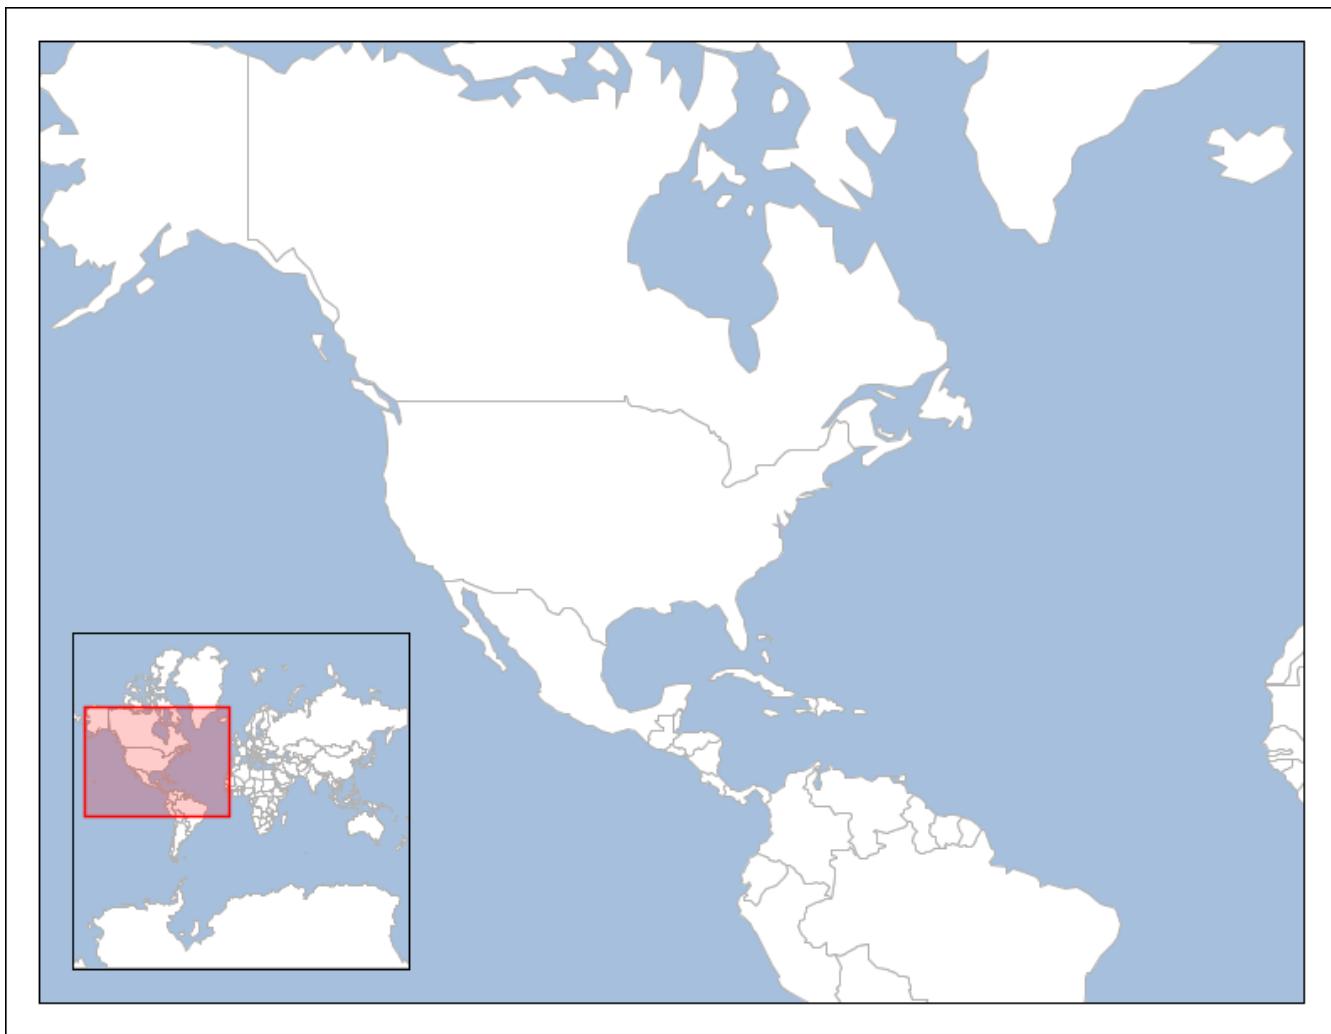

Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
overviewMap	geoscript.render.Map	The overview Map
linkedMap	geoscript.render.Map	The Map the overview Map is linked to
areaStyle	geoscript.style.Style	The GeoScript style to display the rectangle
zoomIntoBounds	boolean	Whether to zoom into the bounds of the linked Map or not
scaleFactor	double	The scale factor for expanding the linked Map Bounds

Adding a Text

Add text

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height -
1)
            .fillColor(Color.WHITE)
        )
        .text(new TextItem(20, 20, pageSize.width - 40, 60)
            .text("World Map")
            .font(new Font("Arial", Font.BOLD, 42))
            .verticalAlign(VerticalAlign.MIDDLE)
            .horizontalAlign(HorizontalAlign.CENTER)
        )
        .map(new MapItem(20, 80, pageSize.width - 40, pageSize.height - 100).map
(map))
            .build(outputStream)
    }
}
```

World Map



Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
text	String	The text to display
color	java.awt.Color	The text Color
font	java.awt.Font	The text font
horizontalAlign	HorizontalAlign (LEFT, CENTER, RIGHT)	The horizontal alignment
verticalAlign	VerticalAlign (TOP, MIDDLE, BOTTOM)	The vertical alignment

Adding a Rectangle

Add a rectangle

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height -
1))
            .fillColor(Color.WHITE)
        )
        .rectangle(new RectangleItem(10,10, pageSize.width - 20, pageSize.height -
20))
        .rectangle(new RectangleItem(20,20, pageSize.width - 40, 60))
        .rectangle(new RectangleItem(20,90, pageSize.width - 40, pageSize.height -
110))
            .text(new TextItem(20,20, pageSize.width - 40, 60)
                .text("World Map")
                .font(new Font("Arial", Font.BOLD, 32))
                .verticalAlign(VerticalAlign.MIDDLE)
                .horizontalAlign(HorizontalAlign.CENTER)
            )
            .map(new MapItem(30, 100, pageSize.width - 60, pageSize.height - 120).map
(map))
                .build(outputStream)
}
}
```

World Map



Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
strokeColor	java.awt.Color	The outline Color
fillColor	java.awt.Color	The fill Color
strokeWidth	float	The width of the stroke

Adding a North Arrow

Add a north arrow

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height - 1)
            .fillColor(Color.WHITE)
        )
        .map(new MapItem(20, 20, pageSize.width - 40, pageSize.height - 40).map(map))
        .northArrow(new NorthArrowItem(pageSize.width - 60, pageSize.height - 100, 40,
80)
            .font(new Font("Arial", Font.BOLD, 24))
            .drawText(true))
        .build(outputStream)
}

}
```



Adding a NESW North Arrow


Add a NESW north arrow

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height -
1)
            .fillColor(Color.WHITE)
        )
        .map(new MapItem(20, 20, pageSize.width - 40, pageSize.height - 40).map
(map))
            .northArrow(new NorthArrowItem(pageSize.width - 100, pageSize.height -
100, 80, 80)
                .style(NorthArrowStyle.NorthEastSouthWest)
                .font(new Font("Arial", Font.BOLD, 14))
                .drawText(true))
            .build(outputStream)
    }
}
```

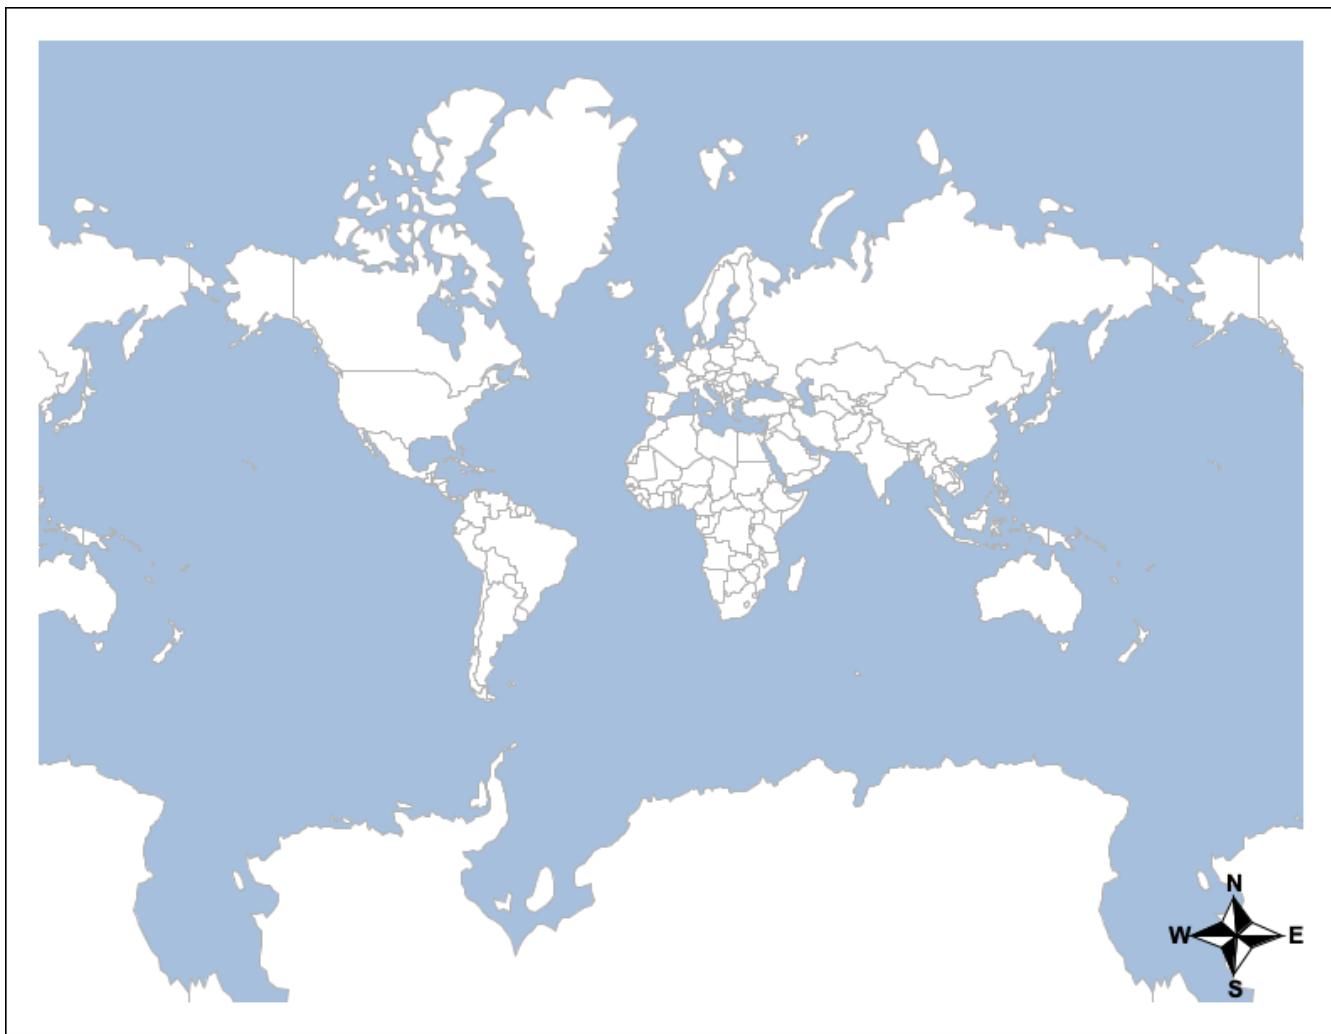

Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
fillColor1	java.awt.Color	The first Fill Color
strokeColor1	java.awt.Color	The first Stroke Color
fillColor2	java.awt.Color	The second Fill Color
strokeColor2	java.awt.Color	The second Stroke Color
strokeWidth	float	The width of the stroke
drawText	boolean	Whether to draw text (n,s,e,w) or not
font	java.awt.Font	The Font for the text
textColor	java.awt.Color	The text Color
style	NorthArrowStyle	The North Arrow style (North or NorthEastSouthWest)

Adding a Legend


Add a legend for a Map

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Layer places = workspace.get("places")
places.style = new Shape("red", 8, "star")
Layer rivers = workspace.get("rivers")
rivers.style = new Stroke("blue", 1)
Map map = new Map(
    layers: [ocean, countries, rivers, places],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height -
1)
            .fillColor(Color.WHITE)
        )
        .map(new MapItem(220, 20, pageSize.width - 240, pageSize.height - 40).map
(map))
            .legend(new LegendItem(20, 20, 200, pageSize.height - 40).addMap(map))
        .build(outputStream)
}
```

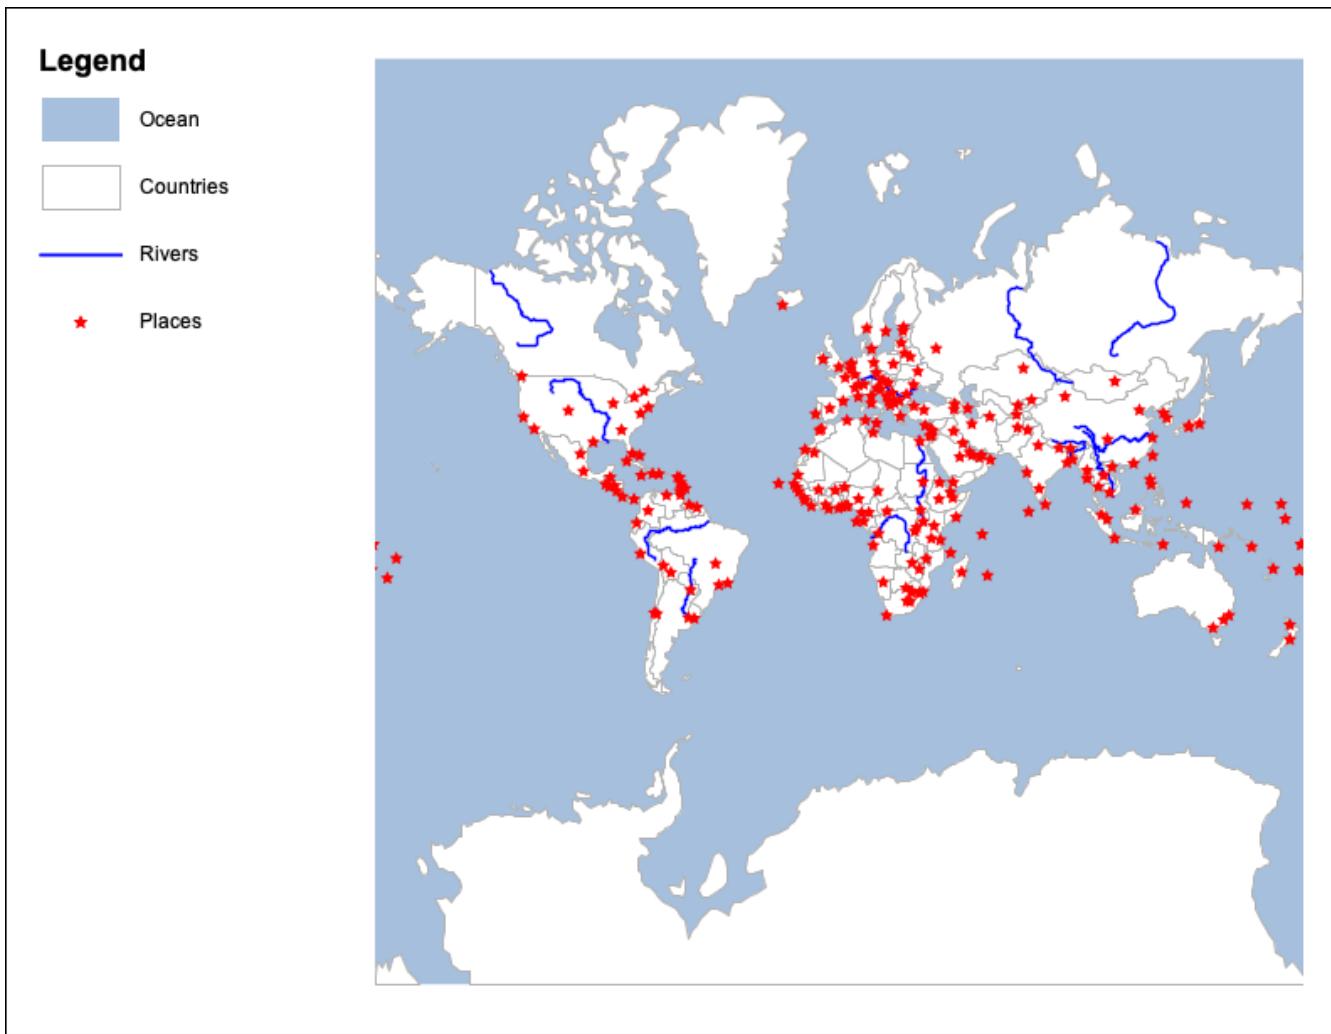

Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
backgroundColor	java.awt.Color	The background Color
title	String	The legend title
titleFont	java.awt.Font	The title Font
titleColor	java.awt.Color	The title Color
textFont	java.awt.Font	The text Font
textColor	java.awt.Color	The text Color
entries	List of LegendEntry instances	Legend entries
legendEntryWidth	int	The width of individual entries
legendEntryHeight	int	The height of individual entries
gapBetweenEntries	int	The gap between entries
numberFormat	String	The number format (#.##)

Adding a Date

Add a date

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height - 1)
            .fillColor(Color.WHITE)
        )
        .text(new TextItem(20,15, pageSize.width - 40, 60)
            .text("World Map")
            .font(new Font("Arial", Font.BOLD, 42))
            .verticalAlign(VerticalAlign.TOP)
            .horizontalAlign(HorizontalAlign.CENTER)
        )
        .dateText(new DateTextItem(20,58, pageSize.width - 40, 20)
            .font(new Font("Arial", Font.ITALIC, 18))
            .verticalAlign(VerticalAlign.BOTTOM)
            .horizontalAlign(HorizontalAlign.CENTER)
        )
        .map(new MapItem(20, 80, pageSize.width - 40, pageSize.height - 100).map(map))
        .build(outputStream)
    }
}
```

World Map

10/30/2023



Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
format	String	The date format (MM/dd/yyyy)
date	Date	The Date to display
color	java.awt.Color	The text Color
font	java.awt.Font	The text Font
horizontalAlign	HorizontalAlign	The horizontal alingment of the text
verticalAlign	VerticalAlign	The vertical alingment of the text

Adding Scale Text


Add scale text

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height - 1)
            .fillColor(Color.WHITE)
        )
        .text(new TextItem(20,15, pageSize.width - 40, 60)
            .text("World Map")
            .font(new Font("Arial", Font.BOLD, 42))
            .verticalAlign(VerticalAlign.TOP)
            .horizontalAlign(HorizontalAlign.CENTER)
        )
        .scaleText(new ScaleTextItem(20,58, pageSize.width - 40, 20)
            .map(map)
            .format("#")
            .prefixText("Scale: ")
            .font(new Font("Arial", Font.ITALIC, 18))
            .verticalAlign(VerticalAlign.BOTTOM)
            .horizontalAlign(HorizontalAlign.CENTER)
        )
        .map(new MapItem(20, 80, pageSize.width - 40, pageSize.height - 100).map(map))
        .build(outputStream)
    }
}
```

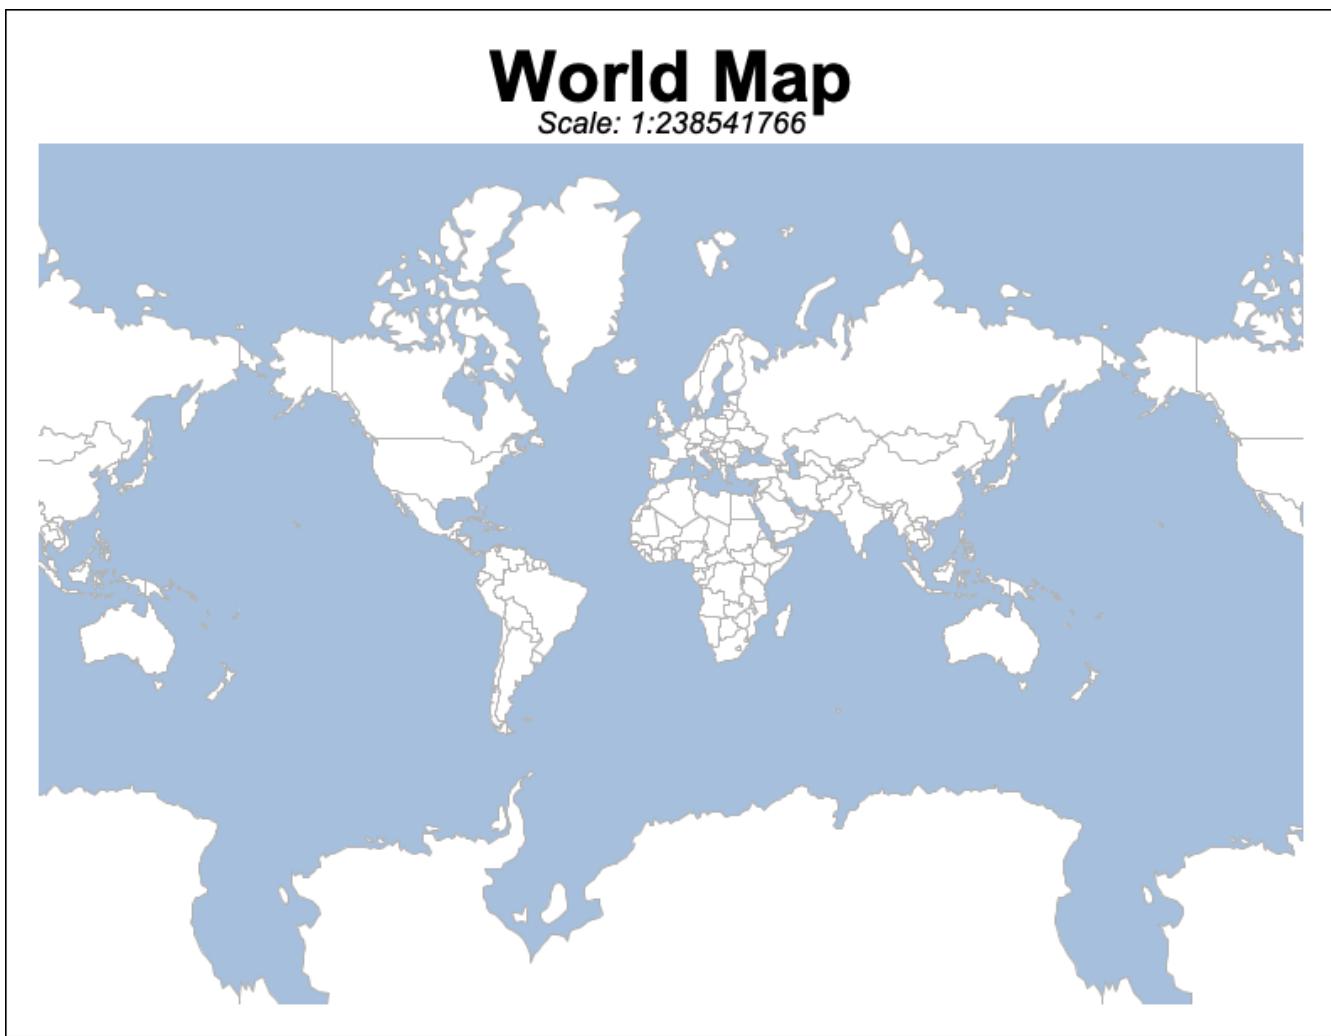

Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
map	geoscript.render.Map	The Map to get the scale from
color	java.awt.Color	The text Color
font	java.awt.Font	The text Font
horizontalAlign	HorizontalAlign	The horizontal alingment of the text
verticalAlign	VerticalAlign	The vertical alingment of the text
format	String	The number format for displaying the scale
prefixText	String	The text to display before the scale (Scale: ...)

Adding Scale Bar

Add scale bar


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height -
1)
            .fillColor(Color.WHITE)
        )
        .text(new TextItem(20,15, pageSize.width - 40, 60)
            .text("World Map")
            .font(new Font("Arial", Font.BOLD, 42))
            .verticalAlign(VerticalAlign.TOP)
            .horizontalAlign(HorizontalAlign.CENTER)
        )
        .map(new MapItem(20, 80, pageSize.width - 40, pageSize.height - 100).map
(map))
            .scaleBar(new ScaleBarItem(20,pageSize.height - 40, 300, 20)
                .map(map)
                .units(ScaleBarItem.Units.METRIC)
                .barStrokeColor(Color.BLACK)
                .barStrokeWidth(1.4f)
                .strokeColor(Color.DARK_GRAY)
                .strokeWidth(1.0f)
                .textColor(Color.DARK_GRAY)
            )
        .build(outputStream)
    }
}
```

World Map

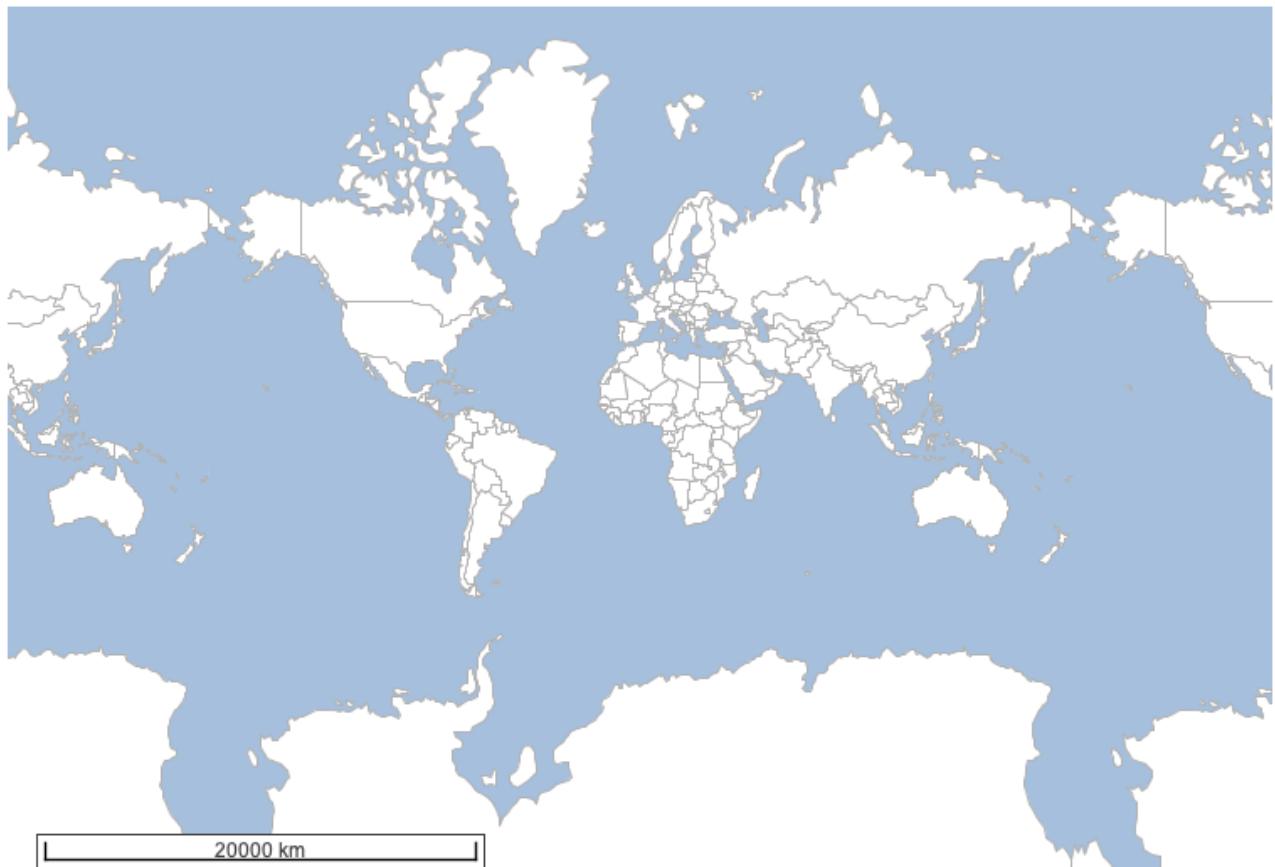

Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
map	geoscript.render.Map	The Map to get the scale from
strokeColor	java.awt.Color	The stroke Color
fillColor	java.awt.Color	The fill Color
strokeWidth	float	The stroke width
barStrokeColor	java.awt.Color	The bar stroke Color
barStrokeWidth	float	The bar stroke width
font	java.awt.Font	The text Font
textColor	java.awt.Color	The text Color
border	int	The border padding
units	Units	The units (metric or us)

Adding a Line

Add a line

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height -
1)
            .fillColor(Color.WHITE)
        )
        .text(new TextItem(20,20, pageSize.width - 40, 60)
            .text("World Map")
            .font(new Font("Arial", Font.BOLD, 42))
            .verticalAlign(VerticalAlign.MIDDLE)
            .horizontalAlign(HorizontalAlign.CENTER)
        )
        .line(new LineItem(20, 70, pageSize.width - 40, 1)
            .strokeWidth(2)
            .strokeColor(Color.DARK_GRAY)
        )
        .map(new MapItem(20, 80, pageSize.width - 40, pageSize.height - 100).map
(map))
            .build(outputStream)
    }
}
```

World Map



Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
map	geoscript.render.Map	The Map to get the scale from
strokeColor	java.awt.Color	The stroke Color
strokeWidth	float	The stroke width

Adding a Grid

Adding a grid is a nice way to placing items.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height -
1)
            .fillColor(Color.WHITE)
        )
        .grid(new GridItem(0,0,pageSize.width, pageSize.height)
            .size(20)
            .strokeColor(Color.GRAY)
            .strokeWidth(1.0)
        )
        .text(new TextItem(20,20, pageSize.width - 40, 60)
            .text("World Map")
            .font(new Font("Arial", Font.BOLD, 42))
            .verticalAlign(VerticalAlign.MIDDLE)
            .horizontalAlign(HorizontalAlign.CENTER)
        )
        .map(new MapItem(20, 80, pageSize.width - 40, pageSize.height - 100).map
(map))
            .build(outputStream)
    }
}
```

World Map



Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
size	int	The cell size
strokeColor	java.awt.Color	The stroke Color
strokeWidth	float	The stroke width

Adding a Paragraph

Adding a paragraph of text

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File
('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject(
"EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height
- 1)
            .fillColor(Color.WHITE)
        )
        .map(new MapItem(20, 20, pageSize.width - 40, pageSize.height - 100
).map(map))
            .paragraph(new ParagraphItem(20, pageSize.height - 60, pageSize.width
- 40, 60)
                .font(new Font("Arial", Font.PLAIN, 12))
                .color(Color.BLACK)
                .text("""Natural Earth is a public domain map dataset available at
1:10m, 1:50m, and 1:110 million scales.
Featuring tightly integrated vector and raster data, with Natural Earth you can make a
variety of visually pleasing,
well-crafted maps with cartography or GIS software.
"""))
        )
        .build(outputStream)
    }
}
```



Natural Earth is a public domain map dataset available at 1:10m, 1:50m, and 1:110 million scales. Featuring tightly integrated vector and raster data, with Natural Earth you can make a variety of visually pleasing, well-crafted maps with cartography or GIS software.

Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
text	String	The paragraph text
font	java.awt.Font	The text Font
color	java.awt.Color	The text Color

Adding an Image


Adding an image

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height -
1)
            .fillColor(Color.WHITE)
        )
        .map(new MapItem(20, 20, pageSize.width - 40, pageSize.height - 40).map
(map))
            .image(new ImageItem(pageSize.width - 100, pageSize.height - 100, 80, 80)
                .path(new File("src/main/resources/image.png"))
            )
        .build(outputStream)
    }
}
```

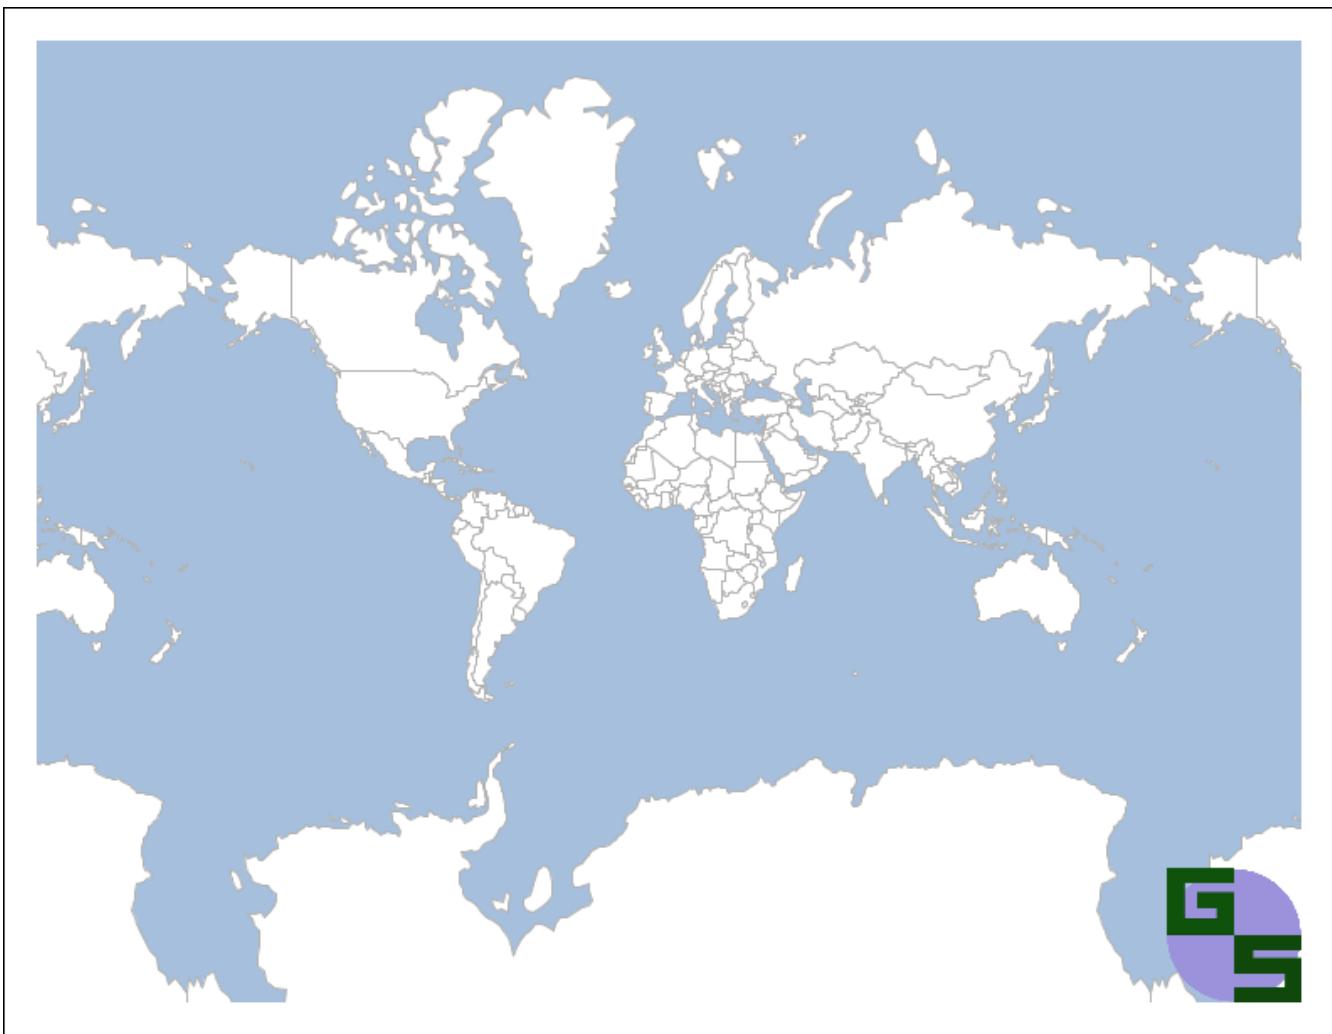

Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
path	File or URL	The source path of the image

Adding a Table

Adding a Table

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer states = workspace.get("states")
states.style = new SLDReader().read(new File('src/main/resources/states.sld'))
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries, states],
    bounds: new Bounds(-135.225466,36.256870,-95.850466,50.746340, "EPSG:4326"
).reproject("EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    PageSize pageSize = PageSize.LETTER_LANDSCAPE

    CartoFactories.findByName("png")
        .create(pageSize)
        .rectangle(new RectangleItem(0, 0, pageSize.width - 1, pageSize.height -
1)
            .fillColor(Color.WHITE)
        )
        .map(new MapItem(20, 20, pageSize.width - 40, pageSize.height - 140).map
(map))
            .table(new TableItem(20, pageSize.height - 100, pageSize.width - 40, 80)
                .columns(["Name", "Abbreviation"])
                .row([[Name: "Washington", Abbreviation: "WA"]])
                .row([[Name: "Oregon", Abbreviation: "OR"]])
                .row([[Name: "California", Abbreviation: "CA"]])
            )
        .build(outputStream)
    }
}
```

Name	Abbreviation
Washington	WA
Oregon	OR
California	CA

Property	Type	Description
x	int	The number of pixels from left
y	int	The number of pixels from top
width	int	The width of the item in pixels
height	int	The height of the item in pixels
columns	List of Strings	The column names
row	A Maps of values	One row of values where the keys are the column names.
rows	A List of Maps	The data as a List of Maps where the keys are the column names.
columnRowStyle	TableItem.RowStyle	backGroudColor, font, textColor, strokeColor for columns
evenRowStyle	TableItem.RowStyle	backGroudColor, font, textColor, strokeColor for even rows

Property	Type	Description
oddRowStyle	TableItem.RowStyle	backGroudColor, font, textColor, strokeColor for odd rows

Builders

CartoBuilders write cartographic documents to different formats. Images, PDFs, and SVGs are currently supported.

ImageCartoBuilder

The ImageCartoBuilder can produce PNG or JPEG images.

Use the `ImageCartoBuilder` to create a PNG image.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File
('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject(
"EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.png")
file.withOutputStream { OutputStream outputStream ->

    new ImageCartoBuilder(PageSize.LETTER_LANDSCAPE, ImageCartoBuilder
.ImageType.PNG)
        .rectangle(new RectangleItem(0, 0, 792, 612).strokeColor(Color.WHITE
).fillColor(Color.WHITE))
        .rectangle(new RectangleItem(10, 10, 772, 592))
        .rectangle(new RectangleItem(20, 20, 752, 80))
        .text(new TextItem(30, 50, 200, 20).text("Map Title").font(new Font
("Arial", Font.BOLD, 36)))
        .dateText(new DateTextItem(30, 85, 200, 10).font(new Font("Arial",
Font.ITALIC, 14)))
        .scaleText(new ScaleTextItem(150, 85, 200, 10).map(map).font(new Font
("Arial", Font.ITALIC, 14)))
        .paragraph(new ParagraphItem(250, 30, 380, 70).text("""Permission is
hereby granted, free of charge, to any person obtaining a copy
of this software and associated documentation files (the "Software"), to deal
in the Software without restriction, including without limitation the rights
to use, copy, modify, merge, publish, distribute, sublicense, and/or sell
copies of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:
The above copyright notice and this permission notice shall be included in
all copies or substantial portions of the Software.
""").font(new Font("Arial", Font.PLAIN, 8)))
        .line(new LineItem(710, 30, 1, 60))
        .image(new ImageItem(640, 30, 60, 60).path(new File(getClass
().getClassLoader().getResource("image.png").toURI())))
        .northArrow(new NorthArrowItem(720, 30, 40, 60))
        .map(new MapItem(20, 110, 752, 480).map(map))
        .rectangle(new RectangleItem(20, 110, 752, 480))

    .build(outputStream)
}
}
```

Map Title

10/30/2023

Scale: 1:238541766

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.




PdfCartoBuilder

Use the PdfCartoBuilder to create a PDF.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File
('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject(
"EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.pdf")
file.withOutputStream { OutputStream outputStream ->

    new PdfCartoBuilder(PageSize.LETTER_LANDSCAPE)
        .rectangle(new RectangleItem(0, 0, 792, 612).strokeColor(Color.WHITE)
).fillColor(Color.WHITE))
        .rectangle(new RectangleItem(10, 10, 772, 592))
        .rectangle(new RectangleItem(20, 20, 752, 80))
        .text(new TextItem(30, 50, 200, 20).text("Map Title").font(new Font
("Arial", Font.BOLD, 36)))
        .dateText(new DateTextItem(30, 85, 200, 10).font(new Font("Arial",
Font.ITALIC, 14)))
        .scaleText(new ScaleTextItem(150, 85, 200, 10).map(map).font(new Font
("Arial", Font.ITALIC, 14)))
        .paragraph(new ParagraphItem(250, 30, 380, 70).text("""Permission is
hereby granted, free of charge, to any person obtaining a copy
of this software and associated documentation files (the "Software"), to deal
in the Software without restriction, including without limitation the rights
to use, copy, modify, merge, publish, distribute, sublicense, and/or sell
copies of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:
The above copyright notice and this permission notice shall be included in
all copies or substantial portions of the Software.
""").font(new Font("Arial", Font.PLAIN, 8)))
        .line(new LineItem(710, 30, 1, 60))
        .image(new ImageItem(640, 30, 60, 60).path(new File(getClass
().getClassLoader().getResource("image.png").toURI())))
        .northArrow(new NorthArrowItem(720, 30, 40, 60))
        .map(new MapItem(20, 110, 752, 480).map(map))
        .rectangle(new RectangleItem(20, 110, 752, 480))
        .build(outputStream)
}
}
```

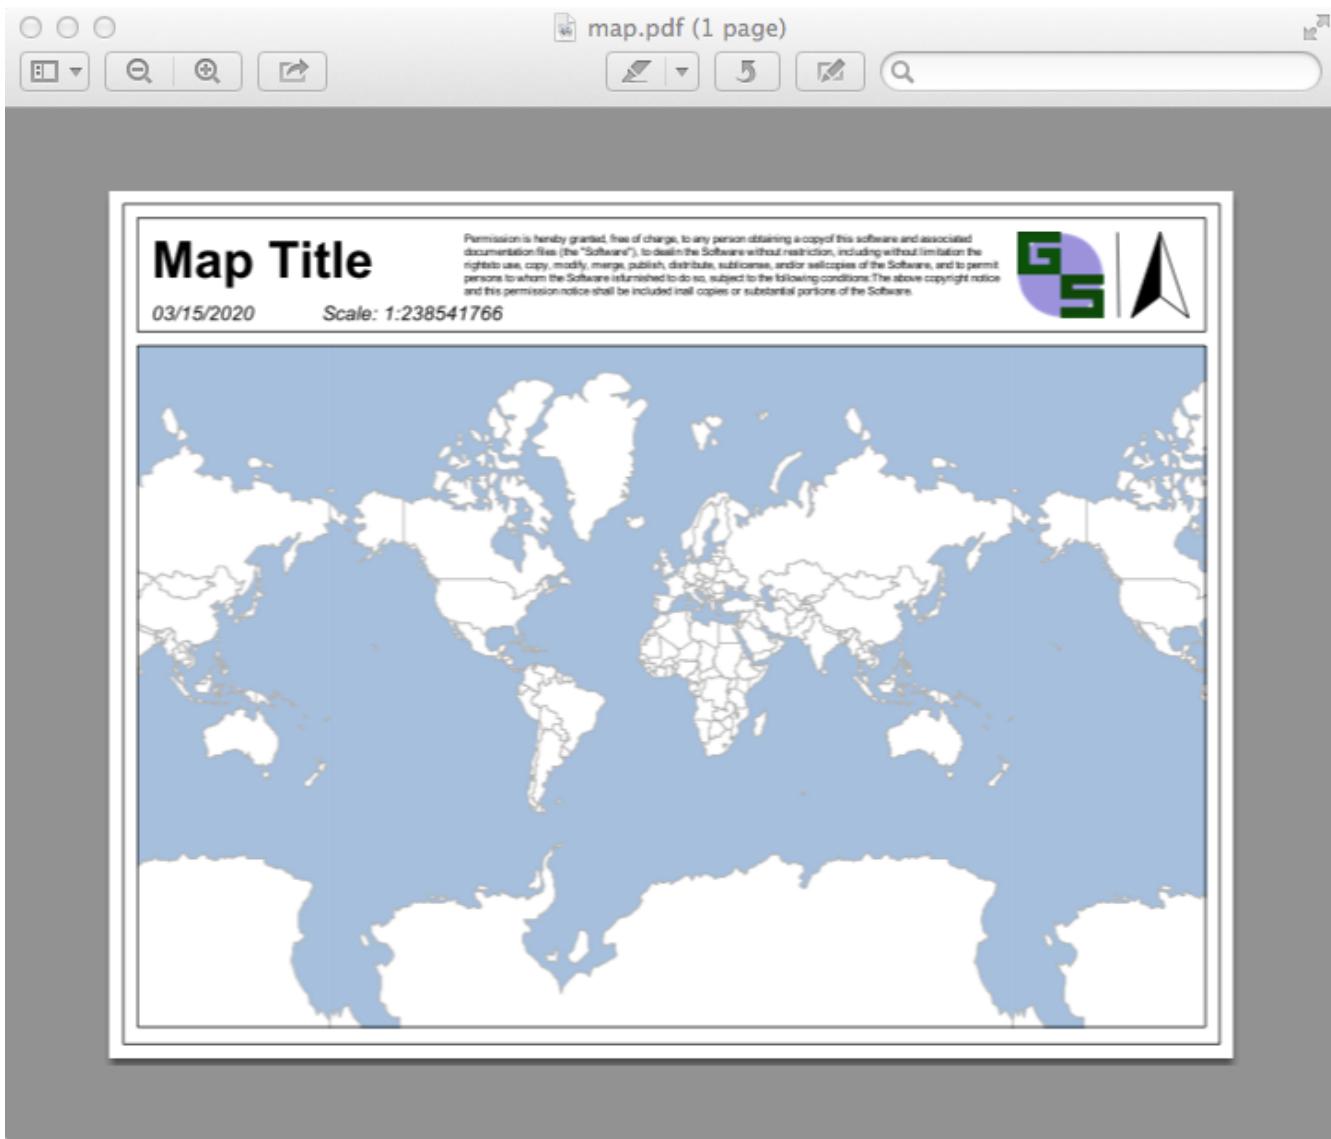


SvgCartoBuilder

Use the `SvgCartoBuilder` to create a SVG document.

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new SLDReader().read(new File
('src/main/resources/countries.sld'))
Layer ocean = workspace.get("ocean")
ocean.style = new SLDReader().read(new File('src/main/resources/ocean.sld'))
Map map = new Map(
    layers: [ocean, countries],
    bounds: new Bounds(-180,-85,180,85, "EPSG:4326").reproject(
"EPSG:3857"),
    projection: new Projection("EPSG:3857")
)

File file = new File("map.svg")
file.withOutputStream { OutputStream outputStream ->

    new SvgCartoBuilder(PageSize.LETTER_LANDSCAPE)
        .rectangle(new RectangleItem(0, 0, 792, 612).strokeColor(Color.WHITE)
).fillColor(Color.WHITE))
        .rectangle(new RectangleItem(10, 10, 772, 592))
        .rectangle(new RectangleItem(20, 20, 752, 80))
        .text(new TextItem(30, 50, 200, 20).text("Map Title").font(new Font
("Arial", Font.BOLD, 36)))
        .dateText(new DateTextItem(30, 85, 200, 10).font(new Font("Arial",
Font.ITALIC, 14)))
        .scaleText(new ScaleTextItem(150, 85, 200, 10).map(map).font(new Font
("Arial", Font.ITALIC, 14)))
        .paragraph(new ParagraphItem(250, 30, 380, 70).text("""Permission is
hereby granted, free of charge, to any person obtaining a copy
of this software and associated documentation files (the "Software"), to deal
in the Software without restriction, including without limitation the rights
to use, copy, modify, merge, publish, distribute, sublicense, and/or sell
copies of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:
The above copyright notice and this permission notice shall be included in
all copies or substantial portions of the Software.
""").font(new Font("Arial", Font.PLAIN, 8)))
        .line(new LineItem(710, 30, 1, 60))
        .image(new ImageItem(640, 30, 60, 60).path(new File(getClass
().getClassLoader().getResource("image.png").toURI())))
        .northArrow(new NorthArrowItem(720, 30, 40, 60))
        .map(new MapItem(20, 110, 752, 480).map(map))
        .rectangle(new RectangleItem(20, 110, 752, 480))
        .build(outputStream)
}
}
```

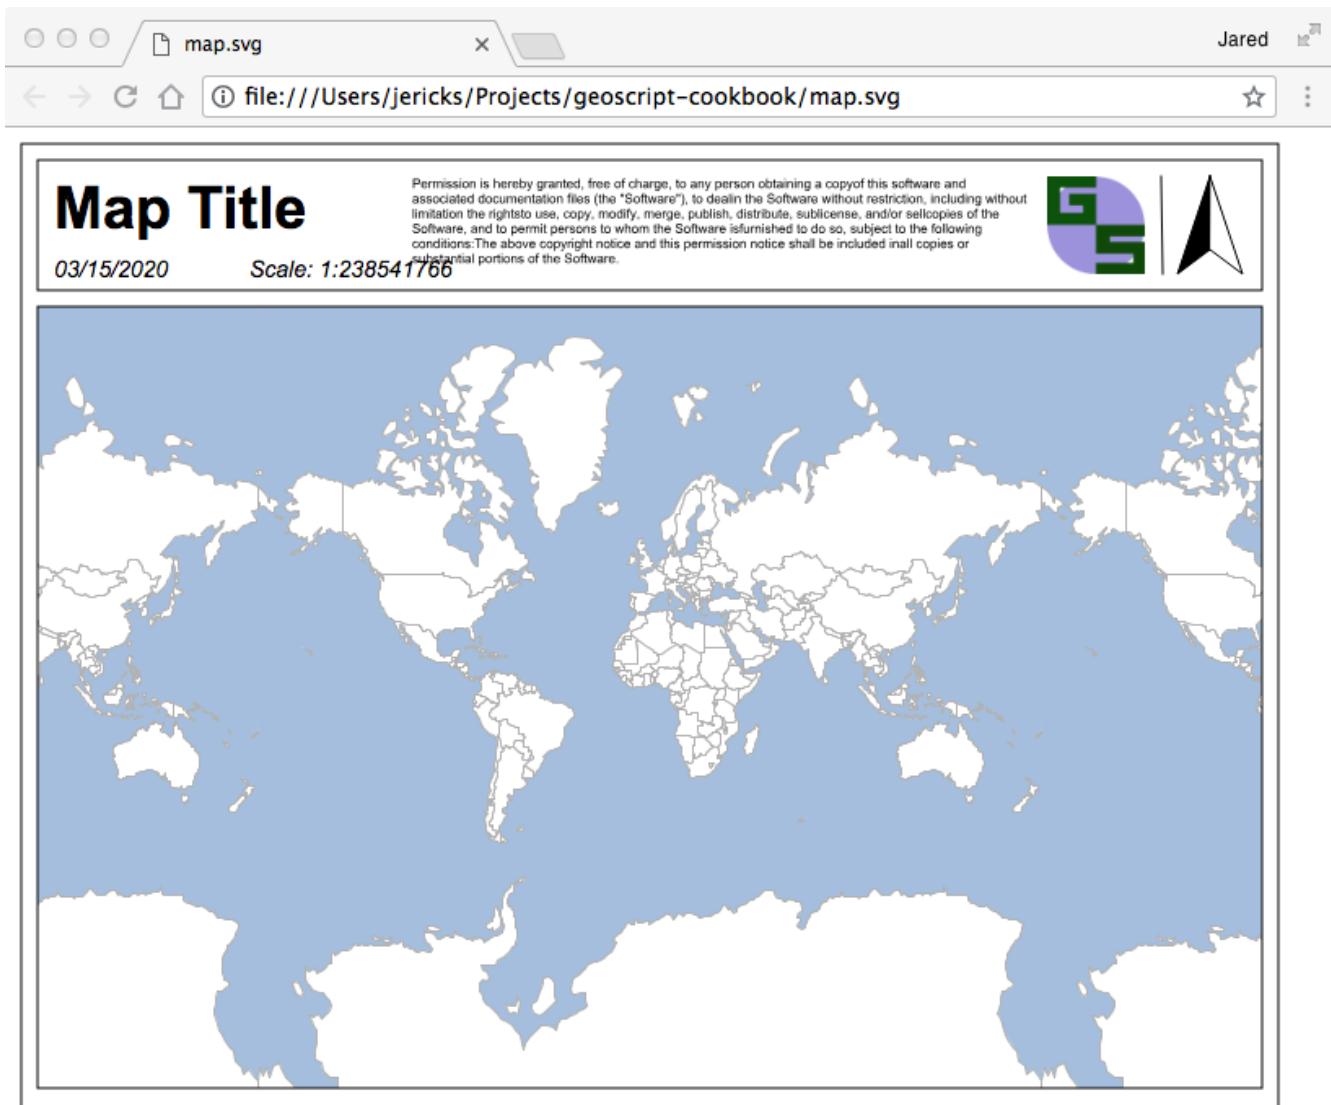

Reading CartoBuilders

The IO module can read a CartoBuilder from JSON or XML documents.

Finding Carto Readers

List all Carto Readers

```
List<CartoReader> readers = CartoReaders.list()  
readers.each { CartoReader reader ->  
    println reader.name  
}
```

```
json  
xml  
yaml
```

Find a Carto Reader

```
CartoReader reader = CartoReaders.find("json")
println reader.name
```

```
json
```

JSON

Read a CartoBuilder from a JSON String

```
String json = """
"type": "png",
"width": 400,
"height": 400,
"items": [
  {
    "x": 0,
    "y": 0,
    "width": 400,
    "height": 400,
    "type": "rectangle",
    "fillColor": "white",
    "strokeColor": "white"
  },
  {
    "x": 10,
    "y": 10,
    "width": 380,
    "height": 380,
    "type": "rectangle"
  },
  {
    "x": 20,
    "y": 20,
    "width": 360,
    "height": 360,
    "type": "map",
    "name": "mainMap",
    "proj": "EPSG:4326",
    "bounds": {
      "minX": -135.911779,
      "minY": 36.993573,
      "maxX": -96.536779,
      "maxY": 51.405899
    },
    "layers": [
      {
        "layertype": "layer",
        "name": "mainLayer"
      }
    ]
  }
]"""
```

```

        "dbtype": "geopkg",
        "database": "src/main/resources/data.gpkg",
        "layername": "ocean",
        "style": "src/main/resources/ocean.sld"
    },
    {
        "layertype": "layer",
        "dbtype": "geopkg",
        "database": "src/main/resources/data.gpkg",
        "layername": "countries",
        "style": "src/main/resources/countries.sld"
    },
    {
        "layertype": "layer",
        "dbtype": "geopkg",
        "database": "src/main/resources/data.gpkg",
        "layername": "states",
        "style": "src/main/resources/states.sld"
    }
]
},
{
    "x": 20,
    "y": 20,
    "width": 30,
    "height": 40,
    "type": "northarrow"
},
{
    "x": 260,
    "y": 20,
    "width": 50,
    "height": 200,
    "type": "legend",
    "map": "mainMap"
},
{
    "x": 70,
    "y": 20,
    "width": 170,
    "height": 50,
    "type": "text",
    "text": "Western US",
    "font": {
        "name": "Arial",
        "style": "BOLD",
        "size": 24
    },
    "horizontalAlign": "CENTER",
    "verticalAlign": "MIDDLE"
}

```

```

        ]
}

"""

CartoReader cartoReader = new JsonCartoReader()
CartoBuilder cartoBuilder = cartoReader.read(json)
File file = new File("target/carto_from_json.png")
file.withOutputStream { OutputStream outputStream ->
    cartoBuilder.build(outputStream)
}

```



XML

Read a CartoBuilder from an XML String

```

String json = """<carto>
<type>png</type>
<width>400</width>
<height>400</height>
<items>
    <item>
        <x>0</x>
        <y>0</y>
        <width>400</width>
        <height>400</height>
        <type>rectangle</type>
        <fillColor>white</fillColor>
        <strokeColor>white</strokeColor>
    </item>
    <item>

```

```

<x>10</x>
<y>10</y>
<width>380</width>
<height>380</height>
<type>rectangle</type>
</item>
<item>
<x>20</x>
<y>20</y>
<width>360</width>
<height>360</height>
<type>map</type>
<name>mainMap</name>
<proj>EPSG:4326</proj>
<bounds>
<minX>-135.911779</minX>
<minY>36.993573</minY>
<maxX>-96.536779</maxX>
<maxY>51.40589</maxY>
</bounds>
<layers>
<layer>
<layertype>layer</layertype>
<dbtype>geopkg</dbtype>
<database>src/main/resources/data.gpkg</database>
<layername>ocean</layername>
<style>src/main/resources/ocean.sld</style>
</layer>
<layer>
<layertype>layer</layertype>
<dbtype>geopkg</dbtype>
<database>src/main/resources/data.gpkg</database>
<layername>countries</layername>
<style>src/main/resources/countries.sld</style>
</layer>
<layer>
<layertype>layer</layertype>
<dbtype>geopkg</dbtype>
<database>src/main/resources/data.gpkg</database>
<layername>states</layername>
<style>src/main/resources/states.sld</style>
</layer>
</layers>
</item>
<item>
<x>20</x>
<y>20</y>
<width>30</width>
<height>40</height>
<type>northarrow</type>
</item>

```

```

<item>
    <x>260</x>
    <y>20</y>
    <width>50</width>
    <height>200</height>
    <type>legend</type>
    <map>mainMap</map>
</item>
<item>
    <x>70</x>
    <y>20</y>
    <width>170</width>
    <height>50</height>
    <type>text</type>
    <text>Western US</text>
    <font>
        <name>Arial</name>
        <style>BOLD</style>
        <size>24</size>
    </font>
    <horizontalAlign>CENTER</horizontalAlign>
    <verticalAlign>MIDDLE</verticalAlign>
</item>
</items>
</carto>
"""
CartoReader cartoReader = new XmlCartoReader()
CartoBuilder cartoBuilder = cartoReader.read(json)
File file = new File("target/carto_from_xml.png")
file.withOutputStream { OutputStream outputStream ->
    cartoBuilder.build(outputStream)
}

```



YAML

Read a CartoBuilder from an YAML String

```
String yaml = """---  
type: png  
width: 400  
height: 400  
items:  
- x: 0  
y: 0  
width: 400  
height: 400  
type: rectangle  
fillColor: white  
strokeColor: white  
- x: 10  
y: 10  
width: 380  
height: 380  
type: rectangle  
- x: 20  
y: 20  
width: 360  
height: 360  
type: map  
name: mainMap  
proj: EPSG:4326  
bounds:  
minX: -135.911779
```

```

minY: 36.993573
maxX: -96.536779
maxY: 51.405899
layers:
- layertype: layer
  dbtype: geopkg
  database: src/main/resources/data.gpkg
  layername: ocean
  style: src/main/resources/ocean.sld
- layertype: layer
  dbtype: geopkg
  database: src/main/resources/data.gpkg
  layername: countries
  style: src/main/resources/countries.sld
- layertype: layer
  dbtype: geopkg
  database: src/main/resources/data.gpkg
  layername: states
  style: src/main/resources/states.sld
- x: 20
  y: 20
  width: 30
  height: 40
  type: northarrow
- x: 260
  y: 20
  width: 50
  height: 200
  type: legend
  map: mainMap
- x: 70
  y: 20
  width: 170
  height: 50
  type: text
  text: Western US
  font:
    name: Arial
    style: BOLD
    size: 24
  horizontalAlign: CENTER
  verticalAlign: MIDDLE
"""
CartoReader cartoReader = new YamlCartoReader()
CartoBuilder cartoBuilder = cartoReader.read(yaml)
File file = new File("target/carto_from_yaml.png")
file.withOutputStream { OutputStream outputStream ->
  cartoBuilder.build(outputStream)
}

```

