

StellarProtect Linux Agent QuickStart Guide

Last updated: December 1, 2025

Contents

System Requirements.....	2
Installing the Linux Agent.....	3
Uninstalling the Linux Agent.....	4
Using the StellarProtect Linux CLI.....	5



System Requirements

Please ensure your system meets the below requirements.


Available free disk space	400MB
Operating system	Any of the following Linux distributions: • CentOS 6 • CentOS 7 • CentOS 8 • CentOS 9 • Debian 10 • Debian 11 • Red Hat Enterprise Linux 6 • Red Hat Enterprise Linux 7 • Red Hat Enterprise Linux 8 • Red Hat Enterprise Linux 9 • Rocky 8.4 • Rocky 9 • Rocky 10 • Ubuntu Linux 18 • Ubuntu Linux 20 • Ubuntu Linux 22

Installing the Linux Agent

Follow the instructions below to install StellarProtect for Linux.

Please ensure port 14336 is open before installing the agent.

1. Download Agent-Installer.tgz from StellarOne. Go to **Administration > Downloads/Updates > Agent**, select **Linux** and click **Download**.

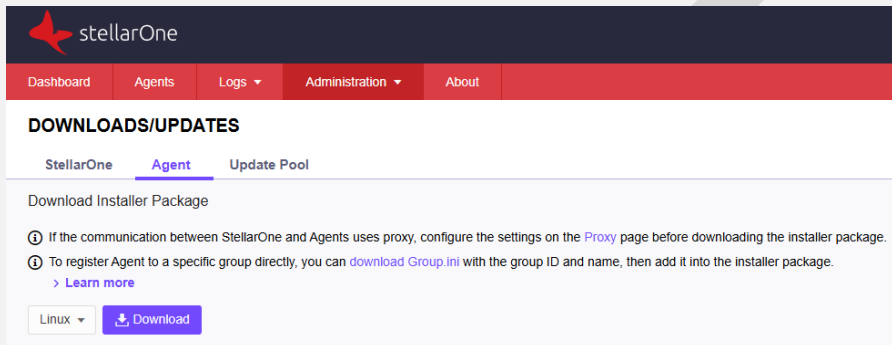

2. Place the Agent-Installer.tgz file on the Linux machine you wish to install the agent to. In the example commands below, we presume it is in \Documents.
3. Use the **cd** command to go to the directory that contains Agent-Installer.tgz.

```
cd Documents
```

4. Extract Agent-Installer.tgz using the following command.

```
tar -xvzf Agent-Installer.tgz
```

5. Optionally, edit setup.conf. Enter the editor using the following command.

```
nano setup.conf
```

6. Exit the editor by pressing the Ctrl and X keys. You will be prompted to save.

7. Run the agent installer using the following command.

```
sudo sh installer.sh -i
```

8. Check StellarProtect is installed with the following command.

```
sudo dpkg -s stellar-protect
```


9. Return to StellarOne and ensure your Linux machine has been added.

Uninstalling the Linux Agent

Follow the instructions below to uninstall StellarProtect for Linux.

If the Agent-Installer.tgz file is already on the Linux machine, go to step 3 directly.

1. Download Agent-Installer.tgz from StellarOne. Go to **Administration > Downloads/Updates > Agent**, select **Linux** and click **Download**.

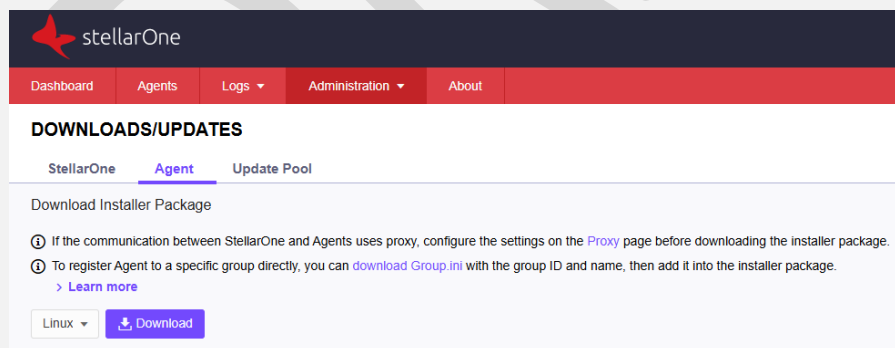

2. Place Agent-Installer.tgz on the Linux machine you wish to uninstall the agent from. In the example commands below, we presume it is in \Documents.

3. Use the **cd** command to go to the directory that contains Agent-Installer.tgz.

cd Documents

4. Extract Agent-Installer.tgz using the following command.

```
tar -xvzf Agent-Installer.tgz
```

5. Remove the agent using the following command.

```
sudo sh installer.sh -r
```

6. StellarProtect should now be uninstalled.

Using the StellarProtect Linux CLI

The following table lists the commands, parameters, and values available.

Command	Description
version	Show version information
debug-package	Create a debug package
scan [start stop scan]	Control manual scanning
license import -n <serial_number> -p <license_path>	Import license form file
license show	Show license information
remote-server set -h <host> -p <port> -c <cert_path>	Configure remote server
proxy set -h <host> -p <port> [-u <user>] [-p <password>]	Configure proxy settings
proxy clear	Clear proxy settings
quarantine restore -i <item_id>	Restore quarantine item by ID
quarantine show	Show all quarantine items
components update	Update scan components
components show	Show scan component information
patch update	Apply patch update