

401 TXOne Solutions

Advanced Configuration Lab Guide

Endpoint Protection Solutions

Rev 3.3_260309

Global Training Services Team
TXOne Network Inc

3/15/2026

Filename: 401_TXOne_solutions_advanced_configuration_Lab_Guide-Stellar-v3.3_260309_labs. pdf

Copyright Notice

Copyright © 2024, TXOne Networks. All rights reserved.

All training content and publications are the property of TXOne Networks. No part of this material may be reproduced, republished, distributed, modified, displayed, photocopied, or recreated in any form without prior written permission from TXOne Networks.

Additionally, users may not sell, rent, lease, trade, share, or transfer any portion of the training materials without written consent from TXOne Networks. Users are responsible for complying with all applicable copyright laws.

Revision History

Version	Author	Date	Change
V1.0	Louis Liu	2022/12/11	1 st edition, provide EdgeIPS demo and test cases
V2.0	Louis Liu	2022/12/30	2 nd edition, integrated StellarProtect and TMPS3 demo / lab test cases
V2.1	Louis Liu	2023/01/04	Remove demo case descriptions
V2.2	Chris Van Den Abbeele	2023/07/28	Lab guide split in separate documents per product
v2.3	Louis Liu	2023/07/14	Merge the use cases which listed in Miro
V2.4	Louis Liu	2023/10/09	Stellar 3.0 build 3153 (SP1) CPSDR
V2.4c	Chris Van Den Abbeele	2024/01/25	Review and updates
V3.0	Chris Van Den Abbeele	2024/04/xx	Complete revision of the labs + updates with Stellar 3.0 SP1 Patch 3
V3.1	Louis Liu	2024/05/03	Stellar 3.1 - CPSDR Lab update - Proxy for S1 update and agent communication
V3.1	Louis Liu	2024/06/1	StellarProtect Standalone agent installation, upgrade and pattern update
V3.2rfe	Chris Van Den Abbeele	20250129	Revised for improved phrasing
V3.3	Louis Liu	2025/02/13	Updated to Stellar 3.2
V3.3	Louis Liu	2025/06/17	Updated to Stellar 3.2 Service Pack 1
V3.3	Louis Liu	2025/07/15	● Merge OT App Safeguard & Maintenance mode ● Merge App Lockdown & Approved List

Product Version(-s)

Solutions	Edition
StellarOne	3.2.x

Table of Contents

1.	Lab scenarios mapped to product features	1
2.	Lab Environment.....	2
2.1	Virtual Machines.....	2
2.2	Hardware/Software Requirements	3
2.3	Lab network architecture.....	4
2.4	Credentials	4
2.5	VMWare Virtual Networks Settings	5
3.	Lab Environment setup	6
3.1	Turn on the Virtual Machines	6
3.2	Stellar Lab Preparation.....	8
3.3	StellarProtect agent installation tips.....	8
4.	Labs.....	10
	Lab1: RBAC (Role Based Access Control) management.....	10
	Lab2: Antivirus	13
	Lab3: OT Application Safeguard	20
	Lab4: Operations Behavior Anomaly Detection	29
	Lab5: CPSDR-Cyber Physical System Detection and Response.....	41
	Lab6: Application Lockdown with SPLM.....	56
	Lab7: Setup an exception path for Application Lockdown	71
	Lab8: User-defined Suspicious Objects (UDSOs)	75
	Lab9: Updating virus patterns in air gapped networks	80
	Lab10: Update Agents and Update Pools.....	87
	Lab11: Using a proxy for StellarOne Updates.....	92
	Lab12: Using a proxy for Agent-to-StellarOne communication	96
	Lab13: Stellar Agent transfer to a new StellarOne	104

Lab14: StellarProtect Standalone agent installation and management	111
--	-----

txOne Networks

1. Lab scenarios mapped to product features

Table 1 Lab scenarios mapped to product features

Solution	Lab scenario	Features
StellarOne	RBAC (Role Based Access Control)	StellarOne management
Stellar Protect (SP)	Malware detection and quarantine	Industrial-Grade Next-Generation Antivirus
	OT Application Safeguard	OT Application Safeguard
	Upgrade OT Application using Maintenance Mode	Maintenance Mode
	OBAD-Operations Behavior Anomaly Detection	Operations Behavior Anomaly Detection
	CPSDR-Cyber Physical System Detection and Response	Operations Behavior Anomaly Detection
Stellar Protect Legacy Mode (SPLM)	Application Lockdown	Application Lockdown
	Upgrade Application Lockdown Approved List	Maintenance Mode
	Exception path for the Application Lockdown	Application Lockdown
	User-defined Suspicious Objects	Application Lockdown
StellarOne	Updating virus patterns in air gapped networks	StellarOne management
	Using a proxy for StellarOne Updates	StellarOne management
	Using a proxy for Agent-to-StellarOne communication	StellarOne management
SP	SP Standalone agent management tasks	Agent management

2. Lab Environment

2.1 Virtual Machines

Table 2 Virtual Machines

ZIP Filename	VMware Image Name	Hardware Specification	Purpose
LabConsole_XXXXX.zip	LabConsole_XXXXX	CPU: 2 Core RAM: 4GB Hard Disk: 100G Network: VMnet11	Main Console for labs
StellarOne_v3.X.zip	StellarOne-v3.X	CPU: 8 Core RAM: 16GB Hard Disk: 25G/60G Network: VMnet11	StellarOne Management
StellarOne_v3.X_new.zip	StellarOne-v3.X_new	CPU: 8 Core RAM: 16GB Hard Disk: 25G/60G Network: VMnet11	StellarOne New server
Win7_XXXX.zip	Win7_XXXX	CPU: 2 Core RAM: 2GB Hard Disk: 60G Network: VMnet11	StellarProtect
WinXP_XXXX.zip	Winxp_XXXX	CPU: 1 Core RAM: 512MB Hard Disk: 40G Network: VMnet11	StellarProtect (Legacy Mode)
Attacker_XXX.zip	kali-linux-XXXX	CPU: 4 Core RAM: 2GB Hard Disk: 80G Network: VMnet11	Proxy services

2.2 Hardware/Software Requirements

Table 3 Hardware / Software Requirements

Items	Specification		
Laptop	OS	Windows 10 / 11	
	Hard Drive	120GB minimum	
	Memory	16GB minimum, 24GB Recommend	
	Solutions	Space Requirement	VMs
	Stellar 3.x	120 GB	-LabConsole -StellarOne -StellarOne new -Win7 -WinXP -Kali Linux
VMWare Workstation Pro 17	Hypervisor Minimum Hardware level = 15		

2.3 Lab network architecture

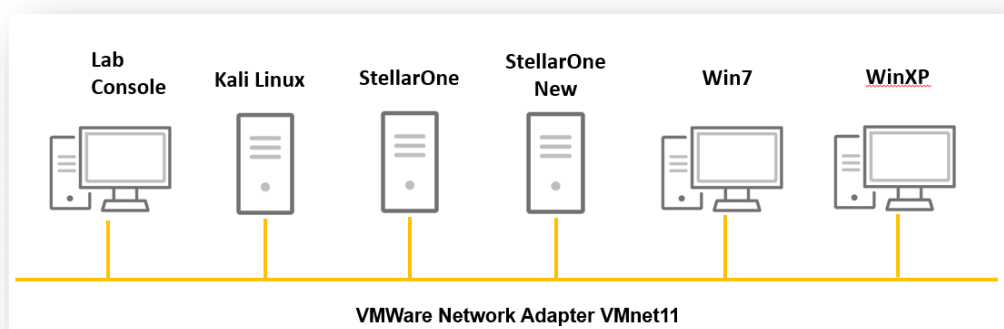


Figure 1 Stellar advanced configuration lab network architecture

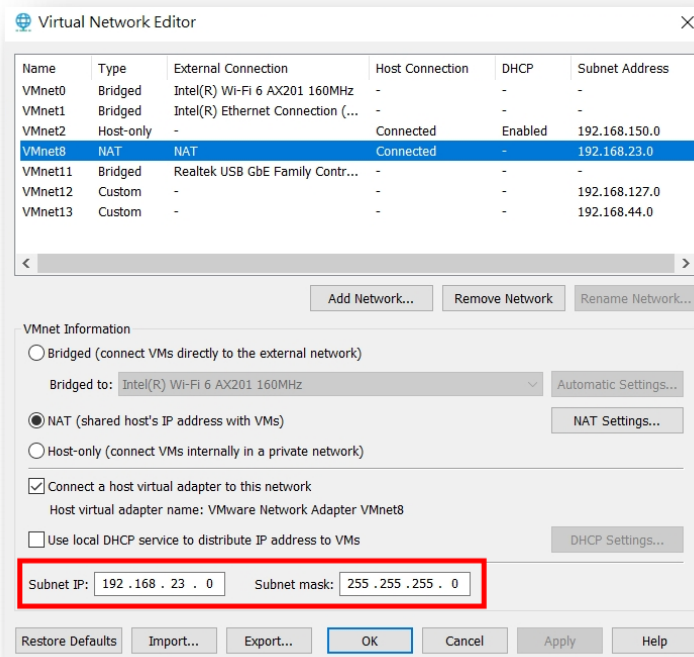
2.4 Credentials

Table 4 Credentials

No	VM Image	IP	Account / Password
1	LabConsole	192.168.23.196	txone/12345678
2	StellarOne	192.168.23.19	Web: admin/12345678 Server: root/12345678
3	StellarOne new	192.168.23.191	Web: admin/12345678 Server: root/12345678
4	Win7	192.168.23.24	txone/12345678
5	WinXP	192.168.23.25	txone/12345678
6	Kali-Linux-xxx	192.168.23.197	kali/kali

2.5 VMWare Virtual Networks Settings

- Make sure your laptop can access the Internet via its wireless / UTP interface.
- In VMware workstation, open the Virtual Network Editor and configure the VMWare NAT network to 192.168.23.0 /24.



- Default IP address of the NAT default gateway is **192.168.23.2** (see later)
- LabConsole and StellarOne use **8.8.8.8** as DNS server.

- VMWare configuration -
Extract the following lab VMs:

StellarOne

StellarOne new

LabConsole

Win7

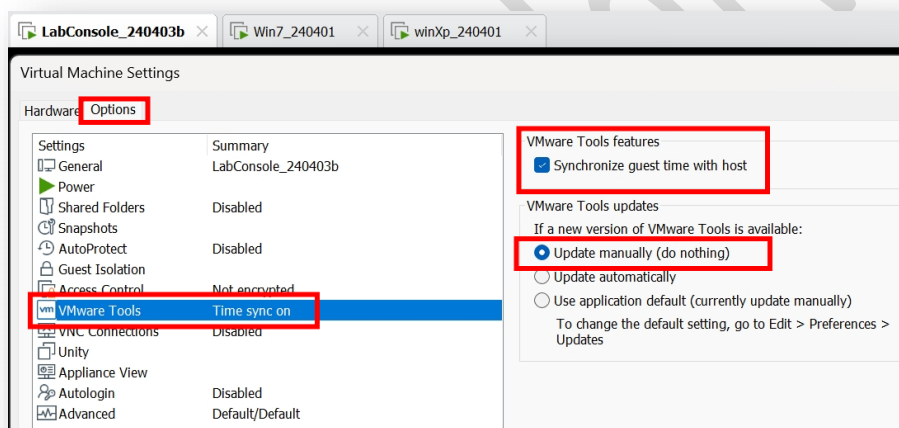
WinXP

Kali Linux

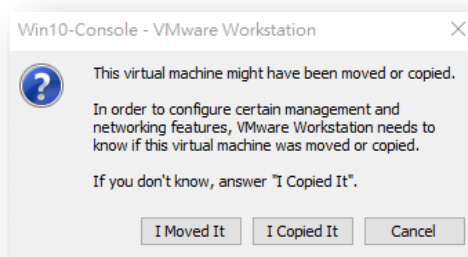
3. Lab Environment setup

3.1 Turn on the Virtual Machines

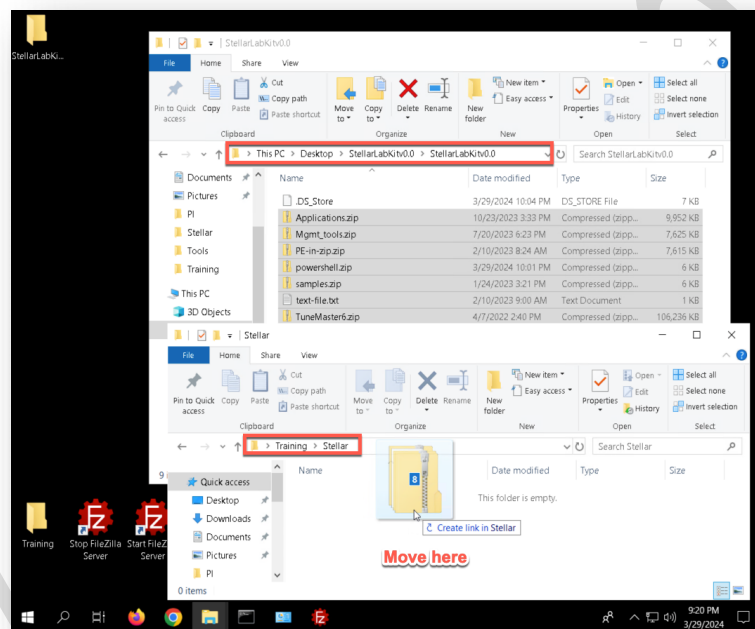
- If you want to continue using your existing environment of the 301 training, then keep the VMs as they are. **Do not revert to snapshot (or you will lose the agent that you have installed)**
- If you do this 40x training as a standalone training, then revert the VMs LabConsole, StellarOne, Win7 and WinXP, to their snapshots called **“ReadyforLabs”**
 - Edit the Settings of each VM
 - Choose the **Options** tab
 - Select the **VMWare Tools** option
 - Check “Synchronize guest time with host”
 - Under VM Tools updates, select the option **“Update manually (do nothing)”**



- If a VM is powered on for the first time, then click **“I Moved It”**



- Log in to the LabConsole
User: txone (TXOne Expert)
Password: 12345678
- It is recommended to configure the **display resolutions** for each VM to fit in your laptop LCD
- Copy the “**StellarLabKitvx.y.zip**” that was shared with you to the desktop of the **LabConsole** and expand it (right-click the file and “Extract All”). It will create the “**StellarLabKit**” folder on the desktop.
- Move all subdirectories from that folder to the Stellar folder, which is in the Training Folder on the Desktop, as indicated in the screenshot below.
- The training folder is hosted on a webserver that is running in this VM. We will access it from other VMs to download the files needed.



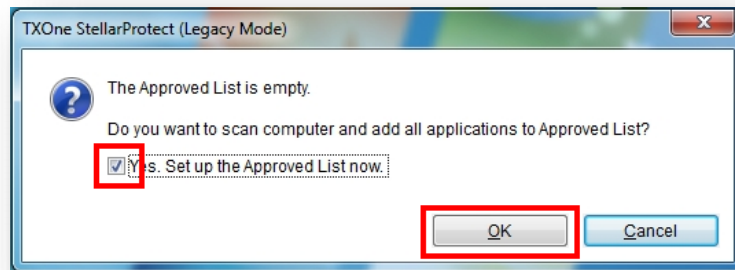
3.2 Stellar Lab Preparation

NO	Tasks	Readiness
1	Check the availability of StellarOne web UI	Y ☐ N ☐
2	Check the availability of Windows 7 and Windows XP images	Y ☐ N ☐
3	Install StellarProtect Agent on the Win7 VM	Y ☐ N ☐
4	Install StellarProtect (Legacy Mode) Agent on the WinXP VM	Y ☐ N ☐
5	Check the connection between StellarOne and the agents	Y ☐ N ☐
6	Check the policy sync between StellarOne and the agents	Y ☐ N ☐

3.3 StellarProtect agent installation tips

- Keep in mind that Windows XP does not support TLS; therefore any HTTPS connection, e.g. to StellarOne, will fail (!)
- To get the agent-installation ZIP on the Windows 7 and Windows XP, you can use the webserver that runs on the **LabConsole**. It uses HTTP, not HTTPS.
- On the **LabConsole**, open the StellarOne Web UI and download the Agent Installer Package.
- Move the zip file to the **Training** folder on the desktop.
- On Win7 and on WinXP, use Internet Explorer and go to <http://192.168.23.196> to download the Agent Installer package.
- Unzip it and install the agent on both VMs
- In de interest of time during the training, **do not run a pre-scan for malware** when you install the agent.

- When the VM StellarProtect (Legacy Mode) agent starts for the 1st time, it will ask you to setup the Approved List. Select the “**Yes. Setup the Approved List now**”. It will take around 3-5 minutes to build the Approved list.

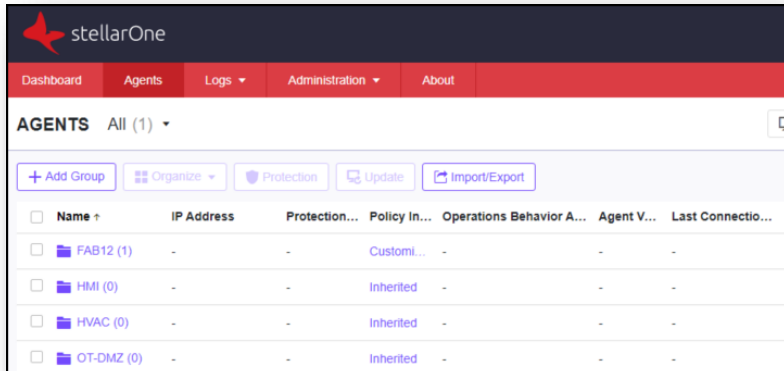


4. Labs

Lab1: RBAC (Role Based Access Control) management

Table 5 RBAC (Role Based Access Control) management

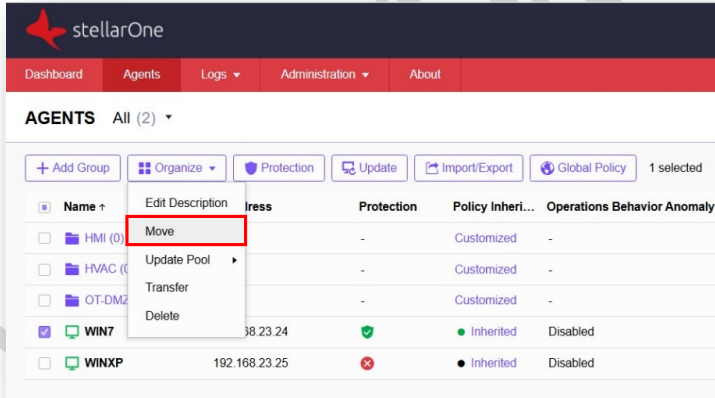
Items	Descriptions
Lab Case	RBAC (Role Based Access Control) management
Scope	StellarOne In this lab, we will evaluate Users, Roles, Agent Groups. Then we will assign Policies to the groups and restrict user access to the groups.
Steps	The LabConsole vm and StellarOne used for the Lab practice 1. Log in to the LabConsole VM. 2. Open the Chrome browser. 3. Go to the StellarOne web UI, https://192.168.23.19. User: admin Password: 12345678 4. Create the following three agent groups: HMI, HVAC, and OT-DMZ. 5. On the Agent groups, create the policy settings according to the table below. 6. Also create the user accounts according to the table below. 7. If you are not sure, ask your trainer.'

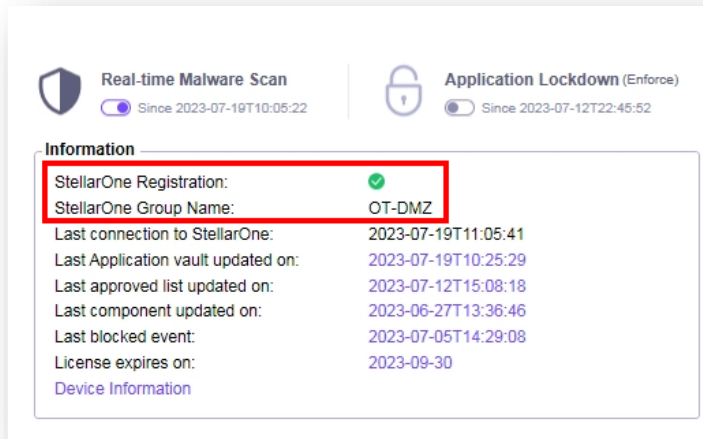
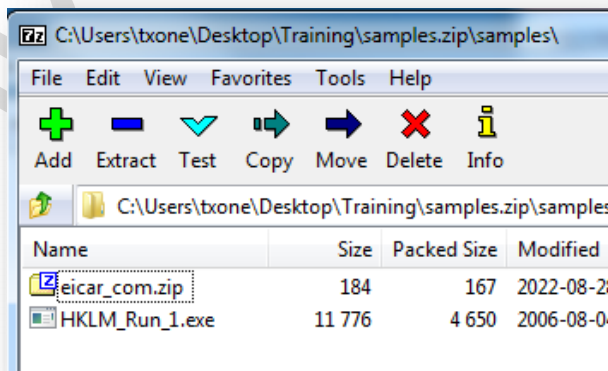
Items	Descriptions																																											
	 The following table serves as a reference for Policy Configuration <table><tr><th>Agent Group</th><th>Management Policy</th><th>Settings</th></tr><tr><td rowspan="17">OT-DMZ</td><td>Group admin / Master admin</td><td>admin</td></tr><tr><td>Function type</td><td>StellarProtect</td></tr><tr><td colspan="2">1. Customized policy</td></tr><tr><td>2. Application lockdown</td><td>Disabled</td></tr><tr><td colspan="2">3. Multi-Method Threat Prevention</td></tr><tr><td>Real-Time Scan</td><td>Enabled</td></tr><tr><td>Predictive Machine Learning</td><td>Enabled</td></tr><tr><td>Ransomware Behavior Monitor</td><td>Enabled</td></tr><tr><td>Scheduled Scan</td><td>Disabled</td></tr><tr><td>4. OBAD</td><td>Enforce</td></tr><tr><td>Strict mode</td><td>Disabled</td></tr><tr><td>Script behavior</td><td>Enabled</td></tr><tr><td>User login</td><td>Enabled</td></tr><tr><td>App behavior</td><td>Enabled</td></tr><tr><td>Network Access</td><td>Enabled</td></tr><tr><td>5. OT Application Safeguard</td><td>Enabled</td></tr><tr><td>6. Set Policy refresh interval</td><td>5 minutes</td></tr><tr><td rowspan="2">HMI</td><td>Group admin / Operator</td><td>admin_hmi / 12345678</td></tr><tr><td>Function type</td><td>StellarProtect</td></tr></table>	Agent Group	Management Policy	Settings	OT-DMZ	Group admin / Master admin	admin	Function type	StellarProtect	1. Customized policy		2. Application lockdown	Disabled	3. Multi-Method Threat Prevention		Real-Time Scan	Enabled	Predictive Machine Learning	Enabled	Ransomware Behavior Monitor	Enabled	Scheduled Scan	Disabled	4. OBAD	Enforce	Strict mode	Disabled	Script behavior	Enabled	User login	Enabled	App behavior	Enabled	Network Access	Enabled	5. OT Application Safeguard	Enabled	6. Set Policy refresh interval	5 minutes	HMI	Group admin / Operator	admin_hmi / 12345678	Function type	StellarProtect
Agent Group	Management Policy	Settings																																										
OT-DMZ	Group admin / Master admin	admin																																										
	Function type	StellarProtect																																										
	1. Customized policy																																											
	2. Application lockdown	Disabled																																										
	3. Multi-Method Threat Prevention																																											
	Real-Time Scan	Enabled																																										
	Predictive Machine Learning	Enabled																																										
	Ransomware Behavior Monitor	Enabled																																										
	Scheduled Scan	Disabled																																										
	4. OBAD	Enforce																																										
	Strict mode	Disabled																																										
	Script behavior	Enabled																																										
	User login	Enabled																																										
	App behavior	Enabled																																										
	Network Access	Enabled																																										
	5. OT Application Safeguard	Enabled																																										
	6. Set Policy refresh interval	5 minutes																																										
HMI	Group admin / Operator	admin_hmi / 12345678																																										
	Function type	StellarProtect																																										

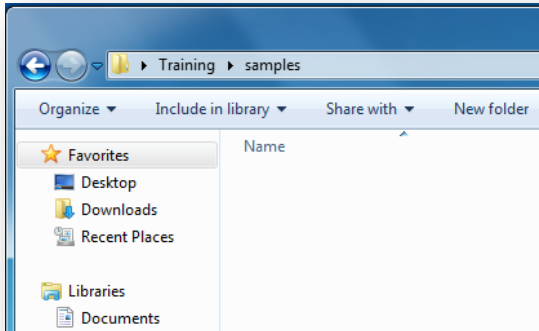
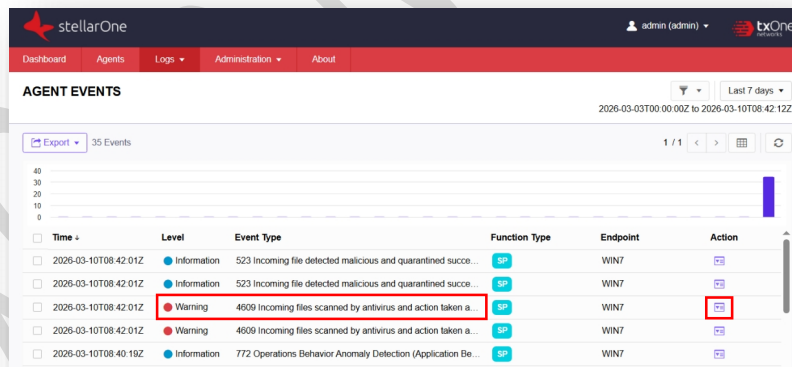
Items	Descriptions		
		1. Customized policy	
		2. Agent component update schedule	By Weekly Every Sunday, 20:00
	HVAC	Group admin / Operator	admin_hvac / 12345678
		Function type	StellarProtect (Legacy Mode)
		1. Customized policy	
		2. Application lockdown	Enforce
		3. Real-Time Scan	Disabled
		4. Scheduled Scan	Disabled
		5. Agent Component Update Schedule	Disabled
		6. OBAD	Disabled
Expected Results	Agent groups, Users and Roles Based Access to the groups created (notice that the groups are still empty)		

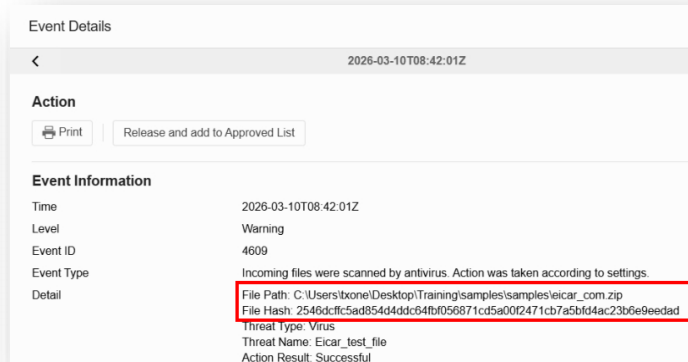
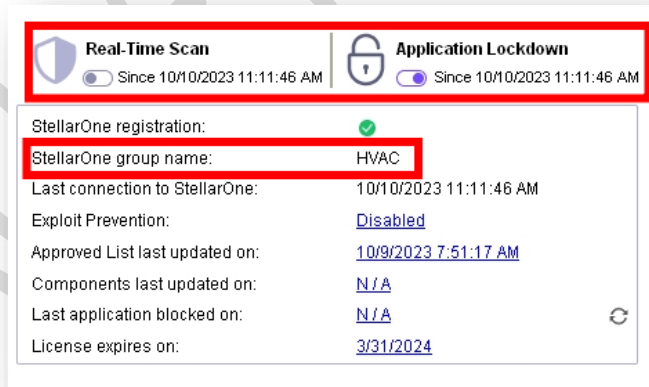
Lab2: Antivirus

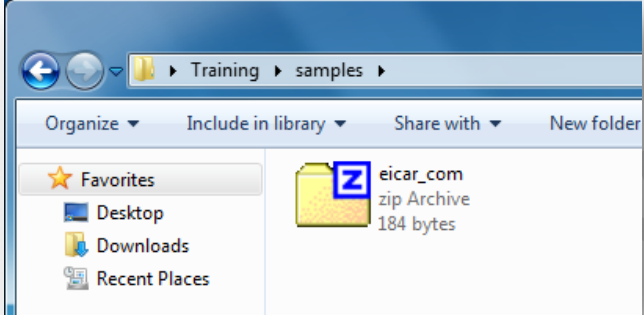
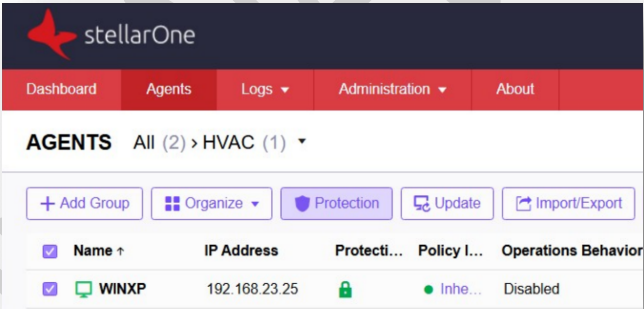
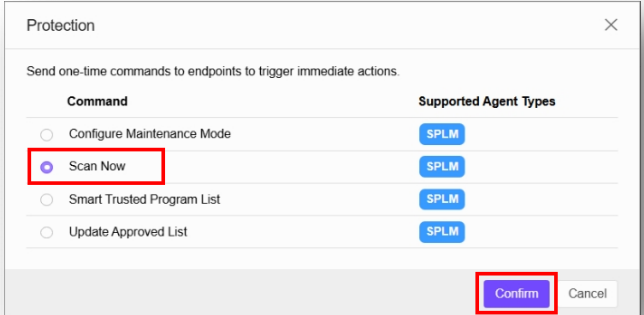
Table 6 Antivirus

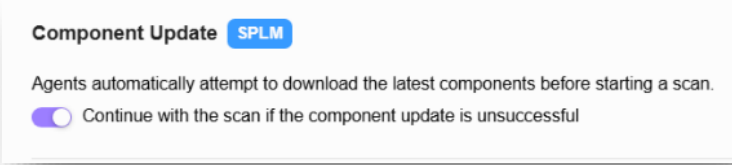
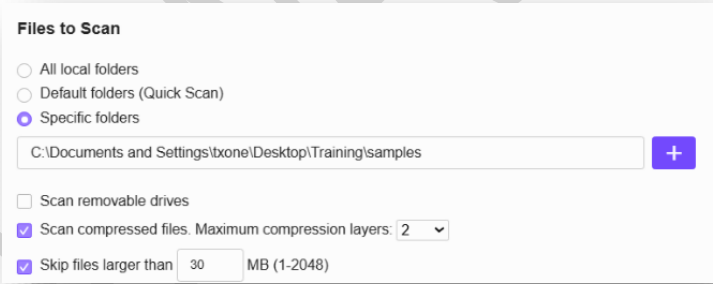
Items	Descriptions
Lab Case	Stellar Antivirus
Scope	StellarProtect and StellarProtect (Legacy Mode) In this lab we will scan for malware. We will do a real-time scan on Windows 7 and an on-demand scan on Windows XP
Steps	Lab Preparation - Log in to the LabConsole vm, go to the StellarOne web UI, https://192.168.23.19. - Move the agent Win7 to the agent group OT-DMZ.  - Move the agent “WinXP” to the agent group HVAC. - Sync the policies to the agents Win7, WinXP. (select the groups -> Update -> Apply Policies -> Confirm).

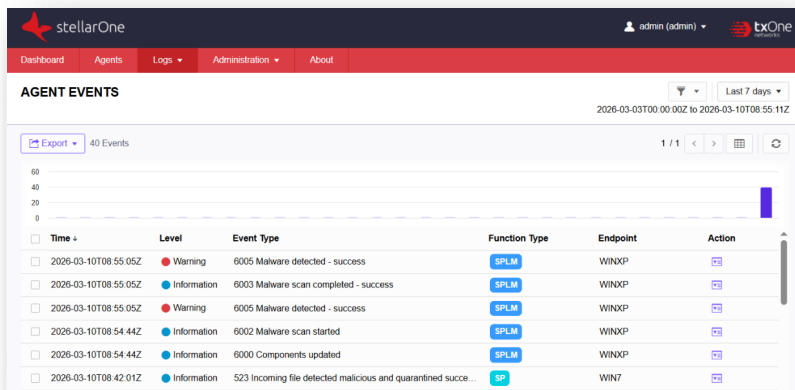
Items	Descriptions
	Real-Time Antivirus 1. Log in to the Win7 vm. 2. Open the StellarProtect agent console. Check the agent setting and the StellarOne group name.  3. Create a folder Training on the desktop. 4. Download sample.zip from LabConsole, save it to Training folder and expand the file samples.zip. 5. Check the file list of the zip file. There should be two files in the zip file. 

Items	Descriptions
	6. Unzip the samples.zip (the password is “virus”). 7. Check the samples folder. 8. The folder should be empty, because the extracted files have been deleted and quarantined by StellarProtect.
	 9. Check the Agent logs. There should be 2 log events: one for eicar_com.zip and one for HKLM_Run_1.exe. Both files have been quarantined.
	

Items	Descriptions
	10. Check the Event details.  Antivirus On demand scan Windows XP now also supports real-time malware scanning, but for this exercise we will use an on-demand scan. 1. Log in to the WinXP vm. 2. Open the StellarProtect Legacy Mode agent console. Check the agent settings and the StellarOne group name.  3. Create a folder named "Training" on the desktop. 4. Download the file sample.zip from LabConsole, save it to Training folder and unzip the samples.zip (password "virus").

Items	Descriptions
	Hint: If the browser cannot display the web page, navigate directly to http://192.168.23.196/training/stellar. 5. Check the samples folder. You should see eicar_com.zip.  6. Log in to the LabConsole vm and go to the StellarOne web UI. 7. Select the agent WinXP from HVAC group and click on Protection button.  8. Select the “Scan Now”, then click “Confirm”. 

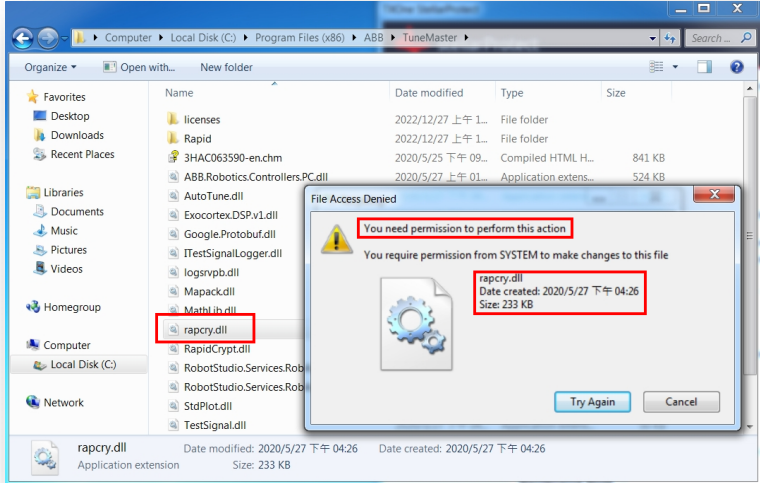
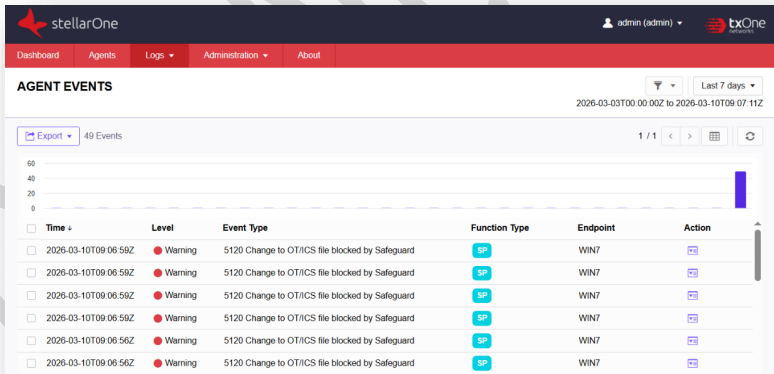
Items	Descriptions
	9. Enable the “continue with the scan if the component update is unsuccessful”.  10. Choose the option “Specific folders” in File Scan dialog box. 11. Set the “Files to Scan” path to “C:\Documents and Settings\txone\Desktop\Training\Samples\Samples”. 12. Select the option “Scan compressed files”. 13. Set maximum layers to 2.  14. Click on “Confirm” to launch the on-demand scan on the agent WinXP. 15. Log in to the WinXP vm. 16. Observe the samples folder. The eicar_com.zip file will “Disappear” after a few seconds. (This is Windows XP; you may need to refresh the File Explorer to see any changes.)

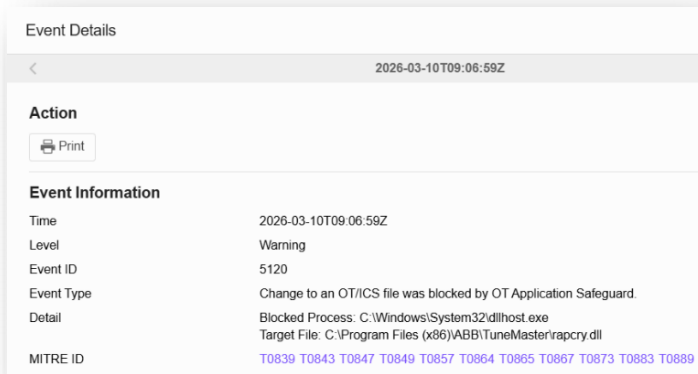
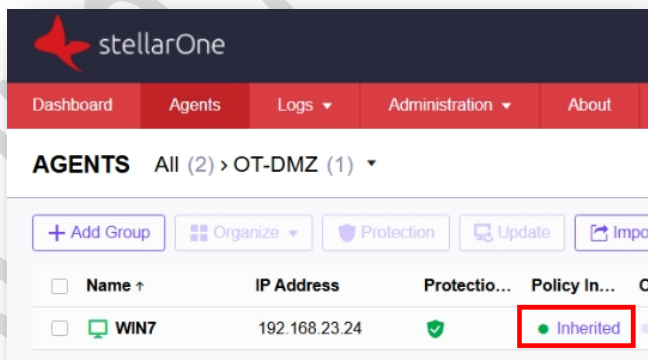
Items	Descriptions
	17. Return to the StellarOne web UI. 18. Check the agent logs for “Malware detected” events.  19. Check the event details. 
Expected Results	StellarProtect detected the malware StellarProtect Legacy Mode on demand scan detected the malware

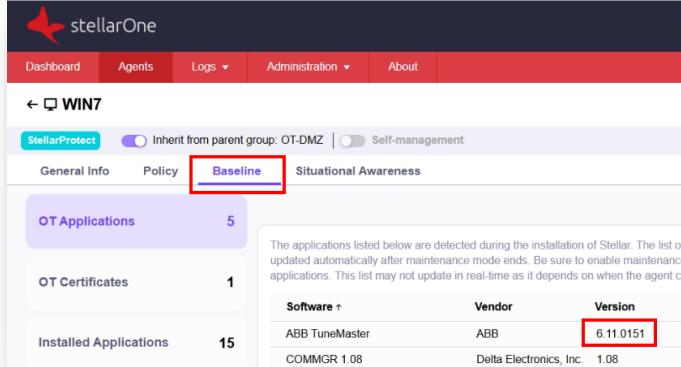
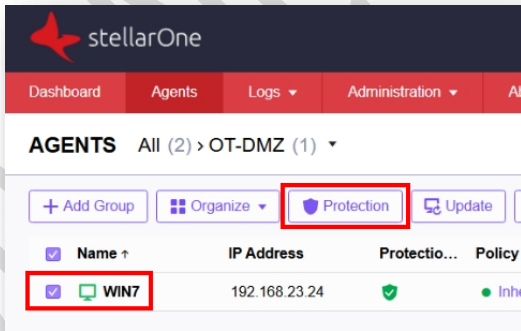
Lab3: OT Application Safeguard

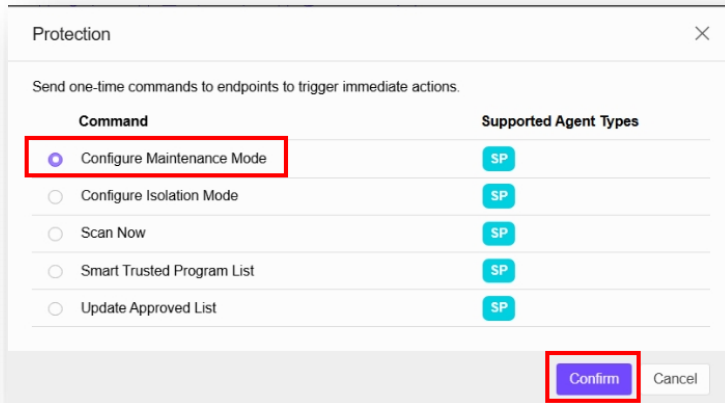
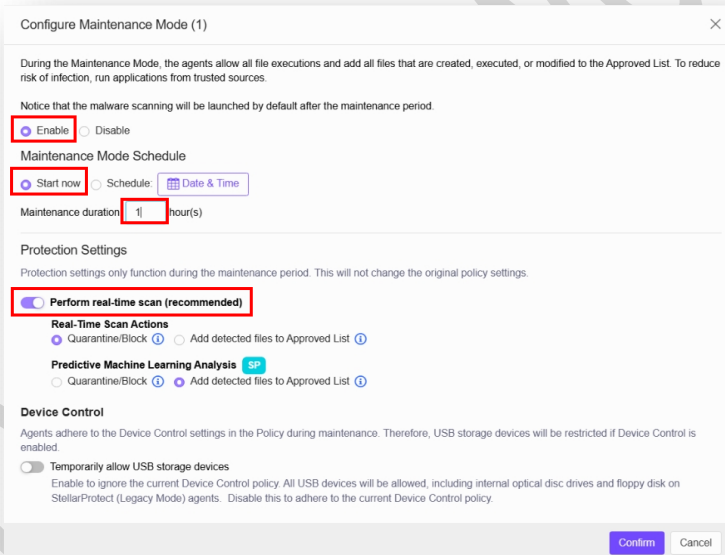
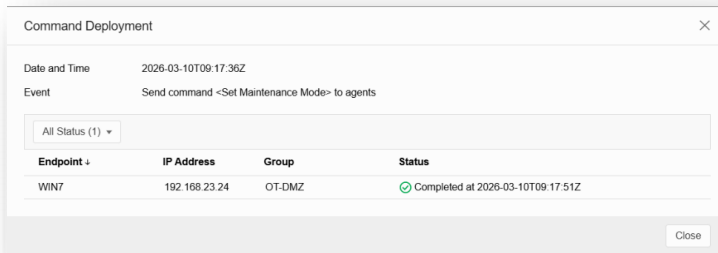
Table 7 OT Application Safeguard

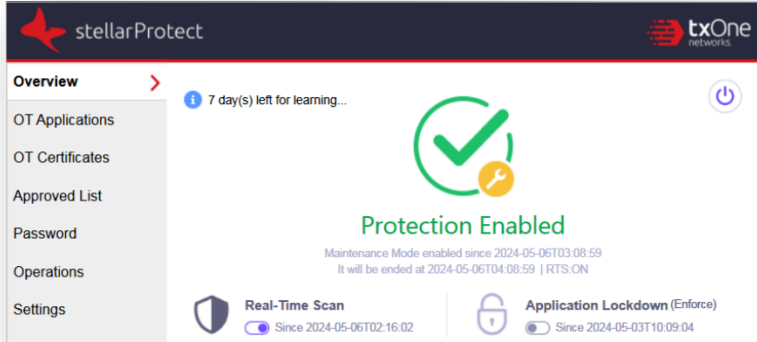
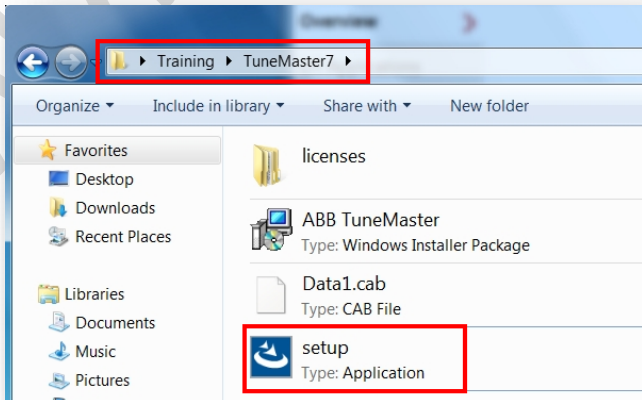
Items	Descriptions
Lab Case	OT Application Safeguard
Scope	StellarProtect In this lab we will verify that OT Application Safeguard blocks any changes to executable components of protected OT applications. Then we will use Maintenance Mode to upgrade an OT application and see that the new version of the OT Application is now whitelisted.
Steps	- Log in to the Win7 vm. - In the Agent Console, verify that OT Application Safeguard is enabled. - Open the OT application folder C:\Program Files (x86) \ABB\TuneMaster - Try to delete any dll file, e.g., rapcry.dll.

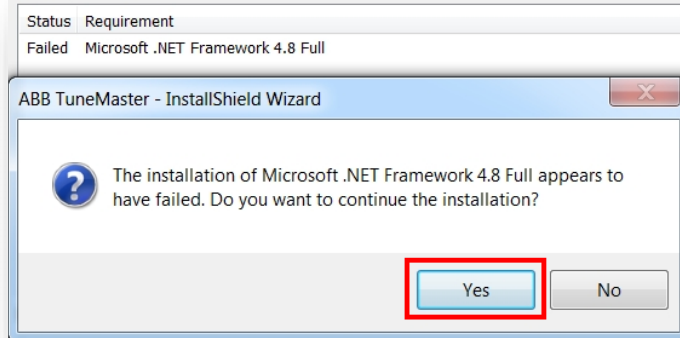
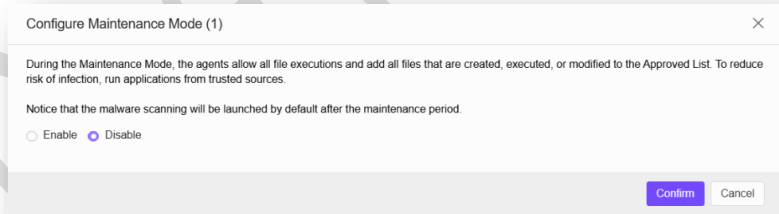
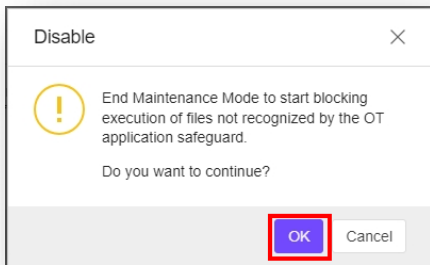
Items	Descriptions
	5. StellarProtect OT Application Safeguard prevents making changes to this file.  6. Check the Agent events in the StellarOne web UI. 

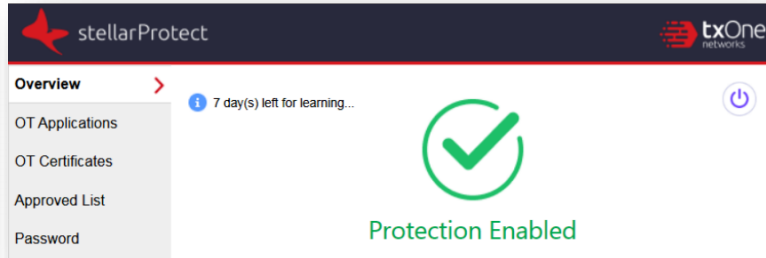
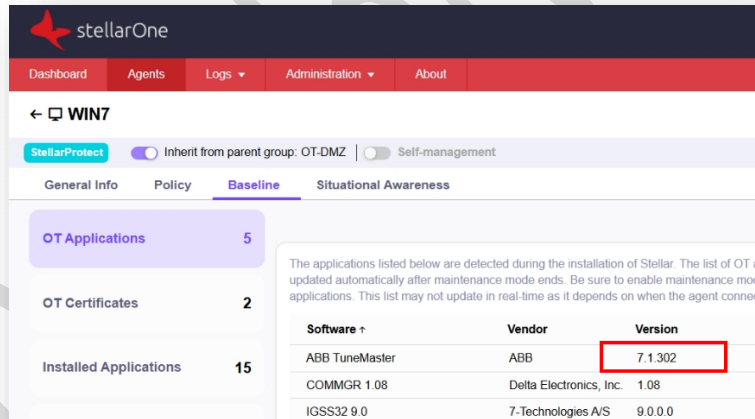
Items	Descriptions
	7. Click on the “Action” button. You’ll see that OT Application Safeguard blocked the action.  The screenshot shows an 'Event Details' window for a security event. The 'Action' section has a 'Print' button. The 'Event Information' section lists: Time (2026-03-10T09:06:59Z), Level (Warning), Event ID (5120), Event Type (Change to an OT/ICS file was blocked by OT Application Safeguard.), Detail (Blocked Process: C:\Windows\System32\dlhost.exe, Target File: C:\Program Files (x86)\ABB\TuneMaster\rapcry.dll), and MITRE ID (T0839 T0843 T0847 T0849 T0857 T0864 T0865 T0867 T0873 T0883 T0889). Validate the current version of an OT Application 1. Go to the StellarOne web UI. 2. Go to Agents. 3. Open the policy configuration of the Win7 agent, under the OT-DMZ group.  The screenshot shows the StellarOne web UI. The top navigation bar includes Dashboard, Agents, Logs, Administration, and About. The main section is titled 'AGENTS' and shows 'All (2) > OT-DMZ (1)'. Below this, there are buttons for '+ Add Group', 'Organize', 'Protection', 'Update', and 'Import'. A table lists agents with columns for Name, IP Address, Protection, Policy In..., and Op. The 'WIN7' agent is listed with IP Address 192.168.23.24 and a green checkmark in the Protection column. The 'Policy In...' column for the WIN7 agent is highlighted with a red box and contains the text 'Inherited'.

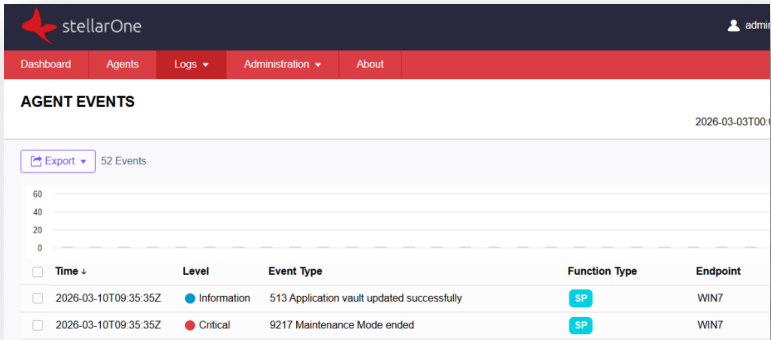
Items	Descriptions
	4. Open the “Baseline” tab. 5. Check the version of ABB TuneMaster. It should be version 6.  Enable Maintenance Mode. 1. Select the WIN7 agent under the OT-DMZ group and click on the “Protection” button. 

Items	Descriptions
	2. Select Configure Maintenance Mode and click “Confirm”.  3. Configure maintenance Mode (Start Now for 1 hour).  4. Make sure the Command Deployment has completed. 

Items	Descriptions
	5. Check the Agent status in the Agent Console. You should see the wrench badge.  Upgrade ABB TuneMaster to version 7 1. Log in on the Win7 VM. 2. Open Internet Explorer. Download TuneMaster7.zip from LabConsole and save the file to the Training folder on the Desktop. 3. Open the Training folder. 4. Unzip TuneMaster7.zip. 5. Go to the TuneMaster7 folder and run setup.exe as Administrator. 

Items	Descriptions
	6. The .NET Framework 4.8 will take around 7 minutes to install. You may see CPU usage going to 100% and remaining at that level for a couple of minutes, after which it will decrease to lower than 20%. You can ignore the ".NET Framework 4.8 installation failed" message if it appears.  After the ABB TuneMaster 7 installation has completed - Return to the StellarOne web UI. - Disable Maintenance Mode and click "Confirm".  - Click "OK". 

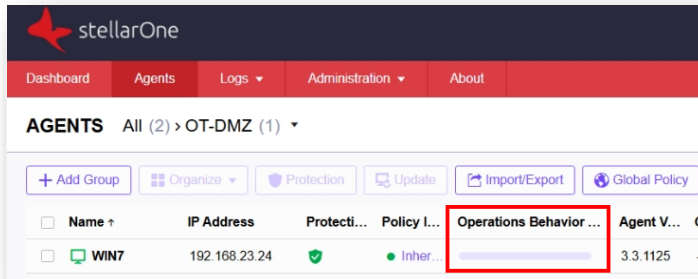
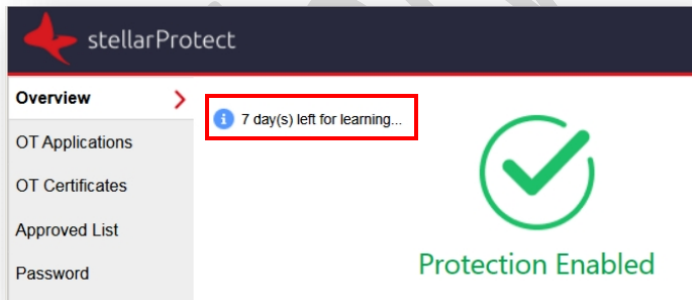
Items	Descriptions
	4. Check that wrench badge has disappeared in the Agent Console.  5. Return to the StellarOne web UI. 6. Check the ABB TuneMaster version in the OT Applications list in the OT Applications tile under the “Baseline” of the WIN7 vm. (Agents -> WIN7-> Baseline -> OT Applications). 

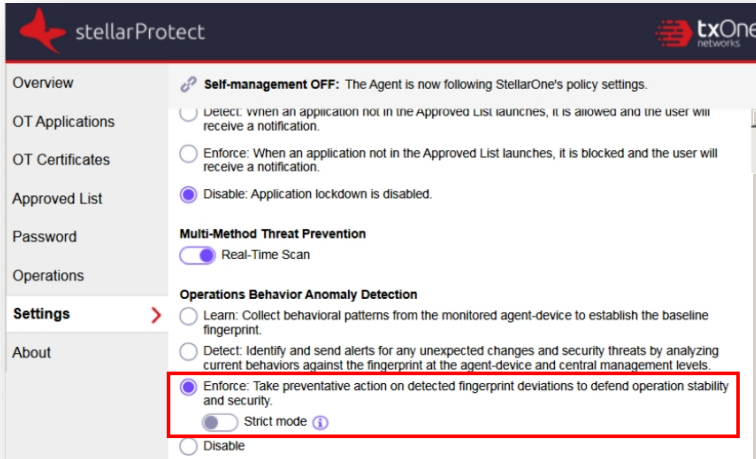
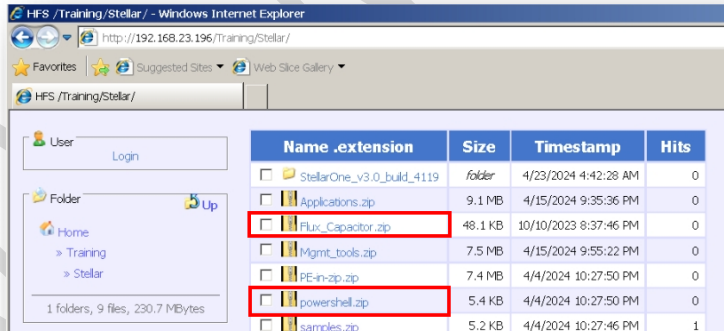
Items	Descriptions
	7. Check the agent logs. 
Expected Results	● StellarProtect blocks any changes to an executable file that belongs to supported OT applications. ● The version of ABB TuneMaster in the "OT Applications" list has been updated from v6 to v7. This new version has been automatically whitelisted by OT Application Safeguard.

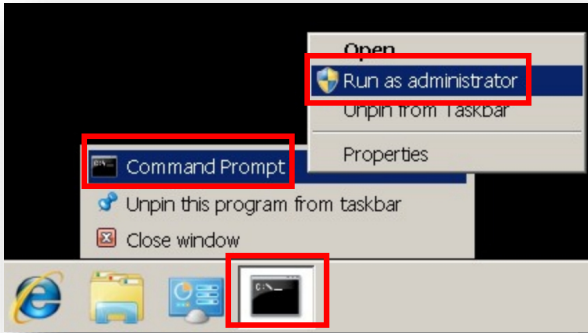
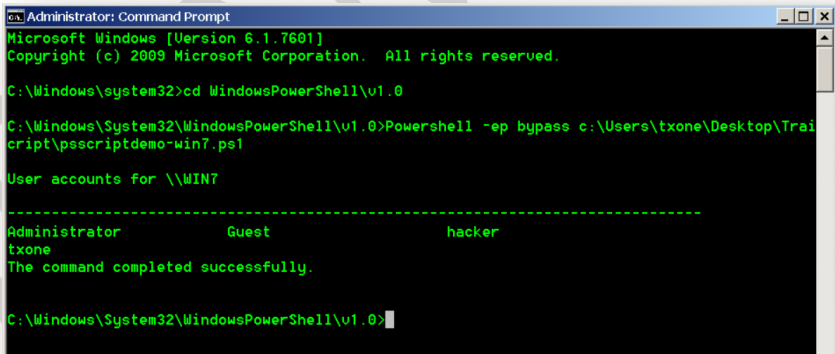
Lab4: Operations Behavior Anomaly Detection

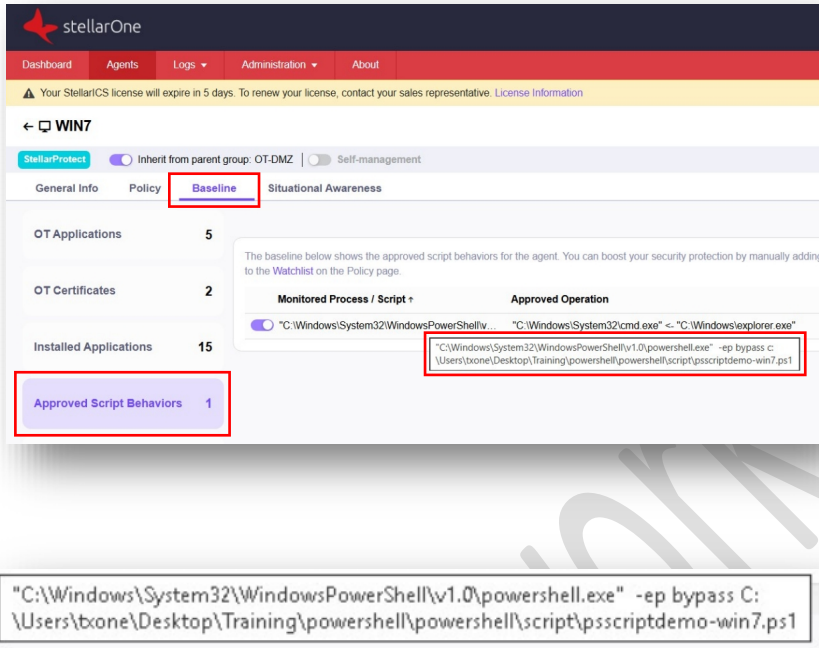
Table 8 Operations Behavior Anomaly Detection

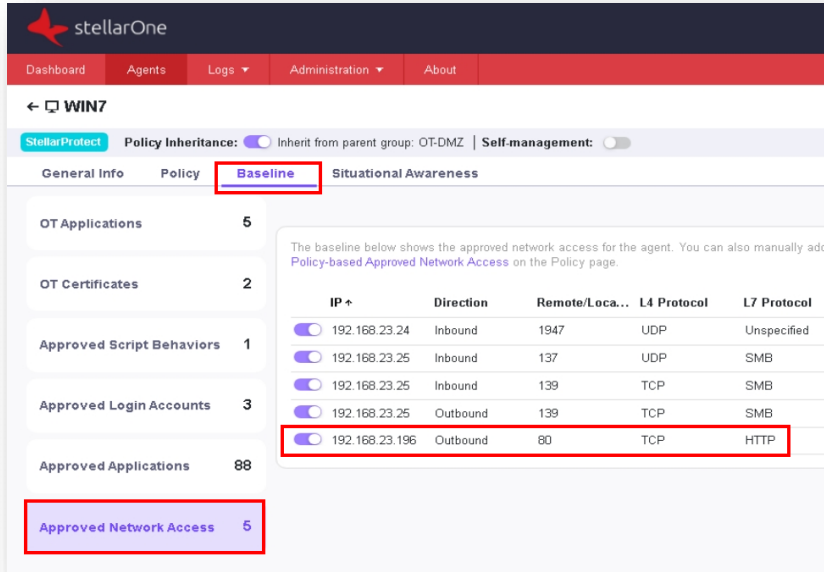
Items	Descriptions
Lab Case	Operations Behavior Anomaly Detection (OBAD)
Scope	StellarProtect Operations Behavior Anomaly Detection (OBAD) is the behavior detection module of StellarOne. In this lab we will evaluate the OBAD behavior detection for “Script Behavior” and “Network Access”
Steps	If you set the OBAD module to "Detect" or "Enforce" mode before it has completed its learning period, the module will initially enter "Learning" mode. It will stay in this mode until the pre-configured learning period has passed. In Learn mode it learns the normal behavior of the OT endpoint. After the learning period ends, OBAD will switch to the selected mode ("Detect" or "Enforce") and begin providing security. We want to focus on testing OBAD and want to avoid any actions that would be caused by Application Lockdown, so make sure that Application Lockdown is disabled. Set Operations Behavior Anomaly Detection to Enforce and check the current mode 1. Set OBAD to Enforce mode with “Strict” disabled. 2. Verify the subsections “Script Behavior” and “Network Access” are enabled. The sub settings for “User Login” and “Application Behavior” may be left enabled, but they are not relevant for this particular lab. 3. Save the Policy and return to the Agent list.

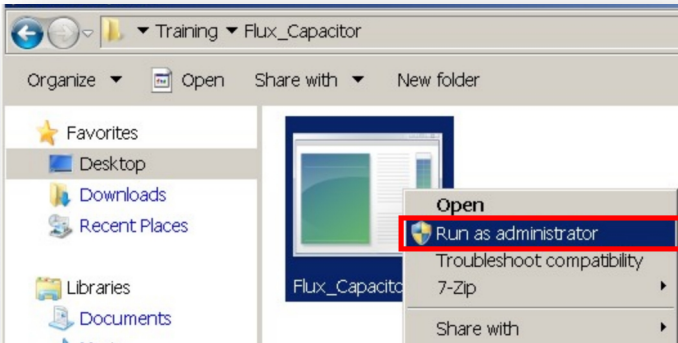
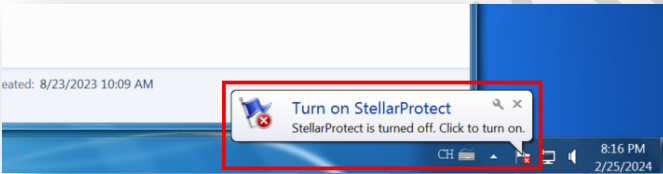
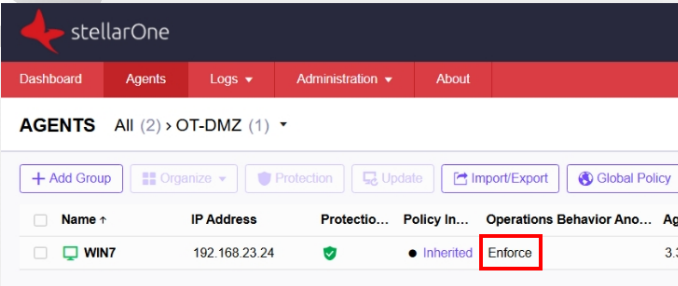
Items	Descriptions
	4. Verify that you see the progress bar under Operations Behavior Anomaly Detection.  5. On the Agent Console, you can check the OBAD Learn status in the Overview tab.  6. Go to the “Settings” tab and check the status of OBAD. Notice that it is set to Enforce. But be aware that the Enforcement will only become effective after the Learn period.

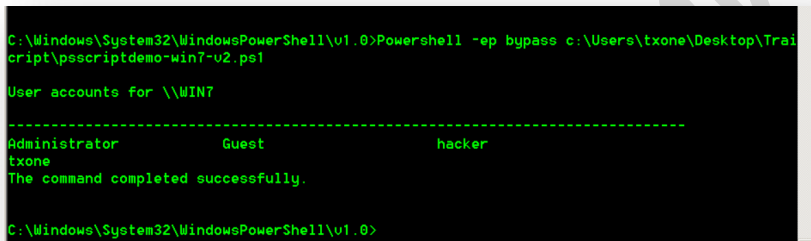
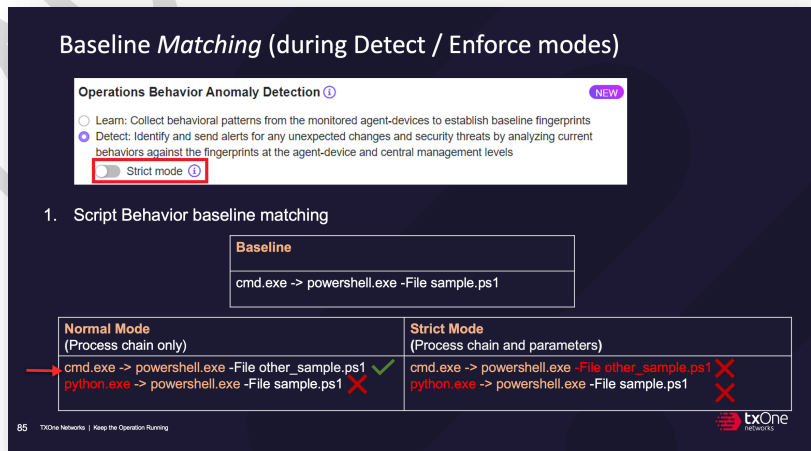
Items	Descriptions
	 Let's give OBAD a script behavior to learn 7. On the Win7 VM, download the files powershell.zip and Flux_Capactor_vx.x.zip from LabConsole and save them to the training folder on the Desktop.  8. Extract the zip files powershell.zip and Flux_Capactor_x.y.zip. The unzip password for Flux_Capactor.zip is novirus. But do not run them yet.

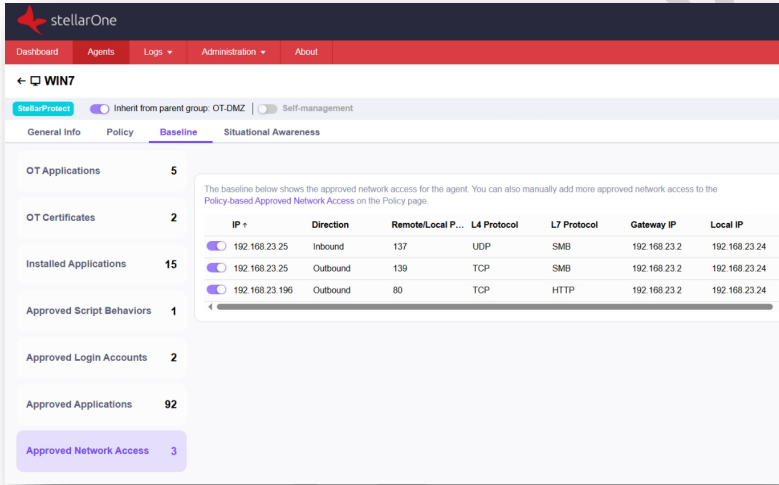
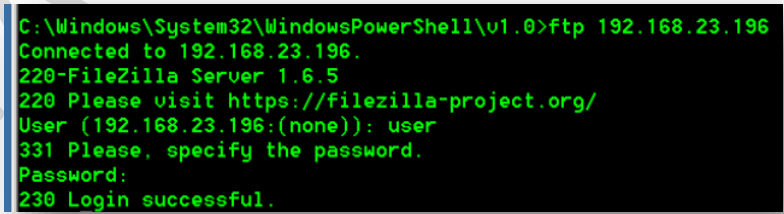
Items	Descriptions
	9. Open a command prompt with Administrator rights.  10. Type the following commands: <pre>cd c:\Windows\System32\WindowsPowerShell\v1.0</pre> 11. Enter the line below as one single command. There are no line-breaks: <pre>PowerShell -ep bypass C:\Users\txone\Desktop\Training\powershell\powershell\script\psscriptdemo-win7.ps1</pre>  12. Wait for 5 minutes (for the policy to sync on its schedule). In the StellarOne web console, go to the Policy on the Win7 agent and check the Approved Script Behaviors in the Baseline tab. The script that you just executed should have been learned by OBAD.

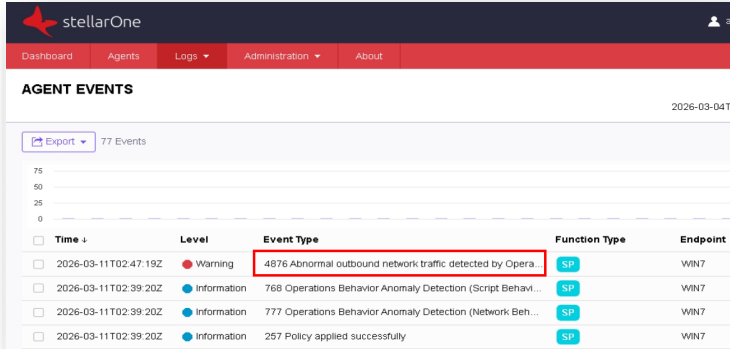
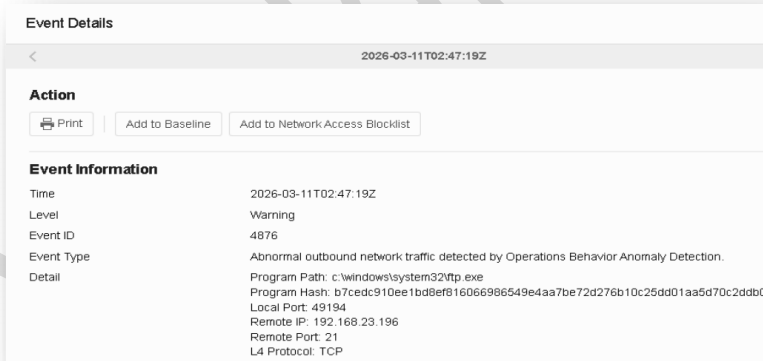
Items	Descriptions
	 13. On the same page, also check the “Approved Network Access”. There should be a line-item for Outbound traffic to IP 192.168.23.196 with HTTP on port 80. This was learned when you downloaded the flux_capacitor tool.

Items	Descriptions
	 Enforce mode: only allowed operations can be executed 14. Now, let's test OBAD in Enforce mode. Keep in mind that the agent can only switch to Enforce mode after the Learn period has fully passed. Fortunately, we have a workaround for this. We've created a simple tool, the "flux_capacitor," to stop OBAD's learning mode. Please note that this tool works only in the training environment. 15. Return to the Win7 vm and run the Flux_capacitor exe. Desktop\Training\Flux_Capactor_vx.x\Flux_Capactor_vx.x.exe , run it as Administrator. This will make OBAD believe that the Learn period has passed.

Items	Descriptions
	 16. You should see that the StellarProtect Service Stops (and then restarts).  17. Remember we set OBAD to Enforce earlier. Because the Learn period has now passed, OBAD should now be able to enforce protection for scripts (only). 18. On StellarOne, verify that the Learning period for OBAD had ended and that OBAD is in Enforce mode, with Strict mode disabled. 

Items	Descriptions
	19. Return to the Win7 vm. 20. Open the command prompt with Administrator rights and now run the v2 of that script. cd c:\Windows\System32\WindowsPowerShell\v1.0 21. Enter the PowerShell command and execute it. PowerShell -ep bypass C:\Users\txone\Desktop\Training\powershell\powershell\script\psscriptdemo-win7-v2.ps1  22. The script is still allowed to run because OBAD is not in 'Strict' mode and the "process tree" is still the same; with the exception of the script-file. Any unknown scripts are still permitted as long as the first elements of the 'Process Tree' match a baseline element. See the red arrow in the slide below." 

Items	Descriptions
	Test OBAD Network Access Behavior 23. Before testing Network Access Behavior, check the Baseline for Approved Network Access. It should not contain an outbound connection to port 21. (your Baseline will probably have other, or no events at all)  24. Run the following ftp command <pre>ftp 192.168.23.196 user: user password: 12345678</pre> 

Items	Descriptions
	25. In StellarOne, review the agent logs. You should see a 4876 event, detected by OBAD. This is for an outgoing connection that does not match the baseline. Because the port (21) does not match a baseline-entry, OBAD generates an alert.  26. Check the event details.  27. Now go to StellarOne and enable Strict Mode in the OBAD feature of OT-DMZ group and push the policy to the agent again.

Items	Descriptions																				
	Operations Behavior Anomaly Detection ⓘ ☐ Learn: Establish the Baseline to enable behavioral analysis in Detect and Enforce modes. ☐ Detect: Log events when abnormal activities are detected. ☒ Enforce: Log events when abnormal activities are detected, and automatically block unexpected Script Behavior changes. To block activities against Application Behavior and Network Access, the agent's Suspicious Objects Blocklist and Network Access Blocklist must be created first. ☒ Strict mode: Less tolerance for deviation between running behaviors and the Baseline. This may generate more events. 28. Execute the same (v2) PowerShell script: PowerShell -ep bypass C:\Users\txone\Desktop\Training\powershell\script\psscriptdemo-win7-v2.ps1 29. The PowerShell script should now be blocked by StellarProtect. <pre>C:\Windows\System32\WindowsPowerShell\v1.0>Powershell -ep bypass c:\Users\txone\Desktop\Training\powershell\script\psscriptdemo-win7-v2.ps1 Access is denied. C:\Windows\System32\WindowsPowerShell\v1.0></pre> 30. Check the agent logs in the StellarOne web UI. <table><thead><tr><th>Time</th><th>Level</th><th>Event Type</th><th>Function Type</th></tr></thead><tbody><tr><td>2026-03-11T02:54:54Z</td><td>Warning</td><td>4866 Script behavior blocked by Operations Behavior Anomaly Detection</td><td>SP</td></tr><tr><td>2026-03-11T02:54:25Z</td><td>Information</td><td>771 Operations Behavior Anomaly Detection (User Login) enabled</td><td>SP</td></tr><tr><td>2026-03-11T02:54:25Z</td><td>Information</td><td>768 Operations Behavior Anomaly Detection (Script Behavior) enabled</td><td>SP</td></tr><tr><td>2026-03-11T02:54:25Z</td><td>Information</td><td>257 Policy applied successfully</td><td>SP</td></tr></tbody></table>	Time	Level	Event Type	Function Type	2026-03-11T02:54:54Z	Warning	4866 Script behavior blocked by Operations Behavior Anomaly Detection	SP	2026-03-11T02:54:25Z	Information	771 Operations Behavior Anomaly Detection (User Login) enabled	SP	2026-03-11T02:54:25Z	Information	768 Operations Behavior Anomaly Detection (Script Behavior) enabled	SP	2026-03-11T02:54:25Z	Information	257 Policy applied successfully	SP
Time	Level	Event Type	Function Type																		
2026-03-11T02:54:54Z	Warning	4866 Script behavior blocked by Operations Behavior Anomaly Detection	SP																		
2026-03-11T02:54:25Z	Information	771 Operations Behavior Anomaly Detection (User Login) enabled	SP																		
2026-03-11T02:54:25Z	Information	768 Operations Behavior Anomaly Detection (Script Behavior) enabled	SP																		
2026-03-11T02:54:25Z	Information	257 Policy applied successfully	SP																		