

Stellar Agent Protect Edition

Installation Guide

Version 5.0



TXOne Networks Incorporated reserves the right to make changes to this document and to the product described herein without notice. Before installing and using the product, review the readme files, release notes, and/or the latest version of the applicable documentation, which are available at:

<https://my.txone.com/>


TXOne Networks, StellarOne, and Stellar Agent are trademarks or registered trademarks of TXOne Networks Incorporated. All other product or company names may be trademarks or registered trademarks of their owners.

Copyright © 2026. TXOne Networks Incorporated. All rights reserved.

Document Part No.: APEMxxxxx/2403xxAPEMxxxxx/2403xx

Release Date: April 2026

Protected by U.S. Patent No.: Patents pending.

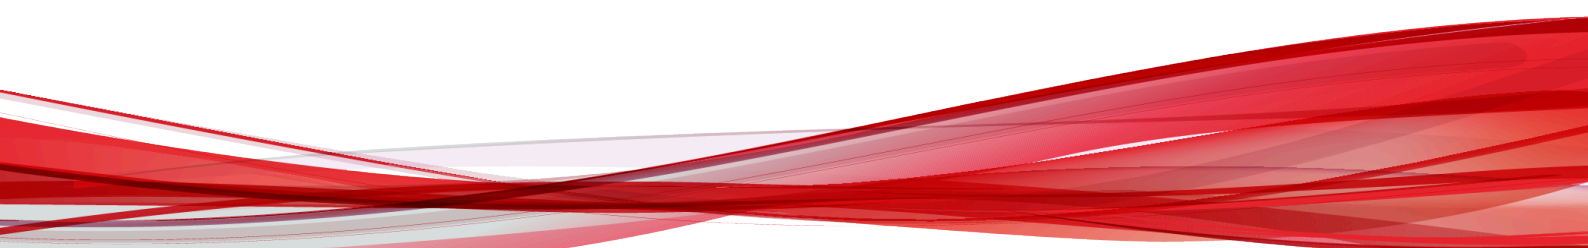


Privacy and Personal Data Collection Disclosure

Certain features available in TXOne Networks products collect and send feedback regarding product usage and detection information to TXOne Networks. Some of this data is considered personal in certain jurisdictions and under certain regulations. If you do not want TXOne Networks to collect personal data, you must ensure that you disable the related features.

Data collected by TXOne Networks is subject to the conditions stated in the TXOne Networks Global Privacy Notice:

<https://www.txone.com/privacy-policy/>


This documentation introduces the main features of the product and/or provides installation instructions for a production environment. Read through the documentation before installing or using the product.

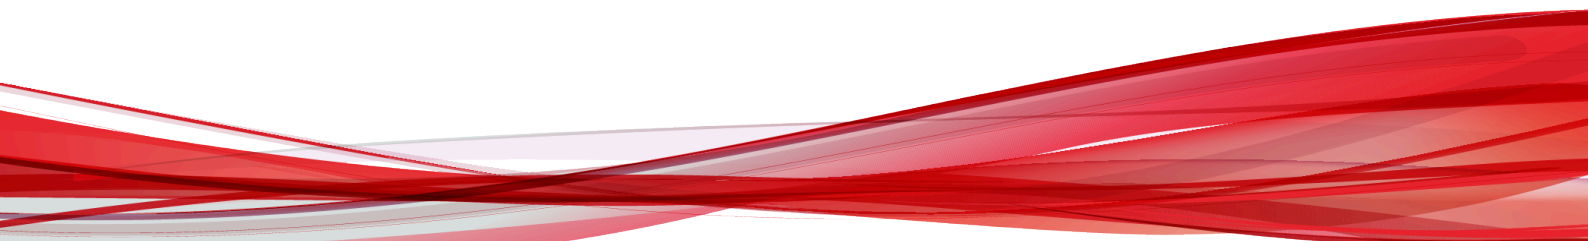

Contents

Preface.....	vi
About the Documentation.....	vii
Audience.....	vii
Document Conventions.....	vii
Terminology.....	viii
Chapter 1. Introduction.....	11
About TXOne Stellar.....	12
Key Features and Benefits.....	13
What's New.....	16
System Requirements.....	17
Software and Hardware Requirements.....	17
Operating Systems.....	20
Chapter 2. Installation (Windows).....	23
Agents Installed in Managed or Standalone Mode.....	24
Getting the Agent's Installer Package.....	24
Getting the Agent's Installer Package from StellarOne.....	24
Getting the Standalone Agent's Installer Package.....	25
Setup Configuration File.....	25
Comparison of Configuration Files Downloaded from Different Sources.....	26
Properties in the Config File.....	27
Encrypting Config File.....	66
Installation Methods.....	67
Attended Installation of Stellar Agent - Protect Edition.....	67
Attended Installation of Stellar Agent - Protect Edition (Windows-Legacy).....	80
Silent Installation.....	89
Installation Using the Command Line.....	96
License Activation for Standalone Agent.....	98
Getting the License File and PSN.....	102
Resolving Licensing Issues.....	108
Replicating Installation Configuration for Multiple Standalone Agents.....	109
Proxy Settings.....	109
Chapter 3. Installation (Linux).....	111
Chapter 4. Agent Configuration File Deployment.....	113
Deployment for Standalone Agents.....	114
Deployment Using StellarOne.....	114
Remotely Importing Agent Settings.....	114

Chapter 5. Upgrade	117
Supported Upgrade Paths	118
Preparing the Agent for Upgrade to a Later Version	119
Chapter 6. License Renewal	123
License Renewal for Standalone Agents	124
Chapter 7. Uninstallation (Windows)	129
Chapter 8. Uninstallation (Linux)	131
Chapter 9. Technical Support	133
Troubleshooting Resources	134
Using the Support Portal	134
Threat Encyclopedia	134
Contacting TXOne Networks	134
Speeding Up the Support Call	135
Other Resources	135
Download Center	135
Appendix A. Stellar Agent - Protect Edition (Windows-Legacy) Limitations by Operating Systems	137
Index	a

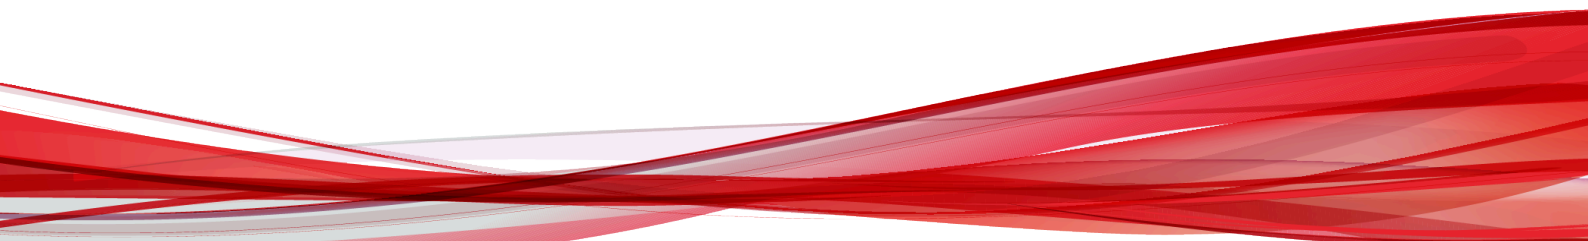


Preface

This guide introduces TXOne Stellar Agent - Protect Edition™ and guides administrators through installation and deployment.

Topics in this chapter include:

- [About the Documentation \(on page vii\)](#)
- [Audience \(on page vii\)](#)
- [Document Conventions \(on page vii\)](#)
- [Terminology \(on page viii\)](#)

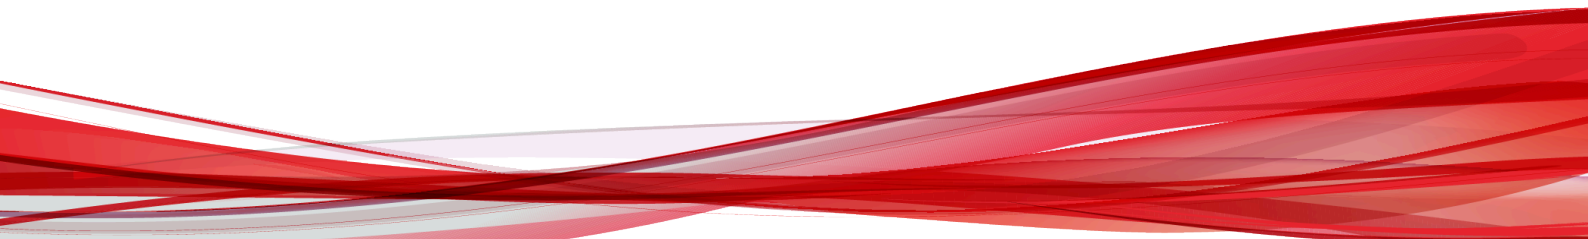

About the Documentation

TXOne Networks Stellar Agent - Protect Edition documentation includes the following:

Documentation	Description
Readme file	Contains a list of known issues and basic installation steps. It may also contain late-breaking product information not found in the other documents.
Installation Guide	A PDF document that discusses requirements and procedures for installing and managing Stellar Agent - Protect Edition.
Administrator's Guide	A PDF document that discusses Stellar Agent - Protect Edition agent installation, getting started information, and server and agent management
Knowledge Base	An online database of problem-solving and troubleshooting information. It provides the latest information about known product issues. To access the Knowledge Base, go to the following website: https://kb.txone.com/

Audience

TXOne Stellar Agent - Protect Edition™ documentation is intended for administrators responsible for Stellar Agent - Protect Edition™ management, including agent installation. These users are expected to have advanced networking and server management knowledge.

Document Conventions

The documentation uses the following conventions.

Table 1. Document Conventions

Convention	Description
UPPER CASE	Acronyms, abbreviations, and names of certain commands and keys on the keyboard
Bold	Menus and menu commands, command buttons, tabs, and options
<i>Italics</i>	References to other documents

Table 1. Document Conventions (continued)

Convention	Description
Monospace	Sample command lines, program code, web URLs, file names, and program output
Navigation > Path	The navigation path to reach a particular screen For example, File > Save means, click File and then click Save on the interface
 Note:	Configuration notes
 Tip:	Recommendations or suggestions
 Important:	Information regarding required or default configuration settings and product limitations
 Warning:	Critical actions and configuration options

Terminology

The following table provides the official terminology used throughout the TXOne Stellar Agent - Protect Edition documentation:

Terminology	Description
server	The StellarOne console server program
agents	The host running the Stellar Agent - Protect Edition program
managed agents	The hosts running the Stellar Agent - Protect Edition program that are known to the StellarOne server program

Terminology	Description
managed endpoints	
target endpoints	The hosts where the Stellar Agent - Protect Edition™ managed agents will be installed
Administrator (or Stellar Agent - Protect Edition administrator)	The person managing the Stellar Agent - Protect Edition agents
Stellar Agent - Protect Edition console	The user interface for configuring and managing Stellar Agent - Protect Edition settings
StellarOne (management) console	The user interface for configuring and managing the Stellar Agent - Protect Edition agents managed by StellarOne
CLI	Command Line Interface
license activation	Includes the type of Stellar Agent - Protect Edition agent installation and the allowed period of usage that you can use the application
agent installation folder	The folder on the host that contains the Stellar Agent - Protect Edition agent files. If you accept the default settings during installation, you will find the installation folder at one of the following locations: C:\Program Files\TXOne\StellarProtect C:\Program Files\TXOne\StellarProtect (Legacy Mode)

Chapter 1. Introduction

This section introduces TXOne Stellar Agent - Protect Edition the unified agent, and gives an overview of its functions.

Topics in this chapter include:

- [About TXOne Stellar \(on page 12\)](#)
- [Key Features and Benefits \(on page 13\)](#)
- [What's New \(on page 16\)](#)
- [System Requirements \(on page 17\)](#)

About TXOne Stellar

TXOne Stellar provides a context-focused security solution for OT endpoints and cyber-physical systems (CPS), aiming to defend operation stability with continuous detection and response aligned to the specific requirements of the OT domain.

TXOne Stellar platform is composed of the centralized management console server and unified agents apt for legacy OT devices and modern cyber-physical systems.

- StellarOne™, designed to streamline administration of the agents installed on modernized systems and legacy systems, along with its intuitive centralized management, consistent policy enforcement, and action-oriented alerts that empower security teams of all sizes and skill levels to successfully mature their organization's security posture.
- Stellar Agent (Windows)/ Stellar Agent (Windows-Legacy) / Stellar Agent Linux, using a single-agent design that delivers seamless asset-centric protection and ensures coverage for modern CPS and legacy OT devices throughout their entire asset lifecycle. The lightweight unified agent simplifies security by combining CPS Detection and Response (CPSDR), threat prevention, operations lockdown, device control. A Discover Sensor mode is also available, which enables visibility-focused deployments before moving to full protection.
 - CPSDR: Embodied within the advanced Operations Behavior Anomaly Detection feature, which establishes a unique baseline fingerprint of each agent-device during practicable operating states and performs fingerprint deviation analysis by means of an expansive industrial application repository and ransomware detection engine to defend against unexpected changes that may impact stability.

Moreover, TXOne Stellar brings the contextualization of security into an operation-led view to allow both the operation and security teams to achieve their goals without needing to compromise. To illustrate, if a device suddenly tried to start launching different applications, it would be blocked from doing so.

From the operation view, this may be an unplanned auto-update that, if run, would take the device offline to reboot. From a security view, this could be an attempt to access an encryption library that is about to be used to execute ransomware. By applying the operation context, both security and operation-initiated changes can be detected, and appropriate responses are taken.

In both cases, CPSDR stopped the event before it could occur. The security team followed up and resolved the ransomware infection in a different part of the environment. The operation team scheduled the required update for during an upcoming planned maintenance window.

- Multi-Method Threat Prevention: Provides advanced threat scan on the basis of ICS root of trust and operations-focused machine learning to secure the agent-devices against known and unknown malware threats without compromising operational availability.
- Operations Lockdown: For fixed-function and devices with limited patching availability, operations lockdown enforcement prohibits unauthorized changes, including alterations to registry and function parameters.
- Trusted Peripheral Control: Unauthorized access from external sources, such as USB devices, is configurable and controlled to reduce physical access threats.

Leveraging an expansive OT application and certificate library and exclusive ransomware detection engine, TXOne Stellar maintains CPS operational integrity through behavioral anomaly detection and eliminates configuration drift for legacy and fixed-use assets with device lockdown. Security teams can confidently deliver detection and response outcomes across the OT terrain, with TXOne Stellar effectively secure organization's security posture while maintaining its business operations stability.

Key Features and Benefits

The Stellar Agent - Protect Edition provides following features and benefits.

Table 2. Features and Benefits

Feature	Benefit
Cyber-Physical System Detection and Response (CPSDR)	The CPSDR requires a deep understanding of what the expected behaviors for each device are. Embodied within the advanced Operations Behavior Anomaly Detection feature, which primarily defends against unexpected changes that may impact operational stability by comparing daily operation processes and behaviors with a unique baseline of each agent-device and performing comprehensive behavioral analysis not only via identifying baseline deviation but also using TXOne Networks' exclusive industrial application repository and ransomware detection engine.
One unified agent	TXOne Stellar Agent - Protect Edition simplifies security by combining multi-method threat prevention, operations lockdown, and OT anomaly detection. The unified agent provides long-term support throughout the asset life cycle from modern to legacy.
Scan functions for modern and legacy systems	For modern systems, the Stellar Agent - Protect Edition provides Multi-Method Threat Prevention; the ICS root of trust and advanced threat scan secure OT assets with no interruption to operations. This feature is the core protection of Stellar Agent - Protect Edition. TXOne Networks integrates signature-based and AI-based malware detection engine to provide real-time scanning of any file or process activity. Meanwhile, the Stellar Agent - Protect Edition (Windows-Legacy) offers Threat Prevention that persistently scan new and changed files, along with system memory, to provide security assessment for maximum protection against malware in fixed-use and legacy systems. Stellar Agent - Protect Edition (Linux) delivers comprehensive threat prevention through real-time and scheduled scanning. For real-time scan , two operational modes are available: • Active Mode: Blocks execution and access of malicious files, and quarantines threats upon file landing.

Table 2. Features and Benefits (continued)

Feature	Benefit
	• Passive Mode: Allows file activity, while quarantining threats during execution, access, or file landing. This dual-mode capability ensures flexible protection strategies for diverse operational environments.
Application Lockdown	This operations lockdown feature prevents malware attacks and increases protection level by allowing only the files defined in an Approved List to be executed. By preventing programs, DLL files, drivers, and scripts not specified on the Approved List of applications from running (also known as application trust listing), Stellar Agent - Protect Edition and Stellar Agent - Protect Edition (Windows-Legacy) provide both improved productivity and system integrity by blocking malicious software and preventing unintended use. Furthermore, to ensure operational integrity, Intelligent Runtime Learning allows runtime executable files that are generated by applications in the Approved List to run smoothly.
Approved List Management	When software needs to be installed or updated, you can use one of the following methods to make changes to the endpoint that automatically adds new or modified files to the Approved List, all without having to unlock TXOne Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy): • Maintenance Mode • Trusted Updater (Windows-Legacy only) • Predefined Trusted Updater List (Windows-Legacy only) • Command Line Interface (CLI) • Trusted hash • Trusted certificate
DLL Injection Prevention	This feature detects and blocks API call behaviors used by malicious software. Blocking these threats helps prevent malicious processes from running.
Device Control	This feature prevents insider threats by only allowing usage of USB ports on a case-by-case administrator reviewed basis.  Note:

Table 2. Features and Benefits (continued)

Feature	Benefit
	 For Stellar Agent - Protect Edition (Windows-Legacy), Device Control is included as one of the features of <i>Exploit Prevention</i> settings.
Maintenance Mode	To perform file updates on endpoints, users can configure Maintenance Mode settings to define a period when Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) allows all file executions and adds all files that are created, executed, or modified to the Approved List.
Role Based Administration	TXOne Stellar Agent - Protect Edition and Stellar Agent - Protect Edition (Windows-Legacy) both provide a separate Administrator and User account, providing full control during installation and setup, as well as simplified monitoring and maintenance after deployment.
Self Protection	With self protection features, Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) are capable of defending its processes and resources, required to function properly, from being disabled by programs or actual users.
Graphical and Command Line Interfaces	Anyone who needs to check the software can use the console, while system administrators can take advantage of the command line interface (CLI) to access all of the features and functions available.
Features designed specifically for modernized assets: • OT Application Safeguard • Operations Behavior Anomaly Detection	For modernized assets, Stellar Agent - Protect Edition offers features such as OT Application Safeguard and Operations Behavior Anomaly Detection that detect behavioral anomalies and quickly determine operational credibility using an expansive library of OT applications and certificates. OT Application Safeguard intelligently locates and secures the operational integrity of the critical OT applications by preventing the un-authorized changes. TXOne Networks continuously builds up the only OT context-focused database that can identify thousands of applications and certificates to ensure undisturbed operations. Meanwhile, Operations Behavior Anomaly Detection detects abnormal operations and exercises least privilege-based control to prevent malware-free attacks by means of its auto-learn runtime behavior to adapt to the dynamic needs of autonomous operations.

Table 2. Features and Benefits (continued)

Feature	Benefit
Features designed specifically for legacy assets: • Write Protection • Fileless Attack Prevention • Exploit Prevention settings	For fixed-use and legacy systems, Stellar Agent - Protect Edition (Windows-Legacy) provides more options available from Application Lockdown settings. Write Protection blocks modification and deletion of files, folders, and registry entries; Fileless Attack Prevention detects and blocks unapproved process chains and arguments that may lead to a fileless attack event. For advanced threat prevention, Stellar Agent - Protect Edition (Windows-Legacy) <i>Exploit Prevention</i> settings includes Intrusion Prevention, Execution Prevention, and Device Control to stop threats from spreading to the endpoint or executing.

What's New

TXOne Stellar Agent - Protect Edition **5.0** provides following new features and enhancements.

Table 3. What's New in TXOne Stellar Agent - Protect Edition 5.0

Feature	Description
Streamlined installation process	Reduced total number of installation steps.
Specify UI language during installation	New language selection step in installer.
Enable/disable network drives scan for On-demand / Scheduled Scan on Linux	Ability to include/exclude network drives in on-demand scans and scheduled scans.
More supported Linux distributions	Support for additional Linux distributions.
Linux VDS integration	Integrated with "Vulnerability Detection Service (VDS)", allowing related information to also be visible in StellarOne.
Linux Predictive Machine Learning Analysis support for RTS and on-demand scans	RTS and on-demand scans now support Predictive Machine Learning Analysis. This feature can be enabled or disabled, and when enabled, the action can be configured as either Quarantine or Log only.
Linux on-demand scan YAML import support	The on-demand scan command now supports manual import of a YAML file to define scan configurations. It also provides a command for users to directly view the current configuration.

Table 3. What's New in TXOne Stellar Agent - Protect Edition 5.0 (continued)

Feature	Description
Linux on-demand scan progress visualization	For ongoing on-demand scans, users can now view real-time progress, including percentage completed, number of files scanned, and elapsed time.
Linux event action additional responses	In StellarOne, Linux agent event actions now support additional responses based on event content, including restoring quarantined files, adding to the approved list, and quarantine actions.
Linux watchdog to start and monitor txspd	Added a watchdog to start and monitor txspd across systemd and init, automatically restarting it on unexpected exits with rate limiting to avoid restart loops.
Linux retry mechanism for pattern update failures	A retry mechanism has been added so that if a pattern update fails, the system will perform automatic retries under defined conditions.

System Requirements

This section introduces the system requirements for Stellar Agent, including hardware and OS requirements.

Software and Hardware Requirements

TXOne Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy)/Stellar Agent - Protect Edition (Linux) does not have specific hardware requirements beyond those specified by the operating system, with the following exceptions:

Table 4. Required Hardware for Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) on Windows

Hardware	Description
Available free disk space	400MB
	 Note:

Table 4. Required Hardware for Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) on Windows (continued)

Hardware	Description
	 • Recommended free disk space for Stellar Agent - Protect Edition Single Installer required during the installation process: 1.5GB • Minimum memory usage required when Application Lockdown and Real-Time Scan are both enabled: ◦ Stellar Agent - Protect Edition: 350MB ◦ Stellar Agent - Protect Edition (Windows-Legacy): 300MB • Minimum memory usage required when Application Lockdown is enabled and Real-Time Scan is disabled: ◦ Stellar Agent - Protect Edition: 120MB ◦ Stellar Agent - Protect Edition (Windows-Legacy): 100MB
Monitor and resolution	VGA (640 x 480), 16 colors

Table 5. Required Hardware for Stellar Agent - Protect Edition on Linux

Hardware	Description
Available free disk space	350MB
	 Note: • Recommended free disk space for installer during the installation: 700MB • Minimum memory required when Virus Scan are both enabled: 300MB

Table 6. Required Software for Stellar Agent - Protect Edition

Software	Description
.NET framework	Version 3.5 SP1 or 4.0 available

**Note:**

Stellar Agent - Protect Edition (Windows-Legacy) does not have the software requirement for .NET framework.

By default, Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) uses port 14336 as the listening and communication port for StellarOne and port 14337 for Update Agent, which are sometimes blocked by firewalls. Please make sure this port is kept open for Stellar Agent - Protect Edition's use.

StellarOne component update needs to use the URLs below. Please ensure that you whitelist these URLs in your firewall.

- <https://ttaui.cs.txone.com>
- <https://apis.cs.txone.com>
- <https://storage.cs.txone.com>
- <https://odc.cs.txone-networks.com>

**Important:**

- Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) cannot be installed on a system that already runs one of the following:
 - Trend Micro OfficeScan
 - Trend Micro Titanium
 - Other Trend Micro endpoint solutions
 - Other antivirus products

**Note:**

Memory Randomization (Windows-Legacy only), API Hooking Prevention (Windows-Legacy only), and DLL Injection Prevention are not supported on 64-bit platforms.

Operating Systems

Windows Client:

- Windows 2000 (SP4) [Professional] (32bit)
- Windows XP (SP1/SP2/SP3) [Professional/Professional for Embedded Systems] (32bit)
- Windows Vista (NoSP/SP1/SP2) [Business/Enterprise/Ultimate] (32bit)
- Windows 7 (NoSP/SP1) [Professional/Enterprise/Ultimate/Professional for Embedded Systems/Ultimate for Embedded Systems] (32/64bit)
- Windows 8 (NoSP) [Pro/Enterprise] (32/64bit)
- Windows 8.1 (NoSP) [Pro/Enterprise/with Bing] (32/64bit)
- Windows 10 [Pro/Enterprise/IoT Enterprise] (32/64bit), LTSC 2015, Anniversary Update, LTSC 2016, Creators Update, Fall Creators Update, April 2018 Update, October 2018 Update*, LTSC 2019, May 2019 Update, November 2019 Update, May 2020 Update, October 2020 Update, May 2021 Update, November 2021 Update, LTSC 2021, 2022 Update
- Windows 11 (NoSP) [Pro/Enterprise/IoT Enterprise] (64bit) 2022 Update, 2023 Update, 2024 Update, 2025 Update
- Windows XP Embedded (SP1/SP2) (32bit)
- Windows Embedded Standard 2009 (NoSP) (32bit)
- Windows Embedded POSReady 2009 (32bit)
- Windows Vista for Embedded Systems (NoSP/SP1/SP2) (32bit)
- Windows Embedded Standard 7 (NoSP/SP1) (32/64bit)
- Windows Embedded POSReady 7 (NoSP) (32/64bit)
- Windows Embedded 8 Standard (NoSP) (32/64bit)
- Windows Embedded 8 Industry (NoSP) [Pro/Enterprise] (32/64bit)
- Windows Embedded 8.1 Industry (NoSP) [Pro/Enterprise/Sideload] (32/64bit)
- Windows Embedded POSReady (32bit)



Note:

Windows 10 October 2018 Update is also known as version 1809, of which Microsoft resumed the public rollout on November 13, 2018.

Windows Server:

- Windows Server 2000 (SP4) (32bit)
- Windows Server 2003 (SP1/SP2) [Standard/Enterprise/Storage] (32bit)
- Windows Server 2003 R2 (NoSP/SP2) [Standard/Enterprise/Storage] (32bit)
- Windows Server 2008 (SP1/SP2) [Standard/Enterprise/ Storage] (32/64bit)
- Windows Server 2008 R2 (NoSP/SP1) (Standard/Enterprise/Storage] (64bit)
- Windows Server 2012 (NoSP) (Essentials/Standard] (64bit)
- Windows Server 2012 R2 (NoSP) (Essentials/Standard] (64bit)
- Windows Server 2016 (NoSP) [Standard] (64bit), LTSC
- Windows Server 2019 (NoSP) [Standard] (64bit), LTSC
- Windows Server 2022 (NoSP) [Standard] (64bit), LTSC
- Windows Server 2025 (NoSP) [Standard] (64bit), LTSC
- Windows Storage Server 2012 (NoSP) [Standard] (64bit)
- Windows Storage Server 2012 R2 (NoSP) [Standard] (64bit)
- Windows Storage Server 2016 (NoSP) (64bit)
- Windows Server 2003 for Embedded Systems (SP1/SP2) (32bit)
- Windows Server 2003 R2 for Embedded Systems (NoSP/SP2) (32bit)
- Windows Server 2008 for Embedded Systems (SP1/SP2) (32/64bit)
- Windows Server 2008 R2 for Embedded Systems (NoSP/SP1) (64bit)
- Windows Server 2012 for Embedded Systems (NoSP) (64bit)
- Windows Server 2012 R2 for Embedded Systems (NoSP) (64bit)
- Windows Server Core 2025 (64bit)
- Windows Server Core 2022 (64bit)
- Windows Server Core 2019 (64bit)
- Windows Server Core 2016 (64bit)
- Windows Server Core 2012 R2 (64bit)
- Windows Server Core 2012 (64bit)

Linux

- RHEL/CentOS: 6, 7, 8, 9, 10
- Rocky: 8.4, 9, 10
- Alma: 8.3, 9, 10
- Ubuntu: 18, 20, 22, 24
- Debian: 8, 10, 11, 12, 13
- openSUSE Leap: 42.2, 15.4, 15.5, 15.6
- Oracle: 7.6, 7.9, 8.4
- Miracle: 6, 7, 8



Note: CentOS/RHEL 6, Miracle 6, and Debian 8 do not support realtime scan, only on-demand and schedule scan.



Note:

- See the latest Stellar Agent - Protect Edition readme file for the most up-to-date list of supported operating systems for agents.
 - See [Stellar Agent - Protect Edition \(Windows-Legacy\) Limitations by Operating Systems \(on page 137\)](#) for the limitations of the Stellar Agent - Protect Edition (Windows-Legacy) installed on certain operating systems.
-

Chapter 2. Installation (Windows)

This chapter shows how to install the TXOne Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) agent.

Topics in this chapter include:

- [Agents Installed in Managed or Standalone Mode \(on page 24\)](#)
- [Getting the Agent's Installer Package \(on page 24\)](#)
- [Setup Configuration File \(on page 25\)](#)
- [Installation Methods \(on page 67\)](#)
- [License Activation for Standalone Agent \(on page 98\)](#)
- [Replicating Installation Configuration for Multiple Standalone Agents \(on page 109\)](#)
- [Proxy Settings \(on page 109\)](#)

Agents Installed in Managed or Standalone Mode

TXOne Stellar offers two modes for agent management:

- Agents installed in **Managed** mode are managed by a StellarOne server, which can issue remote commands to all managed agents. To deploy agent configuration settings to multiple managed agents, launch the StellarOne web console and use the toolbar commands located on the **Agents** management screen or the policy settings located on the **Policy** configuration screen. See [Deployment Using StellarOne \(on page 114\)](#) for more information.
- Agents installed in **Standalone** mode are not managed by a TXOne StellarOne central management console server; instead, they are managed by the local administrator or operator. To manually deploy a single configuration to multiple standalone agents, use an agent configuration file. See [Deployment for Standalone Agents \(on page 114\)](#) for more information.

Getting the Agent's Installer Package

For agents managed by the StellarOne server, see [Getting the Agent's Installer Package from StellarOne \(on page 24\)](#).

For standalone agents, see [Getting the Standalone Agent's Installer Package \(on page 25\)](#).

Getting the Agent's Installer Package from StellarOne

For agents managed by the StellarOne server, follow instructions below to get the agent's installer package.

1. Log on the StellarOne web console.



Note:

If this is the first time the StellarOne console being logged on, refer to *StellarOne Installation Guide* for detailed instructions on the initial settings.

2. Go to **Administration > Downloads/Updates > Agent**, select the desired Agent Edition, and then either **Windows** or **Linux** from the two dropdown menus, and click **Download** to download the agent's Installer Package.

A zipped folder is downloaded. Extract the folder and proceed with the installation for the agents.



Note:



The installer package downloaded from StellarOne contains StellarOne data files and license information, and can be used for Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) installation. After being invoked, the installer package can identify the version of Windows installed on the endpoint and launch the suitable agent installer for the endpoint to install.

-
3. (Optional) To register agents to a group during installation, users can also download the `Group.ini` file.
 - a. Click the **download Group.ini** link on the StellarOne **Administration > Downloads/ Updates > Agent** page.
 - b. A pop-up window appears. Select a group for the target agent.
 - c. Click **Download**. A file named `Group.ini` is downloaded.
 - d. Place the `Group.ini` file as the top-level file in the agent's installer package.

Getting the Standalone Agent's Installer Package

For standalone agents, follow instructions below to get the agent's latest installer package.

1. Go to our [Software Download Center](#).
2. Login.
3. Click **Software**, which can be found in the Solutions section of the left-hand side menu.
4. Select **Endpoint Protection** from the Product Line dropdown menu.
5. Find the file beginning with "Stellar Agent Single Installer".
6. Click **Download**.

-
7.  **Note:**

The Stellar Agent - Protect Edition single installer package contains the Stellar Agent - Protect Edition and Stellar Agent - Protect Edition (Windows-Legacy) installers. After being invoked, the installer package can identify the version of Windows installed on the endpoint and launch the suitable agent installer for the endpoint to install.

Setup Configuration File

TXOne Networks pre-defines most of the values of the properties within the `StellarSetup.ini` file, which can be found in the installer package and used directly or adapted for different installation requirements. The launcher will parse `StellarSetup.ini` while executing.

Topics in this section include:

- See [Comparison of Configuration Files Downloaded from Different Sources \(on page 26\)](#) for the differences between the setup config files of StellarOne managed and the standalone agents
- See [Properties in the Config File \(on page 27\)](#) for more information about the setup config file and the properties used
- See [Encrypting Config File \(on page 66\)](#) for how to encrypt the setup config file by using the command prompt

Comparison of Configuration Files Downloaded from Different Sources

Compared with the `StellarSetup.ini` file downloaded from a StellarOne server, that downloaded from the Software Download Center (which can be used to install standalone agents) does not contain the values of the following properties:

- **License data:**

`[shared_license]`

- `product_serial_number`
- `txone_license_file`

or

- `license_key`



Important:

The corresponding `[shared_license]` property varies depending on your support provider:

- If `[shared_license]` consists of `product_serial_number` and `txone_license_file` properties, use the **license file** for product activation.
- If `[shared_license]` consists of `license_key` property, use the **license key** for product activation.

See [Getting the License File and PSN \(on page 102\)](#) for more information about the license file and product serial number.

- **Server data such as IP address and certificate:**

`[shared_server]`

- `host`
- `cert`

- **Component update server link:**

`[protect_update]/[legacy_update]`

- `source`
- `source_tx`



Note:



For standalone agents, the license data are required to specify for the installer to launch. See [Getting the License File and PSN for Standalone Agents \(on page 103\)](#) for how to get the license file and product serial number for standalone agents.

Properties in the Config File

The following table lists the properties in the `StellarSetup.ini` config file along with the details of their use. If no values are specified in the setup file, the default values will be used.



Note:

- The `[shared_...]` entry consists of the properties shared by Stellar Agent - Protect Edition and Stellar Agent - Protect Edition (Windows-Legacy) Agents.
- The `[protect_...]` entry consists of the properties exclusive to Stellar Agent - Protect Edition Agent.
- The `[legacy_...]` entry consists of the properties exclusive to Stellar Agent - Protect Edition (Windows-Legacy) Agent.

Table 7. Properties in the `StellarSetup.ini` File

Section	Property	Default Value	Description
[Shared_license]	product_serial_number txone_license_file	empty string	The product serial number and license file used for license activation  Important: The corresponding <code>[shared_license]</code> property varies depending on your support provider. See Comparison of Configuration Files Downloaded from Different Sources (on page 26) for more information.

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
[shared_server]	host	empty string	StellarOne hostname or IP address
	cert	server.crt	The certificate filename for communicating with StellarOne
[shared_proxy]	host	empty string	FQDN, hostname or IP address of Intranet proxy server
	port	empty string	Port number of Intranet proxy server
	username	empty string	Username of Intranet proxy server, required only when the proxy server is configured to authenticate by username and password.
	password	empty string	Password of Intranet proxy server, required only when the proxy server is configured to authenticate by username and password.
[shared_install]	silent	0	Execute installation in silent mode. Possible values: • 0: Do not use silent mode • 1: Use silent mode
	password	empty string	Administrator password. The password will be required by specific functions, including uninstallation, the command line interface, and support tools.

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			 Important: To install in silent mode, you must also specify the Administrator password value. For example: <pre>password=P@ssW0rd</pre> <pre>silent=1</pre>
	user_password	empty string	Specify the User password for login on the agent console.  Important: The Administrator and User passwords cannot be the same.  Note: Only the Administrator can enable/disable the User account and grant it access to limited features on the agent console.
	enable_shell_integration	1	Enable or disable shell integration for adding or removing a scan option to or from the Windows context menu. Possible values:

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			• 0: Disable shell integration • 1: Enable shell integration
	enable_real_time_scan	1	Setting for Real-Time Scan, which is effective only when both Real-Time Scan and Real-Time Protection is turned on. Possible values: • 0: Disable Real-Time Scan • 1: Enable Real-Time Scan
	enable_ransomware_behavior_monitor	1	Setting for Ransomware Behavior Monitor, which is effective only when both Real-Time Protection and Ransomware Behavior Monitor is turned on. Possible values: • 0: Disable Ransomware Behavior Monitor • 1: Enable Ransomware Behavior Monitor
	display_language	0	The language to use during installation. Possible values: • 0: System default • 1033: en-US • 1041: ja-JP • 1031: de-DE

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
	agent_edition	protection	The agent edition to install, based on the license. Possible values: • protection: Install Stellar Agent Protect Edition • sensor: Install Stellar Agent Sensor Edition
	kernel_exception_list	empty string	A list of file paths to exclude from kernel monitoring. Separate multiple paths with a pipe character (). For example: <pre>kernel_exception_list=c:\123.exe c:\222.exe</pre>
[shared_debug]	enable_debug_log	0	Enable or disable the debug logging function. Possible values: • 0: Disable debug logging (show the error level logs only) • 1: Enable debug logging
	enable_engine_debug_log	0	Enable or disable the engine debug logging function. Possible values:

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			• 0: Disable engine debug logging • 1: Enable engine debug logging
[shared_popup]	usb_block	1	Enable or disable the pop-up notification for a blocked USB device. Possible values: • 0: Disable • 1: Enable
	threat_detect	0	Enable or disable the pop-up notification for a detected threat. Possible values: • 0: Disable • 1: Enable
	lockdown_block	0	Enable or disable the pop-up notification for running a application not in the approved list. Possible values: 1. 0: Disable 2. 1: Enable
[protect_server] [legacy_server]	port	9443 8000	StellarOne's port for connecting to the Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) client
[protect_listen]	port	14336	The client listening port for StellarOne

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
[legacy_listen]			
[protect_update] [legacy_update]	source source_tx	empty string	The component update server link
[protect_config] [legacy_config]	include	empty string	Use an installation sample config file to run the silent installation. Choose one of the ways: • Specify the file path to the installation sample config file • Specify the sample file name and put the file as the top-level file in the installer package  Note: Supports only .yaml or .xen file format
[protect_install]	asset_vendor	empty string	The vendor's name of the asset.
	asset_model	empty string	The model name of the asset.
	asset_location	empty string	The physical location of the asset.
	asset_description	empty string	The description for the asset.

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
	install_location	empty string → default install path C:\Program Files\TX One (Default install path is decided in MSI installer)	The installation path of the Stellar Agent - Protect Edition installer.
	enable_start_menu	1	Enable Stellar Agent - Protect Edition in the Windows start menu.
	enable_desktop_icon	1	Enable Stellar Agent - Protect Edition icon to be placed on the desktop.
	enable_systray_icon	1	Enable Stellar Agent - Protect Edition in the Windows system tray.
	enable_trusted_ics_certificate	1	Allow the installer to install ICS code signing certificates during installation.
	enable_prescan	1	Enable malware scan during installation.
	enable_lockdown_al_building	1	Enable the building of Approved List for Application Lockdown.
	enable_lockdown_detection	1	Enable the "detect" mode of Application Lockdown.

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
	enable_oem_lockdown_enforce	1	Enable the "enforce" mode of Application Lockdown for OEM license only.
	enable_real_time_protection	0	Controls Real-Time Protection toggle. Possible values: • 0: Disable Real-Time Protection • 1: Enable Real-Time Protection
[protect_prescan]	action	1	0: None 1: Quarantine
	background	0	1: only executes when the system is in idle status 0: always consumes CPU resource for executing prescan
	cpu_usage_mode	0	0: Normal (Single thread scan) 1: HIGH (Multi-thread scan)
[protect_client]	import_source	empty string	Use an agent settings sample config file to import the same settings to the target agents. Specify the path to the folder containing the config file to be imported, e.g., C:\txsp_config

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
[legacy_Property]	PRESCAN	1	Prescan the endpoint before installing Stellar Agent - Protect Edition (Windows-Legacy). Possible values: • 0: Do not prescan the endpoint • 1: Prescan the endpoint
	WEL_SIZE	10240	Windows Event Log size (KB). Possible values: Positive integer  Note: Default value for new installations. Upgrading Stellar Agent - Protect Edition (Windows-Legacy) does not change any user-defined WEL_SIZE values set in the previous installation.
	WEL_RETENTION	0	Windows Event Log option when maximum event log size is reached on Windows Event Log. Possible values: For Windows XP or earlier platforms:

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			• 0: Overwrite events as needed • 1~365: Overwrite events older than (1~365) days • -1: Do not overwrite events (clear logs manually) For Windows Vista or later platforms: • 0: Overwrite events as needed (oldest events first) • 1: Archive the log when full, do not overwrite events. • -1: Do not overwrite events (clear logs manually)
	WEL_IN_SIZE	10240	Windows Event Log size for Integrity Monitor events (KB). Possible values: Positive integer
	WEL_IN_RETENTION	0	Windows Event Log option for when maximum event log size for Integrity Monitor events is reached in the Windows Event Log. For Windows XP or earlier platforms:

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			• 0: Overwrite events as needed • 1~365: Overwrite events older than (1~365) days • -1: Do not overwrite events (clear logs manually) For Windows Vista or later platforms: • 0: Overwrite events as needed (oldest events first) • 1: Archive the log when full, do not overwrite events. • -1: Do not overwrite events (clear logs manually)
	INTEGRITY_MONITOR	0	Enable Integrity Monitor. Possible values: • 0: Disable • 1: Enable
	PREDEFINED_TRUSTED_UPDATER	0	Enable Predefined Trusted Updater. Possible values: • 0: Disable • 1: Enable
	WINDOWS_UPDATE_SUPPORT	0	Enable Windows Update Support. Possible values:

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			• 0: Disable • 1: Enable
	STORAGE_DEVICE_BLOCKING	0	Blocks storage devices, including CD/DVD drives, floppy disks, and USB devices, from accessing managed endpoints. Possible values: • 0: Allow access from storage devices • 1: Block access from storage devices
	INIT_LIST	0	Initialize the Approved List during installation. Possible values: • 0: Do not initialize the Approved list During installation • 1: Initialize the Approved List during installation  Note: LIST_PATH has priority over INIT_LIST. For example: If <code>LIST_PATH = liststore.db</code> and <code>INIT_LIST=1</code>

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			 liststore.db is imported and INIT_LIST is ignored.
	LOCKDOWN	1	Turn Application Lockdown to Enforce mode on or off after installation. Possible values: • 0: Turn Enforce mode off • 1: Turn Enforce mode on
	LOCKDOWN_DETECTION	0	When Application Lockdown Enforce mode is off, (LOCKDOWN is set to 0), turn Application Lockdown to Detect or Disable mode. Possible values: • 0: Disable Application Lockdown • 1: Turn on Application Lockdown to Detect mode
	FILELESS_ATTACK_PREVENTION	0	Enable the Fileless Attack Prevention feature. Possible values: • 0: Disable • 1: Enable

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
	INTELLIGENT_RUNTIME_LEARNING	0	The agent will allow runtime execution files that are generated by applications in the Approved List. Possible values: • 0: Disable • 1: Enable
	NO_DESKTOP	0	Create a shortcut on desktop. Possible values: • 0: Create shortcut • 1: Do not create shortcut
	NO_STARTMENU	0	Create a shortcut in the Start menu. Possible values: • 0: Create shortcut • 1: Do not create shortcut
	NO_SYSTRAY	0	Display the system tray icon and Windows notifications. Possible values: • 0: Create system tray icon • 1: Do not create system tray icon

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
	MAX_EVENT_DB_SIZE	1024	Maximum database file size (MB). Possible values: Positive integer
	INIT_LIST_EXCLUDED_EXTENSION1	log	A file extension to exclude from automatic file enumeration for Approved List initialization. The configuration applies to the Approved List first initialized and all subsequent Approved List updates. Specify multiple extensions by creating new entries with names that start with INIT_LIST_EXCLUDED_EXTENSION, while ensuring that each entry name is unique. For example: INIT_LIST_EXCLUDED_EXTENSION1=bmp INIT_LIST_EXCLUDED_EXTENSION2=png  Note: Specifying file extensions of executable files (e.g., exe, dll and sys) may cause issues with Application Lockdown.
	INIT_LIST_EXCLUDED_EXTENSION2	txt	
	INIT_LIST_EXCLUDED_EXTENSION3	ini	
	enable_real_time_protection	0	Controls Real-Time Protection toggle. Possible values:

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			• 0: Disable • 1: Enable
[Legacy_Prescan]	PRESCANCEANUP	2	Attempt to clean detected files during prescan. Possible values: • 0: No action • 1: Clean, or delete if the clean action is unsuccessful • 2: Clean, or quarantine if the clean action is unsuccessful • 3: Clean, or ignore if the clean action is unsuccessful
	IGNORE_THREAT	1	Cancel installation after detecting malware threat during prescan. Possible values: • 0: Cancel • 1: Continue installation after detecting malware threat during prescan • 2: Continue installation when no malware is detected, or after all detected malware is cleaned, deleted, or quarantined successfully without a system reboot

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
	REPORT_FOLDER	empty string	An absolute folder path where prescan result reports are saved. Possible values: • <folder_path> • <empty>: Defaults to %windir%\temp\prescan\log
	SCAN_TYPE	Full	The type of scan executed during silent installation. Possible values: • Full: Scan all folders on the endpoint • Quick: Scans the following folders: ◦ Fixed root drives, e.g., c:\ d:\ ◦ System root folder, e.g., c:\Windows ◦ System folder, e.g., c:\Windows\System ◦ System32 folder, e.g.,

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			c : \Windows\ System32 ◦ Driver folder, e.g., c : \Windows\ System32\ Drivers ◦ Temp folder, e.g., c : \Users\TX One\AppData Local\Temp ◦ Desktop folder including sub folders and files, e.g., c : \Users\TX One\Desktop ◦ Specific: Scan folders specified with SPECIFIC_ FOLDER entries  Note:

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			 The selected values used as the default value for a UI installation
	COMPRESS_LAYER	2	The number of compressed layers to scan when a compressed file is scanned. Possible values: • 0: Do not scan compressed files • 1~20: Scan up to the specified number of layers of a compressed file
	MAX_FILE_SIZE	0	The largest file allowed for scan • 0: Scan files of any sizes • 1~9999: Only scan files equal to or smaller than the specified size (MB)
	SCAN_REMOVABLE_DRIVE	0	Scan removable drives. Possible values: • 0: Do not scan removable drives • 1: Scan removable drives
	FORCE_PRESCAN	0	Perform a prescan before installation. Possible values:

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			• 0: Disable • 1: Enable
[legacy_BlockNotification]  Important: To enable this feature, make sure to also enable the display for system tray icons and notifications. See NO_SYSTRAY in this table for details.	ENABLE	0	Display notifications on managed endpoints when Stellar Agent - Protect Edition (Windows-Legacy) blocks an unapproved file. Possible values: • 0: Disable • 1: Enable
	ALWAYS_ON_TOP	1	Display the file blocking notification on top of other screens. Possible values: • 0: Disable • 1: Enable
	SHOW_DETAILS	1	Display file name, file path, and event time in the notification. Possible values: • 0: Disable • 1: Enable
	AUTHENTICATE	1	Authenticate the user by requesting the administrator password when closing a notification. Possible values: • 0: Disable • 1: Enable
	TITLE	empty string	Notification title

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			Possible values: <notification_title>
	MESSAGE	empty string	Notification content Possible values: <notification_content>
[Legacy_EventLog]	Enable	1	Log events related to Stellar Agent - Protect Edition (Windows-Legacy). Possible values: • 1: Log • 0: Do not log
	Level_WarningLog	1	Log “Warning” level events related to Stellar Agent - Protect Edition (Windows-Legacy). Possible values: • 1: Log • 0: Do not log
	Level_InformationLog	0	Log “Information” level events related to Stellar Agent - Protect Edition (Windows-Legacy). Possible values: • 1: Log • 0: Do not log
	BlockedAccessLog	1	Log files blocked by Stellar Agent - Protect Edition (Windows-Legacy). Possible values:

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			• 1: Log • 0: Do not log
	ApprovedAccessLog	1	Log files approved by Stellar Agent - Protect Edition (Windows-Legacy). Possible values: • 1: Log • 0: Do not log
	ApprovedAccessLog_TrustedUpdater	1	Log Trusted Updater approved access. Possible values: • 1: Log • 0: Do not log
	ApprovedAccessLog_DLL_Driver	0	Log DLL/Driver approved access. Possible values: • 1: Log • 0: Do not log
	ApprovedAccessLog_ExceptionPath	1	Log Application Lockdown exception path approved access. Possible values: • 1: Log • 0: Do not log
	ApprovedAccessLog_TrustedCert	1	Log Trusted Certificates approved access. Possible values: • 1: Log • 0: Do not log

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
	ApprovedAccessLog_WriteProtection	1	Log Write Protection approved access. Possible values: • 1: Log • 0: Do not log
	ApprovedAccessLog_TrustedHash	1	Log Trusted Hash approved access. Possible values: • 1: Log • 0: Do not log
	SystemEventLog	1	Log events related to the system. Possible values: • 1: Log • 0: Do not log
	SystemEventLog_ExceptionPath	1	Log exceptions to Application Lockdown. Possible values: • 1: Log • 0: Do not log
	SystemEventLog_WriteProtection	1	Log Write Protection events. Possible values: • 1: Log • 0: Do not log
	ListLog	1	Log events related to the Approved list. Possible values: • 1: Log • 0: Do not log

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
	UsbMalwareProtectionLog	1	Log events that trigger USB Malware Protection. Possible values: • 1: Log • 0: Do not log
	ExecutionPreventionLog	1	Log events that trigger Execution Prevention. Possible values: • 1: Log • 0: Do not log
	IntegrityMonitoringLog_FileCreated	1	Log file and folder created events. Possible values: • 1: Log • 0: Do not log
	IntegrityMonitoringLog_FileModified	1	Log file modified events. Possible values: • 1: Log • 0: Do not log
	IntegrityMonitoringLog_FileDeleted	1	Log file and folder deleted events. Possible values: • 1: Log • 0: Do not log
	IntegrityMonitoringLog_FileRenamed	1	Log file and folder renamed events. Possible values: • 1: Log • 0: Do not log

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
	IntegrityMonitoringLog_RegValueModified	1	Log registry value modified events. Possible values: • 1: Log • 0: Do not log
	IntegrityMonitoringLog_RegValueDeleted	1	Log registry value deleted events. Possible values: • 1: Log • 0: Do not log
	IntegrityMonitoringLog_RegKeyCreated	1	Log registry key created events. Possible values: • 1: Log • 0: Do not log
	IntegrityMonitoringLog_RegKeyDeleted	1	Log registry key deleted events. Possible values: • 1: Log • 0: Do not log
	IntegrityMonitoringLog_RegKeyRenamed	1	Log registry key renamed events. Possible values: • 1: Log • 0: Do not log
	DeviceControlLog	1	Log events related to device access control. Possible values: • 1: Log • 0: Do not log

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
[legacy_MaintenanceMode]	ENABLE_DURATION	0	Start maintenance mode with this duration immediately after the install process is finished. Possible values: 0- 999 Unit: Hours  Note: The setting of this property applies to standalone agents only.
	SCAN	0	Enable malware scanning for quarantining suspicious files or adding new or changed files to the Approved List. Possible values: • 0: No scan (default) • 1: Quarantine Stellar Agent - Protect Edition (Windows-Legacy) scans files that are created, executed, or modified during the maintenance and quarantines suspicious files • 2: AL Stellar Agent - Protect Edition (Windows-Legacy) scans files that are created, executed,

Table 7. Properties in the StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			or modified during the maintenance and adds these files (including files that are detected as malicious) to the Approved List
[legacy_Message]	INITIAL_RETRY_INTERVAL	120	Starting interval, in seconds, between attempts to resend an event to StellarOne This interval doubles in size for each unsuccessful attempt, until it exceeds the MAX_RETRY_INTERVAL value Possible values: 0~2147483647
	MAX_RETRY_INTERVAL	7680	Maximum interval, in seconds, between attempts to resend events to StellarOne Possible values: 0~2147483647

Hidden Properties in the Config File

Hidden properties requiring users to manually add in the corresponding section are listed in the following tables:

Table 8. Stellar Agent - Protect Edition's Hidden Properties in StellarSetup.ini File

Section	Property	Default Value	Description
[legacy_Property]	CUSTOM_ACTION	0	Custom action for blocked events. Possible values:

Table 8. Stellar Agent - Protect Edition's Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			• 0: Ignore • 1: Quarantine • 2: Ask server
[protect_install]	BYPASS_WINDEFEND_CHECK	0	Bypass checking Windows Defender status
[protect_prescan]	EXCLUDED_FILE<number>	empty string	An absolute file path to exclude from scanning Possible values: <file_path> Multiple files can be specified by creating new entries whose name starting with EXCLUDED_FILE Every entry name needs to be unique. For example: EXCLUDED_FILE=c:\file1.exe EXCLUDED_FILE2=c:\file2.exe EXCLUDED_FILE3=c:\file3.exe
	EXCLUDED_FOLDER<number>	empty string	An absolute folder path to exclude from scanning <folder_path> Multiple folders can be specified by creating new entries whose name starting with EXCLUDED_FOLDER Every entry name needs to be unique

Table 8. Stellar Agent - Protect Edition's Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			For example: EXCLUDED_FOLDER=c:\file1 EXCLUDED_FOLDER2=c:\file2 EXCLUDED_FOLDER3=c:\file3
	EXCLUDED_EXTENSION<number>	empty string	A file extension to exclude from scanning <file_extension> Multiple extensions can be specified by creating new entries whose name starting with EXCLUDED_EXTENSION Every entry name needs to be unique For example: EXCLUDED_EXTENSION=bmp EXCLUDED_EXTENSION2=png
	EXCLUDED_THREAT_NAME<number>	empty string	A threat name to exclude from scanning <threat_name> Multiple threat names can be specified by creating new entries whose name starting with EXCLUDED_THREAT_NAME Every entry name needs to be unique For example:

Table 8. Stellar Agent - Protect Edition's Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			EXCLUDED_THREAT_NAME=PE_TEST EXCLUDED_THREAT_NAME=TEST_VIRUS
	EXCLUDED_HASH<number>	empty string	A hash value to exclude from scanning <hash_value> Multiple hash values can be specified by creating new entries whose name starting with EXCLUDED_HASH
	EXCLUDED_REGEX_PATH<number>	empty string	A regular expression path to exclude from scanning <regular_expression_path> Multiple regular expression paths can be specified by creating new entries whose name starting with EXCLUDED_REGEX_PATH For example: EXCLUDED_REGEX_PATH1 = C:.*\Extra.*[1].*
	EXCLUDED_REGEX_THREAT_NAME<number>	empty string	A regular expression for threat name to exclude from scanning <regular_expression_threat_name> Multiple threat name can be specified by creating new entries whose name starting with EXCLUDED_REGEX_THREAT_NAME For example:

Table 8. Stellar Agent - Protect Edition's Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			EXCLUDED_REGEX_THREAT_NAME1 = .*NE.*

**Note:**

The BYPASS_WINDEFEND_CHECK property is designed for Windows 7 and Windows Server 2016+ platforms, on which the default setup of Stellar Agent - Protect Edition requires disabling Windows Defender first. If you would like to bypass checking Windows Defender status to get the Stellar Agent - Protect Edition installed without disabling Windows Defender, insert a line under the [protect_install] section, and then type bypass_windefend_check: 1

Table 9. Stellar Agent - Protect Edition (Windows-Legacy) Hidden Properties in StellarSetup.ini File

Section	Property	Default Value	Description
[legacy_Property]	CONFIG_PATH	empty string	The file path to the sample config file used for agent feature settings
	LIST_PATH	empty string	The file path to the Approved List file
	APPLICATION_FOLDER	empty string	The installation path for agent program
	QUARANTINE_FOLDER_PATH	empty string	The quarantine path for agent program
	INIT_LIST_PATH	empty string	A folder path to be traversed for the Approved List initialization. Each local disk's root directory will be traversed if empty.
			 Note: If the specified folder path doesn't exist or the folder contains any executable or

Table 9. Stellar Agent - Protect Edition (Windows-Legacy) Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			 script files that are unable to be added to the Approved List, the installation will be aborted.
	INIT_LIST_PATH_OPTIONAL	empty string	A folder path to be traversed for the Approved List initialization. Each local disk's root directory will be traversed if empty.  Note: This property can be used to force the installation regardless of whether the specified folder path exists or the folder contains any executable or script files that are unable to be added to the Approved List,
	INIT_LIST_EXCLUDED_FOLDER	empty string	An absolute folder path to exclude from automatic file enumeration for Approved List initialization. The configuration applies to the Approved List first initialized and all subsequent Approved List updates. Specify multiple folders by creating new entries with names that start with INIT_LIST_EXCLUDED_FOLDER

Table 9. Stellar Agent - Protect Edition (Windows-Legacy) Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			Ensure each entry name is unique. For example: INIT_LIST_EXCLUDED_FOLDER= c:\folder1 INIT_LIST_EXCLUDED_FOLDER2 =c:\folder2 INIT_LIST_EXCLUDED_FOLDER3 =c:\folder3 Possible values • Folder path supports a maximum length of 260 characters. • Folder paths that do not exist may be specified. • The exclusion applies to subfolders.
	ALLOW_NON_MASS_STORAGE_USB_DEVICE	0	Allow some drivers (e.g., Touch screen/ Infrared sensor/Android mobile phone) from being loaded when those hardware devices are plugged in and storage device blocking is enabled. Possible values: • 0: Disable (Default) • 1: Enable
	USER_PASSWORD	empty string	Specify the User password to enable the User account and set its password

Table 9. Stellar Agent - Protect Edition (Windows-Legacy) Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
	USR_DEBUGLOG_ENABLE	1	Enable debug logging for user sessions. Possible values: • 0: Do not log • 1: Log
	USR_DEBUGLOGLEVEL	256	The number of debug log entries allowed for user sessions
	SRV_DEBUGLOG_ENABLE	1	Enable debug logging for service sessions. Possible values: • 0: Do not log • 1: Log
	SRV_DEBUGLOGLEVEL	256	The number of debug log entries allowed for service sessions
	FW_USR_DEBUGLOG_ENABLE	0	Enable debug log in user session of firewall. Possible values: • 0: Disable debug log • 1: Enable debug log
	FW_USR_DEBUGLOG_LEVEL	273	Debug level in user session of firewall. Possible values: number
	FW_SRV_DEBUGLOG_ENABLE	0	Enable debug log in service session of firewall. Possible values:

Table 9. Stellar Agent - Protect Edition (Windows-Legacy) Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			• 0: Disable debug log • 1: Enable debug log
	FW_SRV_DEBUGLOG_LEVEL	273	Debug level in service session of firewall. Possible values: number
	BM_SRV_DEBUGLOG_ENABLED	0	Enable debug log of Behavior Monitoring Core service. Possible values: • 0: Disable debug log • 1: Enable debug log
	BM_SRV_DEBUGLOG_LEVEL	51	Debug level of Behavior Monitoring Core service
[legacy_AGENT]	FIXED_IP	empty string	Set the agent IP address to communicate with the Stellar Agent - Protect Edition (Windows-Legacy) server. Possible values: A.B.C.D/E • A, B, C, D: 0~255 • E: 1~32 An example address might be 10.0.0.0/24 or 192.168.0.1  Note: Ensure that you also input and insert the section title [legacy_AGENT] above the FIXED_IP line.

Table 9. Stellar Agent - Protect Edition (Windows-Legacy) Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
[Legacy_Prescan]	SPECIFIC_FOLDER	empty string	An absolute folder path to scan when the scan type is set [Specific]. Possible values: <folder_path> Multiple folders can be specified by creating new entries whose name starting with SPECIFIC_FOLDER Every entry name needs to be unique. For example: SPECIFIC_FOLDER=c:\folder1 SPECIFIC_FOLDER2=c:\folder2 SPECIFIC_FOLDER3=c:\folder3
	EXCLUDED_FILE	empty string	An absolute file path to exclude from scanning Possible values: <file_path> Multiple files can be specified by creating new entries whose name starting with EXCLUDED_FILE Every entry name needs to be unique. For example: EXCLUDED_FILE=c:\file1.exe EXCLUDED_FILE2=c:\file2.exe

Table 9. Stellar Agent - Protect Edition (Windows-Legacy) Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			EXCLUDED_FILE3=c:\file3.exe
	EXCLUDED_FOLDER	empty string	An absolute folder path to exclude from scanning <folder_path> Multiple folders can be specified by creating new entries whose name starting with EXCLUDED_FOLDER Every entry name needs to be unique For example: EXCLUDED_FOLDER=c:\file1 EXCLUDED_FOLDER2=c:\file2 EXCLUDED_FOLDER3=c:\file3
	EXCLUDED_EXTENSION	empty string	A file extension to exclude from scanning <file_extension> Multiple extensions can be specified by creating new entries whose name starting with EXCLUDED_EXTENSION Every entry name needs to be unique For example: EXCLUDED_EXTENSION=bmp

Table 9. Stellar Agent - Protect Edition (Windows-Legacy) Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			EXCLUDED_EXTENSION2=png
	EXCLUDED_THREAT_NAME<number>	empty string	A threat name to exclude from scanning <threat_name> Multiple threat names can be specified by creating new entries whose name starting with EXCLUDED_THREAT_NAME Every entry name needs to be unique For example: EXCLUDED_THREAT_NAME=PE_TEST EXCLUDED_THREAT_NAME=TEST_VIRUS
	EXCLUDED_HASH<number>	empty string	A hash value to exclude from scanning <hash_value> Multiple hash values can be specified by creating new entries whose name starting with EXCLUDED_HASH
	EXCLUDED_REGEX_PATH<number>	empty string	A regular expression path to exclude from scanning <regular_expression_path> Multiple regular expression paths can be specified by creating new entries whose name starting with EXCLUDED_REGEX_PATH

Table 9. Stellar Agent - Protect Edition (Windows-Legacy) Hidden Properties in StellarSetup.ini File (continued)

Section	Property	Default Value	Description
			For example: EXCLUDED_REGEX_PATH1 = C:.*\Extra.*[1].*
	EXCLUDED_REGEX_THREAT_NAME<number>	empty string	A regular expression for threat name to exclude from scanning <regular_expression_threat_name> Multiple threat name can be specified by creating new entries whose name starting with EXCLUDED_REGEX_THREAT_NAME For example: EXCLUDED_REGEX_THREAT_NAME1 = .*NE.*

Encrypting Config File

Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) supports encrypting the setup config file to prevent sensitive data leakage. The encrypted config file name is fixed to StellarSetup.bin.

1. Prepare your StellarSetup.ini as mentioned in [Setup Configuration File \(on page 25\)](#).
2. Encrypt StellarSetup.ini by using the command prompt: StellarSetup.exe -e <CONFIG_FILE>. The parameter -e is used for encrypting the configuration file and generating StellarSetup.bin file in the working directory.
3. After the StellarSetup.bin file is generated, place it as the top-level file in the installer package.



Note:

For security reasons, the original StellarSetup.ini file can be removed from the installer package since the encrypted setup file (StellarSetup.bin) can replace it now.

4. The installation with encrypted configuration can now be executed.

Installation Methods

This section mainly explains the steps for installing Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) using **Attended Installation** or **Silent Installation**.

Attended Installation of Stellar Agent - Protect Edition

1. Launch the installer StellarSetup.exe.



Note:

- The installer package downloaded from the StellarOne server differs slightly from that downloaded from the Software Download Center. One contains the StellarOne data files and license information while the other one doesn't.
- For Windows Server 2016 and later versions, the installation of Stellar Agent - Protect Edition requires turning off Windows Defender first.

Figure 1. Installer Package Downloaded from StellarOne

Name	Date modified	Type	Size
Components	12/14/2022 1:54 AM	File folder	
protect	12/14/2022 1:53 AM	File folder	
protect_legacy	12/14/2022 1:54 AM	File folder	
lic.profile_tx	12/14/2022 1:54 AM	PROFILE_TX File	2 KB
server	12/14/2022 1:54 AM	Security Certificate	2 KB
StellarSetup	12/14/2022 1:54 AM	Application	1,505 KB
StellarSetup	12/14/2022 1:54 AM	Configuration sett...	1 KB
tlkapi.dll	12/14/2022 1:54 AM	Application exten...	687 KB
TmUpdateCore.dll	12/14/2022 1:54 AM	Application exten...	2,564 KB

Figure 2. Standalone Installer Package Downloaded from Software Download Center

Name	Date modified	Type
Components	12/22/2022 6:51 PM	File folder
protect	12/22/2022 6:51 PM	File folder
protect_legacy	12/22/2022 6:52 PM	File folder
SupportTool	12/22/2022 6:52 PM	File folder
StellarSetup	12/20/2022 10:11 PM	Application
StellarSetup	12/20/2022 10:11 PM	Configuration sett...
tlkapi.dll	12/20/2022 10:11 PM	Application exten...
TmUpdateCore.dll	12/20/2022 10:11 PM	Application exten...




Note:



To register Stellar Agent - Protect Edition agent to a specific group managed by StellarOne during the installation, after downloading the `Group.ini` file from the StellarOne server, the file must be placed as the top-level file in the agent's installer package before starting the installation.

2. Click **Yes** to start the installation.

Figure 3. Stellar Agent - Protect Edition Setup Screenshot

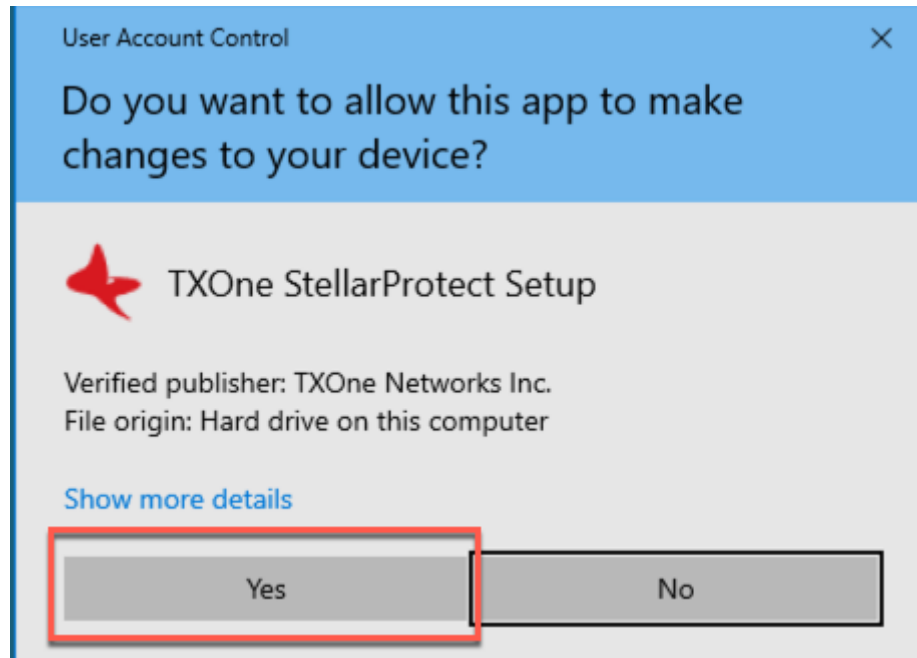

3. Set the UI language and click **Next**.
4. A success message indicating valid license appears. Click **Next** to continue.

Figure 4. Admin Password & License Activation

TXOne StellarProtect Setup

Administrator Password & License Activation

Administrator Password
The password must be 8 to 64 alphanumeric characters. The following characters are not supported: | > < \ " spaces.

Password: [masked]

Confirm Password: [masked]

License
New License

✓ The license is valid. Click "Next" to continue.


< Back Next > Cancel

**Note:**

- If the agent's installer package is downloaded from StellarOne, the installer will automatically check and complete the license activation.
- For standalone agents, see [License Activation for Standalone Agent \(on page 98\)](#).

5. The **End-User License Agreement** (EULA) window appears. Please read the content carefully, and then check **I accept the terms in the License Agreement** and click **Next**.

Figure 5. End-User License Agreement

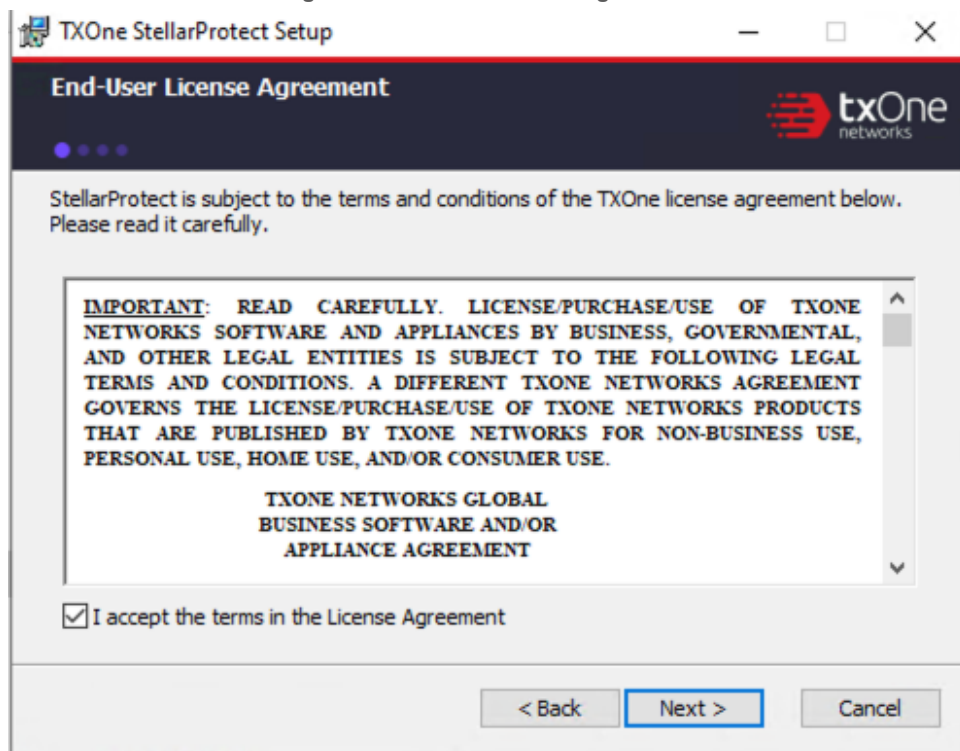

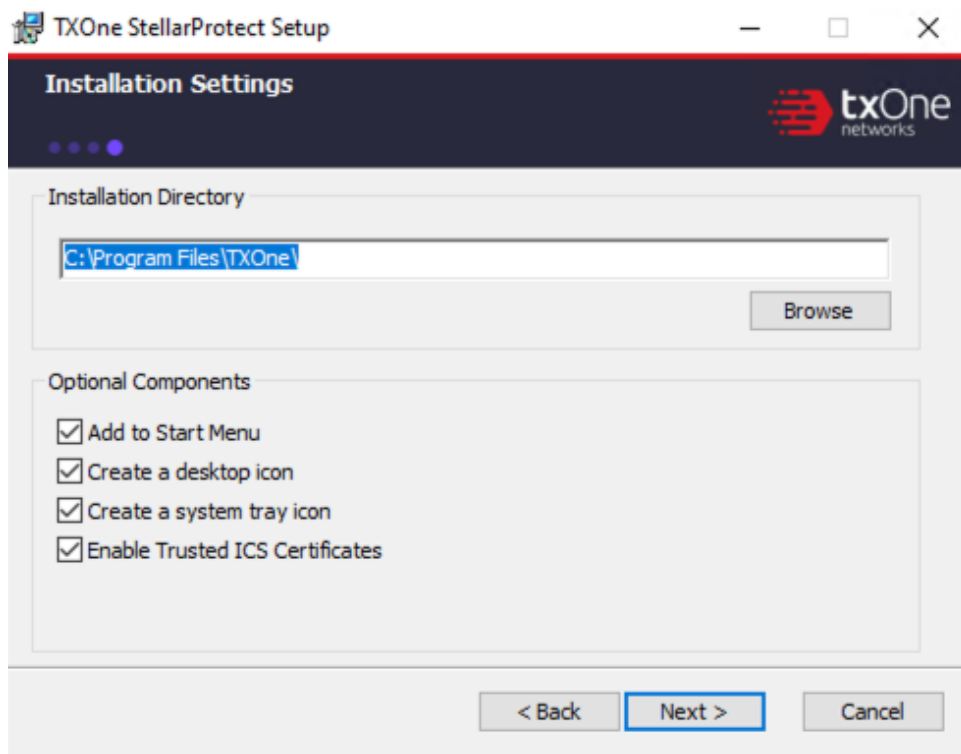
6. Specify the asset information of the installed device with correct OT-relative information such as vendor name, model, location and a description, and then click **Next**.

Figure 6. Asset Information

The screenshot shows a window titled "TXOne StellarProtect Setup" with a dark header bar containing the "txOne networks" logo. Below the header, the title "Asset Information" is displayed. A progress indicator shows four dots, with the first one filled. The form contains four input fields: "Vendor" (a dropdown menu), "Model" (a text box), "Location" (a text box), and "Description" (a text box). At the bottom are three buttons: "< Back", "Next >" (highlighted with a blue border), and "Cancel".

7. Confirm the installation settings including installation directory and optional components settings.

Figure 7. Stellar Agent - Protect Edition Installation Settings

**Note:**

You can choose to whether or not add an icon to the start menu, create a desktop icon, or create a system tray icon.

**Important:**

TXOne Networks suggests selecting **Enable Trusted ICS Certificates**. This feature ensures that Stellar Agent - Protect Edition can sync up trusted OT certificates and enhance OT applications, thus those installers can always be recognized by Stellar Agent - Protect Edition.

8. If Stellar Agent - Protect Edition detects incompatible software on the endpoint, it will display a message. If not, this message won't appear.


**Note:**

Incompatible software includes the following TrendMicro products: OfficeScan series, Apex One On Premises and SaaS, Worry-Free Business Security, and Worry-Free Business Security Service. Stellar Agent - Protect Edition will try to uninstall them during the installation process to avoid any possible issues. However, depending on the operation system these products run on, some may have to be manually uninstalled.



9. (Optional but highly recommended) Toggle on the **Perform prescan...** to start the prescan task. If you toggle it off, go to **Step 11** for next procedure.

Figure 8. Prescan Toggle

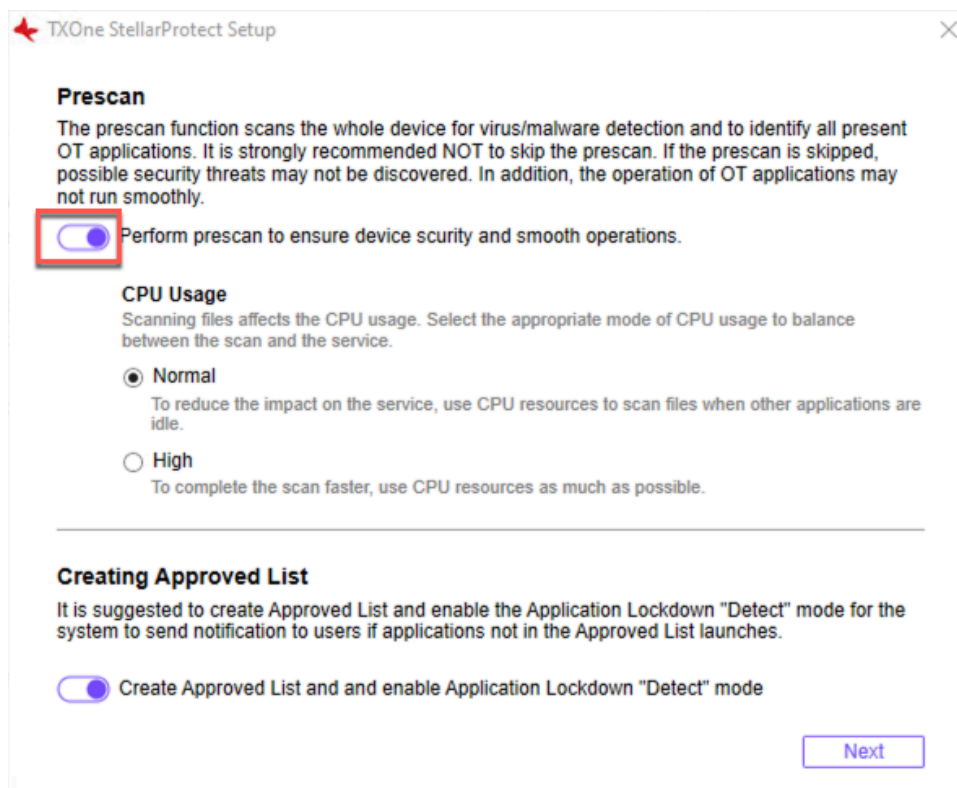

Important:



- TXOne Networks recommends performing the Prescan to enable the agent to detect potential security threats and also learn the OT applications installed on the endpoint before completing the installation process.
- If you skip the Prescan, Stellar Agent - Protect Edition will not be able to recognize the OT applications before it resumes production, and will need to learn them as they are executed for the first time; this may cause delays in the OT application runtime.
- Stellar Agent - Protect Edition provides a more time-efficient option **HIGH** that will require higher CPU usage during the Prescan. If no other vital applications are running on the system, you can select the option **HIGH** to significantly reduce scan time.



Note:

Since the StellarOEM license edition does not support the scanning function, this procedure will not appear in its installation process.


- a. Before the Prescan starts, the installer will perform a components update based on the chosen configuration. The update process will display a message as shown below.



Note:


For the standalone agents to perform the update successfully, it is required to allow them to access the Internet for connecting to the Active Update server. If they can't have the Internet connection, the components update will fail; however, you can still choose to proceed to the next step.

Figure 9. Update Pattern before Prescan

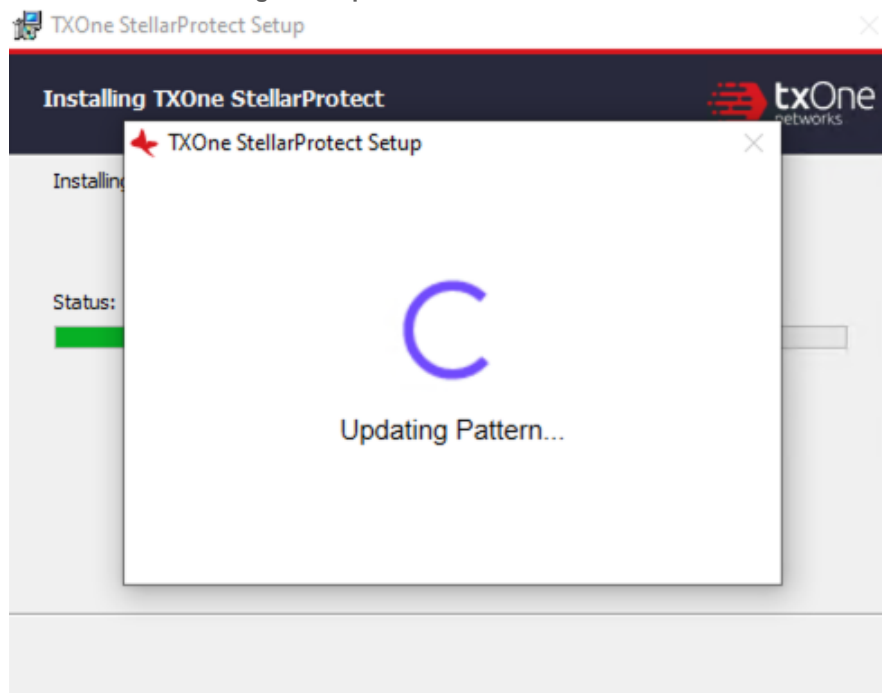

- b. View the scan settings and click **Start** to initiate the prescan.

Figure 10. View Scan Settings before Prescan

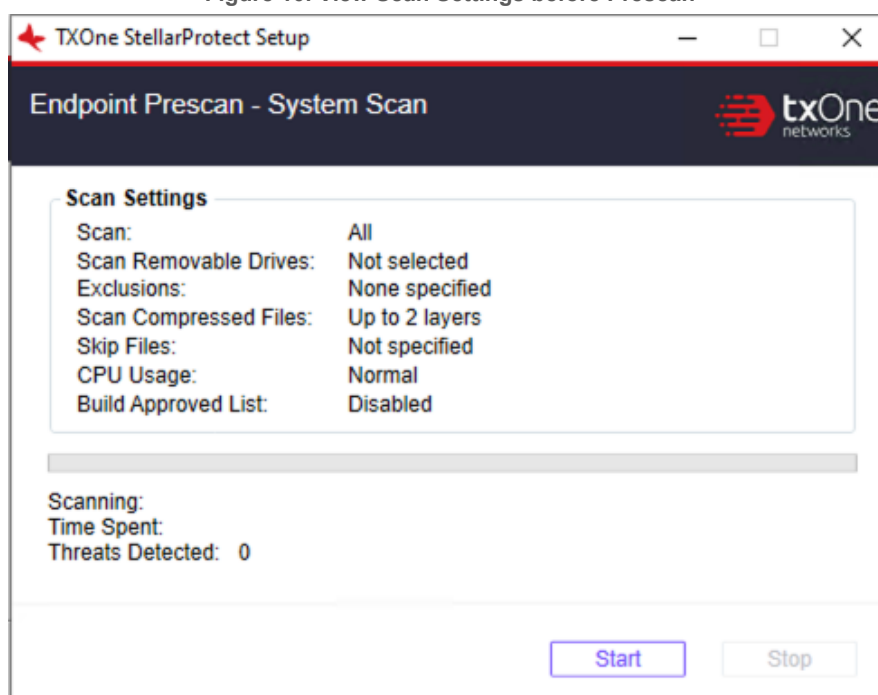
**Note:**

Scan settings are described as follows. Please note that only StellarOne administrator can configure the scan settings after the Stellar Agent - Protect Edition agent is successfully installed.

- **Scan:** This is the default anti-virus scan, following our template
- **Scan Removable Drives:** Selected removable drives will be scanned
- **Exclusion:** Which files or folders won't be scanned
- **Scan Compressed Files:** By default, the agent scans up to 2 layers of compression during the installation. After installed, the agent can be configured to scan up to 20 layers of compression via StellarOne.
- **Skip Files:** Specific files that will be skipped
- **CPU Usage:** CPU consumption during the prescan
- **Build Approved List:** Whether the creation of Approved List is enabled or not


c. The progress bar shows the status of the prescan.

Figure 11. Prescan Status

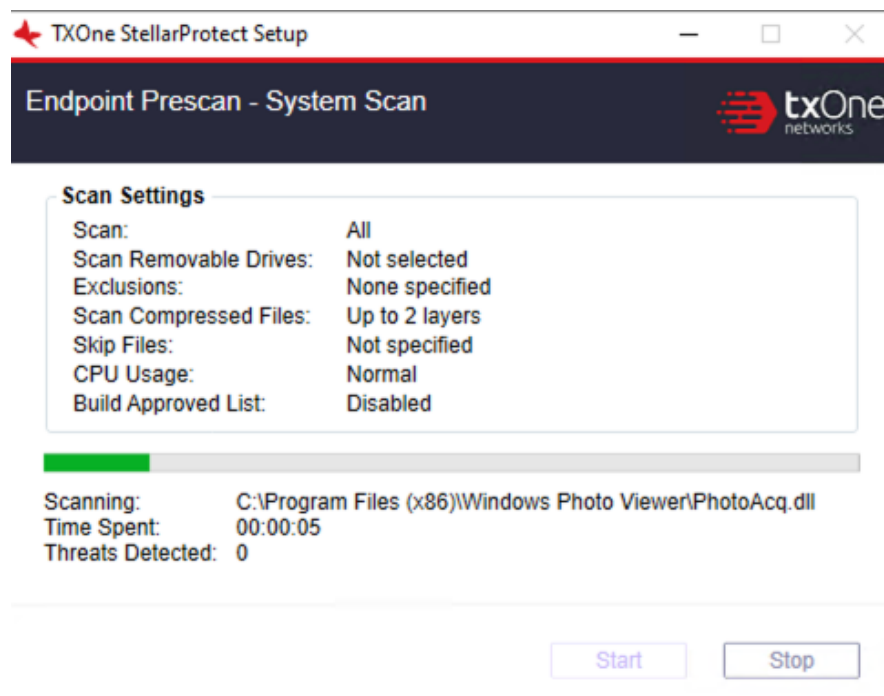

- d. After the prescan, results will be shown for review.
 - e. If a threat is detected, choose one of the two actions:
 - **Quarantine:** Quarantine the threat.
 - **Continue:** Take no action at this time.
10. (Optional but highly recommended) At the bottom of the window is the switch toggle for creating the Approved List and enabling Application Lockdown "Detect" mode. Toggle it on to proceed. If you toggle it off, go to **Step 12** for next procedure.


Figure 12. Create Approved List & Enable Application Lockdown (Detect)

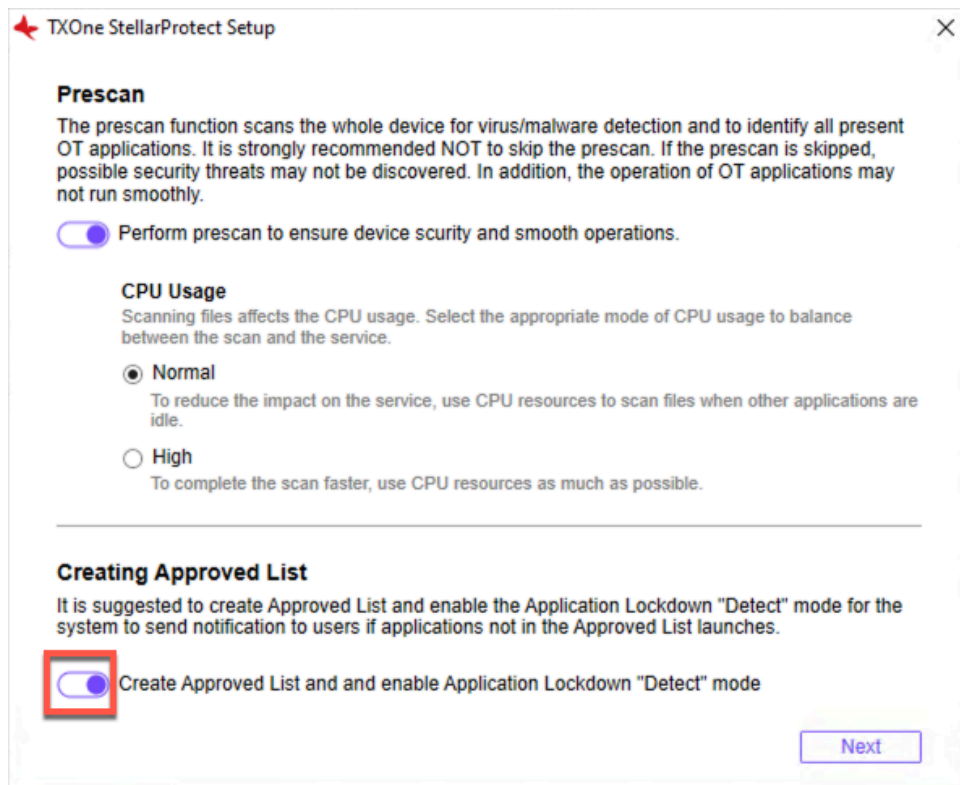**Note:**

- The Approved List is created for the Application Lockdown "Detect" mode. Once the Application Lockdown "Detect" mode is enabled, the system will send notifications if applications not in the Approved List launch.
- Since the StellarKiosk license edition does not support the Application Lockdown function, this procedure will not appear in its installation process.
- If you choose not to create the Approved List during the installation process, see [Setting Up the Approved List \(on page 88\)](#) to perform this task later.


- a. The results of adding applications in the Approved List will be shown for review.
- b. The creation of Approved List is complete, click **Next**.

Figure 13. Approved List Created

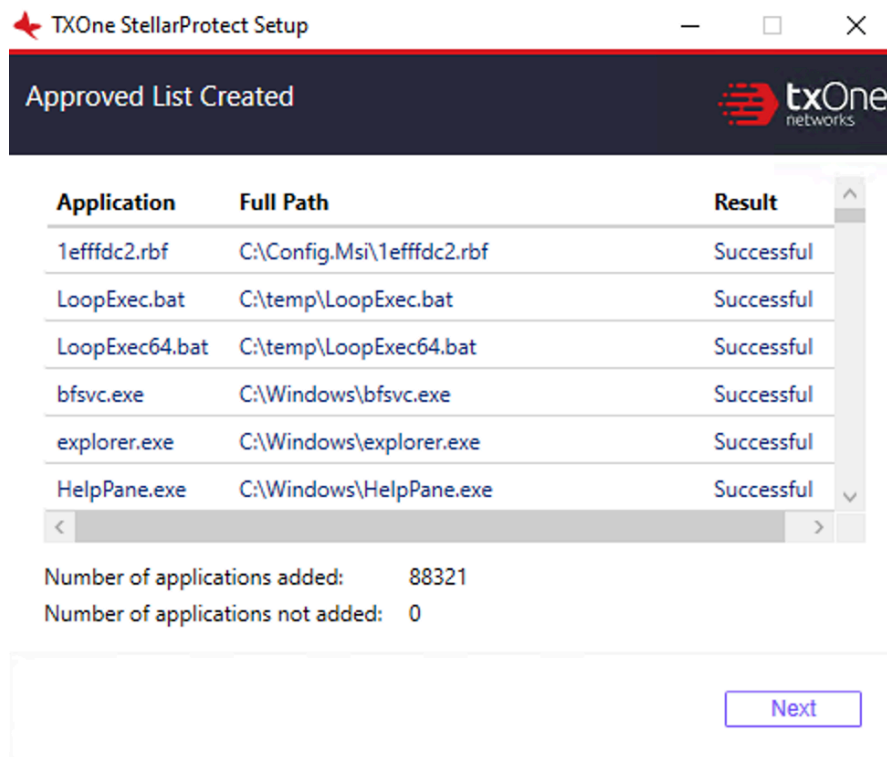


11. The Stellar Agent - Protect Edition application will be installed.
12. When the installation is complete, the **Stellar Agent - Protect Edition has been successfully installed** window appears. Click **Finish**.

Figure 14. Stellar Agent - Protect Edition Successfully Installed

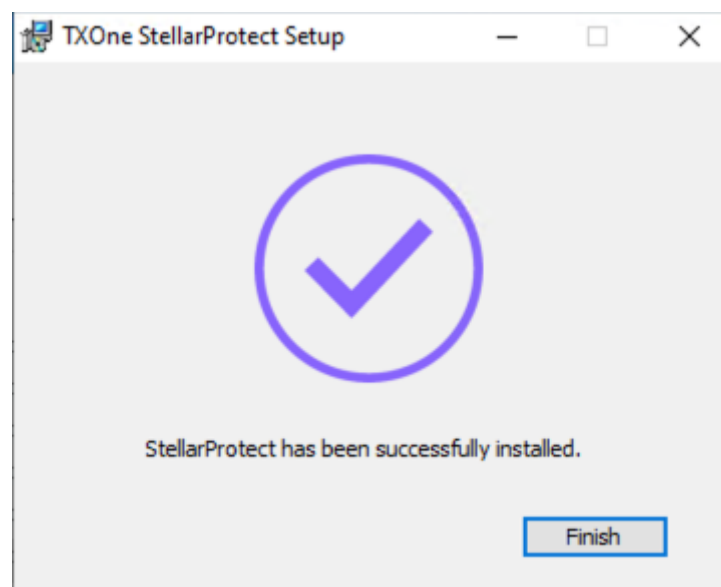

13. Run Stellar Agent - Protect Edition and log on with your password.

Figure 15. Log On Stellar Agent - Protect Edition

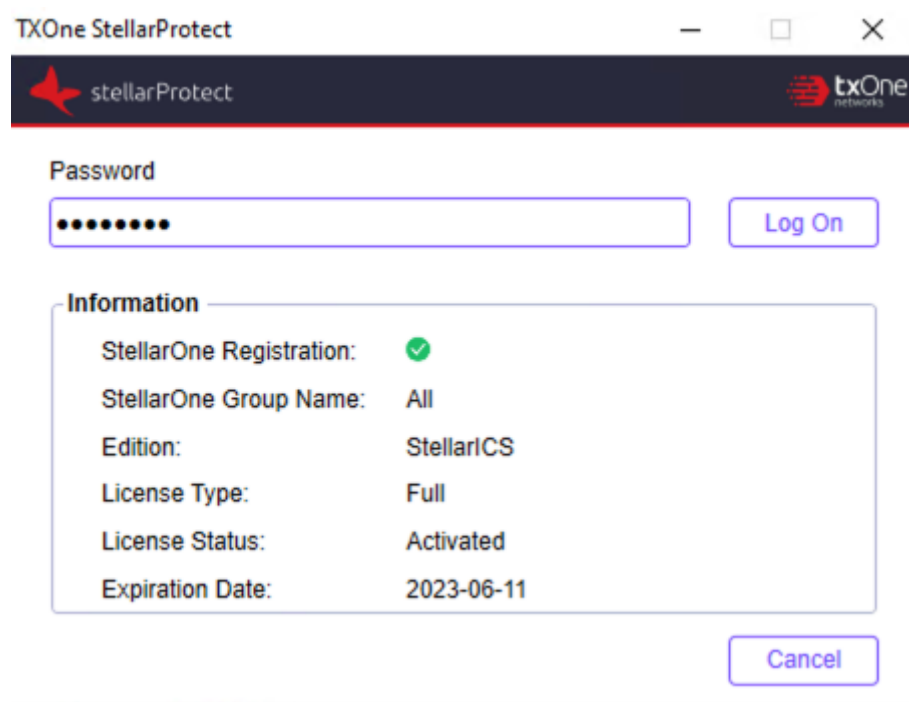

14. Upon logging into Stellar Agent - Protect Edition successfully, the **Overview** window will display.
 - Before TXOne Stellar Agent - Protect Edition Application Lockdown feature can protect the endpoint, it must complete the creation of Approved List and enable the Application Lockdown "Enforce" mode. See [Setting Up the Approved List \(on page 88\)](#) and refer to *TXOne Stellar Agent - Protect Edition Administrator's Guide* for more information.
 - To modify more TXOne Stellar Agent - Protect Edition settings, refer to *TXOne Stellar Agent - Protect Edition Administrator's Guide* for more information.

Attended Installation of Stellar Agent - Protect Edition (Windows-Legacy)

1. Launch the installer `StellarSetup.exe`.



Note:

The installer package downloaded from the StellarOne server differs slightly from that downloaded from the Software Download Center. One contains the StellarOne data files and license information while the other one does not.

Figure 16. Installer Package Downloaded from StellarOne

Name	Date modified	Type	Size
Components	12/14/2022 1:54 AM	File folder	
protect	12/14/2022 1:53 AM	File folder	
protect_legacy	12/14/2022 1:54 AM	File folder	
lic.profile_tx	12/14/2022 1:54 AM	PROFILE_TX File	2 KB
server	12/14/2022 1:54 AM	Security Certificate	2 KB
StellarSetup	12/14/2022 1:54 AM	Application	1,505 KB
StellarSetup	12/14/2022 1:54 AM	Configuration sett...	1 KB
tlkapi.dll	12/14/2022 1:54 AM	Application exten...	687 KB
TmUpdateCore.dll	12/14/2022 1:54 AM	Application exten...	2,564 KB

Figure 17. Standalone Installer Package Downloaded from Software Download Center

Name	Date modified	Type
Components	12/22/2022 6:51 PM	File folder
protect	12/22/2022 6:51 PM	File folder
protect_legacy	12/22/2022 6:52 PM	File folder
SupportTool	12/22/2022 6:52 PM	File folder
StellarSetup	12/20/2022 10:11 PM	Application
StellarSetup	12/20/2022 10:11 PM	Configuration sett...
tlkapi.dll	12/20/2022 10:11 PM	Application exten...
TmUpdateCore.dll	12/20/2022 10:11 PM	Application exten...




Note:

To register a Stellar Agent - Protect Edition (Windows-Legacy) agent to a specific group managed by StellarOne during the installation, after downloading the `Group.ini` file on StellarOne console, the file must be placed as the top-level file in the agent's installer package before starting the installation.


2. Click **Yes** to start the installation.

Figure 18. Stellar Agent - Protect Edition Setup Screenshot

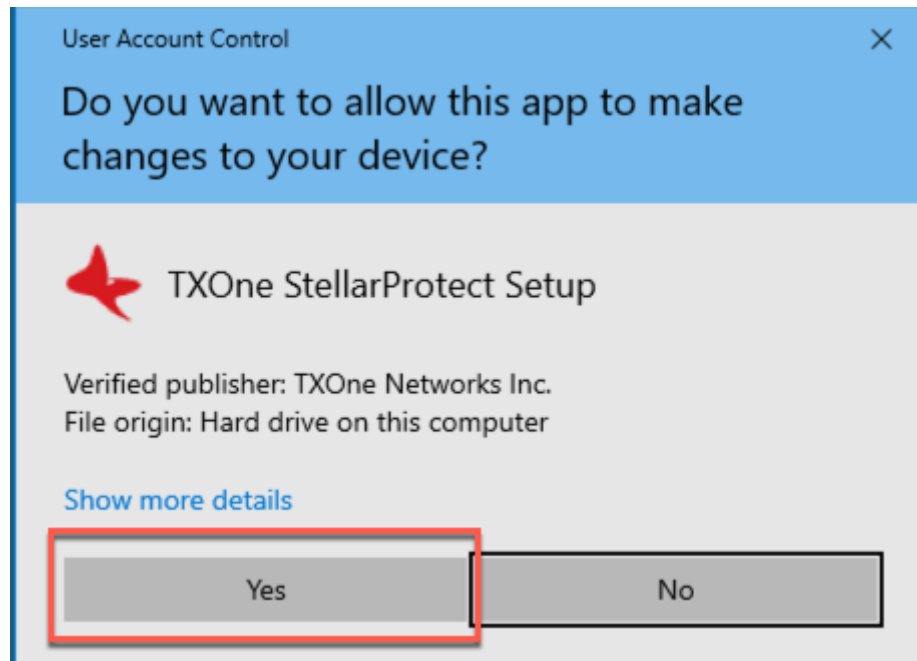

3. Set the UI language and click **Next**.
4. A success message indicating valid license appears. Click **Next** to continue.

Figure 19. Admin Password & License Activation

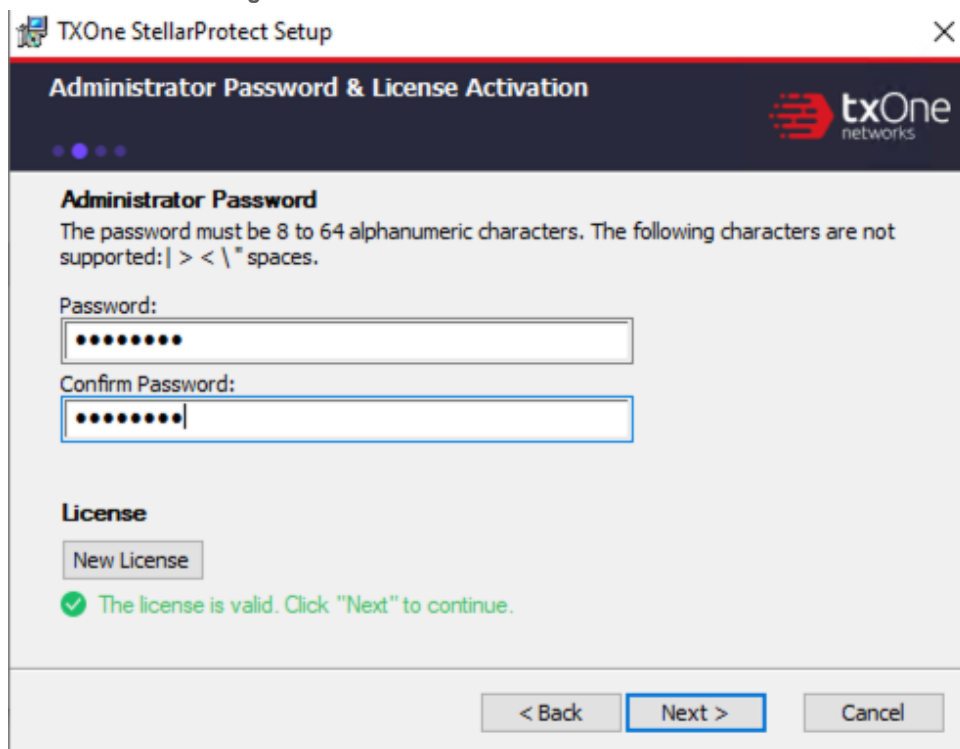


 **Note:**



- If the agent's installer package is downloaded from StellarOne, the installer will automatically check and complete the license activation.
- For standalone agents, see [License Activation for Standalone Agent \(on page 98\)](#).


5. The **End-User License Agreement** (EULA) window appears. Please read the content carefully, and then check **I accept the terms in the License Agreement** and click **Next**.

Figure 20. End-User License Agreement

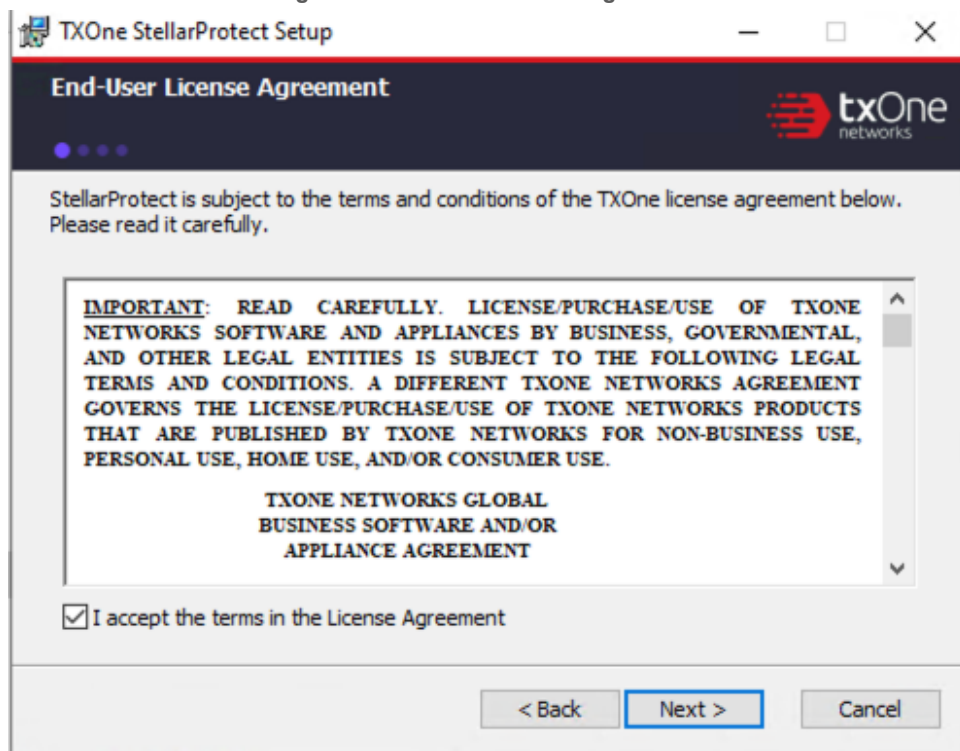

6. Confirm the installation settings including installation directory and optional components settings.


Figure 21. Stellar Agent - Protect Edition (Windows-Legacy) Installation Settings

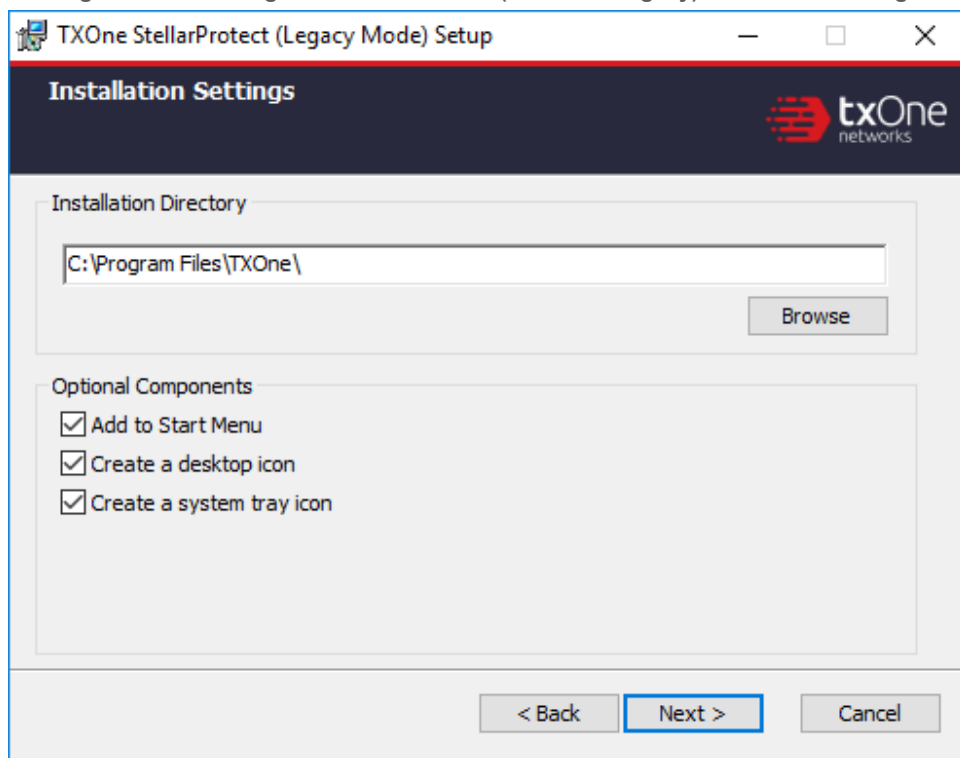**Note:**

You can choose to whether or not add an icon to the start menu, create a desktop icon, or create a system tray icon.

7. A message appears asking if you would like to scan the endpoint for threats before continuing with the installation.

Figure 22. Scan or Do Not Scan

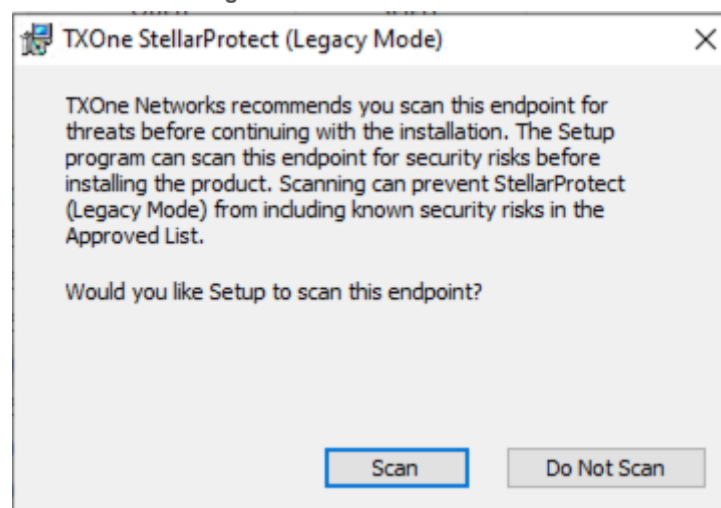

8. (Optional) Scan the endpoint for threats before continuing with the installation. TXOne Networks recommends you perform this scan.



Note:


If you set the `FORCE_PRESCAN` value to 1 in the `StellarSetup.ini` configuration file:

- The **Do Not Scan** and close buttons will not be available.
- You cannot stop the scan process after selecting **Scan**.

See [Properties in the Config File \(on page 27\)](#) for more information.


- To skip scanning, click **Do Not Scan**.
- To scan the endpoint for threats, click **Scan**.
 - a. The **Endpoint Prescan** window appears.

Figure 23. Endpoint Prescan - Get Started

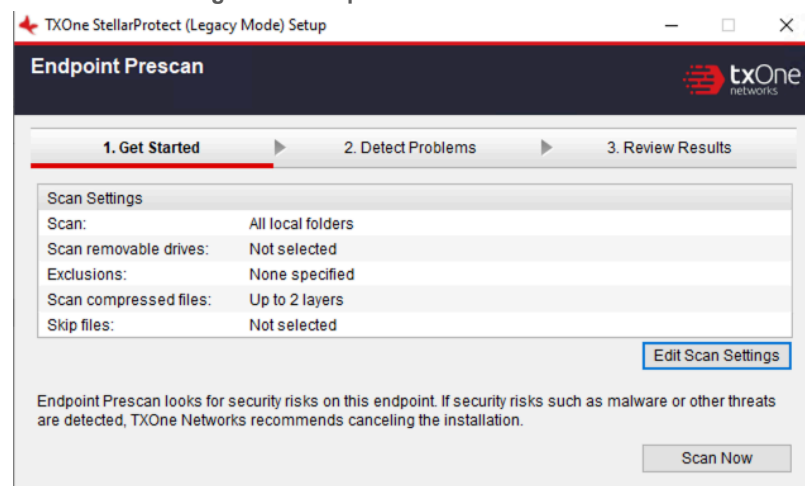


- b. (Optional) To customize the scan settings, click **Edit Scan Settings**.
- c. Click **Scan Now**. The **Detect Problems** window appears indicating the Stellar Agent - Protect Edition (Windows-Legacy) is performing the prescan.

Figure 24. Endpoint Prescan - Detect Problems

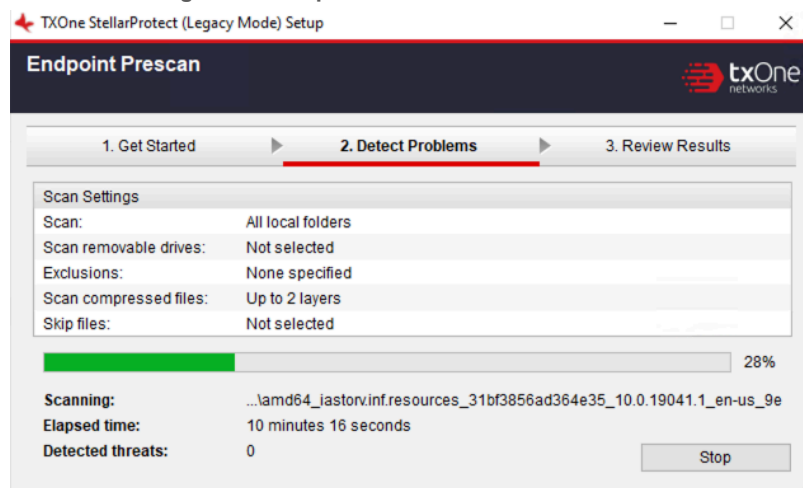

- d. After the prescan is completed, the **Review Results** window appears. Click **Close**.

Figure 25. Endpoint Prescan - Review Results

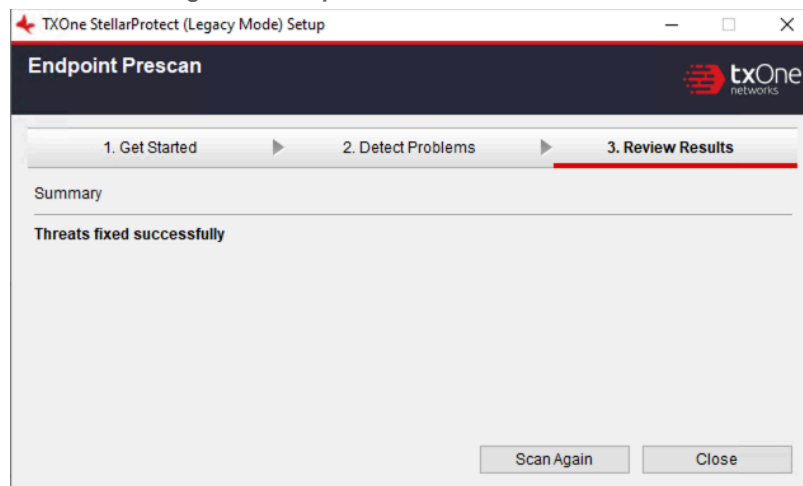

If **Endpoint Prescan** detects security risks, TXOne Networks recommends canceling the installation. Remove threats from the endpoint and try again. If critical programs are detected as threats, confirm that the endpoint is secure and that the versions of the programs installed do not contain threats.

Ignore detected threats only if you are absolutely certain that they are false positives.




Tip:

Perform a manual scan to detect and remove threats on the endpoint. See *Manual Scan Commands* in the *Stellar Agent - Protect Edition Administrator's Guide* for more information.


9. The installer starts scanning the endpoint to add applications for the **Approved List**. Wait for the process to complete.



Note: Before TXOne Stellar Agent - Protect Edition (Windows-Legacy) Application Lockdown feature can protect the endpoint, it must check and build a list of existing applications and files that are necessary for the system to run correctly.

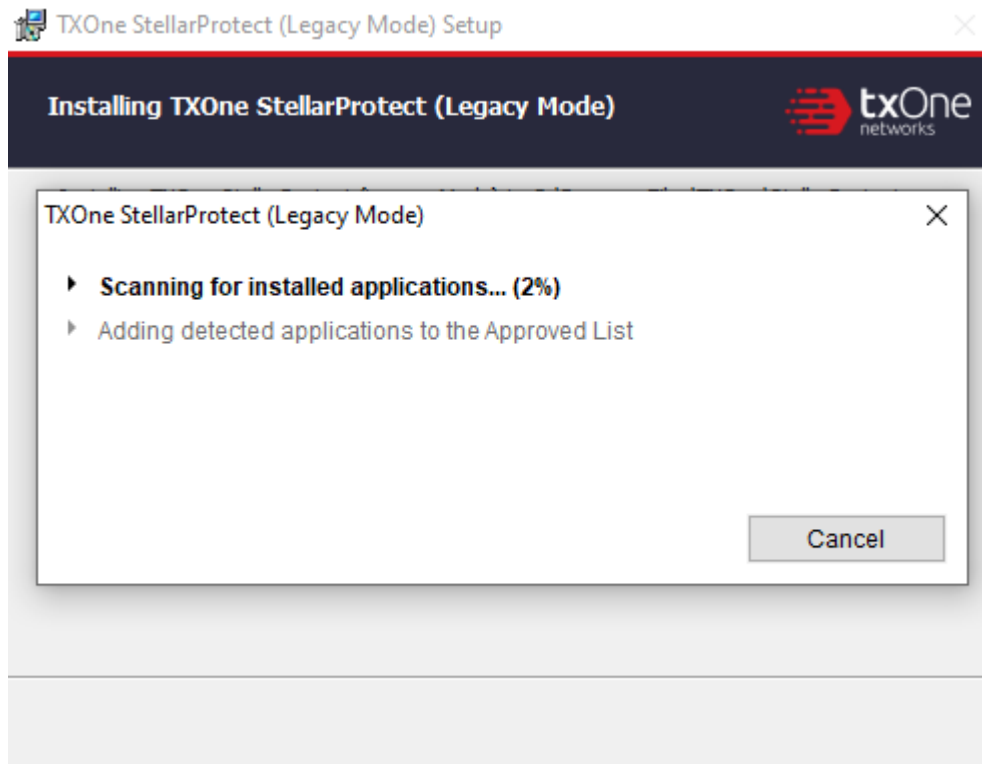

10. The **Approved List has been built** message appears after the scan. Click **Close** to continue the rest of the installation process.

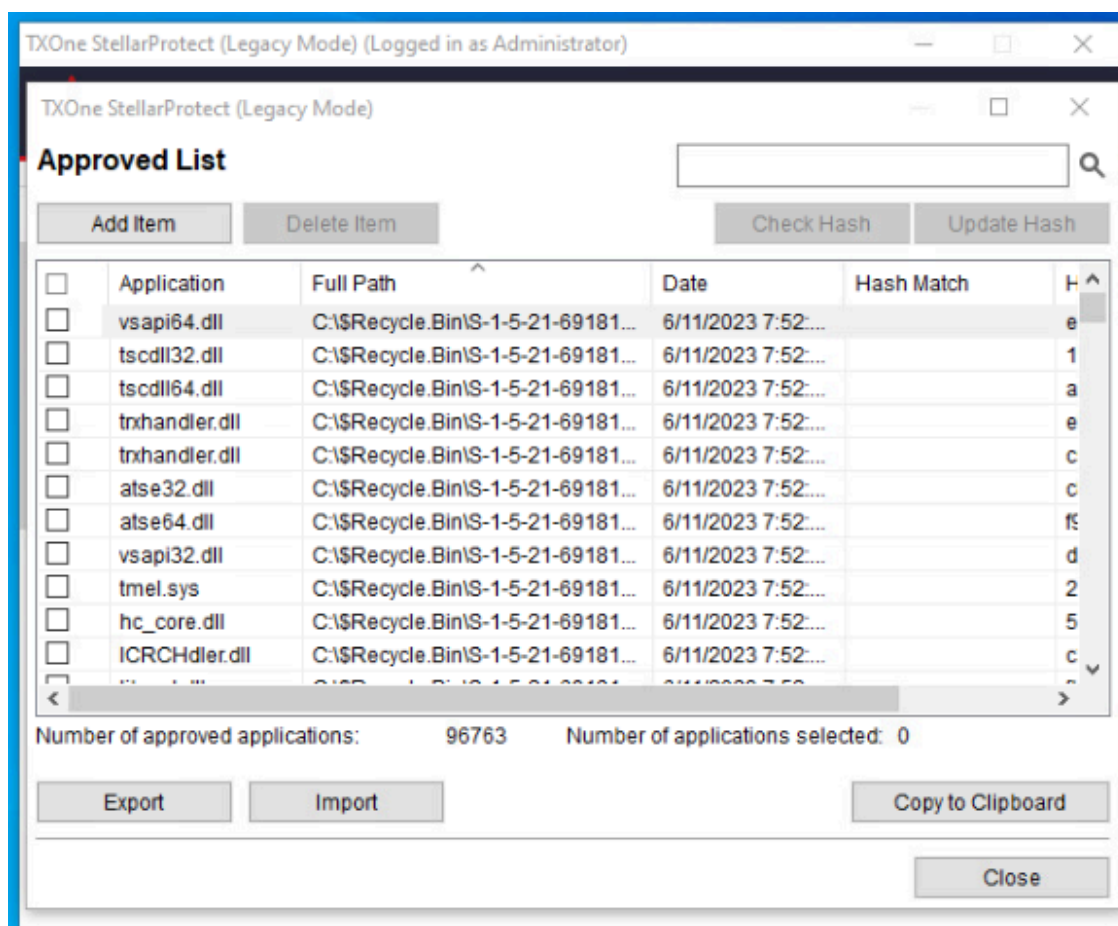**Note:**

- When TXOne Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) Application Lockdown is enabled, only applications that are in the Approved List will be able to run. See Administrator's Guide for more information.
- When the endpoint is creating or updating its Approved List, no policy settings can be deployed.


11. When the **Installation Complete** window displays, click **Finish**.

**Note:**

Optionally enable memory randomization on older operating systems such as Windows XP or Windows Server 2003, which may lack or offer limited Address Space Layout Randomization (ASLR) support. See *Exploit Prevention* settings in the *Stellar Agent - Protect Edition Administrator's Guide* for more information.

12. Run Stellar Agent - Protect Edition (Windows-Legacy) and log on with your password.

Figure 26. Log On Stellar Agent - Protect Edition (Windows-Legacy)

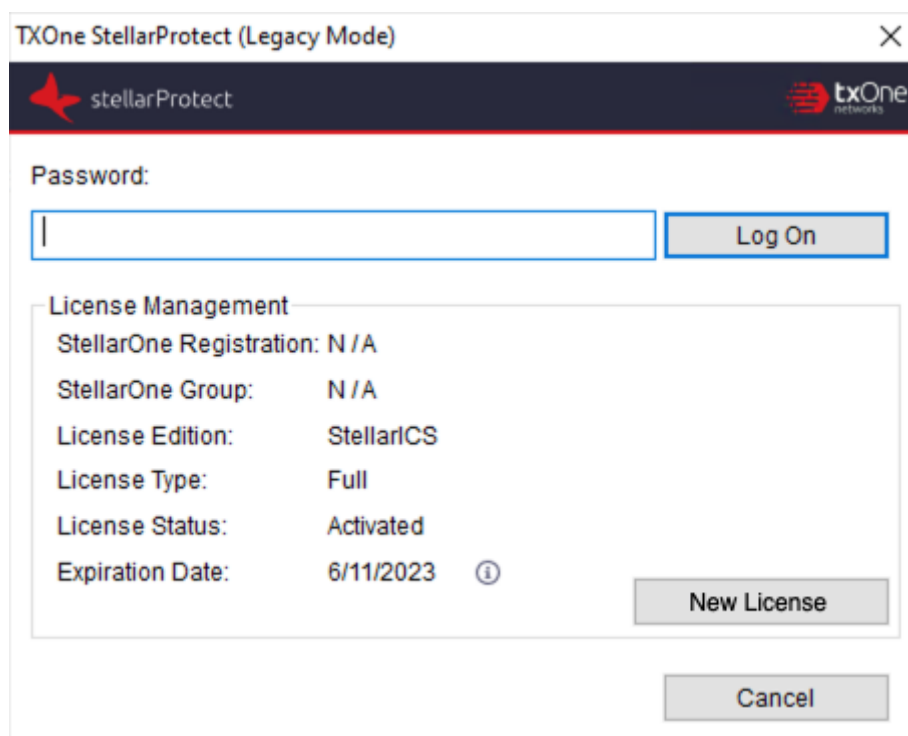

13. Upon logging on Stellar Agent - Protect Edition (Windows-Legacy) successfully, the **Overview** window will display.
14. Configure the new installation.

- a. Set up the Approved List.

Before TXOne Stellar Agent - Protect Edition (Windows-Legacy) can protect the endpoint, it must check the endpoint for existing applications and files necessary for the system to run correctly.

See [Setting Up the Approved List \(on page 88\)](#) for detailed instructions.

- b. Modify the TXOne Stellar Agent - Protect Edition (Windows-Legacy) settings. See *TXOne Stellar Agent - Protect Edition Administrator's Guide* for more information.

Setting Up the Approved List

Before TXOne Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) Application Lockdown feature can protect the endpoint, it must check the endpoint for existing applications and files necessary for the system to run correctly.

The following instructions take Stellar Agent - Protect Edition (Windows-Legacy) as an example for how to set up the Approved List for Stellar Agent - Protect Edition (Windows-Legacy) or Stellar Agent - Protect Edition agent. Stellar Agent - Protect Edition would require you to follow similar procedures with slight differences in the GUI.



Note:



If you choose not to create the Approved List during the Stellar Agent - Protect Edition installation process, refer to the following procedures to perform the task.

1. Open the Stellar Agent - Protect Edition (Windows-Legacy) console. The Stellar Agent - Protect Edition (Windows-Legacy) log on screen appears.
2. Provide the password and click **Log On**.
3. Stellar Agent - Protect Edition (Windows-Legacy) asks if you want to set up the Approved List now.
4. At the notification window, select **Yes. Set up the Approved List now** and click **OK**. Stellar Agent - Protect Edition (Windows-Legacy) scans the endpoint and adds all applications to the Approved List.
5. Stellar Agent - Protect Edition (Windows-Legacy) displays the Approved List Configuration Results.



Note:

- When TXOne Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) Application Lockdown is enabled, only applications that are in the Approved List will be able to run. See Administrator's Guide for more information.
- When the endpoint is creating or updating its Approved List, no policy settings can be deployed.

6. Click **Close**.

Silent Installation

Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) provides the silent installation based on a pre-defined setup configuration file. You can customize the configuration settings in the `StellarSetup.ini` file to enable silent installation, and then execute `StellarSetup.exe` in silent mode by double-clicking the installer or via the command line interface (CLI).

Topics in this section include:

- [An Example of Setup Config File Adapted for Silent Installation \(on page 89\)](#)
- [Executing Silent Installation \(on page 95\)](#)

An Example of Setup Config File Adapted for Silent Installation

See below as an example of the setup configuration file (`StellarSetup.ini`) adapted for installing agents in StellarOne managed and silent modes. You can define your own setup config file by changing the values for different installation requirements.



Note:



- The example of the defined setup config file uses **license file** for product activation.
 - To run silent installation, ensure the values of the following properties are specified:
 - [Shared_license]
 - product_serial_number
 - txone_license_file
 - [shared_install]
 - silent
 - password
 - If you would like to use a proxy server for communication with StellarOne, configure the shared_proxy properties as well.
-

An example of the setup config file adapted for silent installation

```
[shared_license]

product_serial_number = TExXXXXX-SAMP-LEXX-XXXX-TXONESPXXXXX

txone_license_file = Stellar<License>Edition_XXXXXXXXXXXXX.txt

txone_license_env = prod

[shared_server]

host = 10.1.195.100

cert = server.crt

[shared_proxy]

host =

port =

username =

password =

[shared_install]

silent = 1

password = 11111111

user_password =

enable_shell_integration = 1

enable_real_time_scan = 1
```

```
enable_ransomware_behavior_monitor = 1

[shared_debug]

enable_debug_log =

enable_engine_debug_log =

[shared_popup]

usb_block = 1

threat_detect = 0

lockdown_block = 0

[protect_server]

port = 9443

[protect_listen]

port = 14336

[protect_update]

source = https://10.1.195.100/rest/stellar-au/duplicate/protect

source_tx = https://10.1.195.100/rest/stellar-au

[protect_config]

include =

[legacy_server]

port = 8000

[legacy_listen]

port = 14336

[legacy_update]

source = https://10.1.195.100/rest/stellar-au/duplicate/enforce

source_tx = https://10.1.195.100/rest/stellar-au

[legacy_config]

include =

[protect_install]

asset_vendor = ABB

asset_model = ABB-1X2Y
```

```
asset_location = Factory1 North Area
asset_description = This is a machine
install_location = C:\test
enable_start_menu = 1
enable_desktop_icon = 1
enable_systray_icon = 1
enable_trusted_ics_cert = 1
enable_prescan = 1
enable_lockdown_al_building = 1
enable_lockdown_detection = 1
enable_oem_lockdown_enforce = 1
[protect_prescan]
action = 1
background = 0
cpu_usage_mode = 0
[protect_client]
import_source = C:\txsp_config
[legacy_Property]
PRESCAN = 1
WEL_SIZE = 10240
WEL_RETENTION = 0
WEL_IN_SIZE = 10240
WEL_IN_RETENTION = 0
INTEGRITY_MONITOR = 0
PREDEFINED_TRUSTED_UPDATER = 0
WINDOWS_UPDATE_SUPPORT = 0
STORAGE_DEVICE_BLOCKING = 0
INIT_LIST = 0
LOCKDOWN = 0
```

```
LOCKDOWN_DETECTION = 0

FILELESS_ATTACK_PREVENTION = 0

INTELLIGENT_RUNTIME_LEARNING = 0

NO_DESKTOP = 0

NO_STARTMENU = 0

NO_SYSTRAY = 0

MAX_EVENT_DB_SIZE = 1024

INIT_LIST_EXCLUDED_EXTENSION1 = log

INIT_LIST_EXCLUDED_EXTENSION2 = txt

INIT_LIST_EXCLUDED_EXTENSION3 = ini

ENABLE_REAL_TIME_PROTECTION = 0

[legacy_Prescan]

PRESCANCLEANUP = 2

IGNORE_THREAT = 2

REPORT_FOLDER =

SCAN_TYPE = Full

COMPRESS_LAYER = 2

MAX_FILE_SIZE = 0

SCAN_REMOVABLE_DRIVE = 0

FORCE_PRESCAN = 0

[legacy_BlockNotification]

ENABLE = 0

ALWAYS_ON_TOP = 1

SHOW_DETAILS = 1

AUTHENTICATE = 1

TITLE =

MESSAGE =

[legacy_EventLog]

Enable = 1
```

```
Level_WarningLog = 1
Level_InformationLog = 0
BlockedAccessLog = 1
ApprovedAccessLog = 1
ApprovedAccessLog_TrustedUpdater = 1
ApprovedAccessLog_DllDriver = 0
ApprovedAccessLog_ExceptionPath = 1
ApprovedAccessLog_TrustedCert = 1
ApprovedAccessLog_WriteProtection = 1
ApprovedAccessLog_TrustedHash = 1
SystemEventLog = 1
SystemEventLog_ExceptionPath = 1
SystemEventLog_WriteProtection = 1
ListLog = 1
UsbMalwareProtectionLog = 1
ExecutionPreventionLog = 1
NetworkVirusProtectionLog = 1
IntegrityMonitoringLog_FileCreated = 1
IntegrityMonitoringLog_FileModified = 1
IntegrityMonitoringLog_FileDeleted = 1
IntegrityMonitoringLog_FileRenamed = 1
IntegrityMonitoringLog_RegValueModified = 1
IntegrityMonitoringLog_RegValueDeleted = 1
IntegrityMonitoringLog_RegKeyCreated = 1
IntegrityMonitoringLog_RegKeyDeleted = 1
IntegrityMonitoringLog_RegKeyRenamed = 1
DeviceControlLog = 1
[legacy_MaintenanceMode]
ENABLE_DURATION = 0
```

```
SCAN = 0
```

```
[legacy_Message]
```

```
INITIAL_RETRY_INTERVAL = 120
```

```
MAX_RETRY_INTERVAL = 7680
```

**Note:**

- The license file name varies depending on different license editions (ICS/Kiosk/OEM). For example, if you use ICS license edition, the license file name appears like this: `StellarICSEdition_xxxxxxxxxxxxx.txt`.
- To get the license file and product serial number, see [Getting the License File and PSN \(on page 102\)](#).

Executing Silent Installation

After defining the setup configuration file, execute the silent installation on the endpoint.

1. If the agent installer package is downloaded from StellarOne, within the `StellarSetup.ini` config file, almost all the values needed should be automatically generated. If no additional configuration requirements are needed, you can just change the `silent` value to `1` and specify the password in the `[shared_install]` section of the configuration file.

**Note:**

If the agent installer package is downloaded from the Software Download Center, you should also specify the license data for the installer to launch.

2. Locate the defined `StellarSetup.ini` file in the installation package.
3. Choose one of the methods to launch the `StellarSetup.exe` installer.
 - Double-click the installer `StellarSetup.exe`.
 - Use the command prompt to execute `StellarSetup.exe` with the argument `-s`, e.g., type `C:\package>StellarSetup.exe -s`

**Note:**



- To view relevant information or progress status of the silent installation, check logs filed under C:\Windows\Temp.
- If using Windows batch START command with /WAIT option to execute the installation file, the installation results will be reported by a number. The number "0" indicates the installation is successfully completed and if other numbers are displayed, it indicates the installation failed.

4. Run Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) and log on with the configured password.
5. After successfully logging into Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy), the **Overview** window will be displayed.

Installation Using the Command Line

Administrators can also install Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) from the command line interface (CLI) or using a batch file, allowing for silent installation and mass deployment.

Installer Command Line Interface Parameters

The following table lists the command parameters available for Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) installation.

Table 10. Stellar Agent - Protect Edition Installer Command Line Options

Parameter	Value	Description
-s		Run the installer silently  Note: During the installation process, you can view the following log files in the folder C:\windows\temp to check the status of the prescan and initial approved process: StellarProtect\StellarProtectPrescan_YYYYMMDD.log
-e		Encrypt the config file for installation

Table 11. Stellar Agent - Protect Edition (Windows-Legacy) Installer Command Line Options

Parameter	Value	Description
-s		Run the installer silently

Table 11. Stellar Agent - Protect Edition (Windows-Legacy) Installer Command Line Options (continued)

Parameter	Value	Description
		 Note: During the installation process, you can view the following log files in the folder C:\windows\temp to check the status of the prescan and initial approved process: • Prescan process: YYYYMMDDHHMMSS_wk_PreScanProgress.log • Initial approved process: YYYYMMDDHHMMSS_wk_InitListProgress.log
-p	<administrator_password>	Specify the administrator password
-d	<path>	Specify the installation path
-nd		Do not create a desktop shortcut
-ns		Do not add a shortcut to the Start menu
-ni		Hide the task tray icon
-cp	<path>	Specify the Stellar Agent - Protect Edition (Windows-Legacy) configuration file  Note: The Stellar Agent - Protect Edition (Windows-Legacy) configuration file can be exported after installing Stellar Agent - Protect Edition (Windows-Legacy).
-lp	<path>	Specify the Approved List

Table 11. Stellar Agent - Protect Edition (Windows-Legacy) Installer Command Line Options (continued)

Parameter	Value	Description
		 Note: After installing Stellar Agent - Protect Edition (Windows-Legacy) and creating the Approved List, the list can be exported.
-qp	<path>	Specify the folder path for quarantined files when custom action is set to “quarantine” mode
-nps		Do not execute Prescan
-ips		Do not cancel installation when Prescan detects threats

An example of using CLI for silent installation without creating a desktop shortcut would look like this:

```
StellarSetup.exe -s -p <administrator_password> -nd
```

License Activation for Standalone Agent

This section describes the license activation procedures during the installation process for standalone Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) agents.

1. Launch the agent's Installer and go through the procedures until the **Administrator Password & License Activation** window appears. After inputting and confirming the administrator password, click the **New License** button.

Figure 27. License Activation - New License Button

TXOne StellarProtect Setup

Administrator Password & License Activation

Administrator Password
The password must be 8 to 64 alphanumeric characters. The following characters are not supported: | > < \ " spaces.

Password:

Confirm Password:

License

< Back Next > Cancel

2. A pop-up **License Activation** window appears.

Figure 28. License Activation - License Key or License File

TXOne StellarProtect Setup

License Activation

Choose one of the ways to activate the license based on the license data available from your support provider.

☒ License Key

☐ License File

Save Cancel


3. Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) recognizes two license formats (**License Key** and **Activation Code**) available from different sales channels. See the following table first to find the license format that matches the given license data.

Table 12. Comparison of Two Different License Formats

	License Key	Activation Code
Length	19 characters	37 characters
Example	FIJN-HPYB-XXXX-XXXX	TE-24RF-Q9UN9-S9QQN-XX XXX-XXXXX-XXXXX

4. See the following instructions for how to activate license depending on the different license formats.

- If the given license format is **Activation Code**:
 - a. Click **License Key**.
 - b. Specify the **Activation Code** in the text field.

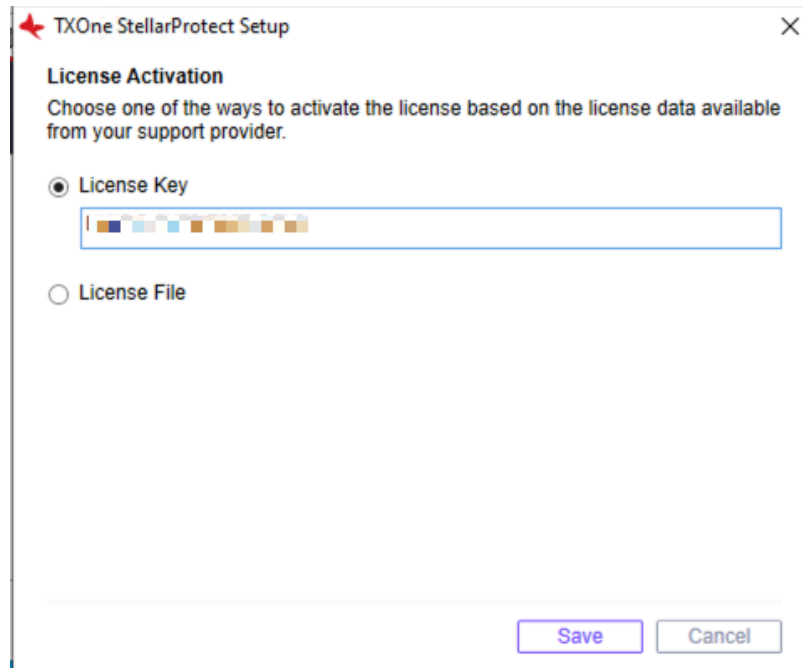

- c. Click **Save**.
- If the given license format is **License Key**:

- Use the License Key to download the License File (a .txt file). See [Getting the License File and PSN \(on page 102\)](#) for instructions.
- After getting the License File, click **License File** and import it.
- Specify the **Product Serial Number** in the text field.

Figure 29. License Activation - License File

TXOne StellarProtect Setup

License Activation
Choose one of the ways to activate the license based on the license data available from your support provider.

☐ License Key

☒ License File

Product Serial Number

Note: If you don't have the license file on hand, click the link below and open the copied link in a web browser on a computer with Internet connection.

Note: A license key is required for downloading a license file.
[Copy Download Link for getting the License File](#)

- Click **Save**.

5. A success message appears. Click **Next** to proceed to the next procedure for the installation.



Note:

- See [Resolving Licensing Issues \(on page 108\)](#) if licensing related error messages appear.
- See [Attended Installation of Stellar Agent - Protect Edition \(on page 67\)](#) or [Attended Installation of Stellar Agent - Protect Edition \(Windows-Legacy\) \(on page 80\)](#) for the next step of installing Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy).

Getting the License File and PSN

This section describes two methods to get the license file and PSN (product serial number):

- [Getting the License File and PSN for Standalone Agents \(on page 103\)](#)
- [Getting the Latest License File from StellarOne \(on page 106\)](#)

Getting the License File and PSN for Standalone Agents

To activate licenses for certain standalone agents, follow the instructions below.

1. Open the URL: <https://mytxone.cs.txone.com/license/activate/txone/stellar> in a web browser on a computer with Internet connection.



Note:

This URL can also be obtained during the installation process with GUI. See [About the Download Link for Getting License File \(on page 105\)](#) for more details.



Important:

A license key is required for downloading a license file.

2. You will be directed to the **License File Management** web page. Specify your license key in the **License Key** field.

Figure 30. License File Management

License File Management


Download License File

HXXXXXXXXXXXXX

SUBMIT

3. Click **SUBMIT**.
4. The **License File Info** pop-up window appears showing the license information. Check if the information listed matches the license data provided by your support provider.
5. Click the copy icon to copy and save the **Product Serial Number** for later use.

Figure 31. License Information

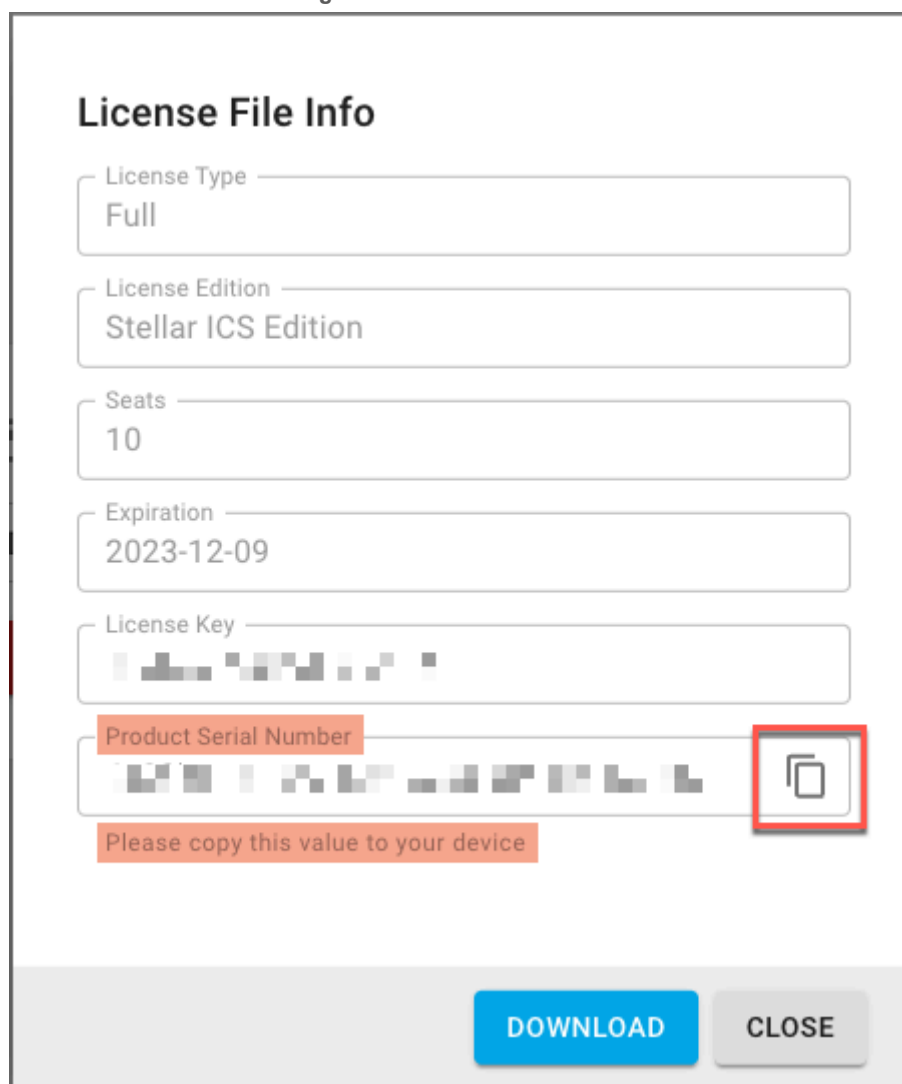

The image shows a 'License File Info' dialog box. It contains several input fields: 'License Type' with the value 'Full', 'License Edition' with 'Stellar ICS Edition', 'Seats' with '10', 'Expiration' with '2023-12-09', and 'License Key' with a masked value. Below these is the 'Product Serial Number' field, also masked, which is highlighted with a red box and a copy icon. A red banner below the serial number field says 'Please copy this value to your device'. At the bottom right are 'DOWNLOAD' and 'CLOSE' buttons.

Field	Value
License Type	Full
License Edition	Stellar ICS Edition
Seats	10
Expiration	2023-12-09
License Key	[Masked]
Product Serial Number	[Masked]

Please copy this value to your device

DOWNLOAD CLOSE




Important:

The **Product Serial Number** is required for license activation by importing a license file. Ensure that you save it for later use.

- Click **Download** for downloading the license file (a .txt file).

Figure 32. License File Downloaded

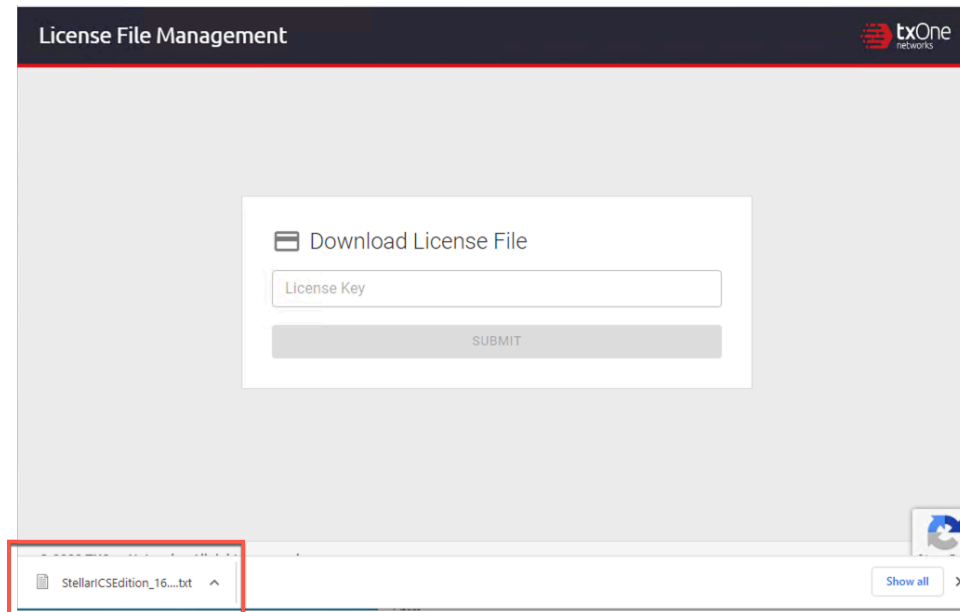**Note:**

Please find the license file in the downloads folder.

About the Download Link for Getting License File

Users can also copy the URL of TXOne **License File Management** web page during the installation process with GUI.

1. Launch the agent's GUI Installer and go through the procedures until the **Administrator Password & License Activation** window appears. After specifying the administrator password, click the **New License** button.
2. A pop-up **License Activation** window appears. Select **License File**.
3. Click **Copy Download Link for getting the License File** at the bottom of the **License Activation** window.
4. **The Download Link has been copied** message appears.
5. Open the copied link in a web browser on a computer with Internet connection. You will be directed to TXOne **License File Management** website.

**Note:**


See [Getting the License File and PSN for Standalone Agents \(on page 103\)](#) for instructions on how to get the license file from TXOne **License File Management** website.

Getting the Latest License File from StellarOne

When you use a license file for activating certain agents with the installer package downloaded from StellarOne, if a license expiration error message appears, follow the instructions below to get the latest license file and PSN (Product Serial Number) from StellarOne.


1. To get the latest license file, go to StellarOne **Administration > License**.
2. Click **Download the latest license file** at the bottom of the **License** page.

Figure 33. Download License File from StellarOne

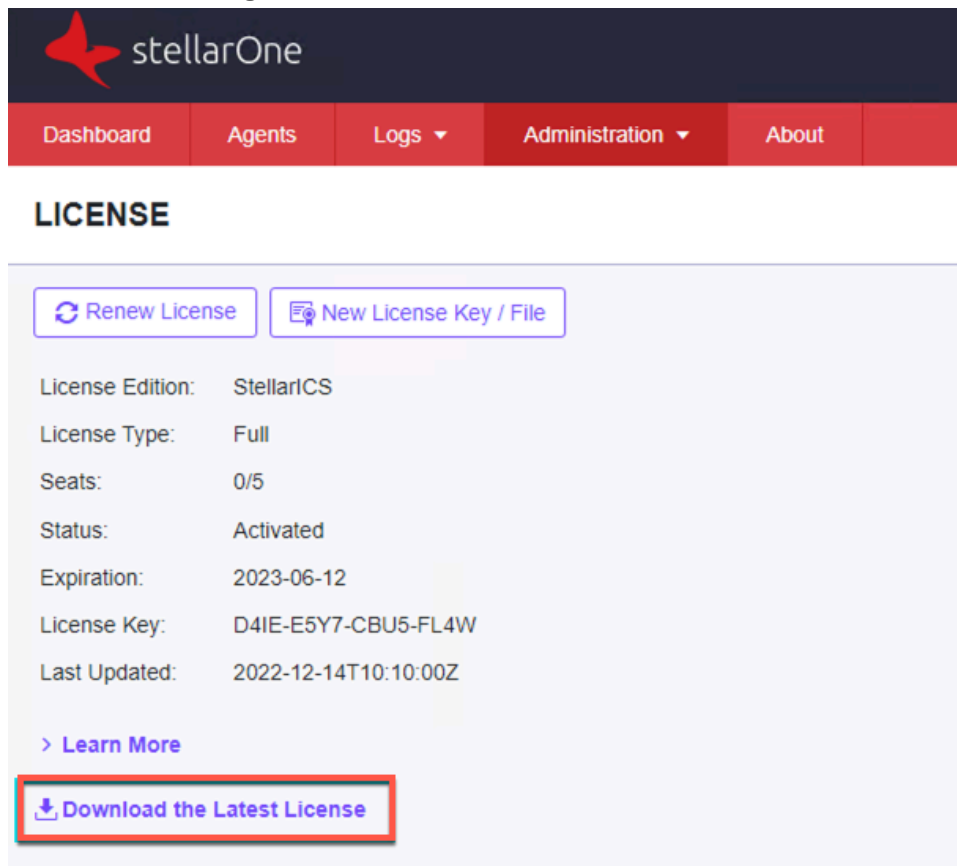

3. The license file (a .txt file) has been downloaded to your Downloads folder.
4. To get the PSN, go to StellarOne **About** page.
5. Find and copy the product serial number.

Figure 34. Get Product Serial Number from StellarOne

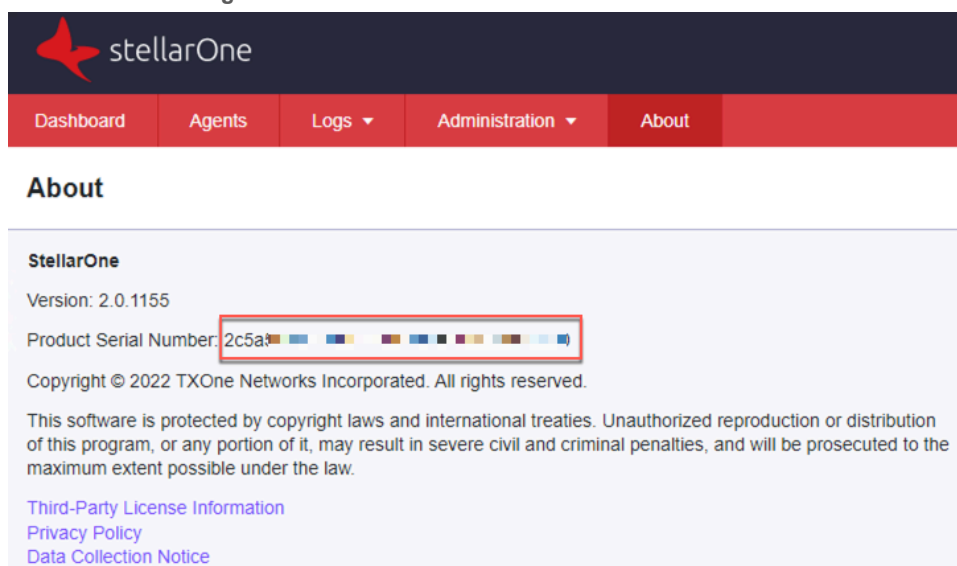

Resolving Licensing Issues

The following table provides more information about some licensing error messages and possible actions to take when issues occur during license activation.

Table 13. Licensing Error Messages and Suggested Actions

Error Message	Description	Possible Actions
Unable to convert the license from full to trial version. To continue using the product, please contact your sales representative for renewing the license.	Once upgraded to a full license, the full license cannot be converted to a trial license.	• Ensure you enter the valid full license data. • Contact your sales representative for renewing the full license.
Activation Code detected as the currently used license format. This trial license can only be used once. Please contact your sales representative for a trial License Key or upgrading to a full license.	Based on the terms and conditions, the trial Activation Code can only be used once. An example of the Activation Code: TE-24RF-Q9UN9-S9QQN-XXX XX-XXXXX-XXXXX	To continue using the product, contact your sales representative for a trial License Key or upgrading to a full license.
License Key detected as the currently used license format. Please contact your sales representative for extending the license.	Based on the terms and conditions, the trial License Key can be extended under certain circumstances. You can also choose to upgrade to a full license for a minimum period of one-year protection coverage. If you're using a full license, consider renewing the license. An example of the License Key: FIJN-HPYB-XXXX-XXXX	To continue using the product, contact your sales representative for extending the trial license, upgrading to a full license, or renewing the full license.

Replicating Installation Configuration for Multiple Standalone Agents

This section introduces a more efficient method to replicate installation configuration for multiple standalone agents with the same license file and product serial number.

1. See [Getting the License File and PSN for Standalone Agents \(on page 103\)](#) for getting the license file and product serial number.
2. Place the license file as the top-level file in the agent's installer package.
3. Prepare your `StellarSetup.ini` config file used for installing agents in standalone and silent modes.



Note:

- Ensure the values of the following properties are specified:
 - `[Shared_license]`
 - `product_serial_number`
 - `txone_license_file`
 - `[shared_install]`
 - `silent`
 - `password`

-
4. Save the installer package in the target endpoints for installation.
 5. Launch the Installer in silent mode.

Proxy Settings

If Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) agents use a proxy server for both communication with StellarOne and scan component updates, it is configurable using `StellarSetup.ini` before installation and the command line interface afterwards.

- For more information about using `StellarSetup.ini` to configure the proxy settings before installation, see [Setup Configuration File \(on page 25\)](#)
- For more information about using command line interface to configure the proxy settings after installation, see *TXOne Stellar Agent - Protect Edition Administrator's Guide* for the list of all commands.

Chapter 3. Installation (Linux)

Follow the below instructions to install Stellar Agent - Protect Edition (Linux).



Note: Ensure port 14336 is open and not blocked by the firewall before installing the agent.

1. Download the Agent-Installer.tgz file from your StellarOne server. Go to **Administration > Downloads/Updates > Agent**, select **Protect, Linux** and click **Download**.
2. Ensure the Agent-Installer.tgz file is on the Linux machine you wish to install the agent to.
3. Use the **cd** command to move to the directory that contains the Agent-Installer.tgz file.

```
cd Documents
```



Note: The above example command presumes the Agent-Installer.tgz file is located in the Documents directory, please modify if to reflect the true location.

4. Extract the Agent-Installer.tgz file using the following command.

```
tar -xvzf Agent-Installer.tgz
```

5. Optionally, edit the setup.conf file (asset section only). Enter the editor using the following command.

```
nano setup.conf
```

6. Exit the editor by pressing the **Ctrl** and **X** keys. You will be prompted to save the file.
7. Run the agent installer using the following command.

```
sudo sh installer.sh -i
```

8.  **Note:** You can include the **-d** option to enable debug mode, allowing the collection of more logs in the terminal console for easier problem analysis. e.g., `sudo sh installer.sh -i -d`.

9. Stellar Agent should now be installed. You can check with the following commands.
Debian based systems:

```
sudo dpkg -s stellar-protect
```

RPM based systems:

```
sudo rpm -qi stellar-protect
```

10. Return to StellarOne's **Agents** list and ensure your Linux machine has been added.

Chapter 4. Agent Configuration File Deployment

This chapter describes the deployment of customized settings to multiple TXOne Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) agents using an Agent Configuration File.

For mass deployment, TXOne Networks recommends first installing Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) on a test endpoint to confirm the correct operation of all parameters, since a customized configuration may require a valid agent configuration file and Approved List.



Note:

Refer to *TXOne Stellar Agent - Protect Edition Administrator Guide* for more information about the Approved List and agent configuration file.

Deployment for Standalone Agents

Agents installed in **Standalone** mode are not managed by a TXOne StellarOne central management console server. To manually deploy a single configuration to multiple **Standalone** agents, import the sample config file to the target agents.

Use the `StellarSetup.ini` file

- For Stellar Agent - Protect Edition, find the `import_source` property in the `[protect_client]` section in the `StellarSetup.ini` file, and then specify the path to the folder containing the sample config file. See [Properties in the Config File \(on page 27\)](#) for more details.
- For Stellar Agent - Protect Edition (Windows-Legacy), manually add the `CONFIG_PATH` property in the `StellarSetup.ini` file, and then specify the file path to the sample config file. See [Hidden Properties in the Config File \(on page 54\)](#) for more details.

Deployment Using StellarOne

Agents installed in **Managed** mode are managed by a StellarOne server, which can issue remote commands to all managed agents. To deploy agent configuration settings to multiple managed agents, launch the StellarOne web console and use the **Send Command** menu located on the **Agent** management screen.

You can remotely obtain agent configuration settings and Approved List by exporting and downloading them from the StellarOne.



Note:

Only Stellar Agent - Protect Edition (Windows-Legacy) supports exporting/importing agent configuration settings and importing Approved List.

1. Click **Agents > Stellar Agent - Protect Edition (Windows-Legacy)** from the StellarOne web console. The **Agent** management screen appears.
2. Select the target endpoint(s).
3. Click **Import/ Export** and select one of the following:

- **Export Approved List**
- **Export Agent Configuration**

The StellarOne will issue the command. Progress can be viewed from the pop-up **Details** window.

4. To import settings, repeat the above steps, instead selecting either **Import Approved List** or **Import Agent Configuration**.
5. A **Command Deployment** window appears showing the exports status.
6. Click **Download** to download the exported settings.

Remotely Importing Agent Settings

You can remotely apply new agent settings to agents from StellarOne. This feature allows you to:

- Remotely overwrite agent configurations
- Remotely overwrite Approved Lists
- Remotely add approved items to Approved Lists



Note:

Only Stellar Agent - Protect Edition (Windows-Legacy) supports this function.

1. Prepare a customized agent configuration file or Approved List.
 - a. Export and download an agent configuration file or Approved List.
 - b. Customize the downloaded file.
-



Note:

To ensure successful import, verify that the file to import meets the following requirements:

- File is in the CSV format and uses UTF-8 encoding
 - For Approved List, maximum file size supported is 20 MB
 - For agent configuration file, maximum file size supported is 1 MB
-

2. Click **Agents** from the StellarOne console. The **Agent management** screen appears.
3. To import the customized file to agents, follow the steps below.
 - a. From the Endpoint column, select one or more agents.
 - b. Click **Import/ Export**
 - c. Select **Import Approved List** or **Import Agent Configuration**. The import dialog will appear.
4. To import the customized file to an agent group, follow the steps below.
 - a. From the left panel, select an agent group and go to **Import / Export**.
 - b. Select **Import Approved List** or **Import Agent Configuration**. The import dialog will appear.
5. By default, StellarOne does the following:

- **Approved List:** accumulates items from the customized Approved List to the target Approved Lists. To replace the target Approved Lists with the customized Approved List, select **Overwrite the existing Approved List**.
 - **Agent Configuration:** overwrites the target Approved Lists with the customized Approved List.
6. Click **Browse** to select the customized file.
 7. Click **OK**.

Chapter 5. Upgrade

This chapter describes how to upgrade the Stellar Agent - Protect Edition and Stellar Agent - Protect Edition (Windows-Legacy) agents by installing patches.

Topics in this chapter include:

- [Supported Upgrade Paths \(on page 118\)](#)
- [Preparing the Agent for Upgrade to a Later Version \(on page 119\)](#)

Supported Upgrade Paths

The following tables illustrate the supported upgrade paths for Stellar Agent - Protect Edition and Stellar Agent - Protect Edition (Windows-Legacy) agents.

Table 14. Supported Upgrade Paths for Stellar Agent - Protect Edition

Current Version	Supported Target Upgrade Version	Local Upgrade	Remote Upgrade
3.3	5.0	√	√
3.2	3.3/5.0	√	√
3.1	3.2/3.3/5.0	√	√
3.0	3.1/3.2/3.3/5.0	√	√
2.2	3.0/3.1/3.2/3.3/5.0	√	√
2.1	2.2/3.0/3.1/3.2/3.3/5.0	√	√
2.0	2.1/2.2/3.0/3.1/3.2/3.3/5.0	√	√
1.2 Patch 1	2.0/2.1/2.2/3.0/3.1/3.2/3.3/5.0	√	√
1.2	1.2 Patch 1/2.0/2.1/2.2/3.0/3.1/3.2/3.3/5.0	√	√
1.1	1.2/1.2 Patch 1/2.0/2.1/2.2/3.0/3.1/3.2/3.3/5.0	√	√
1.0	1.1/1.2/1.2 Patch 1/2.0/2.1/2.2/3.0/3.1/3.2/3.3/5.0	√	N/A

Table 15. Supported Upgrade Paths for Stellar Agent - Protect Edition (Windows-Legacy)

Current Version	Supported Target Upgrade Version	Local Upgrade	Remote Upgrade
3.3	5.0	√	√
3.2	3.3/5.0	√	

Table 15. Supported Upgrade Paths for Stellar Agent - Protect Edition (Windows-Legacy) (continued)

Current Version	Supported Target Upgrade Version	Local Upgrade	Remote Upgrade
3.1	3.2/3.3/5.0	√	√
3.0	3.1/3.2/3.3/5.0	√	√
1.5	3.0/3.1/3.2/3.3/5.0	√	√
1.4	1.5/3.0/3.1/3.2/3.3/5.0	√	√
StellarProtect (Legacy Mode) 1.3	Stellar Agent - Protect Edition (Windows-Legacy) 1.3/1.4/1.5/3.0/3.1/3.2/3.3/5.0	√	√
1.2 Patch 1	2.0/2.1/2.2/3.0/3.1/3.2/3.3/5.0	√	√
1.2	1.2 Patch 1	√	√
1.1	1.2 / 1.2 Patch 1	√	√
StellarEnforce 1.0	1.1 / 1.2 / 1.2 Patch 1	√	N/A

**Note:**

- StellarEnforce was renamed StellarProtect (Legacy-Mode) upon the release of version 1.3.
- To directly upgrade StellarEnforce/StellarProtect (Legacy-Mode) from versions below 1.2 Patch 1 to versions older than 1.2 Patch 1, add the patch file hash as the trusted hash and enable the PTU function before executing the upgrade.

Preparing the Agent for Upgrade to a Later Version

See the following table for the appropriate actions to take according to your chosen installation method.

**Note:**



- The latest updates can be downloaded from the Stellar Agent - Protect Edition [Software Download Center](#).
- Before upgrading, close the Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) agent console and/or wksupporttool UI, and check the [Supported Upgrade Paths \(on page 118\)](#) for Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy).

**Warning:**

- If the agents are managed by StellarOne, ensure you upgrade the StellarOne server first before upgrading the Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) agents.
- Do not register Stellar Agent - Protect Edition (Windows-Legacy) 3.0 to StellarOne 2.2 or older versions.

Table 16. Post-Installation Agent Upgrade

Installation Method	Required Action	Settings Retained
Local upgrade	Stellar Agent - Protect Edition: Extract the patch zip file and deploy patching by running <code>txone_sp_full_patch_win_version.exe [-s] [-p <PASSWORD>]</code>. To execute a silent upgrade, please add: <pre>[-s] [-p <PASSWORD>]</pre> For example, type <pre>txone_sp_full_patch_win_3.3.0.1121.exe -s -p <PASSWORD></pre> to deploy the 5.0 patch file in silent mode.  Note: For Linux, if a patch file is available locally, you can run the <code>patch update</code> command on the agent to apply the upgrade. If you're unsure whether a patch file exists locally, run <code>patch show</code> to check.	Compatible settings retained

Table 16. Post-Installation Agent Upgrade (continued)

Installation Method	Required Action	Settings Retained
	Stellar Agent - Protect Edition (Windows-Legacy): Extract the patch zip file and deploy patching by running txone_splm_full_patch_win_version.zip and deploy the patch by running patch.exe. To execute a silent upgrade, please add: <pre>-s -a -s/g</pre> For example, type <pre>patch.exe -s -a -s/g</pre> to deploy the 5.0 patch file in silent mode.	Compatible settings retained
Remote upgrade	See the <i>StellarOne Administrator's Guide</i> for how to deploy patches to the agents remotely.  Note: TXOne Networks recommends using StellarOne 2.0 console or above to remotely deploy patches to the managed agents.	Compatible settings retained

Chapter 6. License Renewal

This chapter describes how to renew license for standalone Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) agent.

License Renewal for Standalone Agents

For standalone agents, users can renew the license directly on the agent console.

**Note:**

For Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) agents managed by StellarOne server, please renew license via the StellarOne web console. Refer to *StellarOne Administrator's Guide* for detailed instructions.

The following instructions take Stellar Agent - Protect Edition as an example for how to renew license for standalone Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) agents. Stellar Agent - Protect Edition (Windows-Legacy) would require you to follow similar procedures with slight differences in the GUI.


Stellar Agent - Protect Edition/Stellar Agent - Protect Edition (Windows-Legacy) recognizes two license formats (**License Key** and **Activation Code**) available from different sales channels. See the following table first to find the license format that matches the given license data.

Table 17. Comparison of Two Different License Formats

	License Key	Activation Code
Length	19 characters	37 characters
Example	FIJN-HPYB-XXXX-XXXX	TE-24RF-Q9UN9-S9QQN-XXX XX-XXXXXX-XXXXXX

1. Click the **New License** button on the Stellar Agent - Protect Edition logon screen.

Figure 35. Renew License for Standalone Agents

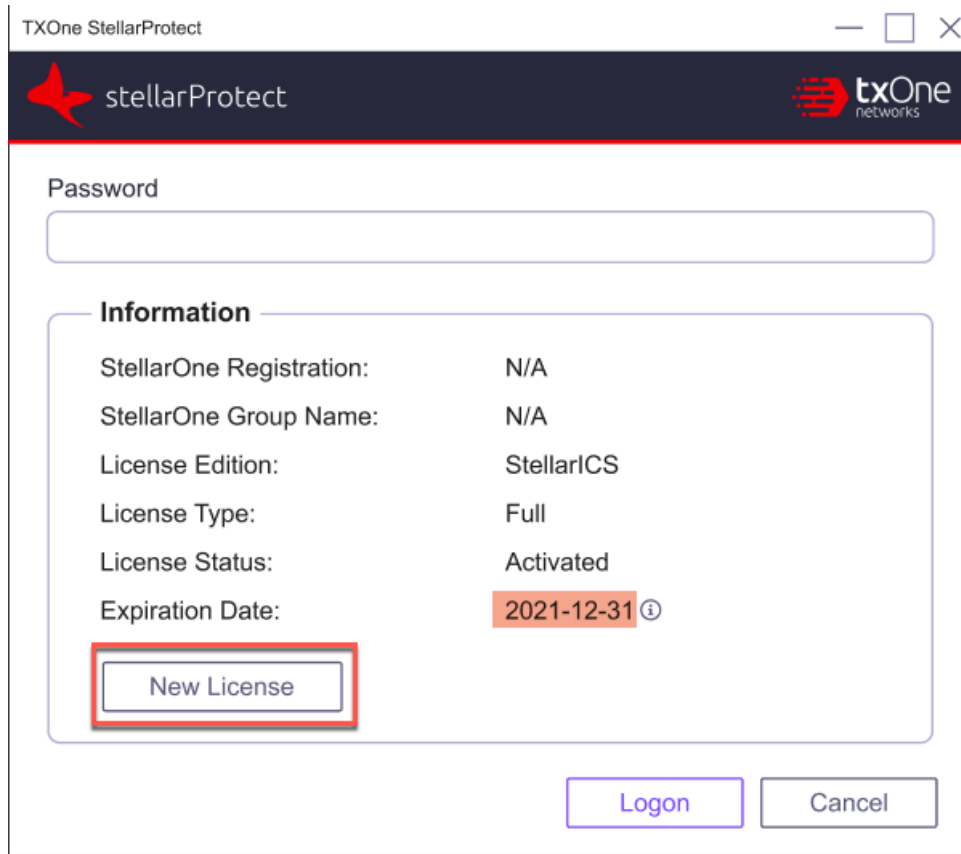

The screenshot shows the TXOne StellarProtect logon interface. At the top, there's a header with the 'stellarProtect' logo and the 'txOne networks' logo. Below the header is a 'Password' field. Underneath is an 'Information' section containing a table of system details. The 'New License' button is highlighted with a red rectangle. At the bottom right are 'Logon' and 'Cancel' buttons.


Information	
StellarOne Registration:	N/A
StellarOne Group Name:	N/A
License Edition:	StellarICS
License Type:	Full
License Status:	Activated
Expiration Date:	2021-12-31 ⓘ

New License

Logon Cancel

2. A pop-up **License Activation** window appears.
3. See the following instructions for how to activate license depending on the different license formats.


- If the given license format is **Activation Code**:
 - a. Click **License Key**.
 - b. Specify the **Activation Code** in the text field.

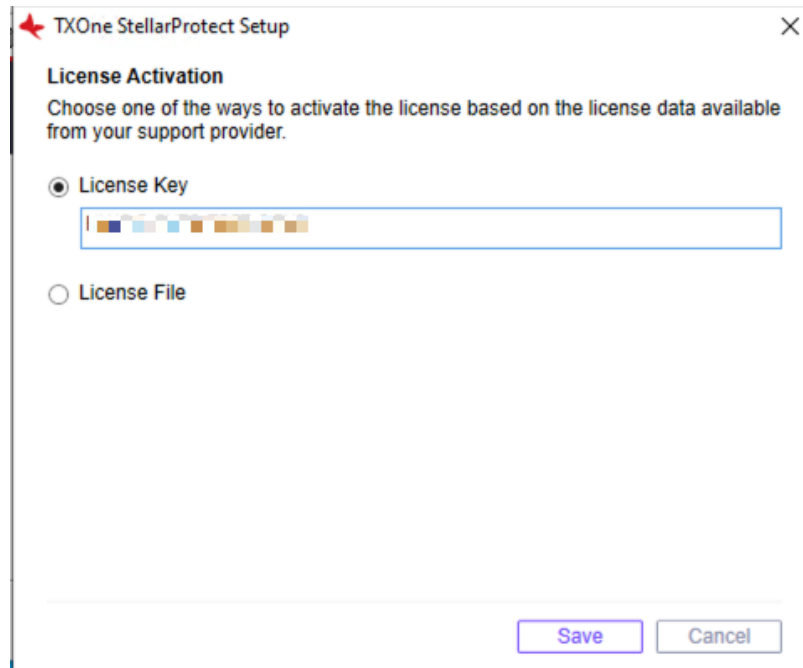

- c. Click **Save**.
- If the given license format is **License Key**:

- Use the License Key to download the License File (a .txt file). See [Getting the License File and PSN \(on page 102\)](#) for instructions.
- After getting the License File, click **License File** and import it.
- Specify the **Product Serial Number** in the text field.

Figure 36. License Activation - License File

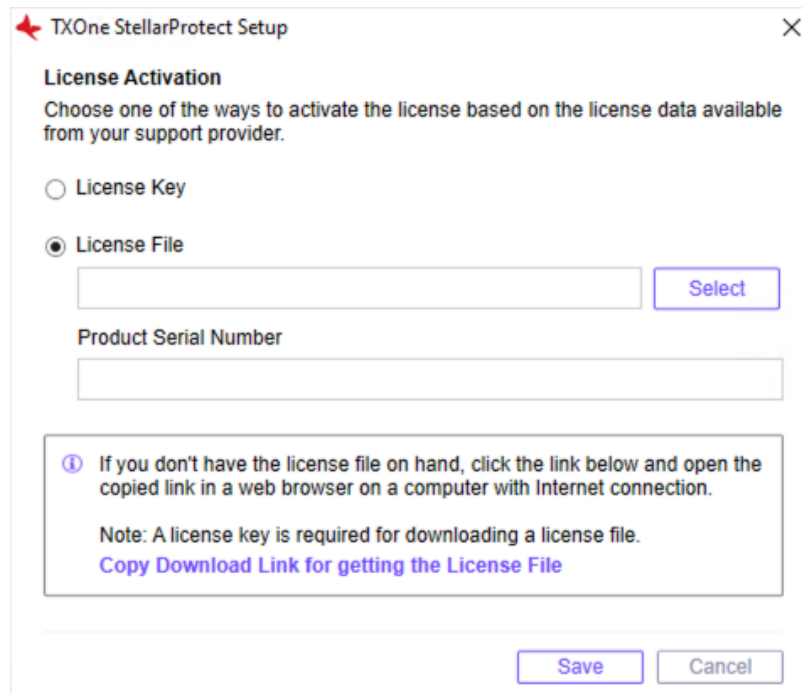

The screenshot shows a dialog box titled "TXOne StellarProtect Setup" with a close button (X) in the top right corner. The main heading is "License Activation". Below it, a text instruction says: "Choose one of the ways to activate the license based on the license data available from your support provider." There are two radio button options: "License Key" (unselected) and "License File" (selected). Below the "License File" option is a text input field and a "Select" button. Below that is a "Product Serial Number" label followed by another text input field. A large information box contains an icon, a paragraph of text, a note, and a link. At the bottom right are "Save" and "Cancel" buttons.

TXOne StellarProtect Setup

License Activation

Choose one of the ways to activate the license based on the license data available from your support provider.

☐ License Key

☒ License File

Select

Product Serial Number

Information: If you don't have the license file on hand, click the link below and open the copied link in a web browser on a computer with Internet connection.

Note: A license key is required for downloading a license file.


[Copy Download Link for getting the License File](#)

Save **Cancel**

- Click **Save**.

4. Check the Stellar Agent - Protect Edition logon screen for the updated license expiration date.

Figure 37. License Renewed for Standalone Agents

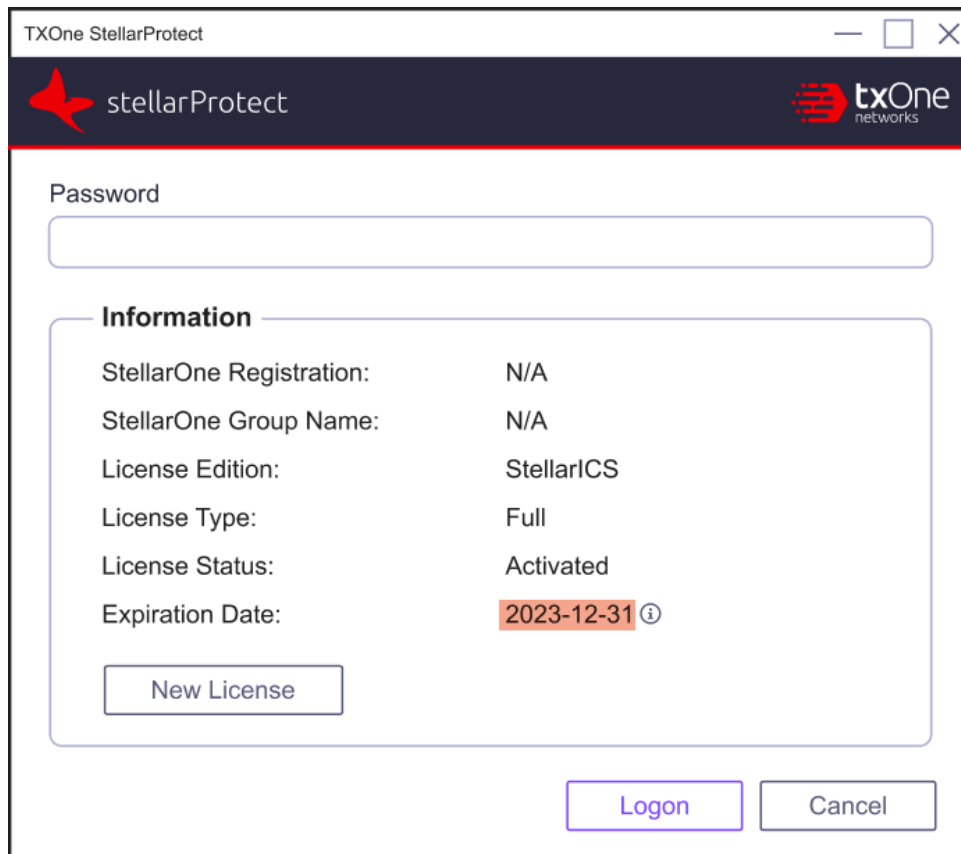

The image shows a screenshot of the TXOne StellarProtect application window. The window has a title bar with the text 'TXOne StellarProtect' and standard window controls (minimize, maximize, close). Below the title bar is a dark header bar with the 'stellarProtect' logo on the left and the 'txOne networks' logo on the right. The main content area is white and contains a 'Password' label above a text input field. Below this is an 'Information' section with a rounded border. Inside this section, there is a table-like structure with two columns: a label and a value. The labels are 'StellarOne Registration:', 'StellarOne Group Name:', 'License Edition:', 'License Type:', 'License Status:', and 'Expiration Date:'. The corresponding values are 'N/A', 'N/A', 'StellarICS', 'Full', 'Activated', and '2023-12-31' (which is highlighted in orange) followed by an information icon. Below the 'Expiration Date' row is a 'New License' button. At the bottom right of the window are two buttons: 'Logon' and 'Cancel'.

Information	
StellarOne Registration:	N/A
StellarOne Group Name:	N/A
License Edition:	StellarICS
License Type:	Full
License Status:	Activated
Expiration Date:	2023-12-31 ⓘ

New License

Logon Cancel

Chapter 7. Uninstallation (Windows)

Follow the below instructions to uninstall Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy).



Note:

Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) administrator password is required to uninstall Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) from an endpoint.



Important:

Please make sure the Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) UI is not open.

1. On an endpoint with the Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) agent installed, launch Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) Setup.
2. Follow one of the procedures listed below according to your operating system:

Operating System	Procedure
• Windows 10 Professional • Windows 10 Enterprise • Windows 10 IoT Enterprise • Windows 10 Fall Creators Update (Redstone 3) • Windows 10 April 2018 Update (Redstone 4) • Windows 10 November 2018 Update (Redstone 5) • Windows 11 Professional	a. Go to Start > Settings. b. Depending on your version of Windows 10, locate the Apps & Features section under one of the following categories: ◦ System ◦ Apps c. On the left pane, click Apps & Features. Or click Installed Apps. d. In the list, click Stellar Agent or Stellar Agent (Windows-Legacy). e. Click Uninstall.

Operating System	Procedure
• Windows 7 • Windows 8 • Windows Vista • Windows Server 2008 • Windows Server 2012 • Windows Server 2016 • Windows Server 2019 • Windows Server 2022 • Windows Server 2025 • Windows Storage Server 2012 • Windows Storage Server 2016	- Go to Start > Control Panel > Program and Features. - In the list, double-click TXOne Stellar Agent or TXOne Stellar Agent (Windows-Legacy).
• Windows Server 2003 • Windows XP • Windows 2000	- Go to Start > Control Panel > Add or Remove Programs. - In the list, select TXOne Stellar Agent (Windows-Legacy). - Click Remove.

- After the Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) Setup opens, click **Next**.
- Enter in the Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) administrator password and click **Next**.
- Make sure Stellar Agent - Protect Edition's or Stellar Agent - Protect Edition (Windows-Legacy)'s UI is completely closed before clicking **OK**.
- The message box indicating Stellar Agent - Protect Edition or Stellar Agent - Protect Edition (Windows-Legacy) being successfully removed will appear. Click **Finish**.

**Note:**

For Windows 7 and Windows Server 2016+ platforms, the installation of Stellar Agent - Protect Edition requires disabling Windows Defender first. Consequently, after uninstalling Stellar Agent - Protect Edition, TXOne Networks recommends that you manually enabling Windows Defender for security reasons.

Chapter 8. Uninstallation (Linux)

Follow the below instructions to uninstall Stellar Agent - Protect Edition (Linux).

1. Use the **cd** command to move to the directory that contains the Agent-Installer.tgz file.

```
cd Documents
```



Note: The above example command presumes the Agent-Installer.tgz file is located in the Documents directory, please modify if to reflect the true location.

2. Extract the Agent-Installer.tgz file using the following command.

```
tar -xvzf Agent-Installer.tgz
```

3. Remove the agent using the following command.

```
sudo sh installer.sh -R
```



Note: If you would like to remove the agent from the machine but maintain the `var/` `opt/txone/` directory for debugging purposes, use the following command.

```
sudo sh installer.sh -r
```

This command, as well as the prior command can both be applied with `-d` in order to output more information to the console.

4. Stellar Agent should now be uninstalled. You can confirm with the following command:
Debian based systems:

```
sudo dpkg -s stellar-protect
```

RPM based systems:

```
sudo rpm -qi stellar-protect
```


Chapter 9. Technical Support

Learn about the following topics:

- [Troubleshooting Resources \(on page 134\)](#)
- [Contacting TXOne Networks \(on page 134\)](#)
- [Other Resources \(on page 135\)](#)

Troubleshooting Resources

Before contacting technical support, consider visiting the following TXOne Networks online resources.

Using the Support Portal

The TXOne Networks Support Portal is a 24x7 online resource that contains the most up-to-date information about both common and unusual problems.

1. Go to <https://help.txone.com/>.
2. Click the appropriate button to search for solutions.
3. Use the **Search** box to search for available solutions.
4. If no solution is found, click **Live Chat** or **VoIP** service to submit a support case online.

A TXOne Networks support engineer investigates the case and responds in 24 hours or less.

Threat Encyclopedia

Most malware today consists of blended threats, which combine two or more technologies, to bypass computer security protocols. TXOne Networks combats this complex malware with products that create a custom defense strategy. The Threat Encyclopedia provides a comprehensive list of names and symptoms for various blended threats, including known malware, spam, malicious URLs, and known vulnerabilities.

Go to <https://www.encyclopedia.txone.com/> to learn more about:

- Malware and malicious mobile code currently active or "in the wild"
- Correlated threat information pages to form a complete web attack story
- Internet threat advisories about targeted attacks and security threats
- Web attack and online trend information
- Weekly malware reports

Contacting TXOne Networks

TXOne Networks representatives are available by phone or chat/VoIP services:

Table 18. TXOne Networks Contact Information

U.S.	+1 (346) 586-7975
Netherland	+31 402-310-122
Taiwan	+886 (2) 7727-5120

Table 18. TXOne Networks Contact Information (continued)

Chat/VoIP services	https://help.txone.com/
Website	https://www.txone.com/contact/

- TXOne Networks product documentation:

<https://my.txone.com/>

Speeding Up the Support Call

To improve problem resolution, have the following information available:

- Steps to reproduce the problem
- Appliance or network information
- Computer brand, model, and any additional connected hardware or devices
- Amount of memory and free hard disk space
- Operating system and service pack version
- Version of the installed agent
- Product serial number and license file, or license key
- Detailed description of the environment where the agent is installed
- Exact text of any error message received

Other Resources

In addition to solutions and support, there are many other helpful resources available online to stay up to date, learn about innovations, and be aware of the latest security trends.

Download Center

From time to time, TXOne Networks may release a patch for a reported known issue or an upgrade that applies to a specific product or service. To find out whether any patches are available, go to:

<https://my.txone.com/>

If a patch has not been applied (patches are dated), open the Readme file to determine whether it is relevant to your environment. The Readme file also contains installation instructions.

Appendix A. Stellar Agent - Protect Edition (Windows-Legacy) Limitations by Operating Systems

Stellar Agent - Protect Edition (Windows-Legacy) installed on the following operating systems has the limitations as described below.

Operating Systems	Limitations
Windows 10	• Unlock the endpoint before updating your Windows 10 operating system to the Anniversary Update, Creators Update, Fall Creators Update, April 2018 Update, October 2018 Update, or later versions. • To improve performance, disable the following Windows 10 components: ◦ Windows Defender Antivirus. This may be disabled via group policy. ◦ Windows Update. Automatic updates may require the download of large files, which may affect performance. ◦ Windows Apps (Microsoft Store) auto-update. Checking for frequent updates may cause performance issues.
Windows 10 Fall Creators Update	OneDrive integration is not supported. Ensure that OneDrive integration is disabled before installing Stellar Agent - Protect Edition (Windows-Legacy).

Operating Systems	Limitations
Windows 10 April 2018 Update (Redstone 4) and later versions	• OneDrive integration is not supported. Ensure that OneDrive integration is disabled before installing Stellar Agent - Protect Edition (Windows-Legacy). • See the following limitations when working with folders where the <i>case sensitive</i> attribute has been enabled: ◦ Enabling the <i>case sensitive</i> attribute for a folder may prevent Stellar Agent - Protect Edition (Windows-Legacy) from performing certain actions (e.g., prescan, custom actions) on that folder. Folders that do not have the attribute enabled are not affected. ◦ Stellar Agent - Protect Edition (Windows-Legacy) blocks all processes started from folders where the <i>case sensitive</i> attribute is enabled. Additionally, Stellar Agent - Protect Edition (Windows-Legacy) is unable to provide any information for the blocked processes, except for file path. ◦ The Stellar Agent - Protect Edition (Windows-Legacy) agent cannot verify file signatures of files saved in folders where the <i>case sensitive</i> attribute is enabled. As a result, DAC exceptions related to signatures cannot work.
• Windows 2000 SP4 (without update rollup) • Windows XP SP1 • Windows 2000 Server SP4	The following functions are not supported: • DLL/Driver Lockdown • Script Lockdown • Integrity Monitoring • USB Malware Protection • Storage Device Blocking • Maintenance Mode • Predefined Trusted Updater  Note:

Operating Systems	Limitations
	 To support these features, install Filter Manager: • For Windows 2000 Service Pack 4, apply the update KB891861 from the Microsoft Update Catalog website. • For Windows XP SP1, upgrade to Windows XP SP2.

Index

A

attended installation of Stellar Agent - Protect Edition	67
attended installation of Stellar Agent - Protect Edition (Windows- Legacy)	80

I

installation	23
managed or standalone Mode	24
installation methods	67
Installation Using the CLI	96
introduction	11
key features and benefits	13
what's new	16

L

license renewal	123
-----------------	-----

M

mass deployment	113
-----------------	-----

P

proxy settings	109
----------------	-----

S

setup configuration file	25
silent installation	89
support	
resolve issues faster	135
Supported upgrade paths	118
system requirements	17

T

technical support	133
contact	134
troubleshooting resources	134

U

uninstallation	129
Upgrade	117