

## NIBSS Consent Hub

v1.0<https://apitest.nibss-plc.com.ng/api>

### Introduction

The NIBSS Consent Hub is a transformative solution developed to address a critical need for a standardized, secure, and transparent system that governs how user data is accessed and shared as financial institutions and third-party providers increasingly rely on user data to deliver smarter and more personalized services.

It serves as a centralized platform that empowers Data Subjects (end users) to authorize, manage, and revoke consent for the use of their data, while providing Data Processors (third parties) and the Data Controller (NIBSS for BVN) with a robust framework to ensure compliance with data protection regulations such as NDPR and GDPR.

The NIBSS Consent Hub introduces a flexible, scalable, and secure consent architecture that supports multiple flows, including real-time OTP-based consent, biometric authentication, delayed email-based consent, and a self-service consent website. This ensures that all stakeholders including users, third parties, and regulators, can trust that data sharing is done transparently, responsibly, and with full user control.

The service requires two endpoints:

1. **Initiate Consent Redirect** – Built by NIBSS and used to initiate the consent process.
2. **Callback** – to be implemented by your institution, allowing NIBSS to send consent-related information back to you.

There are two approaches for generating consent within NIBSS Consent Hub:

#### 1. Service Provider Initiated Consent

- The data subject accesses the service provider's portal and selects the service to be used.
- The service provider calls the Initiate Consent Redirect endpoint on the NIBSS Consent Hub Service.
- If the data subject is present:
  - A Session ID, Token, and Redirect URL are returned from the Consent Hub Service.
  - The service provider redirects the data subject to the NIBSS Consent Authentication Page.
- If the data subject is not present:
  - A consent link is sent via email to the data subject, who can then click the link to proceed with authentication.
  - On the NIBSS Consent Authentication Page, the data subject enters their ID (e.g., BVN) and selects an authentication method (OTP / USSD / Biometric).
- Upon successful authentication, a retrieval token is returned to the service provider.

- The service provider uses the retrieval token to obtain the data subject's information.

## 2. Data Subject Initiated Consent

- The data subject accesses the [NIBSS Pre-Authorization Portal](#) directly.
- They enter their BVN on the Consent Authentication Page.
- They select an authentication method (OTP / USSD / Biometric) and a preferred OTP delivery mode (phone or email).
- Upon successful authentication, a retrieval token is issued to the data subject.
- The data subject provides this retrieval token to the service provider.
- The service provider then uses the retrieval token to retrieve the data subject's information.

### What You Need to Get Started

To get started with the NIBSS Consent Hub API, you need to be profiled on the NIBSS Developer portal.

You have to fill in some basic information for identification purposes. This information is collected in the [REQUEST CREDENTIALS FORM](#). The form requires you to fill in your email address and state the reason(s) you should be profiled on the service (whether it is for test or production).

Once you submit the request, You will receive an email containing these credentials: Client ID and [Client Secret](#).

The Client ID and the Client Secret are the credentials that would be used to identify you as a client on the application. Below explains what each credential means:

#### Client ID

This is a unique set of identifiers assigned to you as a client/customer for every request made on the application. This is mainly used when you want to generate a [TOKEN](#) for all request calls on the application. Check [AUTHENTICATION](#) to know how to use this credential to obtain a token.

#### Client Secret


This is a unique set of identifiers that is denoted as a password for every request sent. This is also used alongside the Client ID for generating an [AUTHENTICATION](#) token to make successful calls to the NIBSS Consent Hub API.

### How This Works


The NIBSS Consent Hub functions by allowing integrating institutions redirect data subjects to an interface where data subjects can initiate, authorize and pre-authorize consent. It supports authenticating data subjects using verification by either OTP or Biometric (Facial Image).

The below diagrams depict an end to end process flow that describes the interactions between entities for enabling Consent Initiation, Authorization and Pre-Authorization.

## Consent Process Flow (OTP)

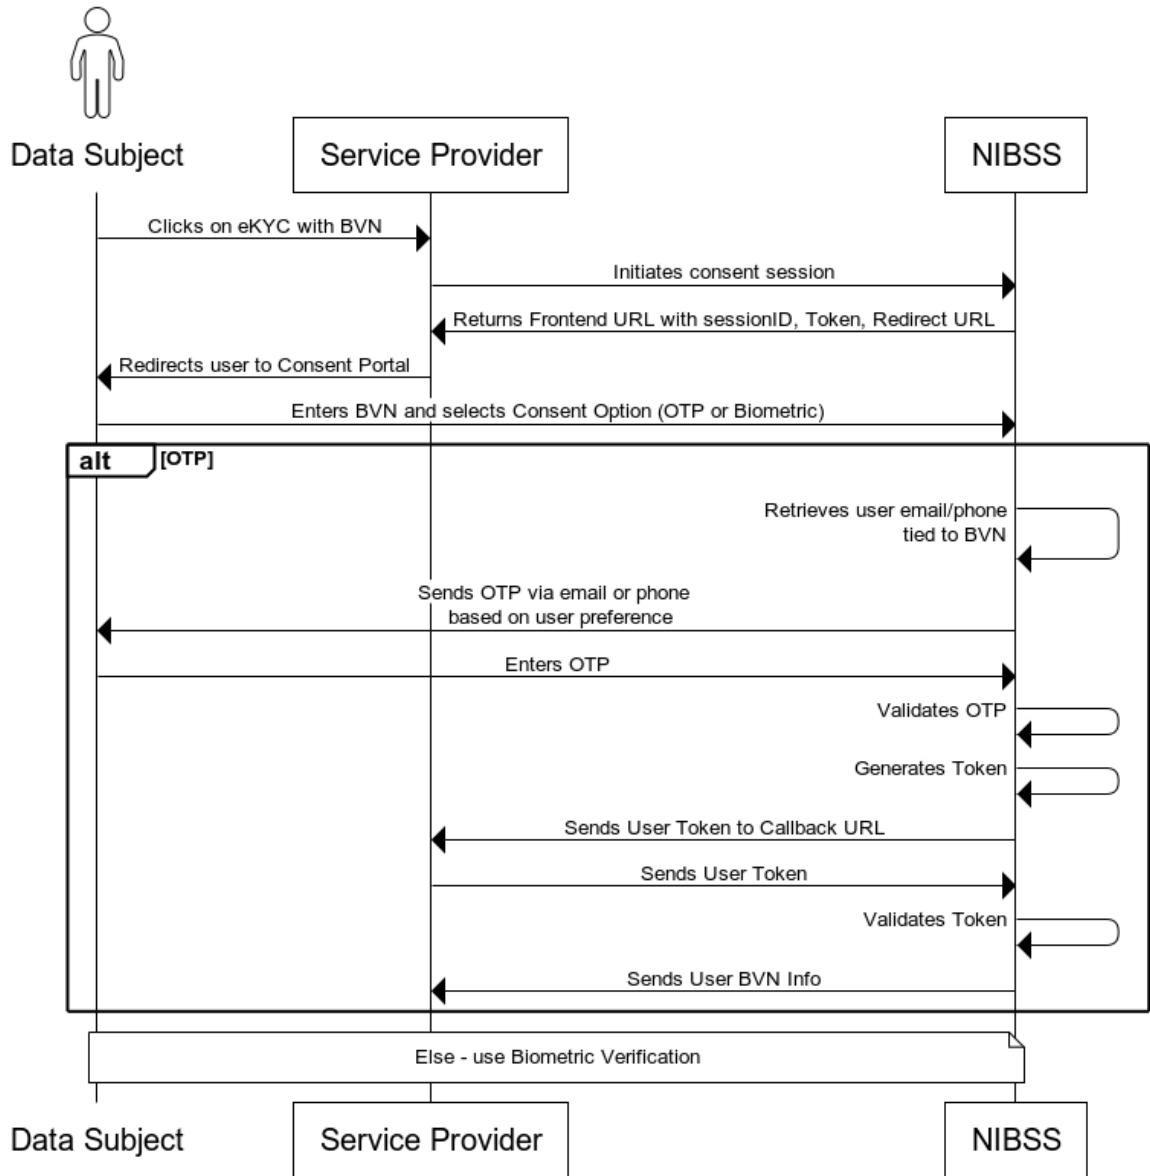

## Consent Flow (Biometric Verification)

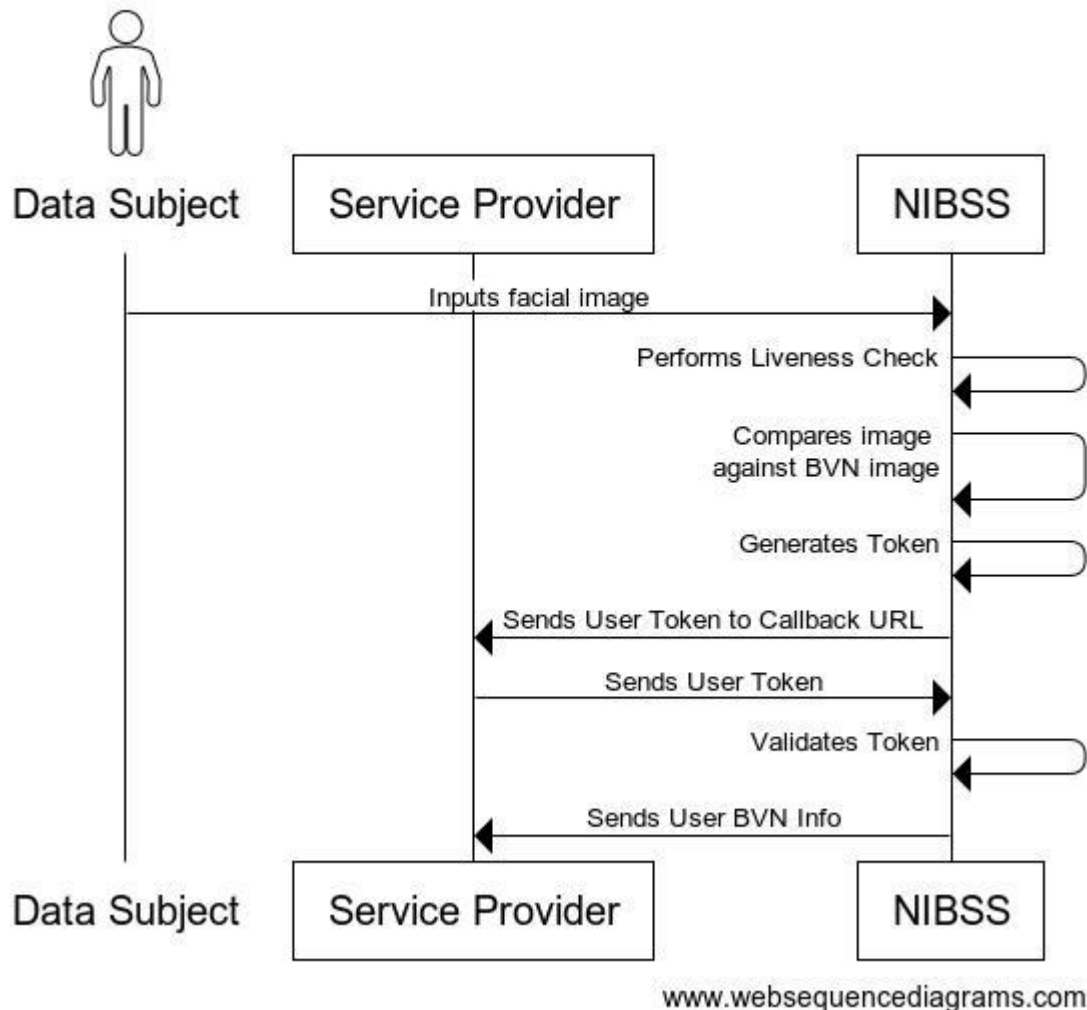

### Biometric Verification Number (BVN) Data Categorization

The following categories outline the grouping of personal data fields collected during the BVN consent process to ensure clarity, user understanding, and controlled data access based on consent scope.

1. *Personal Identification*
2. *Contact Information*
3. *Demographics Details*
4. *Geographic Details*

#### Personal Identification

This indicates the basic information used to identify you which include the following:

1. *First Name*
2. *Middle Name*
3. *Last Name*

#### 4. Title

##### Contact Information

This indicates the different ways to get through to the user which include the following:

1. *Phone (Primary)*
2. *Phone (Secondary)*
3. *Email*
4. *Residential Address*

##### Demographic Details

This indicates the personal characteristics of the user which include the following:

1. *Birth Date*
2. *Gender*
3. *Marital Status*
4. *Nationality*

##### Geographic Information

This indicates the location-based details of the user which include the following:

1. *State of Origin*
2. *LGA of Origin*
3. *State of Residence*
4. *LGA of Residence*

##### Response Codes

| S/N | Response Code | Description                                    |  |
|-----|---------------|------------------------------------------------|--|
| 1   | 00            | Request was successful and processed correctly |  |
| 2   | 05            | Validation Failed                              |  |
| 3   | 12            | Invalid Session                                |  |

##### Endpoints (2)

All Tags

##### POST

##### /consent/initiate

Initiate Consent Redirect



This endpoint is called to initiate a consent.

## **Parameters**

### **HEADER PARAMETERS**

#### **Versionrequired**

**string**

Version of the API.

**Example:** "1.0.0"

#### **Request Body**

**application/json**

#### **dataControllerIdrequiredstring**

Unique identifier for the organization controlling access to user data e.g., NIBSS. The value for the test purposes is this - d6378b2e-092f-485a-a1f9-f97b3ca8c3f3

#### **dataProcessorIdrequiredstring**

Unique identifier for the organization requesting access to user data e.g., a bank or Third Party Provider. This is the clientid gotten from the request for credentials email sent when onboarding to the API.

#### **dataOwnerIdrequiredstring**

Identifier for the data subject or customer whose data is being accessed. This can be the users BVN, NIN Sharecode, or any identification number.

#### **requestTyperequiredstring**

A 4-character string that indicates the specific types of data or services being requested. Each character represents a Yes (Y) or No (N) response for a predefined data category as defined above 1. Personal Identification 2. Contact Information 3. Demographics Details 4. Geographic Details For example: - YYYY = All data categories requested - YYYN = All except the last category - NNNY = Only the last category requested **\*\*Note: The value NNNN (i.e., no data requested) is invalid and will be rejected.\*\***

#### **consentTyperequiredstring**

Specifies how consent will be captured from the user e.g. There are two possible values for this **\*\*RedirectLink\*\*** or **\*\*OfflineConsent\*\***

#### **dataSubjectPresentrequiredboolean**

Boolean flag indicating whether the user is present during the consent process. The values are true or false.

#### **authenticationDaterequiredstring**

Date the authentication or consent action occurred, in YYYY-MM-DD format

## Example

### Request

```
{  
  "dataControllerId": "d6378b2e-092f-485a-a1f9-f97b3ca8c3f3",  
  "dataProcessorId": "2e6877e1-1cb1-4d3a-a8ba-ceb78ddfb0ad",  
  "dataOwnerID": "22222222248",  
  "requestType": "YYYY",  
  "consentType": "RedirectLink",  
  "dataSubjectPresent": true,  
  "authenticationDate": "2026-03-24"  
}
```

### Responses

**200**Successful response received.

**application/json**

**responseCode**string

Status code indicating the result of the request

**sessionId**string

Unique identifier for the consent session created.

**data**object

**consentUrl**string

URL to redirect the data subject for completing consent authorization.

**messageTimestamp**string

Timestamp indicating when the response was generated.

**responseMessage**string

Message indicating the outcome of the request.

### Example 1

```
{  
  "responseCode": "00",  
  "sessionId": "202531587636437185411881118879",  
  "data": {
```

```
    "consentUrl":  
    "http://?sessionId=202531587636437185411881118879&token=&redirect=http://:/api/consent/callback"  
  },  
  "messageTimestamp": "2025-07-02T11: 07: 22.0474091Z",  
  "responseMessage": "Session Created"  
}
```

**400**Bad Request

**application/json**

**typestring**

URL reference to the HTTP error specification explaining the error type.

**titlestring**

Error Description

**statusinteger**

HTTP status code for the error

**errorsobject**

**DateOfConsentarray**

Indicates the consent date validation issue

**string**

**traceldstring**

Unique identifier for tracing the request

**Response**

```
{  
  "type": "https://tools.ietf.org/html/rfc9110#section-15.5.1",  
  "title": "One or more validation errors occurred",  
  "status": 400,  
  "errors": {  
    "DateOfConsent": [  
      "Date must not be in the past"  
    ]  
  },  
  "traceld": "00-42f0e486b766fd39071f89a4b3a945b6-ca8da2364868161b-00"
```



```
}
```

## POST

### /callback

Callback



This webhook/callback endpoint is to be developed by the requesting institution. It allows the data controller (e.g., NIBSS) to send consent-related information back to your system via the specified URL.

**Note: The callback endpoint must be served over HTTPS to ensure secure data transmission.**

### Parameters

#### HEADER PARAMETERS

##### Content-Typerequired

**string**

This indicates that the request body format is JSON.

**Example:** "application/json"

##### Acceptrequired

**string**

This informs the server that the client expects a JSON-formatted response.

**Example:** "application/json"

##### Versionrequired

**string**

Version of the API.

**Example:** "1.0.0"

### Request Body

**application/json**

**retrievalTokenrequiredstring**

Unique token used to identify and retrieve the consent session details.

**sessionIdrequiredstring**

Unique identifier for the consent session created.

**dataOwnerIdrequiredstring**

Identifier for the data subject/customer

**consentExpiryTimerequiredstring**

The timestamp indicating when the granted consent will expire.

**tokenIssuedDaterequiredstring**

The date and time the retrieval token was issued.

**requestCategoryrequiredstring**

A 4-character string that indicates the specific types of data or services being requested. Each character represents a Yes (Y) or No (N) response for a predefined data category. For example: - YYYY = All data categories requested - YYYN = All except the last category - NNNY = Only the last category requested \*\*Note: The value NNNN (i.e., no data requested) is invalid and will be rejected.\*\*

**Example**

**Example 1**

```
{
  "retrievalToken": "2024121708-999-883522211",
  "sessionId": "2024121708999883522211",
  "dataOwnerId": "2222222222",
  "consentExpiryTime": "2025-08-17T23: 59: 59Z",
  "tokenIssuedDate": "2025-07-17T09: 00: 00Z",
  "requestCategory": "YYYY"
}
```

**Responses**

**200**Successful response received.

**application/json**

**messagestring**

**Example 1**

```
{
  "message": "request received successfully"
}
```