



# DVN36104 SPR 2026

Data Visualisation and Narratives  
Spring 2026  
Gerard Kelly





36104 · DATA VISUALISATION AND NARRATIVES

# Color and Perception

## How many colours are there?

---

|                                         |               |
|-----------------------------------------|---------------|
| an English speaker's basic colour words | 11            |
| the classic Crayola box                 | 64            |
| the web's named colours                 | 148           |
| codes on a modern screen                | 16,777,216    |
| differences a human can distinguish     | a few million |
| the spectrum                            | a continuum   |

# The web's named colours

---

The 148 CSS colour keywords, inherited from the graphical display protocol X11 (recognised by matplotlib).

aliceblue antiquewhite aqua aquamarine azure beige bisque black blanchedalmond blue blueviolet  
brown burlywood cadetblue chartreuse chocolate coral cornflowerblue cornsilk crimson cyan  
darkblue darkcyan darkgoldenrod darkgray darkgreen darkgrey darkkhaki darkmagenta  
darkolivegreen darkorange darkorchid darkred darksalmon darkseagreen darkslateblue  
darkslategray darkslategrey darkturquoise darkviolet deeppink deepskyblue dimgray dimgrey  
dodgerblue firebrick floralwhite forestgreen fuchsia gainsboro ghostwhite gold goldenrod gray  
green greenyellow grey honeydew hotpink indianred indigo ivory khaki lavender lavenderblush  
lawngreen lemonchiffon lightblue lightcoral lightcyan lightgoldenrodyellow lightgray  
lightgreen lightgrey lightpink lightsalmon lightseagreen lightskyblue lightslategray  
lightslategrey lightsteelblue lightyellow lime limegreen linen magenta maroon mediumaquamarine  
mediumblue mediumorchid mediumpurple mediumseagreen mediumslateblue mediumspringgreen  
mediumturquoise mediumvioletred midnightblue mintcream mistyrose moccasin navajowhite navy  
oldlace olive olivedrab orange orangered orchid palegoldenrod palegreen paleturquoise  
palevioletred papayawhip peachpuff peru pink plum powderblue purple rebeccapurple red  
rosybrown royalblue saddlebrown salmon sandybrown seagreen seashell sienna silver skyblue  
slateblue slategray slategrey snow springgreen steelblue tan teal thistle tomato turquoise  
violet wheat whitesmoke yellow yellowgreen

# English has eleven basic colour terms

---



A basic term is a single word, not derived from an object (unlike “gold” or “turquoise”), and applies to a broad class of things.

Berlin and Kay (1969), Basic Color Terms.

# Priority of Colour Words

| Stage  | Terms present                                                                                                                                                                                                                                                                                                                                                         |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I      |  black  white                                                                                                                                                                                       |
| II     | +  red                                                                                                                                                                                                                                                                               |
| III–IV | +  green and  yellow, in either order                                                                                                                                                              |
| V      | +  blue                                                                                                                                                                                                                                                                              |
| VI     | +  brown                                                                                                                                                                                                                                                                             |
| VII    | +  purple  pink  orange  grey |

Languages differ in how many basic terms they have; acquisition follows this order with few exceptions. Red is the first hue named everywhere.



# The classic 64-colour Crayola box

---



Introduced in 1958 with a built-in sharpener, the 64-count box became Crayola's perennial favourite. Crayon names are commercial labels, mostly based on objects, rather than basic colour terms.


# Visible light is a narrow band

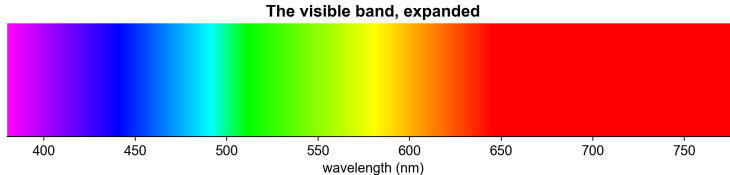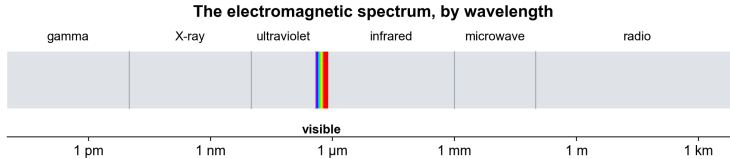

Light is electromagnetic radiation. The visible band runs from about 380 to 780 nanometres, between ultraviolet and infrared.



# Spectral recipes of common lights

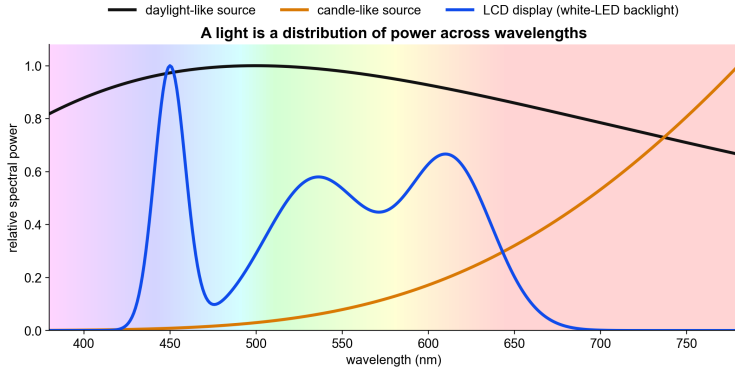

Course calculation. Black-body curves are illustrative; the display curve is modelled on a white-LED LCD.

# A light is a function

---

$$P(\lambda) = \text{power at wavelength } \lambda$$

A spectral power distribution contains one value for every wavelength sampled.

- a narrow peak: approximately monochromatic;
- a broad curve: many wavelengths;
- three peaks: a typical display mixture;
- one colour word: none of the above is specified.

The spectrum is the physical input; appearance comes several steps later.

# Which layer does each statement describe?

---

- “This source has a peak at 470 nm.”
- “This surface reflects more short-wavelength light under this lamp.”
- “This patch appears blue in this surround.”
- “This pixel is encoded as #0068B7 in sRGB.”

Each statement describes one layer. Knowing one layer does not fix the other three.


# Rods and cones

---

|               | <b>Rods</b>       | <b>Cones</b>             |
|---------------|-------------------|--------------------------|
| count         | about 120 million | about 6 million          |
| work in       | dim light         | daylight                 |
| types         | one               | three                    |
| colour signal | none              | three compared responses |
| concentration | periphery         | packed in the fovea      |

At chart-reading light levels the rods are saturated. The rest of this deck is about the cones.

# Three cone classes sample overlapping ranges

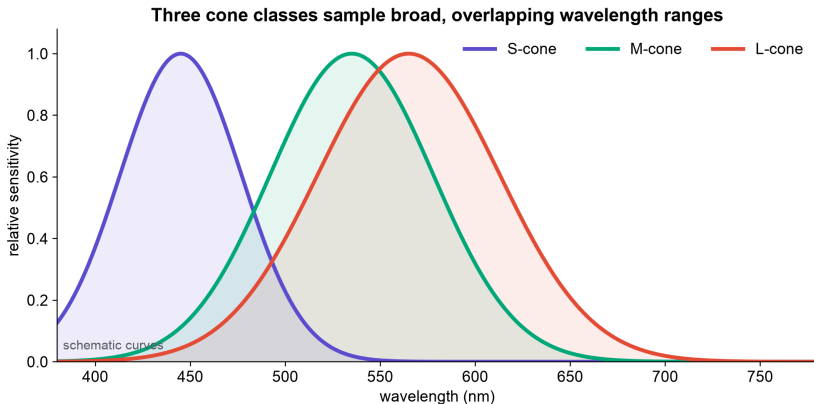

Schematic curves for teaching. S, M, and L mean short-, middle-, and long-wavelength sensitive.

# One cone cannot identify a wavelength

---

$$q_i = \int P(\lambda) s_i(\lambda) d\lambda$$

Multiply the incoming spectrum by one sensitivity curve, then add over wavelength.


This is the principle of univariance.

The same response can be caused by:

- a weak light near peak sensitivity;
- a stronger light farther from the peak;
- many mixtures across the spectrum.

Once absorbed, the photon carries no wavelength label in that cone's output.

# A spectrum is compressed to three responses

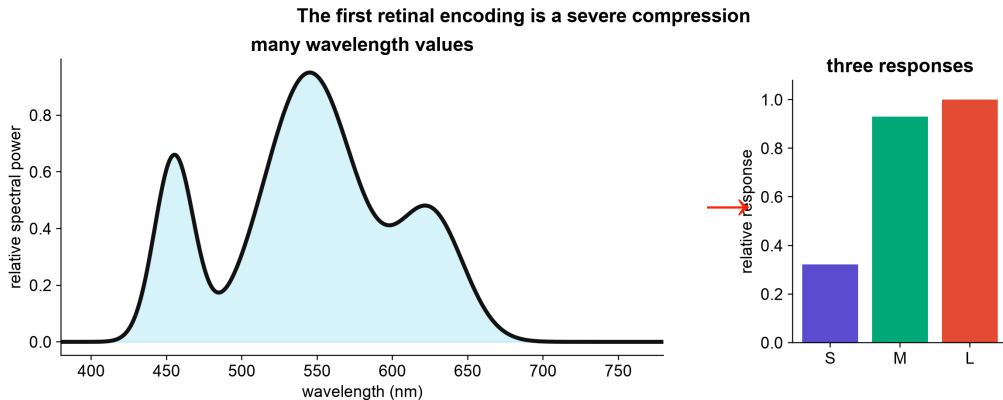

# The bucket analogy

---

## Useful part

- three buckets have different filters;
- each produces only one total;
- the original spectrum cannot be reconstructed from three totals.


## Where it breaks

- cone sensitivities overlap broadly;
- responses adapt and saturate;
- later neurons compare cones;
- context and spatial structure alter appearance.

Three cone classes explain the dimensionality of colour *matching*. They do not, by themselves, explain all colour appearance.



# Different spectra can produce the same match

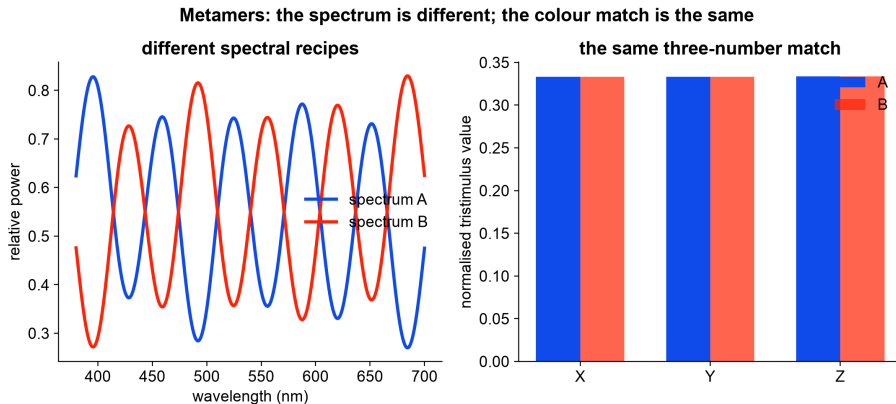

Course construction using the CIE 1931 colour-matching functions.

# The same code can look different

---

The two centre patches contain identical RGB values



Identical centre RGB values do not guarantee identical appearance. The visual system compares each patch with its surround.

# After the cones, signals are compared

---

luminance-like  $L + M$

red–green-like  $L - M$

blue–yellow-like  $S - (L + M)$

These are schematic combinations, far from a complete neural model. They show that the brain does not receive an RGB image from the retina.

Adaptation, local contrast, spatial scale, and viewing sequence all enter before conscious appearance.

# Eight questions about colour, 1704 to 1931



---

| Work               | Object                  | Question                                                                |
|--------------------|-------------------------|-------------------------------------------------------------------------|
| Newton, 1704       | rays and prisms         | How does white light separate and recombine?                            |
| Harris, 1766       | pigment mixtures        | How can pigment mixtures be ordered on one wheel?                       |
| Dalton, 1794       | his own vision          | How can colour blindness be described and explained?                    |
| Goethe, 1810       | appearance              | How do boundaries, shadows, afterimages, and context affect experience? |
| Maxwell, 1850s–60s | matches                 | How can three primaries reproduce a match?                              |
| Hering, 1878       | structure of appearance | Which hues look unmixed, and which blends never appear?                 |
| Munsell, 1905      | surface samples         | How can hue, value, and chroma be ordered for practice?                 |
| CIE, 1931          | standard observer       | How can colour matches be reported reproducibly?                        |

The 1931 system settles the matching question only. The earlier questions about appearance and practice stay open.

# Newton, Opticks (1704)

---

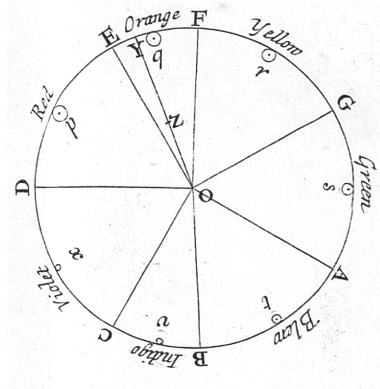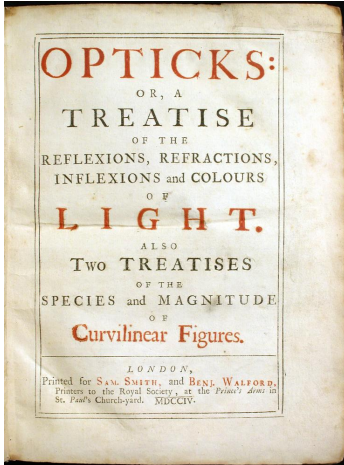

Newton's colour circle, Opticks, Book I, Part II. Public domain.

# Newton and Goethe

---

## Newton

- controlled the geometry;
- separated light by refraction;
- showed white light can be compound;
- described the stimulus.


## Goethe

- studied coloured shadows;
- recorded afterimages and boundaries;
- foregrounded the observer;
- described appearance in context.

Goethe's physical theory was wrong; Newton's optics stands. His records of shadows and afterimages still show that appearance depends on the observer and the surround.

# Harris, 1766

---

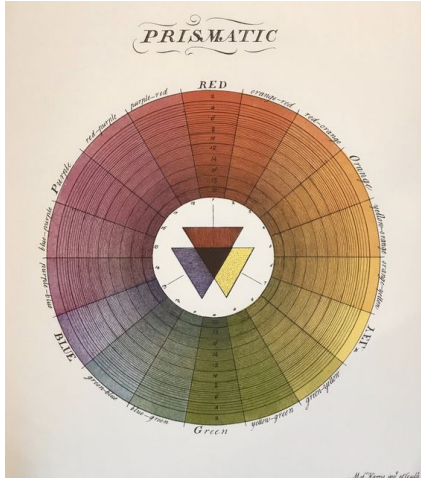


Moses Harris, an engraver and entomologist, published the first colour-printed colour wheel in *The Natural System of Colours*. Red, yellow and blue sit at the centre as the “grand or principal” colours, with mixtures grading around the circle.

The school story that red, yellow and blue are the three primary colours descends from this wheel and the painters’ practice behind it.

M. Harris, *The Natural System of Colours* (c. 1766). Public domain.

# Goethe, Farbenkreis (1809)

---

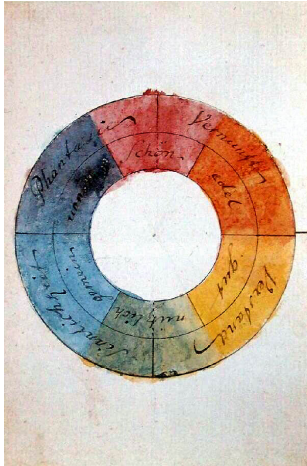


Goethe's watercolour wheel assigns qualities to colour sectors. As physics it failed; as a record of how colours are experienced and opposed in pairs, it anticipated opponent descriptions of appearance.

J. W. von Goethe, 1809 watercolour. Public domain, via Wikimedia Commons.



# Dalton, 1794

---

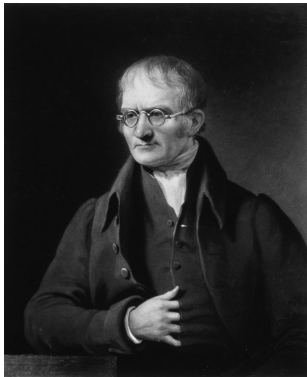

Mezzotint by C. Turner, 1834. Public domain.

Dalton gave the first scientific self-report of colour blindness: to him, “that part of the image which others call red appears to me little more than a shade”. He blamed a blue tint in his eye’s fluid.

He was wrong about the cause. DNA from his preserved eye (1995) showed he lacked the M-cone pigment: one of the three integrators from Part II was missing, so his matches needed only two primaries.

# Colour vision deficiencies

---


| Type         | Affected pigment      | Rate                          |
|--------------|-----------------------|-------------------------------|
| deutan       | M shifted or missing  | about 6% of men               |
| protan       | L shifted or missing  | about 2% of men               |
| tritan       | S affected            | about 1 in 10,000, both sexes |
| monochromacy | two or three pigments | very rare                     |

The red–green forms are X-linked, so they concentrate in men: about 8% of men and 0.5% of women. In a class of two hundred students, expect eight or nine.

# The colour bars, simulated

---

The colour bars under three dichromatic simulations

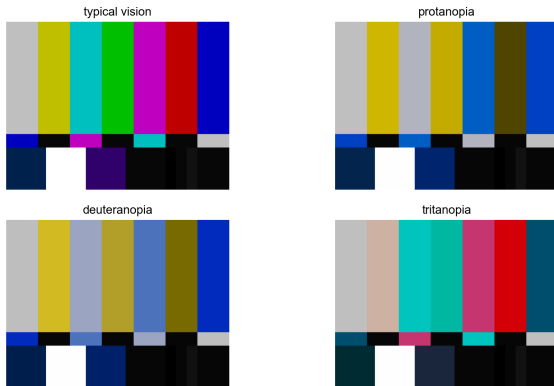

Under deuteranopia the green, red and magenta bars converge. A chart has to stay readable in all four panels.

# Hering, 1878

---



Photograph, public domain, via Wikimedia

Commons.

Hering organised appearance around three opponent pairs: black–white, red–green, yellow–blue. The four chromatic poles are the **unique hues**: a red that looks neither yellowish nor bluish, and likewise green, yellow and blue.

The test is in experience itself: reddish-yellow and greenish-blue exist, and reddish-green and yellowish-blue never appear. Hurvich and Jameson measured the pairs by hue cancellation in 1957.

The opponent cone combinations shown earlier are related but do not line up exactly with the unique hues; their neural basis is still argued. Hering's six poles are also Berlin and Kay's first six basic colour terms.

## The unique-hues argument, in short

---

1. Some hues look like mixtures: orange looks like red plus yellow.
2. Four do not: red, green, yellow and blue look unmixed.
3. Some blends never appear: nothing ever looks reddish-green or yellowish-blue.
4. So appearance runs on two hue axes, red–green and yellow–blue, with an unmixed pole at each end.

\_\_\_\_\_



Soil science and industrial standards still use the system, and every later “perceptually uniform”

# Colour matching came before direct cone measurement

---


An observer adjusted three primary lights until one half of a field matched a test light in the other half.

Some wavelengths could not be matched using positive amounts of the chosen real primaries. One primary was moved to the test side:

$$\text{test} + rR = gG + bB \quad \Longleftrightarrow \quad \text{test} = (-r)R + gG + bB.$$

The negative value records the experimental operation. It is not “negative light.”


# The measured curves contain negative red

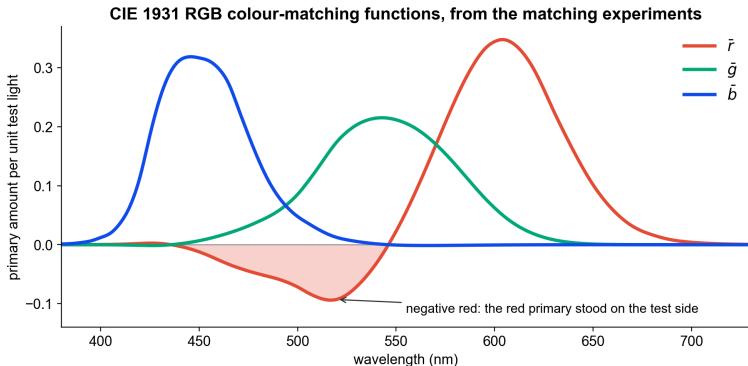

Each curve records how much of one primary matched a unit of single-wavelength test light. In the negative region the red primary stood on the test side of the field.



# CIE XYZ is a mathematical coordinate system

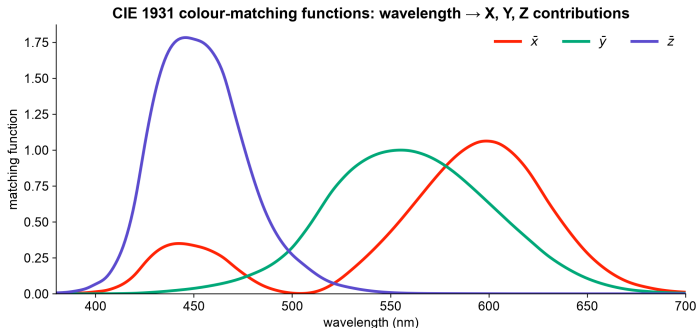

XYZ is a linear transform of the curves on the previous slide, chosen so that no value is negative. X, Y, and Z are not physical lamps and not the three cone signals; Y was chosen to carry standard photopic luminance. The second bump of  $\bar{x}$  in the violet is real: violet also excites the red-sensitive mechanism, which is why violet looks reddish.

# From a spectrum to three CIE values

---

$$X = \int P(\lambda) \bar{x}(\lambda) d\lambda$$

$$Y = \int P(\lambda) \bar{y}(\lambda) d\lambda$$

$$Z = \int P(\lambda) \bar{z}(\lambda) d\lambda$$

Change the spectrum and recalculate. Any spectra with the same XYZ values are a standard-observer colour match under the specified conditions.

# Chromaticity removes one scale factor

---

$$x = \frac{X}{X + Y + Z}, \quad y = \frac{Y}{X + Y + Z}, \quad z = 1 - x - y$$

- Multiplying X, Y, and Z by the same amount leaves x and y unchanged.
- Two fractions are enough because the three proportions sum to one.
- xy omits overall tristimulus scale. It is not a complete colour appearance.

# Build the spectral locus one wavelength at a time

---

For each row in the official CIE table:


1. take the wavelength's  $\bar{x}$ ,  $\bar{y}$ , and  $\bar{z}$  values;
2. divide by their sum;
3. plot  $(x, y)$ ;
4. repeat for the next wavelength.

The curved path is the **spectral locus**: the route taken by monochromatic lights through the xy diagram.

# Adding two lights traces a straight line

---

Add two lights: chromaticity follows the line between them

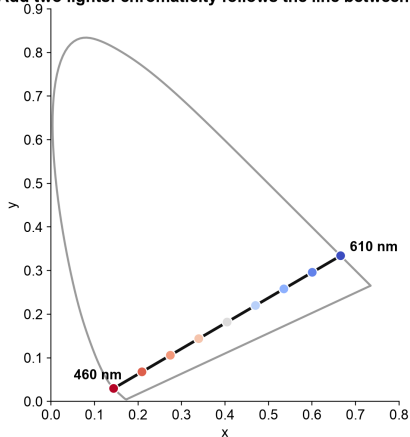


# Why real-light mixtures lie inside

---

- spectra add;
- XYZ values therefore add;
- after normalisation, a two-light mixture lies between the two chromaticities;
- a spectrum with many wavelengths is a non-negative mixture of many points.

# Nonspectral colours

---

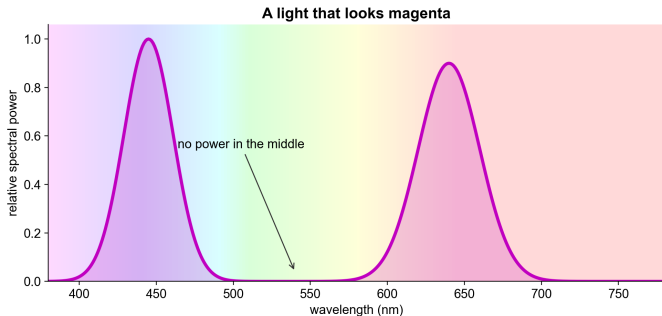


The straight edge joining the two ends of the horseshoe is the **line of purples**; no single wavelength sits on it. A light that looks magenta holds power near both ends of the spectrum, because its cone signature (S and L strong, M weak) is one no single wavelength can produce. Blue names a band of the rainbow; magenta names only a mixture.


# Additive and subtractive mixing

---

Add light: channel powers add



Stack ideal filters: transmissions multiply



Additive mixing combines emitted spectral power. Ideal subtractive mixing multiplies transmissions; real pigments also scatter and interact.



# RGB and CMYK

---

|                | RGB                          | CMYK                           |
|----------------|------------------------------|--------------------------------|
| where          | screens                      | ink on paper                   |
| mixing         | additive: channels add light | subtractive: inks absorb light |
| primaries      | red, green, blue             | cyan, magenta, yellow, black   |
| all zero       | black (screen off)           | white (bare paper)             |
| all full       | white                        | muddy near-black               |
| you meet it as | #RRGGBB in CSS and charts    | print exports and PDF proofs   |

The K in CMYK is a separate black ink, the printers' "key" plate. Full cyan, magenta and yellow together make a muddy brown and soak the paper, so text and shadows use black ink instead. Screens and printers also cover different gamuts: some screen colours have no printable match, worth checking before a chart goes to print.

# Red, yellow, blue

---

- The school primaries are the painters' tradition, running from Le Blon's three-plate printing (1725) through Harris's wheel (1766).
- Printing replaced them with cyan, magenta and yellow. Each ink absorbs one band: cyan absorbs long wavelengths, magenta middle, yellow short. Historical red and blue pigments behaved like impure magenta and impure cyan, which is why the triad worked at all.
- The tell is purple: true red plus true blue passes almost no light and mixes mud. Painters mixed purples from crimson, a magenta-leaning red. Magenta plus cyan mixes purple cleanly.
- Red, yellow and blue also look unmixed (orange looks like a mixture; red does not). Green looks unmixed too, but paint can mix it, so it lost its place in the triad.
- Light mixing uses red, green and blue, matched to where the cones separate best.
- No three colours are "the" primaries: the number three comes from the cones, the choice of three from the medium.

# Metamerism is what makes displays possible

---

A screen does not reconstruct the original spectral recipe. It emits a new spectrum from three primaries that is intended to produce the required match.

## What this makes possible

- colour photography;
- television and computer displays;
- compact three-channel specifications.

## Where a match can fail

- a different observer;
- a different illuminant;
- fluorescence;
- changed adaptation or field size.

# A white LED is a blue LED plus a phosphor

---

1. The backlight is a **blue LED** emitting a narrow spike near 450 nm.
2. A **phosphor** (typically YAG:Ce) absorbs part of the blue and re-emits it at lower energies: a broad hump across green, yellow and red.
3. Spike plus hump reads as white. The LCD's red and green filters carve their two humps out of the phosphor light; the blue filter passes the spike.

The blue spike stays tallest in the power spectrum because it is the only light generated directly; everything else is converted from it, with losses.

# The blue LED came thirty years late

---

- An LED emits photons with the energy of its semiconductor's band gap. Red photons need about 1.9 eV; blue photons need about 2.8 eV.
- Red LEDs existed by 1962 (gallium arsenide phosphide). Blue required a wide-gap crystal, in practice gallium nitride.
- Gallium nitride had two standing problems: no matching substrate to grow clean crystals on, and no working p-type doping.
- Akasaki, Amano and Nakamura solved both around 1986–1992 (a buffer layer for growth; activated magnesium doping). Bright blue LEDs followed in 1993, white LEDs in 1996.
- Nobel Prize in Physics, 2014. Every white LED screen and lamp descends from that blue chip.

# What a PC could show


---

## What a PC could show

1981 · CGA 320×200  
4 at once, from 16



1984 · EGA 640×350  
16 at once, from 64




1987 · VGA 640×480  
16 at once, from 262,144



1987 · VGA 320×200  
256 at once, from 262,144



since ~1995 · 24-bit true colour  
16,777,216 at once




# The default 16-colour VGA palette

---

|                                              |                                                   |                                                |                                                 |
|----------------------------------------------|---------------------------------------------------|------------------------------------------------|-------------------------------------------------|
| <b>Black</b><br>(0, 0, 0)<br>#000000         | <b>Blue</b><br>(0, 0, 170)<br>#0000AA             | <b>Green</b><br>(0, 170, 0)<br>#00AA00         | <b>Cyan</b><br>(0, 170, 170)<br>#00AAAA         |
| <b>Red</b><br>(170, 0, 0)<br>#AA0000         | <b>Magenta</b><br>(170, 0, 170)<br>#AA00AA        | <b>Brown</b><br>(170, 85, 0)<br>#AA5500        | <b>Light grey</b><br>(170, 170, 170)<br>#AAAAAA |
| <b>Dark grey</b><br>(85, 85, 85)<br>#555555  | <b>Light blue</b><br>(85, 85, 255)<br>#5555FF     | <b>Light green</b><br>(85, 255, 85)<br>#55FF55 | <b>Light cyan</b><br>(85, 255, 255)<br>#55FFFF  |
| <b>Light red</b><br>(255, 85, 85)<br>#FF5555 | <b>Light magenta</b><br>(255, 85, 255)<br>#FF55FF | <b>Yellow</b><br>(255, 255, 85)<br>#FFFF55     | <b>White</b><br>(255, 255, 255)<br>#FFFFFF      |

\_\_\_\_\_



48




# Bits per pixel

---

| Bits per pixel | Colours          | Era                               |
|----------------|------------------|-----------------------------------|
| 1              | 2                | terminals, early Macintosh        |
| 2              | 4                | CGA graphics, 1981                |
| 4              | 16               | EGA and VGA high-resolution modes |
| 8, indexed     | 256              | VGA 320×200 mode, 1987            |
| 15 or 16       | 32,768 or 65,536 | high colour, early 1990s          |
| 24             | 16,777,216       | true colour, since the mid-1990s  |

24 bits is the #RRGGBB code: two hexadecimal digits per channel. Chart libraries, CSS and image formats all speak it.

# Three physical primaries make a triangle

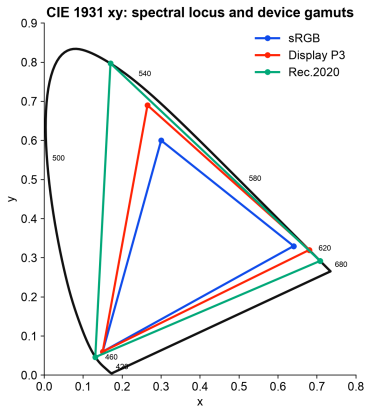

CIE 1931 2° data; primary coordinates from sRGB/Rec.709, Display P3, and BT.2020 specifications.

# Colour bars

---



The broadcast test pattern is the gamut triangle enumerated: the three primaries alone (green, red, blue), their pairwise sums (yellow, cyan, magenta), and all three together (white). Every other colour the screen can produce is a mixture of these, inside the triangle.

# Five cautions about the xy diagram

---

- The outline represents standard-observer chromaticity coordinates.
- The page is itself shown through your display's primaries and calibration.
- Points outside the display gamut can be plotted as locations but not reproduced faithfully.
- Different luminances share the same xy point.
- Equal distances in xy are not equal perceived differences.

# Hue, lightness, and chroma do different jobs

---

| Dimension | Useful for                       | Do not assume                   |
|-----------|----------------------------------|---------------------------------|
| hue       | category, identity, highlighting | a natural numeric order         |
| lightness | ordered magnitude if monotonous  | equal code steps look equal     |
| chroma    | emphasis, status, coarse order   | precise quantitative comparison |

Let position or length carry values that must be compared precisely. Use colour to organise, order coarsely, or direct attention.

# Test a palette in its context

---

- test colours on the actual background;
- test them at the actual mark and text sizes;
- inspect common colour-vision deficiencies;
- make lightness monotonic in sequential scales;
- reserve diverging palettes for a meaningful midpoint;
- add labels, position, shape, or line style when the distinction matters.


What matters is how the marks look next to each other on the actual page.



# Streamlit

# How a Streamlit app runs

---



Whenever a widget changes, Streamlit reruns the script from top to bottom with the new value.



# A slider replaces a constant

---

## Notebook or script

```
wavelength = 550  
print(wavelength)
```

```
python -m streamlit run hello_colour.py
```

## Streamlit

```
import streamlit as st  
wavelength = st.slider(  
    "Wavelength (nm)", 380, 700, 550  
)  
st.write(wavelength)
```

# The lab builds three linked views

---

1. **Spectrum**: change peak wavelength and spectral width.
2. **Eye**: integrate the spectrum against three schematic cone curves.
3. **Chromaticity**: use the official CIE table to locate the light in xy.

Final extension: add an intensity slider. Cone-response magnitudes should change; chromaticity should remain almost fixed.

# The app's simplifications

---

- Cone curves in the app are schematic.
- CIE matching functions are standard-observer data, not cone sensitivities.
- A wavelength rendered on screen is an RGB approximation, not monochromatic light.
- xy omits luminance and viewing context.
- The app is an explanatory model, not a calibrated colour-management system.

# Exit ticket

---

Complete the chain for one colour in a chart:

*The display emits \_\_\_\_\_. The eye reduces this to \_\_\_\_\_. The viewer perceives it in relation to \_\_\_\_\_. The design uses that appearance to encode \_\_\_\_\_.*

Name one thing lost at each translation.

# Sources and data

---

- CIE (2019), *CIE 1931 colour-matching functions, 2 degree observer*, DOI: 10.25039/CIE.DS.xvudnb9b.
- Kalloniatis, M. and Luu, C., “The Perception of Color,” *Webvision*, NCBI Bookshelf.
- Newton, I. (1704), *Opticks*; Goethe, J. W. von (1810), *Theory of Colours*.
- Munsell, A. H. (1905), *A Color Notation*. Berlin, B. and Kay, P. (1969), *Basic Color Terms*.
- W3C, *CSS Color Module Level 4*; IEC 61966-2-1 (sRGB); ITU-R BT.709 and BT.2020.
- Hering, E. (1878), *Zur Lehre vom Lichtsinne*; Hurvich, L. and Jameson, D. (1957), *An opponent-process theory of color vision*.
- Machado, Oliveira and Fernandes (2009), *A physiologically-based model for simulation of color vision deficiency*, IEEE TVCG.
- Streamlit, “Basic concepts” and API documentation.

All plotted figures are course calculations. Official CIE data are supplied with their metadata under CC BY-SA 4.0.