Gerard Pons Alfonso 30/03/2026
Llenguatge De Marques Practica 5.3

4.1. De quants pagaments tenim informació?
`count(//check)`

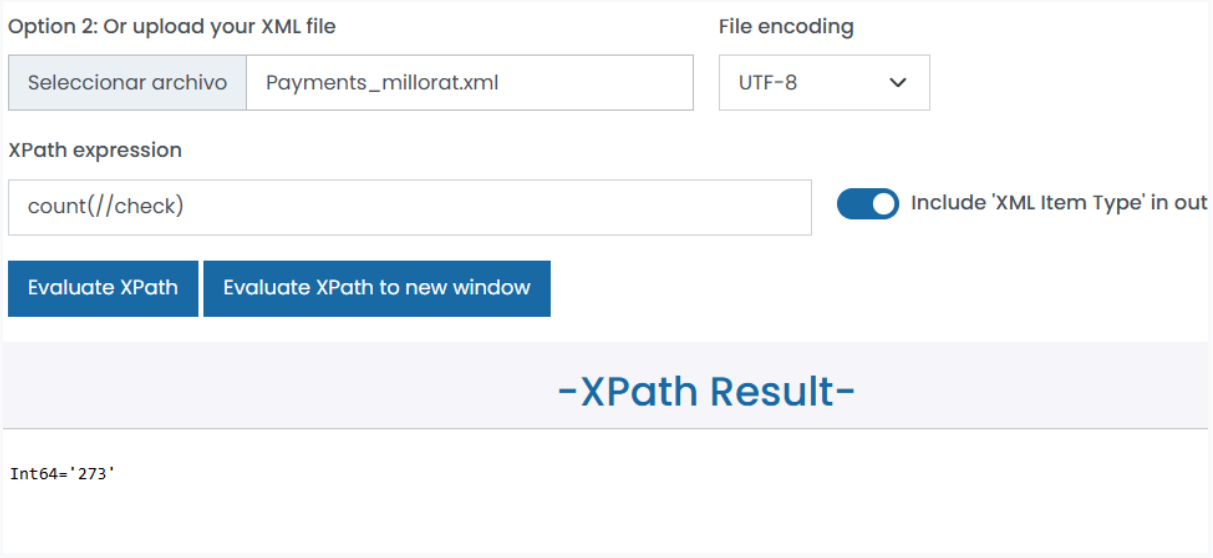

4.2. Quins són els números de xec associats al client amb customerNumber="103"?
//check[customer/@customerNumber="103"]/@number

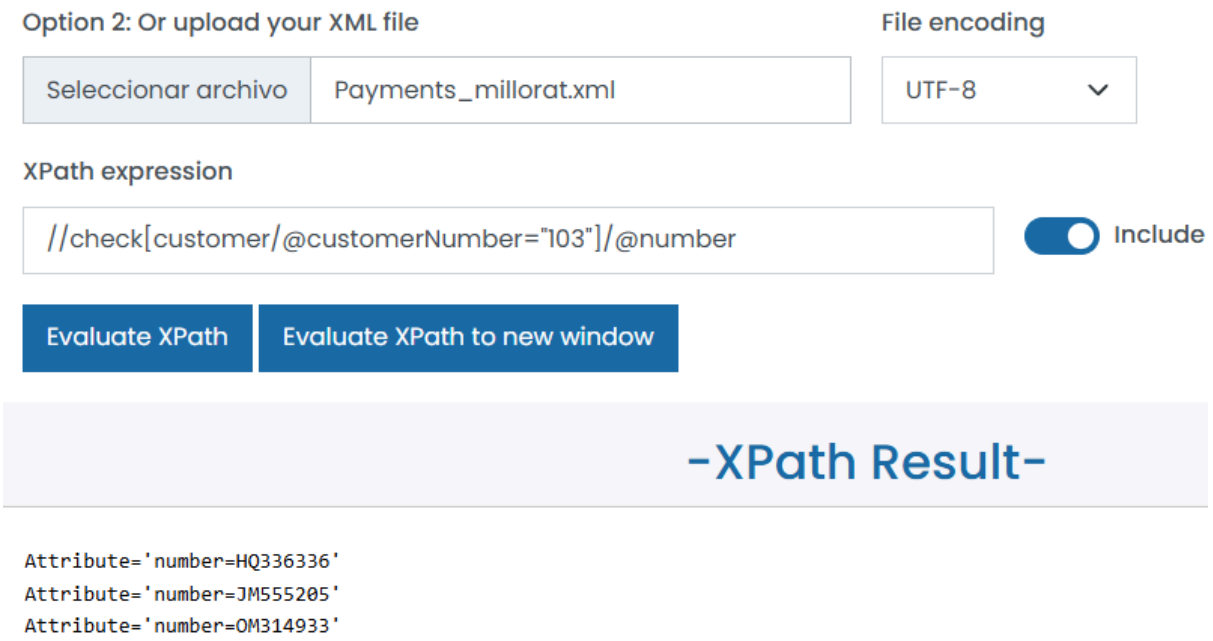

4.3. Quina és la ciutat dels clients amb una quantitat (amount) inferior a 1500 i límit de crèdit superior a 1500 ?
//check[amount < 1500 and customer/creditLimit > 1500]/customer/adress/city/text()

Option 2: Or upload your XML file

Seleccionar archivo | Payments_millorat.xml

File encoding: UTF-8

XPath expression

//check[amount < 1500 and customer/creditLimit > 1500]/customer/adress/

Include

Evaluate XPath | Evaluate XPath to new window

-XPath Result-

```
Text='Stavern'
Text='Minato-ku'
```

4.4. Quin és el balanç disponible (amount) dels xecs dels clients que viuen a "Nantes"?
//check[customer/adress/city="Nantes"]/amount/text()

Option 2: Or upload your XML file

Seleccionar archivo | Payments_millorat.xml

File encoding: UTF-8

XPath expression

//check[customer/adress/city="Nantes"]/amount/text()

Include 'XML Iten

Evaluate XPath | Evaluate XPath to new window

-XPath Result-

```
Text='6066.78'
Text='14571.44'
Text='1676.14'
Text='19501.82'
Text='47924.19'
Text='49523.67'
```

4.5. Quina són les dates dels xecs associats als clients que viuen a "Japan" i tenen un límit de crèdit superior a 1000?
//check[customer/adress/city/@country="Japan" and customer/creditLimit > 1000]/date/text()

Option 2: Or upload your XML file

Seleccionar archivo | Payments_millorat.xml

File encoding

UTF-8

XPath expression

//check[customer/adress/city/@country="Japan" and customer/creditLimi

Inclu

Evaluate XPath | Evaluate XPath to new window

-XPath Result-

```
Text='2004-04-17'
Text='2004-01-19'
Text='2005-02-14'
Text='2004-06-21'
Text='2005-05-18'
Text='2004-11-29'
```

4.6. Quin és el pagament (amount) més alt realitzat pels clients amb salesRepEmployeeNumber="1370"?
max(//check[customer/salesRepEmployeeNumber="1370"]/amount)

Option 2: Or upload your XML file

Seleccionar archivo | Payments_millorat.xml

File encoding

UTF-8

XPath expression

max(//check[customer/salesRepEmployeeNumber="1370"]/amount)

Inc

Evaluate XPath | Evaluate XPath to new window

-XPath Result-

```
Double='120166.58'
```

4.7. Quin és l'import mitjà (amount) dels pagaments realitzats amb data anterior al 1 de gener de 2004 pels clients de la branca amb salesRepEmployeeNumber="1370"?
//check[customer/salesRepEmployeeNumber="1370" and date < "2004-01-01"]/amount/text()

Option 2: Or upload your XML file

Seleccionar archivo | Ningún archivo seleccionado

File encoding

UTF-8

XPath expression

//check[customer/salesRepEmployeeNumber="1370" and date < "2004-01-0

Include 'XI

Evaluate XPath | Evaluate XPath to new window

-XPath Result-

```
Text='14571.44'
Text='36251.03'
Text='49539.37'
Text='40206.20'
Text='63843.55'
Text='42783.81'
Text='33818.34'
Text='14232.70'
```

4.8. Quin és el nom del client (customerName) associat al xec amb l'import (amount) més baix?
//check[amount = min(//check/amount)]/customer/customerName/text()

Option 2: Or upload your XML file

Seleccionar archivo | Payments_millorat.xml

File encoding

UTF-8

XPath expression

//check[amount = min(//check/amount)]/customer/customerName/text(

Incl

Evaluate XPath | Evaluate XPath to new window

-XPath Result-

```
Text='Tokyo Collectables, Ltd'
```

4.9. Quin és el client (customerName) associat a l'últim xec processat el 2004?
//check[date='2004-10-19']/customer/customerName/text()

Option 2: Or upload your XML file

File encoding

Seleccionar archivo | Payments_millorat.xml

UTF-8

XPath expression

//check[date='2004-10-19']/customer/customerName/text()

Inc

Evaluate XPath | Evaluate XPath to new window

-XPath Result-

```
Text='Atelier graphique'
```

4.10. Retorna una cadena de caràcters amb la direcció completa del client (customerName, addressLine1, city, country) dels xecs associats a clients amb un límit de crèdit superior a 1000.
(//check[customer/creditLimit > 1000]/concat("Client: ", customer/customerName, ", Adreça: ", customer/adress/addressLine1, ", ", customer/adress/city, ", ", customer/adress/city/@country))[1]

Option 2: Or upload your XML file

File encoding

Seleccionar archivo | Payments_millorat.xml

UTF-8

XPath expression

(//check[customer/creditLimit > 1000]/concat("Client: ", customer/customer

Incl

Evaluate XPath | Evaluate XPath to new window

-XPath Result-

```
String='Client: Atelier graphique, Adreça: 54, rue Royale, Nantes, France'
```