


[ANDROID](#) [JAVA](#) [JVM LANGUAGES](#) [SOFTWARE DEVELOPMENT](#) [AGILE](#) [CAREER](#) [COMMUNICATIONS](#) [DEVOPS](#) [META JCG](#)
[Home](#) » [Java](#) » [Core Java](#) » Proxy Design Pattern Example

ABOUT ROHIT JOSHI



Rohit Joshi is a Senior Software Engineer from India. He is a Sun Certified Java Programmer and has worked on projects related to different domains. His expertise is in Core Java and J2EE technologies, but he also has good experience with front-end technologies like Javascript, JQuery, HTML5, and JQWidgets.



Proxy Design Pattern Example

Posted by: Rohit Joshi | In Core Java | September 30th, 2015 | 2 Comments | 189 Views | (0 rating, 0 votes)

This article is part of our Academy Course titled Java Design Patterns.

In this course you will delve into a vast number of Design Patterns and see how those are implemented and utilized in Java. You will understand the reasons why patterns are so important and learn when and how to apply each one of them. Check it out here!

NEWSLETTER

Insiders are already enjoying weekly up-to-date complimentary whitepapers!

Join them now to gain **EXCLUSIVE ACCESS** to the latest news in the Java world as well as insights about Android, Scala, and other related technologies.


Email address:

JOIN US



With **1,240,600** unique visitors and **500** authors placed among related sites and constantly being looked out for, we encourage you to join us. So if you have unique and interesting content then you can check out our JCG partners program. You can be a **guest writer** for Java Code Geeks and showcase your writing skills!

Want to be a Java Master ?



Subscribe to our newsletter and download the Java **Design Patterns** [right now!](#)

In order to help you master the Java programming language, we have compiled a kick-ass guide with all the must-know Design Patterns for Java! Besides studying them online you may download the eBook in PDF format!

Email address:

Table Of Contents

1. Introduction
2. What is the Proxy Pattern
3. Remote Proxy
4. Virtual Proxy
5. Protection Proxy
6. When to use the Proxy Pattern
7. Other Proxies
8. Proxy Pattern in JDK
9. Download the Source Code

1. Introduction

In this lesson we will discuss about a Structural Pattern, the Proxy Pattern. The Proxy Pattern provides a surrogate or placeholder for another object to control access to it.

The Proxy Pattern comes up with many different variations. Some of the important variations are, Remote Proxy, Virtual Proxy, and Protection Proxy. In this lesson, we will know more about these variations and we will implement each of them in Java. But before we do that, let's get to know more about the Proxy Pattern in general.

2. What is the Proxy Pattern

The Proxy Pattern is used to create a representative object that controls access to another object, which may be remote, expensive to create or in need of being secured.

One reason for controlling access to an object is to defer the full cost of its creation and initialization until we actually need to use it. Another reason could be to act as a local representative for an object that lives in a different JVM. The Proxy can be very useful in controlling the access to the original object, especially when objects should have different access rights.

In the Proxy Pattern, a client does not directly talk to the original object, it delegates its calls to the proxy object which calls the methods of the original object. The important point is that the client does not know about the proxy, the proxy acts as an original object for the client. But there are many variations to this approach which we will see soon.

Let us see the structure of the Proxy Pattern and its important participants.

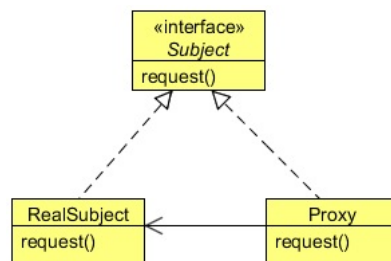


Figure 1

1. Proxy:

- 1a. Maintains a reference that lets the proxy access the real subject. Proxy may refer to a Subject if the RealSubject and Subject interfaces are the same.
- 1b. Provides an interface identical to Subject's so that a proxy can be substituted for the real subject.
- 1c. Controls access to the real subject and may be responsible for creating and deleting it.

2. Subject:

- 2a. Defines the common interface for RealSubject and Proxy so that a Proxy can be used anywhere a RealSubject is expected.

3. RealSubject:

- 3a. Defines the real object that the proxy represents.

There are three main variations to the Proxy Pattern:

1. A remote proxy provides a local representative for an object in a different address space.
2. A virtual proxy creates expensive objects on demand.
3. A protection proxy controls access to the original object. Protection proxies are useful when objects should have different access rights.

We will discuss these proxies one by one in next sections.

3. Remote Proxy

There is a Pizza Company, which has its outlets at various locations. The owner of the company gets a daily report by the staff members of the company from various outlets. The current application supported by the Pizza Company is a desktop application, not a web application. So, the owner has to ask his employees to generate the report and send it to him. But now the owner wants to generate and check the report by his own, so that he can generate it whenever he wants without anyone's help. The owner wants you to develop an application for him.

The problem here is that all applications are running at their respective JVMs and the Report Checker application (which we will design soon) should run in the owner's local system. The object required to generate the report does not exist in the owner's system JVM and you cannot directly call on the remote object.

Remote Proxy is used to solve this problem. We know that the report is generated by the users, so there is an object which is required to generate the report. All we need is to contact that object which resides in a remote location in order to get the result that we want. The Remote Proxy acts as a local representative of a remote object. A remote object is an object that lives in the heap of different JVM. You call methods to the local object which forward that calls on to the remote object.

Your client object acts like its making remote method calls. But it is calling methods on a heap-local proxy object that handles all the low-level details of network communication.

Java supports the communication between the two objects residing at two different locations (or two different JVMs) using RMI. RMI is Remote Method Invocation which is used to build the client and service helper objects, right down to creating a client helper object with the same methods as the remote service. Using RMI you don't have to write any of the networking or I/O code yourself. With your client, you call remote methods just like normal method calls on objects running in the client's local JVM.

RMI also provides the running infrastructure to make it all work, including a lookup service that the client can use to find and access the remote objects. There is one difference between RMI calls and local method calls. The client helper send the method call across the network, so there is networking and I/O which involved in the RMI calls.

Now let's take a look at the code. We have an interface

```
ReportGenerator
```

and its concrete implementation

```
ReportGeneratorImpl
```

already running at JVMs of different locations. First to create a remote service we need to change the codes.

The

```
ReportGenerator
```

interface will now looks like this:

```
01 package com.javacodegeeks.patterns.proxypattern.remoteproxy;
02
03 import java.rmi.Remote;
04 import java.rmi.RemoteException;
05
06 public interface ReportGenerator extends Remote{
07
08     public String generateDailyReport() throws RemoteException;
09
10 }
```

This is a remote interface which defines the methods that a client can call remotely. It's what the client will use as the class type for your service. Both the Stub and actual service will implement this. The method in the interface returns a

```
String
```

object. You can return any object from the method; this object is going to be shipped over the wire from the server back to the client, so it must be

```
Serializable
```

. Please note that all the methods in this interface should throw

```
RemoteException
```

```
01 package com.javacodegeeks.patterns.proxypattern.remoteproxy;
02
03 import java.rmi.Naming;
04 import java.rmi.RemoteException;
05 import java.rmi.server.UnicastRemoteObject;
06 import java.util.Date;
07
08 public class ReportGeneratorImpl extends UnicastRemoteObject implements ReportGenerator{
09
10     private static final long serialVersionUID = 3107413009881629428L;
11
12     protected ReportGeneratorImpl() throws RemoteException {
13     }
14
15     @Override
16     public String generateDailyReport() throws RemoteException {
17         StringBuilder sb = new StringBuilder();
18         sb.append("*****Location X Daily Report*****");
19         sb.append("\n Location ID: 012");
20         sb.append("\n Today's Date: "+new Date());
21         sb.append("\n Total Pizza's Sell: 112");
22         sb.append("\n Total Price: $2534");
23         sb.append("\n Net Profit: $1985");
24         sb.append("\n *****");
25
26         return sb.toString();
27     }
28
29     public static void main(String[] args) {
30
31         try {
32             ReportGenerator reportGenerator = new ReportGeneratorImpl();
33             Naming.rebind("PizzaCoRemoteGenerator", reportGenerator);
34         } catch (Exception e) {
35             e.printStackTrace();
36         }
37     }
38
39 }
40 }
```

The above class is the remote implementation which does the real work. It's the object that the client wants to call methods on. The class extends

```
UnicastRemoteObject
```

, in order to work as a remote service object, your object needs some functionality related to being remote. The simplest way is to extend

```
UnicastRemoteObject
```

from the

```
java.rmi.server
```

package and let that class do the work for you.

The

```
UnicastRemoteObject
```

class constructor throws a

```
RemoteException
```

, so you need to write a no-arg constructor that declares a

```
RemoteException
```

To make the remote service available to the clients you need to register the service with the RMI registry. You do this by instantiating it and putting it into the RMI registry. When you register the implementation object, the RMI system actually puts the stub in the registry, since that's what a client needs. The

```
Naming.rebind
```

method is used to register the object. It has two parameters, first a string to name the service and the other parameter takes object which will be fetched by the clients to use the service.

Now, to create the stub you need to run **rmic** on the remote implementation class. The **rmic** tool comes with the Java software development kit, takes a service implementation and creates a new stub. You should open your command prompt (cmd) and run **rmic** from the directory where your remote implementation is located.

The next step is to run the **rmiregistry**, bring up a terminal and start the registry, just type the command **rmiregistry**. But be sure you start it from a directory that has access to your classes.

The final step is to start the service that is, run your concrete implementation of remote class, in this case the class is

```
ReportGeneratorImpl
```

So far, we have created and run a service. Now, let's see how the client will use it. The report application for the owner of the pizza company will use this service in order to generate and check the report. We need to provide the interface

```
ReportGenerator
```

and the stub to the clients which will use the service. You can simply hand-deliver the stub and any other classes or interfaces required in the service.

```
01 package com.javacodegeeks.patterns.proxypattern.remoteproxy;
02
03 import java.rmi.Naming;
04
05 public class ReportGeneratorClient {
06
07     public static void main(String[] args) {
08         new ReportGeneratorClient().generateReport();
09     }
10
11     public void generateReport() {
12         try {
13             ReportGenerator reportGenerator =
14 (ReportGenerator) Naming.lookup("rmi://127.0.0.1/PizzaCoRemoteGenerator");
15             System.out.println(reportGenerator.generateDailyReport());
16         } catch (Exception e) {
17             e.printStackTrace();
18         }
19     }
20 }
```

The above program will have as a result the following output:

```
1 *****Location X Daily Report*****
2 Location ID: 012
3 Today's Date: Sun Sep 14 00:11:23 IST 2014
4 Total Pizza Sell: 112
5 Total Sale: $2534
6 Net Profit: $1985
7 *****
```

The above class does a naming lookup and retrieves the object which is used to generate the daily report. You need to provide the IP of the hostname and the name used to bind the service. The rest of it just looks like a regular old method call.

In conclusion, the Remote Proxy acts as a local representative for an object that lives in a different JVM. A method call on the proxy results in the call being transferred over the wire, invoked remotely, and the result being returned back to the proxy and then to the client.

4. Virtual Proxy

The Virtual Proxy pattern is a memory saving technique that recommends postponing an object creation until it is needed; it is used when creating an object is expensive in terms of memory usage or processing involved. In a typical application, different objects make up different parts of the functionality. When an application is started, it may not need all of its objects to be available immediately. In such cases, the Virtual Proxy pattern suggests deferring objects creation until it is needed by the application. The object that is created the first time is referenced in the application and the same instance is reused from that point onwards. The advantage of this approach is a faster application start-up time, as it is not required to create and load all of the application objects.

Suppose there is a

Company

object in your application and this object contains a list of employees of the company in a

ContactList

object. There could be thousands of employees in a company. Loading the

Company

object from the database along with the list of all its employees in the

ContactList

object could be very time consuming. In some cases you don't even require the list of the employees, but you are forced to wait until the company and its list of employees loaded into the memory.

One way to save time and memory is to avoid loading of the employee objects until required, and this is done using the Virtual Proxy. This technique is also known as Lazy Loading where you are fetching the data only when it is required.

```
01 package com.javacodegeeks.patterns.proxypattern.virtualproxy;
02
03 public class Company {
04
05     private String companyName;
06     private String companyAddress;
07     private String companyContactNo;
08     private ContactList contactList ;
09
10     public Company(String companyName,String companyAddress, String companyContactNo,ContactList
11     contactList){
12         this.companyName = companyName;
13         this.companyAddress = companyAddress;
14         this.companyContactNo = companyContactNo;
15         this.contactList = contactList;
16
17         System.out.println("Company object created...");
18     }
19
20     public String getCompanyName() {
21         return companyName;
22     }
23
24     public String getCompanyAddress() {
25         return companyAddress;
26     }
27
28     public String getCompanyContactNo() {
29         return companyContactNo;
30     }
31
32     public ContactList getContactList(){
33         return contactList;
34     }
35 }
```

The above

Company

class has a reference to

ContactList

interface whose real object will be load only when requested to call of

getContactList()

method.

```
1 package com.javacodegeeks.patterns.proxypattern.virtualproxy;
2
3 import java.util.List;
4
5 public interface ContactList {
6
7     public List<Employee> getEmployeeList();
8 }
```

The

```
ContactList
```

interface only contains one method

```
getEmployeeList()
```

which is used to get the employee list of the company.

```
01 package com.javacodegeeks.patterns.proxyPattern.virtualproxy;
02
03 import java.util.ArrayList;
04 import java.util.List;
05
06 public class ContactListImpl implements ContactList{
07
08     @Override
09     public List<Employee> getEmployeeList() {
10         return getEmpList();
11     }
12
13     private static List<Employee> getEmpList(){
14         List<Employee> empList = new ArrayList<Employee>(5);
15         empList.add(new Employee("Employee A", 2565.55, "SE"));
16         empList.add(new Employee("Employee B", 22574, "Manager"));
17         empList.add(new Employee("Employee C", 3256.77, "SSE"));
18         empList.add(new Employee("Employee D", 4875.54, "SSE"));
19         empList.add(new Employee("Employee E", 2847.01, "SE"));
20         return empList;
21     }
22 }
23 }
```

The above class will create a real

```
ContactList
```

object which will return the list of employees of the company. The object will be loaded on demand, only when required.

```
01 package com.javacodegeeks.patterns.proxyPattern.virtualproxy;
02
03 import java.util.List;
04
05 public class ContactListProxyImpl implements ContactList{
06
07     private ContactList contactList;
08
09     @Override
10     public List<Employee> getEmployeeList() {
11         if(contactList == null){
12             System.out.println("Creating contact list and fetching list of employees...");
13             contactList = new ContactListImpl();
14         }
15         return contactList.getEmployeeList();
16     }
17 }
18 }
```

The

```
ContactListProxyImpl
```

is the proxy class which also implements

```
ContactList
```

and holds a reference to the real

```
ContactList
```

object. On the implementation of the method

```
getEmployeeList()
```

it will check if the

```
contactList
```

reference is null, then it will create a real

```
ContactList
```

object and then will invoke the

```
getEmployeeList()
```

method on it to get the list of the employees.

The Employee class looks like this.

```
01 package com.javacodegeeks.patterns.proxyPattern.virtualproxy;
02
03 public class Employee {
04
```

```

05     private String employeeName;
06     private double employeeSalary;
07     private String employeeDesignation;
08
09     public Employee(String employeeName, double employeeSalary, String employeeDesignation) {
10         this.employeeName = employeeName;
11         this.employeeSalary = employeeSalary;
12         this.employeeDesignation = employeeDesignation;
13     }
14
15     public String getEmployeeName() {
16         return employeeName;
17     }
18
19     public double getEmployeeSalary() {
20         return employeeSalary;
21     }
22
23     public String getEmployeeDesignation() {
24         return employeeDesignation;
25     }
26
27     public String toString() {
28         return "Employee Name: "+employeeName+", EmployeeDesignation: "+employeeDesignation+",
Employee Salary: "+employeeSalary;
29     }
30 }
31 }
32
33 package com.javacodegeeks.patterns.proxypattern.virtualproxy;
34
35 import java.util.List;
36
37 public class TestVirtualProxy {
38
39     public static void main(String[] args) {
40         ContactList contactList = new ContactListProxyImpl();
41         Company company = new Company("ABC Company", "India", "+91-011-28458965", contactList);
42
43         System.out.println("Company Name: "+company.getCompanyName());
44         System.out.println("Company Address: "+company.getCompanyAddress());
45         System.out.println("Company Contact No.: "+company.getCompanyContactNo());
46
47         System.out.println("Requesting for contact list");
48
49         contactList = company.getContactList();
50
51         List<Employee> empList = contactList.getEmployeeList();
52         for(Employee emp : empList){
53             System.out.println(emp);
54         }
55     }
56 }
57 }

```

The above program will have as a result the following output:

```

01 Company object created...
02 Company Name: ABC Company
03 Company Address: India
04 Company Contact No.: +91-011-28458965
05 Requesting for contact list
06 Creating contact list and fetching list of employees...
07 Employee Name: Employee A, EmployeeDesignation: SE, Employee Salary: 2565.55
08 Employee Name: Employee B, EmployeeDesignation: Manager, Employee Salary: 22574.0
09 Employee Name: Employee C, EmployeeDesignation: SSE, Employee Salary: 3256.77
10 Employee Name: Employee D, EmployeeDesignation: SSE, Employee Salary: 4875.54
11 Employee Name: Employee E, EmployeeDesignation: SE, Employee Salary: 2847.01

```

As you can see in the output generated by the

TestVirtualProxy

, first we have created a

Company

object with a proxy

ContactList

object. At this time, the

Company

object holds a proxy reference, not the real

ContactList

object's reference, so there no employee list loaded into the memory. We made some calls on the company object, and then asked for the employee list from the contact list proxy object using the

getEmployeeList()

method. On call of this method, the proxy object creates a real

ContactList

object and provides the list of employees.

5. Protection Proxy

In general, objects in an application interact with each other to implement the overall application functionality. Most application objects are generally accessible to all other objects in the application. At times, it may be necessary to restrict the accessibility of an object only to a limited set of client objects based on their access rights. When a client object tries to access such an object, the client is given access to the services provided by the object only if the client can furnish proper authentication credentials. In such cases, a separate object can be designated with the responsibility of verifying the access privileges of different client objects when they access the actual object. In other words, every client must successfully authenticate with this designated object to get access to the actual object functionality. Such an object with which a client needs to authenticate to get access to the actual object can be referred to as an object authenticator which is implemented using the Protection Proxy.

Returning back to the

ReportGenerator

application that we developed for the pizza company, the owner now requires that only he can generate the daily report. No other employee should be able to do so.

To implement this security feature, we used Protection Proxy which checks if the object which is trying to generate the report is the owner; in this case, the report gets generated, otherwise it is not.

```
1 package com.javacodegeeks.patterns.proxyPattern.protectionproxy;
2
3 public interface Staff {
4
5     public boolean isOwner();
6     public void setReportGenerator(ReportGeneratorProxy reportGenerator);
7 }
```

The

Staff

interface is used by the

Owner

and the

Employee

classes and the interface has two methods:

isOwner()

returns a

boolean

to check whether the calling object is the owner or not. The other method is used to set the

ReportGeneratorProxy

which is a protection proxy used to generate the report is

isOwner()

method return true.

```
01 package com.javacodegeeks.patterns.proxyPattern.protectionproxy;
02
03 public class Employee implements Staff{
04
05     private ReportGeneratorProxy reportGenerator;
06
07     @Override
08     public void setReportGenerator(ReportGeneratorProxy reportGenerator){
09         this.reportGenerator = reportGenerator;
10     }
11
12     @Override
13     public boolean isOwner() {
14         return false;
15     }
16
17     public String generateDailyReport(){
18         try {
19             return reportGenerator.generateDailyReport();
20         } catch (Exception e) {
21             e.printStackTrace();
22         }
23         return "";
24     }
25 }
26 }
```

The

Employee

class implements the

Staff

interface, since it's an employee

isOwner()

method return

false

. The

generateDailyReport()

method ask

ReportGenerator

to generate the daily report.

```
01 package com.javacodegeeks.patterns.proxypattern.protectionproxy;
02
03 public class Owner implements Staff {
04
05     private boolean isOwner=true;
06     private ReportGeneratorProxy reportGenerator;
07
08     @Override
09     public void setReportGenerator(ReportGeneratorProxy reportGenerator){
10         this.reportGenerator = reportGenerator;
11     }
12
13     @Override
14     public boolean isOwner(){
15         return isOwner;
16     }
17
18     public String generateDailyReport(){
19         try {
20             return reportGenerator.generateDailyReport();
21         } catch (Exception e) {
22             e.printStackTrace();
23         }
24         return "";
25     }
26
27 }
```

The

Owner

class looks almost same as the

Employee

class, the only difference is that the

isOwner()

method returns

true

.

```
1 package com.javacodegeeks.patterns.proxypattern.protectionproxy;
2
3 public interface ReportGeneratorProxy {
4
5     public String generateDailyReport();
6 }
```

The

ReportGeneratorProxy

acts as a Protection Proxy which has only one method

generateDailyReport()

that is used to generate the report.

```
01 package com.javacodegeeks.patterns.proxypattern.protectionproxy;
02
03 import java.rmi.Naming;
04
05 import com.javacodegeeks.patterns.proxypattern.remoteproxy.ReportGenerator;
```

```

06
07 public class ReportGeneratorProtectionProxy implements ReportGeneratorProxy{
08
09     ReportGenerator reportGenerator;
10     Staff staff;
11
12     public ReportGeneratorProtectionProxy(Staff staff){
13         this.staff = staff;
14     }
15
16     @Override
17     public String generateDailyReport() {
18         if(staff.isOwner()){
19             ReportGenerator reportGenerator = null;
20             try {
21                 reportGenerator =
22                 (ReportGenerator)Naming.lookup("rmi://127.0.0.1/PizzaCoRemoteGenerator");
23                 return reportGenerator.generateDailyReport();
24             } catch (Exception e) {
25                 e.printStackTrace();
26             }
27             return "";
28         }
29         else{
30             return "Not Authorized to view report.";
31         }
32     }

```

The above class is the concrete implementation of the

ReportGeneratorProxy

which holds a reference to the

ReportGenerator

interface which is the remote proxy. In the

generateDailyReport()

method, it checks if the staff is referring to the owner, then asks the remote proxy to generate the report, otherwise it returns a string with "Not Authorized to view report" as a message.

```

01 package com.javacodegeeks.patterns.proxypattern.protectionproxy;
02
03 public class TestProtectionProxy {
04
05     public static void main(String[] args) {
06
07         Owner owner = new Owner();
08         ReportGeneratorProxy reportGenerator = new ReportGeneratorProtectionProxy(owner);
09         owner.setReportGenerator(reportGenerator);
10
11         Employee employee = new Employee();
12         reportGenerator = new ReportGeneratorProtectionProxy(employee);
13         employee.setReportGenerator(reportGenerator);
14         System.out.println("For owner:");
15         System.out.println(owner.generateDailyReport());
16         System.out.println("For employee:");
17         System.out.println(employee.generateDailyReport());
18     }
19 }
20
21

```

The above program will have as a result the following output:

```

01 For owner:
02 *****Location X Daily Report*****
03 Location ID: 012
04 Today's Date: Sun Sep 14 13:28:12 IST 2014
05 Total Pizza Sell: 112
06 Total Sale: $2534
07 Net Profit: $1985
08 *****
09 For employee:
10 Not Authorized to view report.

```

The above output clearly shows that the owner can generate the report, whereas, the employee does not. The Protection Proxy protects the access of generating the report and only allows the authorized objects to generate the report.

6. When to use the Proxy Pattern

Proxy is applicable whenever there is a need for a more versatile or sophisticated reference to an object than a simple pointer. Here are several common situations in which the Proxy pattern is applicable:

1. A remote proxy provides a local representative for an object in a different address space.
2. A virtual proxy creates expensive objects on demand.
3. A protection proxy controls access to the original object. Protection proxies are useful when objects should have different access rights.

7. Other Proxies

Besides the above discussed three main proxies, there are some other kinds of proxies.

1. **Cache Proxy/Server Proxy:** To provide the functionality required to store the results of most frequently used target operations. The proxy object stores these results in some kind of a repository. When a client object requests the same operation, the proxy returns the operation results from the storage area without actually accessing the target object.
2. **Firewall Proxy:** The primary use of a firewall proxy is to protect target objects from bad clients. A firewall proxy can also be used to provide the functionality required to prevent clients from accessing harmful targets.
3. **Synchronization Proxy:** To provide the required functionality to allow safe concurrent accesses to a target object by different client objects.
4. **Smart Reference Proxy:** To provide the functionality to prevent the accidental disposal/deletion of the target object when there are clients currently with references to it. To accomplish this, the proxy keeps a count of the number of references to the target object. The proxy deletes the target object if and when there are no references to it.
5. **Counting Proxy:** To provide some kind of audit mechanism before executing a method on the target object.

8. Proxy Pattern in JDK

The following cases are examples of usage of the Proxy Pattern in the JDK.

1. `java.lang.reflect.Proxy`
2. `java.rmi.*` (whole package)

9. Download the Source Code

This was a lesson on Proxy Pattern. You may download the source code here: **ProxyPattern-Project.zip**

Tagged with: DESIGN PATTERNS



(0 rating, 0 votes)

You need to be a registered member to rate this. 2 Comments 189 Views Tweet it!

Do you want to know how to develop your skillset to become a **Java Rockstar?**



Subscribe to our newsletter to start Rocking right now!
To get you started we give you our best selling eBooks for **FREE!**

1. JPA Mini Book
2. JVM Troubleshooting Guide
3. JUnit Tutorial for Unit Testing
4. Java Annotations Tutorial
5. Java Interview Questions
6. Spring Interview Questions
7. Android UI Design

and many more

Email address:

LIKE THIS ARTICLE? READ MORE FROM JAVA CODE GEEKS



JVM Architecture: JVM Class loader and Runtime Data Areas



Strategy Pattern with CDI and lambdas
April 11th, 2018



JDK 11 and proxies in a world past sun.misc.Unsafe
April 11th, 2018