


Four-state atlas: non-Ricci metrics across 11 B3 anchors (1/2)

Each anchor contains four observed means: tranquil reference, local pre-event, event-containing, and post-event. Within each metric row, values are min--max scaled across its 44 anchor-by-phase means.

Solid blue circles identify the four configured core events; orange diamonds identify the additional 1999 -3σ trigger; gray squares identify the six fallback largest-local-drop sensitivity proxies. Lines join phase means within an anchor only.

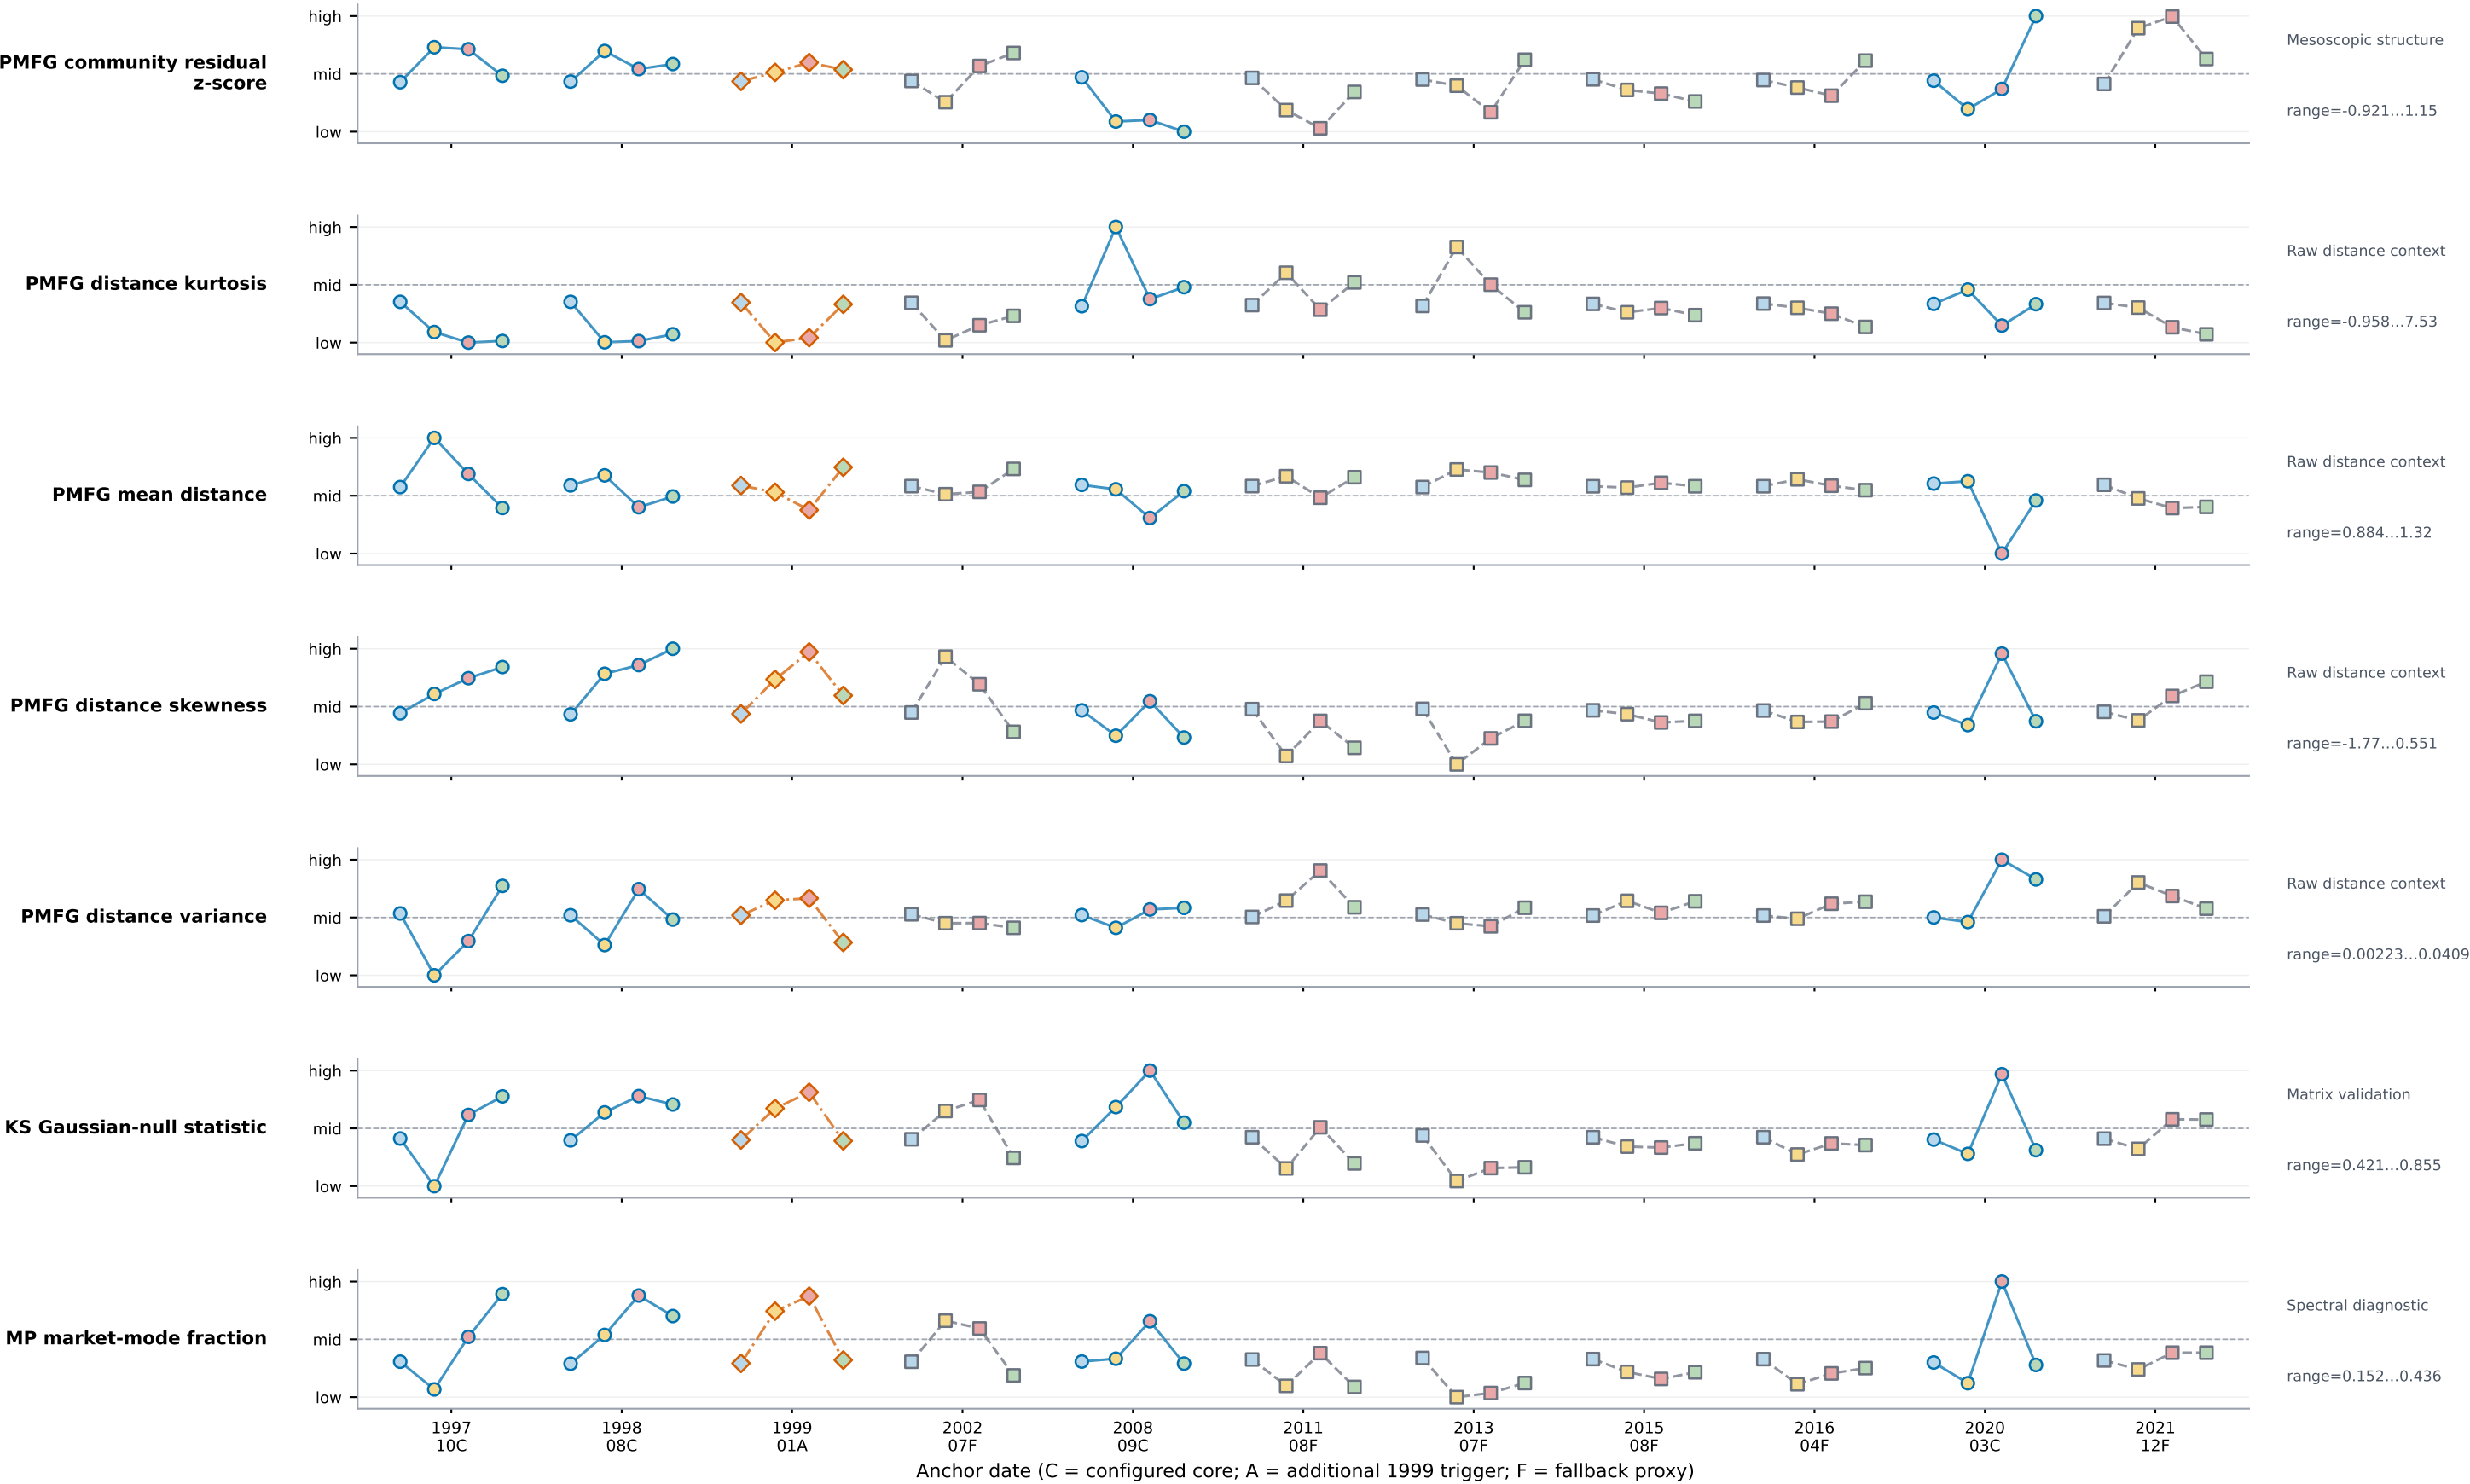

Tranquil Pre-event Event-containing Post-event Four configured core events Additional 1999 -3σ trigger Six fallback proxies

Each metric is independently min--max scaled across its 44 observed phase means; compare profiles only within a row. The tranquil reference excludes local phase windows; pre, event-containing, and post contain 6, 12, and 6 rolling windows. Overlap prevents independent-event inference; this sensitivity atlas is descriptive, not causal or predictive.