


Simplified Main Experiment Flow

This diagram follows one C program through the main experiment after the translation prompt has already been selected and fixed. It omits implementation files, hashes, detailed error categories, and operational failure branches.

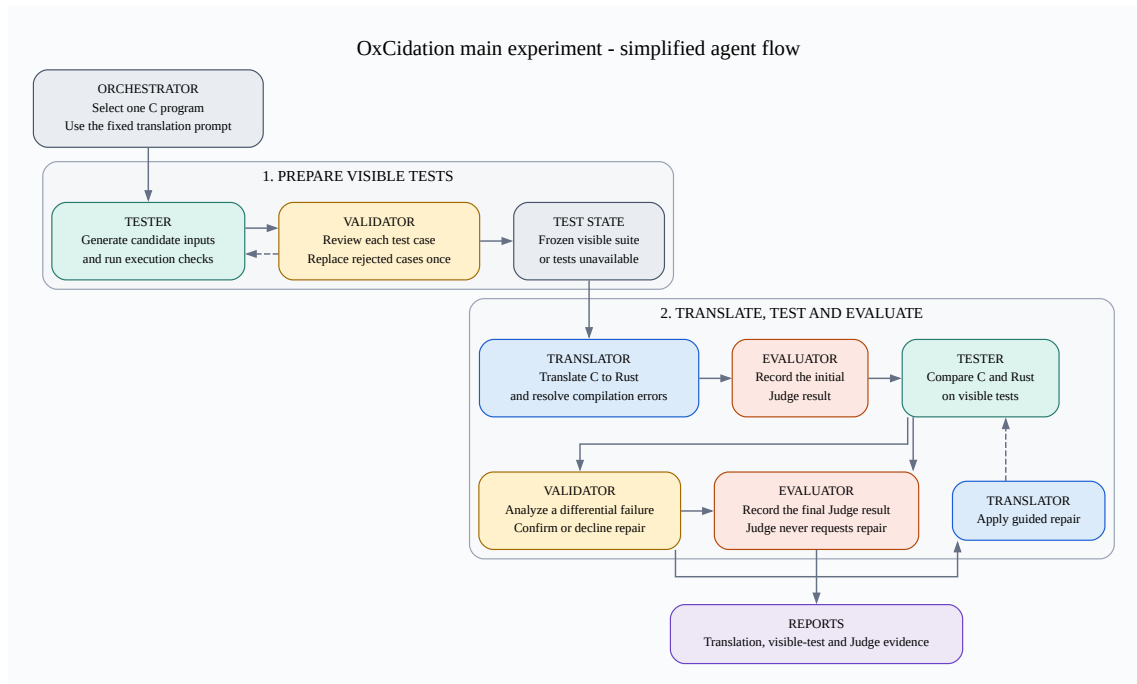

The visible-test suite is prepared once before translation. Approved cases are frozen and reused. Only a confirmed visible-test translation discrepancy can guide a repair. The initial and final Judge results are external observations and never enter the repair loop.

The [detailed benchmark flow](#) additionally shows how each program is combined with every candidate prompt during prompt selection, along with implementation boundaries and terminal states.

The editable source is [assets/experiment-agent-flow-simple.dot](#) .