


Simplified Main Experiment Flow

This diagram follows one C program through the main experiment after the translation prompt has already been selected and fixed. It omits implementation files, hashes, detailed error categories, and operational failure branches.

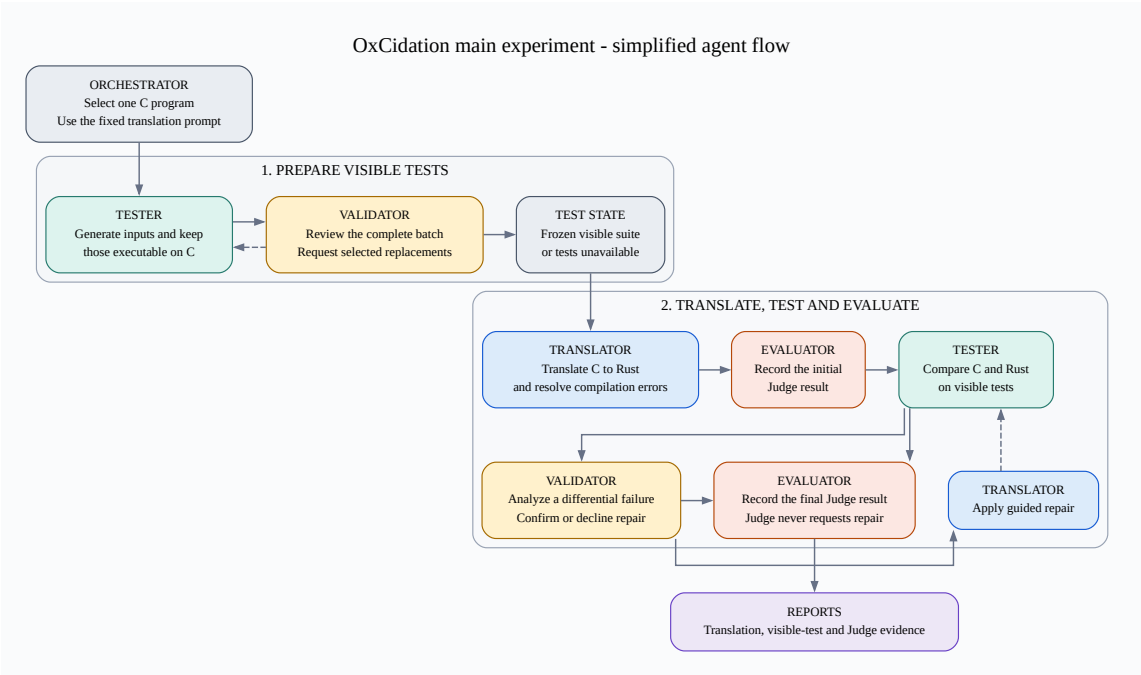

The visible-test suite is prepared once before translation. Executable cases are preserved, the complete batch is reviewed, and only requested slots are replaced. The frozen suite is then reused. Only a confirmed visible-test translation discrepancy can guide a Rust repair. Judge results never enter the repair loop.

The [detailed benchmark flow](#) additionally shows how each program is combined with every candidate prompt during prompt selection, along with implementation boundaries and terminal states.

The editable source is [assets/experiment-agent-flow-simple.dot](#) .