
void lambda::processRce()

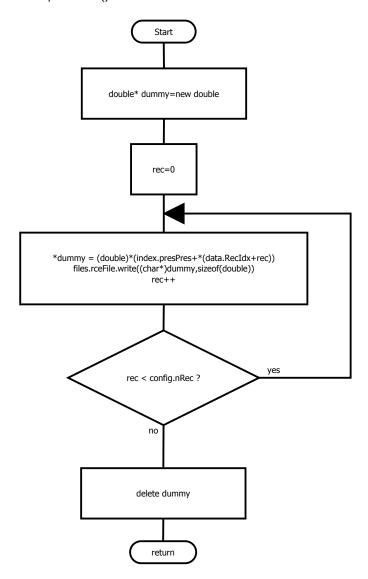

cast the receiver's node pressure value to double and copy it into the dummy. Then append it to the receiver file. Repeat for all receivers.