

Week – 11 Practical

1. Develop a multithreaded counter application using POSIX threads (pthread_create, pthread_join). Demonstrate race conditions by allowing multiple threads to update a shared variable concurrently.

```
priyanka@DESKTOP-HOISO7/  ×  +  ∨

GNU nano 8.7.1 src/race_condition.c *
#include <stdio.h>
#include <pthread.h>

#define NUM_THREADS 4
#define ITERATIONS 100000

int counter = 0;

void *increment(void *arg) {
    for (int i = 0; i < ITERATIONS; i++) {
        counter++;
    }

    return NULL;
}

int main() {
    pthread_t threads[NUM_THREADS];

    for (int i = 0; i < NUM_THREADS; i++) {
        pthread_create(&threads[i], NULL, increment, NULL);
    }

    for (int i = 0; i < NUM_THREADS; i++) {
        pthread_join(threads[i], NULL);
    }

    printf("Expected counter: %d\n",
           NUM_THREADS * ITERATIONS);

    printf("Actual counter: %d\n", counter);

    return 0;
}
```

Output:

```
priyanka@DESKTOP-HOISO7/  ×  +  ∨  -  □

priyanka@DESKTOP-HOISO7A:~$ cd ~/OS_Skill
mkdir -p Week-11/src Week-11/bin
cd Week-11
priyanka@DESKTOP-HOISO7A:~/OS_Skill/Week-11$ nano src/race_condition.c

priyanka@DESKTOP-HOISO7A:~/OS_Skill/Week-11$ gcc src/race_condition.c -o bin/race_condition -pthread
priyanka@DESKTOP-HOISO7A:~/OS_Skill/Week-11$ ./bin/race_condition
Expected counter: 400000
Actual counter: 164373
priyanka@DESKTOP-HOISO7A:~/OS_Skill/Week-11$ |
```

2. Modify the previous program using mutex locks (`pthread_mutex_lock`, `pthread_mutex_unlock`) and compare the outputs with the race-condition version. Analyze the impact of synchronization.



```
GNU nano 8.7.1 src/mutex_counter.c *
#include <stdio.h>
#include <pthread.h>

#define NUM_THREADS 4
#define ITERATIONS 100000

int counter = 0;
pthread_mutex_t lock;

void *increment(void *arg) {
    for (int i = 0; i < ITERATIONS; i++) {
        pthread_mutex_lock(&lock);

        counter++;

        pthread_mutex_unlock(&lock);
    }
    return NULL;
}

int main() {
    pthread_t threads[NUM_THREADS];

    pthread_mutex_init(&lock, NULL);

    for (int i = 0; i < NUM_THREADS; i++) {
        pthread_create(&threads[i], NULL, increment, NULL);
    }

    for (int i = 0; i < NUM_THREADS; i++) {
        pthread_join(threads[i], NULL);
    }


    printf("Expected counter: %d\n",
        NUM_THREADS * ITERATIONS);

    printf("Actual counter: %d\n", counter);

    pthread_mutex_destroy(&lock);

    return 0;
}
```

Output:

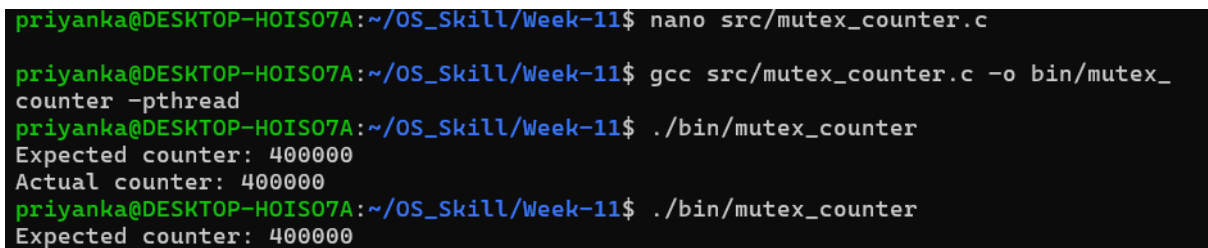

```
priyanka@DESKTOP-HOISO7A:~/OS_Skill/Week-11$ nano src/mutex_counter.c
priyanka@DESKTOP-HOISO7A:~/OS_Skill/Week-11$ gcc src/mutex_counter.c -o bin/mutex_
counter -pthread
priyanka@DESKTOP-HOISO7A:~/OS_Skill/Week-11$ ./bin/mutex_counter
Expected counter: 400000
Actual counter: 400000
priyanka@DESKTOP-HOISO7A:~/OS_Skill/Week-11$ ./bin/mutex_counter
Expected counter: 400000
```