

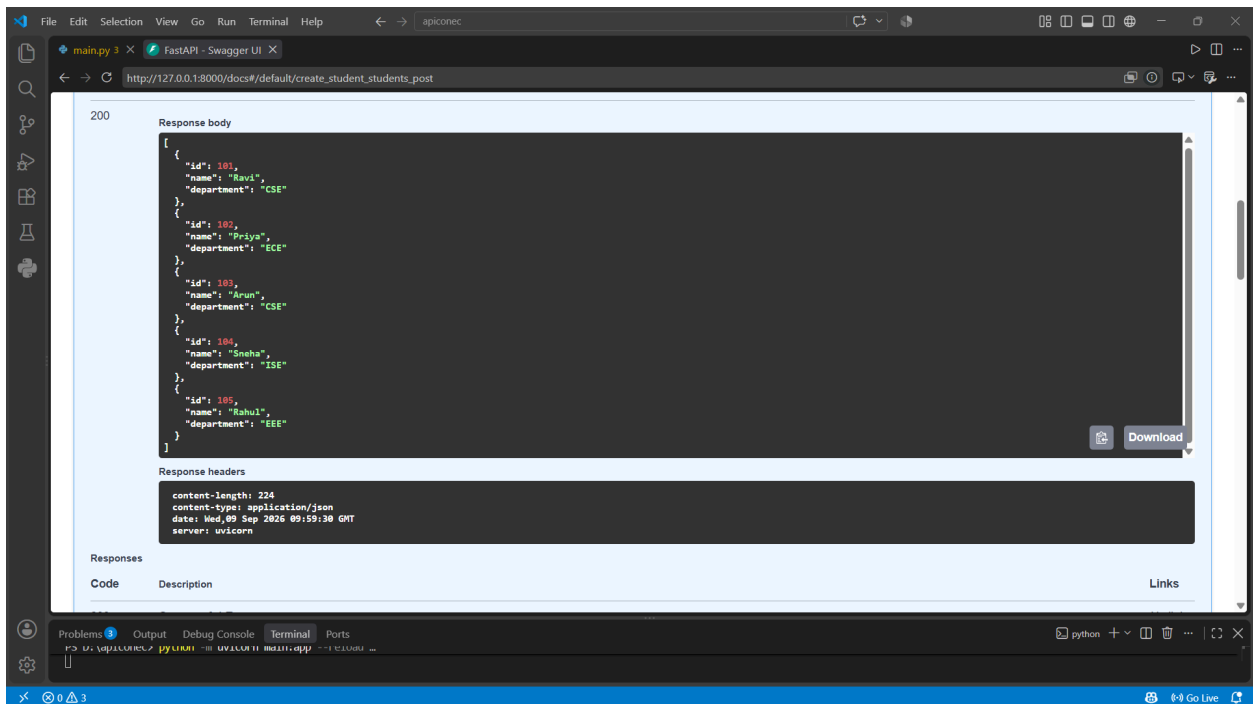
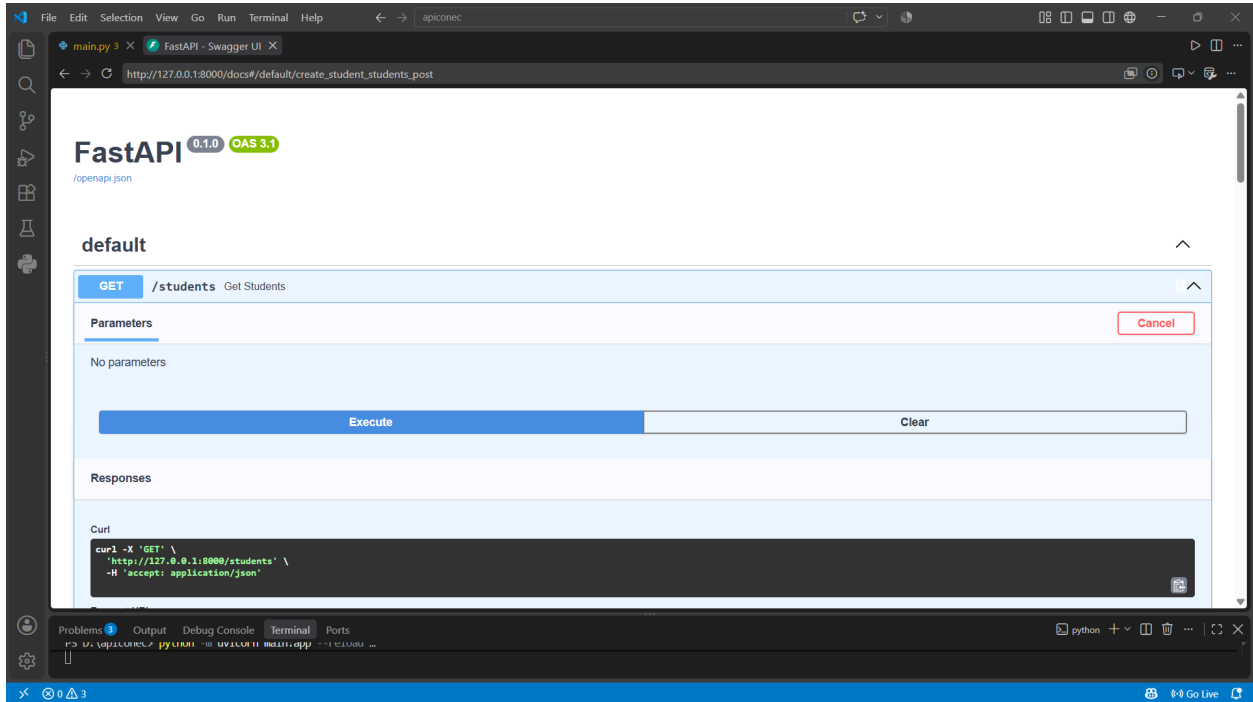


Week 5 Skill

GET/students

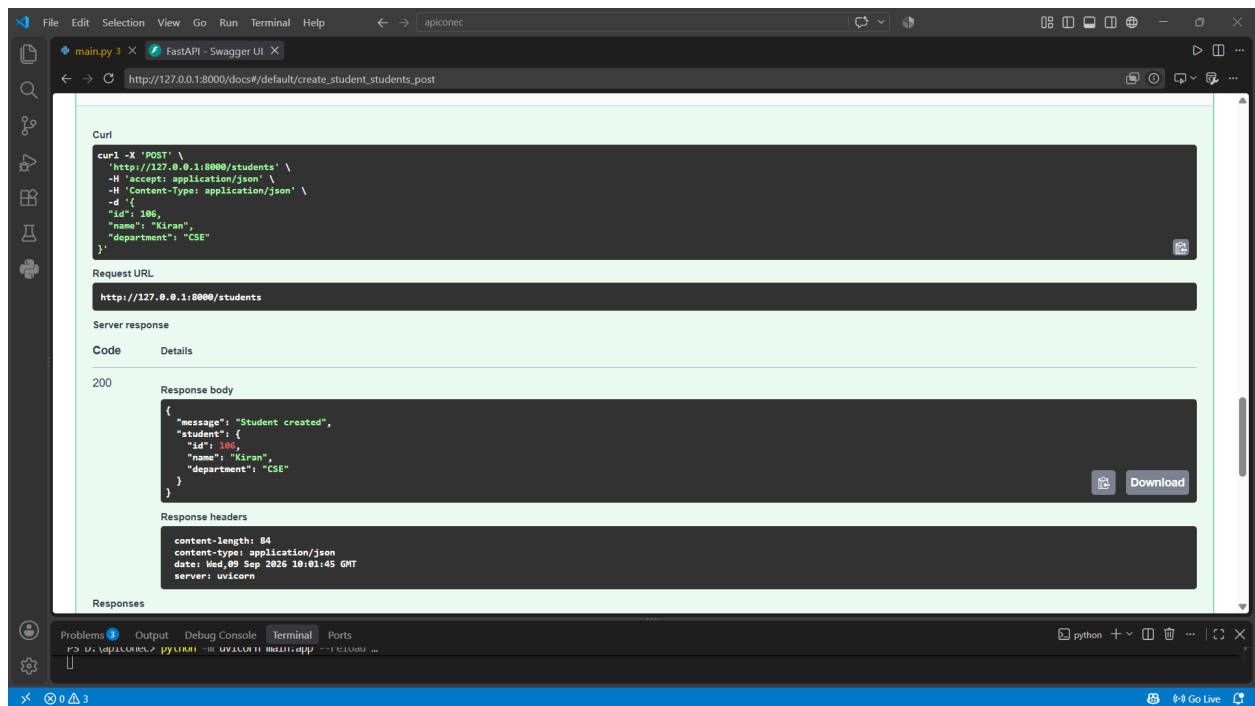

POST/students

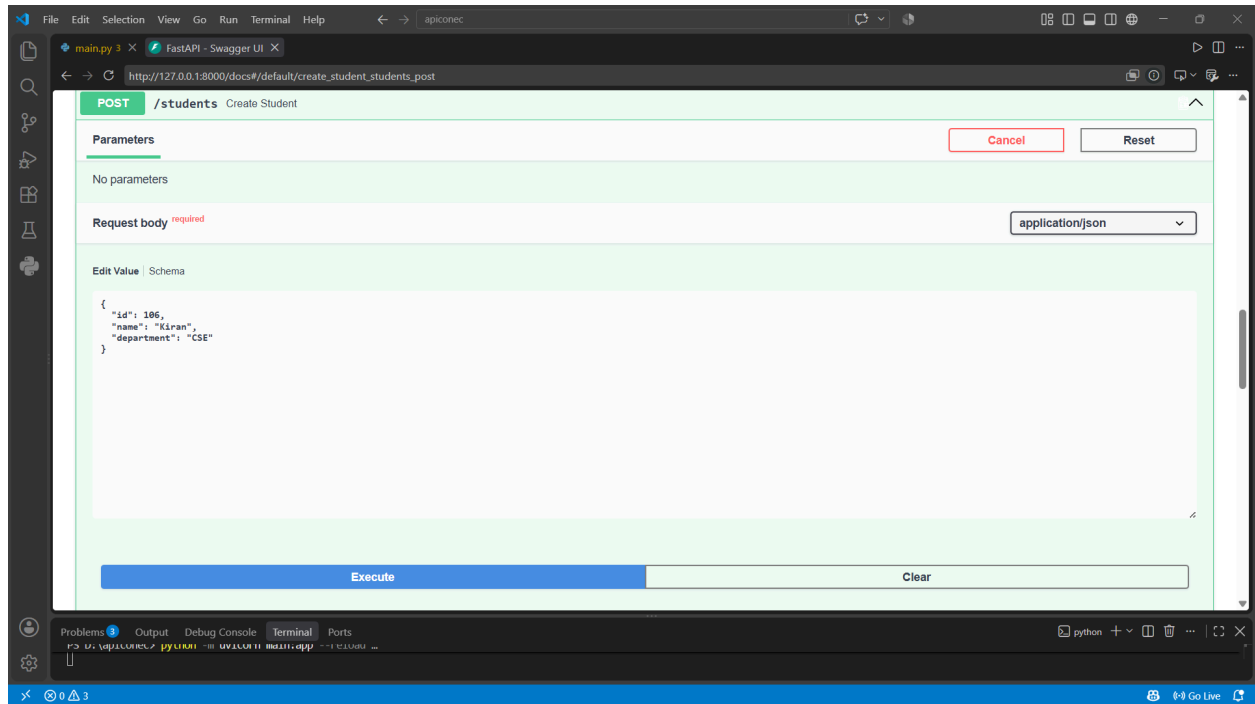

Output

The screenshot shows the MySQL Workbench interface. The SQL editor contains the following code:

```
USE university;

CREATE TABLE students (
  id INT PRIMARY KEY,
  name VARCHAR(100),
  department VARCHAR(100)
);

INSERT INTO students (id, name, department)
VALUES
(101, 'Ravi', 'CSE'),
(102, 'Priya', 'ECE'),
(103, 'Arun', 'CSE'),
(104, 'Sneha', 'ISE'),
(105, 'Rahul', 'EEE'),
(106, 'Kiran', 'CSE');
```

The Results tab shows the following data:

id	name	department
101	Ravi	CSE
102	Priya	ECE
103	Arun	CSE
104	Sneha	ISE
105	Rahul	EEE
106	Kiran	CSE

The Output tab shows the following action output:

#	Time	Action	Message	Duration / Fetch
7	15:17:05	CREATE TABLE students (id INT PRIMARY KEY, name VARCHAR(100), department VARCHAR(100))	Error Code: 1050. Table 'students' already exists	0.000 sec
8	15:17:05	USE university	0 row(s) affected	0.000 sec
9	15:17:05	INSERT INTO students (id, name, department) VALUES (101, 'Ravi', 'CSE'), (102, 'Priya', 'ECE'), (103, 'Arun', 'CSE'), (104, 'Sneha', 'ISE'), (105, 'Rahul', 'EEE'), (106, 'Kiran', 'CSE');	5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0	0.015 sec

PUT/students/{student_id}

The screenshot shows the Swagger UI for the PUT /students/{student_id} endpoint. The parameters section shows a required integer parameter named student_id. The request body section shows a required application/json body with the following schema:

```
{
  "id": 101,
  "name": "Ravi Kumar",
  "department": "CSE"
}
```

The Execute button is visible at the bottom of the interface.

Output

The screenshot shows the MySQL Workbench interface. The left sidebar displays the 'SCHEMAS' tree with a search filter. The main editor window contains the following SQL code:

```
5 • CREATE TABLE students (  
6     id INT PRIMARY KEY,  
7     name VARCHAR(100),  
8     department VARCHAR(100)  
9 );  
10  
11  
12 • INSERT INTO students (id, name, department)  
13 VALUES  
14 (101, 'Ravi', 'CSE'),  
15 (102, 'Priya', 'ECE'),  
16 (103, 'Arun', 'CSE'),  
17 (104, 'Sneha', 'ISE'),  
18 (105, 'Rahul', 'EEE'),  
19  
20 • SELECT * FROM students;
```

Below the editor, the 'Result Grid' shows the output of the SELECT query:

id	name	department
101	Ravi Kumar	CSE
102	Priya	ECE
103	Arun	CSE
104	Sneha	ISE
105	Rahul	EEE
106	Kiran	CSE
107	...	...

The 'Output' pane at the bottom shows the execution log:

#	Time	Action	Message	Duration / Fetch
10	15:17:05	SELECT * FROM students LIMIT 0, 1000	5 row(s) returned	0.000 sec / 0.000 sec
11	15:31:54	SELECT * FROM students LIMIT 0, 1000	7 row(s) returned	0.000 sec / 0.000 sec
12	15:43:52	SELECT * FROM students LIMIT 0, 1000	7 row(s) returned	0.000 sec / 0.000 sec

DELETE/students/{student_id}

The screenshot shows a REST client interface for the endpoint `DELETE /students/{student_id}`. The 'Parameters' section shows the `student_id` parameter set to `105`. The 'Execute' button is highlighted. Below, the 'Responses' section shows the curl command and the response details:

```
curl -X 'DELETE' \
  'http://127.0.0.1:8080/students/105' \
  -H 'accept: application/json'
```

The 'Request URL' is `http://127.0.0.1:8080/students/105`. The 'Server response' shows a status code of `200` and a 'Response body'.

Output

MySQL Workbench

Geys x

File Edit View Query Database Server Tools Scripting Help

Navigator Skill_3_1 Skill_3_2 SQL File 4" SQL File 5" x

Limit to 1000 rows

SQLAdditions: Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

SCHEMAS

Filter objects

- a2520090123
- b2520090123
- bankdb
- bookflow2_db
- bookflow_db
- Tables
- Views
- Stored Procedures
- Functions
- bookflow_db
- geys_2520090123_db
- sys

Administration Schemas

Information

No object selected

```
5 CREATE TABLE students (  
6     id INT PRIMARY KEY,  
7     name VARCHAR(100),  
8     department VARCHAR(100)  
9 );  
10  
11  
12 INSERT INTO students (id, name, department)  
13 VALUES  
14     (101, 'Ravi', 'CSE'),  
15     (102, 'Priya', 'ECE'),  
16     (103, 'Arun', 'CSE'),  
17     (104, 'Sneha', 'ISE'),  
18     (105, 'Rahul', 'EEE');  
19  
20 SELECT * FROM students;
```

Result Grid

	id	name	department
0	string	string	
101		Ravi Kumar	CSE
102		Priya	ECE
103		Arun	CSE
104		Sneha	ISE
106		Kiran	CSE
*	NULL	NULL	NULL

students 5 x

Apply Revert Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
11	15:31:54	SELECT * FROM students LIMIT 0, 1000	7 row(s) returned	0.000 sec / 0.000 sec
12	15:43:52	SELECT * FROM students LIMIT 0, 1000	7 row(s) returned	0.000 sec / 0.000 sec
13	15:44:41	SELECT * FROM students LIMIT 0, 1000	6 row(s) returned	0.000 sec / 0.000 sec

Object Info Session