

Select a project

AF

Q Search

RECENT STARRED ALL

Project 2023Aug project-2023aug-396306

☆ New-Proj-4-mutt ②

☆ My Project ②
extreme-lodge-175822

☆ proj-cp-0807
proj-cp-0807

🦀 👫 Mir Droiant - 🙉

APIs & Services




Credentials

Page usage agreements

OAuth consent screen



RPI APIs & Services



Create credentials to access your enabled APIs. <u>Learn</u> more ☑

API Keys

Name Creation date V Restrictions V

No API keys to display

OAuth 2.0 Client IDs

Desktop Aug 18, 2023 Desktop 360

Service Accounts

Manage service accounts

Email Name 1 Actions

API APIs & Services

+ CREATE CREDENTIALS

Create credentials to access your enabled APIs. Learn more [∠]


API Keys

Credentials

Creation date Restrictions Name

No API keys to display


OAuth 2.0 Client IDs



Name

Desktop

client foo





Aug 18, 2023







Desktop



369



















API APIs & Services



Credentials





API key

Identifies your project using a simple API key to check quota

OAuth client ID

Requests user concent so your app can access the user's data


Service account

Enables server-to-server, app-level authentication using robot accounts


Help me choose

Asks a few questions to help you decide which type of credential to use

RPI APIs & Services



A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See Setting up OAuth 2.0 [2] for more information. Learn more [2] about OAuth client types.

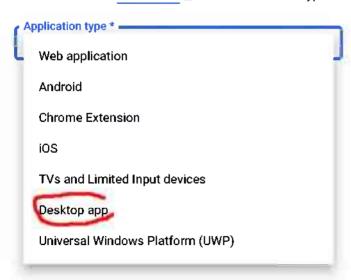

more information. Learn more 🖸 about OAuth client types.

Application cone
Desktop app

THE WAR THE WITH WITHOUT THE W

oauth2 for mutt 2023sep eros jail mai

The name of your OAuth 2.0 client. The stain he is only used to identify the chient in the console and will not be shown to end users.

Note: It may take 5 minutes to a few hours for settings to take effect

CREATE

CANCEL

