


examples/mercenne-prime
/lockfree_queue.h

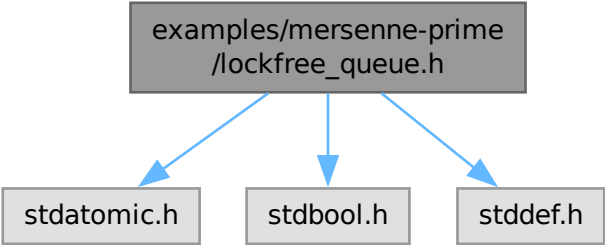

```
graph TD; A["examples/mercenne-prime<br/>/lockfree_queue.h"] --> B["stdatomic.h"]; A --> C["stdbool.h"]; A --> D["stddef.h"];
```

The diagram illustrates the dependencies of the file `examples/mercenne-prime/lockfree_queue.h`. It is represented as a box at the top, with three blue arrows pointing downwards to three separate boxes below it. These boxes represent the header files that the main file depends on: `stdatomic.h`, `stdbool.h`, and `stddef.h`.

stdatomic.h

stdbool.h

stddef.h